




**C.P.T.**  
*Precision Tools*




Metric 2009-10



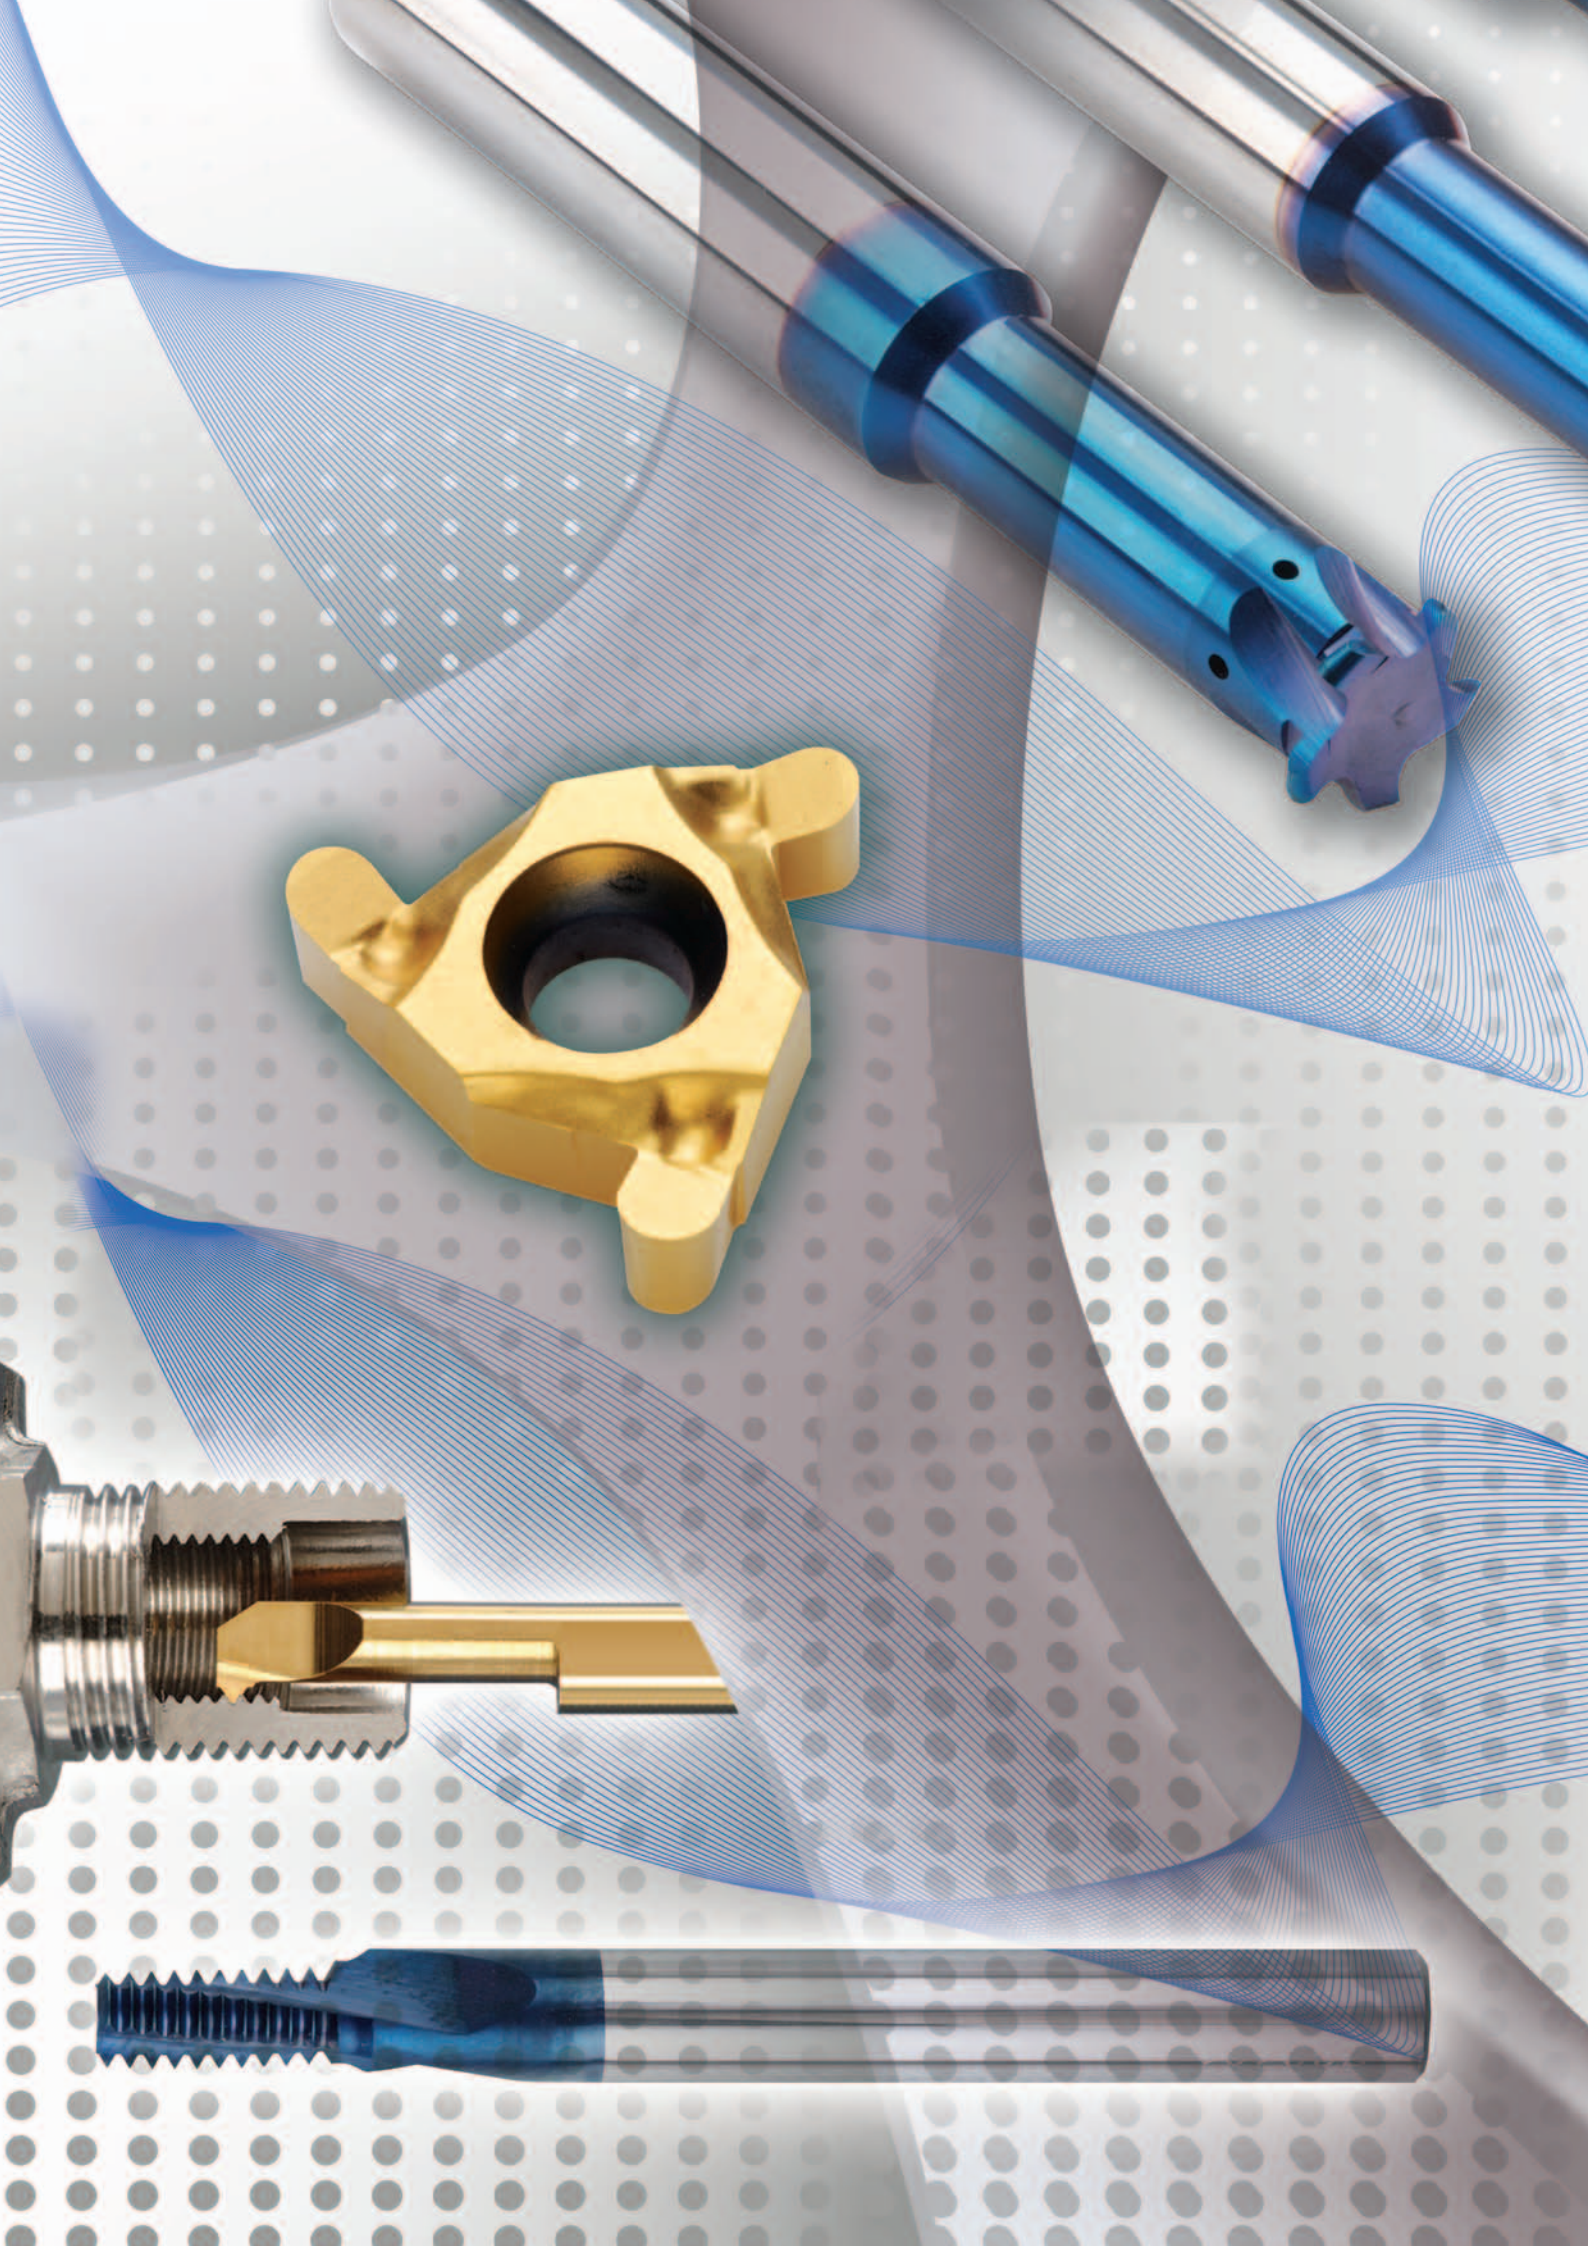



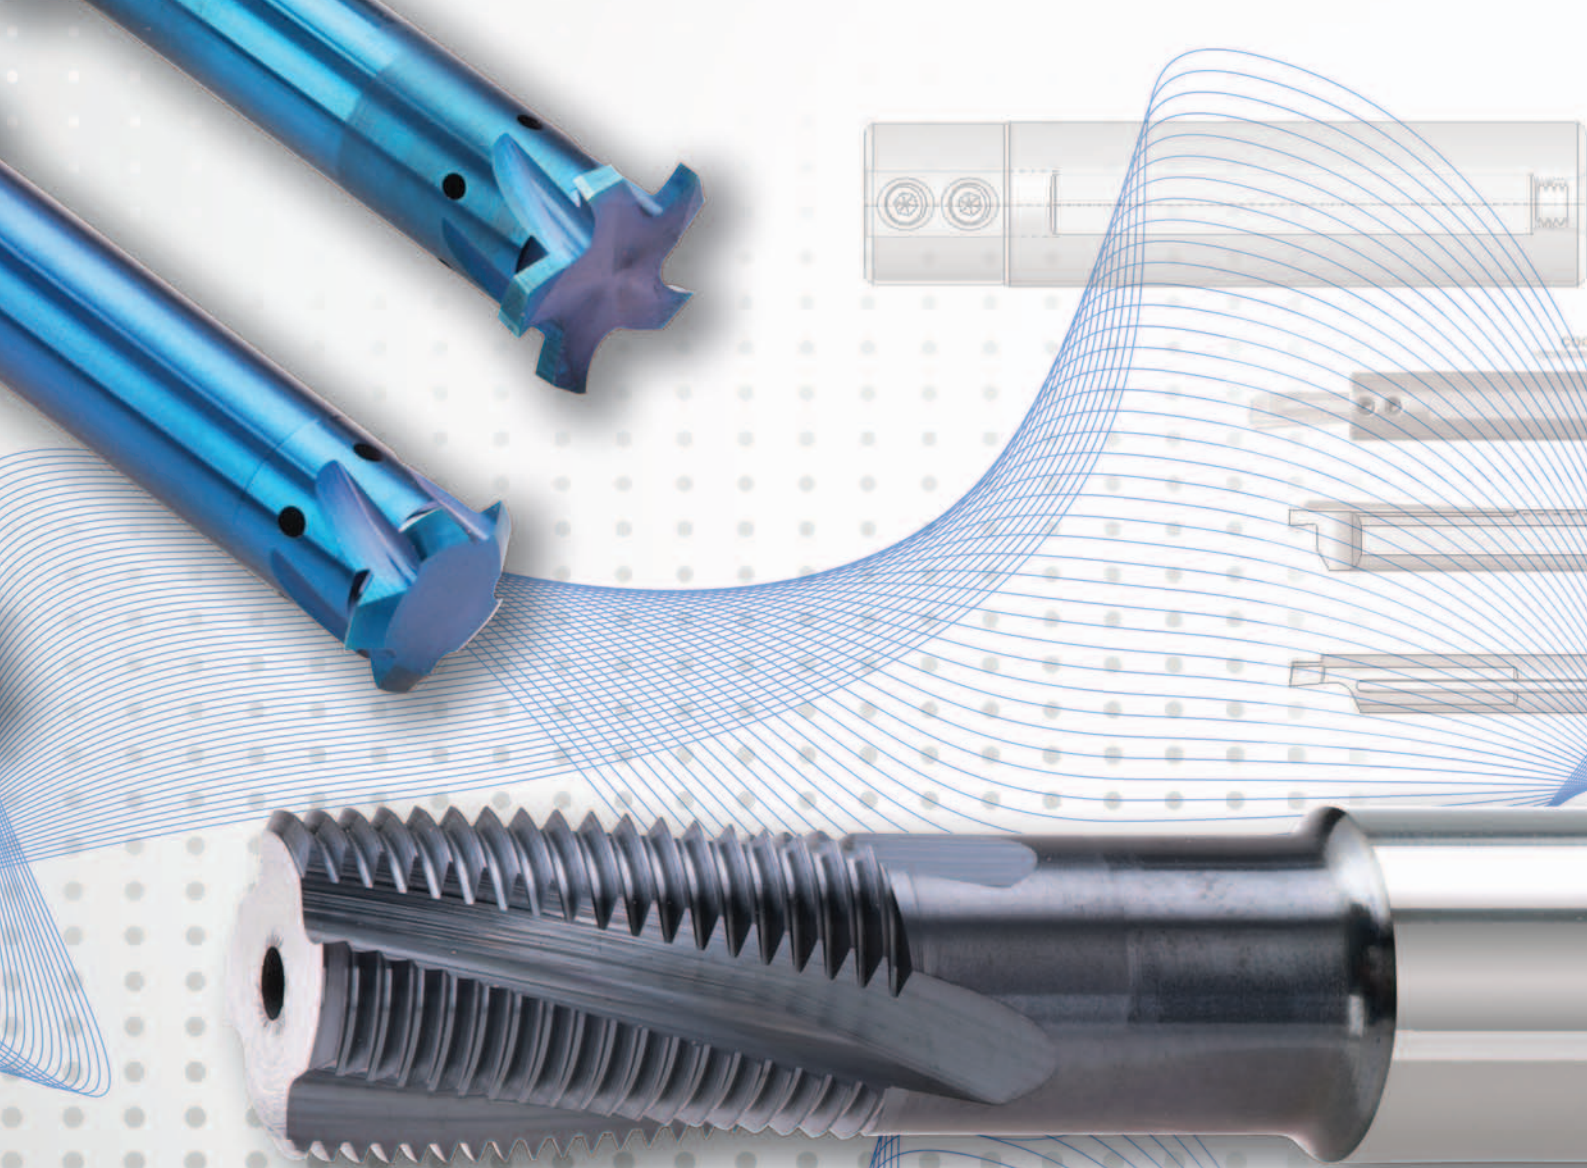

















## **Company Profile**

**CPT is a leading manufacturer of high quality cutting tools.**


### **PRODUCT LINES**

*Thread Turning inserts and Tool holders, Mill-Thread inserts and Tool holders, Mill-Thread Solid Carbide, Spiral Mill-Thread, Grooving tools, Mini Chamfer mills and the Tiny-Tools line of small boring bars for threading, turning, grooving small parts. The company's different product lines are recognized worldwide as advanced technology, reliable full range lines that offer accurate geometry, excellent cutting performance and extended tool life. CPT also produces special tools in accordance with customer's requirements. CPT holds the ISO 9001:2008 certificate of international quality assurance. Our products and the service we provide, live up to the highest standards and outperform them. Most of our customers' requirements are supplied immediately from our readily available wide range of stock in Germany, as well as from our agents and distributors' stocks around the world. CPT is also in the process to be certified by the ISO 14001 environmental management systems as part of our policy of environmental care.*

	CONTENTS	PAGE
	<u>Thread Turning Inserts</u>	3-30
	<u>Thread Turning Toolholders and Kits</u>	31-42
	<u>Thread Turning Technical Section</u>	43-50
	<u>Grooving Tools</u>	51-54
	<u>Mill-Thread Inserts and Kits</u>	55-64
	<u>Mill-Thread Toolholders</u>	65-72
	<u>Spiral Mill-Thread and Finishing</u>	73-82
	<u>Mill-Thread Solid Carbide</u>	83-102
	<u>Mini Mill-Thread</u>	103-110
	<b>HARD</b> 	111-116
	<u>Mill-Thread Technical Section</u>	117-128
	<u>Solid Carbide Milling Tools for Grooving Deep Parts</u>	129-132
	<u>Mini Chamfer</u>	133-136
	<u>Turning Tools</u>	137-138
	<u>Tiny Tools</u>	139-158



# Thread Turning Inserts

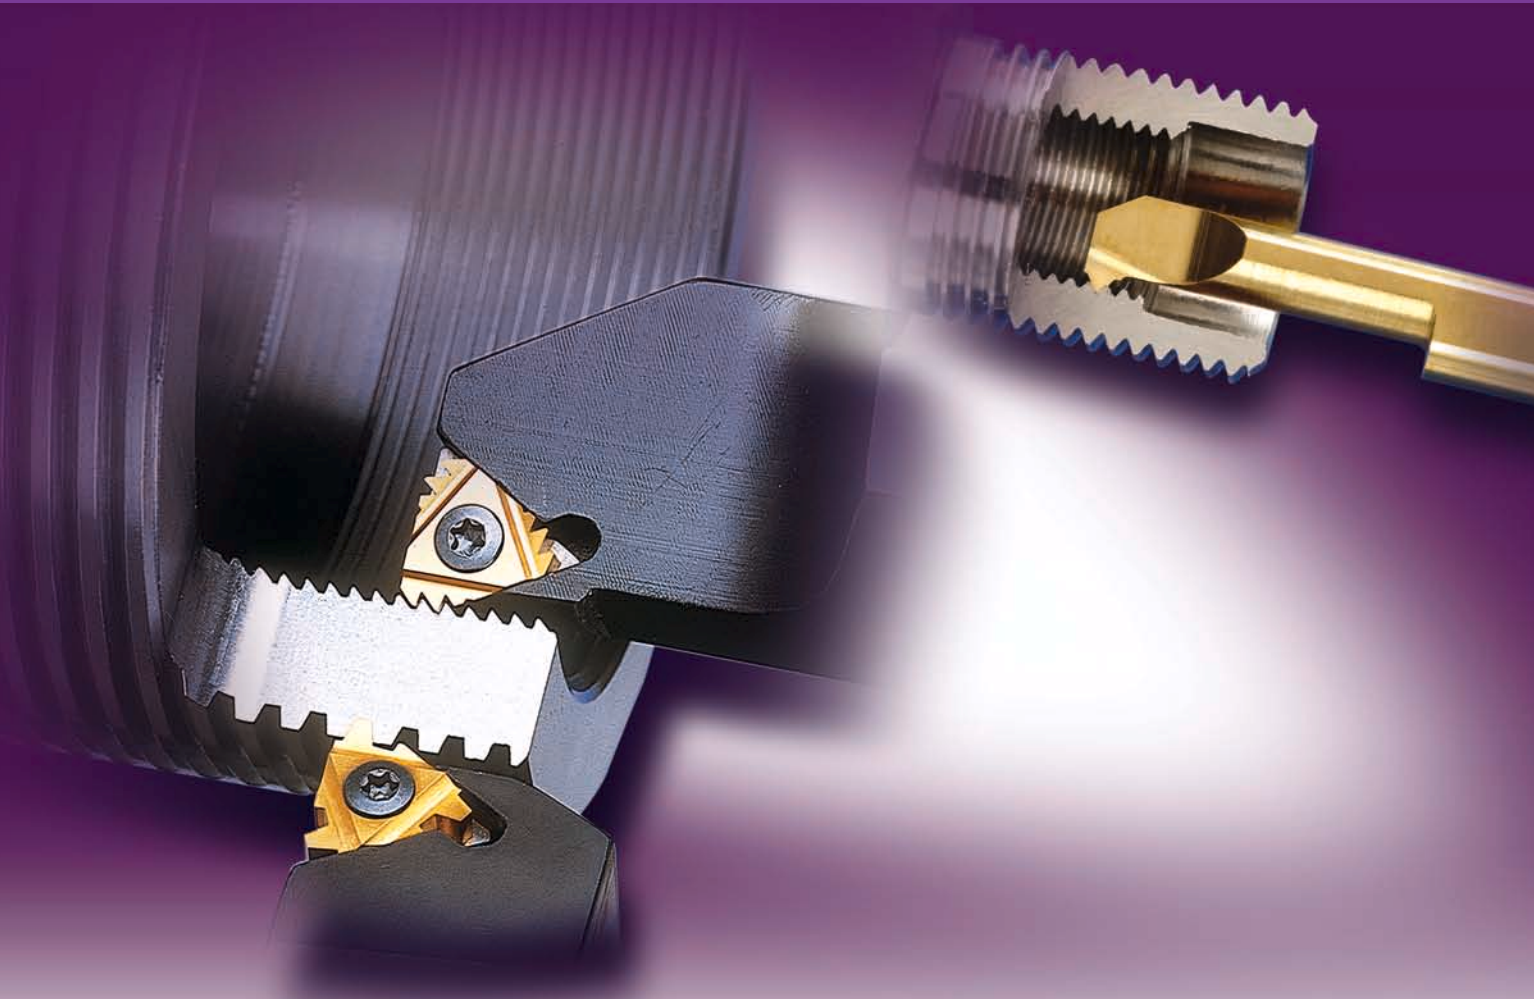

## Type B Threading Inserts


A combination of ground profile and sintered chip-breaker threading inserts.

Unlike most other manufacturers' inserts, this combination ensures consistent high quality thread, with precise shape and dimensions.

Two different unique styles of chip-breaker were designed to suit the different specific requirements of Internal threads and External threads.

All of C.P.T. Type B inserts are made of BMA: Sub - Micrograin grade with Titanium Aluminium Nitride multilayer coating.

### Type B

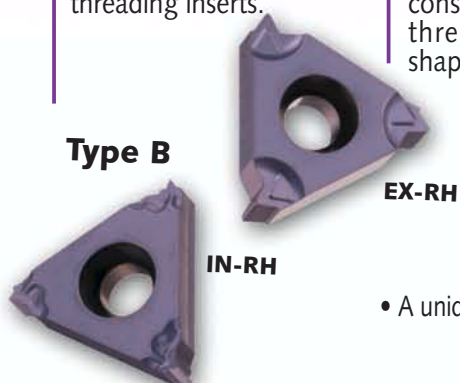

### Advantages:

- High profile accuracy
- A unique sintered chip-breaker form provides excellent performance
- Longer tool life

#### Contents:

Product Identification  
 Partial Profile 60°  
 Partial Profile 55°  
 ISO - Metric  
 UN - Unified  
 Whitworth 55°  
 NPT  
 NPTF  
 BSPT  
 Acme  
 Stub Acme

#### Page:

4  
 5-6  
 7-8  
 9-11  
 12-14  
 15-17  
 18-19  
 19  
 20  
 21  
 22

#### Contents:

Trapez - DIN 103  
 PG - DIN 40430  
 Sagengewinde - DIN 513  
 Round - DIN 405  
 Round - DIN 20400  
 UNJ  
 MJ - ISO 5855  
 American Buttress  
 Oil Threads


#### Page:

23  
 24  
 24  
 25  
 25  
 26  
 27  
 27  
 28-30





## Product Identification

### Thread Turning Inserts Ordering Codes

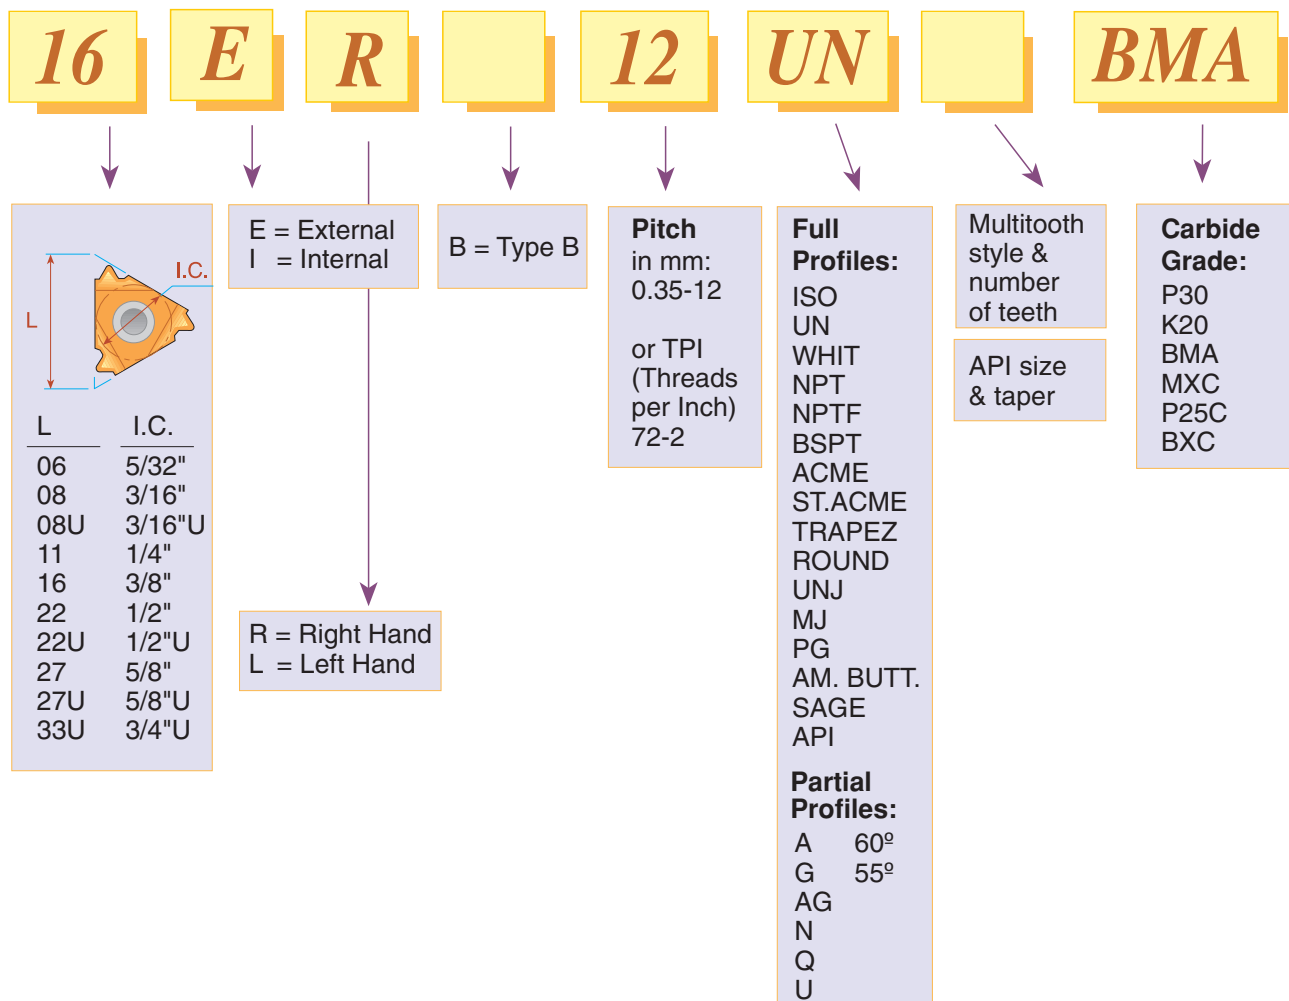



## Partial Profile 60°

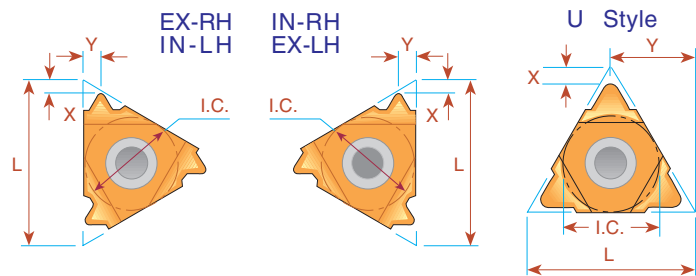


L	I.C. in	Pitch Range		<b>EXTERNAL</b> Ordering Code		<b>INTERNAL</b> Ordering Code		X	Y
		mm	TPI	Right Hand	Left Hand	Right Hand	Left Hand		
6	5/32	0.5 -1.25	48-20	ULTRA MINIATURE →		*06 IR A60	*06 IL A60	0.6	0.6
8	3/16	0.5 -1.5	48-16	MINIATURE →		*08 IR A60	*08 IL A60	0.6	0.7
8U	3/16U	1.75-2.0	14-11	"U" MINIATURE →		*08 IR/L U60		0.8	4.0
11	1/4	0.5 -1.5	48-16	11 ER A60	11 EL A60	11 IR A60	11 IL A60	0.8	0.9
16	3/8	0.5 -1.5	48-16	16 ER A60	16 EL A60	16 IR A60	16 IL A60	0.8	0.9
16	3/8	1.75-3.0	14- 8	16 ER G60	16 EL G60	16 IR G60	16 IL G60	1.2	1.7
16	3/8	0.5 -3.0	48- 8	16 ER AG60	16 EL AG60	16 IR AG60	16 IL AG60	1.2	1.7
22	1/2	3.5 -5.0	7- 5	22 ER N60	22 EL N60	22 IR N60	22 IL N60	1.7	2.5
22U	1/2U	5.5 -8.0	4.5- 3.25	22U E//R/L U60				0.6	11.0
27	5/8	5.5 -6.0	4.5- 4	27 ER Q60	27 EL Q60	27 IR Q60	27 IL Q60	2.1	3.1
27U	5/8U	6.5 -9.0	4- 2.75	27U E//R/L U60				1.0	13.7

Order example: 16 ER G60 MXC

For small bore threading see page 146

\* Available only in BXC grade



## Type B

Ground Profile with Sintered Chip-breaker




L	I.C. in	Pitch Range		<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y
		mm	TPI	Right Hand	Right Hand		
16	3/8	0.5 -1.5	48-16	16 ER B A60	16 IR B A60	0.8	0.9
16	3/8	1.75-3.0	14- 8	16 ER B G60	16 IR B G60	1.2	1.7
16	3/8	0.5 -3.0	48- 8	16 ER B AG60	16 IR B AG60	1.2	1.7

Order example: 16 ER B G60 BMA

For Carbide Grade and Cutting Speed see page 44





## Partial Profile 60° Vertical

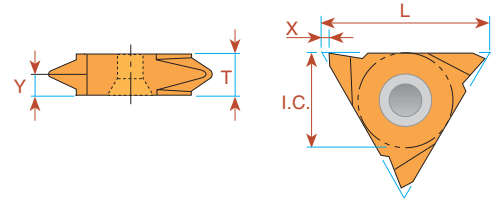

L	I.C. in	Pitch Range		<b>EXTERNAL</b> Ordering Code Right Hand	X	Y	T
		mm	TPI				
16	3/8	0.5 -1.5	48-16	<b>16V ER A60</b>	1.0	0.9	3.6
16	3/8	1.75-3.0	14- 8	<b>16V ER G60</b>	1.0	1.8	3.6
16	3/8	0.5 -3.0	48- 8	<b>16V ER AG60</b>	1.0	1.8	3.6
22	1/2	1.75-3.0	14- 8	<b>22V ER G60</b>	1.2	1.7	4.0
22	1/2	3.5 -5.0	7- 5	<b>22V ER N60</b>	1.2	2.5	4.8

Order example: 16V ER G60 BMA

## Partial Profile 55°

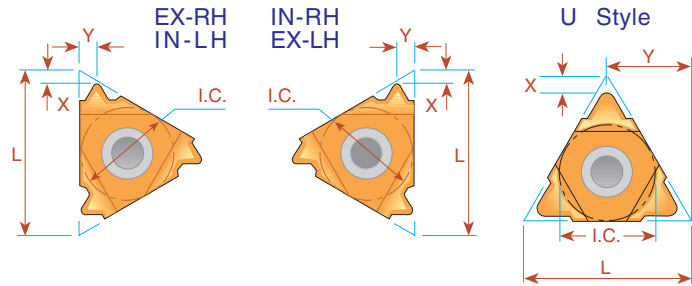


L	I.C. in	Pitch Range		<b>EXTERNAL</b> Ordering Code		<b>INTERNAL</b> Ordering Code		X	Y
		mm	TPI	Right Hand	Left Hand	Right Hand	Left Hand		
6	5/32	0.5 -1.25	48-20	ULTRA MINIATURE →		*06 IR A55	*06 IL A55	0.5	0.6
8	3/16	0.5 -1.5	48-16	MINIATURE →		*08 IR A55	*08 IL A55	0.6	0.7
8U	3/16U	1.75-2.0	14-11	"U" MINIATURE →		*08 IR/L U55		0.9	4.0
11	1/4	0.5 -1.5	48-16	11 ER A55	11 EL A55	11 IR A55	11 IL A55	0.8	0.9
16	3/8	0.5 -1.5	48-16	16 ER A55	16 EL A55	16 IR A55	16 IL A55	0.8	0.9
16	3/8	1.75-3.0	14- 8	16 ER G55	16 EL G55	16 IR G55	16 IL G55	1.2	1.7
16	3/8	0.5 -3.0	48- 8	16 ER AG55	16 EL AG55	16 IR AG55	16 IL AG55	1.2	1.7
22	1/2	3.5 -5.0	7- 5	22 ER N55	22 EL N55	22 IR N55	22 IL N55	1.7	2.5
22U	1/2U	5.5 -8.0	4.5- 3.25	22U E/I/R/L U55				0.9	11.0
27	5/8	5.5 -6.0	4.5- 4	27 ER Q55	27 EL Q55	27 IR Q55	27 IL Q55	2.0	2.9
27U	5/8U		4- 2.75	27U E/I/R/L U55				1.2	13.7

Order example: 16 ER G55 MXC

For small bore threading see page 146

\* Available only in BXC grade



## Type B

Ground Profile with Sintered Chip-breaker




L	I.C. in	Pitch Range		<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y
		mm	TPI	Right Hand	Right Hand		
16	3/8	1.75-3.0	14- 8	16 ER B G55	16 IR B G55	1.2	1.7
16	3/8	0.5 -3.0	48- 8	16 ER B AG55	16 IR B AG55	1.2	1.7

Order example: 16 ER B G55 BMA

For Carbide Grade and Cutting Speed see page 44





## Partial Profile 55° Vertical

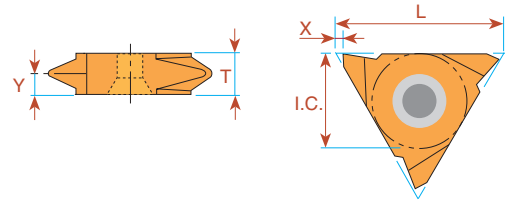

L	I.C. in	Pitch Range		<b>EXTERNAL</b> Ordering Code Right Hand	X	Y	T
		mm	TPI				
16	3/8	0.5 -1.5	48-16	<b>16V ER A55</b>	1.0	0.9	3.6
16	3/8	1.75-3.0	14- 8	<b>16V ER G55</b>	1.0	1.7	3.6
16	3/8	0.5 -3.0	48- 8	<b>16V ER AG55</b>	1.0	1.8	3.6
22	1/2	3.5 -5.0	7- 5	<b>22V ER N55</b>	1.2	2.5	4.8

Order example: 22V ER N55 BMA



## ISO - metric

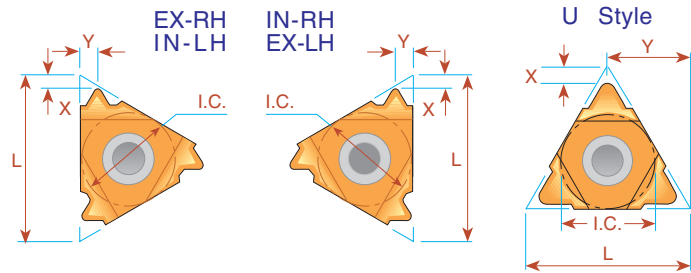

Pitch mm	L	I.C. in	EXTERNAL		X	Y	INTERNAL		X	Y
			Ordering Code Right Hand	Ordering Code Left Hand			Ordering Code Right Hand	Ordering Code Left Hand		
0.5	6	5/32	<i>ULTRA MINIATURE</i> →				*06 IR 0.5 ISO	*06 IL 0.5 ISO	0.9	0.5
0.75	6	5/32					*06 IR 0.75 ISO	*06 IL 0.75 ISO	0.8	0.5
1.0	6	5/32					*06 IR 1.0 ISO	*06 IL 1.0 ISO	0.7	0.6
1.25	6	5/32					*06 IR 1.25 ISO	*06 IL 1.25 ISO	0.6	0.6
0.5	8	3/16	<i>MINIATURE</i> →				*08 IR 0.5 ISO	*08 IL 0.5 ISO	0.6	0.5
0.75	8	3/16					*08 IR 0.75 ISO	*08 IL 0.75 ISO	0.6	0.5
1.0	8	3/16					*08 IR 1.0 ISO	*08 IL 1.0 ISO	0.6	0.6
1.25	8	3/16					*08 IR 1.25 ISO	*08 IL 1.25 ISO	0.6	0.7
1.5	8	3/16					*08 IR 1.5 ISO	*08 IL 1.5 ISO	0.6	0.7
1.75	8	3/16					*08 IR 1.75 ISO	*08 IL 1.75 ISO	0.6	0.8
2.0	8U	3/16U	<i>"U" MINIATURE</i> →				*08U IR/L 2.0 ISO		0.9	4.0
0.35	11	1/4	11 ER 0.35 ISO	11 EL 0.35 ISO	0.8	0.4	11 IR 0.35 ISO	11 IL 0.35 ISO	0.8	0.3
0.4	11	1/4	11 ER 0.4 ISO	11 EL 0.4 ISO	0.7	0.4	11 IR 0.4 ISO	11 IL 0.4 ISO	0.8	0.4
0.45	11	1/4	11 ER 0.45 ISO	11 EL 0.45 ISO	0.7	0.4	11 IR 0.45 ISO	11 IL 0.45 ISO	0.8	0.4
0.5	11	1/4	11 ER 0.5 ISO	11 EL 0.5 ISO	0.6	0.6	11 IR 0.5 ISO	11 IL 0.5 ISO	0.6	0.6
0.6	11	1/4	11 ER 0.6 ISO	11 EL 0.6 ISO	0.6	0.6	11 IR 0.6 ISO	11 IL 0.6 ISO	0.6	0.6
0.7	11	1/4	11 ER 0.7 ISO	11 EL 0.7 ISO	0.6	0.6	11 IR 0.7 ISO	11 IL 0.7 ISO	0.6	0.6
0.75	11	1/4	11 ER 0.75 ISO	11 EL 0.75 ISO	0.6	0.6	11 IR 0.75 ISO	11 IL 0.75 ISO	0.6	0.6
0.8	11	1/4	11 ER 0.8 ISO	11 EL 0.8 ISO	0.6	0.6	11 IR 0.8 ISO	11 IL 0.8 ISO	0.6	0.6
1.0	11	1/4	11 ER 1.0 ISO	11 EL 1.0 ISO	0.7	0.7	11 IR 1.0 ISO	11 IL 1.0 ISO	0.6	0.7
1.25	11	1/4	11 ER 1.25 ISO	11 EL 1.25 ISO	0.8	0.9	11 IR 1.25 ISO	11 IL 1.25 ISO	0.8	0.8
1.5	11	1/4	11 ER 1.5 ISO	11 EL 1.5 ISO	0.8	1.0	11 IR 1.5 ISO	11 IL 1.5 ISO	0.8	1.0
1.75	11	1/4	11 ER 1.75 ISO	11 EL 1.75 ISO	0.8	1.1	11 IR 1.75 ISO	11 IL 1.75 ISO	0.8	1.1
2.0	11	1/4					11 IR 2.0 ISO	11 IL 2.0 ISO	0.8	0.9
2.5	11	1/4					11 IR 2.5 ISO	11 IL 2.5 ISO	0.8	1.2
0.35	16	3/8	16 ER 0.35 ISO	16 EL 0.35 ISO	0.8	0.4	16 IR 0.35 ISO	16 IL 0.35 ISO	0.8	0.3
0.4	16	3/8	16 ER 0.4 ISO	16 EL 0.4 ISO	0.7	0.4	16 IR 0.4 ISO	16 IL 0.4 ISO	0.8	0.4
0.45	16	3/8	16 ER 0.45 ISO	16 EL 0.45 ISO	0.7	0.4	16 IR 0.45 ISO	16 IL 0.45 ISO	0.8	0.4
0.5	16	3/8	16 ER 0.5 ISO	16 EL 0.5 ISO	0.6	0.6	16 IR 0.5 ISO	16 IL 0.5 ISO	0.6	0.6
0.6	16	3/8	16 ER 0.6 ISO	16 EL 0.6 ISO	0.6	0.6	16 IR 0.6 ISO	16 IL 0.6 ISO	0.6	0.6
0.7	16	3/8	16 ER 0.7 ISO	16 EL 0.7 ISO	0.6	0.6	16 IR 0.7 ISO	16 IL 0.7 ISO	0.6	0.6
0.75	16	3/8	16 ER 0.75 ISO	16 EL 0.75 ISO	0.6	0.6	16 IR 0.75 ISO	16 IL 0.75 ISO	0.6	0.6
0.8	16	3/8	16 ER 0.8 ISO	16 EL 0.8 ISO	0.6	0.6	16 IR 0.8 ISO	16 IL 0.8 ISO	0.6	0.6
1.0	16	3/8	16 ER 1.0 ISO	16 EL 1.0 ISO	0.7	0.7	16 IR 1.0 ISO	16 IL 1.0 ISO	0.6	0.7
1.25	16	3/8	16 ER 1.25 ISO	16 EL 1.25 ISO	0.8	0.9	16 IR 1.25 ISO	16 IL 1.25 ISO	0.8	0.9
1.5	16	3/8	16 ER 1.5 ISO	16 EL 1.5 ISO	0.8	1.0	16 IR 1.5 ISO	16 IL 1.5 ISO	0.8	1.0
1.75	16	3/8	16 ER 1.75 ISO	16 EL 1.75 ISO	0.9	1.2	16 IR 1.75 ISO	16 IL 1.75 ISO	0.9	1.2
2.0	16	3/8	16 ER 2.0 ISO	16 EL 2.0 ISO	1.0	1.3	16 IR 2.0 ISO	16 IL 2.0 ISO	1.0	1.3
2.5	16	3/8	16 ER 2.5 ISO	16 EL 2.5 ISO	1.1	1.5	16 IR 2.5 ISO	16 IL 2.5 ISO	1.1	1.5
3.0	16	3/8	16 ER 3.0 ISO	16 EL 3.0 ISO	1.2	1.6	16 IR 3.0 ISO	16 IL 3.0 ISO	1.1	1.5
3.5	16	3/8	16 ER 3.5 ISO	16 EL 3.5 ISO	1.2	1.7	16 IR 3.5 ISO	16 IL 3.5 ISO	1.2	1.7



## ISO - metric

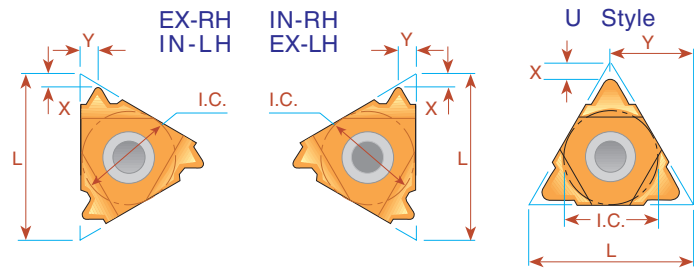


Pitch	L	I.C. in	EXTERNAL		X	Y	INTERNAL		X	Y
			Ordering Code Right Hand	Ordering Code Left Hand			Ordering Code Right Hand	Ordering Code Left Hand		
3.5	22	1/2	<b>22 ER 3.5 ISO</b>	<b>22 EL 3.5 ISO</b>	1.6	2.3	<b>22 IR 3.5 ISO</b>	<b>22 IL 3.5 ISO</b>	1.6	2.3
4.0	22	1/2	<b>22 ER 4.0 ISO</b>	<b>22 EL 4.0 ISO</b>	1.6	2.3	<b>22 IR 4.0 ISO</b>	<b>22 IL 4.0 ISO</b>	1.6	2.3
4.5	22	1/2	<b>22 ER 4.5 ISO</b>	<b>22 EL 4.5 ISO</b>	1.7	2.4	<b>22 IR 4.5 ISO</b>	<b>22 IL 4.5 ISO</b>	1.6	2.4
5.0	22	1/2	<b>22 ER 5.0 ISO</b>	<b>22 EL 5.0 ISO</b>	1.7	2.5	<b>22 IR 5.0 ISO</b>	<b>22 IL 5.0 ISO</b>	1.6	2.3
5.5	22	1/2	<b>22 ER 5.5 ISO</b>	<b>22 EL 5.5 ISO</b>	1.7	2.6	<b>22 IR 5.5 ISO</b>	<b>22 IL 5.5 ISO</b>	1.6	2.3
6.0	22	1/2	<b>22 ER 6.0 ISO</b>	<b>22 EL 6.0 ISO</b>	1.9	2.7	<b>22 IR 6.0 ISO</b>	<b>22 IL 6.0 ISO</b>	1.6	2.4
5.5	22U	1/2U	<b>22U ER/L 5.5 ISO</b>		2.3	11.0	<b>22U IR/L 5.5 ISO</b>		2.4	11.0
6.0	22U	1/2U	<b>22U ER/L 6.0 ISO</b>		2.6	11.0	<b>22U IR/L 6.0 ISO</b>		2.1	11.0
5.5	27	5/8	<b>27 ER 5.5 ISO</b>	<b>27 EL 5.5 ISO</b>	1.9	2.7	<b>27 IR 5.5 ISO</b>	<b>27 IL 5.5 ISO</b>	1.6	2.3
6.0	27	5/8	<b>27 ER 6.0 ISO</b>	<b>27 EL 6.0 ISO</b>	2.0	2.9	<b>27 IR 6.0 ISO</b>	<b>27 IL 6.0 ISO</b>	1.8	2.5
8.0	27U	5/8U	<b>27U ER/L 8.0 ISO</b>		2.4	13.7	<b>27U IR/L 8.0 ISO</b>		2.4	13.7
12.0	33U	3/4U	<b>33U ER/L 12.0 ISO</b>		2.5	16.5	<b>33U IR/L 12.0 ISO</b>		3.5	16.9

Order example: 22 IR 3.5 ISO BMA


For small bore threading see page 147

\* Available only in BXC grade



## Type B

Ground Profile with Sintered Chip-breaker




Pitch mm	L	I.C. in	EXTERNAL		X	Y	INTERNAL		X	Y
			Ordering Code Right Hand	Ordering Code Right Hand			Ordering Code Right Hand	Ordering Code Right Hand		
0.8	16	3/8	<b>16 ER B 0.8 ISO</b>	<b>16 ER B 0.8 ISO</b>	0.6	0.6	<b>16 IR B 1.0 ISO</b>	<b>16 IR B 1.0 ISO</b>	0.6	0.7
1.0	16	3/8	<b>16 ER B 1.0 ISO</b>	<b>16 ER B 1.0 ISO</b>	0.7	0.7	<b>16 IR B 1.25 ISO</b>	<b>16 IR B 1.25 ISO</b>	0.8	0.9
1.25	16	3/8	<b>16 ER B 1.25 ISO</b>	<b>16 ER B 1.25 ISO</b>	0.8	0.9	<b>16 IR B 1.5 ISO</b>	<b>16 IR B 1.5 ISO</b>	0.8	1.0
1.5	16	3/8	<b>16 ER B 1.5 ISO</b>	<b>16 ER B 1.5 ISO</b>	0.8	1.0	<b>16 IR B 1.75 ISO</b>	<b>16 IR B 1.75 ISO</b>	0.9	1.2
1.75	16	3/8	<b>16 ER B 1.75 ISO</b>	<b>16 ER B 1.75 ISO</b>	0.9	1.2	<b>16 IR B 2.0 ISO</b>	<b>16 IR B 2.0 ISO</b>	1.0	1.3
2.0	16	3/8	<b>16 ER B 2.0 ISO</b>	<b>16 ER B 2.0 ISO</b>	1.0	1.3	<b>16 IR B 2.5 ISO</b>	<b>16 IR B 2.5 ISO</b>	1.1	1.5
2.5	16	3/8	<b>16 ER B 2.5 ISO</b>	<b>16 ER B 2.5 ISO</b>	1.1	1.5	<b>16 IR B 3.0 ISO</b>	<b>16 IR B 3.0 ISO</b>	1.1	1.5
3.0	16	3/8	<b>16 ER B 3.0 ISO</b>	<b>16 ER B 3.0 ISO</b>	1.2	1.6				

Order example: 16 IR B 1.5 ISO BMA

For Carbide Grade and Cutting Speed see page 44


## ISO - metric Vertical

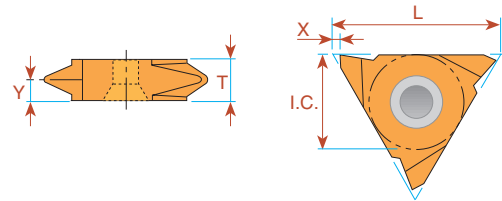

Pitch mm	L	I.C. in	<b>EXTERNAL</b> Ordering Code Right Hand	X	Y	T
1.0	16	3/8	<b>16V ER 1.0 ISO</b>	1.0	0.7	3.6
1.25	16	3/8	<b>16V ER 1.25 ISO</b>	1.0	0.9	3.6
1.5	16	3/8	<b>16V ER 1.5 ISO</b>	1.0	0.9	3.6
1.75	16	3/8	<b>16V ER 1.75 ISO</b>	1.0	1.2	3.6
2.0	16	3/8	<b>16V ER 2.0 ISO</b>	1.0	1.3	3.6
2.5	16	3/8	<b>16V ER 2.5 ISO</b>	1.0	1.5	3.6

Order example: 16V ER 1.5 ISO BMA

## Multitooth

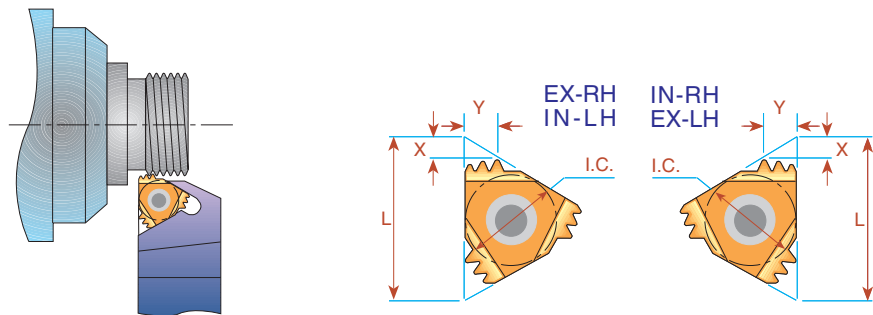

Pitch mm	L	I.C. in	Number of Teeth	<b>EXTERNAL</b> Ordering Code	Anvil	<b>INTERNAL</b> Ordering Code	Anvil	X	Y
1.0	16	3/8	3	<b>16 ER 1.0 ISO 3M</b>	AE16M	<b>16 IR 1.0 ISO 3M</b>	AI16M	1.7	2.5
1.5	16	3/8	2	<b>16 ER 1.5 ISO 2M</b>	AE16M	<b>16 IR 1.5 ISO 2M</b>	AI16M	1.5	2.3
1.5	22	1/2	3	<b>22 ER 1.5 ISO 3M</b>	AE22M	<b>22 IR 1.5 ISO 3M</b>	AI22M	2.3	3.7
2.0	22	1/2	2	<b>22 ER 2.0 ISO 2M</b>	AE22M	<b>22 IR 2.0 ISO 2M</b>	AI22M	2.0	3.0
2.0	22	1/2	3	<b>22 ER 2.0 ISO 3M</b>	AE22M	<b>22 IR 2.0 ISO 3M</b>	AI22M	3.1	5.0
3.0	27	5/8	2	<b>27 ER 3.0 ISO 2M</b>	AE27M	<b>27 IR 3.0 ISO 2M</b>	AI27M	2.9	4.6



Order example: 22 IR 2.0 ISO 2M BMA

For recommended number of passes see page 45

For Carbide grade and Cutting Speed see page 44



## UN - Unified UNC, UNF, UNEF, UNS

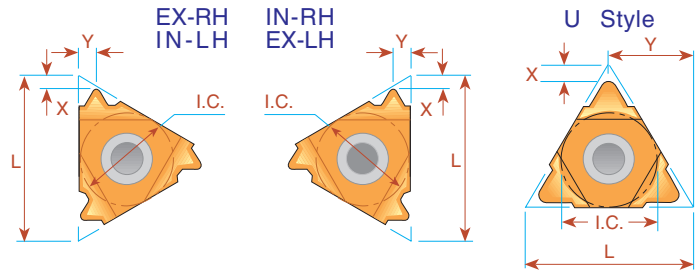



Pitch TPI	L	I.C. in	EXTERNAL		X	Y	INTERNAL		X	Y
			Right Hand	Left Hand			Right Hand	Left Hand		
32	6	5/32	<i>ULTRA MINIATURE</i> →				<b>*06 IR 32 UN</b>	<b>*06 IL 32 UN</b>	0.8	0.5
28	6	5/32					<b>*06 IR 28 UN</b>	<b>*06 IL 28 UN</b>	0.8	0.6
24	6	5/32					<b>*06 IR 24 UN</b>	<b>*06 IL 24 UN</b>	0.7	0.6
20	6	5/32					<b>*06 IR 20 UN</b>	<b>*06 IL 20 UN</b>	0.6	0.6
18	6	5/32					<b>*06 IR 18 UN</b>	<b>*06 IL 18 UN</b>	0.6	0.7
32	8	3/16	<i>MINIATURE</i> →				<b>*08 IR 32 UN</b>	<b>*08 IL 32 UN</b>	0.6	0.5
28	8	3/16					<b>*08 IR 28 UN</b>	<b>*08 IL 28 UN</b>	0.6	0.6
24	8	3/16					<b>*08 IR 24 UN</b>	<b>*08 IL 24 UN</b>	0.6	0.6
20	8	3/16					<b>*08 IR 20 UN</b>	<b>*08 IL 20 UN</b>	0.6	0.7
18	8	3/16					<b>*08 IR 18 UN</b>	<b>*08 IL 18 UN</b>	0.6	0.7
16	8	3/16					<b>*08 IR 16 UN</b>	<b>*08 IL 16 UN</b>	0.6	0.7
14	8	3/16					<b>*08 IR 14 UN</b>	<b>*08 IL 14 UN</b>	0.6	0.8
13	8U	3/16U	<i>"U" MINIATURE</i> →				<b>*08U IR/L 13 UN</b>		1.0	4.0
12	8U	3/16U					<b>*08U IR/L 12 UN</b>		0.9	4.0
11	8U	3/16U					<b>*08U IR/L 11 UN</b>		0.9	4.0
72	11	1/4	<b>11 ER 72 UN</b>	<b>11 EL 72 UN</b>	0.8	0.4	<b>11 IR 72 UN</b>	<b>11 IL 72 UN</b>	0.8	0.3
64	11	1/4	<b>11 ER 64 UN</b>	<b>11 EL 64 UN</b>	0.8	0.4	<b>11 IR 64 UN</b>	<b>11 IL 64 UN</b>	0.8	0.4
56	11	1/4	<b>11 ER 56 UN</b>	<b>11 EL 56 UN</b>	0.7	0.4	<b>11 IR 56 UN</b>	<b>11 IL 56 UN</b>	0.7	0.4
48	11	1/4	<b>11 ER 48 UN</b>	<b>11 EL 48 UN</b>	0.6	0.6	<b>11 IR 48 UN</b>	<b>11 IL 48 UN</b>	0.6	0.6
44	11	1/4	<b>11 ER 44 UN</b>	<b>11 EL 44 UN</b>	0.6	0.6	<b>11 IR 44 UN</b>	<b>11 IL 44 UN</b>	0.6	0.6
40	11	1/4	<b>11 ER 40 UN</b>	<b>11 EL 40 UN</b>	0.6	0.6	<b>11 IR 40 UN</b>	<b>11 IL 40 UN</b>	0.6	0.6
36	11	1/4	<b>11 ER 36 UN</b>	<b>11 EL 36 UN</b>	0.6	0.6	<b>11 IR 36 UN</b>	<b>11 IL 36 UN</b>	0.6	0.6
32	11	1/4	<b>11 ER 32 UN</b>	<b>11 EL 32 UN</b>	0.6	0.6	<b>11 IR 32 UN</b>	<b>11 IL 32 UN</b>	0.6	0.6
28	11	1/4	<b>11 ER 28 UN</b>	<b>11 EL 28 UN</b>	0.6	0.7	<b>11 IR 28 UN</b>	<b>11 IL 28 UN</b>	0.6	0.7
27	11	1/4	<b>11 ER 27 UN</b>	<b>11 EL 27 UN</b>	0.7	0.8	<b>11 IR 27 UN</b>	<b>11 IL 27 UN</b>	0.7	0.8
24	11	1/4	<b>11 ER 24 UN</b>	<b>11 EL 24 UN</b>	0.7	0.8	<b>11 IR 24 UN</b>	<b>11 IL 24 UN</b>	0.7	0.8
20	11	1/4	<b>11 ER 20 UN</b>	<b>11 EL 20 UN</b>	0.8	0.9	<b>11 IR 20 UN</b>	<b>11 IL 20 UN</b>	0.8	0.9
18	11	1/4	<b>11 ER 18 UN</b>	<b>11 EL 18 UN</b>	0.8	1.0	<b>11 IR 18 UN</b>	<b>11 IL 18 UN</b>	0.8	1.0
16	11	1/4	<b>11 ER 16 UN</b>	<b>11 EL 16 UN</b>	0.9	1.1	<b>11 IR 16 UN</b>	<b>11 IL 16 UN</b>	0.9	1.1
14	11	1/4	<b>11 ER 14 UN</b>	<b>11 EL 14 UN</b>	0.9	1.1	<b>11 IR 14 UN</b>	<b>11 IL 14 UN</b>	0.9	1.1
13	11	1/4					<b>11 IR 13 UN</b>	<b>11 IL 13 UN</b>	0.8	1.0
12	11	1/4					<b>11 IR 12 UN</b>	<b>11 IL 12 UN</b>	0.9	1.1
11	11	1/4					<b>11 IR 11 UN</b>	<b>11 IL 11 UN</b>	0.8	1.1
72	16	3/8	<b>16 ER 72 UN</b>	<b>16 EL 72 UN</b>	0.8	0.4	<b>16 IR 72 UN</b>	<b>16 IL 72 UN</b>	0.8	0.3
64	16	3/8	<b>16 ER 64 UN</b>	<b>16 EL 64 UN</b>	0.8	0.4	<b>16 IR 64 UN</b>	<b>16 IL 64 UN</b>	0.8	0.4
56	16	3/8	<b>16 ER 56 UN</b>	<b>16 EL 56 UN</b>	0.7	0.4	<b>16 IR 56 UN</b>	<b>16 IL 56 UN</b>	0.7	0.4
48	16	3/8	<b>16 ER 48 UN</b>	<b>16 EL 48 UN</b>	0.6	0.6	<b>16 IR 48 UN</b>	<b>16 IL 48 UN</b>	0.6	0.6
44	16	3/8	<b>16 ER 44 UN</b>	<b>16 EL 44 UN</b>	0.6	0.6	<b>16 IR 44 UN</b>	<b>16 IL 44 UN</b>	0.6	0.6
40	16	3/8	<b>16 ER 40 UN</b>	<b>16 EL 40 UN</b>	0.6	0.6	<b>16 IR 40 UN</b>	<b>16 IL 40 UN</b>	0.6	0.6
36	16	3/8	<b>16 ER 36 UN</b>	<b>16 EL 36 UN</b>	0.6	0.6	<b>16 IR 36 UN</b>	<b>16 IL 36 UN</b>	0.6	0.6

# Thread Turning Inserts



## UN - Unified UNC, UNF, UNEF, UNS

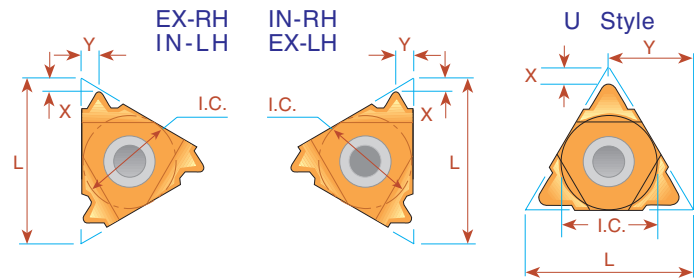


Pitch TPI	L	I.C. in	EXTERNAL		X	Y	INTERNAL		X	Y
			Right Hand	Left Hand			Right Hand	Left Hand		
32	16	3/8	16 ER 32 UN	16 EL 32 UN	0.6	0.6	16 IR 32 UN	16 IL 32 UN	0.6	0.6
28	16	3/8	16 ER 28 UN	16 EL 28 UN	0.6	0.7	16 IR 28 UN	16 IL 28 UN	0.6	0.7
27	16	3/8	16 ER 27 UN	16 EL 27 UN	0.7	0.8	16 IR 27 UN	16 IL 27 UN	0.7	0.8
24	16	3/8	16 ER 24 UN	16 EL 24 UN	0.7	0.8	16 IR 24 UN	16 IL 24 UN	0.7	0.8
20	16	3/8	16 ER 20 UN	16 EL 20 UN	0.8	0.9	16 IR 20 UN	16 IL 20 UN	0.8	0.9
18	16	3/8	16 ER 18 UN	16 EL 18 UN	0.8	1.0	16 IR 18 UN	16 IL 18 UN	0.8	1.0
16	16	3/8	16 ER 16 UN	16 EL 16 UN	0.9	1.1	16 IR 16 UN	16 IL 16 UN	0.9	1.1
14	16	3/8	16 ER 14 UN	16 EL 14 UN	1.0	1.2	16 IR 14 UN	16 IL 14 UN	0.9	1.2
13	16	3/8	16 ER 13 UN	16 EL 13 UN	1.0	1.3	16 IR 13 UN	16 IL 13 UN	1.0	1.3
12	16	3/8	16 ER 12 UN	16 EL 12 UN	1.1	1.4	16 IR 12 UN	16 IL 12 UN	1.1	1.4
11.5	16	3/8	16 ER 11.5 UN	16 EL 11.5 UN	1.1	1.5	16 IR 11.5 UN	16 IL 11.5 UN	1.1	1.5
11	16	3/8	16 ER 11 UN	16 EL 11 UN	1.1	1.5	16 IR 11 UN	16 IL 11 UN	1.1	1.5
10	16	3/8	16 ER 10 UN	16 EL 10 UN	1.1	1.5	16 IR 10 UN	16 IL 10 UN	1.1	1.5
9	16	3/8	16 ER 9 UN	16 EL 9 UN	1.2	1.7	16 IR 9 UN	16 IL 9 UN	1.2	1.7
8	16	3/8	16 ER 8 UN	16 EL 8 UN	1.2	1.6	16 IR 8 UN	16 IL 8 UN	1.1	1.5
7	22	1/2	22 ER 7 UN	22 EL 7 UN	1.6	2.3	22 IR 7 UN	22 IL 7 UN	1.6	2.3
6	22	1/2	22 ER 6 UN	22 EL 6 UN	1.6	2.3	22 IR 6 UN	22 IL 6 UN	1.6	2.3
5	22	1/2	22 ER 5 UN	22 EL 5 UN	1.7	2.5	22 IR 5 UN	22 IL 5 UN	1.6	2.3
4.5	22U	1/2U	22U ER/L 4.5 UN		2.0	11.0	22U IR/L 4.5 UN		2.4	11.0
4	22U	1/2U	22U ER/L 4 UN		2.0	11.0	22U IR/L 4 UN		2.4	11.0
4.5	27	5/8	27 ER 4.5 UN	27 EL 4.5 UN	1.9	2.7	27 IR 4.5 UN	27 IL 4.5 UN	1.7	2.4
4	27	5/8	27 ER 4 UN	27 EL 4 UN	2.1	3.0	27 IR 4 UN	27 IL 4 UN	1.8	2.7
3	27U	5/8U	27U ER/L 3 UN		2.5	13.7	27U IR/L 3 UN		2.7	13.7
2	33U	3/4U	33U ER/L 2 UN		2.8	16.5	33U IR/L 2 UN		3.6	16.9

Order example: 16 ER 12 UN BMA


For small bore threading see page 147

\* Available only in BXC grade



## UN - Unified UNC, UNF, UNEF, UNS Type B



Ground Profile with Sintered Chip-breaker



Pitch TPI	L	I.C. in	<b>EXTERNAL</b>		X	Y	<b>INTERNAL</b>		X	Y
			Ordering Code	Right Hand			Ordering Code	Right Hand		
24	16	3/8	<b>16 ER B 24 UN</b>		0.7	0.8	<b>16 IR B 24 UN</b>		0.7	0.8
20	16	3/8	<b>16 ER B 20 UN</b>		0.8	0.9	<b>16 IR B 20 UN</b>		0.8	0.9
18	16	3/8	<b>16 ER B 18 UN</b>		0.8	1.0	<b>16 IR B 18 UN</b>		0.8	1.0
16	16	3/8	<b>16 ER B 16 UN</b>		0.9	1.1	<b>16 IR B 16 UN</b>		0.9	1.1
14	16	3/8	<b>16 ER B 14 UN</b>		1.0	1.2	<b>16 IR B 14 UN</b>		0.9	1.2
13	16	3/8	<b>16 ER B 13 UN</b>		1.0	1.3				
12	16	3/8	<b>16 ER B 12 UN</b>		1.1	1.4	<b>16 IR B 12 UN</b>		1.1	1.4
11	16	3/8	<b>16 ER B 11 UN</b>		1.1	1.5				
10	16	3/8	<b>16 ER B 10 UN</b>		1.1	1.5	<b>16 IR B 10 UN</b>		1.1	1.5
9	16	3/8	<b>16 ER B 9 UN</b>		1.2	1.7				
8	16	3/8	<b>16 ER B 8 UN</b>		1.2	1.6	<b>16 IR B 8 UN</b>		1.1	1.1

Order example: 16 IR B 12 UN BMA

## Multitooth

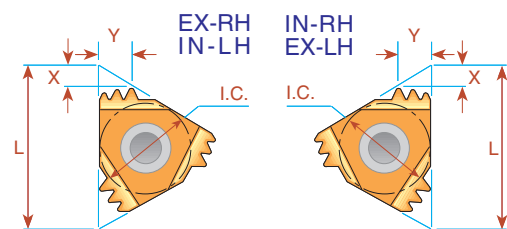

Pitch TPI	L	I.C. in	Number of Teeth	<b>EXTERNAL</b>		<b>INTERNAL</b>		X	Y
				Ordering Code	Anvil	Ordering Code	Anvil		
16	16	3/8	2	<b>16 ER 16 UN 2M</b>	AE16M	<b>16 IR 16 UN 2M</b>	AI16M	1.5	2.3
16	22	1/2	3	<b>22 ER 16 UN 3M</b>	AE22M	<b>22 IR 16 UN 3M</b>	AI22M	2.5	4.0
12	22	1/2	2	<b>22 ER 12 UN 2M</b>	AE22M	<b>22 IR 12 UN 2M</b>	AI22M	2.2	3.4
12	22	1/2	3	<b>22 ER 12 UN 3M</b>	AE22M	<b>22 IR 12 UN 3M</b>	AI22M	3.3	5.3
8	27	5/8	2	<b>27 ER 8 UN 2M</b>	AE27M	<b>27 IR 8 UN 2M</b>	AI27M	3.1	4.9



Order example: 22 IR 16 UN 3M BMA

For recommended number of passes see page 45

For Carbide Grade and Cutting Speed see page 44





## Whitworth - 55° BSW, BSF, BSP, BSB

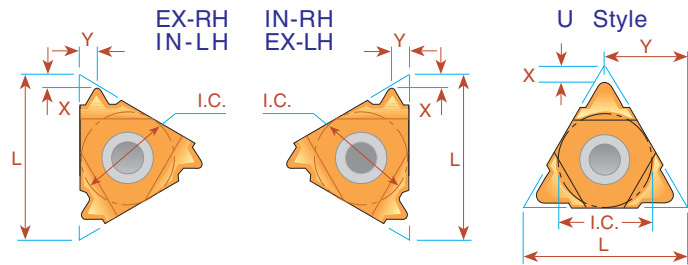

Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand	Right Hand	Left Hand		
26	6	5/32	ULTRA MINIATURE →		*06 IR 26 W	*06 IL 26 W	0.7	0.6
22	6	5/32			*06 IR 22 W	*06 IL 22 W	0.6	0.6
20	6	5/32			*06 IR 20 W	*06 IL 20 W	0.6	0.7
18	6	5/32			*06 IR 18 W	*06 IL 18 W	0.6	0.7
28	8	3/16	MINIATURE →		*08 IR 28 W	*08 IL 28 W	0.6	0.6
24	8	3/16			*08 IR 24 W	*08 IL 24 W	0.6	0.6
20	8	3/16			*08 IR 20 W	*08 IL 20 W	0.6	0.7
19	8	3/16			*08 IR 19 W	*08 IL 19 W	0.6	0.7
18	8	3/16			*08 IR 18 W	*08 IL 18 W	0.6	0.7
16	8	3/16			*08 IR 16 W	*08 IL 16 W	0.6	0.7
14	8U	3/16U	"U" MINIATURE →		*08U IR/L 14 W		1.0	4.0
12	8U	3/16U			*08U IR/L 12 W		0.9	4.0
11	8U	3/16U			*08U IR/L 11 W		0.9	4.0
72	11	1/4	11 ER 72 W	11 EL 72 W	11 IR 72 W	11 IL 72 W	0.7	0.4
60	11	1/4	11 ER 60 W	11 EL 60 W	11 IR 60 W	11 IL 60 W	0.7	0.4
56	11	1/4	11 ER 56 W	11 EL 56 W	11 IR 56 W	11 IL 56 W	0.7	0.4
48	11	1/4	11 ER 48 W	11 EL 48 W	11 IR 48 W	11 IL 48 W	0.6	0.6
40	11	1/4	11 ER 40 W	11 EL 40 W	11 IR 40 W	11 IL 40 W	0.6	0.6
36	11	1/4	11 ER 36 W	11 EL 36 W	11 IR 36 W	11 IL 36 W	0.6	0.6
32	11	1/4	11 ER 32 W	11 EL 32 W	11 IR 32 W	11 IL 32 W	0.6	0.6
28	11	1/4	11 ER 28 W	11 EL 28 W	11 IR 28 W	11 IL 28 W	0.6	0.7
26	11	1/4	11 ER 26 W	11 EL 26 W	11 IR 26 W	11 IL 26 W	0.7	0.7
24	11	1/4	11 ER 24 W	11 EL 24 W	11 IR 24 W	11 IL 24 W	0.7	0.8
22	11	1/4	11 ER 22 W	11 EL 22 W	11 IR 22 W	11 IL 22 W	0.8	0.9
20	11	1/4	11 ER 20 W	11 EL 20 W	11 IR 20 W	11 IL 20 W	0.8	0.9
19	11	1/4	11 ER 19 W	11 EL 19 W	11 IR 19 W	11 IL 19 W	0.8	1.0
18	11	1/4	11 ER 18 W	11 EL 18 W	11 IR 18 W	11 IL 18 W	0.8	1.0
16	11	1/4	11 ER 16 W	11 EL 16 W	11 IR 16 W	11 IL 16 W	0.9	1.1
14	11	1/4	11 ER 14 W	11 EL 14 W	11 IR 14 W	11 IL 14 W	0.9	1.1
12	11	1/4			11 IR 12 W	11 IL 12 W	1.0	1.1
11	11	1/4			11 IR 11 W	11 IL 11 W	0.9	1.2
72	16	3/8	16 ER 72 W	16 EL 72 W	16 IR 72 W	16 IL 72 W	0.7	0.4
60	16	3/8	16 ER 60 W	16 EL 60 W	16 IR 60 W	16 IL 60 W	0.7	0.4
56	16	3/8	16 ER 56 W	16 EL 56 W	16 IR 56 W	16 IL 56 W	0.7	0.4
48	16	3/8	16 ER 48 W	16 EL 48 W	16 IR 48 W	16 IL 48 W	0.6	0.6
40	16	3/8	16 ER 40 W	16 EL 40 W	16 IR 40 W	16 IL 40 W	0.6	0.6
36	16	3/8	16 ER 36 W	16 EL 36 W	16 IR 36 W	16 IL 36 W	0.6	0.6
32	16	3/8	16 ER 32 W	16 EL 32 W	16 IR 32 W	16 IL 32 W	0.6	0.6
28	16	3/8	16 ER 28 W	16 EL 28 W	16 IR 28 W	16 IL 28 W	0.6	0.7
26	16	3/8	16 ER 26 W	16 EL 26 W	16 IR 26 W	16 IL 26 W	0.7	0.7
24	16	3/8	16 ER 24 W	16 EL 24 W	16 IR 24 W	16 IL 24 W	0.7	0.8

## Whitworth - 55° BSW, BSF, BSP, BSB

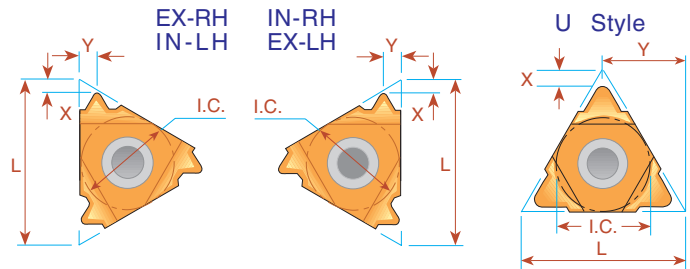


Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand	Right Hand	Left Hand		
22	16	3/8	16 ER 22 W	16 EL 22 W	16 IR 22 W	16 IL 22 W	0.8	0.9
20	16	3/8	16 ER 20 W	16 EL 20 W	16 IR 20 W	16 IL 20 W	0.8	0.9
19	16	3/8	16 ER 19 W	16 EL 19 W	16 IR 19 W	16 IL 19 W	0.8	1.0
18	16	3/8	16 ER 18 W	16 EL 18 W	16 IR 18 W	16 IL 18 W	0.8	1.0
16	16	3/8	16 ER 16 W	16 EL 16 W	16 IR 16 W	16 IL 16 W	0.9	1.1
14	16	3/8	16 ER 14 W	16 EL 14 W	16 IR 14 W	16 IL 14 W	1.0	1.2
12	16	3/8	16 ER 12 W	16 EL 12 W	16 IR 12 W	16 IL 12 W	1.1	1.4
11	16	3/8	16 ER 11 W	16 EL 11 W	16 IR 11 W	16 IL 11 W	1.1	1.5
10	16	3/8	16 ER 10 W	16 EL 10 W	16 IR 10 W	16 IL 10 W	1.1	1.5
9	16	3/8	16 ER 9 W	16 EL 9 W	16 IR 9 W	16 IL 9 W	1.2	1.7
8	16	3/8	16 ER 8 W	16 EL 8 W	16 IR 8 W	16 IL 8 W	1.2	1.5
7	22	1/2	22 ER 7 W	22 EL 7 W	22 IR 7 W	22 IL 7 W	1.6	2.3
6	22	1/2	22 ER 6 W	22 EL 6 W	22 IR 6 W	22 IL 6 W	1.6	2.3
5	22	1/2	22 ER 5 W	22 EL 5 W	22 IR 5 W	22 IL 5 W	1.7	2.4
4.5	22U	1/2U	22U E/I/R/L 4.5W				2.3	11.0
4	22U	1/2U	22U E/I/R/L 4 W				1.8	11.0
4.5	27	5/8	27 ER 4.5W	27 EL 4.5W	27 IR 4.5W	27 IL 4.5W	1.8	2.6
4	27	5/8	27 ER 4 W	27 EL 4 W	27 IR 4 W	27 IL 4 W	2.0	2.9
3.5	27U	5/8U	27U E/I/R/L 3.5 W				2.1	13.7
3.25	27U	5/8U	27U E/I/R/L 3.25W				2.0	13.7
3	27U	5/8U	27U E/I/R/L 3 W				2.3	13.7
2.75	27U	5/8U	27U E/I/R/L 2.75W				2.4	13.7

Order example: 16 IR 18 W BMA

\* Available only in BXC grade

## Whitworth - 55° BSW, BSF, BSP, BSB Type B


Ground Profile with Sintered Chip-breaker



Pitch TPI	L	I.C. in	EXTERNAL	INTERNAL	X	Y
			Ordering Code Right Hand	Ordering Code Right Hand		
19	16	3/8	<b>16 ER B 19 W</b>	<b>16 IR B 19 W</b>	0.8	1.0
16	16	3/8	<b>16 ER B 16 W</b>	<b>16 IR B 16 W</b>	0.9	1.1
14	16	3/8	<b>16 ER B 14 W</b>	<b>16 IR B 14 W</b>	1.0	1.2
11	16	3/8	<b>16 ER B 11 W</b>	<b>16 IR B 11 W</b>	1.1	1.5
10	16	3/8	<b>16 ER B 10 W</b>	<b>16 IR B 10 W</b>	1.1	1.5

Order example: 16 IR B 10 W BMA



## Vertical

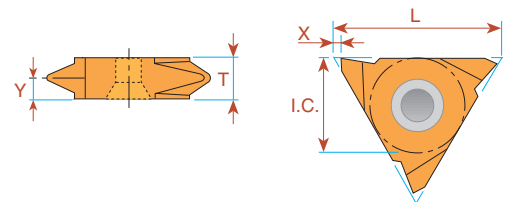

Pitch TPI	L	I.C. in	EXTERNAL	X	Y	T
			Ordering Code Right Hand			
19	16	3/8	<b>16V ER 19 W</b>	1.0	0.9	3.6
14	16	3/8	<b>16V ER 14 W</b>	1.0	1.2	3.6
11	16	3/8	<b>16V ER 11 W</b>	1.0	1.5	3.6

Order example: 16V ER 14 W MXC

## Multitooth

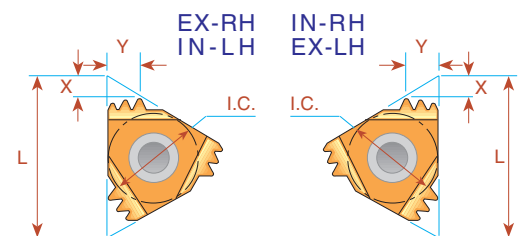

Pitch TPI	L	I.C. in	Number of Teeth	EXTERNAL	Anvil	INTERNAL	Anvil	X	Y
				Ordering Code		Ordering Code			
14	16	3/8	2	<b>16 ER 14 W 2M</b>	AE16M	<b>16 IR 14 W 2M</b>	AI16M	1.7	2.7
14	22	1/2	3	<b>22 ER 14 W 3M</b>	AE22M	<b>22 IR 14 W 3M</b>	AI22M	2.8	4.5
11	22	1/2	2	<b>22 ER 11 W 2M</b>	AE22M	<b>22 IR 11 W 2M</b>	AI22M	2.3	3.4



Order example: 22 IR 14 W 3M BMA

For recommended number of passes see page 45

For Carbide Grade and Cutting Speed see page 44



## NPT

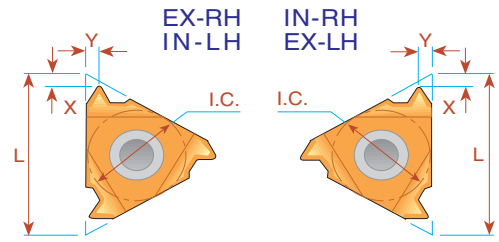


Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand	Right Hand	Left Hand		
27	6	5/32	ULTRA MINIATURE →		* 06 IR 27 NPT	* 06 IL 27 NPT	0.6	0.6
27	8	3/16	MINIATURE →		* 08 IR 27 NPT	* 08 IL 27 NPT	0.6	0.6
18	8	3/16			* 08 IR 18 NPT	* 08 IL 18 NPT	0.6	0.6
27	11	1/4	11 ER 27 NPT	11 EL 27 NPT	11 IR 27 NPT	11 IL 27 NPT	0.7	0.8
18	11	1/4	11 ER 18 NPT	11 EL 18 NPT	11 IR 18 NPT	11 IL 18 NPT	0.8	1.0
14	11	1/4	11 ER 14 NPT	11 EL 14 NPT	11 IR 14 NPT	11 IL 14 NPT	0.8	1.0
27	16	3/8	16 ER 27 NPT	16 EL 27 NPT	16 IR 27 NPT	16 IL 27 NPT	0.7	0.8
18	16	3/8	16 ER 18 NPT	16 EL 18 NPT	16 IR 18 NPT	16 IL 18 NPT	0.8	1.0
14	16	3/8	16 ER 14 NPT	16 EL 14 NPT	16 IR 14 NPT	16 IL 14 NPT	0.9	1.2
11.5	16	3/8	16 ER 11.5 NPT	16 EL 11.5 NPT	16 IR 11.5 NPT	16 IL 11.5 NPT	1.1	1.5
8	16	3/8	16 ER 8 NPT	16 EL 8 NPT	16 IR 8 NPT	16 IL 8 NPT	1.3	1.8

Order example: 16 ER 14 NPT MXC

\* Available only in BXC grade

## Type B



Ground Profile with Sintered Chip-breaker



Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Right Hand	Right Hand	Right Hand		
18	16	3/8	16 ER B 18 NPT	16 IR B 18 NPT	16 IR B 18 NPT	16 IR B 18 NPT	0.8	1.0
14	16	3/8	16 ER B 14 NPT	16 IR B 14 NPT	16 IR B 14 NPT	16 IR B 14 NPT	0.9	1.2
11.5	16	3/8	16 ER B 11.5 NPT	16 IR B 11.5 NPT	16 IR B 11.5 NPT	16 IR B 11.5 NPT	1.1	1.5
8	16	3/8	16 ER B 8 NPT	16 IR B 8 NPT	16 IR B 8 NPT	16 IR B 8 NPT	1.3	1.8

Order example: 16 IR B 11.5 NPT BMA

## NPT Multitooth

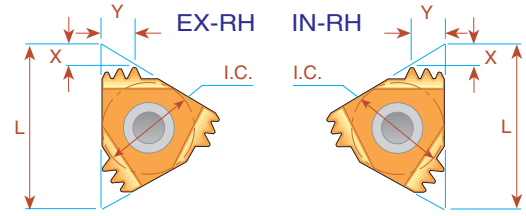



Pitch TPI	L	I.C. in	Number of Teeth	<b>EXTERNAL</b> Ordering Code		Anvil	<b>INTERNAL</b> Ordering Code		Anvil	X	Y
11.5	22	1/2	2	<b>22 ER 11.5 NPT 2M</b>		AE22M	<b>22 IR 11.5 NPT 2M</b>		AI22M	2.3	3.5
11.5	27	5/8	3	<b>27 ER 11.5 NPT 3M</b>		AE27M	<b>27 IR 11.5 NPT 3M</b>		AI27M	3.3	5.5
8	27	5/8	2	<b>27 ER 8 NPT 2M</b>		AE27M	<b>27 IR 8 NPT 2M</b>		AI27M	3.1	5.0

Order example: 27 IR 11.5 NPT 3M BMA

For recommended number of passes see page 45

## NPTF - Dryseal

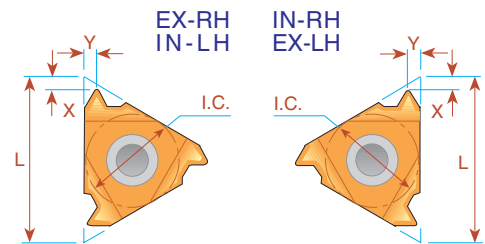



Pitch TPI	L	I.C. in	<b>EXTERNAL</b> Ordering Code		<b>INTERNAL</b> Ordering Code		X	Y
			Right Hand	Left Hand	Right Hand	Left Hand		
27	6	5/32	ULTRA MINIATURE →		<b>*06 IR 27 NPTF</b>	<b>*06 IL 27 NPTF</b>	0.7	0.6
27	8	3/16	MINIATURE →		<b>*08 IR 27 NPTF</b>	<b>*08 IL 27 NPTF</b>	0.6	0.6
18	8	3/16			<b>*08 IR 18 NPTF</b>	<b>*08 IL 18 NPTF</b>	0.6	0.6
27	11	1/4	<b>11 ER 27 NPTF</b>	<b>11 EL 27 NPTF</b>	<b>11 IR 27 NPTF</b>	<b>11 IL 27 NPTF</b>	0.7	0.7
18	11	1/4	<b>11 ER 18 NPTF</b>	<b>11 EL 18 NPTF</b>	<b>11 IR 18 NPTF</b>	<b>11 IL 18 NPTF</b>	0.8	1.0
14	11	1/4	<b>11 ER 14 NPTF</b>	<b>11 EL 14 NPTF</b>	<b>11 IR 14 NPTF</b>	<b>11 IL 14 NPTF</b>	0.8	1.0
27	16	3/8	<b>16 ER 27 NPTF</b>	<b>16 EL 27 NPTF</b>	<b>16 IR 27 NPTF</b>	<b>16 IL 27 NPTF</b>	0.7	0.7
18	16	3/8	<b>16 ER 18 NPTF</b>	<b>16 EL 18 NPTF</b>	<b>16 IR 18 NPTF</b>	<b>16 IL 18 NPTF</b>	0.8	1.0
14	16	3/8	<b>16 ER 14 NPTF</b>	<b>16 EL 14 NPTF</b>	<b>16 IR 14 NPTF</b>	<b>16 IL 14 NPTF</b>	0.9	1.2
11.5	16	3/8	<b>16 ER 11.5 NPTF</b>	<b>16 EL 11.5 NPTF</b>	<b>16 IR 11.5 NPTF</b>	<b>16 IL 11.5 NPTF</b>	1.1	1.5
8	16	3/8	<b>16 ER 8 NPTF</b>	<b>16 EL 8 NPTF</b>	<b>16 IR 8 NPTF</b>	<b>16 IL 8 NPTF</b>	1.3	1.8

Order example: 11 ER 27 NPTF BMA

\* Available only in BXC grade

For Carbide Grade and Cutting Speed see page 44

## BSPT

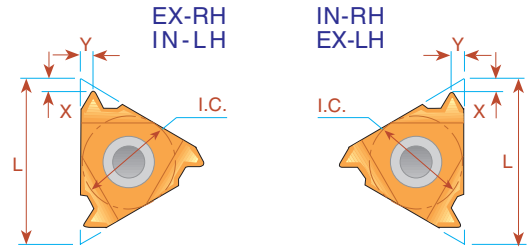


Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand	Right Hand	Left Hand		
28	6	5/32	ULTRA MINIATURE →		* 06 IR 28 BSPT	* 06 IL 28 BSPT	0.7	0.6
28	8	3/16	MINIATURE →		* 08 IR 28 BSPT	* 08 IL 28 BSPT	0.6	0.6
19	8	3/16			* 08 IR 19 BSPT	* 08 IL 19 BSPT	0.6	0.6
28	11	1/4			11 IR 28 BSPT	11 IL 28 BSPT	0.6	0.6
19	11	1/4			11 IR 19 BSPT	11 IL 19 BSPT	0.8	0.9
14	11	1/4			11 IR 14 BSPT	11 IL 14 BSPT	0.9	1.0
28	16	3/8	16 ER 28 BSPT	16 EL 28 BSPT	16 IR 28 BSPT	16 IL 28 BSPT	0.6	0.6
19	16	3/8	16 ER 19 BSPT	16 EL 19 BSPT	16 IR 19 BSPT	16 IL 19 BSPT	0.8	0.9
14	16	3/8	16 ER 14 BSPT	16 EL 14 BSPT	16 IR 14 BSPT	16 IL 14 BSPT	1.0	1.2
11	16	3/8	16 ER 11 BSPT	16 EL 11 BSPT	16 IR 11 BSPT	16 IL 11 BSPT	1.1	1.5

Order example: 11 IR 14 BSPT BMA

\* Available only in BXC grade

## Type B

Ground Profile with Sintered Chip-breaker





Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Right Hand	Right Hand	Right Hand		
19	16	3/8	16 ER B 19 BSPT				1.0	1.1
14	16	3/8	16 ER B 14 BSPT		16 IR B 14 BSPT		1.2	1.0
11	16	3/8	16 ER B 11 BSPT		16 IR B 11 BSPT		1.5	1.1

Order example: 16 ER B 11 BSPT BMA



## Acme

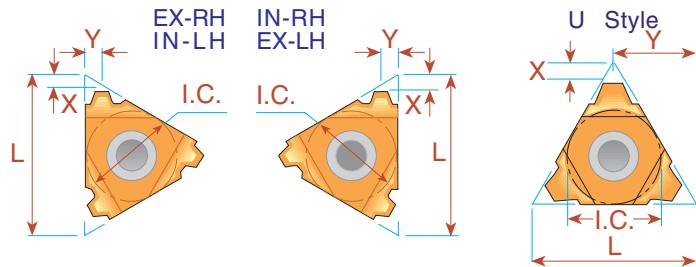



Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand	Right Hand	Left Hand		
16	8	3/16	<i>MINIATURE</i> →		<b>**08 IR 16 ACME</b>	<b>**08 IL 16 ACME</b>	0.6	0.6
14	8U	3/16U	<i>"U" MINIATURE</i> →		<b>*08U IR/L 14 ACME</b>		0.8	4.0
12	8U	3/16U			<b>*08U IR/L 12 ACME</b>		0.8	4.0
10	8U	3/16U			<b>*08U IR/L 10 ACME</b>		0.8	4.0
16	11	1/4	<b>11 ER 16 ACME</b>	<b>11 EL 16 ACME</b>	<b>11 IR 16 ACME</b>	<b>11 IL 16 ACME</b>	0.9	1.0
16	16	3/8	<b>16 ER 16 ACME</b>	<b>16 EL 16 ACME</b>	<b>16 IR 16 ACME</b>	<b>16 IL 16 ACME</b>	0.9	1.0
14	16	3/8	<b>16 ER 14 ACME</b>	<b>16 EL 14 ACME</b>	<b>16 IR 14 ACME</b>	<b>16 IL 14 ACME</b>	1.0	1.2
12	16	3/8	<b>16 ER 12 ACME</b>	<b>16 EL 12 ACME</b>	<b>16 IR 12 ACME</b>	<b>16 IL 12 ACME</b>	1.1	1.2
10	16	3/8	<b>16 ER 10 ACME</b>	<b>16 EL 10 ACME</b>	<b>16 IR 10 ACME</b>	<b>16 IL 10 ACME</b>	1.3	1.3
8	16	3/8	<b>16 ER 8 ACME</b>	<b>16 EL 8 ACME</b>	<b>16 IR 8 ACME</b>	<b>16 IL 8 ACME</b>	1.5	1.5
6	16	3/8	<b>16 ER 6 ACME</b>	<b>16 EL 6 ACME</b>	<b>16 IR 6 ACME</b>	<b>16 IL 6 ACME</b>	1.7	1.8
6	22	1/2	<b>22 ER 6 ACME</b>	<b>22 EL 6 ACME</b>	<b>22 IR 6 ACME</b>	<b>22 IL 6 ACME</b>	1.8	2.1
5	22	1/2	<b>22 ER 5 ACME</b>	<b>22 EL 5 ACME</b>	<b>22 IR 5 ACME</b>	<b>22 IL 5 ACME</b>	2.0	2.3
4	22U	1/2U	<b>22U ER/L 4 ACME</b>		<b>22U IR/L 4 ACME</b>		2.3	11.0
4	27	5/8	<b>27 ER 4 ACME</b>	<b>27 EL 4 ACME</b>	<b>27 IR 4 ACME</b>	<b>27 IL 4 ACME</b>	2.3	2.7
3	27U	5/8U	<b>27U ER/L 3 ACME</b>		<b>27U IR/L 3 ACME</b>		2.8	13.7
2	33U	3/4U	<b>33U ER/L 2 ACME</b>		<b>33U IR/L 2 ACME</b>		4.3	16.9

Order example: 16 ER 16 ACME MXC

\* Available only in BXC grade

\*\* One cutting edge

## Stub Acme

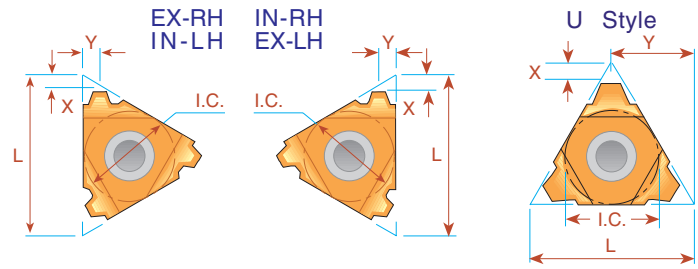



Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand	Right Hand	Left Hand		
16	8	3/16	MINIATURE →		**08 IR16 STACME	**08 IL16 STACME	0.6	0.6
14	8U	3/16U	"U" MINIATURE →		*08U IR/L 14 STACME		0.8	4.0
12	8U	3/16U			*08U IR/L 12 STACME		0.9	4.0
10	8U	3/16U			*08U IR/L 10 STACME		1.0	4.0
16	11	1/4	11 ER 16 STACME	11 EL 16 STACME			1.0	1.0
16	16	3/8	16 ER 16 STACME	16 EL 16 STACME	16 IR 16 STACME	16 IL 16 STACME	1.0	1.0
14	16	3/8	16 ER 14 STACME	16 EL 14 STACME	16 IR 14 STACME	16 IL 14 STACME	1.1	1.1
12	16	3/8	16 ER 12 STACME	16 EL 12 STACME	16 IR 12 STACME	16 IL 12 STACME	1.2	1.2
10	16	3/8	16 ER 10 STACME	16 EL 10 STACME	16 IR 10 STACME	16 IL 10 STACME	1.3	1.3
8	16	3/8	16 ER 8 STACME	16 EL 8 STACME	16 IR 8 STACME	16 IL 8 STACME	1.5	1.5
6	16	3/8	16 ER 6 STACME	16 EL 6 STACME	16 IR 6 STACME	16 IL 6 STACME	1.8	1.8
5	22	1/2	22 ER 5 STACME	22 EL 5 STACME	22 IR 5 STACME	22 IL 5 STACME	2.0	2.3
4	22U	1/2U	22U ER/L 4 STACME		22U IR/L 4 STACME		2.5	11.0
3	22U	1/2U	22U ER/L 3 STACME		22U IR/L 3 STACME		3.3	11.0
4	27	5/8	27 ER 4 STACME	27 EL 4 STACME	27 IR 4 STACME	27 IL 4 STACME	2.3	2.4
3	27	5/8	27 ER 3 STACME	27 EL 3 STACME	27 IR 3 STACME	27 IL 3 STACME	2.8	2.9
2	33U	3/4U	33U ER/L 2 STACME		33U IR/L 2 STACME		5.0	16.9

Order example: 22 IR 5 STACME MXC

\* Available only in BXC grade

\*\* One cutting edge

## Trapez - DIN 103

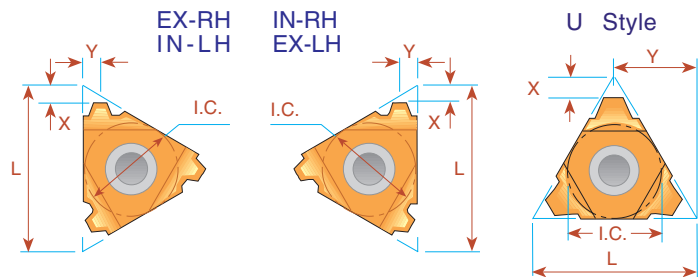

Pitch mm	L mm	I.C.	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand	Right Hand	Left Hand		
1.5	8	3/16	MINIATURE →		**08 IR 1.5 TR	**08 IL 1.5 TR	0.6	0.6
2.0	8U	3/16U	"U" MINIATURE →		*08U IR/L 2 TR		0.9	4.0
1.5	16	3/8	16 ER 1.5 TR	16 EL 1.5 TR	16 IR 2 TR	16 IL 2 TR	1.0	1.1
2.0	16	3/8	16 ER 2 TR	16 EL 2 TR		16 IL 2 TR	1.0	1.3
3.0	16	3/8	16 ER 3 TR	16 EL 3 TR		16 IL 3 TR	1.3	1.5
4.0	22	1/2	22 ER 4 TR	22 EL 4 TR	22 IR 4 TR	22 IL 4 TR	1.8	1.9
5.0	22	1/2	22 ER 5 TR	22 EL 5 TR	22 IR 5 TR	22 IL 5 TR	2.0	2.4
6.0	22	1/2	22 ER 6 TR	22 EL 6 TR	22 IR 6 TR	22 IL 6 TR	2.0	2.4
6.0	22U	1/2U	22U ER/L 6 TR		22U IR/L 6 TR		2.0	11.00
7.0	22U	1/2U	22U ER/L 7 TR		22U IR/L 7 TR		2.3	11.00
8.0	22U	1/2U	22U ER/L 8 TR		22U IR/L 8 TR		2.5	11.00
6.0	27	5/8	27 ER 6 TR	27 EL 6 TR	27 IR 6 TR	27 IL 6 TR	2.3	2.7
7.0	27	5/8	27 ER 7 TR	27 EL 7 TR	27 IR 7 TR	27 IL 7 TR	2.2	2.6
8.0	27U	5/8U	27U ER/L 8 TR		27U IR/L 8 TR		2.5	13.7
9.0	27U	5/8U	27U ER/L 9 TR		27U IR/L 9 TR		3.0	13.7
10.0	27U	5/8U	**27U ER/L 10 TR		**27U IR/L 10 TR		3.2	13.7
12.0	33U	3/4U	33U ER/L 12 TR		33U IR/L 12 TR		3.9	16.9



Order example: 22 IR 5 TR MXC

\* Available only in BXC grade

\*\* One cutting edge



## PG - DIN 40430

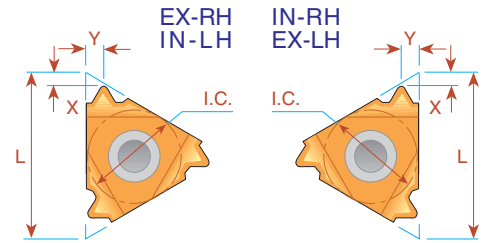


Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Standard	Right Hand	Standard		
20	8	3/16	<i>MINIATURE</i> →		<b>*08 IR 20 PG</b>	(PG 7)	0.6	0.7
18	11	1/4			<b>11 IR 18 PG</b>	(PG 9)	0.8	0.9
20	16	3/8	<b>16 ER 20 PG</b>	(PG 7)			0.7	0.8
18	16	3/8	<b>16 ER 18 PG</b>	(PG 9,11,13.5, 16)	<b>16 IR 18 PG</b>	(PG 11,13.5, 16)	0.8	0.9
16	16	3/8	<b>16 ER 16 PG</b>	(PG 21, 29, 36, 42, 48)	<b>16 IR 16 PG</b>	(PG 21, 29, 36, 42, 48)	0.8	1.0


Order example: 16 ER 16 PG BMA

\* Available only in BXC grade

## Sagengewinde - DIN 513



**IMPORTANT NOTE:**  
In C.P.T. standard execution, the flank with the large angle is the leading edge. If otherwise required, please specify in your order.


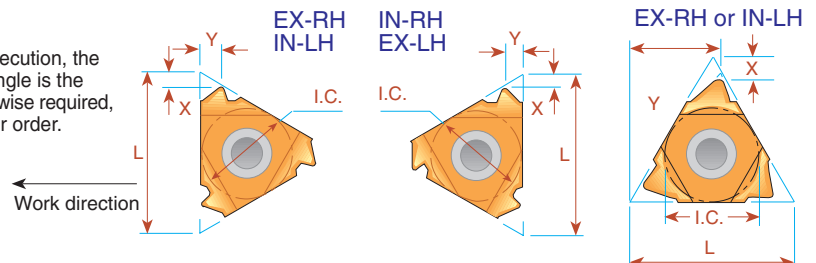


Pitch mm	L	I.C. in	EXTERNAL Ordering Code		X	Y	INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand			Right Hand	Left Hand		
2.0	16	3/8	<b>16 ER 2 SAGE</b>	<b>16 EL 2 SAGE</b>	1.1	1.6	<b>16 IR 2 SAGE</b>	<b>16 IL 2 SAGE</b>	1.2	1.7
3.0	22	1/2	<b>22 ER 3 SAGE</b>	<b>22 EL 3 SAGE</b>	1.5	2.4	<b>22 IR 3 SAGE</b>	<b>22 IL 3 SAGE</b>	1.9	2.9
4.0	22	1/2	<b>22 ER 4 SAGE</b>	<b>22 EL 4 SAGE</b>	1.9	3.1	<b>22 IR 4 SAGE</b>	<b>22 IL 4 SAGE</b>	2.3	3.5
* 5.0	22U	1/2U	<b>22U ER 5 SAGE</b>	<b>22U EL 5 SAGE</b>	1.2	11.6	<b>22U IR 5 SAGE</b>	<b>22U IL 5 SAGE</b>	1.9	11.7
* 6.0	22U	1/2U	<b>22U ER 6 SAGE</b>	<b>22U EL 6 SAGE</b>	1.2	11.7	<b>22U IR 6 SAGE</b>	<b>22U IL 6 SAGE</b>	2.1	11.9

Order example: 22 IR 4 SAGE BMA

\* Requires a special anvil



## Round - DIN 405

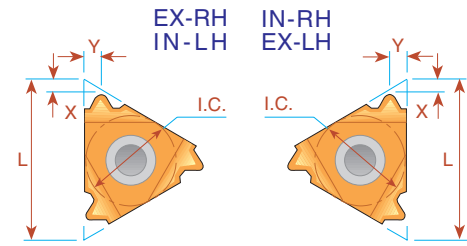

Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		X	Y	INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand			Right Hand	Left Hand		
10	16	3/8	16 ER 10 RD	16 EL 10 RD	1.1	1.2	16 IR 10 RD	16 IL 10 RD	1.1	1.2
8	16	3/8	16 ER 8 RD	16 EL 8 RD	1.4	1.3	16 IR 8 RD	16 IL 8 RD	1.4	1.4
6	16	3/8	16 ER 6 RD	16 EL 6 RD	1.5	1.7	16 IR 6 RD	16 IL 6 RD	1.4	1.5
6	22	1/2	22 ER 6 RD	22 EL 6 RD	1.5	1.7	22 IR 6 RD	22 IL 6 RD	1.5	1.7
4	22	1/2	22 ER 4 RD	22 EL 4 RD	2.2	2.3	22 IR 4 RD	22 IL 4 RD	2.2	2.3
4	27	5/8	27 ER 4 RD	27 EL 4 RD	2.2	2.3	27 IR 4 RD	27 IL 4 RD	2.2	2.3

Order example: 27 IL 4 RD BMA

## Round - DIN 20400

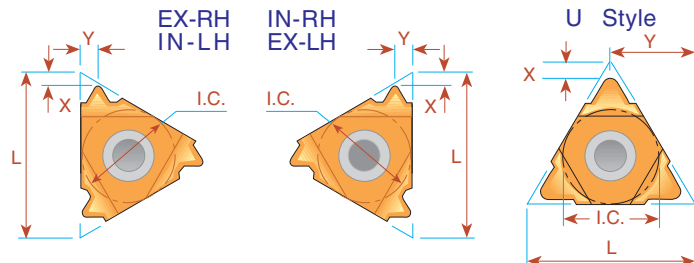



Pitch mm	L	I.C. in	EXTERNAL	INTERNAL	X	Y
			Ordering Code Right Hand	Ordering Code Right Hand		
4.0	22	1/2	22 ER 4.0 RD 20400	22 IR 4.0 RD 20400	1.4	1.4
5.0	22	1/2	22 ER 5.0 RD 20400	22 IR 5.0 RD 20400	1.7	1.8
6.0	22	1/2	22 ER 6.0 RD 20400	22 IR 6.0 RD 20400	1.7	2.0
8.0	27U	5/8U	* 27U - 8.0 RD 20400	*27U - 8.0 RD 20400	3.0	13.7

Order example: 22 ER 4.0 RD 20400 MXC

\* Same insert for Internal and External Right Hand Thread



## UNJ UNJC, UNJF, UNJEF, UNJS

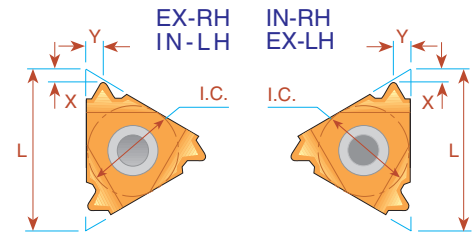

Pitch TPI	L	I.C. in	EXTERNAL Ordering Code		INTERNAL Ordering Code		X	Y
			Right Hand	Left Hand	Right Hand	Left Hand		
48	11	1/4	11 ER 48 UNJ	11 EL 48 UNJ	11 IR 48 UNJ	11 IL 48 UNJ	0.6	0.6
44	11	1/4	11 ER 44 UNJ	11 EL 44 UNJ	11 IR 44 UNJ	11 IL 44 UNJ	0.6	0.6
40	11	1/4	11 ER 40 UNJ	11 EL 40 UNJ	11 IR 40 UNJ	11 IL 40 UNJ	0.6	0.6
36	11	1/4	11 ER 36 UNJ	11 EL 36 UNJ	11 IR 36 UNJ	11 IL 36 UNJ	0.6	0.6
32	11	1/4	11 ER 32 UNJ	11 EL 32 UNJ	11 IR 32 UNJ	11 IL 32 UNJ	0.6	0.6
28	11	1/4	11 ER 28 UNJ	11 EL 28 UNJ	11 IR 28 UNJ	11 IL 28 UNJ	0.6	0.6
24	11	1/4	11 ER 24 UNJ	11 EL 24 UNJ	11 IR 24 UNJ	11 IL 24 UNJ	0.7	0.8
20	11	1/4	11 ER 20 UNJ	11 EL 20 UNJ	11 IR 20 UNJ	11 IL 20 UNJ	0.8	0.9
18	11	1/4	11 ER 18 UNJ	11 EL 18 UNJ	11 IR 18 UNJ	11 IL 18 UNJ	0.8	1.0
16	11	1/4	11 ER 16 UNJ	11 EL 16 UNJ	11 IR 16 UNJ	11 IL 16 UNJ	0.8	1.0
14	11	1/4	11 ER 14 UNJ	11 EL 14 UNJ	11 IR 14 UNJ	11 IL 14 UNJ	0.9	1.0
48	16	3/8	16 ER 48 UNJ	16 EL 48 UNJ	16 IR 48 UNJ	16 IL 48 UNJ	0.6	0.6
44	16	3/8	16 ER 44 UNJ	16 EL 44 UNJ	16 IR 44 UNJ	16 IL 44 UNJ	0.6	0.6
40	16	3/8	16 ER 40 UNJ	16 EL 40 UNJ	16 IR 40 UNJ	16 IL 40 UNJ	0.6	0.6
36	16	3/8	16 ER 36 UNJ	16 EL 36 UNJ	16 IR 36 UNJ	16 IL 36 UNJ	0.6	0.6
32	16	3/8	16 ER 32 UNJ	16 EL 32 UNJ	16 IR 32 UNJ	16 IL 32 UNJ	0.6	0.6
28	16	3/8	16 ER 28 UNJ	16 EL 28 UNJ	16 IR 28 UNJ	16 IL 28 UNJ	0.6	0.6
24	16	3/8	16 ER 24 UNJ	16 EL 24 UNJ	16 IR 24 UNJ	16 IL 24 UNJ	0.7	0.8
20	16	3/8	16 ER 20 UNJ	16 EL 20 UNJ	16 IR 20 UNJ	16 IL 20 UNJ	0.8	0.9
18	16	3/8	16 ER 18 UNJ	16 EL 18 UNJ	16 IR 18 UNJ	16 IL 18 UNJ	0.8	1.0
16	16	3/8	16 ER 16 UNJ	16 EL 16 UNJ	16 IR 16 UNJ	16 IL 16 UNJ	0.8	1.0
14	16	3/8	16 ER 14 UNJ	16 EL 14 UNJ	16 IR 14 UNJ	16 IL 14 UNJ	1.0	1.2
13	16	3/8	16 ER 13 UNJ	16 EL 13 UNJ	16 IR 13 UNJ	16 IL 13 UNJ	1.0	1.3
12	16	3/8	16 ER 12 UNJ	16 EL 12 UNJ	16 IR 12 UNJ	16 IL 12 UNJ	1.1	1.4
11	16	3/8	16 ER 11 UNJ	16 EL 11 UNJ	16 IR 11 UNJ	16 IL 11 UNJ	1.1	1.5
10	16	3/8	16 ER 10 UNJ	16 EL 10 UNJ	16 IR 10 UNJ	16 IL 10 UNJ	1.1	1.5
9	16	3/8	16 ER 9 UNJ	16 EL 9 UNJ	16 IR 9 UNJ	16 IL 9 UNJ	1.2	1.6
8	16	3/8	16 ER 8 UNJ	16 EL 8 UNJ	16 IR 8 UNJ	16 IL 8 UNJ	1.2	1.6

Order example: 16 IR 16 UNJ MXC


## MJ - ISO 5855

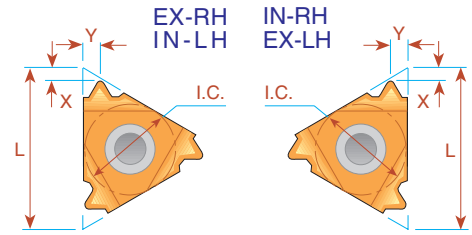


Pitch mm	L	I.C. in	EXTERNAL		INTERNAL		X	Y
			Ordering Code	Right Hand	Ordering Code	Right Hand		
1.0	11	1/4			<b>11 IR 1.0 MJ</b>		0.7	0.8
1.25	11	1/4			<b>11 IR 1.25MJ</b>		0.8	0.9
1.5	11	1/4			<b>11 IR 1.5 MJ</b>		0.8	1.0
2.0	11	1/4			<b>11 IR 2.0 MJ</b>		0.9	1.0
1.0	16	3/8		<b>16 ER 1.0 MJ</b>		<b>16 IR 1.0 MJ</b>	0.7	0.8
1.25	16	3/8		<b>16 ER 1.25MJ</b>		<b>16 IR 1.25MJ</b>	0.8	0.9
1.5	16	3/8		<b>16 ER 1.5 MJ</b>		<b>16 IR 1.5 MJ</b>	0.8	1.0
2.0	16	3/8		<b>16 ER 2.0 MJ</b>		<b>16 IR 2.0 MJ</b>	1.0	1.3

Order example: 16 ER 1.5 MJ BMA

## American Buttress



**IMPORTANT NOTE:**  
In C.P.T. standard execution, the flank with the large angle is the leading edge. If otherwise required, please specify in your order.

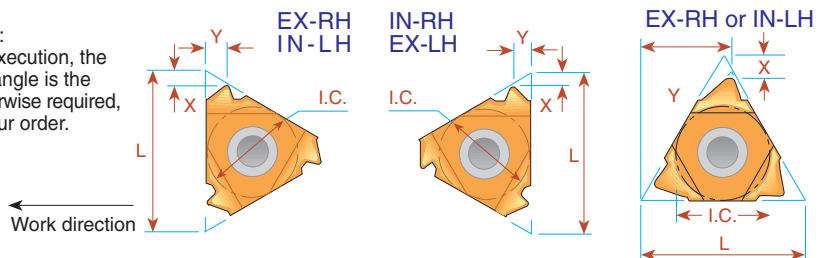



Pitch TPI	L	I.C. in	EXTERNAL		INTERNAL		X	Y
			Ordering Code	Right Hand	Left Hand	Ordering Code		
20	11	1/4	<b>11 ER 20 ABUT</b>	<b>11 EL 20 ABUT</b>	<b>11 IR 20 ABUT</b>	<b>11 IL 20 ABUT</b>	1.0	1.3
16	11	1/4	<b>11 ER 16 ABUT</b>	<b>11 EL 16 ABUT</b>	<b>11 IR 16 ABUT</b>	<b>11 IL 16 ABUT</b>	1.0	1.5
20	16	3/8	<b>16 ER 20 ABUT</b>	<b>16 EL 20 ABUT</b>	<b>16 IR 20 ABUT</b>	<b>16 IL 20 ABUT</b>	1.0	1.3
16	16	3/8	<b>16 ER 16 ABUT</b>	<b>16 EL 16 ABUT</b>	<b>16 IR 16 ABUT</b>	<b>16 IL 16 ABUT</b>	1.0	1.5
12	16	3/8	<b>16 ER 12 ABUT</b>	<b>16 EL 12 ABUT</b>	<b>16 IR 12 ABUT</b>	<b>16 IL 12 ABUT</b>	1.4	2.0
10	16	3/8	<b>16 ER 10 ABUT</b>	<b>16 EL 10 ABUT</b>	<b>16 IR 10 ABUT</b>	<b>16 IL 10 ABUT</b>	1.5	2.3
8	22	1/2	<b>22 ER 8 ABUT</b>	<b>22 EL 8 ABUT</b>	<b>22 IR 8 ABUT</b>	<b>22 IL 8 ABUT</b>	2.1	3.3
6	22	1/2	<b>22 ER 6 ABUT</b>	<b>22 EL 6 ABUT</b>	<b>22 IR 6 ABUT</b>	<b>22 IL 6 ABUT</b>	2.1	3.4
4	22U	1/2U	<b>22U ER 4 ABUT</b>	<b>22U EL 4 ABUT</b>	<b>22U IR 4 ABUT</b>	<b>22U IL 4 ABUT</b>	2.3	9.5
3	27U	5/8U	<b>27U ER 3 ABUT</b>	<b>27U EL 3 ABUT</b>	<b>27U IR 3 ABUT</b>	<b>27U IL 3 ABUT</b>	3.1	11.7

Order example: 16 IL 12 ABUT MXC

For Carbide Grade and Cutting Speed see page 44





## OIL Threads API Round

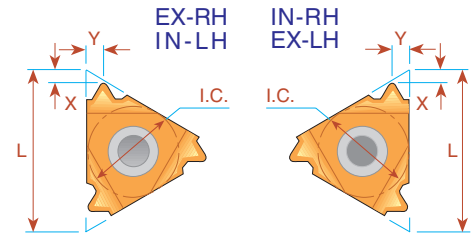

Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y
10	16	3/8	0.75	<b>16 ER 10 API RD</b>	<b>16 IR 10 API RD</b>	1.5	1.4
8	16	3/8	0.75	<b>16 ER 8 API RD</b>	<b>16 IR 8 API RD</b>	1.3	1.6

Order example: 16 ER 10 API RD BMA

## Multitooth

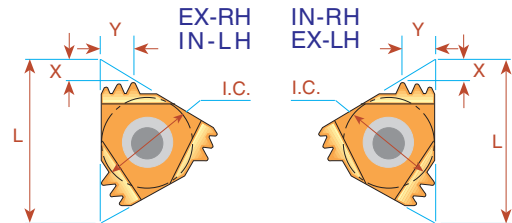


Pitch TPI	L	I.C. in	Number of Teeth	<b>EXTERNAL</b> Ordering Code	Anvil	<b>INTERNAL</b> Ordering Code	Anvil	X	Y
10	22	1/2	2	<b>22 ER 10API RD 2M</b>	AE22M	<b>22 IR 10API RD 2M</b>	AI22M	2.4	3.7
10	27	5/8	3	<b>27 ER 10API RD 3M</b>	AE27M	<b>27 IR 10API RD 3M</b>	AI27M	3.8	6.2
8	27	5/8	2	<b>27 ER 8 API RD 2M</b>	AE27M	<b>27 IR 8 API RD 2M</b>	AI27M	3.0	4.5


Order example: 27 IR 10 API RD 3M MXC

For recommended number of passes see page 45

## OIL Threads



### V-0.040

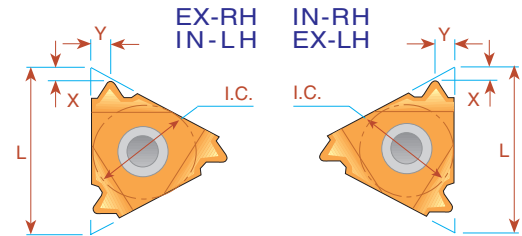

Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
5	22	1/2	3	<b>22 ER 5 API 403</b>	<b>22 IR 5 API 403</b>	1.8	2.5	2 <sup>3</sup> / <sub>8</sub> -4 <sup>1</sup> / <sub>2</sub> REG


### V-0.038R

Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
4	27	5/8	2	<b>27 ER 4 API 382</b>	<b>27 IR 4 API 382</b>	2.1	2.8	NC23-NC50
4	27	5/8	3	<b>27 ER 4 API 383</b>	<b>27 IR 4 API 383</b>	2.1	2.8	NC56-NC77

### V-0.050


Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
4	27	5/8	2	<b>27 ER 4 API 502</b>	<b>27 IR 4 API 502</b>	2.0	3.0	6 <sup>5</sup> / <sub>8</sub> REG
4	27	5/8	3	<b>27 ER 4 API 503</b>	<b>27 IR 4 API 503</b>	2.0	3.0	5 <sup>1</sup> / <sub>2</sub> , 7 <sup>5</sup> / <sub>8</sub> , 8 <sup>5</sup> / <sub>8</sub> , REG

## OIL Threads Extreme - Line Casing



Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
6	22	1/2	1.50	<b>22 ER 6 EL 1.5</b>	<b>22 IR 6 EL 1.5</b>	1.9	1.9	5-7 <sup>5</sup> / <sub>8</sub>
5	22	1/2	1.25	<b>22 ER 5 EL 1.25</b>	<b>22 IR 5 EL 1.25</b>	2.4	2.3	8 <sup>5</sup> / <sub>8</sub> -10 <sup>3</sup> / <sub>4</sub>

## Buttress Casing



Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
5	22	1/2	0.75	<b>22 ER 5 BUT 0.75</b>	<b>22 IR 5 BUT 0.75</b>	2.2	2.4	4 <sup>1</sup> / <sub>2</sub> -13 <sup>3</sup> / <sub>8</sub>
5	22	1/2	1.00	<b>22 ER 5 BUT 1.0</b>	<b>22 IR 5 BUT 1.0</b>	2.3	2.4	16-20

Order example: 22 ER 5 BUT 0.75 MXC

# Thread Turning Toolholders and Kits



## Toolholders Contents:

Product Identification	32
External Toolholders	33
External Toolholders with Top Clamp	34
Vertical Toolholders	34
Slim Throat Toolholders	34
Internal Toolholders	35
Internal Toolholders with Coolant Bore	36
Internal Toolholders with Top Clamp	36
Carbide Shank Boring Bars	37
Drophead Toolholders	37
Gang Toolholders	38

## Page:

## Kits Contents:


Standard Kits	39
Type B Kits	39
Miniature & Ultra-miniature Kits	40
Threading & Boring Combination Kit	40
Anvils and Anvil Kits	41-42

## Page:






## Product Identification

### Threading Toolholders Ordering Codes

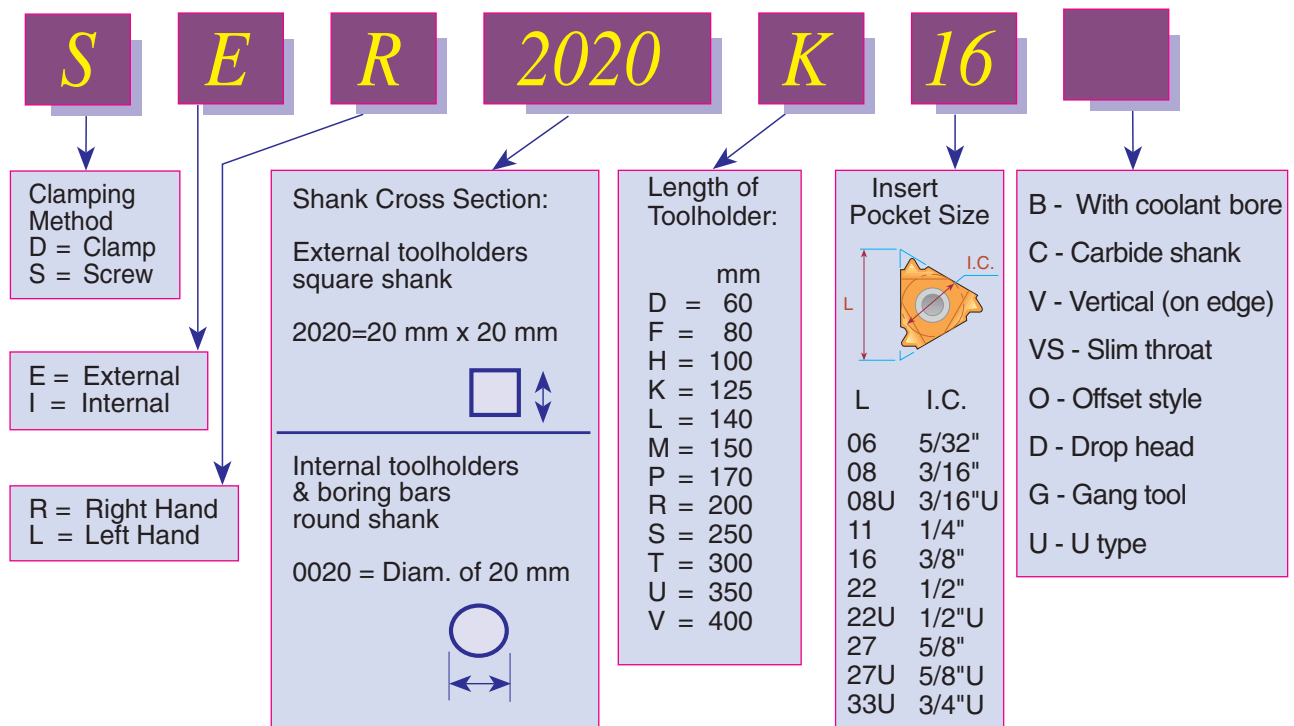

## External Toolholders

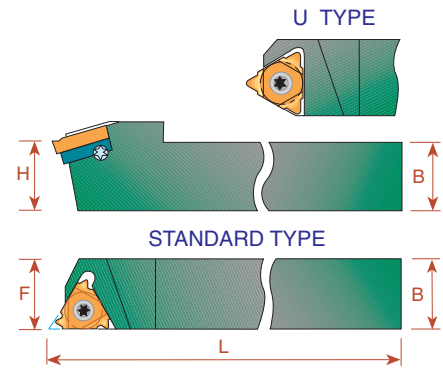


Ordering Code Right Hand		B = H	L	F	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
* SER 8 8 H11	11	8	100	11	S11	-	K11	-	-
* SER 10 10 H11	11	10	100	11	S11	-	K11	-	-
* SER 12 12 K11	11	12	125	12	S11	-	K11	-	-
SER 12 12 F16	16	12	80	16	S16	A16	K16	AE16	AI16
SER 16 16 H16	16	16	100	16	S16	A16	K16	AE16	AI16
SER 20 20 K16	16	20	125	20	S16	A16	K16	AE16	AI16
SER 25 25 M16	16	25	150	25	S16	A16	K16	AE16	AI16
SER 32 32 P16	16	32	170	32	S16	A16	K16	AE16	AI16
SER 25 25 M22	22	25	150	25	S22	A22	K22	AE22	AI22
SER 32 32 P22	22	32	170	32	S22	A22	K22	AE22	AI22
SER 40 40 R22	22	40	200	40	S22	A22	K22	AE22	AI22
SER 25 25 M22U	22U	25	150	28	S22	A22	K22	AE22 U	AI22U
SER 32 32 P22U	22U	32	170	32	S22	A22	K22	AE22 U	AI22U
SER 40 40 R22U	22U	40	200	40	S22	A22	K22	AE22 U	AI22U
SER 25 25 M27	27	25	150	32	S27	A27	K27	AE27	AI27
SER 32 32 P27	27	32	170	32	S27	A27	K27	AE27	AI27
SER 40 40 R27	27	40	200	40	S27	A27	K27	AE27	AI27
SER 25 25 M27U	27U	25	150	32	S27	A27	K27	AE27 U	AI27U
SER 32 32 P27U	27U	32	170	32	S27	A27	K27	AE27 U	AI27U
SER 40 40 R27U	27U	40	200	40	S27	A27	K27	AE27 U	AI27U
* SER 25 25 M33U	33U	25	150	32	S33	-	K33	-	-
* SER 32 32 P33U	33U	32	170	32	S33	-	K33	-	-

\* Toolholders with no anvil

For **LEFT HAND** toolholders specify **SEL** instead of **SER**

Toolholders are made with a **1.5° Helix Angle**. For other Helix Angles please consult helix angle chart in the technical section of this catalogue.

## External toolholders with top clamp

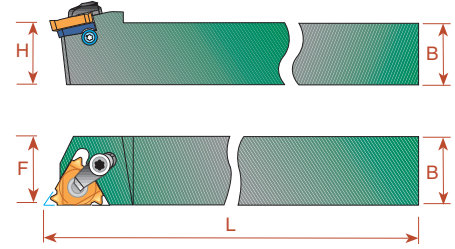



Ordering Code Right Hand		B=H	L	F	Insert Screw	Clamp	Anvil Screw	Torx Key	RH Anvil	LH Anvil
<b>DER 1212 H16</b>	16	12	100	16	S16	C16	A16S	K16	AE16	AI16
<b>DER 1616 H16</b>	16	16	100	16	S16	C16	A16S	K16	AE16	AI16
<b>DER 2020 K16</b>	16	20	125	20	S16	C16	A16S	K16	AE16	AI16
<b>DER 2525 M16</b>	16	25	150	25	S16	C16	A16S	K16	AE16	AI16
<b>* DER 2525 M22</b>	22	25	150	25	S22	C22	A22	K22	AE22	AI22


Toolholders are made with a **1.5° Helix Angle**. For other Helix Angles please consult helix angle chart in the technical section of this catalogue.

Two clamping methods can be used: screw or top clamp.


\* Use K21 torx key with C22 clamp


## Vertical toolholders

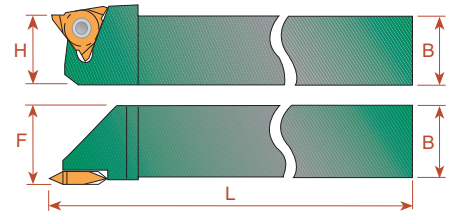


Ordering Code Right Hand		B=H	L	F	Insert Screw	Torx Key
<b>SER 1616 H16V</b>	16	16	100	18	S16S	K16
<b>SER 2020 K16V</b>	16	20	125	22	S16S	K16
<b>SER 2525 M16V</b>	16	25	150	27	S16S	K16
<b>SER 2525 M22V</b>	22	25	150	27.5	S22S	K22


## Slim Throat toolholders

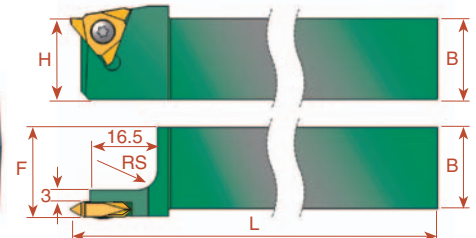

Ordering Code Right Hand		B=H	L	F	Insert Screw	Torx Key
<b>SER 1616 H16VS</b>	16	16	100	18	S16S	K16
<b>SER 2020 K16VS</b>	16	20	125	22	S16S	K16
<b>SER 2525 M16VS</b>	16	25	150	27	S16S	K16

## Internal Toolholders

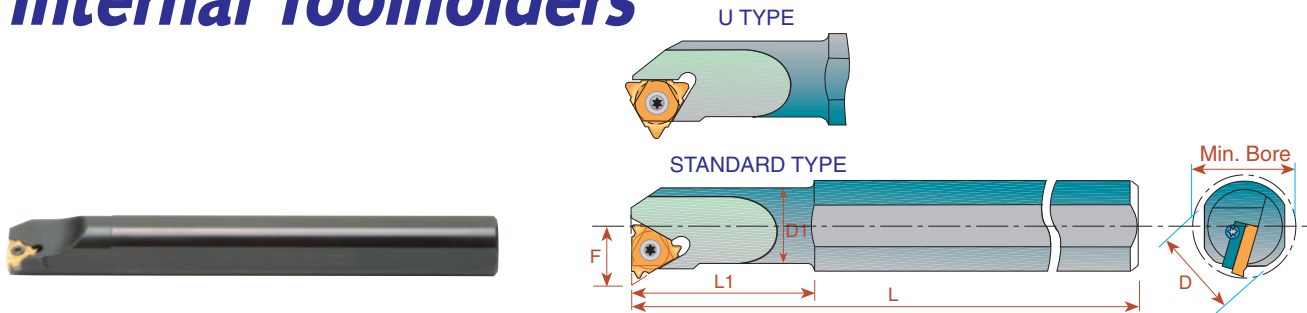

Ordering Code Right Hand		D	D1	Min Bore Diam.	L	L1	F	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
* SIR 0005 H06	6	12	5.1	6.0	100	12	4.3	S06	-	K06	-	-
* SIR 0007 K08	8	16	6.6	7.8	125	18	5.3	S08	-	K08	-	-
* SIR 0008 K08U	8U	16	7.3	9.0	125	21	6.6	S08	-	K08	-	-
* SIR 0010 H11	11	10	10	12	100	-	7.4	S11	-	K11	-	-
* SIR 0010 K11	11	16	10	12	125	25	7.4	S11	-	K11	-	-
* SIR 0013 L11	11	16	13	15	140	32	8.9	S11	-	K11	-	-
* SIR 0013 M16	16	16	13	16	150	32	10.2	S16S	-	K16	-	-
* SIR 0016 P16	16	20	16	19	170	40	11.7	S16S	-	K16	-	-
SIR 0020 P16	16	20	20	24	170	-	13.7	S16	A16	K16	AI16	AE16
SIR 0025 R16	16	25	25	29	200	-	16.2	S16	A16	K16	AI16	AE16
SIR 0032 S16	16	32	32	36	250	-	19.7	S16	A16	K16	AI16	AE16
SIR 0040 T16	16	40	40	44	300	-	23.7	S16	A16	K16	AI16	AE16
SIR 0050 U16	16	50	50	54	350	-	28.7	S16	A16	K16	AI16	AE16
* SIR 0020 P22	22	20	20	24	170	-	15.6	S22S	-	K22	-	-
SIR 0025 R22	22	25	25	29	200	-	18.1	S22	A22	K22	AI22	AE22
SIR 0032 S22	22	32	32	38	250	-	21.6	S22	A22	K22	AI22	AE22
SIR 0040 T22	22	40	40	46	300	-	25.6	S22	A22	K22	AI22	AE22
SIR 0050 U22	22	50	50	56	350	-	30.6	S22	A22	K22	AI22	AE22
SIR 0032 S22U	22U	32	32	38	250	-	24.4	S22	A22	K22	AI22U	AE22U
SIR 0040 T22U	22U	40	40	46	300	-	28.1	S22	A22	K22	AI22U	AE22U
SIR 0050 U22U	22U	50	50	57	350	-	30.8	S22	A22	K22	AI22U	AE22U
SIR 0032 S27	27	32	32	40	250	-	22.6	S27	A27	K27	AI27	AE27
SIR 0040 T27	27	40	40	48	300	-	26.6	S27	A27	K27	AI27	AE27
SIR 0050 U27	27	50	50	58	350	-	31.6	S27	A27	K27	AI27	AE27
SIR 0060 V27	27	60	60	68	400	-	36.6	S27	A27	K27	AI27	AE27
SIR 0032 S27U	27U	32	32	40	250	-	25.8	S27	A27	K27	AI27U	AE27U
SIR 0040 T27U	27U	40	40	48	300	-	29.4	S27	A27	K27	AI27U	AE27U
SIR 0050 U27U	27U	50	50	58	350	-	34.3	S27	A27	K27	AI27U	AE27U
SIR 0060 V27U	27U	60	60	68	400	-	39.7	S27	A27	K27	AI27U	AE27U
SIR 0050 U33U	33U	50	50	62	350	-	37.5	S33	-	K33	-	-


\* Toolholders with no anvil.


For **LEFT HAND** toolholders specify **SIL** instead of **SIR**

Toolholders are made with a **1.5° Helix Angle**. For other Helix Angles please consult Helix Angle chart in the technical section of this catalogue.



## Internal toolholders with coolant bore

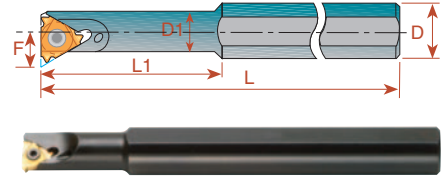


Ordering Code Right Hand		D	D1	Min Bore Diam.	L	L1	F	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
* SIR 0010 K11B	11	16	10	12	125	25	7.4	S11	-	K11	-	-
* SIR 0013 M16B	16	16	13	16	150	32	10.2	S16S	-	K16	-	-
* SIR 0016 P16B	16	20	16	19	170	40	11.7	S16S	-	K16	-	-
SIR 0020 P16B	16	20	20	24	170	-	13.7	S16	A16	K16	AI16	AE16
SIR 0025 R16B	16	25	25	29	200	-	16.2	S16	A16	K16	AI16	AE16
SIR 0032 S16B	16	32	32	36	250	-	19.7	S16	A16	K16	AI16	AE16
SIR 0025 R22B	22	25	25	29	200	-	18.1	S22	A22	K22	AI22	AE22


\* Toolholders with no anvil

For **LEFT HAND** toolholders specify **SIL** instead of **SIR**

Toolholders are made with a **1.5° Helix Angle**. For other Helix Angles please consult helix angle chart in the technical section of this catalogue.

## Internal toolholders with top clamp

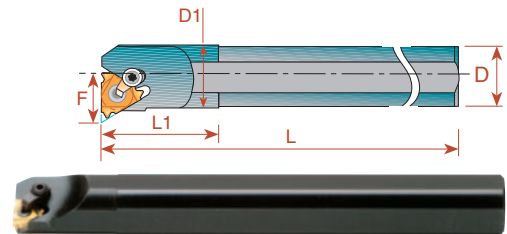

Ordering Code Right Hand		D	D1	Min Bore Diam.	L	L1	F	Insert Screw	Clamp	Anvil Screw	Torx Key	RH Anvil	LH Anvil
DIR 0020 P16	16	20	20	24	170	-	13.7	S16	C16	A16S	K16	AI16	AE16
DIR 0025 R16	16	25	25	29	200	-	16.2	S16	C16	A16S	K16	AI16	AE16
DIR 0032 S16	16	32	32	36	250	-	19.7	S16	C16	A16S	K16	AI16	AE16
* DIR 0025 R22	22	25	25	29	200	-	18.1	S22	C22	A22	K22	AI22	AE22


For **LEFT HAND** toolholders specify **DIL** instead of **DIR**


Two clamping methods can be used: screw or top clamp

\* Use K21 torx key with C22 clamp

## Carbide Shank Boring Bars With coolant bore

Carbide Shank Boring Bars are used when chatter and deflection are expected due to long overhang in deep small bores.

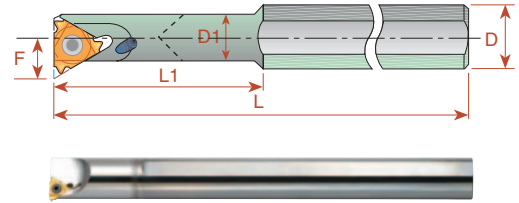



Ordering Code Right Hand		D	D1	Min Bore Diam.	L	L1	F	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
<b>SIR 0005 H06CB</b>	6	6	5.1	6.0	100	26	4.3	S06	-	K06	-	-
<b>SIR 0007 K08CB</b>	8	8	6.6	7.8	125	31	5.3	S08	-	K08	-	-
<b>SIR 0008 K08UCB</b>	8U	8	7.3	9.0	125	35	6.6	S08	-	K08	-	-
<b>SIR 0010 M11CB</b>	11	10	10	12	150	-	7.4	S11	-	K11	-	-
<b>SIR 0012 P11CB</b>	11	12	12	15	170	-	8.4	S11	-	K11	-	-
<b>SIR 0016 R16CB</b>	16	16	16	19	200	-	11.7	S16S	-	K16	-	-
* <b>SIR 0020 S16CB</b>	16	20	20	23	250	-	13.7	S16	A16	K16	AI16	AE16
* <b>SIR 0025 S16CB</b>	16	25	25	28	250	-	16.2	S16	A16	K16	AI16	AE16

\* Carbide shank boring bars with anvils

For **LEFT HAND** toolholders specify **SIL** instead of **SIR**


## Drophead Toolholders




Ordering Code Right Hand		A	A1	C	C1	F	C2	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
<b>SER 2020 K16D</b>	16	20	20	125	21.0	25	38	S16	A16	K16	AE16	AI16
<b>SER 2525 M16D</b>	16	25	25	150	21.0	32	38	S16	A16	K16	AE16	AI16
<b>SER 2525 M22D</b>	22	25	25	150	25.0	32	38	S22	A22	K22	AE22	AI22

## Gang Toolholders

Gang Toolholders are External Holders, used in small automatic machines with a gangtool post

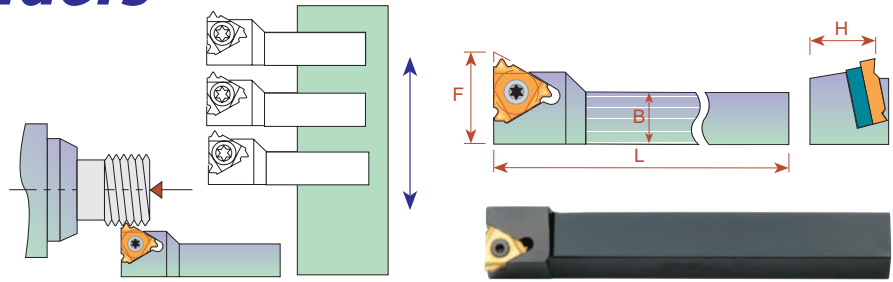

Ordering Code Right Hand		B = H	L	F	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
* <b>SER 8 8 H11G</b>	11	8	100	12.0	S11	-	K11	-	-
* <b>SER 10 10 H11G</b>	11	10	100	14.0	S11	-	K11	-	-
<b>SER 16 16 K16G</b>	16	16	125	21.7	S16	A16	K16	AE16	AI16
<b>SER 20 20 K16G</b>	16	20	125	26.2	S16	A16	K16	AE16	AI16

\* Toolholders with no anvil

For **LEFT HAND** toolholders specify **SEL** instead of **SER**

## Standard Kits

Threading Kits are a versatile solution for users that cut a variety of thread types in limited quantity and do not want to sacrifice thread quality.

### EXTERNAL ISO KIT Ordering Code:KEG

#### INSERTS

16 ER A60 P25C  
16 ER G60 P25C  
16 ER 0.75 ISO P25C  
16 ER 1.0 ISO P25C  
16 ER 1.25 ISO P25C  
16 ER 1.5 ISO P25C  
16 ER 1.75 ISO P25C  
16 ER 2.0 ISO P25C  
16 ER 2.5 ISO P25C  
16 ER 3.0 ISO P25C

#### TOOLHOLDER

SER 2020 K16

#### KEY

K16

#### SCREW

S16

### INTERNAL ISO KIT Ordering Code:KIG

#### INSERTS

16 IR A60 P25C  
16 IR G60 P25C  
16 IR 0.75 ISO P25C  
16 IR 1.0 ISO P25C  
16 IR 1.25 ISO P25C  
16 IR 1.5 ISO P25C  
16 IR 1.75 ISO P25C  
16 IR 2.0 ISO P25C  
16 IR 2.5 ISO P25C  
16 IR 3.0 ISO P25C

#### TOOLHOLDER

SIR 0020 P16

#### KEY

K16

#### SCREW


S16



If a larger toolholder with a 25 mm shank is required, add to the Kit "25". For example: KIG-25

## Type B Kits

Type B threading inserts.  
A combination of ground profile and sintered chip-breaker threading inserts.  
BMA Grade: Sub-Micron carbide grade with TIALN Multi-Layer Coating.

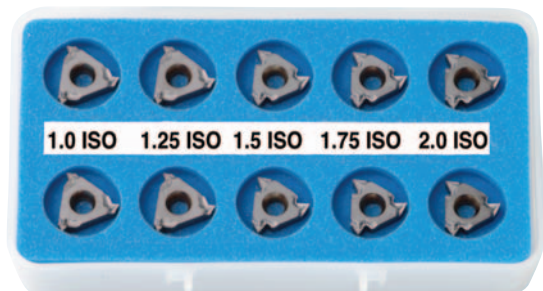

### EXTERNAL ISO KIT KEMB-BMA

16 ER B 1.0 ISO BMA 2 Stk  
16 ER B 1.25 ISO BMA 2 Stk  
16 ER B 1.5 ISO BMA 2 Stk  
16 ER B 1.75 ISO BMA 2 Stk  
16 ER B 2.0 ISO BMA 2 Stk

### INTERNAL ISO KIT KIMB-BMA

16 IR B 1.0 ISO BMA 2 Stk  
16 IR B 1.25 ISO BMA 2 Stk  
16 IR B 1.5 ISO BMA 2 Stk  
16 IR B 1.75 ISO BMA 2 Stk  
16 IR B 2.0 ISO BMA 2 Stk



## Miniature & Ultra-miniature Kits



Ordering Code	Type	No. of Inserts	Insert	Boring Bar	Key
<b>KU60M-BXC</b>	ULTRA	10	06 IR A60 BXC	SIR 0005 H06	K6
<b>KM60M-BXC</b>	MINI	10	08 IR A60 BXC	SIR 0007 K08	K8

## Threading & Boring Combination Kit



A practical and convenient combination kit for **Ultra Miniature** Threading and Boring. It enables Boring and Threading of mini bores as small as **6 mm diameter (1/4")** with just one deep reaching CARBIDE shank ultra mini Boring Bar.



Ordering Code	Contents			Key
	Threading Insert	Turning Insert	Boring Bar	
<b>KC6TM</b>	06 IR A60 BXC 10 Pcs	06 IR TURN BMA 10 Pcs	SIR 0005 H06CB	K6

- BMA** - Coated carbide grade for medium to high cutting speeds
- BXC** - Coated carbide grade for low cutting speed - 40 to 90 m/min
- CB** - Carbide shank boring bar with coolant bore


## Thread Helix Angle

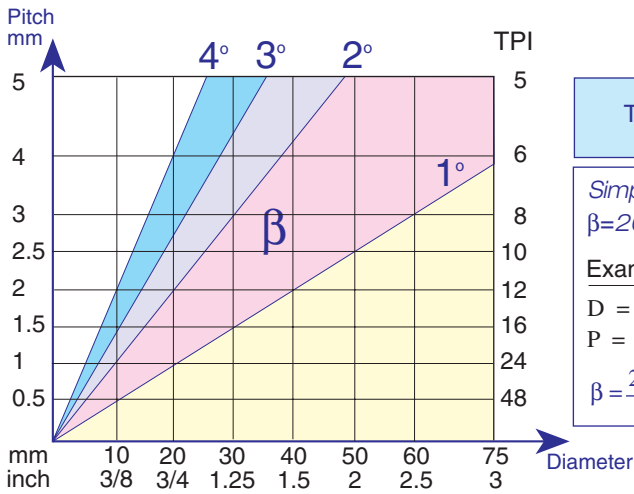

## Standard and Slanted Anvils

C.P.T. Toolholders Pockets have a built in 1.5° helix angle. This angle may be adjusted to better match the thread helix angle by simply changing the anvil.

Negative helix is usually used when threading RH thread with LH Holder or LH thread with RH Holder.

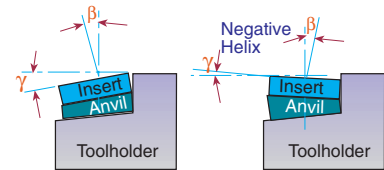

L	IC	Pocket's Angle $\gamma$	4.5°	3.5°	2.5°	1.5° Standard	0.5°	-0.5°	-1.5°
16	3/8	EX-RH OR IN-LH	AE16+4.5	AE16+3.5	AE16+2.5	<b>AE16</b>	AE16+0.5	AE16-0.5	AE16-1.5
16	3/8	EX-LH OR IN-RH	AI 16+4.5	AI 16+3.5	AI 16+2.5	<b>AI 16</b>	AI 16+0.5	AI 16-0.5	AI 16-1.5
22	1/2	EX-RH OR IN-LH	AE22+4.5	AE22+3.5	AE22+2.5	<b>AE22</b>	AE22+0.5	AE22-0.5	AE22-1.5
22	1/2	EX-LH OR IN-RH	AI 22+4.5	AI 22+3.5	AI 22+2.5	<b>AI 22</b>	AI 22+0.5	AI 22-0.5	AI 22-1.5
22U	1/2U	EX-RH OR IN-LH	AE22U+4.5	AE22U+3.5	AE22U+2.5	<b>AE22U</b>	AE22U+0.5	AE22U-0.5	AE22U-1.5
22U	1/2U	EX-LH OR IN-RH	AI 22U+4.5	AI 22U+3.5	AI 22U+2.5	<b>AI 22U</b>	AI 22U+0.5	AI 22U-0.5	AI 22U-1.5
27	5/8	EX-RH OR IN-LH	AE27+4.5	AE27+3.5	AE27+2.5	<b>AE27</b>	AE27+0.5	AE27-0.5	AE27-1.5
27	5/8	EX-LH OR IN-RH	AI 27+4.5	AI 27+3.5	AI 27+2.5	<b>AI 27</b>	AI 27+0.5	AI 27-0.5	AI 27-1.5
27U	5/8U	EX-RH OR IN-LH	AE27U+4.5	AE27U+3.5	AE27U+2.5	<b>AE27U</b>	AE27U+0.5	AE27U-0.5	AE27U-1.5
27U	5/8U	EX-LH OR IN-RH	AI 27U+4.5	AI 27U+3.5	AI 27U+2.5	<b>AI 27U</b>	AI 27U+0.5	AI 27U-0.5	AI 27U-1.5

## Anvil Kits

5 AE and 5 AI anvils with various helix angles




AE (FOR EX.RH. & IN.LH.)

AI (FOR IN.RH. & EX.LH.)



Ordering Code	Contents				
<b>KA16</b>	AE16+4.5 AI 16+4.5	AE16+3.5 AI 16+3.5	AE16+2.5 AI 16+2.5	AE16+0.5 AI 16+0.5	AE16-1.5 AI 16-1.5
<b>KA22</b>	AE22+4.5 AI 22+4.5	AE22+3.5 AI 22+3.5	AE22+2.5 AI 22+2.5	AE22+0.5 AI 22+0.5	AE22-1.5 AI 22-1.5
<b>KA22U</b>	AE22U+4.5 AI 22U+4.5	AE22U+3.5 AI 22U+3.5	AE22U+2.5 AI 22U+2.5	AE22U+0.5 AI 22U+0.5	AE22U-1.5 AI 22U-1.5
<b>KA27</b>	AE27+4.5 AI 27+4.5		AE27+2.5 AI 27+2.5		AE27-1.5 AI 27-1.5
<b>KA27U</b>	AE27U+4.5 AI 27U+4.5		AE27U+2.5 AI 27U+2.5		AE27U-1.5 AI 27U-1.5

# Thread Turning Technical Section

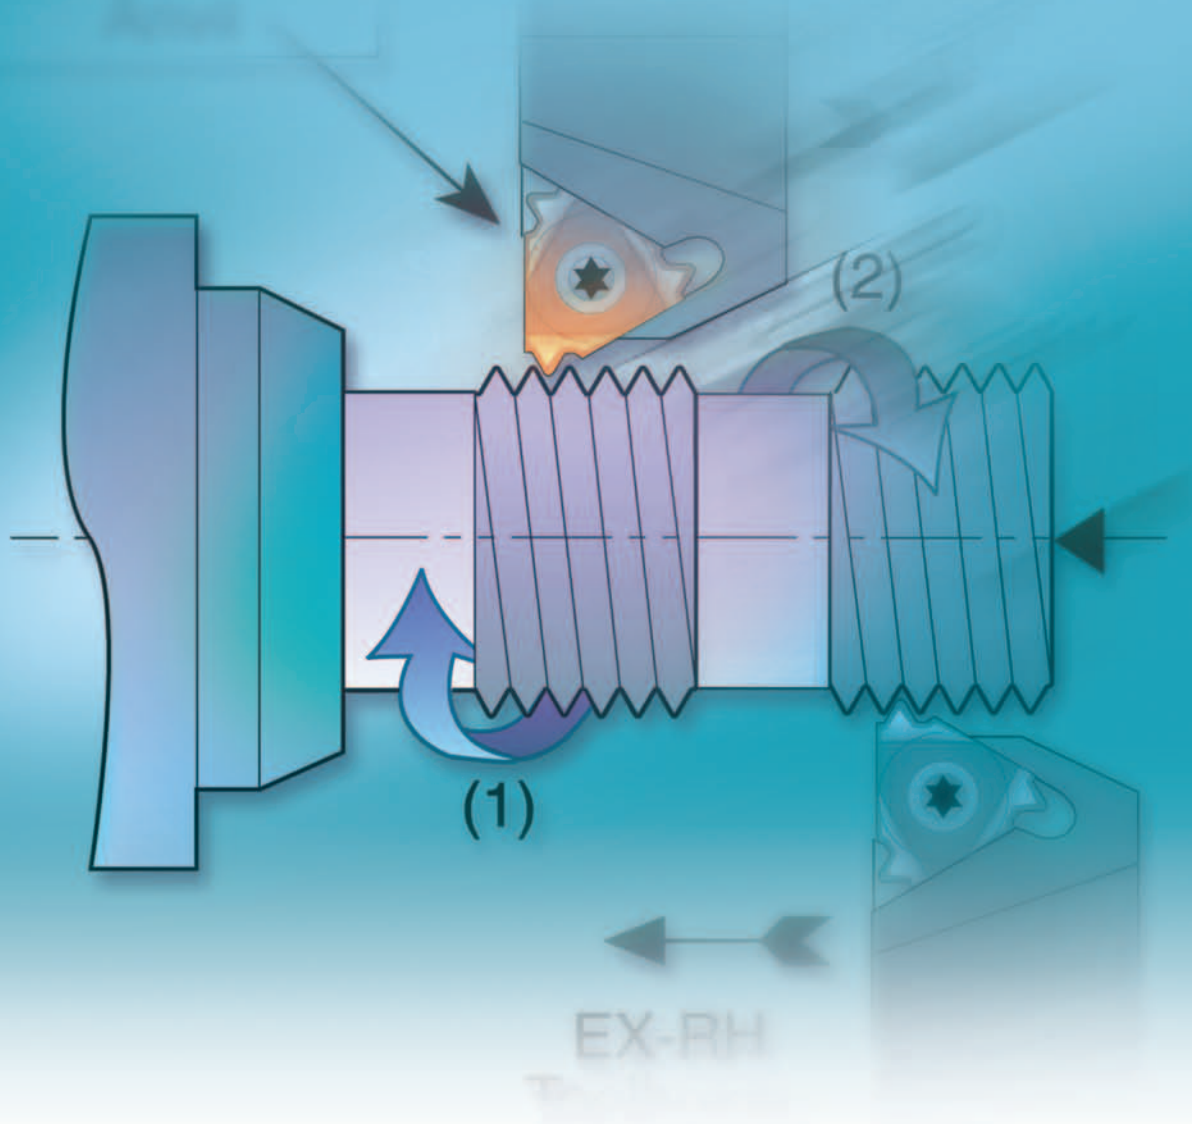

## Contents:

## Page:

Carbide Grade Selection	44
Recommended Cutting Speed	44
Conversion of Cutting Speed to Rotational Speed	44
Number of Threading Passes Selection	45
Thread Turning Methods	46
Important Points about C.P.T. Threading Inserts	47
Anvil Change Recommendation	48
Thread Turning Step by Step	49-50
Troubleshooting	50

## Carbide Grade Selection

Choose the C.P.T. grade specifically formulated for your application from the following list:

### Uncoated Grades

**P30<sup>•</sup>**  
(P20-P30) Carbide grade for carbon and cast steels, works well at medium to low cutting speeds.

**K20<sup>•</sup>**  
(K10-K30) Carbide grade for non ferrous metals, aluminum and cast iron.

### Coated Grades

**P25C**  
(P15-P35) PVD TiN coated grade for treated and hard alloy steels (25 HRC & up) at medium to low cutting speeds.

**MXC**  
(K10-K20)  
(P10-P25) PVD TiN coated micrograin for free cutting untreated alloy steels (below 30 HRC), for stainless steels and cast iron.

**BMA**  
(P20-P40)  
(K20-K30) PVD TiAlN coated sub-micrograin grade for stainless steels and exotic materials at medium to high cutting speeds.

**BXC<sup>••</sup>**  
(P30-P50)  
(K25-K40) PVD TiN coated grade for low cutting speed. Works well with wide range of stainless steels.

**Note:** Due to our unique and specialized production techniques, C.P.T. coated inserts provide superior cutting performance and exceptionally long tool life.


## Recommended cutting speed (m/min) for thread turning inserts

ISO Standard	Materials	Coated				Uncoated	
		P25C <sup>•</sup>	MXC	BMA	BXC <sup>••</sup>	P30 <sup>•</sup>	K20 <sup>•</sup>
<b>P</b>	Steel: Low & Medium Carbon Steels	80-160	90-160	100-180	20-100	70-120	
	High Carbon Steels	80-120	80-150	90-160	30-80	60-100	
	Alloy Steels, Treated Steels	50-100	80-120	90-120	40-90	50-80	
	Cast Steel	80-140	100-140	120-160	30-80	50-100	
<b>M</b>	Stainless steel: Cast steels Stainless austenitic and austenitic ferritic steel and cast steel		70-120	90-130	30-90	70-100	80-100
<b>K</b>	Cast iron: Grey cast iron, cast iron with spherical graphite, malleable cast iron		80-130	80-150	30-90		60-100
<b>N</b>	Nonferrous Metal: Aluminium and other nonferrous metals, copper alloys non metallic		300-600		20-200		120-200
<b>S</b>	Super-alloys and Titanium: Heat resistant special alloys based on iron, nickel and cobalt, titanium and titanium alloys		40-80	50-100	15-30		
<b>H</b>	Hard Materials: Hardened steel, hardened cast iron materials, chilled cast iron		20-40	30-50	15-30		

- Upon request
- For miniature and ultra miniature insert

## Conversion of Cutting Speed to Rotational Speed

Conversion of a selected cutting speed to rotational speed is calculated by the following formula:

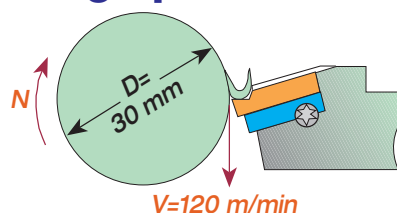

**Example**

$$N = \frac{V \times 1000}{\pi \times D} = \frac{120 \times 1000}{3.14 \times 30} = 1274 \text{ RPM}$$



## Number of passes and depth of cut per pass for multitooth inserts

	Pitch mm	Insert Size		No. of Teeth	Ordering Code	No. of Passes	Depth of Cut per Pass			
		L	I.C. (in)				1	2	3	4
ISO External	1.00	16	3/8	3	16 ER 1.0 ISO 3M	2	0.38	0.25		
	1.50	16	3/8	2	16 ER 1.5 ISO 2M	3	0.42	0.30	0.20	
	1.50	22	1/2	3	22 ER 1.5 ISO 3M	2	0.55	0.37		
	2.00	22	1/2	2	22 ER 2.0 ISO 2M	3	0.57	0.40	0.28	
	2.00	22	1/2	3	22 ER 2.0 ISO 3M	2	0.76	0.49		
	3.00	27	5/8	2	27 ER 3.0 ISO 2M	4	0.59	0.51	0.42	0.32
ISO Internal	1.00	16	3/8	3	16 IR 1.0 ISO 3M	2	0.33	0.25		
	1.50	16	3/8	2	16 IR 1.5 ISO 2M	3	0.38	0.29	0.20	
	1.50	22	1/2	3	22 IR 1.5 ISO 3M	2	0.50	0.37		
	2.00	22	1/2	2	22 IR 2.0 ISO 2M	3	0.52	0.37	0.26	
	2.00	22	1/2	3	22 IR 2.0 ISO 3M	2	0.70	0.45		
	3.00	27	5/8	2	27 IR 3.0 ISO 2M	4	0.58	0.46	0.39	0.30



	Pitch TPI	Insert Size		No. of Teeth	Ordering Code	No. of Passes	Depth of Cut per Pass			
		L	I.C. (in)				1	2	3	4
UN External	16	16	3/8	2	16 ER 16 UN 2M	3	0.44	0.31	0.22	
	16	22	1/2	3	22 ER 16 UN 3M	2	0.58	0.39		
	12	22	1/2	2	22 ER 12 UN 2M	3	0.59	0.42	0.30	
	12	22	1/2	3	22 ER 12 UN 3M	2	0.78	0.52		
	8	27	5/8	2	27 ER 8 UN 2M	4	0.62	0.54	0.45	0.35
UN Internal	16	16	3/8	2	16 IR 16 UN 2M	3	0.42	0.28	0.22	
	16	22	1/2	3	22 IR 16 UN 3M	2	0.55	0.37		
	12	22	1/2	2	22 IR 12 UN 2M	3	0.53	0.38	0.31	
	12	22	1/2	3	22 IR 12 UN 3M	2	0.74	0.48		
Whitworth 55° External	8	27	5/8	2	27 IR 8 UN 2M	4	0.63	0.50	0.40	0.30
	14	16	3/8	2	16 ER 14 W 2M	3	0.52	0.37	0.27	
	14	22	1/2	3	22 ER 14 W 3M	2	0.70	0.46		
Whitworth 55° Internal	11	22	1/2	2	22 ER 11 W 2M	3	0.67	0.47	0.34	
	14	16	3/8	2	16 IR 14 W 2M	3	0.52	0.37	0.27	
	14	22	1/2	3	22 IR 14 W 3M	2	0.70	0.46		
NPT External	11	22	1/2	2	22 IR 11 W 2M	3	0.67	0.47	0.34	
	11.5	16	3/8	2	16 ER 11.5 NPT 2M	4	0.54	0.47	0.37	0.30
	11.5	22	1/2	3	22 ER 11.5 NPT 3M	3	0.76	0.54	0.38	
NPT Internal	8	22	1/2	2	22 ER 8 NPT 2M	4	0.81	0.60	0.55	0.45
	11.5	16	3/8	2	16 IR 11.5 NPT 2M	4	0.54	0.47	0.37	0.30
	11.5	22	1/2	3	22 IR 11.5 NPT 3M	3	0.76	0.54	0.38	
API Round External	8	22	1/2	2	22 IR 8 NPT 2M	4	0.81	0.60	0.55	0.45
	10	22	1/2	2	22 ER 10 APIRD 2M	3	0.60	0.50	0.31	
	10	27	5/8	3	27 ER 10 APIRD 3M	2	1.00	0.41		
API Round Internal	8	27	5/8	2	27 ER 8 APIRD 2M	3	0.80	0.60	0.41	
	10	22	1/2	2	22 IR 10 APIRD 2M	3	0.60	0.50	0.31	
	10	27	5/8	3	27 IR 10 APIRD 3M	2	1.00	0.41		
	8	27	5/8	2	27 IR 8 APIRD 2M	3	0.80	0.60	0.41	

## Number of threading passes selection for single point inserts

Pitch:	mm TPI	0.5 48	0.8 32	1.0 24	1.25 20	1.5 16	1.75 14	2.0 12	2.5 10	3.0 8	4.0 6	6.0 4
Number of Passes		3-6	4-7	4-9	6-10	5-11	9-12	6-13	7-15	8-17	10-20	11-22


- NOTES:**
1. For most standard applications the middle of the range is a good starting point.
  2. For most materials, the tougher the material, the higher the number of cutting passes you should select.
  3. As a general rule of thumb, less passes are better than more speed.

## Thread Turning Methods

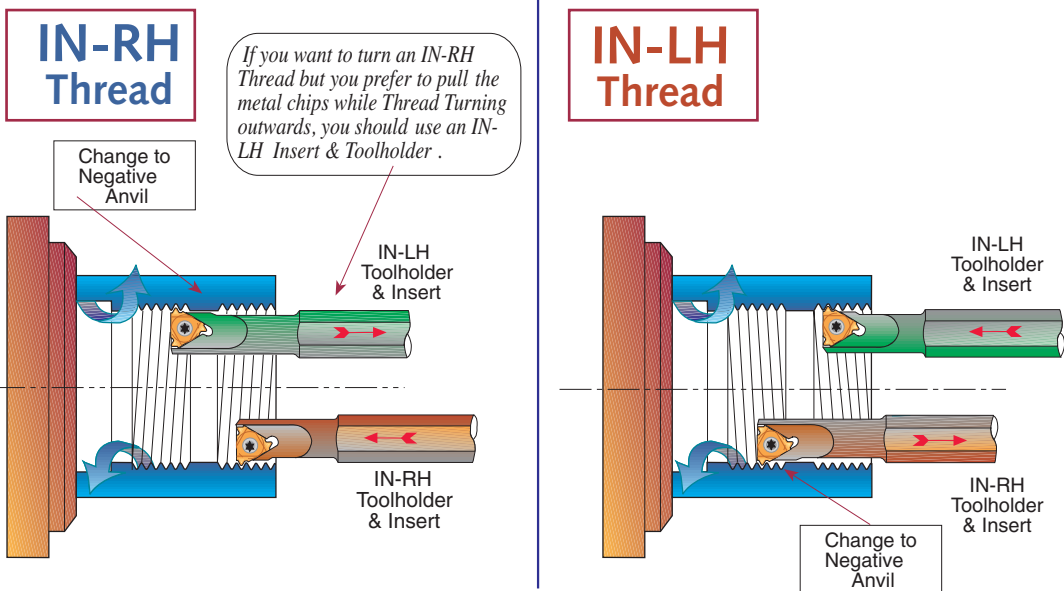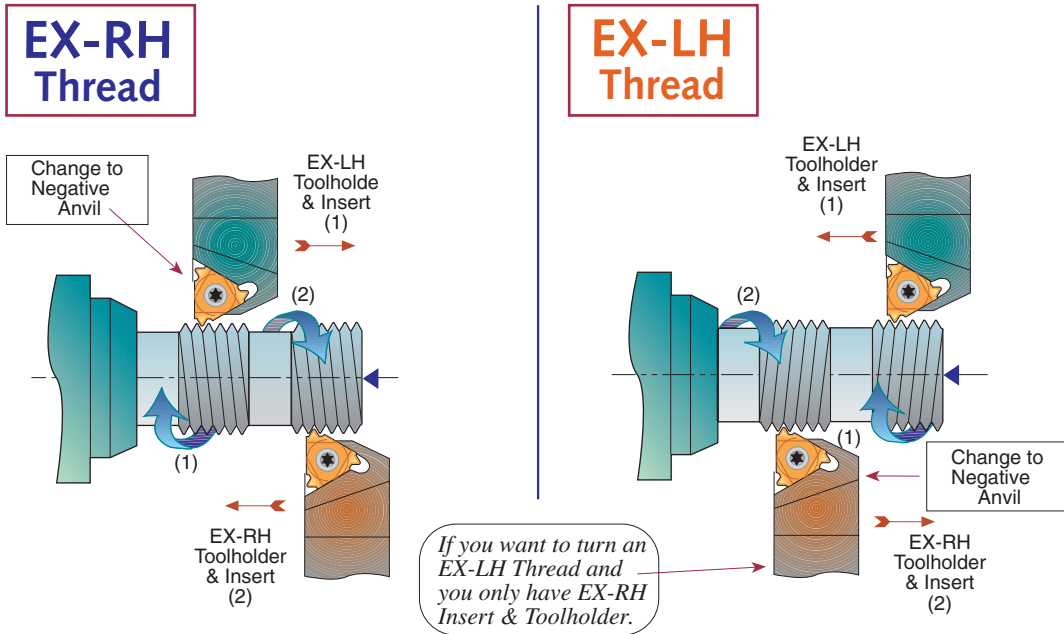


## Important Points about C.P.T. Threading Inserts


1. In most thread forms internal and external threads have different depth and radii, thus tools are not interchangeable




2. The Insert relief angle of a standard C.P.T. external toolholder is 10°; for an internal toolholder it is 15°. This 5° difference is to provide additional necessary radial clearance.



3. Our built-in relief angles ensure automatic insert flank angle clearance



4. Profiles of C.P.T. internal & external threading inserts are precision grounded to ensure accurate thread geometry when used in their corresponding toolholders. Using internal inserts with an external holder will result in distortion of angle and insert geometry.




5. Insert and toolholder should always match. An IN-RH insert must be used with an IN-RH toolholder. No mismatch is allowed.




## Anvil Change Recommendation


As can be seen from the chart, some Pitch to Diameter combinations require an anvil change. If change is required, use AE anvils for EX-RH and IN-LH toolholders and AI anvils for IN-RH and EX-LH toolholders.

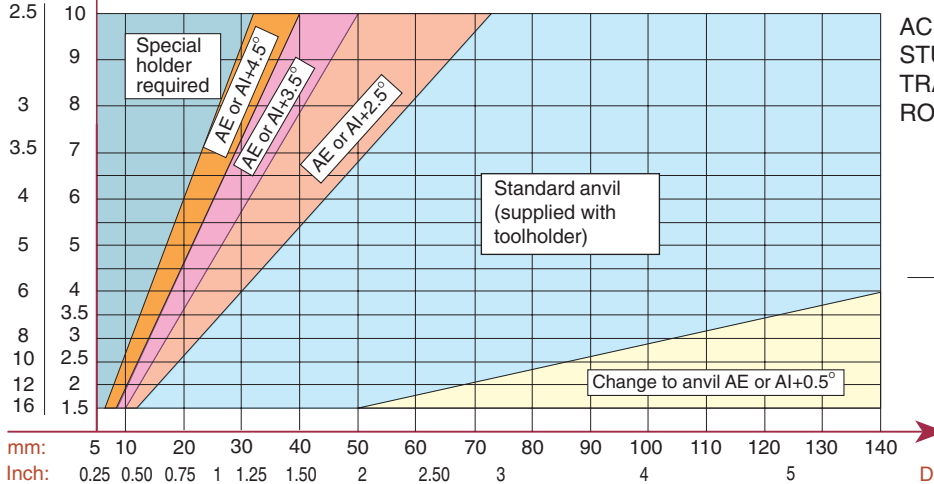

ACME  
STUB ACME  
TRAPEZ (DIN 103)  
ROUND (DIN 405)




As can be seen from the chart, most applications do not require an anvil change. If change is required, use AE anvils for EX-RH and IN-LH toolholders and AI anvils for IN-RH and EX-LH toolholders

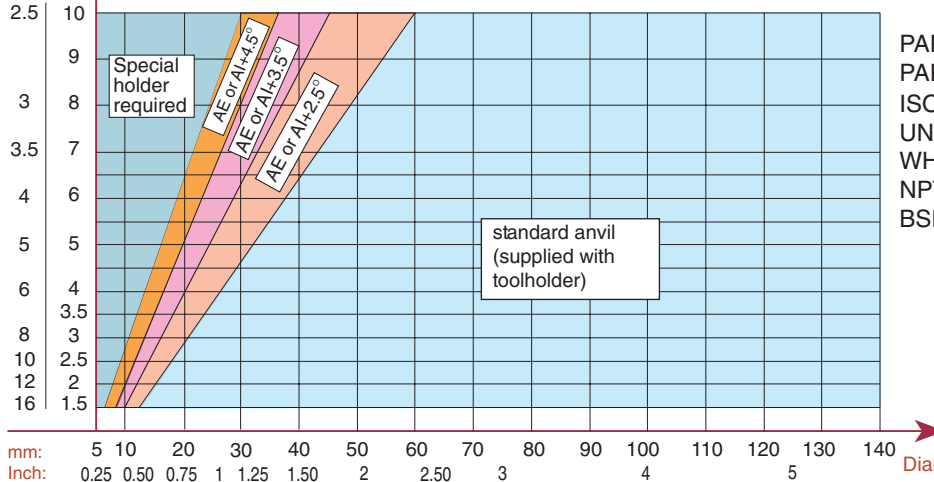


PARTIAL PROFILES 60°  
PARTIAL PROFILES 55°  
ISO  
UN  
WHIT.  
NPT  
BSPT

As can be seen from the chart, most applications require an anvil change. In most cases a negative anvil is required. use AE anvils for EX-RH

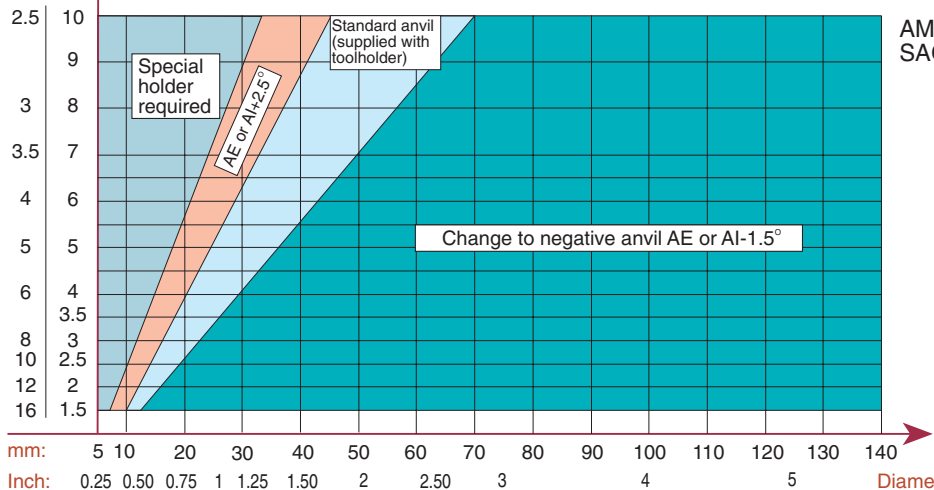


AMERICAN BUTTRESS  
SAGENGWINDE (DIN 513)



Before Anvil change

Replacing the standard anvil with an anvil with negative angle, will eliminate side rubbing



After Anvil Change

## Thread Turning - Step by Step

- Step 1 : Choose Thread Turning Method
- Step 2 : Choose Insert
- Step 3 : Choose Toolholder
- Step 4 : Choose Insert Grade
- Step 5 : Choose Thread Turning Speed
- Step 6 : Choose Number of Threading Passes

In most cases the above mentioned 6 steps would be the steps needed to ensure a good thread. When cutting more complicated threads such as TRAPEZ, ACME, BUTTRESS or SAGE, it is advisable to check the effect of the thread "HELIX ANGLE"  $\beta$  on the "RESULTANT FLANK CLEARANCE"  $\epsilon$ . If  $\epsilon$  is smaller than  $2^\circ$ , an anvil change is required.

- Step 7 : Find Thread Helix Angle
- Step 8 : Choose Correct Anvil

### EXAMPLES:

#### Example No. 1:

Step 1: Choose Thread Turning Method from page 46, we chose **EX - RH Insert & Toolholder**

Step 2: Choose Insert from page 9: **16 ER 1.5 ISO**


Step 3: Choose Toolholder from page 33: **SER 2020 K16**

Step 4: Choose Insert Grade from selection on page 44  
Our choice for Alloy Steel is Grade **P25C**

Step 5: Choose Thread Turning Speed from chart on page 44,  
we chose **100 m/min**

Rotational Speed calculation: 
$$N = \frac{100 \times 1000}{\pi \times 30} = 1065 \text{ rpm}$$

Step 6: Choose Number of Threading passes from table on page 45, we chose **8 passes**

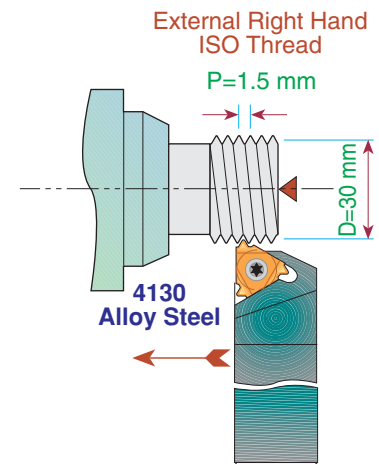

#### Example No. 2:

Step 1: Choose Thread Turning Method from page 46  
Usually, an IN-RH Toolholder and Insert will be chosen, however, in this particular case we prefer to pull the metal chips while thread turning outward, thus we chose to work with **IN-LH Insert & Toolholder**

Step 2: Choose Insert from page 13: **16 IL 12 UN**


Step 3: Choose Toolholder from page 35 : **SIL 0025 R16**  
Note: since we thread cut IN-RH thread outward with an IN-LH tool, do not forget to replace the standard anvil (supplied with the holder) with a negative anvil **AE16-1.5**

Step 4: Choose Insert Grade from selection on page 44  
Our choice for Brass is Grade **K20**

Step 5: Choose Thread Turning Speed from chart on page 44,  
we chose **150 m/min**

Rotational Speed calculation: 
$$N = \frac{150 \times 1000}{\pi \times 38.1} = 1254 \text{ RPM}$$

Step 6: Choose Number of Threading passes from table on page 45, we chose **9 passes**

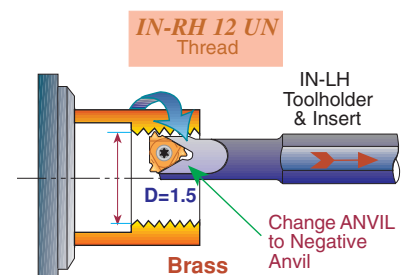



## Example No. 3:

Step 1: Choose Thread Turning Method from page 46  
We chose **EX-RH** Insert & Toolholder.

Step 2: Choose Insert from page 27: **16 ER 12 ABUT**

Step 3: Choose Toolholder from page 33: **SER 2525 M16**

Step 4: Choose Insert Grade from selection on page 44  
Our choice for Stainless Steel is Grade **MXC**

Step 5: Choose Thread Turning Speed from chart on page 44  
We chose **120 m/min.**

Rotational Speed calculation: 
$$N = \frac{120 \times 1000}{\pi \times 40} = 954 \text{ rpm}$$


Step 6: Choose Number of Threading passes from table on page 45. We chose **13 passes**

Step 7: Find Thread Helix Angle: on page 41 for Pitch of 12 TPI and 40 Diameter Helix Angle as shown in the chart is 1°


Step 8: Choose correct Anvil: As can be seen from the chart on page 48, for AMERICAN BUTTRESS Thread, for 12 TPI and 40 Diameter a negative anvil **AE16-1.5** should replace the standard anvil supplied with the toolholder

**EX-RH. AMERICAN BUTTRESS**  
12 TPI on 40 mm diameter.

Stainless Steel 304




Replacing the standard anvil with an anvil with negative angle, will eliminate side rubbing



Anvil chosen:  
**AE16-1.5**


## Troubleshooting

### Chipping




1. Use a harder carbide grade
2. Eliminate tool overhang
3. Check if insert is correctly clamped
4. Eliminate vibration

### Crater Wear




1. Reduce cutting speed
2. Apply coolant fluid
3. Use a harder carbide grade

### Build-up Edge




1. Apply coolant fluid
2. Increase cutting speed
3. Use a harder carbide grade

### Thermal Cracking




1. Reduce cutting speed
2. Apply coolant fluid
3. Use a harder carbide grade

### Deformation




1. Use a harder carbide grade
2. Reduce cutting speed
3. Reduce depth of cut
4. Apply coolant fluid

### Fracture



1. Use a harder carbide grade
2. Reduce depth of cut
3. Index insert sooner
4. Check machine and tool stability

# Grooving Tools

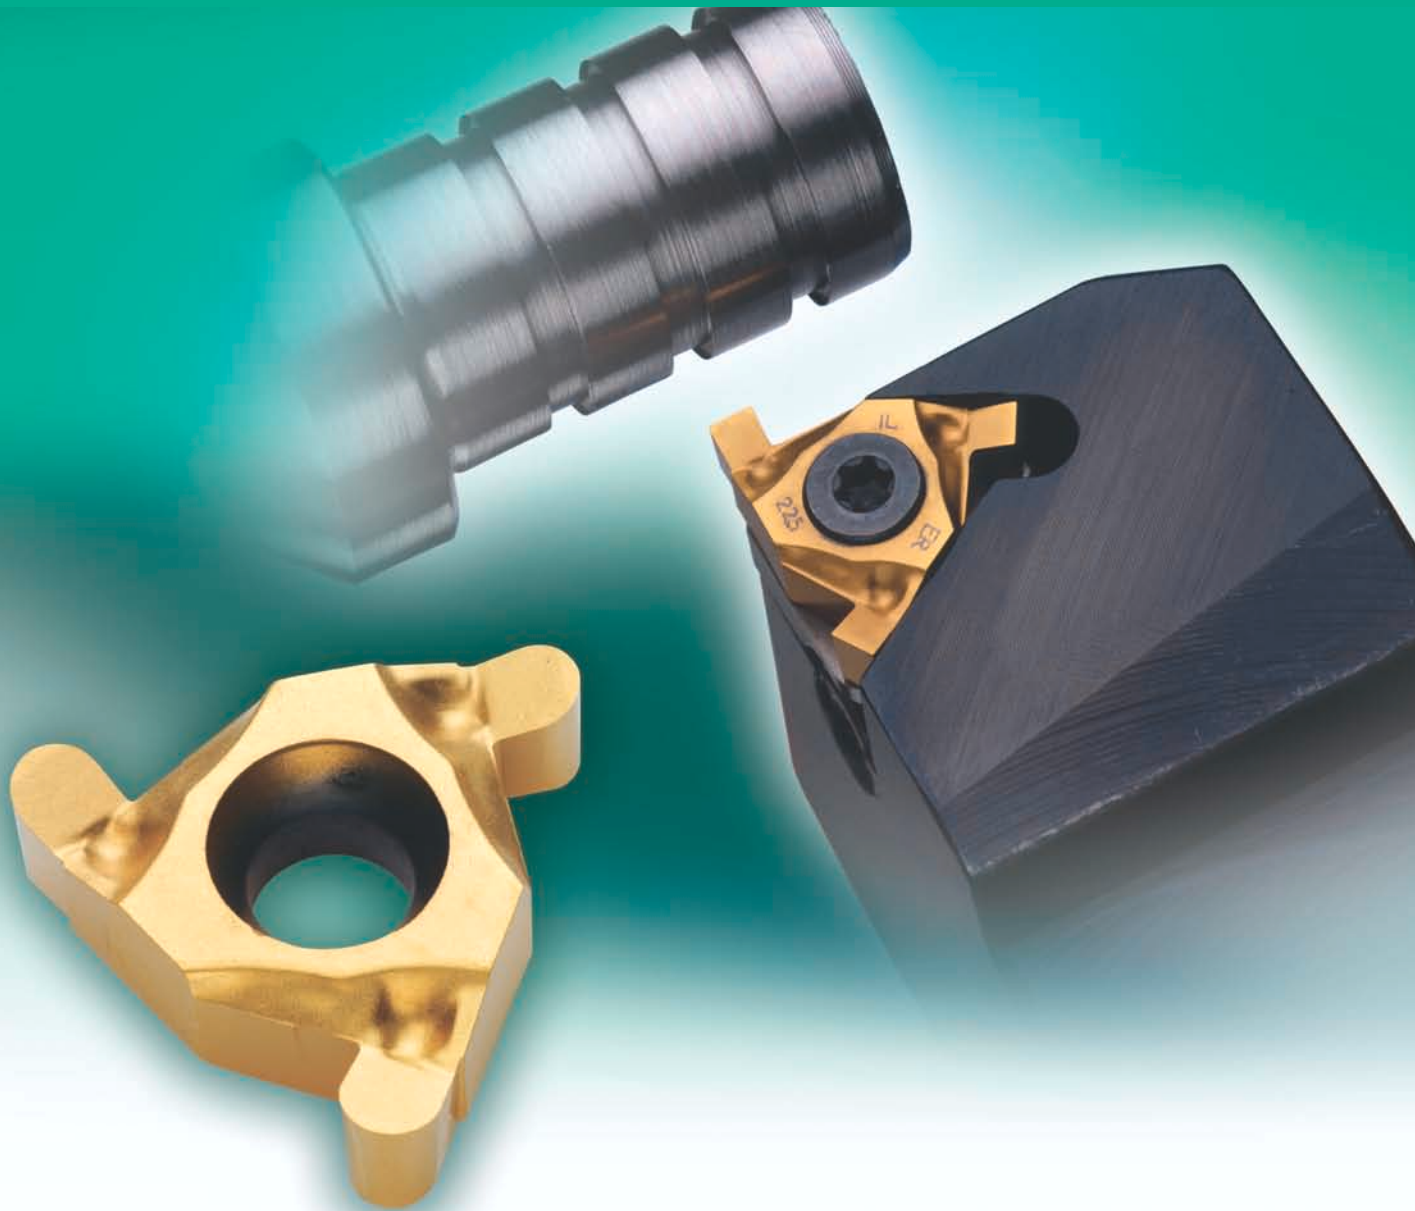

## A combination of ground profile and sintered chip-breaker

### Advantages:

- Same Toolholder for Grooving and Threading
- Minimum Investment in Tooling
  - Three cutting edges
  - Precision Ground


### Contents:

### Page:

Grooving Inserts 52  
Grooving Inserts for Snap Ring 52  
Grooving Sets 53  
Technical Section 54

52  
52  
53  
54

## Grooving Inserts




### External & Internal

#### ER / IL

Same insert can be used for EX.RH and for IN.LH.

#### IR / EL

Same insert can be used for IN.RH. and for EX.LH.




W ± 0.02	T	IC	Ordering Code		Ordering Code	
			ER/IL Inserts	Anvil	IR/EL Inserts	Anvil
1.00	1.4	3/8"	16 ER/IL 1.00	AE 16 - 0	16 IR/EL 1.00	AI 16 - 0
1.20	1.6	3/8"	16 ER/IL 1.20	AE 16 - 0	16 IR/EL 1.20	AI 16 - 0
1.40	1.8	3/8"	16 ER/IL 1.40	AE 16 - 0	16 IR/EL 1.40	AI 16 - 0
1.70	2.0	3/8"	16 ER/IL 1.70	AE 16 - 0	16 IR/EL 1.70	AI 16 - 0
1.95	2.0	3/8"	16 ER/IL 1.95	AE 16 - 0	16 IR/EL 1.95	AI 16 - 0
2.25	2.25	3/8"	16 ER/IL 2.25	AE 16 - 0	16 IR/EL 2.25	AI 16 - 0

Order example: 16 ER/IL 1.20 BXC

- \* The inserts should be used with our standard threading toolholders (See pages 33-38)
- \* Attention: The anvil must be changed to AE 16-0 or AI 16-0
- \* Other available blank sizes: I.C. 5/8", 1/2", 1/4", 3/16" & 5/32"

## Grooving Inserts for Snap Ring




### External & Internal Partial Profile Inserts

#### ER / IL

Same insert can be used for EX.RH and for IN.LH.

#### IR / EL

Same insert can be used for IN.RH and for EX.LH.



R ±0.04	T	IC	Ordering Code		Ordering Code	
			ER/IL Inserts	Anvil	IR/EL Inserts	Anvil
0.5	1.4	3/8	16 ER/IL R0.50	AE 16 - 0	16 IR/EL R0.50	AI 16 - 0
0.6	1.6	3/8	16 ER/IL R0.60	AE 16 - 0	16 IR/EL R0.60	AI 16 - 0
0.9	2.0	3/8	16 ER/IL R0.90	AE 16 - 0	16 IR/EL R0.90	AI 16 - 0
1.0	2.0	3/8	16 ER/IL R1.00	AE 16 - 0	16 IR/EL R1.00	AI 16 - 0
1.1	2.15	3/8	16 ER/IL R1.10	AE 16 - 0	16 IR/EL R1.10	AI 16 - 0
1.2	2.25	3/8	16 ER/IL R1.20	AE 16 - 0	16 IR/EL R1.20	AI 16 - 0

Order example: 16ER/IL R1.20 BXC

- \* The inserts should be used with our standard threading toolholders (See pages 33-38)
- \* Attention: The anvil must be changed to AE 16-0 or AI 16-0
- \* Other available blank sizes: I.C. 5/8", 1/2", 1/4", 3/16" & 5/32"

## Grooving Kits



### ER / IL INSERT KGRO - EXTERNAL

16 ER / IL 1.0	BXC	1 unit
16 ER / IL 1.2	BXC	1 unit
16 ER / IL 1.4	BXC	1 unit
16 ER / IL 1.7	BXC	1 unit
16 ER / IL 1.95	BXC	1 unit
16 ER / IL 2.25	BXC	1 unit

ANVIL AE 16 - 0 1 unit

### IR / EL INSERT KGRO - INTERNAL

16 IR / EL 1.0	BXC	1 unit
16 IR / EL 1.2	BXC	1 unit
16 IR / EL 1.4	BXC	1 unit
16 IR / EL 1.7	BXC	1 unit
16 IR / EL 1.95	BXC	1 unit
16 IR / EL 2.25	BXC	1 unit


ANVIL AI 16 - 0 1 unit

## Technical Section

### Cutting Speeds for Grooving Tools


Carbide Grade: BXC (P30 - P50, K25 - K40)

PVD TiN coated grade for low cutting speed. Works well with a wide range of stainless steels.




ISO Standard	Materials	Cutting Speed m/min
<b>P</b>	Low & Medium Carbon Steel	20-100
	High Carbon Steel	30-80
	Alloy Steels and Treated Steels	40-90
<b>M</b>	Stainless Steels	30-80
	Cast Steels	30-90
<b>K</b>	Cast Iron	30-90
<b>N</b>	Non-Ferrous & Aluminium	20-200

For grooving small bores see pages 150-155

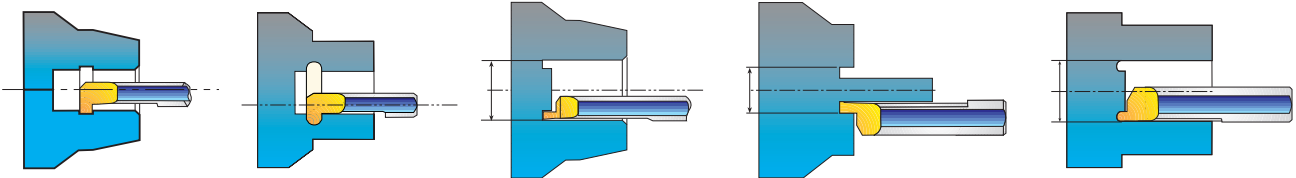



# Mill-Thread Inserts and Kits

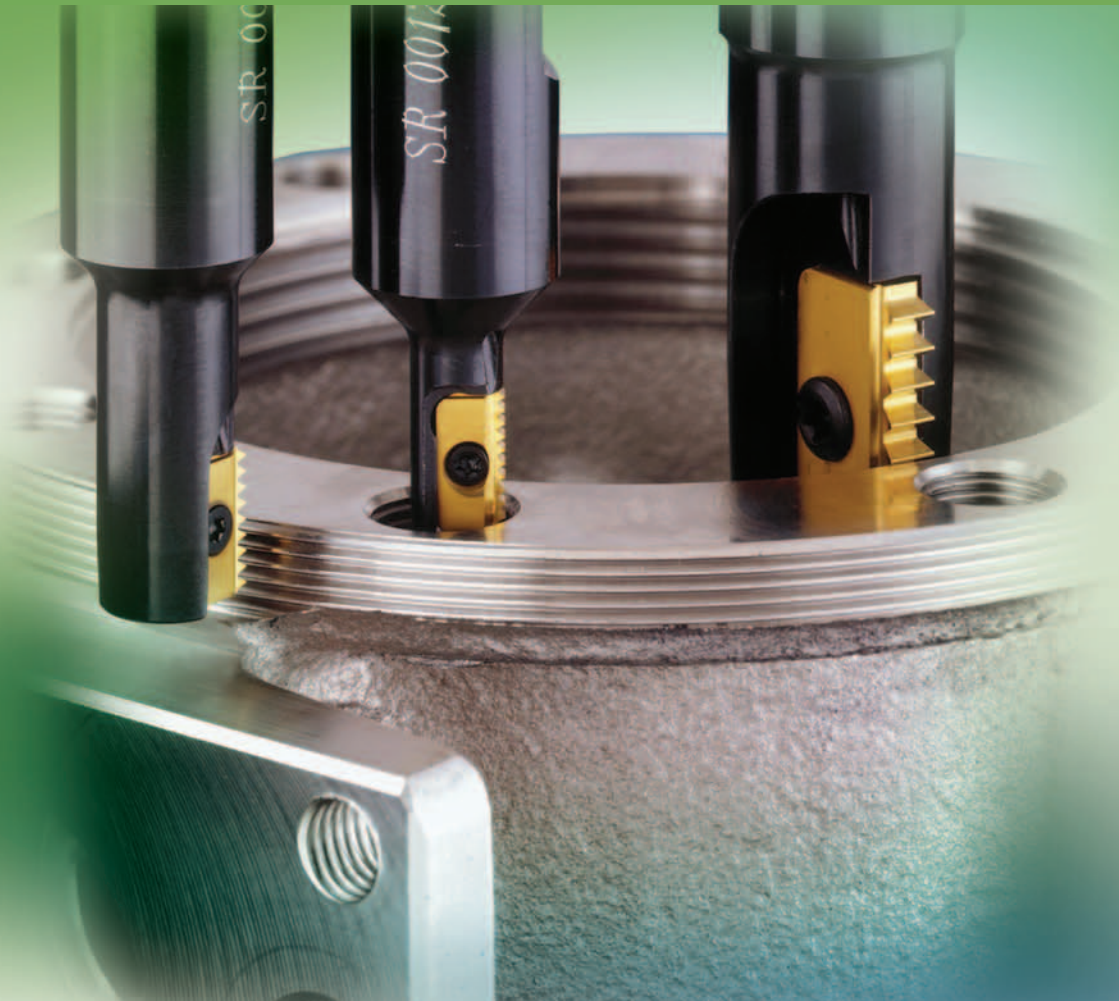

**Mill-Thread tools for threading on CNC milling machines by using helical interpolation programs**

## Advantages of Mill-Thread Tools

- Same toolholder and insert can produce both right-hand and left-hand threads.
- A single insert & toolholder can produce a given thread on many diameters (External & Internal).
- Prismatic shape of insert's tail ensures exact and reliable clamping in the toolholder.
- Most inserts are double sided, having two cutting edges.
- Thread is produced in one tool pass.
- MT tools can produce tapered threads.
- Improved productivity thanks to increased cutting speeds and multitooth type carbide inserts.
- Threading to one pitch of a shoulder in a blind hole.
- Longer tool life thanks to a special multilayer coating process.
- Lower tooling costs, considerably less expensive than using taps and dies.
- Since lower machine power is required, a smaller machine can produce larger threads in a single operation with less idle time and tool changes.

### Contents:

### Page:

Product Identification  
ISO 56  
UN 57  
WHIT 58  
BSPT 59  
NPT 59  
NPTF 60  
NPS 60  
NPSF 61  
PG - DIN 40430 61  
Internal ISO Kits 62


### Contents:

### Page:



Special Tools 63

## Product Identification

### Mill-Thread Inserts Ordering Codes

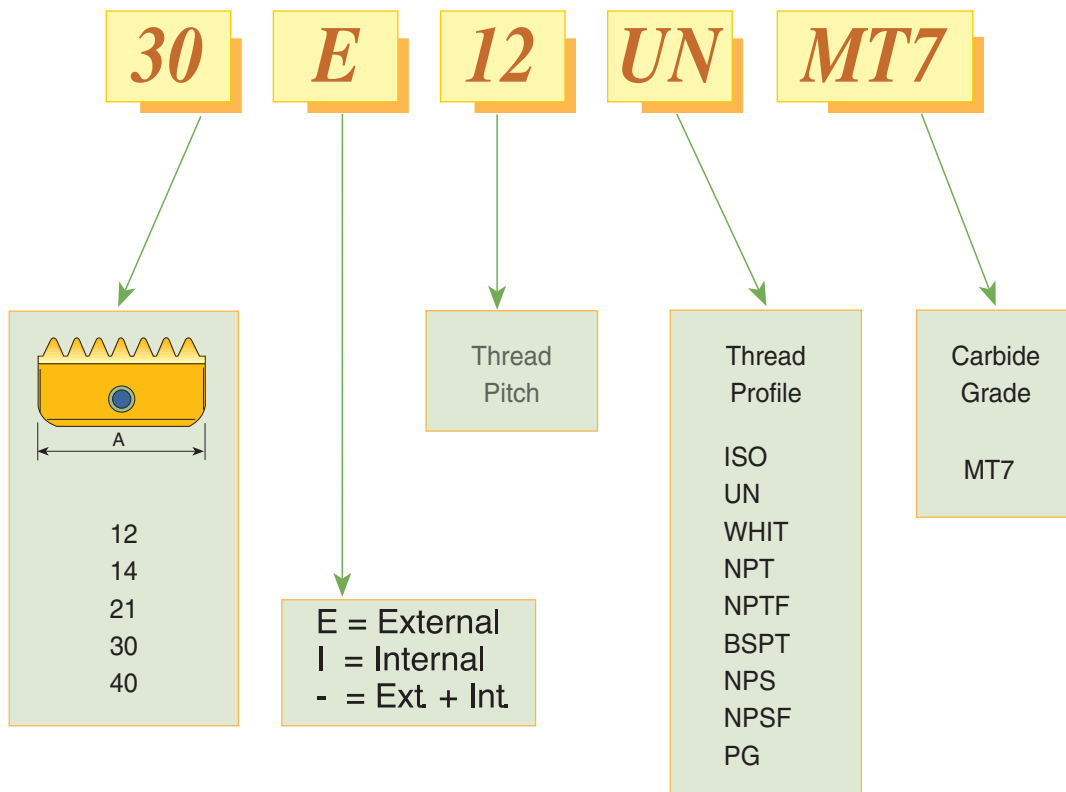

## ISO

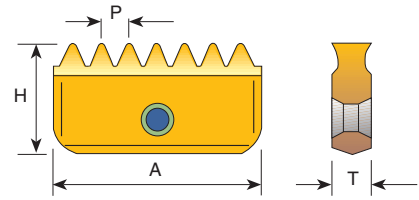



Pitch mm		Insert Size = A				
		12	14	21	30	40
0.5	Ext.					
0.5	Int.	* 12 I 0.5 ISO	14 I 0.5 ISO			
0.75	Ext.		14 E 0.75 ISO			
0.75	Int.	* 12 I 0.75 ISO	14 I 0.75 ISO			
1.0	Ext.		14 E 1.0 ISO	21 E 1.0 ISO		
1.0	Int.	* 12 I 1.0 ISO	14 I 1.0 ISO	21 I 1.0 ISO		
1.25	Ext.		14 E 1.25 ISO			
1.25	Int.	* 12 I 1.25 ISO	14 I 1.25 ISO			
1.5	Ext.		14 E 1.5 ISO	21 E 1.5 ISO	30 E 1.5 ISO	40 E 1.5 ISO
1.5	Int.	* 12 I 1.5 ISO	14 I 1.5 ISO	21 I 1.5 ISO	30 I 1.5 ISO	40 I 1.5 ISO
1.75	Ext.		14 E 1.75 ISO			
1.75	Int.		14 I 1.75 ISO	21 I 1.75 ISO		
2.0	Ext.		14 E 2.0 ISO	21 E 2.0 ISO	30 E 2.0 ISO	40 E 2.0 ISO
2.0	Int.		14 I 2.0 ISO	21 I 2.0 ISO	30 I 2.0 ISO	40 I 2.0 ISO
2.5	Ext.		14 E 2.5 ISO	21 E 2.5 ISO		
2.5	Int.		14 I 2.5 ISO	21 I 2.5 ISO		
3.0	Ext.			21 E 3.0 ISO	30 E 3.0 ISO	40 E 3.0 ISO
3.0	Int.			21 I 3.0 ISO	30 I 3.0 ISO	40 I 3.0 ISO
3.5	Ext.				30 E 3.5 ISO	
3.5	Int.			21 I 3.5 ISO	30 I 3.5 ISO	40 I 3.5 ISO
4.0	Ext.				30 E 4.0 ISO	40 E 4.0 ISO
4.0	Int.				30 I 4.0 ISO	40 I 4.0 ISO
4.5	Ext.					
4.5	Int.				30 I 4.5 ISO	40 I 4.5 ISO
5.0	Ext.					40 E 5.0 ISO
5.0	Int.				30 I 5.0 ISO	40 I 5.0 ISO
5.5	Ext.					
5.5	Int.					40 I 5.5 ISO
6.0	Ext.					40 E 6.0 ISO
6.0	Int.					40 I 6.0 ISO
	H	6.3	7.5	12	16	20
	T	2.9	3.1	4.7	5.5	6.3

\* One cutting edge

Order example: 14 I 1.5 ISO MT7

## UN UNC, UNF, UNEF, UNS

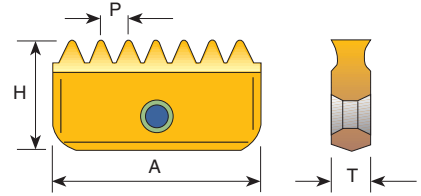


Pitch TPI		Insert Size = A				
		12	14	21	30	40
32	Ext.		14 E 32 UN			
32	Int.	*12 I 32 UN	14 I 32 UN			
28	Ext.		14 E 28 UN			
28	Int.	*12 I 28 UN	14 I 28 UN			
27	Ext.					
27	Int.		14 I 27 UN			
24	Ext.		14 E 24 UN	21 E 24 UN		
24	Int.	*12 I 24 UN	14 I 24 UN	21 I 24 UN		
20	Ext.		14 E 20 UN	21 E 20 UN	30 E 20 UN	
20	Int.	*12 I 20 UN	14 I 20 UN	21 I 20 UN	30 I 20 UN	
18	Ext.		14 E 18 UN	21 E 18 UN	30 E 18 UN	
18	Int.	*12 I 18 UN	14 I 18 UN	21 I 18 UN	30 I 18 UN	
16	Ext.		14 E 16 UN	21 E 16 UN	30 E 16 UN	40 E 16 UN
16	Int.	*12 I 16 UN	14 I 16 UN	21 I 16 UN	30 I 16 UN	40 I 16 UN
14	Ext.		14 E 14 UN	21 E 14 UN	30 E 14 UN	40 E 14 UN
14	Int.		14 I 14 UN	21 I 14 UN	30 I 14 UN	40 I 14 UN
12	Ext.		14 E 12 UN	21 E 12 UN	30 E 12 UN	40 E 12 UN
12	Int.		14 I 12 UN	21 I 12 UN	30 I 12 UN	40 I 12 UN
11	Ext.					
11	Int.		14 I 11 UN			
10	Ext.			21 E 10 UN	30 E 10 UN	40 E 10 UN
10	Int.		14 I 10 UN	21 I 10 UN	30 I 10 UN	40 I 10 UN
8	Ext.				30 E 8 UN	40 E 8 UN
8	Int.			21 I 8 UN	30 I 8 UN	40 I 8 UN
7	Ext.					
7	Int.			21 I 7 UN		
6	Ext.				30 E 6 UN	40 E 6 UN
6	Int.				30 I 6 UN	40 I 6 UN
5	Ext.					
5	Int.				30 I 5 UN	
4.5	Ext.					
4.5	Int.					40 I 4.5UN
4	Ext.					
4	Int.					40 I 4 UN
H		.248	.295	.472	.630	.787
T		.114	.122	.185	.217	.248


\* One cutting edge

Order example: 21 E 18 UN MT7

## WHIT BSW, BSF, BSP



Same Insert for External and Internal thread.

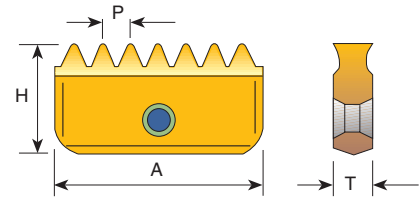


Pitch TPI	Insert Size = A				
	12	14	21	30	40
24		14-24 W			
20		14-20 W	21-20 W		
19	* 12-19 W	14-19 W	21-19 W		
16		14-16 W	21-16 W	30-16 W	
14		14-14 W	21-14 W	30-14 W	
11			21-11 W	30-11 W	40-11 W
8					40- 8 W
H	6.3	7.5	12	16	20
T	2.9	3.1	4.7	5.5	6.3


\* One cutting edge

Order example: 21-11 W MT7

## BSPT



Conical pipe thread inserts are one-sided and may be used for both External and Internal threading.

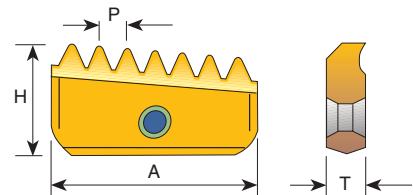


Pitch TPI	Insert Size = A				
	12	14	21	30	40
19	12-19 BSPT	14-19 BSPT			
14		14-14 BSPT	21-14 BSPT		
11			21-11 BSPT	30-11 BSPT	40-11 BSPT
H	6.3	7.5	12	16	20
T	2.9	3.1	4.7	5.5	6.3

Order example: 14-19 BSPT MT7


For conical preparation end mills see page 100



## NPT




Conical pipe thread inserts are one-sided and may be used for both External and Internal threading.

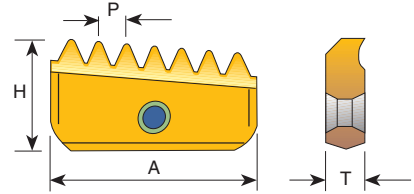


Pitch TPI	12	14	Insert Size = A 21	30	40
18	12-18 NPT	14-18 NPT			
14		14-14 NPT	21-14 NPT		
11.5			21-11.5 NPT	30-11.5 NPT	40-11.5 NPT
8				30- 8 NPT	40- 8 NPT
H	6.3	7.5	12	16	20
T	2.9	3.1	4.7	5.5	6.3

Order example: 30-11.5 NPT MT7

## NPTF



Conical pipe thread inserts are one-sided and may be used for both External and Internal threading.

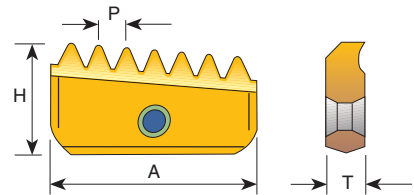


Pitch TPI	12	14	Insert Size = A 21	30	40
18	12-18 NPTF	14-18 NPTF			
14		14-14 NPTF	21-14 NPTF		
11.5			21-11.5 NPTF	30-11.5 NPTF	40-11.5 NPTF
8				30- 8 NPTF	40- 8 NPTF
H	6.3	7.5	12	16	20
T	2.9	3.1	4.7	5.5	6.3


Order example: 21-14 NPTF MT7

For conical preparation end mills see page 100

## NPS




Same Insert for External and Internal thread

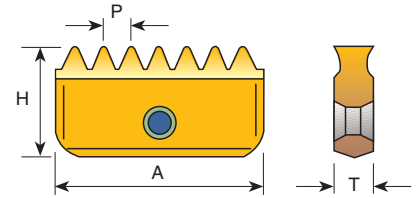


Pitch TPI	12	14	Insert Size = A 21	30	40
18	12-18 NPS	14-18 NPS			
14		14-14 NPS	21-14 NPS		
11.5			21-11.5 NPS	30-11.5 NPS	40-11.5 NPS
8				30- 8 NPS	40- 8 NPS
H	6.3	7.5	12	16	20
T	2.9	3.1	4.7	5.5	6.3

Order example: 30-11.5 NPS MT7

## NPSF




Same Insert for External and Internal thread

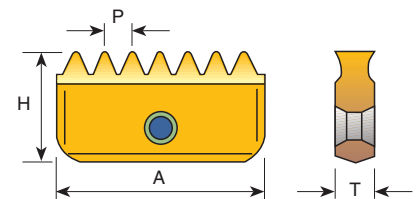


Pitch TPI	12	14	Insert Size = A 21	30	40
18	12-18 NPSF	14-18 NPSF			
14		14-14 NPSF	21-14 NPSF		
11.5			21-11.5 NPSF	30-11.5 NPSF	40-11.5 NPSF
8				30- 8 NPSF	40- 8 NPSF
H	6.3	7.5	12	16	20
T	2.9	3.1	4.7	5.5	6.3

Order example: 21-14 NPSF MT7

## PG - DIN 40430




Same Insert for External and Internal thread

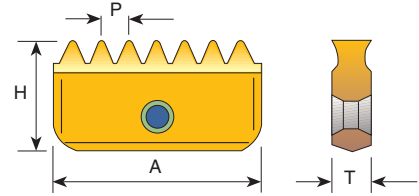

Pitch TPI	Insert Size = A		
	14	21	30
18	<b>14-18 PG</b> (PG 9, 11, 13.5, 16)	<b>21-18 PG</b> (PG 16)	
16		<b>21-16 PG</b> (PG 21, 29, 36, 42, 48)	<b>30-16 PG</b> (PG 36, 42, 48)
H	7.5	12	16
T	3.1	4.7	5.5

Order example: 21-18 PG MT7

## Internal ISO Kits

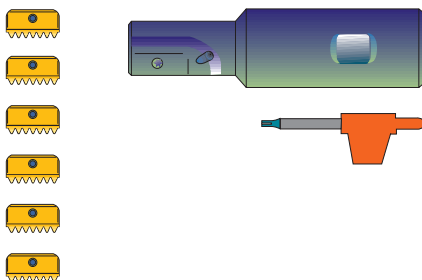


MTK 12   ISO	MTK 14   ISO
<b>INSERTS</b>	<b>INSERTS</b>
12   0.75 ISO	14   1.0 ISO 2 Pcs
12   1.0 ISO 2 Pcs	14   1.5 ISO 2 Pcs
12   1.25 ISO	14   2.0 ISO 2 Pcs
12   1.5 ISO 2 Pcs	
<b>TOOLHOLDER</b>	<b>TOOLHOLDER</b>
SR 0009 H12	SR 0017 H14
<b>KEY</b>	<b>KEY</b>
K12	K14
<b>SCREW</b>	<b>SCREW</b>
S12	S14


Order example : MTK 14 | ISO

## Special Tools



In addition to standard products,  
C.P.T. manufactures special tools and inserts  
according to customers' requests.  
Special tools are supplied in short delivery times.

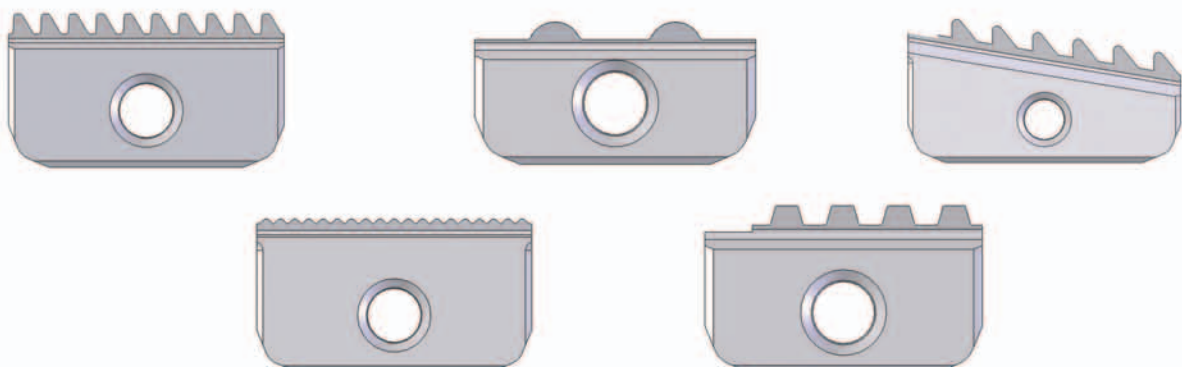



# Mill-Thread Toolholders



## Contents:


## Page:

Product Identification	66
Single Insert Toolholders	67
Long Shank Toolholders	67
Twin Insert Toolholders	68
Multi Insert Toolholders	69
External Multi Insert Toolholders	69
Long Carbide Shank Toolholders	70
Carbide Shank Toolholders for Single Point Threading	70
D-Thread Inserts and Toolholders	71-72




## Product Identification

### Mill-Thread Toolholders Ordering Codes

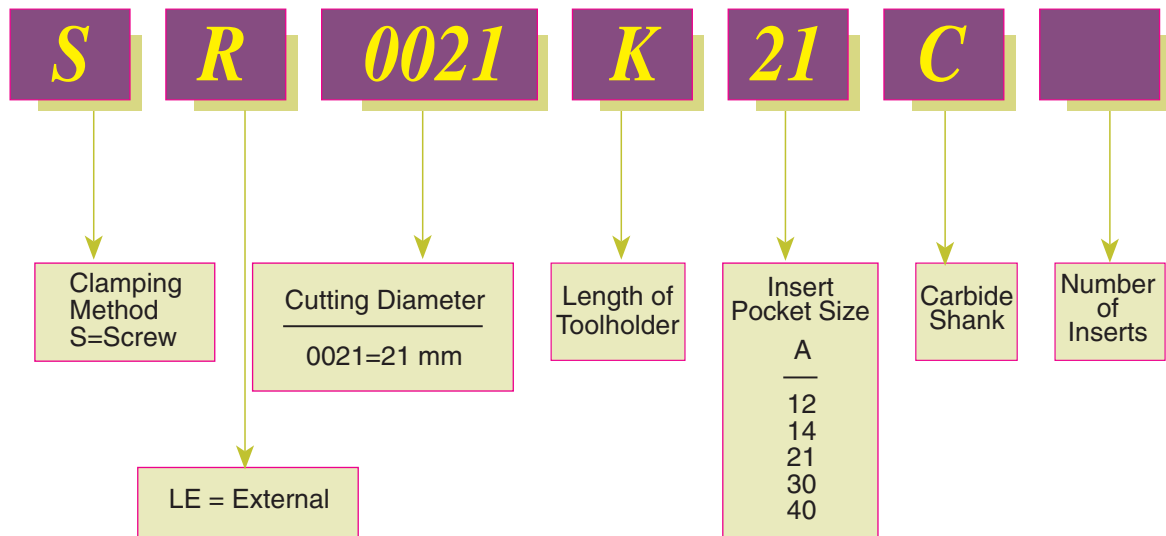

## Single Insert Toolholders

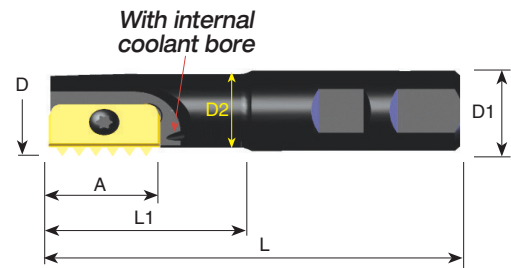

Ordering Code	A	D	D1	D2	L	L1	Insert Screw	Torx Key
SR0009H12	12	9.5	20	7.5	85	14	S12	K12
* SR0010H12	12	9.9	20	7.6	85	16	S12	K12
SR0012F14	14	12.0	20	8.9	75	20	S14	K14
SR0014H14	14	14.5	20	11.2	85	25	S14	K14
SR0017H14	14	17.0	20	13.4	85	30	S14	K14
** SR0018H21	21	18.0	20	14.4	85	30	S21	K21
SR0021H21	21	21.0	20	16.5	94	40	S21	K21
SR0029J30	30	29.0	25	22.4	110	50	S30	K30
SR0048M40	40	48.0	40	35.0	153	78	S40	K40


Order example: SR0029J30

\* For conic inserts: 12-18 NPT, 12-18 NPTF, 12-19 BSPT

\*\* Cannot be used with the following inserts:

21 I 3.5 ISO, 21I 8 UN, 21I 7 UN, 21-11 BSPT, 21-11.5 NPT, 21-11.5 NPTF

## Long Shank Toolholders

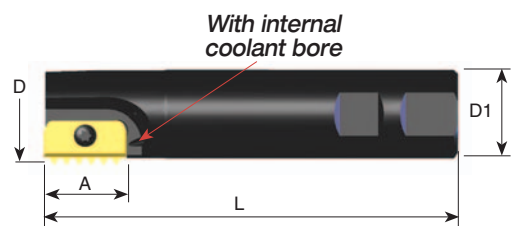


Ordering Code	A	D	D1	L	Insert Screw	Torx Key
SR0025K21	21	25	20	125	S21	K21
SR0031M30	30	31	25	150	S30	K30
SR0038M30	30	38	32	150	S30	K30
SR0048R40	40	48	40	210	S40	K40

Order example: SR0031M30

For holders with long overhang reduce the cutting speed and feed rate between 20% to 40% (depends on workpiece material, pitch and overhang)


## Twin Insert Toolholders

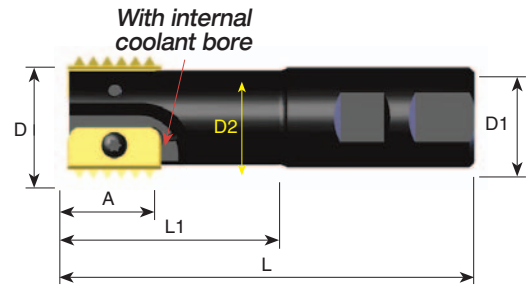

Ordering Code	A	D	D1	D2	L	L1	No. of Inserts	Insert Screw	Torx Key
<b>SR0020H14-2</b>	14	20	20	16	93	41	2	S14	K14
<b>SR0030J21-2</b>	21	30	25	24	108	52	2	S21	K21
<b>SR0040L30-2</b>	30	40	32	30	130	70	2	S30	K30
<b>SR0050M40-2</b>	40	50	40	38	153	78	2	S40	K40

Order example: SR0030J21-2

## Multi Insert Toolholders


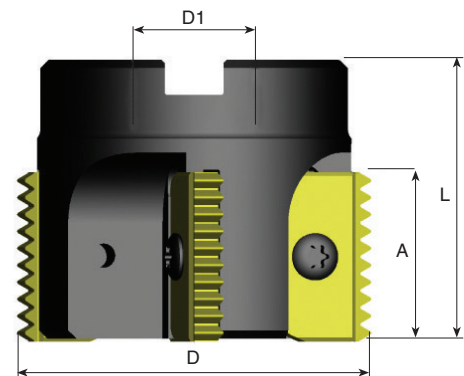


Ordering Code	A	D	D1	L	No. of Inserts	Insert Screw	Torx Key
SR0063C21-5	21	63	22	50	5	S21	K21
SR0063C30-4	30	63	22	50	4	S30	K30
SR0080D30-4	30	80	27	55	4	S30	K30
SR0100D30-4	30	100	32	60	4	S30	K30
SR0080D40-4	40	80	27	65	4	S40	K40
SR0100E40-4	40	100	32	70	4	S40	K40

Order example: SR0080D30-4

## External Multi Insert Toolholder


- Reduced machining time
- Optimal coolant supply

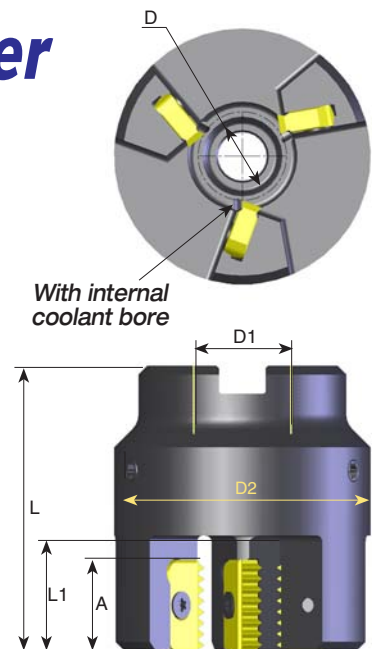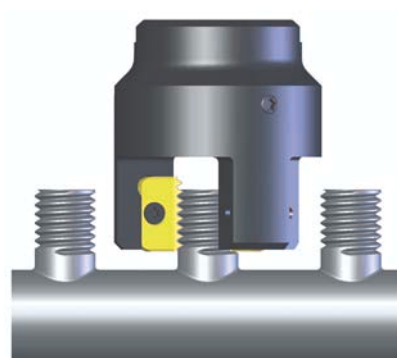

Ordering Code	A	D	D1	D2	L	L1	No. of Inserts	Insert Screw	Torx Key
SLE0020D21- 3	21	20	22	58	65	25	3	S21	K21
SLE0030D21- 3	21	30	22	68	65	25	3	S21	K21
SLE0045E21- 4	21	45	27	83	70	25	4	S21	K21

Order example: SLE 0030D21-3

## Long Carbide Shank Toolholders

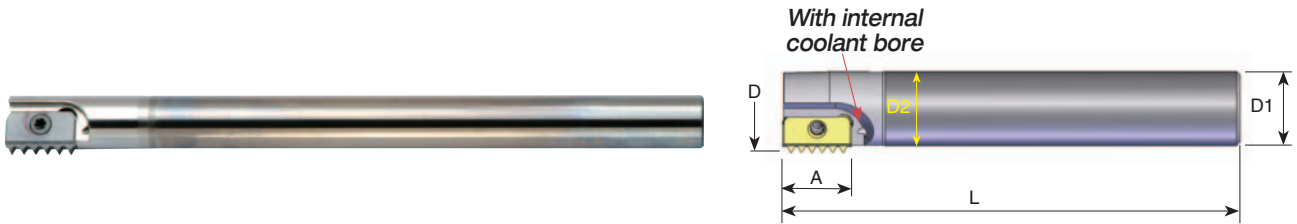


Ordering Code	A	D	D1	D2	L	Insert Screw	Torx Key
*SR0010K12C	12	9.9	8	8	125	S12	K12
SR0013H14C	14	13.2	10	10	110	S14	K14
SR0013J14C	14	13.2	10	10	150	S14	K14
SR0015K14C	14	15.2	12	12	175	S14	K14
SR0021K21C	21	21.0	16	16	130	S21	K21
SR0021M21C	21	21.0	16	16	200	S21	K21
SR0027S30C	30	27.0	20	20	270	S30	K30


Order example: SR0015K14C

\* Without coolant bore

For holders with long overhang reduce the cutting speed and feed rate between 20% to 40% (depends on workpiece, material, pitch and overhang)

## Carbide Shank Toolholders for Single Point Threading

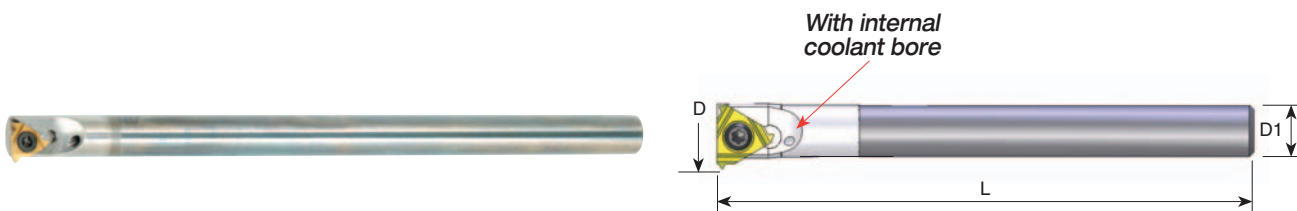

Ordering Code		Pitch Range		D	D1	L	Insert Screw	Torx Key
		mm	TPI					
* SR0005D06C	6	0.5-1.25	48-20	6.8	5.0	63	S06	K06
SR0006H08C	8	0.5-1.75	48-14	8.8	6.0	100	S08	K08
** SR0010M11C	11	0.5-2.00	48-11	13.2	10.0	150	S11	K11


For Inserts see the Threading Tools section of this Catalogue  
For an internal application use an internal R.H. insert.

\* Without coolant bore

\*\* For an external application use an external L.H. insert.

## D-Thread Mill-Thread Inserts & Toolholders for machining deep threads

- Improved productivity due to multi-insert toolholders.
- Partial Profile, standard or U-type inserts for a wide range of threads.
- Inserts with three cutting edges, reduces tooling costs.
- Low cutting resistance due to the single point inserts.
- Holder allows a long overhang and includes internal coolant.
- Same insert and toolholder for both external and internal thread.

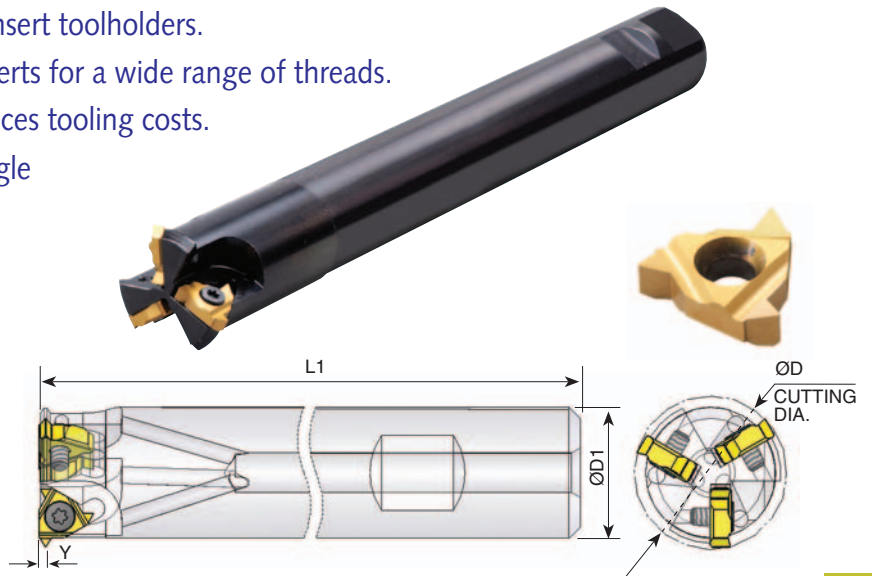


Ordering Code	Insert Size		Y	D	D1	L1	No. of Inserts	Insert Screw	Torx Key
	L	I.C.							
<b>SR0023Q11</b>	11	1/4	1	23.5	20	190	3	SE11	K11

### Partial 60° Size 11


Ordering Code		Pitch	
		mm	TPI
<b>1160D</b>	<b>INT.</b>	1.0 -2.0	24-12
	<b>EX.</b>	0.75-1.5	32-14

### Partial 55° Size 11

Ordering Code		Pitch TPI
<b>1155D</b>	<b>INT./EX.</b>	24-14



Coated Grade: BMA

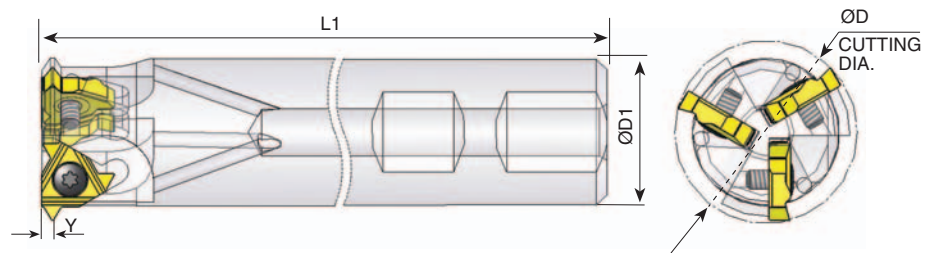


Ordering Code	Insert Size		Y	D	D1	L1	No. of Inserts	Insert Screw	Torx Key
	L	I.C.							
<b>SR0031R16</b>	16	3/8	1.8	31	25	225	3	SE16	K16

### Partial 60° Size 16

Ordering Code		Pitch	
		mm	TPI
<b>1660D</b>	<b>INT.</b>	2.5-3.5	10-7
	<b>EX.</b>	2.0-3.0	12-8

### Partial 55° Size 16


Ordering Code		Pitch TPI
<b>1655D</b>	<b>INT./EX.</b>	10-8



Coated Grade: BMA



## D-Thread Mill-Thread Inserts & Toolholders for machining deep threads

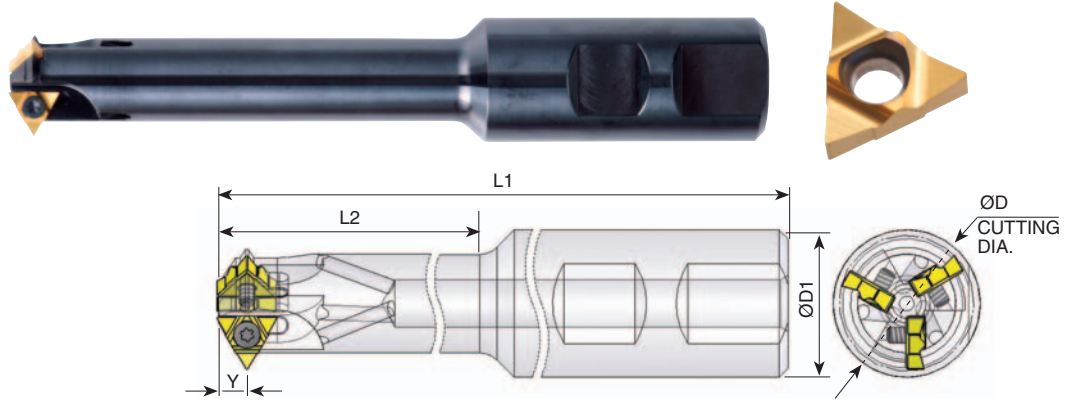


Ordering Code	Insert Size		Y	D	D1	L1	L2	No. of Inserts	Insert Screw	Torx Key
	L	I.C.								
<b>SR0023Q11U</b>	11U	1/4U	5	23	25	150	88	3	SE11	K11

### Partial 60° Size 11U


Ordering Code	11U	Pitch	
		mm	TPI
<b>11U60D</b>	<b>INT.</b>	2.5-4.0	10-6
	<b>EX.</b>	2.0-3.0	12-8

### Partial 55° Size 11U

Ordering Code	11U	Pitch
<b>11U55D</b>	<b>INT./EX.</b>	TPI
		10-7



Coated Grade: BMA

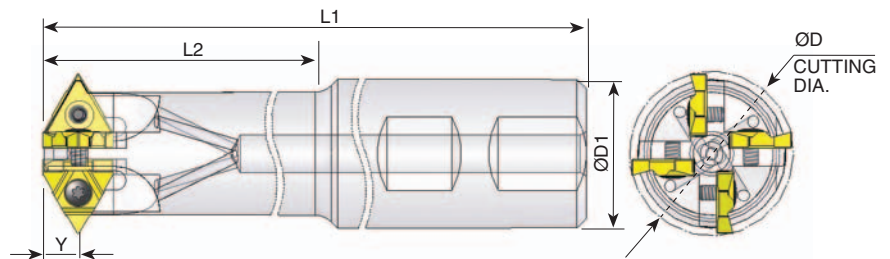


Ordering Code	Insert Size		Y	D	D1	L1	L2	No. of Inserts	Insert Screw	Torx Key
	L	I.C.								
<b>SR0035R16U</b>	16U	3/8U	7.6	33.5	32	220	155	4	SE16	K16

### Partial 60° Size 16U

Ordering Code	16U	Pitch	
		mm	TPI
<b>16U60D</b>	<b>INT.</b>	4.0-6.0	6-4
	<b>EX.</b>	3.0-5.0	8-5

### Partial 55° Size 16U

Ordering Code	16U	Pitch
<b>16U55D</b>	<b>INT./EX.</b>	TPI
		6-4.5



Coated Grade: BMA

# Spiral Mill-Thread



## Advantages of Spiral Mill-Thread Tools

- The spiral designed tools enable a smooth cutting operation at a high feed rate and reduced machining time.
- The tools suit a wide range of applications, from machining small components in small machining centers to heavy-duty applications in high power milling machines.
- Spiral fluted toolholders hold 2 or 9 inserts in a comparatively small cutting diameter.
- The unique clamping method enables optimal indexability.
- Spiral tools reduce vibration and chatter.
- High grade finish is achieved in all applications: threading, roughing and finishing.
- Inserts are available in MT7 Sub-Micron Grade with Titanium Aluminium Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, which can be used with all materials.


### Contents:

### Page:

H23 Toolholders	74
H23 Threading Inserts	74-75
H32 Toolholders	75
H32 Threading Inserts	75-76
H45 Toolholder	77
H45 Threading Inserts	77-78
H63 Toolholder	78
H63 Threading Inserts	78-79

Spiral Inserts and Toolholders for Finishing	80-81
Special Tools	82

## H23 Toolholder

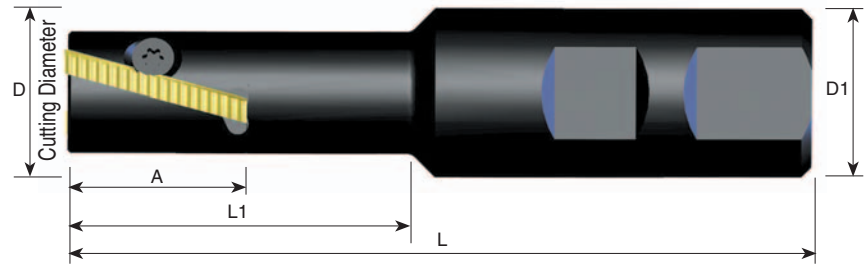

Ordering Code	Insert Size A	D	D1	L	L1	No. of Inserts	Screw	Key
SRH23-2	27	23	25	110	50	2	S23	K21

## H23 Threading Inserts

Spiral inserts have one cutting edge



### ISO

Pitch mm	Ordering Code	Thread Size
1.0	<a href="#">H23 I 1.0 ISO</a>	≥ M26
1.5	<a href="#">H23 I 1.5 ISO</a>	≥ M27
2.0	<a href="#">H23 I 2.0 ISO</a>	≥ M28
3.0	<a href="#">H23 I 3.0 ISO</a>	≥ M30

For internal thread

### UN

Pitch TPI	Ordering Code	Thread Size
24	<a href="#">H23 I 24 UN</a>	≥ 1"
20	<a href="#">H23 I 20 UN</a>	≥ 1"
18	<a href="#">H23 I 18 UN</a>	≥ 1 1/16"
16	<a href="#">H23 I 16 UN</a>	≥ 1 1/16"
14	<a href="#">H23 I 14 UN</a>	≥ 1 1/8"
12	<a href="#">H23 I 12 UN</a>	≥ 1 1/8"
8	<a href="#">H23 I 8 UN</a>	≥ 1 3/16"
7	<a href="#">H23 I 7 UN</a>	≥ 1 1/4"

For internal thread

### Whitworth

Pitch TPI	Ordering Code	Thread Size
11	<a href="#">H23-11 W</a>	≥ G 1"

Same insert for internal and external thread

## BSPT

Pitch TPI	Ordering Code	Thread Size
11	<b>H23-11 BSPT</b>	≥ 1" BSPT

Same insert for internal and external thread

## NPT

Pitch TPI	Ordering Code	Thread Size
11.5	<b>H23-11.5 NPT</b>	1"-2" NPT


Same insert for internal and external thread

## NPTF

Pitch TPI	Ordering Code	Thread Size
11.5	<b>H23-11.5 NPTF</b>	1"-2" NPTF

Same insert for internal and external thread

## H32 Toolholder

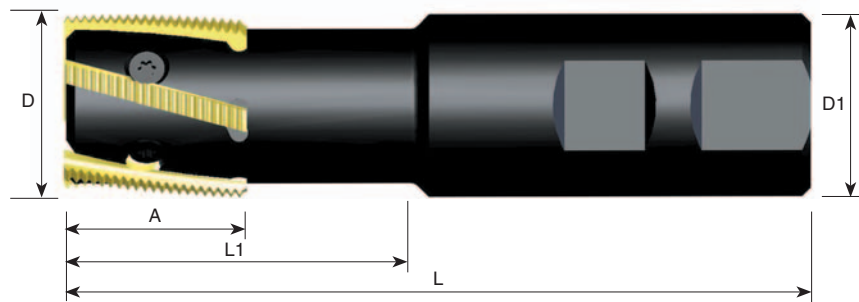

Ordering Code	Insert Size A	D	D1	L	L1	No. of Inserts	Screw	Key
<b>SRH32-5</b>	32	32	32	130	60	5	S32	K22

## H32 Threading Inserts

Spiral inserts have one cutting edge



## ISO

Pitch mm	Ordering Code	Thread Size
1.5	<b>H32 I 1.5 ISO</b>	≥ M35
2.0	<b>H32 I 2.0 ISO</b>	≥ M36
3.0	<b>H32 I 3.0 ISO</b>	≥ M38
4.0	<b>H32 I 4.0 ISO</b>	≥ M40

For internal thread

## UN

Pitch TPI	Ordering Code	Thread Size
20	<b>H32 I 20 UN</b>	≥1 3/8"
18	<b>H32 I 18 UN</b>	≥1 3/8"
16	<b>H32 I 16 UN</b>	≥1 3/8"
12	<b>H32 I 12 UN</b>	≥1 7/16"
8	<b>H32 I 8 UN</b>	≥1 1/2"
6	<b>H32 I 6 UN</b>	≥1 9/16"

For internal thread

## Whitworth

Pitch TPI	Ordering Code	Thread Size
11	<b>H32-11 W</b>	Internal ≥ G 1 1/8" External ≥ G 1"

Same insert for internal and external thread

## BSPT

Pitch TPI	Ordering Code	Thread Size
11	<b>H32-11 BSPT</b>	Internal ≥ 1 1/8" BSPT External ≥ 1" BSPT

Same insert for internal and external thread

## NPT

Pitch TPI	Ordering Code	Thread Size
11.5	<b>H32-11.5 NPT</b>	Internal 1 1/4"-2" NPT External 1"-2" NPT


Same insert for internal and external thread

## NPTF

Pitch TPI	Ordering Code	Thread Size
11.5	<b>H32-11.5 NPTF</b>	Internal 1 1/4"-2" NPTF External 1"-2" NPTF

Same insert for internal and external thread

## H45 Toolholder

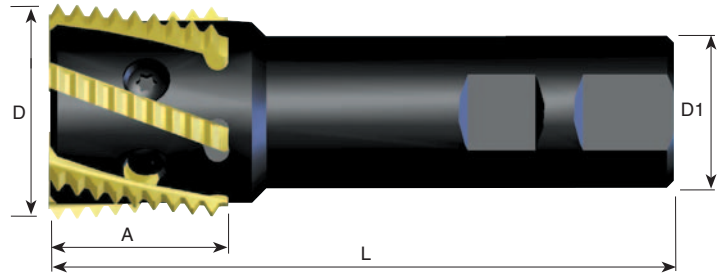

Ordering Code	Insert size A	D	D1	L	No. of Insert	Screw	Key
SRH45-6	37	45	32	130	6	S45	K40

## H45 Threading Inserts

Spiral inserts have one cutting edge



### ISO

Pitch mm	Ordering Code	Thread Size
1.5	H45 I 1.5 ISO	≥ M50
2.0	H45 I 2.0 ISO	≥ M50
3.0	H45 I 3.0 ISO	≥ M56
4.0	H45 I 4.0 ISO	≥ M56

For internal thread

### UN

Pitch TPI	Ordering Code	Thread Size
16	H45 I 16 UN	≥ 2"
12	H45 I 12 UN	≥ 2"
8	H45 I 8 UN	≥ 2 1/4"
6	H45 I 6 UN	≥ 2 1/4"

For internal thread

### Whitworth

Pitch TPI	Ordering Code	Thread Size
11	H45 - 11 W	Internal ≥ G 1 3/4" External ≥ G 1"

Same insert for internal and external thread



## BSPT

Pitch TPI	Ordering Code	Thread Size
11	<b>H45 - 11 BSPT</b>	Internal $\geq 1 \frac{3}{4}$ " BSPT External $\geq 1$ " BSPT


Same insert for internal and external thread

## NPT

Pitch TPI	Ordering Code	Thread Size
11.5	<b>H45 - 11.5 NPT</b>	Internal 2" NPT External 1"-2" NPT

Same insert for internal and external thread

## H63 Toolholder

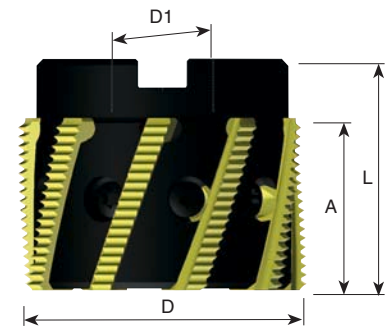

Ordering Code	Insert size A	D	D1	L	No. of Insert	Screw	Key
<b>SRH63-9</b>	38	63	22	50	9	S63	K40

## H63 Threading Inserts

Spiral inserts have one cutting edge



## ISO

Pitch mm	Ordering Code	Thread Size
1.5	<b>H63   1.5 ISO</b>	$\geq M70$
2.0	<b>H63   2.0 ISO</b>	$\geq M70$
3.0	<b>H63   3.0 ISO</b>	$\geq M75$
4.0	<b>H63   4.0 ISO</b>	$\geq M75$

For internal thread

## UN

Pitch TPI	Ordering Code	Thread Size
16	<b>H63 I 16 UN</b>	≥ 2 3/4"
12	<b>H63 I 12 UN</b>	≥ 2 3/4"
8	<b>H63 I 8 UN</b>	≥ 3"
6	<b>H63 I 6 UN</b>	≥ 3"

For internal thread

## Whitworth

Pitch TPI	Ordering Code	Thread Size
11	<b>H63 - 11 W</b>	Internal ≥ G 2 1/2" External ≥ G 1"

Same insert for internal and external thread

## BSPT

Pitch TPI	Ordering Code	Thread Size
11	<b>H63 - 11 BSPT</b>	Internal ≥ 2 1/2" BSPT External ≥ 1" BSPT

Same insert for internal and external thread

## NPT


Pitch TPI	Ordering Code	Thread Size
11.5	<b>H63 - 11.5 NPT</b>	External ≥ 1" NPT

Same insert for internal and external thread

## Spiral inserts and toolholders for finishing

- Milling a 90° shoulder with variety of corner radiuses
- Maximum depth of cut - 37 mm

### H23 Toolholder

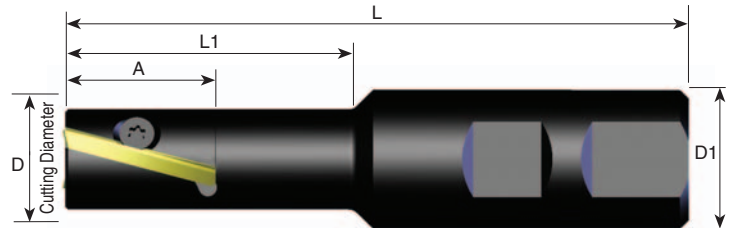


Ordering Code	Insert size A	D	D1	L	L1	No. of Insert	Screw	Key
SRH23-2	27	23	25	110	50	2	S23	K21


### H23F Finishing Inserts

R	Ordering Code
0.2	H23 F R0.2
0.5	H23 F R0.5
1.0	H23 F R1.0

Spiral inserts have one cutting edge



### H32 Toolholder

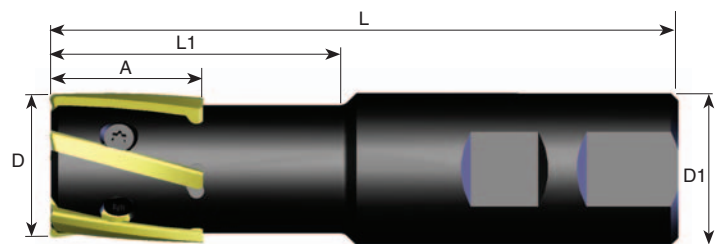


Ordering Code	Insert size A	D	D1	L	L1	No. of Insert	Screw	Key
SRH32-5	32	32	32	130	60	5	S32	K22


### H32F Finishing Inserts

R	Ordering Code
0.2	H32 F R0.2
0.5	H32 F R0.5
1.0	H32 F R1.0

Spiral inserts have one cutting edge



## H45 Toolholder

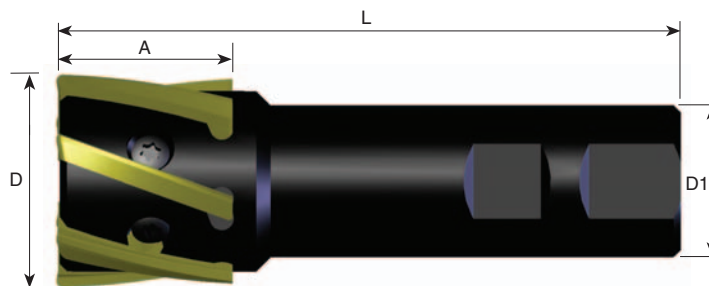


Ordering Code	Insert size A	D	D1	L	No. of Insert	Screw	Key
SRH45-6	37	45	32	130	6	S45	K40


## H45F Finishing Inserts

R	Ordering Code
0.2	H45 F R0.2
0.5	H45 F R0.5
1.0	H45 F R1.0
1.5	H45 F R1.5
2.0	H45 F R2.0

Spiral inserts have one cutting edge

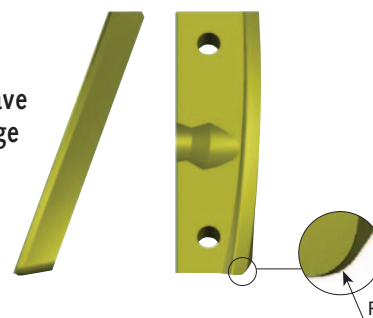

## H63 Toolholder

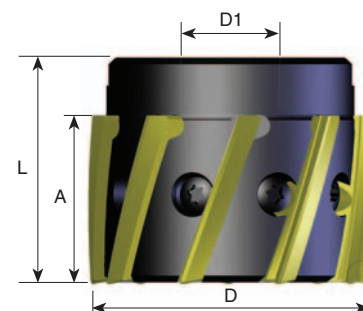


Ordering Code	Insert size A	D	D1	L	No. of Insert	Screw	Key
SRH63-9	38	63	22	50	9	S63	K40

## H63F Finishing Inserts


R	Ordering Code
0.2	H63 F R0.2
0.5	H63 F R0.5
1.0	H63 F R1.0
1.5	H63 F R1.5
2.0	H63 F R2.0

Spiral inserts have one cutting edge



**MT7** Inserts are available in MT7 Sub-Micron Grade with Titanium Aluminium Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, which can be used with all materials.

## Special Tools

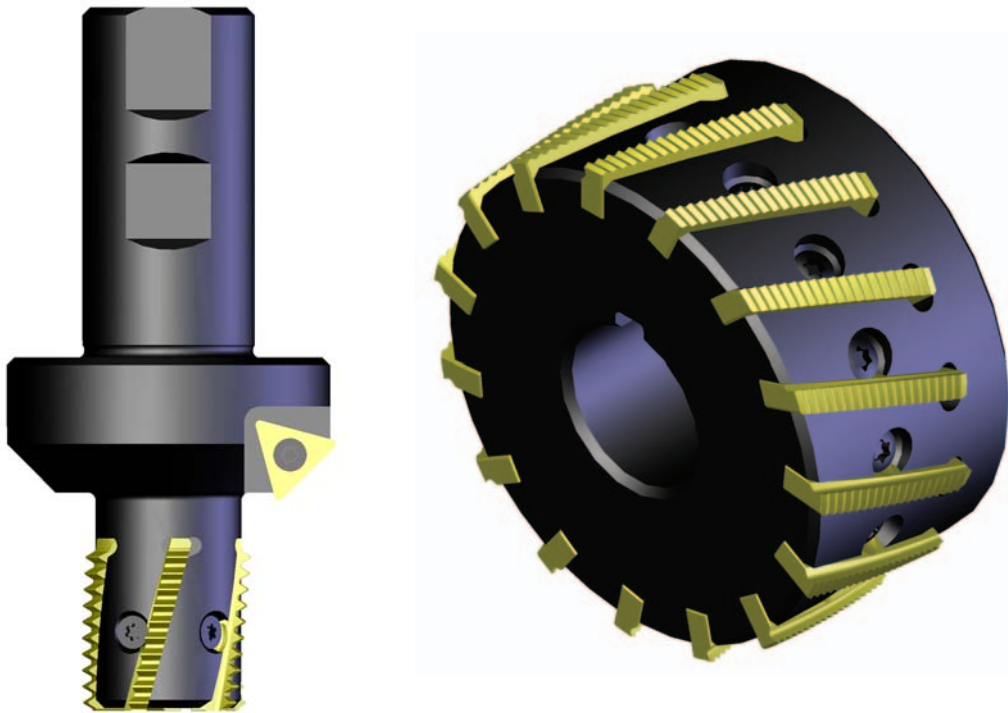

In addition to standard products, C.P.T. manufactures special tools and inserts according to customers' requests. The toolholders are multi-purpose, making them suitable for both roughing and finishing inserts. Special tools are supplied in short delivery times.



# Mill-Thread Solid Carbide



## Advantages of Mill-Thread Solid Carbide

**Carbide grade: MT7** Sub-micron grade with Titanium Aluminium Nitride multi-layer coating (ISO K10-K20). To be run at medium to high cutting speeds. General purpose for all materials.

- Thread is generated in one pass.
- Spiral flutes allow smooth cutting action.
- Shorter machining time due to multi, 3 to 6, flutes.
- 2.2 mm and up cutting diameter.
- Threads up to shoulder in blind holes.
- Longer tool life due to special multi-layer coating.
- Same tool can be used for a variety of materials.
- Excellent surface finish.
- Low cutting pressure allows thin wall machining.
- Same tool used for R.H. and L.H. threads.

## Thread Mills with Internal Coolant

- Coolant fluid washes the chips out of hole
- Increased tool life

**MTB** - Thread Mills with internal coolant bore for blind holes

**MTZ** - Thread Mills with internal coolant through the flutes

**NEW MTQ** - Thread Mills that include relieved neck for deep work pieces

### Contents:

Page:

Product Identification	84
ISO	85
ISO - with Coolant Bore - MTB	86
ISO - with Internal Coolant through the flutes - MTZ	87
ISO - with Internal Coolant Bore - MTQ	88
G (55°)	89
G (55°) - with Internal Coolant Bore - MTB	89
G (55°) - with Internal Coolant through the flutes - MTZ	90
Whitworth - with Internal Coolant through the flutes - MTZ	90
UN	91
UN - with Coolant Bore - MTB	92
UN - with Internal Coolant through the flutes - MTZ	93
UN - with Relieved Neck & Internal Coolant Bore - MTQ	94
BSPT	94
BSPT - with Coolant Bore - MTB	95
BSPT - with Internal Coolant through the flutes - MTZ	95

### Contents:


Page:

NPT	96
NPT - with Coolant Bore - MTB	96
NPT - with Internal Coolant through the flutes - MTZ	97
NPTF	97
NPTF - with Coolant Bore - MTB	98
NPTF - with Internal Coolant through the flutes - MTZ	98
NPS - with Coolant Bore - MTB	99
NPSF - with Coolant Bore - MTB	99
<b>Solid Carbide Tapered End Mills</b>	100
<b>Mill - Thread Solid Carbide for External Threads</b>	101
ISO	101
UN	101





## Product Identification

### Mill-Thread Solid Carbide Ordering Codes

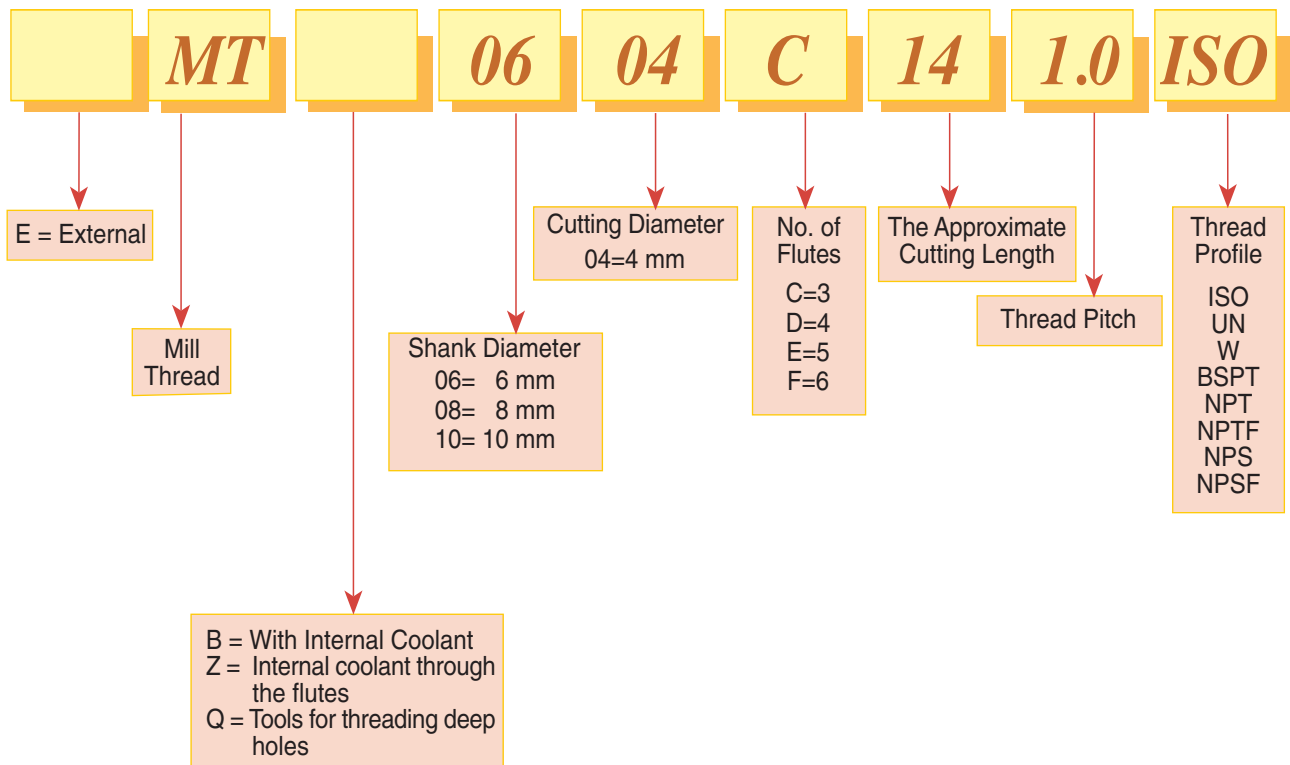

## ISO

### Tools for Internal Thread

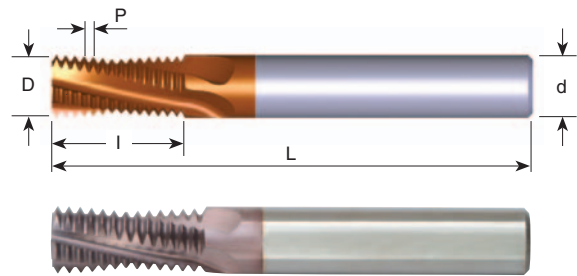

Pitch mm	M coarse	M fine	Ordering Code	d	D	No. of Flutes	I	L
0.5	M3	$\varnothing \geq 4$	<b>MT06022C5 0.5 ISO</b>	6	2.2	3	5.3	58
0.5		$\varnothing \geq 5$	<b>MT06038C10 0.5 ISO</b>	6	3.8	3	10.3	58
0.7	M4	$\varnothing \geq 5$	<b>MT06031C7 0.7 ISO</b>	6	3.1	3	7.4	58
0.75		$\varnothing \geq 6$	<b>MT06045C10 0.75ISO</b>	6	4.5	3	10.1	58
0.8	M5	$\varnothing \geq 6$	<b>MT06036C9 0.8 ISO</b>	6	3.6	3	9.2	58
1.0	M6	$\varnothing \geq 7$	<b>MT0604C10 1.0 ISO</b>	6	4.0	3	10.5	58
1.0	M6	$\varnothing \geq 7$	<b>MT0604C14 1.0 ISO</b>	6	4.0	3	14.5	58
1.0		$\varnothing \geq 9$	<b>MT0606C12 1.0 ISO</b>	6	6.0	3	12.5	58
1.0		$\varnothing \geq 10$	<b>MT0808D16 1.0 ISO</b>	8	8.0	4	16.5	64
1.25	M8	$\varnothing \geq 10$	<b>MT0605C14 1.25ISO</b>	6	5.0	3	14.4	58
1.25	M8	$\varnothing \geq 10$	<b>MT0605C19 1.25ISO</b>	6	5.0	3	19.4	58
1.5	M10	$\varnothing \geq 12$	<b>MT0807C17 1.5 ISO</b>	8	7.0	3	17.3	64
1.5	M10	$\varnothing \geq 12$	<b>MT0807C24 1.5 ISO</b>	8	7.0	3	24.8	76
1.5		$\varnothing \geq 14$	<b>MT1010D21 1.5 ISO</b>	10	10.0	4	21.8	73
1.5		$\varnothing \geq 20$	<b>MT1616F33 1.5 ISO</b>	16	16.0	6	33.8	105
1.75	M12	$\varnothing \geq 14$	<b>MT0808C20 1.75ISO</b>	8	8.0	3	20.1	64
1.75	M12	$\varnothing \geq 14$	<b>MT0808C28 1.75ISO</b>	8	8.0	3	28.9	76
2.0	M16	$\varnothing \geq 17$	<b>MT1010C27 2.0 ISO</b>	10	10.0	3	27.0	73
2.0	M16	$\varnothing \geq 17$	<b>MT1010C39 2.0 ISO</b>	10	10.0	3	39.0	105
2.0		$\varnothing \geq 18$	<b>MT1212D27 2.0 ISO</b>	12	12.0	4	27.0	84
2.0		$\varnothing \geq 26$	<b>MT2020F41 2.0 ISO</b>	20	20.0	6	41.0	105
2.5	M20	$\varnothing \geq 22$	<b>MT1414D33 2.5 ISO</b>	14	14.0	4	33.8	84
2.5	M20	$\varnothing \geq 22$	<b>MT1414D48 2.5 ISO</b>	14	14.0	4	48.8	105
3.0	M24	$\varnothing \geq 25$	<b>MT1616C40 3.0 ISO</b>	16	16.0	3	40.5	105
3.0	M24	$\varnothing \geq 25$	<b>MT1616C58 3.0 ISO</b>	16	16.0	3	58.5	120
3.0	M27	$\varnothing \geq 28$	<b>MT2020D43 3.0 ISO</b>	20	20.0	4	43.5	105



Order example: MT 1212D27 2.0 ISO MT7

For thread mills with coolant bore see following pages

For small thread mills see pages 105 & 113



## ISO With internal coolant bore Tools for Internal Thread

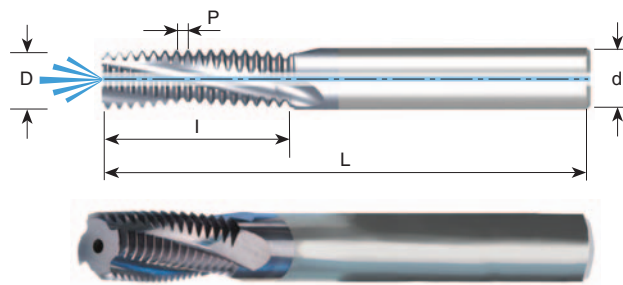

Pitch mm	M coarse	M fine	Ordering Code	d	D	No. of Flutes	I	L
0.5		$\varnothing \geq 5$	<a href="#">MTB06038C10 0.5 ISO</a>	6	3.8	3	10.3	58
0.7	M 4	$\varnothing \geq 5$	<a href="#">MTB06031C7 0.7 ISO</a>	6	3.1	3	7.4	58
0.75		$\varnothing \geq 6$	<a href="#">MTB06045C10 0.75 ISO</a>	6	4.5	3	10.1	58
0.75		$\varnothing \geq 12$	<a href="#">MTB1010D24 0.75 ISO</a>	10	10.0	4	24.4	73
0.8	M 5	$\varnothing \geq 6$	<a href="#">MTB06038C9 0.8 ISO</a>	6	3.8	3	9.2	58
1.0	M 6	$\varnothing \geq 7$	<a href="#">MTB06046C10 1.0 ISO</a>	6	4.6	3	10.5	58
1.0	M 6	$\varnothing \geq 7$	<a href="#">MTB06046C14 1.0 ISO</a>	6	4.6	3	14.5	58
1.0		$\varnothing \geq 9$	<a href="#">MTB0606C12 1.0 ISO</a>	6	6.0	3	12.5	58
1.0		$\varnothing \geq 10$	<a href="#">MTB0808D16 1.0 ISO</a>	8	8.0	4	16.5	64
1.0		$\varnothing \geq 12$	<a href="#">MTB1010D24 1.0 ISO</a>	10	10.0	4	24.5	73
1.25	M 8	$\varnothing \geq 10$	<a href="#">MTB0606C14 1.25 ISO</a>	6	6.0	3	14.4	58
1.25	M 8	$\varnothing \geq 10$	<a href="#">MTB0606C19 1.25 ISO</a>	6	6.0	3	19.4	58
1.5	M10	$\varnothing \geq 12$	<a href="#">MTB08078C17 1.5 ISO</a>	8	7.8	3	17.3	64
1.5	M10	$\varnothing \geq 12$	<a href="#">MTB08078C24 1.5 ISO</a>	8	7.8	3	24.8	76
1.5		$\varnothing \geq 14$	<a href="#">MTB1010D21 1.5 ISO</a>	10	10.0	4	21.8	73
1.5		$\varnothing \geq 16$	<a href="#">MTB1212D26 1.5 ISO</a>	12	12.0	4	26.3	84
1.5		$\varnothing \geq 20$	<a href="#">MTB1616F33 1.5 ISO</a>	16	16.0	6	33.8	105
1.75	M12	$\varnothing \geq 12$	<a href="#">MTB1009C20 1.75 ISO</a>	10	9.0	3	20.1	73
1.75	M12	$\varnothing \geq 12$	<a href="#">MTB1009C28 1.75 ISO</a>	10	9.0	3	28.9	73
2.0	M14	$\varnothing \geq 15$	<a href="#">MTB1010C27 2.0 ISO</a>	10	10.0	3	27.0	73
2.0	M16	$\varnothing \geq 17$	<a href="#">MTB12118D27 2.0 ISO</a>	12	11.8	4	27.0	84
2.0	M16	$\varnothing \geq 17$	<a href="#">MTB12118D39 2.0 ISO</a>	12	11.8	4	39.0	105
2.0		$\varnothing \geq 26$	<a href="#">MTB2020F41 2.0 ISO</a>	20	20.0	6	41.0	105
2.5	M20	$\varnothing \geq 22$	<a href="#">MTB1615E33 2.5 ISO</a>	16	15.0	5	33.8	105
2.5	M20	$\varnothing \geq 22$	<a href="#">MTB1615E48 2.5 ISO</a>	16	15.0	5	48.8	105
3.0	M24	$\varnothing \geq 25$	<a href="#">MTB2018D40 3.0 ISO</a>	20	18.0	4	40.5	105
3.0	M24	$\varnothing \geq 25$	<a href="#">MTB2018D58 3.0 ISO</a>	20	18.0	4	58.5	120
3.0	M27	$\varnothing \geq 27$	<a href="#">MTB2020D43 3.0 ISO</a>	20	20.0	4	43.5	105

Order example: [MTB 08078C17 1.5 ISO MT7](#)



For thread mills with coolant through the flutes see next page

For small thread mills see pages 105 & 113



## ISO With internal coolant through the flutes

Tools for Internal Thread

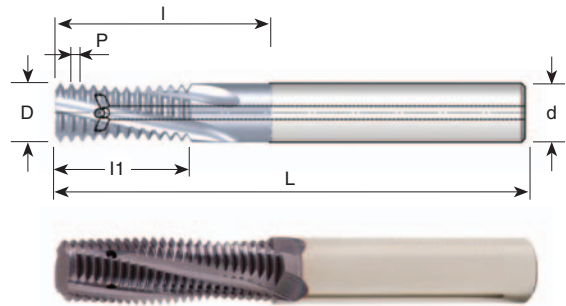

Pitch mm	M coarse	M fine	Ordering Code	d	D	No. of Flutes	l	L
1.0	M6	$\varnothing \geq 7$	<a href="#">MTZ06048C10</a> 1.0 ISO	6	4.8	3	10.5	58
1.0		$\varnothing \geq 9$	<a href="#">MTZ0606C12</a> 1.0 ISO	6	6.0	3	12.5	58
1.0		$\varnothing \geq 10$	<a href="#">MTZ0808D16</a> 1.0 ISO	8	8.0	4	16.5	64
1.25	M8	$\varnothing \geq 10$	<a href="#">MTZ0606C14</a> 1.25 ISO	6	6.0	3	14.4	58
1.25	M8	$\varnothing \geq 10$	<a href="#">MTZ0606C19</a> 1.25 ISO	6	6.0	3	19.4	58
1.5	M10	$\varnothing \geq 12$	<a href="#">MTZ08078C17</a> 1.5 ISO	8	7.8	3	17.3	64
1.5		$\varnothing \geq 14$	<a href="#">MTZ1010D21</a> 1.5 ISO	10	10.0	4	21.8	73
1.5		$\varnothing \geq 16$	<a href="#">MTZ1212D26</a> 1.5 ISO	12	12.0	4	26.3	84
1.5		$\varnothing \geq 20$	<a href="#">MTZ1616E33</a> 1.5 ISO	16	16.0	5	33.8	101
1.75	M12	$\varnothing \geq 12$	<a href="#">MTZ1009C20</a> 1.75 ISO	10	9.0	3	20.1	73
1.75	M12	$\varnothing \geq 12$	<a href="#">MTZ1009C28</a> 1.75 ISO	10	9.0	3	28.9	73
2.0	M14	$\varnothing \geq 15$	<a href="#">MTZ1010C27</a> 2.0 ISO	10	10.0	3	27.0	73
2.0	M16	$\varnothing \geq 17$	<a href="#">MTZ12118D27</a> 2.0 ISO	12	11.8	4	27.0	84
2.5	M20	$\varnothing \geq 22$	<a href="#">MTZ1615E33</a> 2.5 ISO	16	15.0	5	33.8	101

Order example: [MTZ 08078C17](#) 1.5 ISO MT7



For thread mills with coolant bore for deep holes see next page

For small thread mills see pages 105 & 113



## ISO With relieved neck and internal coolant bore

### Tools for Internal Thread

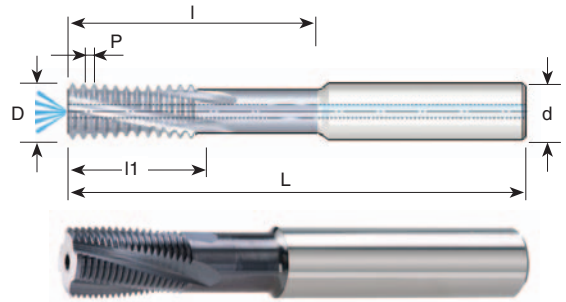

Pitch mm	M fine	Ordering Code	d	D	No. of Flutes	l1	l	L
1.0	$\varnothing \geq 12$	<b>MTQ1010D32 1.0 ISO</b>	10	10.0	4	18.0	32.0	73
1.0	$\varnothing \geq 14$	<b>MTQ1212D38 1.0 ISO</b>	12	12.0	4	21.0	38.0	84
1.0	$\varnothing \geq 18$	<b>MTQ1616F45 1.0 ISO</b>	16	16.0	6	26.0	45.0	105
1.5	$\varnothing \geq 13$	<b>MTQ1010D30 1.5 ISO</b>	10	10.0	4	18.0	30.0	73
1.5	$\varnothing \geq 15$	<b>MTQ1212D34 1.5 ISO</b>	12	12.0	4	19.5	34.5	84
1.5	$\varnothing \geq 19$	<b>MTQ1616F43 1.5 ISO</b>	16	16.0	6	25.5	43.5	105
1.5	$\varnothing \geq 23$	<b>MTQ2020F60 1.5 ISO</b>	20	20.0	6	36.0	60.0	105
2.0	$\varnothing \geq 16$	<b>MTQ1212D42 2.0 ISO</b>	12	12.0	4	24.0	42.0	84
2.0	$\varnothing \geq 20$	<b>MTQ1616E45 2.0 ISO</b>	16	16.0	5	26.0	45.0	105
2.0	$\varnothing \geq 24$	<b>MTQ2020F56 2.0 ISO</b>	20	20.0	6	34.0	56.0	105
3.0	$\varnothing \geq 22$	<b>MTQ1616D45 3.0 ISO</b>	16	16.0	4	30.0	45.0	105
3.0	$\varnothing \geq 26$	<b>MTQ2020E54 3.0 ISO</b>	20	20.0	5	33.0	54.0	105
3.5	$\varnothing \geq 26$	<b>MTQ2020D45 3.5 ISO</b>	20	20.0	4	28.0	45.5	105
4.0	$\varnothing \geq 31$	<b>MTQ2525D64 4.0 ISO</b>	25	25.0	4	40.0	64.0	160

Order example: MTQ 1010D30 1.5 ISO MT7

**Thread mills with relieved neck and internal coolant for milling medium and large threads on relatively deep work pieces.**

Carbide grade: MT7

- To perform medium and large threads on relatively deep work pieces.
- To use overhang according to the application.
- To perform deep threads at the bottom of the application.

#### Advantages



- Provides high rigidity and stability (anti-vibrations).
- Accomplishes deep threads in one pass.
- Relatively low cutting forces due to short cutting length which enables reduction of the radial in feed required.
- Threads length up to 3D.

For small thread mills see pages 105 & 113



## G (55°) BSF, BSP

Same Tool for Internal and External Thread

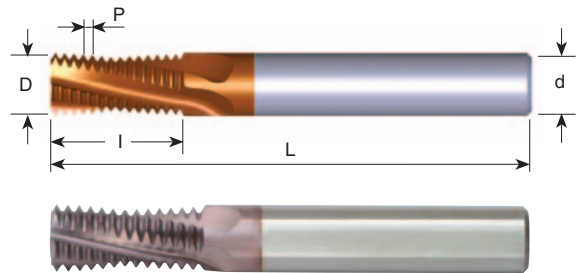


Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
28	G1/8	<b>MT0606C9 28 W</b>	6	6.0	3	9.5	58
19	G1/4-3/8	<b>MT0808C1419 W</b>	8	8.0	3	14.0	64
14	G1/2-7/8	<b>MT1212D1914 W</b>	12	12.0	4	19.0	84
14	G1/2-7/8	<b>MT1212D2614 W</b>	12	12.0	4	26.3	84
11	G1-11/2	<b>MT1212C2411 W</b>	12	12.0	3	24.2	84
11	G1-3	<b>MT1616D3811 W</b>	16	16.0	4	38.1	105
11	G≥1	<b>MT2020E4711 W</b>	20	20.0	5	47.3	105

Order example: MT 1212D19 14 W MT7

## With internal coolant bore

Same Tool for Internal and External Thread

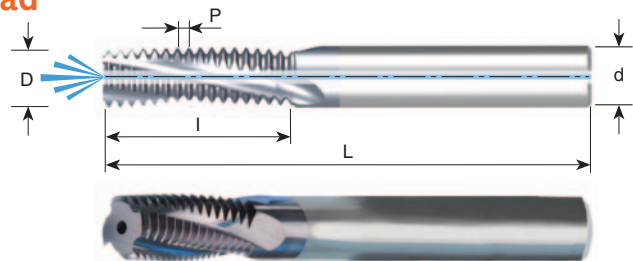



Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
28	G1/8	<b>MTB08078C14 28W</b>	8	7.8	3	14.1	64
19	G1/4-3/8	<b>MTB1010D16 19W</b>	10	10.0	4	16.7	73
14	G1/2-7/8	<b>MTB1616E26 14W</b>	16	16.0	5	26.3	105
11	G≥1	<b>MTB1616D38 11W</b>	16	16.0	4	38.1	105
11	G≥1	<b>MTB2020E47 11W</b>	20	20.0	5	47.3	105

Order example: MTB 1010D16 19 W MT7



## G (55°) BSF, BSP With internal coolant through the flutes

Same Tool for Internal and External Thread

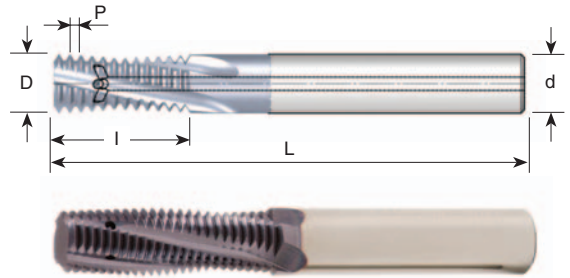



Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
28	G1/8	MTZ08078C14 28W	8	7.8	3	14.1	64
19	G1/4-3/8	MTZ1010D16 19W	10	10.0	4	16.7	73
14	G1/2-7/8	MTZ1616E26 14W	16	16.0	5	26.3	101
11	G≥1	MTZ1616D38 11W	16	16.0	4	38.1	101

Order example: MTZ 08078C14 28W MT7

## Whitworth BSW With internal coolant through the flutes

Same Tool for Internal and External Thread

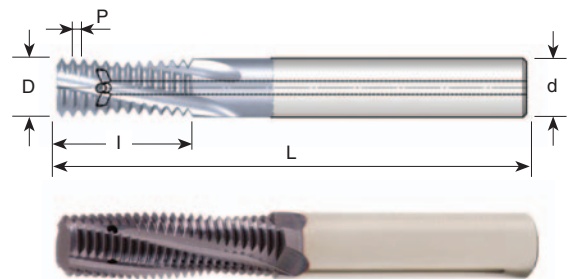



Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
* 20	1/4	MTZ06046C12 20W	6	4.6	3	12.1	58
18	5/16	MTZ06053C14 18W	6	5.3	3	14.8	58
16	3/8	MTZ08068C16 16W	8	6.8	3	16.7	64
16	1/2	MTZ10092D24 16W	10	9.2	4	24.6	73
14	7/16	MTZ08078D20 14W	8	7.8	4	20.9	64
12	1/2	MTZ10086D24 12W	10	8.6	4	24.4	73
11	5/8	MTZ12109D28 11W	12	10.9	4	28.9	84

Order example: MTZ 08068C16 16 W MT7

\* Cutter without coolant

## UN

### Tools for Internal Thread

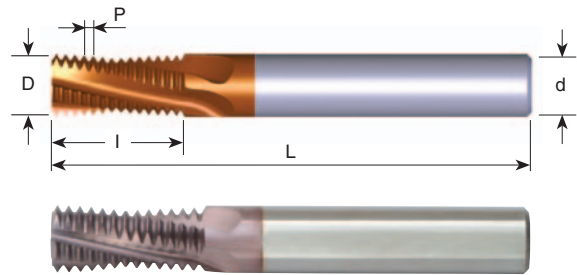

Pitch TPI	UNC	UNF	UNEF	Ordering Code	d	D	No. of Flutes	I	L
40	5			<b>MT06025C6 40 UN</b>	6	2.5	3	6.0	58
32	8	10	12	<b>MT06032C6 32 UN</b>	6	3.2	3	6.8	58
28		1/4		<b>MT0604C11 28 UN</b>	6	4.0	3	11.3	58
28			7/16-1/2	<b>MT0606C14 28 UN</b>	6	6.0	3	14.1	58
24		5/16		<b>MT0605C14 24 UN</b>	6	5.0	3	14.3	58
24		3/8	9/16-5/8	<b>MT0807C21 24 UN</b>	8	7.0	3	20.6	64
20	1/4			<b>MT06045C12 20 UN</b>	6	4.5	3	12.1	58
20		7/16-1/2		<b>MT0807C21 20 UN</b>	8	7.0	3	21.0	64
20			3/4-1	<b>MT1212E27 20 UN</b>	12	12.0	5	27.3	84
18	5/16			<b>MT0605C14 18 UN</b>	6	5.0	3	14.8	58
18		9/16-5/8	1 1/8-1 5/8	<b>MT1010D26 18 UN</b>	10	10.0	4	26.1	73
16	3/8			<b>MT0606C16 16 UN</b>	6	6.0	3	16.7	58
16		3/4		<b>MT1212D31 16 UN</b>	12	12.0	4	31.0	84
14	7/16			<b>MT0807C20 14 UN</b>	8	7.0	3	20.9	64
14		7/8		<b>MT1615E37 14 UN</b>	16	15.0	5	37.2	105
13	1/2			<b>MT0808C22 13 UN</b>	8	8.0	3	22.5	64
12	9/16			<b>MT1010C26 12 UN</b>	10	10.0	3	26.5	73
12		1-1 1/2		<b>MT1616E41 12 UN</b>	16	16.0	5	41.3	105
11	5/8			<b>MT1010C28 11 UN</b>	10	10.0	3	28.9	73
10	3/4			<b>MT1212C34 10 UN</b>	12	12.0	3	34.3	84
9	7/8			<b>MT1615C38 9 UN</b>	16	15.0	3	38.1	105
8	1			<b>MT1616C42 8 UN</b>	16	16.0	3	42.9	105
7	1 1/8 - 1 1/4			<b>MT2020D45 7 UN</b>	20	20.0	4	45.3	105

Order example: MT 1615E37 14UN MT7



For thread mills with coolant bore see following pages

For small thread mills see pages 106-107, 114



## UN With internal coolant bore

### Tools for Internal Thread

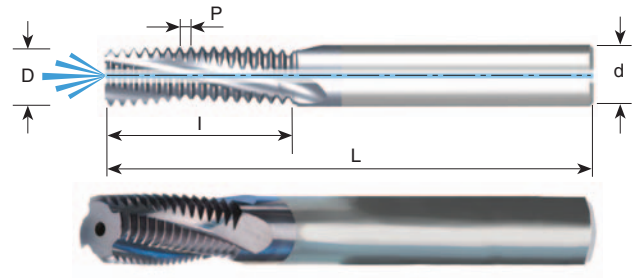

Pitch TPI	UNC	UNF	UNEF	Ordering Code	d	D	No. of Flutes	I	L
32	8	10	12	<b>MTB06032C6 32 UN</b>	6	3.2	3	6.8	58
32			5/16	<b>MTB0606C14 32 UN</b>	6	6.0	3	14.7	58
32			3/8	<b>MTB0808D18 32 UN</b>	8	8.0	4	18.7	64
28		1/4		<b>MTB0605C11 28 UN</b>	6	5.0	3	11.3	58
28			7/16-1/2	<b>MTB0606C14 28 UN</b>	6	6.0	3	14.1	58
24		5/16		<b>MTB08066C14 24 UN</b>	8	6.6	3	14.3	64
24		3/8	9/16-5/8	<b>MTB0808D21 24 UN</b>	8	8.0	4	20.6	64
20	1/4			<b>MTB06047C12 20 UN</b>	6	4.7	3	12.1	58
20		7/16		<b>MTB0808C21 20 UN</b>	8	8.0	3	21.0	64
20		1/2		<b>MTB1010D22 20 UN</b>	10	10.0	4	22.3	73
20			3/4-1	<b>MTB1212E27 20 UN</b>	12	12.0	5	27.3	84
18	5/16			<b>MTB06056C14 18 UN</b>	6	5.6	3	14.8	58
18		9/16-5/8	1 1/8, 1 5/8	<b>MTB12113D26 18 UN</b>	12	11.3	4	26.1	84
16	3/8			<b>MTB08067C16 16 UN</b>	8	6.7	3	16.7	64
16		3/4		<b>MTB1212D31 16 UN</b>	12	12.0	4	31.0	84
14	7/16			<b>MTB08077C20 14 UN</b>	8	7.7	3	20.9	64
14		7/8		<b>MTB1616E37 14 UN</b>	16	16.0	5	37.2	105
13	1/2			<b>MTB10092C22 13 UN</b>	10	9.2	3	22.5	73
12	9/16			<b>MTB12105C26 12 UN</b>	12	10.5	3	26.5	84
12		1-1 1/2		<b>MTB1616E41 12 UN</b>	16	16.0	5	41.3	105
11	5/8			<b>MTB12114C28 11 UN</b>	12	11.4	3	28.9	84
10	3/4			<b>MTB16144D34 10 UN</b>	16	14.4	4	34.3	105
9	7/8			<b>MTB1616C38 9 UN</b>	16	16.0	3	38.1	105
8	1			<b>MTB20195D42 8 UN</b>	20	19.5	4	42.9	105
7	1 1/8, 1 1/4			<b>MTB2020D45 7 UN</b>	20	20.0	4	45.3	105

Order example: MTB 1212D31 16 UN MT7



For thread mills with coolant through the flutes see next page

For small thread mills see pages 106-107, 114



## UN with internal coolant through the flutes

Tools for Internal Thread

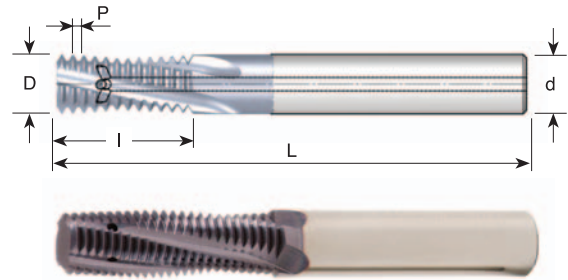

Pitch TPI	UNC	UNF	UNEF	Ordering Code	d	D	No. of Flutes	I	L
28		1/4		MTZ0605C11 28 UN	6	5.0	3	11.3	58
28			7/16-1/2	MTZ0606C14 28 UN	6	6.0	3	14.1	58
24		5/16		MTZ08066C14 24 UN	8	6.6	3	14.3	64
24		3/8	9/16-5/8	MTZ0808D21 24 UN	8	8.0	4	20.6	64
20		7/16		MTZ0808C21 20 UN	8	8.0	3	21.0	64
20		1/2		MTZ1010D22 20 UN	10	10.0	4	22.3	73
20			3/4-1	MTZ1212E27 20 UN	12	12.0	5	27.3	84
18	5/16			MTZ06056C14 18 UN	6	5.6	3	14.8	58
18		9/16-5/8	1 1/8-1 5/8	MTZ12113D26 18 UN	12	11.3	4	26.1	84
16	3/8			MTZ08067C16 16 UN	8	6.7	3	16.7	64
16		3/4		MTZ1212D31 16 UN	12	12.0	4	31.0	84
14	7/16			MTZ08077C20 14 UN	8	7.7	3	20.9	64
14		7/8		MTZ1616E37 14 UN	16	16.0	5	37.2	101
13	1/2			MTZ10092C22 13 UN	10	9.2	3	22.5	73
12	9/16			MTZ12105C26 12 UN	12	10.5	3	26.5	84
11	5/8			MTZ12114C28 11 UN	12	11.4	3	28.9	84
10	3/4			MTZ16144D34 10 UN	16	14.4	4	34.3	101

Order example: MTZ 0808D21 24UN MT7



For thread mills with coolant bore for deep holes see next page

For small thread mills see pages 106-107, 114



## UN With relieved neck and internal coolant bore

Tools for Internal Thread

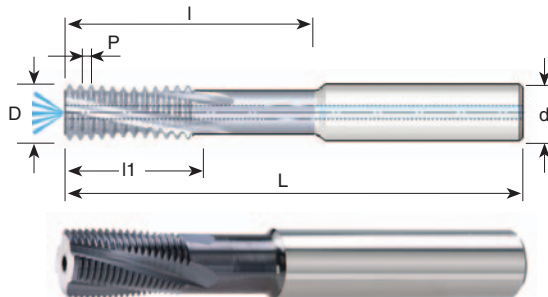

Pitch TPI	Thread Size	Ordering Code	d	D	No. of Flutes	l1	l	L
20	$\varnothing \geq 12$	<b>MTQ1010D30 20 UN</b>	10	10.0	4	17.8	30.5	73
20	$\varnothing \geq 14$	<b>MTQ1212E35 20 UN</b>	12	12.0	5	20.3	35.6	84
20	$\varnothing \geq 18$	<b>MTQ1616F43 20 UN</b>	16	16.0	6	25.4	43.2	105
18	$\varnothing \geq 15$	<b>MTQ1212D35 18 UN</b>	12	12.0	4	19.7	35.3	84
16	$\varnothing \geq 15$	<b>MTQ1212D35 16 UN</b>	12	12.0	4	20.7	35.0	84
16	$\varnothing \geq 19$	<b>MTQ1616E42 16 UN</b>	16	16.0	5	25.4	42.9	105
16	$\varnothing \geq 23$	<b>MTQ2020F58 16 UN</b>	20	20.0	6	36.5	58.8	105
14	$\varnothing \geq 20$	<b>MTQ1616E45 14 UN</b>	16	16.0	5	25.4	45.3	105
12	$\varnothing \geq 16$	<b>MTQ1212D42 12 UN</b>	12	12.0	4	25.4	42.3	84
12	$\varnothing \geq 24$	<b>MTQ2020E55 12 UN</b>	20	20.0	6	33.9	55.1	105

Order example: MTQ 1212D35 16 UN MT7

Thread mills with relieved neck and internal coolant for milling medium and large threads on relatively deep work pieces.

Carbide grade: MT7

- To perform medium and large threads on relatively deep work pieces.
- To use overhang according to the application.
- To perform deep threads at the bottom of the application.



### Advantages

- Provides high rigidity and stability (anti-vibrations).
- Accomplishes deep threads in one pass.
- Relatively low cutting forces due to short cutting length which enables reduction of the radial in feed required.
- Threads length up to 3D.

For small thread mills see pages 106-107, 114

## BSPT

Same Tool for Internal and External Thread

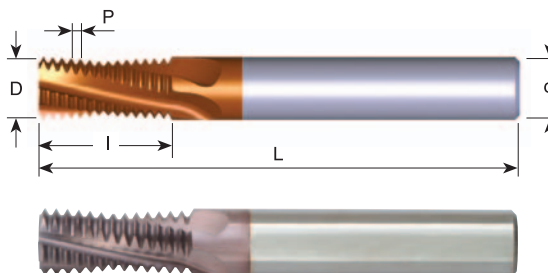


Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	l	L
28	RC1/8	<b>MT0606C9 28 BSPT</b>	6	6.0	3	9.5	58
19	RC1/4-3/8	<b>MT0808C14 19 BSPT</b>	8	8.0	3	14.0	64
14	RC1/2-7/8	<b>MT1212D19 14 BSPT</b>	12	12.0	4	19.1	84
11	RC1-2	<b>MT1616D28 11 BSPT</b>	16	16.0	4	28.9	105

Order example: MT 1616D28 11 BSPT MT7

For thread mills with coolant bore see next page

## BSPT With internal coolant bore

Same Tool for Internal and External Thread - Metric shanks


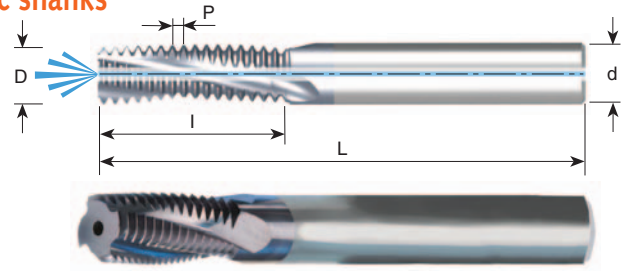


Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
28	RC1/8	<b>MTB08078C14 28 BSPT</b>	8	7.8	3	14.1	64
19	RC1/4-3/8	<b>MTB1010D16 19 BSPT</b>	10	10.0	4	16.7	73
14	RC1/2-7/8	<b>MTB1616E26 14 BSPT</b>	16	16.0	5	26.3	105
11	RC1-2	<b>MTB1616D28 11 BSPT</b>	16	16.0	4	28.9	105

Order example: MTB 08078C14 28 BSPT MT7

## BSPT With internal coolant through the flutes

Same Tool for Internal and External Thread

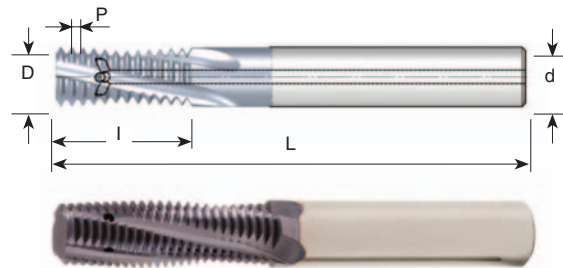



Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
28	RC1/8	<b>MTZ08078C14 28 BSPT</b>	8	7.8	3	14.1	64
19	RC1/4-3/8	<b>MTZ1010D16 19 BSPT</b>	10	10.0	4	16.7	73
14	RC1/2-7/8	<b>MTZ1616E26 14 BSPT</b>	16	16.0	5	26.3	101
11	RC1-2	<b>MTZ1616D28 11 BSPT</b>	16	16.0	4	28.9	101

Order example: MTZ 1010D16 19 BSPT MT7



## NPT

Same Tool for Internal and External Thread

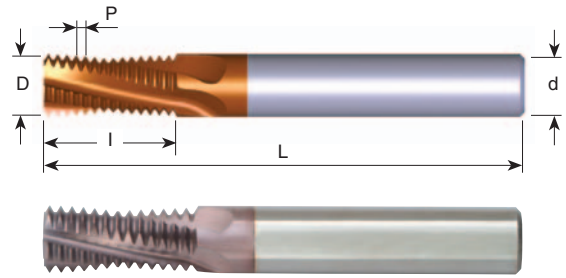


Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
27	1/16 -1/8	<b>MT0606C9 27 NPT</b>	6	6.0	3	9.9	58
18	1/4-3/8	<b>MT0808C14 18 NPT</b>	8	8.0	3	14.8	64
14	1/2-3/4	<b>MT1212D20 14 NPT</b>	12	12.0	4	20.9	84
11.5	1-2	<b>MT1616D27 11.5 NPT</b>	16	16.0	4	27.6	105
8	≥ 2 1/2	<b>MT2020D39 8 NPT</b>	20	20.0	4	39.7	105

Order example: MT 0808C14 18 NPT MT7

## NPT With internal coolant

Same Tool for Internal and External Thread

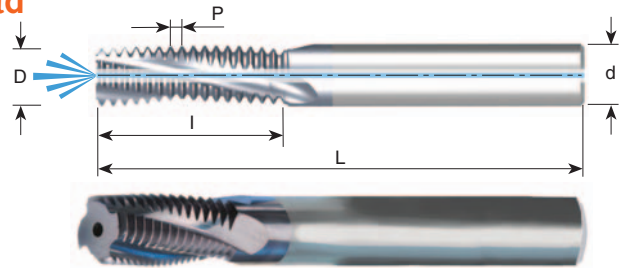



Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
27	1/8	<b>MTB08076C10 27 NPT</b>	8	7.6	3	10.8	64
18	1/4-3/8	<b>MTB1010D16 18 NPT</b>	10	10.0	4	16.2	73
14	1/2-3/4	<b>MTB16155D22 14 NPT</b>	16	15.5	4	22.7	105
11.5	1-2	<b>MTB2020D29 11.5 NPT</b>	20	20.0	4	29.8	105
8	≥ 2 1/2	<b>MTB2020D39 8 NPT</b>	20	20.0	4	39.7	105

Order example: MTB 1010D16 18 NPT MT7

For thread mills with coolant through the flutes see next page  
 For conical preparation end mills see page 100

## NPT With internal coolant through the flutes

Same Tool for Internal and External Thread

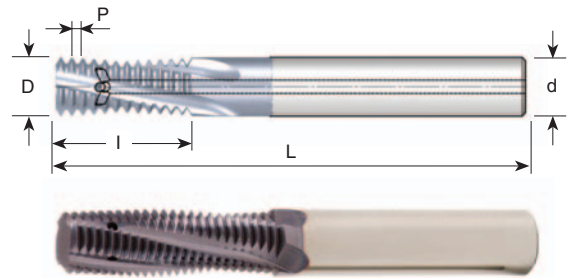



Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
27	1/8	MTZ08076C10 27NPT	8	7.6	3	10.8	64
18	1/4-3/8	MTZ1010D16 18NPT	10	10.0	4	16.2	73
14	1/2-3/4	MTZ16155D22 14NPT	16	15.5	4	22.7	101

Order example: MTZ 08076C10 27 NPT MT7

## NPTF

Same Tool for Internal and External Thread

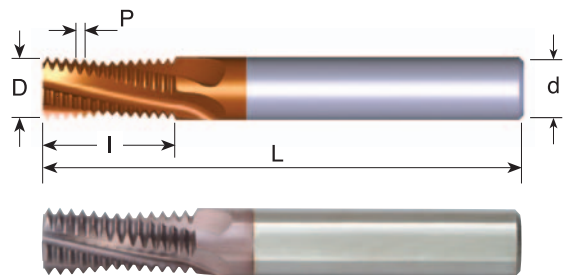


Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
27	1/16-1/8	MT0606C9 27 NPTF	6	6.0	3	9.9	58
18	1/4-3/8	MT0808C14 18 NPTF	8	8.0	3	14.8	64
14	1/2-3/4	MT1212D20 14 NPTF	12	12.0	4	20.9	84
11.5	1-2	MT1616D27 11.5 NPTF	16	16.0	4	27.6	105
8	≥2 1/2	MT2020D39 8 NPTF	20	20.0	4	39.7	105

Order example: MT 1212D20 14 NPTF MT7

For thread mills with coolant bore see next page  
For conical preparation end mills see page 100



## **NPTF** With internal coolant Same Tool for Internal and External Thread

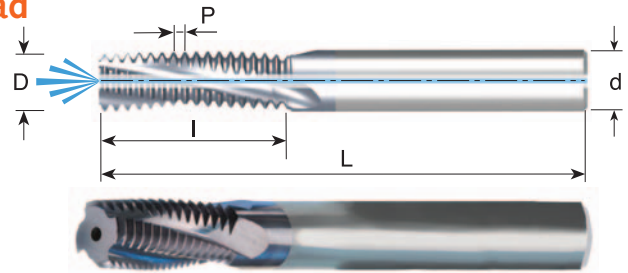

Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
27	1/8	<b>MTB08076C10 27 NPTF</b>	8	7.6	3	10.8	64
18	1/4-3/8	<b>MTB1010D16 18 NPTF</b>	10	10.0	4	16.2	73
14	1/2-3/4	<b>MTB16155D22 14 NPTF</b>	16	15.5	4	22.7	105
11.5	1-2	<b>MTB2020D29 11.5 NPTF</b>	20	20.0	4	29.8	105
8	≥ 2 1/2	<b>MTB2020D39 8 NPTF</b>	20	20.0	4	39.7	105

Order example: MTB 16155D22 14 NPTF MT7

## **NPTF** With internal coolant through the flutes Same Tool for Internal and External Thread

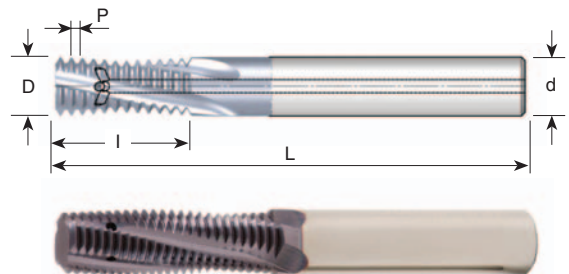



Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
27	1/8	<b>MTZ08076C10 27NPTF</b>	8	7.6	3	10.8	64
18	1/4-3/8	<b>MTZ1010D16 18NPTF</b>	10	10.0	4	16.2	73
14	1/2-3/4	<b>MTZ16155D22 14NPTF</b>	16	15.5	4	22.7	101

Order example: MTZ 1010D16 18 NPTF MT7

For conical preparation end mills see page 100

## NPS With internal coolant

Same Tool for Internal and External Thread - Inch Shanks

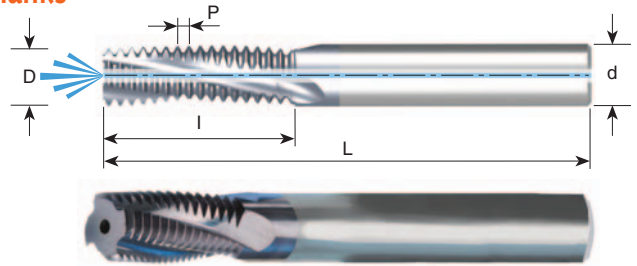



Pitch TPI	Standard	Ordering Code	d inch	D	No. of Flutes	I	L
27	1/8	MTB0312C04 27 NPS	5/16	7.6	3	10.8	63
18	1/4-3/8	MTB0375D06 18 NPS	3/8	9.5	4	16.2	76
14	1/2-3/4	MTB0625D08 14 NPS	5/8	15.5	4	22.7	101
11.5	1-2	MTB0750D11 11.5 NPS	3/4	19.0	4	29.8	101

Order example: MTB 0375D06 18 NPS MT7

## NPSF With internal coolant

Same Tool for Internal and External Thread - Inch Shanks

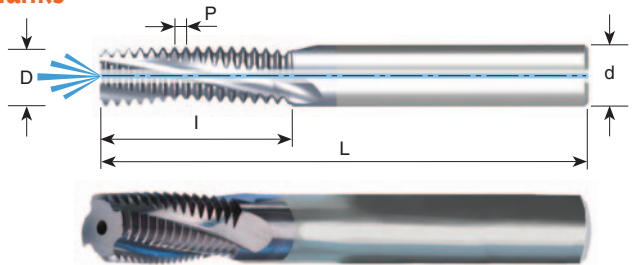

Pitch TPI	Standard	Ordering Code	d inch	D	No. of Flutes	I	L
27	1/8	MTB0312C04 27 NPSF	5/16	7.6	3	10.8	63
18	1/4-3/8	MTB0375D06 18 NPSF	3/8	9.5	4	16.2	76
14	1/2-3/4	MTB0625D08 14 NPSF	5/8	15.5	4	22.7	101
11.5	1-2	MTB0750D11 11.5 NPSF	3/4	19.0	4	29.8	101


Order example: MTB 0312C04 27 NPSF MT7

## Solid Carbide Tapered End Mills

Solid carbide tapered end mills are used for milling preparation of conic threads before the thread milling operation.

### Advantages:


- \* Increases the tool life of mill thread cutters and indexable inserts.
- \* Equal and uniform load along the cutting edge of the mill thread cutter.
- \* Shorter machining time during the mill thread operation, due to the tapered preparation.

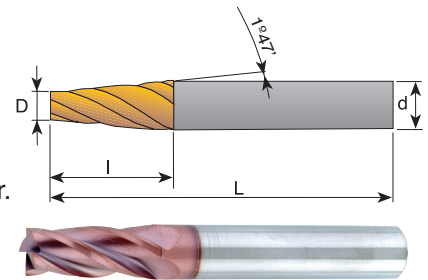

Ordering Code	d	D	l	L	No. of Flutes	Size
<b>SC0652D12</b>	6	5.2	12	58	4	NPT 1/16" - 1/8" NPTF 1/16" - 1/8" BSPT 1/16" - 1/8"
<b>SC1085D24</b>	10	8.5	24	73	4	NPT 1/8" - 1" NPTF 1/8" - 1" BSPT 1/8" - 1"
<b>SC1210D32</b>	12	10	32	84	4	NPT 1/4" - 3" NPTF 1/4" - 3" BSPT 1/4" - 3"

Order example: SC1085D24 MT7

Carbide grade: MT7


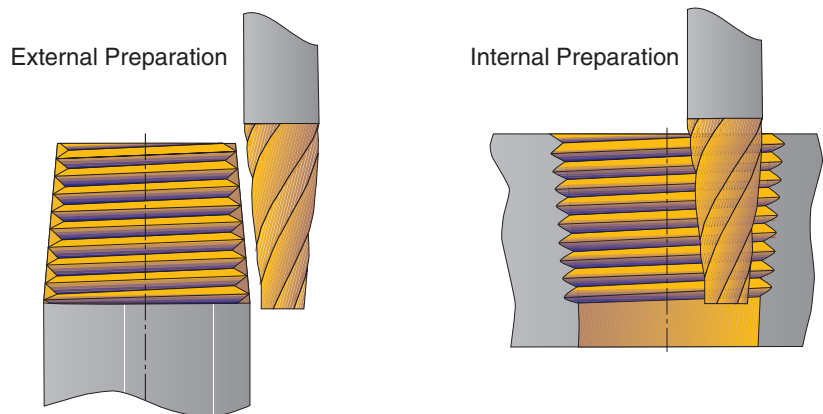


## Mill - Thread Solid Carbide for External Threads

### Advantages:

- \* Excellent surface finish thanks to the spiral flutes
- \* Short machining time due to multi 3 to 5 flutes



### ISO

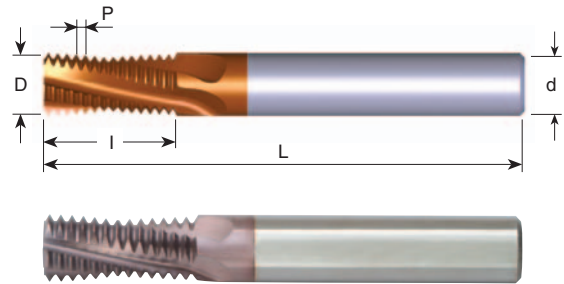

Pitch mm	Ordering Code	d	D	No. of Flutes	l	L
1.0	<b>EMT1010D16 1.0 ISO</b>	10	10.0	4	16.5	73
1.0	<b>EMT1212E20 1.0 ISO</b>	12	12.0	5	20.5	84
1.25	<b>EMT1010D16 1.25 ISO</b>	10	10.0	4	16.9	73
1.5	<b>EMT1010D15 1.5 ISO</b>	10	10.0	4	15.8	73
1.5	<b>EMT1212D20 1.5 ISO</b>	12	12.0	4	20.3	84
1.75	<b>EMT1212D20 1.75 ISO</b>	12	12.0	4	20.1	84
2.0	<b>EMT1010C17 2.0 ISO</b>	10	10.0	3	17.0	73
2.0	<b>EMT1212D21 2.0 ISO</b>	12	12.0	4	21.0	84

Order example: EMT 1010D15 1.5 ISO MT7

### UN

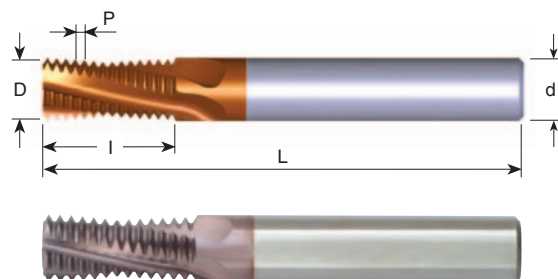


Pitch TPI	Ordering Code	d	D	No. of Flutes	l	L
24	<b>EMT1010D16 24 UN</b>	10	10.0	4	16.4	73
20	<b>EMT1212E21 20 UN</b>	12	12.0	5	21.0	84
18	<b>EMT1212D20 18 UN</b>	12	12.0	4	20.5	84
16	<b>EMT1212D21 16 UN</b>	12	12.0	4	21.4	84
14	<b>EMT1212D20 14 UN</b>	12	12.0	4	20.9	84
12	<b>EMT1212D20 12 UN</b>	12	12.0	4	20.1	84

Order example: EMT 1212D20 18 UN MT7





# Mini Mill-Thread

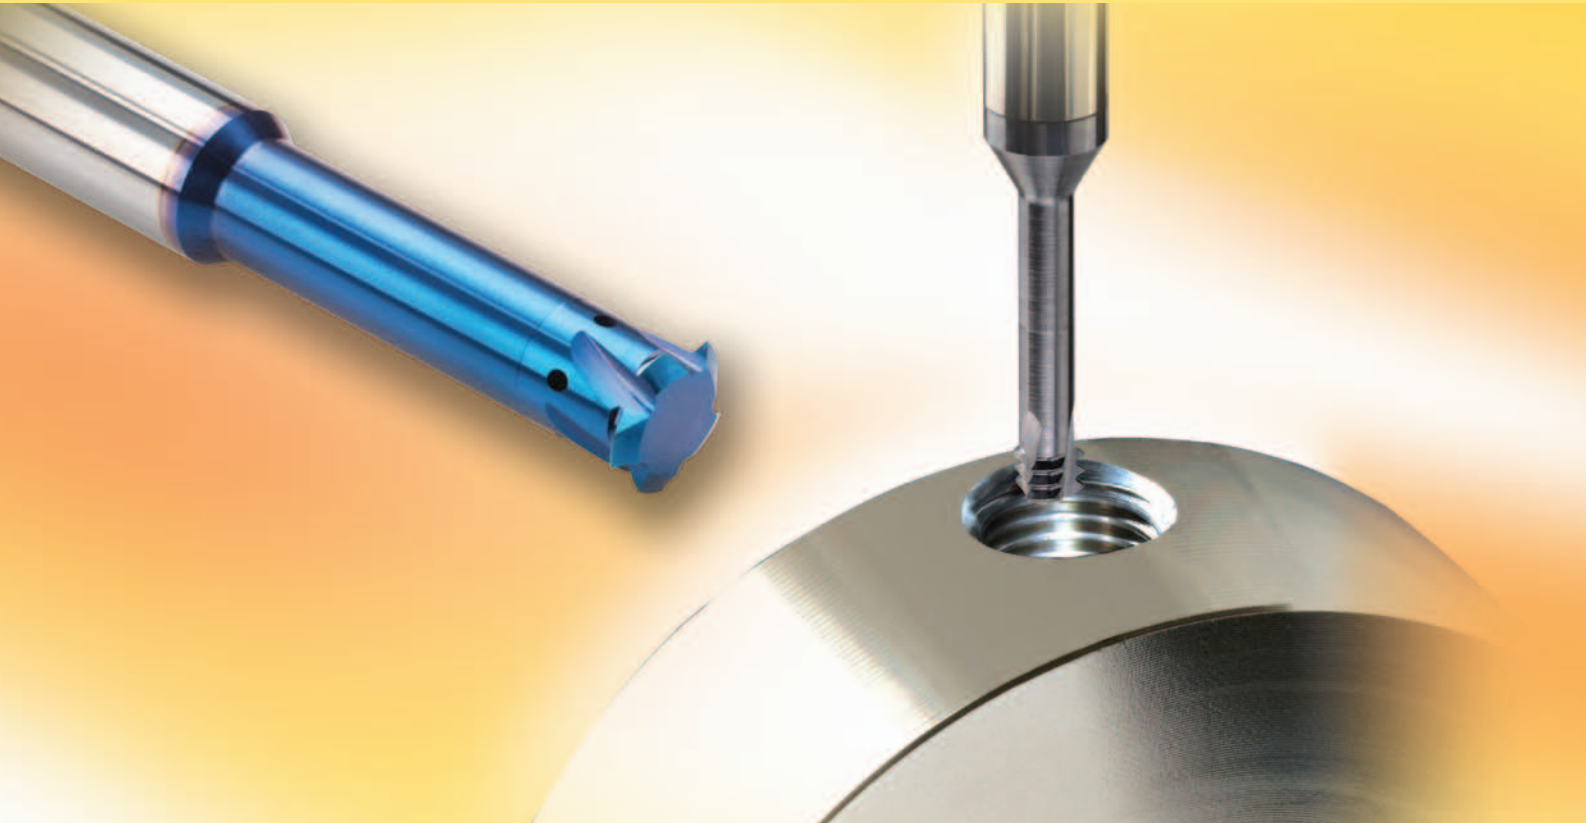

## MTS

**Carbide grade: MT7**

Sub-Micron grade with Titanium Aluminum Nitride multi-layer coating (ISO K10 - K20). To be run at medium to high cutting speeds. General purpose for all materials.

### Advantages:

Specially designed solid-carbide thread mills for the production of internal threads in very small bores.

Due to the unique tool design, accurate geometries and high quality sub-micron carbide grade with Titanium Aluminum Nitride coating, the following are achieved:

- Threading from M1 x 0.25.
- Working in high cutting speed.
- Short machining time.
- Low cutting forces thanks to the short profile.
- No broken taps.

## MTI

### For threading deep parts

**Carbide grade: MT8** Sub-micron grade with advanced PVD triple coating (ISO K10-K20). Extremely high heat resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials.

### Advantages:

- Enables machining in deep holes.
- Same tool can produce a wide range of threads and pitches.
- Same tool can produce both External and Internal threads.
- Coolant through the flutes is very effective for deep holes.
- Spiral flutes allow smooth cutting action.
- Shorter machining time due to multi, 3 to 5, flutes.
- Longer tool life due to special triple coating.


### Contents:

### Page:


Product Identification	104
<b>MTS</b>	
ISO	105
UN	106-107
UNJ - with Internal Coolant through the flutes	108
MJ - with Internal Coolant through the flutes	108
<b>MTI</b> - Partial Profile 60°	109

## Product Identification

### Mini Mill-Thread MTS Ordering Codes

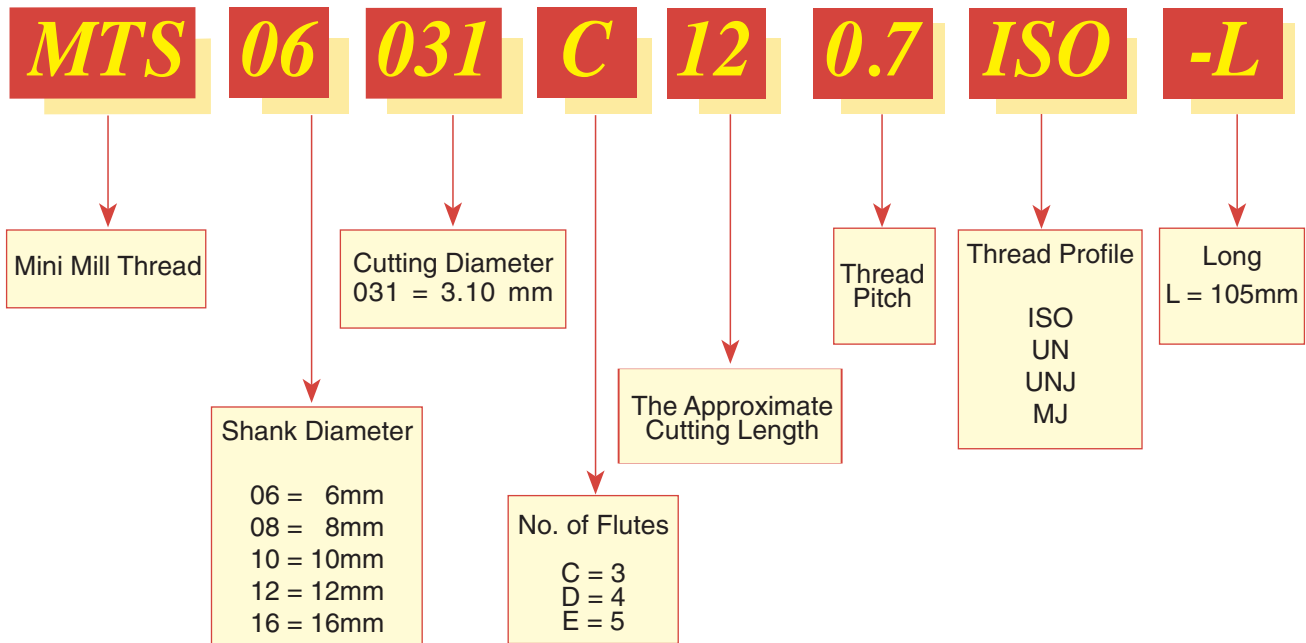


### Mini Mill-Thread MTI Ordering Codes

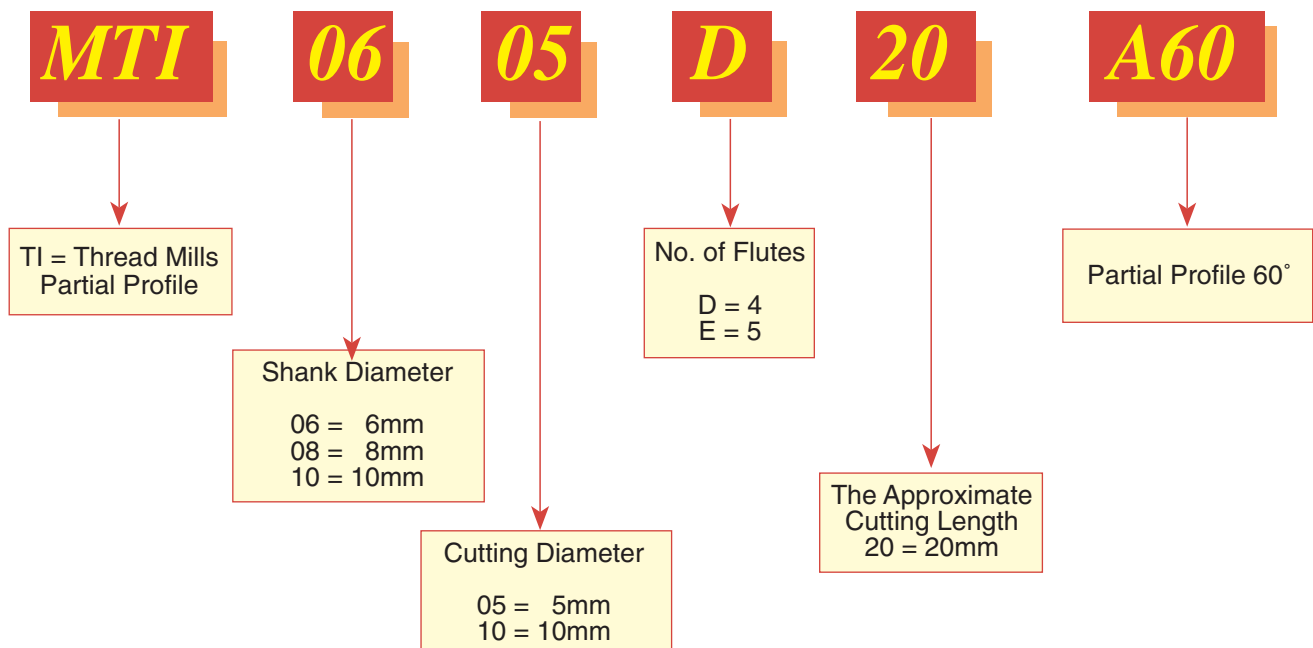

## ISO

### Tools for Internal Thread

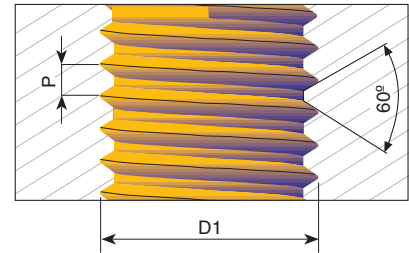

### For thread depth up to 2xD1

Pitch mm	D1	Ordering Code	d	D	No. of Flutes	I	L
0.25	M1	MTS03007C2 0.25 ISO	3	0.72	3	2.5	39
0.25	M1.2	MTS03009C3 0.25 ISO	3	0.90	3	3.0	39
0.4	M2	MTS06016C4 0.4 ISO	6	1.55	3	4.5	58
0.4	M2	MTS06016C4 0.4 ISO-L	6	1.55	3	4.5	105
0.45	M2.2	MTS06017C5 0.45 ISO	6	1.65	3	5.0	58
0.45	M2.5	MTS0602C5 0.45 ISO	6	1.95	3	5.5	58
0.45	M2.5	MTS0602C5 0.45 ISO-L	6	1.95	3	5.5	105
0.5	M3	MTS06024C6 0.5 ISO	6	2.35	3	6.5	58
0.5	M3	MTS06024C6 0.5 ISO-L	6	2.35	3	6.5	105
0.6	M3.5	MTS06028C7 0.6 ISO	6	2.75	3	7.5	58
0.7	M4	MTS06031C9 0.7 ISO	6	3.10	3	9.0	58
0.75	M10	MTS0808D25 0.75 ISO	8	8.00	4	25.0	64
0.8	M5	MTS06038C12 0.8 ISO	6	3.80	3	12.5	58
1.0	M6	MTS06047C14 1.0 ISO	6	4.65	3	14.0	58
1.25	M8	MTS0606C18 1.25 ISO	6	5.95	3	18.0	58
1.5	M10	MTS08078C23 1.5 ISO	8	7.80	3	23.0	64
1.75	M12	MTS1009C26 1.75 ISO	10	9.00	3	26.0	73
2.0	M16	MTS12118D35 2.0 ISO	12	11.80	4	35.0	84
2.5	M20	MTS1615E43 2.5 ISO	16	15.00	5	43.0	105

### For thread depth up to 3xD1

Pitch mm	D1	Ordering Code	d	D	No. of Flutes	I	L
* 0.3	M1.4	MTS03011C4 0.3 ISO	3	1.05	3	4.0	39
* 0.35	M1.6	MTS03012C5 0.35 ISO	3	1.20	3	4.8	39
* 0.4	M2	MTS03016C6 0.4 ISO	3	1.55	3	6.0	39
0.45	M2.5	MTS0602C7 0.45 ISO	6	1.95	3	7.5	58
0.5	M3	MTS06024C9 0.5 ISO	6	2.35	3	9.5	58
0.5	M3	MTS06024C9 0.5 ISO-L	6	2.35	3	9.5	105
0.6	M3.5	MTS06028C10 0.6 ISO	6	2.75	3	10.5	58
0.7	M4	MTS06031C12 0.7 ISO	6	3.10	3	12.5	58
0.7	M4	MTS06031C12 0.7 ISO-L	6	3.10	3	12.5	105
0.8	M5	MTS06038C16 0.8 ISO	6	3.80	3	16.0	58
0.8	M5	MTS06038C16 0.8 ISO-L	6	3.80	3	16.0	105
1.0	M6	MTS06047C20 1.0 ISO	6	4.65	3	20.0	58
1.0	M6	MTS06047C20 1.0 ISO-L	6	4.65	3	20.0	105
1.25	M8	MTS0606C24 1.25 ISO	6	5.95	3	24.0	58


Order example: MTS 06024C9 0.5 ISO MT7

### \*Specially designed for the production of dental implants

- Machining Titanium, surgical stainless steels and hardened materials up to 45 HRc.
- Suitable for high speed air turbine machines (30,000-40,000 RPM) and for standard machining centers (6,000 RPM and higher).
- Can also be used for general purpose threading.

## UN

### Tools for Internal Thread

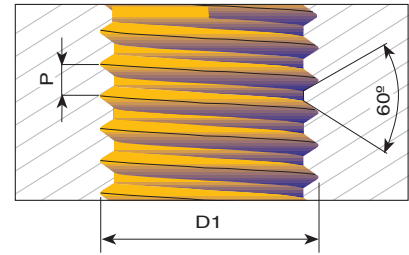


**For thread depth up to  $2 \times D1$**

Pitch TPI	UNC	UNF	Ordering Code	d	D	No. of Flutes	l	L
72		1	<a href="#">MTS06014C3 72 UN</a>	6	1.45	3	3.7	58
64	1	2	<a href="#">MTS06014C3 64 UN</a>	6	1.40	3	3.8	58
56	2	3	<a href="#">MTS06016C4 56 UN</a>	6	1.65	3	4.4	58
48	3	4	<a href="#">MTS06019C5 48 UN</a>	6	1.90	3	5.2	58
40	4		<a href="#">MTS06021C6 40 UN</a>	6	2.10	3	6.3	58
40	4		<a href="#">MTS06021C6 40 UN-L</a>	6	2.10	3	6.3	105
40	5	6	<a href="#">MTS06024C7 40 UN</a>	6	2.45	3	7.0	58
36		8	<a href="#">MTS06033C9 36 UN</a>	6	3.30	3	9.0	58
32	6		<a href="#">MTS06025C7 32 UN</a>	6	2.55	3	7.1	58
32	6		<a href="#">MTS06025C7 32 UN-L</a>	6	2.55	3	7.1	105
32	8		<a href="#">MTS06032C9 32 UN</a>	6	3.20	3	9.5	58
32	8		<a href="#">MTS06032C9 32 UN-L</a>	6	3.20	3	9.5	105
32		10	<a href="#">MTS06037C10 32 UN</a>	6	3.70	3	10.5	58
28		12	<a href="#">MTS06042C11 28 UN</a>	6	4.20	3	11.0	58
28		1/4	<a href="#">MTS0605C14 28 UN</a>	6	5.00	3	14.5	58
24	10,12		<a href="#">MTS06035C10 24 UN</a>	6	3.50	3	10.6	58
24		5/16, 3/8	<a href="#">MTS08066C17 24 UN</a>	8	6.60	3	17.0	64
20	1/4		<a href="#">MTS06047C14 20 UN</a>	6	4.75	3	14.0	58
20		7/16	<a href="#">MTS0808C25 20 UN</a>	8	8.00	3	25.0	64
18	5/16		<a href="#">MTS0606C17 18 UN</a>	6	6.00	3	17.0	58
18		5/8	<a href="#">MTS1212D35 18 UN</a>	12	12.00	4	35.0	84
16	3/8		<a href="#">MTS08067C22 16 UN</a>	8	6.70	3	22.0	64
14	7/16		<a href="#">MTS08077C25 14 UN</a>	8	7.70	3	25.0	64
13	1/2		<a href="#">MTS10092C27 13 UN</a>	10	9.20	3	27.5	73
12	9/16		<a href="#">MTS12105C31 12 UN</a>	12	10.50	3	31.5	84
11	5/8		<a href="#">MTS12114C34 11 UN</a>	12	11.40	3	34.5	84
10	3/4		<a href="#">MTS16144D41 10 UN</a>	16	14.40	4	41.5	105

## UN

### Tools for Internal Thread

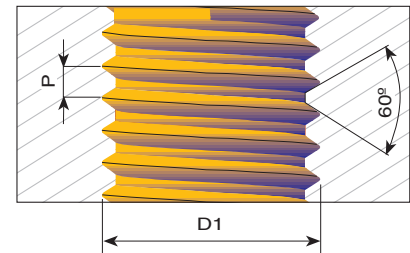

### For thread depth up to $3 \times D1$

Pitch TPI	UNC	UNF	Ordering Code	d	D	No. of Flutes	l	L
80		0	<b>MTS06012C4 80 UN</b>	6	1.15	3	4.0	58
* 72		1	<b>MTS03015C6 72 UN</b>	3	1.45	3	6.0	39
56	2	3	<b>MTS03016C6 56 UN</b>	3	1.65	3	6.6	39
56	2	3	<b>MTS06016C6 56 UN</b>	6	1.65	3	6.6	58
56	2	3	<b>MTS06016C6 56 UN-L</b>	6	1.65	3	6.6	105
40	4		<b>MTS06021C8 40 UN</b>	6	2.10	3	8.0	58
40	4		<b>MTS06021C8 40 UN-L</b>	6	2.10	3	8.0	105
40	5	6	<b>MTS06024C9 40 UN</b>	6	2.45	3	9.6	58
32	6		<b>MTS03025C10 32 UN</b>	3	2.55	3	10.5	39
32	6		<b>MTS06025C10 32 UN</b>	6	2.55	3	10.5	58
32	6		<b>MTS06025C10 32 UN-L</b>	6	2.55	3	10.5	105
32	8		<b>MTS06032C12 32 UN</b>	6	3.20	3	12.5	58
32	8		<b>MTS06032C12 32 UN-L</b>	6	3.20	3	12.5	105
32		10	<b>MTS06037C15 32 UN</b>	6	3.70	3	15.0	58
32		10	<b>MTS06037C15 32 UN-L</b>	6	3.70	3	15.0	105
28		1/4	<b>MTS0605C19 28 UN</b>	6	5.00	3	19.0	58
24		5/16, 3/8	<b>MTS08066C24 24 UN</b>	8	6.60	3	24.0	64
20	1/4		<b>MTS06047C19 20 UN</b>	6	4.75	3	19.0	58
20	1/4		<b>MTS06047C19 20 UN-L</b>	6	4.75	3	19.0	105
18	5/16		<b>MTS0606C23 18 UN</b>	6	6.00	3	23.0	58

Order example: MTS 0605C19 28 UN MT7



#### \*Specially designed for the production of dental implants

- Machining Titanium, surgical stainless steels and hardened materials up to 45 HRc.
- Suitable for high speed air turbine machines (30,000-40,000 RPM) and for standard machining centers (6,000 RPM and higher).
- Can also be used for general purpose threading.



## UNJ With internal coolant through the flutes

Tools for Internal Thread

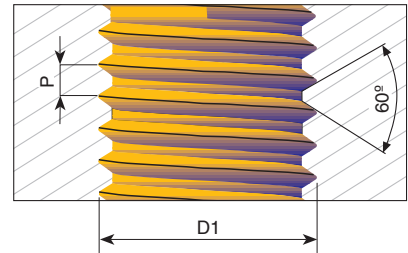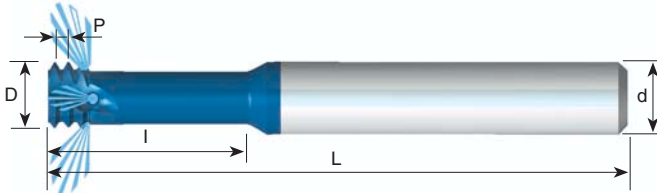

For thread depth up to  $2.5 \times D1$

Pitch TPI	UNJC	UNJF	Ordering Code	d	D	No. of Flutes	I	L
*32	8	10	MTS06033C10 32 UNJ	6	3.30	3	10.5	58
28		1/4	MTS08051C16 28 UNJ	8	5.10	3	16.0	64
24		5/16, 3/8	MTS08067C20 24 UNJ	8	6.70	3	20.0	64
*20	1/4		MTS06049C16 20 UNJ	6	4.90	3	16.0	58
20		7/16	MTS0808C28 20 UNJ	8	8.00	3	28.0	64
18	5/16		MTS08061C20 18 UNJ	8	6.15	3	20.0	64
16	3/8		MTS08069C24 16 UNJ	8	6.90	3	24.0	64
14	7/16		MTS08079C25 14 UNJ	8	7.90	3	25.0	64
13	1/2		MTS10094C27 13 UNJ	10	9.40	3	27.5	73



\* Cutters without coolant

Order example: MTS 06049C16 20 UNJ MT8

**Carbide grade MT8** Sub Micron grade with advanced PVD triple coating (ISO K 10-K20). Extremely high resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials

## MJ With internal coolant through the flutes

Tools for Internal Thread

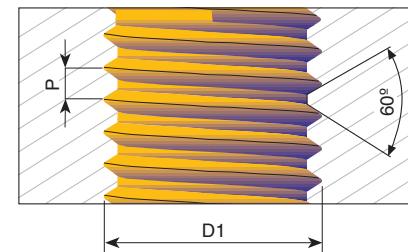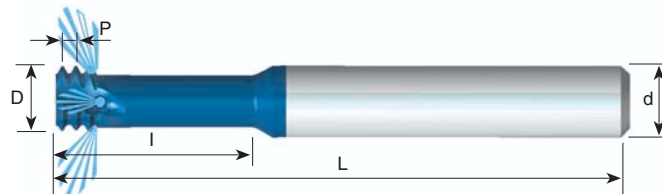

For thread depth up to  $2.5 \times D1$

Pitch mm	D1	Ordering Code	d	D	No. of Flutes	I	L
* 0.7	MJ4	MTS06032C10 0.7 MJ	6	3.20	3	10.0	58
* 0.8	MJ5	MTS06039C12 0.8 MJ	6	3.90	3	12.5	58
* 1.0	MJ6	MTS06048C15 1.0 MJ	6	4.80	3	15.0	58
1.25	MJ8	MTS08061C20 1.25 MJ	8	6.10	3	20.0	64
1.5	MJ10	MTS0808C25 1.5 MJ	8	8.00	3	25.0	64
1.75	MJ12	MTS10092C30 1.75 MJ	10	9.20	3	30.0	73
2.0	MJ14, MJ16	MTS1010C35 2.0 MJ	10	10.00	3	35.0	73

\* Cutters without coolant



Order example: MTS 06048C15 1.0 MJ MT8

**Carbide grade MT8** Sub Micron grade with advanced PVD triple coating (ISO K 10-K20). Extremely high resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials

## Partial Profile 60°

With internal coolant through the flutes

Same Tool for Internal and External Thread

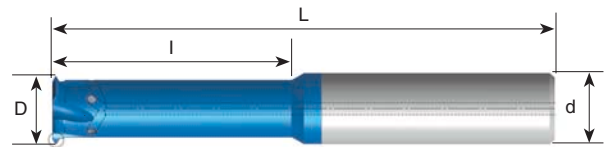

### For threading deep parts


Pitch mm	Pitch TPI	Thread Dia. (min.)	Ordering Code	d	D	No. of Flutes	l	L
Int. 0.5 - 0.8 Ex. 0.4 - 0.8	56-28 64-32	$\varnothing \geq 6$	<b>MTI0605D20 A60</b>	6	5.0	4	20	58
		$\varnothing \geq 9$	<b>MTI0808D28 A60</b>	8	8.0	4	28	64
		$\varnothing \geq 13$	<b>MTI1212E38 A60</b>	12	12.0	5	38	84
Int. 1.0 - 1.75 Ex. 0.8 - 1.5	28-14 32-16	$\varnothing \geq 10$	<b>MTI0808D30 A60</b>	8	8.0	4	30	64
		$\varnothing \geq 12$	<b>MTI1010D35 A60</b>	10	10.0	4	35	73
		$\varnothing \geq 14$	<b>MTI1212E39 A60</b>	12	12.0	5	39	84
Int. 2.0 - 3.0 Ex. 1.75-2.5	13- 8 15-10	$\varnothing \geq 16$	<b>MTI1212E40 A60</b>	12	12.0	5	40	84
		$\varnothing \geq 18$	<b>MTI1614E45 A60</b>	16	14.0	5	45	101
		$\varnothing \geq 20$	<b>MTI1616E50 A60</b>	16	16.0	5	50	101

Order example: MTI 0808D28 A60 MT8



# HARDCUT

## Mill-Thread Solid Carbide for machining hard materials

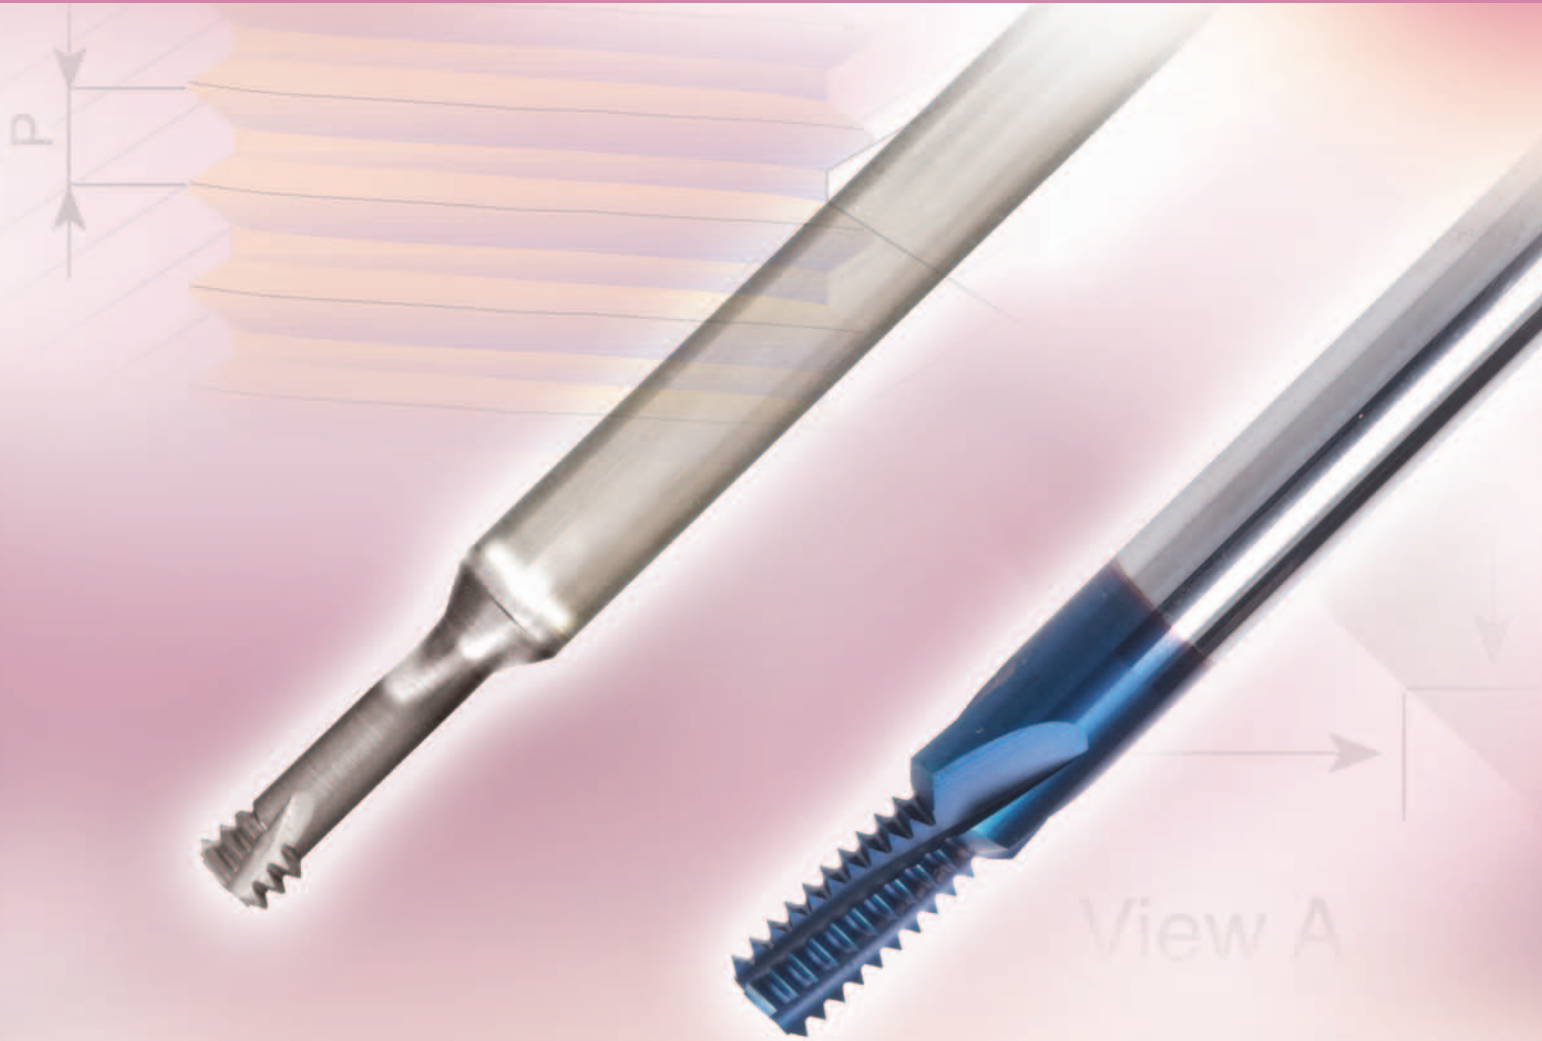

### Mini Mill-Thread Type

### MTH Type

C.P.T. is pioneer in offering solid carbide thread mills tools designed specifically for the machining of hardened materials up to 62HRc.

These tools provide high performance, improved cut and an excellent surface finish.


#### Contents:

#### Page:


Product Identification	112
Mini Mill-Thread <b>HARDCUT</b>	113
ISO	113
UN	114
<b>MTH Type</b>	
ISO	115
UN	116

# Product Identification

## Mini Mill-Thread MTSH Type Ordering Codes

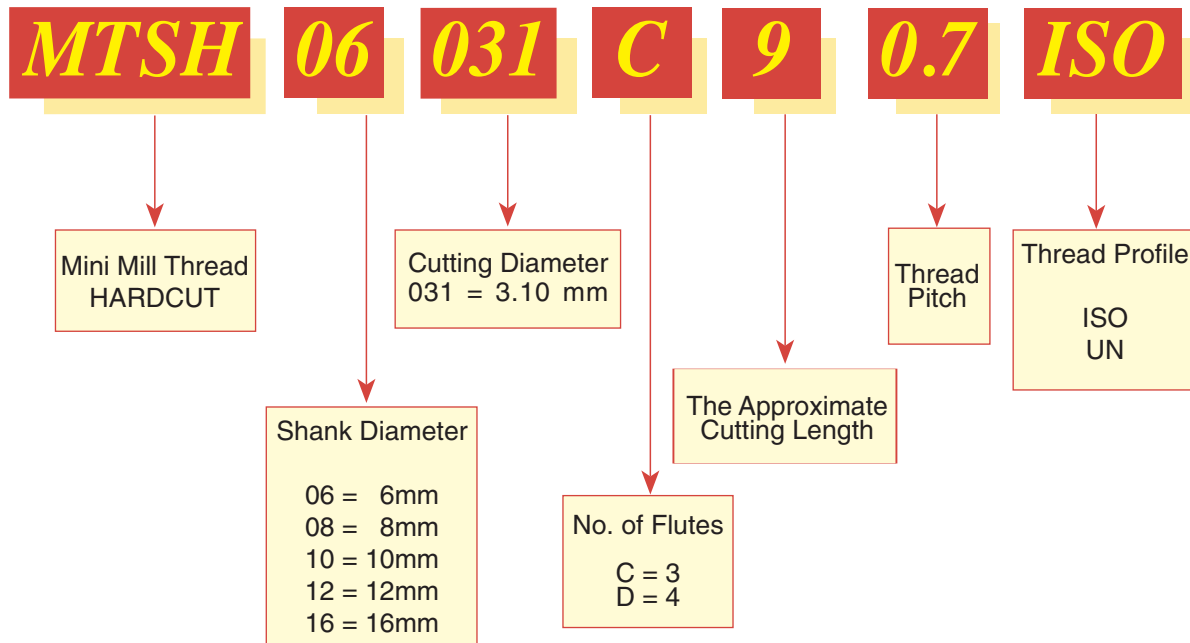

## MTH Type Ordering Codes

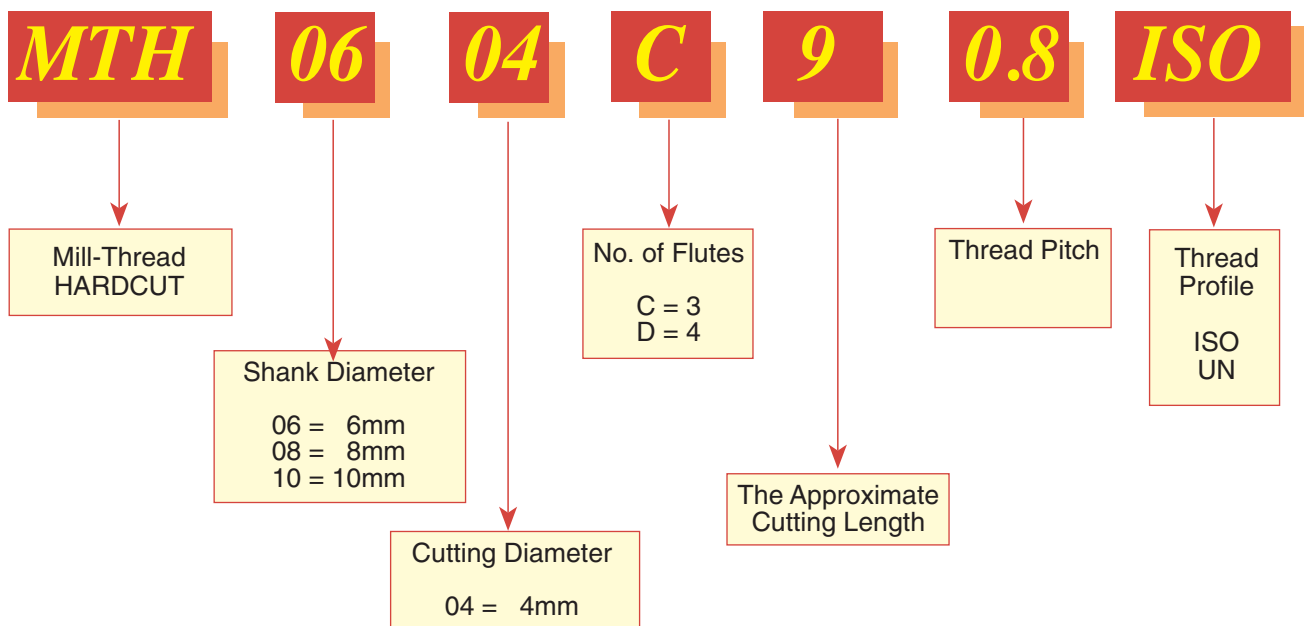

## HARDCUT



A unique line of thread milling tools designed specifically for the machining of hardened materials up to 62HRc.

These tools provide high performance, improved cut and an excellent surface finish.

Carbide grade: MT9

Sub-micron carbide grade with advanced Titanium Aluminium Nitride coating.

- Threading from M1.4 x 0.3
- Perfect solution for the Die and Mold industry
- Working at high cutting speeds
- Short machining time
- Low cutting forces thanks to the short profile

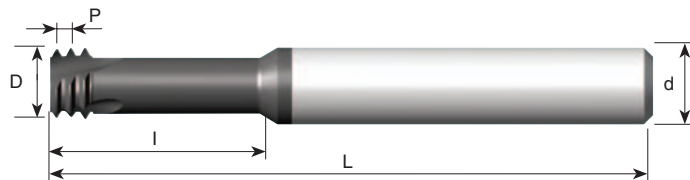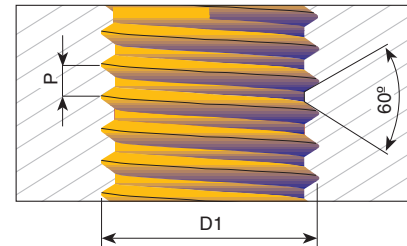

## ISO

Tools for Internal Thread

For thread depth up to 2xD1

Left hand cutting  
For CNC code use M04

Pitch mm	D1	Ordering Code	d	D	No. of Flutes	I	L
0.4	M2	MTSH06016C4 0.4 ISO	6	1.55	3	4.5	58
0.45	M2.2	MTSH06017C5 0.45 ISO	6	1.65	3	5.0	58
0.45	M2.5	MTSH0602C5 0.45 ISO	6	1.95	3	5.5	58
0.5	M3	MTSH06024C6 0.5 ISO	6	2.35	3	6.5	58
0.6	M3.5	MTSH06028C7 0.6 ISO	6	2.75	3	7.5	58
0.7	M4	MTSH06031C9 0.7 ISO	6	3.10	3	9.0	58
0.8	M5	MTSH06038C12 0.8 ISO	6	3.80	3	12.5	58
1.0	M6	MTSH06047C14 1.0 ISO	6	4.65	3	14.0	58
1.25	M8	MTSH0606C18 1.25 ISO	6	5.95	3	18.0	58
1.5	M10	MTSH08078C23 1.5 ISO	8	7.80	3	23.0	64
1.75	M12	MTSH1009C26 1.75 ISO	10	9.00	3	26.0	73
2.0	M16	MTSH12118D35 2.0 ISO	12	11.80	4	35.0	84

For thread depth up to 3xD1



Pitch mm	D1	Ordering Code	d	D	No. of Flutes	I	L
0.3	M1.4	MTSH03011C4 0.3 ISO	3	1.05	3	4.0	39
0.35	M1.6	MTSH03012C5 0.35 ISO	3	1.20	3	4.8	39
0.4	M2	MTSH03016C6 0.4 ISO	3	1.55	3	6.0	39
0.45	M2.5	MTSH0602C7 0.45 ISO	6	1.95	3	7.5	58
0.5	M3	MTSH06024C9 0.5 ISO	6	2.35	3	9.5	58
0.7	M4	MTSH06031C12 0.7 ISO	6	3.10	3	12.5	58
0.8	M5	MTSH06038C16 0.8 ISO	6	3.80	3	16.0	58
1.0	M6	MTSH06047C20 1.0 ISO	6	4.65	3	20.0	58
1.25	M8	MTSH0606C24 1.25 ISO	6	5.95	3	24.0	58

Order example: MTSH 06031C9 C 0.7 ISO MT9



## UN

### Tools for Internal Thread

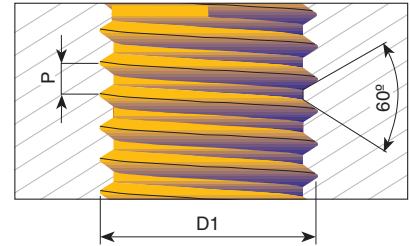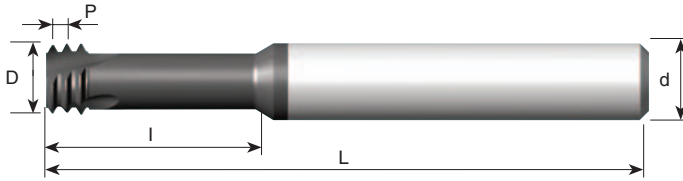

**For thread depth up to 2xD1**

**Left hand cutting  
For CNC code use M04**

Pitch TPI	UNC	UNF	Ordering Code	d	D	No. of Flutes	I	L
72		1	MTSH06014C3 72 UN	6	1.45	3	3.7	58
64	1	2	MTSH06014C3 64 UN	6	1.40	3	3.8	58
56	2	3	MTSH06016C4 56 UN	6	1.65	3	4.4	58
48	3	4	MTSH06019C5 48 UN	6	1.90	3	5.2	58
40	4		MTSH06021C6 40 UN	6	2.10	3	6.3	58
40	5	6	MTSH06024C7 40 UN	6	2.45	3	7.0	58
36		8	MTSH06033C9 36 UN	6	3.30	3	9.0	58
32	6		MTSH06025C7 32 UN	6	2.55	3	7.1	58
32	8		MTSH06032C9 32 UN	6	3.20	3	9.5	58
32		10	MTSH06037C10 32 UN	6	3.70	3	10.5	58
28		12	MTSH06042C11 28 UN	6	4.20	3	11.0	58
28		1/4	MTSH0605C14 28 UN	6	5.00	3	14.5	58
24	10,12		MTSH06035C10 24 UN	6	3.50	3	10.6	58
24		5/16, 3/8	MTSH08066C17 24 UN	8	6.60	3	17.0	64
20	1/4		MTSH06047C14 20 UN	6	4.75	3	14.0	58
20		7/16	MTSH0808C25 20 UN	8	8.00	3	25.0	64
18	5/16		MTSH0606C17 18 UN	6	6.00	3	17.0	58
18		5/8	MTSH1212D35 18 UN	12	12.00	4	35.0	84
16	3/8		MTSH08067C22 16 UN	8	6.70	3	22.0	64
14	7/16		MTSH08077C25 14 UN	8	7.70	3	25.0	64
13	1/2		MTSH10092C27 13 UN	10	9.20	3	27.5	73
12	9/16		MTSH12105C31 12 UN	12	10.50	3	31.5	84
11	5/8		MTSH12114C34 11 UN	12	11.40	3	34.5	84

**For thread depth up to 3xD1**

Pitch TPI	UNC	UNF	Ordering Code	d	D	No. of Flutes	I	L
80		0	MTSH06012C4 80 UN	6	1.15	3	4.0	58
72		1	MTSH03015C6 72 UN	3	1.45	3	6.0	39
56	2	3	MTSH06016C6 56 UN	6	1.65	3	6.6	58
40	4		MTSH06021C8 40 UN	6	2.10	3	8.0	58
40	5	6	MTSH06024C9 40 UN	6	2.45	3	9.6	58
32	6		MTSH06025C10 32 UN	6	2.55	3	10.5	58
32	8		MTSH06032C12 32 UN	6	3.20	3	12.5	58
32		10	MTSH06037C15 32 UN	6	3.70	3	15.0	58
28		1/4	MTSH0605C19 28 UN	6	5.00	3	19.0	58
24		5/16, 3/8	MTSH08066C24 24 UN	8	6.60	3	24.0	64
20	1/4		MTSH06047C19 20 UN	6	4.75	3	19.0	58
18	5/16		MTSH0606C23 18 UN	6	6.00	3	23.0	58

Order example: MTSH 06047C14 20 UN MT9

## MTH

C.P.T. provide new innovative mill thread solid carbide tools for machining:

- Hardened steels and cast iron up to 62 HRc.
- High temperature alloys.
- Titanium alloys.
- Super Alloys (Hastelloy, Inconel, Nickel Base Alloys).

Carbide grade: MT9

Ultra fine sub-micron grade with Advanced PVD Triple Coating

### Principle



The tools provide the possibility to machine materials with a higher tensile strength and hardness using relatively high cutting data.

### Advantages

- Same tool performs thread milling and chamfering - saves machining time.
- Increased cutting diameter - better rigidity and stability.
- Coating provides high wear and heat resistance.
- Ultra fine grade - dedicated for hardened materials.
- Short chips are produced, insure high process security.
- Short cycle time - increases productivity.
- Thread length up to 2xD.

## ISO

### Tools for Internal Thread

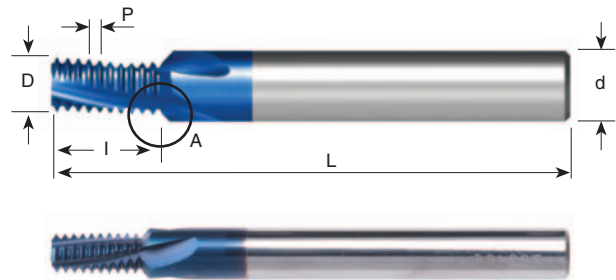



Pitch mm	M coarse	M fine	Ordering Code	d	D	Df	No. of Flutes	I	lf	L
0.5	M3	$\varnothing \geq 4$	<b>MTH06024C5 0.5 ISO</b>	6	2.4	3.6	3	5.3	5.9	58
0.7	M4	$\varnothing \geq 5$	<b>MTH06031C7 0.7 ISO</b>	6	3.1	4.3	3	7.4	8.0	58
0.8	M5	$\varnothing \geq 6$	<b>MTH0604C9 0.8 ISO</b>	6	4.0	5.2	3	9.2	9.8	58
1.0	M6	$\varnothing \geq 7$	<b>MTH08048D10 1.0 ISO</b>	8	4.8	6.4	4	10.5	11.3	64
1.0		$\varnothing \geq 9$	<b>MTH0806D13 1.0 ISO</b>	8	6.0	7.6	4	13.5	14.3	64
1.0		$\varnothing \geq 10$	<b>MTH1008D16 1.0 ISO</b>	10	8.0	9.6	4	16.5	17.3	73
1.25	M8	$\varnothing \geq 10$	<b>MTH0806D14 1.25 ISO</b>	8	6.0	7.6	4	14.4	15.2	64
1.5	M10	$\varnothing \geq 12$	<b>MTH1008D17 1.5 ISO</b>	10	8.0	9.8	4	17.3	18.2	73
1.5		$\varnothing \geq 14$	<b>MTH1210D21 1.5 ISO</b>	12	10.0	11.8	4	21.8	22.7	84
1.75	M12	$\varnothing \geq 12$	<b>MTH12095D20 1.75 ISO</b>	12	9.5	11.5	4	20.1	21.1	84

Order example: MTH 08048D10 1.0 ISO MT9

# UN

## Tools for Internal Thread

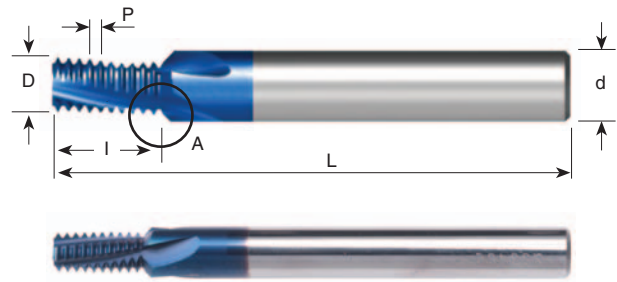

Pitch TPI	UNC	UNF	UNEF	Ordering Code	d	D	Df	No. of Flutes	I	lf	L
40	5	6		<b>MTH06025C6 40 UN</b>	6	2.5	3.7	3	6.0	6.6	58
32	6			<b>MTH06026C5 32 UN</b>	6	2.6	3.8	3	5.9	6.5	58
32	8			<b>MTH06032C7 32 UN</b>	6	3.2	4.4	3	7.5	8.1	58
32		10	12	<b>MTH06038C9 32 UN</b>	6	3.8	5.0	3	9.1	9.7	58
28		1/4		<b>MTH08052D11 28 UN</b>	8	5.2	6.8	4	11.3	12.1	64
28			7/16, 1/2	<b>MTH12096D20 28 UN</b>	12	9.6	11.2	4	20.4	21.2	84
24		5/16, 3/8	9/16, 5/8, 11/16	<b>MTH08066D14 24 UN</b>	8	6.6	8.0	4	14.3	15.0	64
20	1/4			<b>MTH06048C12 20 UN</b>	6	4.8	6.0	3	12.1	12.7	58
20		7/16, 1/2	3/4, 1	<b>MTH12092D21 20 UN</b>	12	9.2	10.8	4	21.0	21.8	84
18	5/16	9/16, 5/8	11/16	<b>MTH08057C14 18 UN</b>	8	5.7	7.5	3	14.8	15.7	64
16	3/8	3/4		<b>MTH10074C16 16 UN</b>	10	7.4	9.2	3	16.7	17.6	73
14	7/16	7/8		<b>MTH10085D20 14 UN</b>	10	8.5	9.9	4	20.9	21.6	73
13	1/2			<b>MTH12094D22 13 UN</b>	12	9.4	11.4	4	22.5	23.5	84

Order example: MTH 06048C12 20 UN MT9

# Mill-Thread Technical Section



## Contents:

Page:

Conversion of Cutting Speed to Rotational Speed	118
Tool Selection	119
C.P.T. Mill-Thread Catalogue and CNC Programming Software	120
Example of Thread Milling CNC Program for Internal Threading	120
Mill Thread Inserts Carbide Grades, Speed and Feed Selection	121
Spiral Mill-Thread Inserts, Speed and Feed Selection	122

## Contents:


Page:

Spiral Finish, Speed and Feed Selection	122
<b>Mill-Thread Solid Carbide Grades, Speed and Feed Selection</b>	123
MT, MTB, MTZ, EMT types	123
MTQ type	124
Mini Mill Thread (MTS) and MTI types	125
Mini Mill Thread (MTSH) type	126
MTH type	127

## Conversion of Cutting Speed to Rotational Speed

Conversion of selected cutting speed to rotational speed is calculated by the following formula:


$$N = \frac{V \times 1000}{\pi \times D} = \frac{120 \times 1000}{3.14 \times 30} = 1274 \text{ RPM}$$




**Example:**  $V=120 \text{ m/min}$   
 $D=30 \text{ mm}$

D=Cutting diameter

### Internal Thread

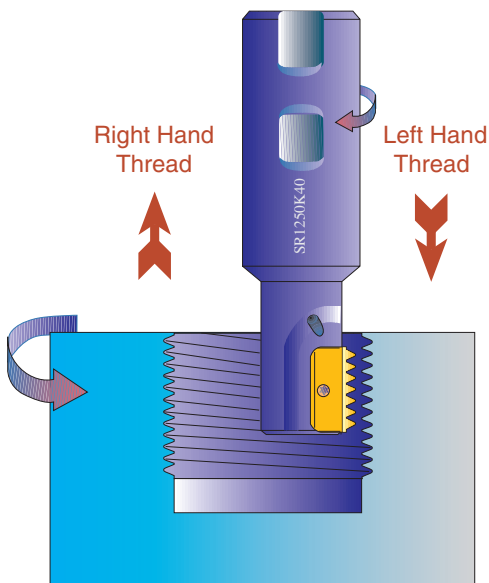

### External Thread

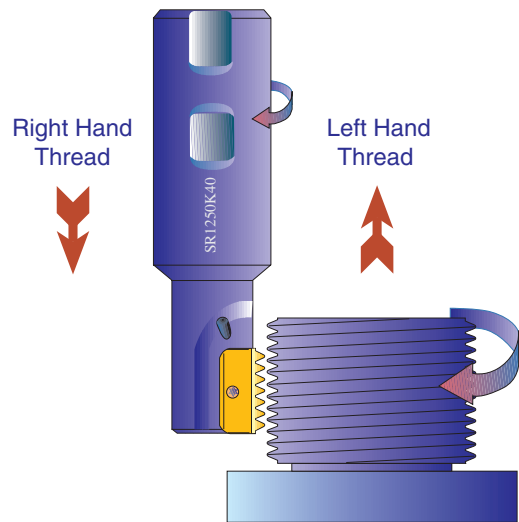


## Tool Selection

For indexable and solid carbide Mill Threads

The following chart provides a fairly accurate visual selection tool for Internal Threading.

The chart is suitable for the following thread forms: ISO, UN, WHIT, NPT, NPTF, BSPT and PG.

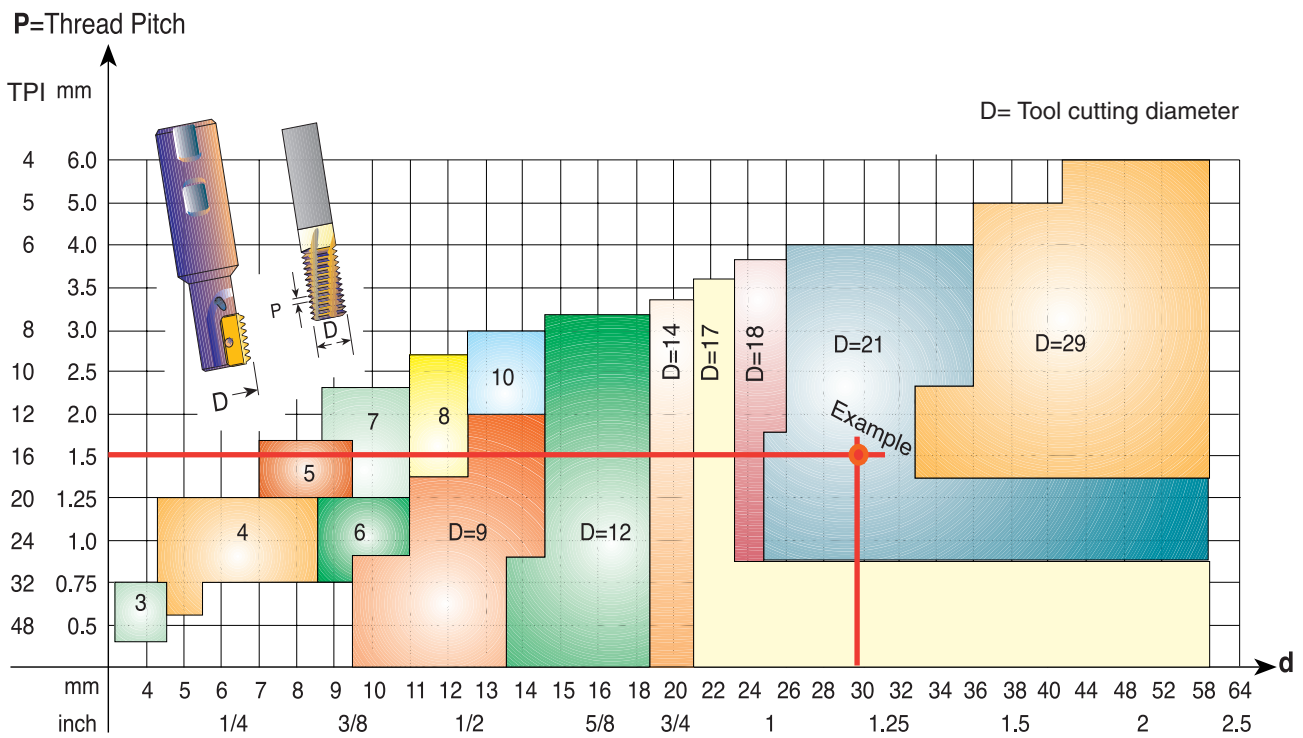

Any tool with a small cutting diameter can produce large diameter threads.


**Example:** Internal thread M30 x 1.5:

Find a Milling Tool to produce d=30 mm Internal right hand ISO thread with a thread pitch P=1.5 mm.

As can be seen from the chart above, the two red lines intersect at a selected tool with a cutting diameter of D=21 mm.

Chosen toolholder: SR0021H21

Insert: 21 I 1.5 ISO MT7

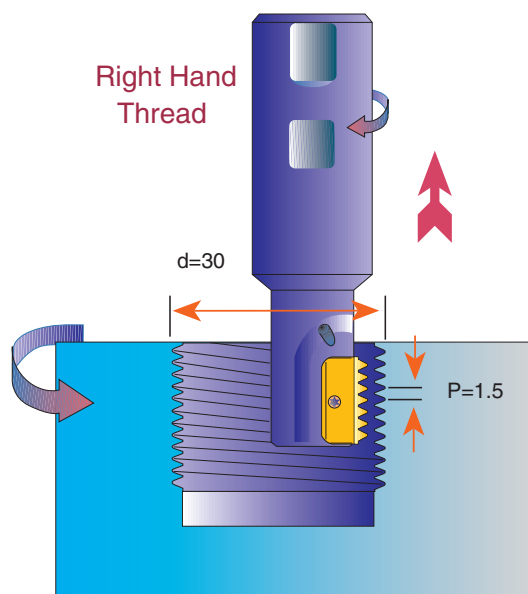

If you need assistance, please call your local distributor and ask for help in selecting the appropriate tool as well as for a CNC program to suit your CNC milling machine.



## C.P.T. Mill-Thread catalogue and CNC programming Software

This software is provided by C.P.T. to assist you, the thread milling user, to select and apply the correct tool to machine threads on CNC machining centers. The program will find tools and inserts which are suitable for your application, calculate cutting data and generate a CNC program for a variety of controls.

The software is available at our web site - [www.cpt-werkzeuge.de](http://www.cpt-werkzeuge.de)



## Example of Thread Milling CNC Program for Internal Threading

Right hand thread (climb milling) from bottom up.

Program is based on tool center.  
This method of programming needs no tool radius compensation value other than an offset for wear.

$A = \frac{D_o - D}{2}$	A = Radius of tool path D <sub>o</sub> = Major thread dia. D = Cutting dia.
-------------------------	---


### General Program

```
G90 G00 G54 G43 H1X0 Y0 Z10 S---
G00 Z- ( TO THREAD DEPTH )
G01 G91 G41 D1 X(A/2) Y-(A/2) Z0 F---
G03 X(A/2) Y(A/2) R(A/2) Z(1/8 PITCH)
G03 X0 Y0 I-(A) J0 Z(PITCH)
G03 X-(A/2) Y(A/2) R(A/2) Z(1/8 PITCH)
G01 G40 X-(A/2) Y-(A/2) Z0
G90 X0 Y0 Z0
```

### Internal Thread

EXAMPLE : M 32 X 2.0 (Thread depth 18 mm )  
 TOOLHOLDER : SR0021 H21 (Cutting dia. 21 mm )  
 INSERT: 21 I 2.0 ISO  
 $A = ( 32 - 21 ) / 2 = 5.5$

```
G90 G00 G54 G43 H1X0 Y0 Z10 S2800
G00 Z-18
G01 G91 G41X 2.75 Y-2.75 Z0 F85 D1
G03 X2.75 Y2.75 R2.75 Z0.25
G03 X0 Y0 I-5.5 J0 Z2
G03 X-2.75 Y2.75 R2.75 Z0.25
G01 G40 X-2.75 Y-2.75 Z0
G90 G0 X0 Y0 Z0
```

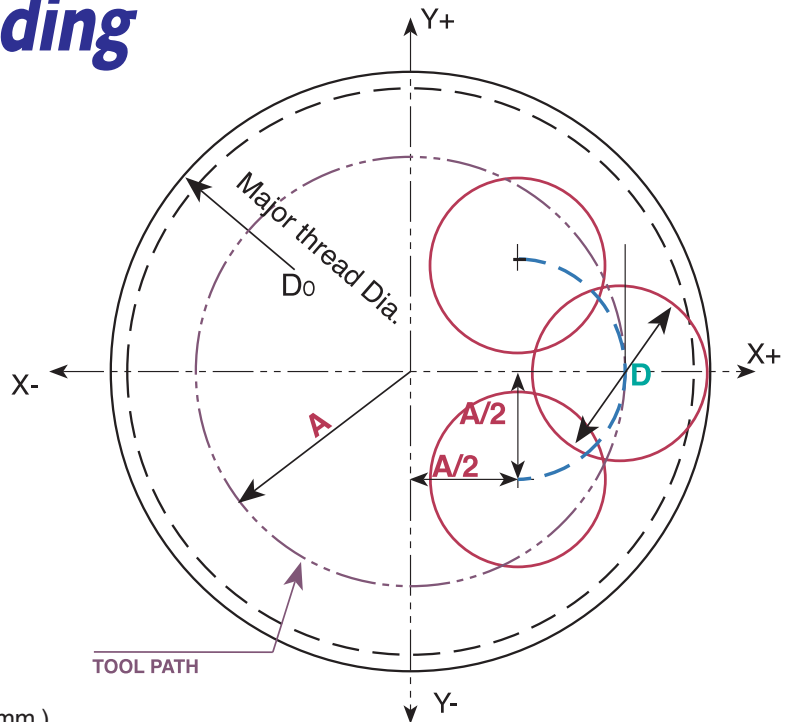

## Mill Thread Inserts Speed and Feed Selection

**MT7** Sub-Micron Grade with Titanium Aluminum Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, which can be used with all materials; it should be run at medium to high cutting speeds.

ISO	Materials	Cutting Speed m/min MT7
<b>P</b>	Low and Medium Carbon Steels	115-280
	High Carbon Steels	130-200
	Alloy Steels, Treated Steels	105-180
<b>M</b>	Stainless Steels	130-190
	Cast Steels	150-190
<b>K</b>	Cast Iron	80-170
<b>N</b>	Non- Ferrous and Aluminum	180-340
	Synthetics, Duroplastics, Thermoplastics	115-460
<b>S</b>	Nickel Alloys, Titanium Alloys	25- 90

**Recommended FEED RATE : 0.05 - 0.15 mm**

## Spiral Mill Thread Inserts Speed and Feed Selection

**MT7** Sub-Micron Grade with Titanium Aluminum Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, which can be used with all materials; it should be run at medium to high cutting speeds.

ISO	Materials	Cutting Speed m/min MT7
<b>P</b>	Low and Medium Carbon Steels	145-360
	High Carbon Steels	165-255
	Alloy Steels, Treated Steels	135-230
<b>M</b>	Stainless Steels	165-245
	Cast Steels	190-245
<b>K</b>	Cast Iron	100-220
<b>N</b>	Non- Ferrous and Aluminum	230-440
	Synthetics, Duroplastics, Thermoplastics	145-590
<b>S</b>	Nickel Alloys, Titanium Alloys	30-115

**Recommended FEED RATE : 0.05 - 0.15 mm**

As you may note, cutting speed is shown in range terms. In most standard cases choosing a speed in the middle of the range would be a good choice for a start.

For hard metals reduce cutting speed.

## Spiral Finish Speed and Feed Selection

ISO	Materials	V <sub>c</sub> (mm)	h <sub>m</sub> (mm)
<b>P</b>	Low and Medium Carbon Steels	200-330	0.05-0.15
	High Carbon Steels	170-235	0.05-0.13
	Alloy Steels, Treated Steels	100-195	0.05-0.13
<b>M</b>	Stainless Steels	180-230	0.04-0.13
	Cast Steels	180-230	0.05-0.12
<b>K</b>	Cast Iron	200-350	0.05-0.11
<b>N</b>	Non-Ferrous and Aluminum	500-1100	0.05-0.15
	Synthetics, Duroplastics, Thermoplastics	400-1500	0.05-0.15
<b>S</b>	Nickel Alloys, Titanium Alloys	30-55	0.04-0.07


D = cutting diameter	ø23	ø32	ø45	ø63
a <sub>p</sub> max	27	32	37	38

$$f_z = h_m \times \sqrt{\frac{D}{a_e}}$$

h<sub>m</sub> = average chip load

f<sub>z</sub> = tooth load

D	ø23		ø32		ø45		ø63	
h <sub>m</sub>	0.05	0.15	0.05	0.15	0.05	0.15	0.05	0.15
a <sub>e</sub>	f <sub>z</sub>							
2	0.17	0.51	0.20	0.60	0.24	0.71	0.28	0.84
6	0.10	0.29	0.12	0.35	0.14	0.41	0.16	0.49
12	0.07	0.21	0.08	0.24	0.10	0.29	0.11	0.34
18	0.06	0.17	0.07	0.20	0.08	0.24	0.09	0.28
24	0.05	0.15	0.06	0.17	0.07	0.21	0.08	0.24
30	0.04	0.13	0.05	0.15	0.06	0.18	0.07	0.22
36	0.04	0.12	0.05	0.14	0.06	0.17	0.07	0.20

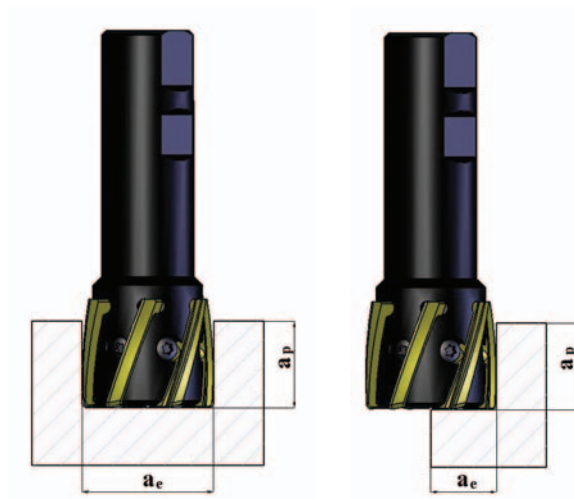

## Mill-Thread Solid Carbide Grades, Speed and Feed Selection

### MT, MTB, MTZ, EMT types

**MT7** Sub-Micron Grade with Titanium Aluminum Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, which can be used with all materials; it should be run at medium to high cutting speeds.

ISO Standard	Material	Cutting Speed m/min	Feed mm/tooth										
			Ø2	Ø3	Ø4	Ø6	Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25
<b>P</b>	Low and Medium Carbon Steels <0.55%C	100-250	0.03	0.04	0.04	0.06	0.07	0.08	0.09	0.11	0.12	0.15	0.18
	High Carbon Steels ≥0.55%C	110-180	0.02	0.03	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.12	0.15
	Alloy Steels, Treated Steels	90-160	0.02	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.07	0.08	0.10
<b>M</b>	Stainless Steels - Free Cutting	60-160	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.11
	Stainless Steels - Austenitic	60-120	0.02	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.07	0.08	0.10
	Cast Steels	130-170	0.02	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.07	0.08	0.10
<b>K</b>	Cast Iron	70-150	0.03	0.04	0.04	0.06	0.07	0.08	0.09	0.11	0.12	0.15	0.18
<b>N</b>	Aluminium ≤10%Si, Copper	150-350	0.03	0.04	0.04	0.06	0.07	0.08	0.09	0.11	0.12	0.15	0.18
	Aluminium ≥10% Si	100-250	0.02	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.07	0.08	0.10
	Synthetics, Duroplastics, Thermoplastics	100-400	0.05	0.06	0.07	0.08	0.10	0.11	0.12	0.14	0.15	0.18	0.22
<b>S</b>	Nickel Alloys, Titanium Alloys	20- 80	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.05


For cutters with long cutting length reduce feed rate by 40%

## MTQ type

**MT7** Sub-Micron Grade with Titanium Aluminum Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, which can be used with all materials; it should be run at medium to high cutting speeds.

ISO Standard	Material	Cutting Speed m/min	Feed mm/tooth					
			Ø10	Ø12	Ø14	Ø16	Ø20	Ø25
<b>P</b>	Low and Medium Carbon Steels <math><0.55\%C</math>	100-250	0.06	0.07	0.07	0.08	0.10	0.12
	High Carbon Steels $\geq 0.55\%C$	110-180	0.05	0.05	0.06	0.07	0.09	0.10
	Alloy Steels, Treated Steels	90-160	0.03	0.04	0.04	0.05	0.06	0.07
<b>M</b>	Stainless Steels - Free Cutting	60-160	0.04	0.04	0.05	0.06	0.06	0.08
	Stainless Steels - Austenitic	60- 120	0.04	0.04	0.04	0.05	0.06	0.07
	Cast Steels	130-170	0.03	0.04	0.04	0.05	0.06	0.07
<b>K</b>	Cast Iron	70-150	0.06	0.07	0.07	0.08	0.10	0.12
<b>N</b>	Aluminium $\leq 10\%Si$ , Copper	150-350	0.06	0.07	0.07	0.08	0.10	0.12
	Aluminium $\geq 10\% Si$	100-250	0.03	0.04	0.04	0.05	0.06	0.07
	Synthetics, Duroplastics, Thermoplastics	100-400	0.08	0.09	0.10	0.11	0.13	0.15
<b>S</b>	Nickel Alloys, Titanium Alloys	20- 80	0.02	0.02	0.02	0.03	0.03	0.03

For cutters with long cutting length reduce feed rate by 40%

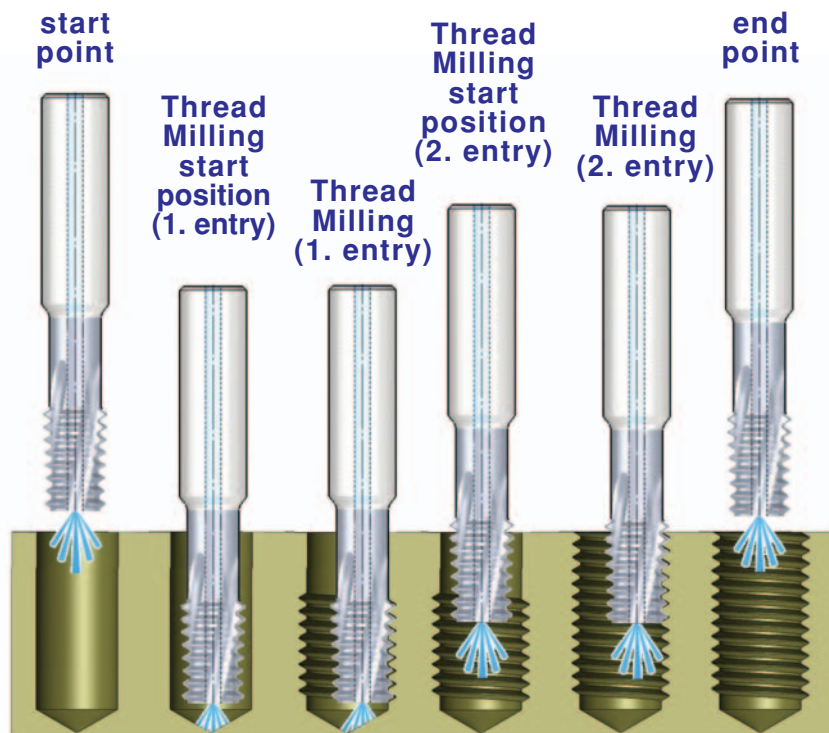


## Mini Mill Thread MTS and MTI types

**MT7** Sub-Micron Grade with Titanium Aluminum Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, which can be used with all materials; it should be run at medium to high cutting speeds.

**MT8** Sub-Micron Grade with Aluminium Titanium Nitride (AlTiN) multi-layer coating (ISO K10-K20). Extremely high heat resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials.

ISO Standard	Material	Cutting Speed m/min	Feed mm/tooth													
			Cutting Diameter = D													
			ø1	ø1.5	ø2	ø3	ø4	ø5	ø6	ø7	ø8	ø9	ø10	ø12	ø14	ø16
<b>P</b>	Low & Medium Carbon Steels < 0.55%C	60-120	0.04	0.05	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18
	High Carbon Steels ≥ 0.55%C	60-90	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.12	0.13	0.14	0.14	0.16	0.17	0.18
	Alloy Steels, Treated Steels	50-80	0.03	0.04	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.14
<b>M</b>	Stainless Steels - Free Cutting	70-100	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13
	Stainless Steel-Austenitic	60-90	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13
	Cast Steels	70-90	0.03	0.04	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.14
<b>K</b>	Cast Iron	40-80	0.04	0.05	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18
<b>N</b>	Aluminium ≤10%Si, Copper	100-200	0.04	0.05	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18
	Aluminium >10%Si	60-140	0.03	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.14
	Synthetics, Duroplastics, Thermoplastics	50-200	0.09	0.10	0.11	0.12	0.14	0.16	0.18	0.19	0.19	0.19	0.19	0.19	0.20	0.20
<b>S</b>	Nickel Alloys and Titanium Alloys	20-40	0.03	0.03	0.03	0.04	0.04	0.05	0.06	0.06	0.06	0.07	0.07	0.07	0.08	0.08

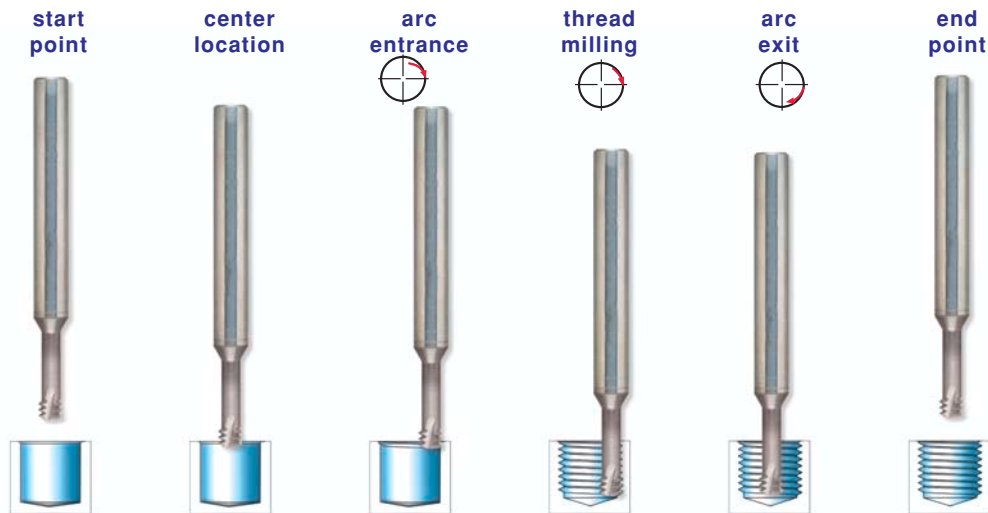

## Mini Mill-Thread vs. Taps


Features	Mini Mill-Thread	Taps
Thread surface quality	High	Medium
Thread geometry	Very accurate	Medium
Thread tolerances	4H, 5H, 6H with std cutter	6H with standard tap, 4H with specific tap
Machining time	Same as tap or shorter	Short
Tool breakage	Almost not possible	Could happen often
Machining load	Very low	High
Range of thread diameters	Wide range of diameters	Specific tap for each diameter
Right/Left hand threading	Same cutter	Specific tap for each
Geometric shape	Full profile	Partial profile



## Mini Mill Thread MTSH type

**MT9** Sub-Micron Grade with advanced PVD triple coating.

ISO	Material	Hardness HRc	Cutting Speed m/min	Feed mm/tooth													
				Cutting Diameter = D													
				ø1	ø1.5	ø2	ø3	ø4	ø5	ø6	ø7	ø8	ø9	ø10	ø12	ø14	ø16
<b>S</b>	Nickel Alloys, Titanium Alloys and High Temp. Alloys		20-40	0.03	0.03	0.03	0.04	0.04	0.05	0.06	0.06	0.06	0.07	0.07	0.07	0.08	0.08
<b>H</b>	Hardened Steels	45-50	60-70	0.03	0.04	0.04	0.05	0.05	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.11
		51-55	50-60	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.10
		56-62	40-50	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.06	0.07	0.08	0.09

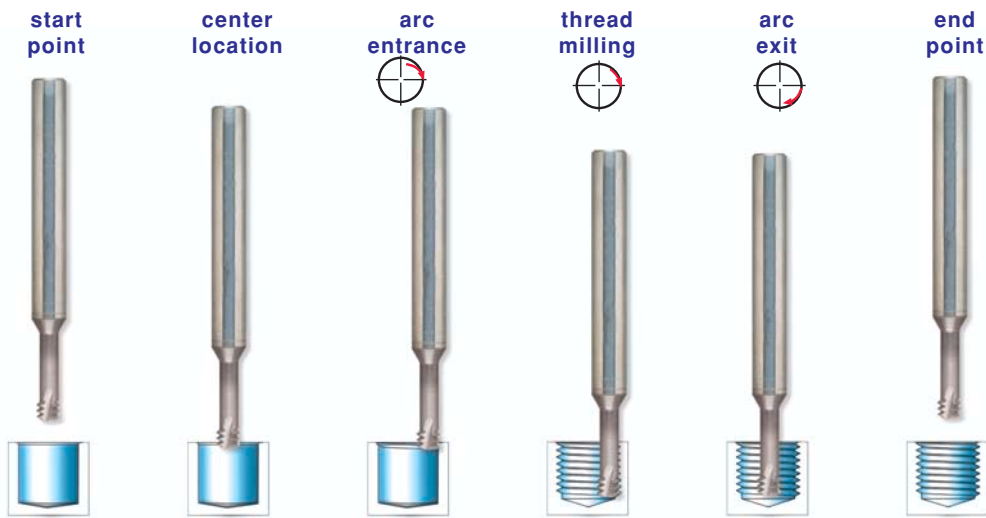

## CASE STUDY


Application	Internal Thread M4 X 0.7
Thread Depth	8.0 mm
Workpiece Material	Tool Steel: D2
Hardness	60-62 (HRc)
Cutter Description	MTSH0250C35 0.7 ISO
Machining Conditions	Cutting Speed: 44 m / min Feed: 0.03 mm / tooth
Machine	Mori Seiki VN5000
Control	Fanuc
Cooling Lubricant	Emulsion
Tool Life (No. of Threads)	84

## MTH type

**MT9** Sub-Micron Grade with advanced PVD triple coating.


ISO Standard	Material	Hardness HRc	Cutting Speed m/min	Feed mm/tooth Cutting Diameter = D								
				Ø2.5	Ø3	Ø4	Ø5	Ø6	Ø7	Ø8	Ø9	Ø10
<b>S</b>	Nickel Alloys, Titanium Alloys, High Temperature Alloys		20 - 50	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04
<b>H</b>	Hardened Steels, Cast Iron	45 - 50	70 - 80	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.07
		51 - 55	60 - 70	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.06
		56 - 62	40 - 50	0.005	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.05

For cutters with long cutting length reduce feed rate by 40%

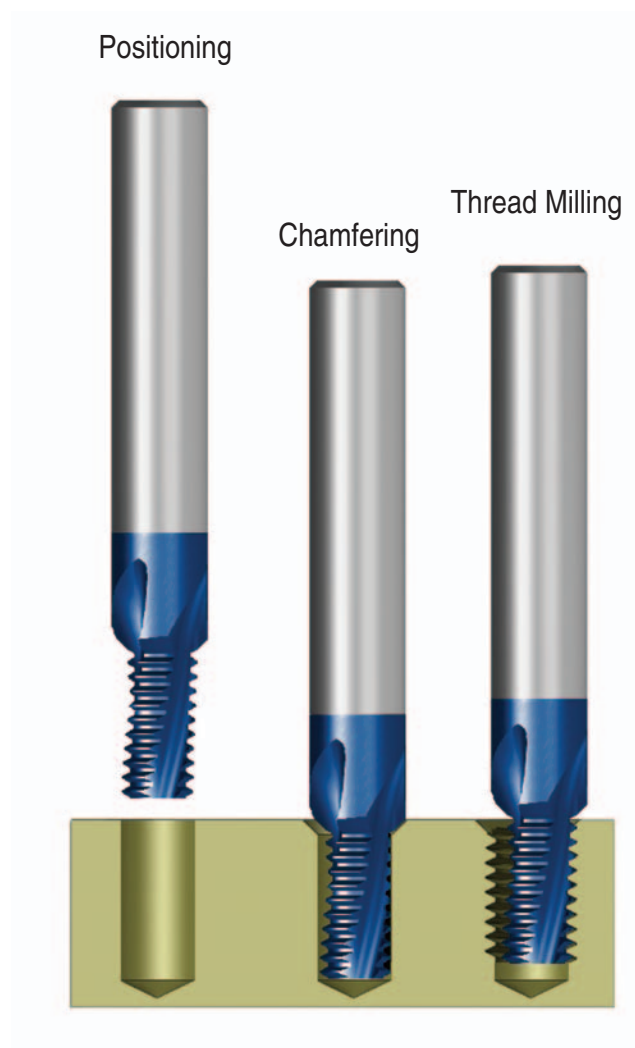



# Solid Carbide Milling Tools

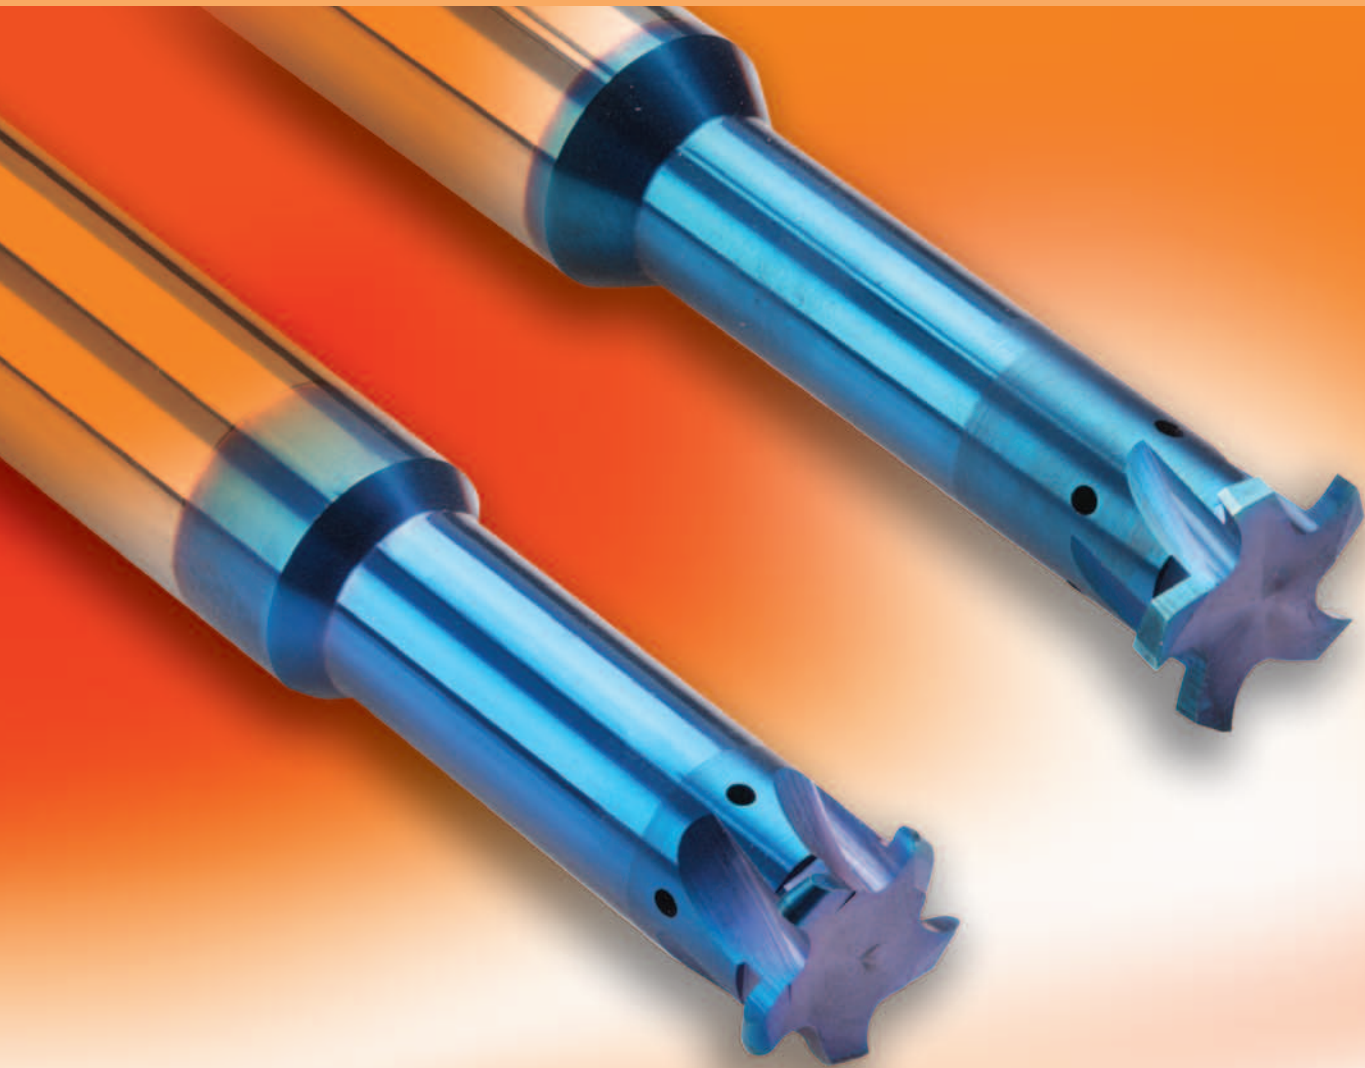

## For Grooving Deep Parts

### Advantages

**Carbide grade: MT8** Sub-micron grade with advanced PVD triple coating (ISO K10-K20). Extremely high heat resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials.

- Enables machining in deep holes.
- Longer tool life due to special multi-layer coating
- Coolant through the flutes is very effective for deep holes.
- Shorter machining time due to multi, 3 to 5, flutes..
- Spiral flutes allow smooth cutting action.


#### Contents:

#### Page:

Product Identification	130
Groove Milling	131
Full Radius Groove Milling	131


## Product Identification

### Groove Milling Ordering Codes

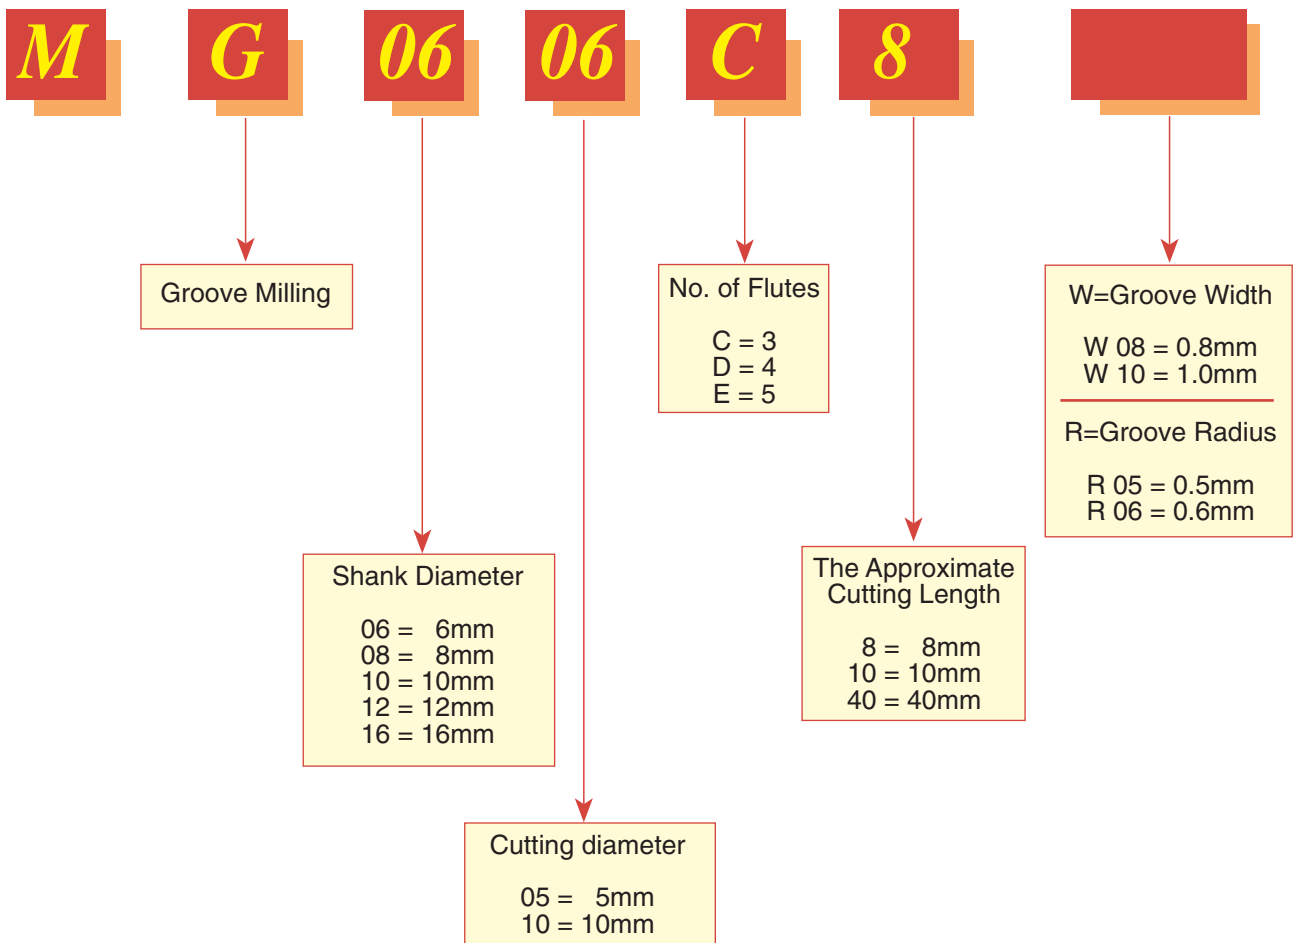

## Groove Milling

With internal coolant through the flutes

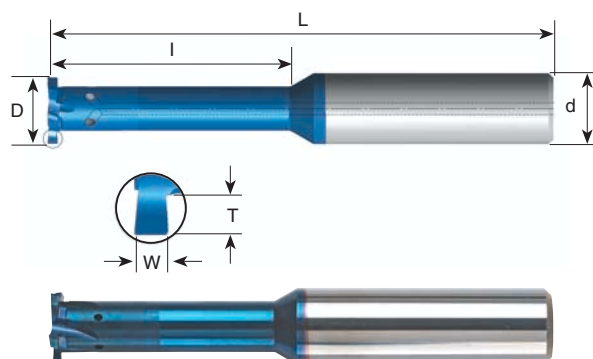


*For grooving deep parts*

W ± 0.02	T Max.	Groove Dia. (min)	Ordering Code	d	D	No. of Flutes	l	L
0.80	0.8	$\phi > 6$	<b>MG0606C8 W08</b>	6	6.0	3	8	58
1.00	1.2	$\phi \geq 8$	<b>MG08078D10 W10</b>	8	7.8	4	10	64
1.20	1.4	$\phi \geq 10$	<b>MG10098D20 W12</b>	10	9.8	4	20	73
1.40	1.8	$\phi > 16$	<b>MG1616E30 W14</b>	16	16.0	5	30	101
1.70	2.0	$\phi > 16$	<b>MG1616E40 W17</b>	16	16.0	5	40	101
1.95	2.2	$\phi > 16$	<b>MG1616E45 W19</b>	16	16.0	5	45	101

Order example: MG 10098D20 W12 MT8

## Full Radius Groove Milling

With internal coolant through the flutes

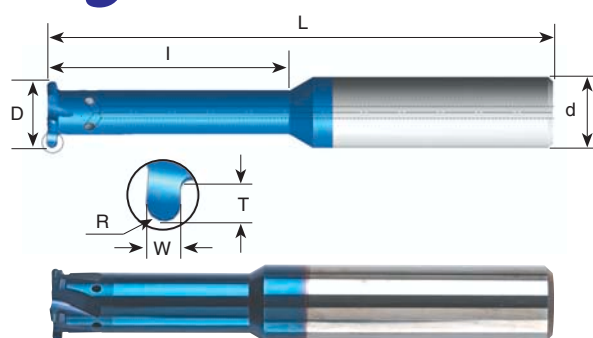

*For grooving deep parts*

R	W ± 0.02	T Max.	Groove Dia. (min)	Ordering Code	d	D	No. of Flutes	l	L
0.5	1.00	0.8	$\phi > 6$	<b>MG0606C8 R05</b>	6	6.0	3	8	58
0.5	1.00	1.0	$\phi > 8.8$	<b>MG10088D16 R05</b>	10	8.8	4	16	73
0.6	1.20	1.0	$\phi > 10$	<b>MG1010D20 R06</b>	10	10.0	4	20	73
0.9	1.80	1.4	$\phi > 12$	<b>MG1212D30 R09</b>	12	12.0	4	30	84
1.0	2.00	1.6	$\phi > 16$	<b>MG1616E40 R10</b>	16	16.0	5	40	101
1.5	3.00	2.2	$\phi > 16$	<b>MG1616E40 R15</b>	16	16.0	5	40	101

Order example: MG 1010D20 R06 MT8





# Mini-Chamfer



## Advantages

**Carbide grade: MT8** Sub-micron grade with advanced PVD triple coating (ISO K10-K20). Extremely high heat resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials.

- Optimal for deburring, back chamfering and grooving
- Double side cutting
- Spiral flute allows smooth cutting action


### Contents:

### Page:


Product Identification	134
Mini Chamfer	135
Mini Chamfer Kits	136
<b>Special Solid Carbide Tools</b>	136

## Product Identification

### Mini Chamfer Ordering Codes:

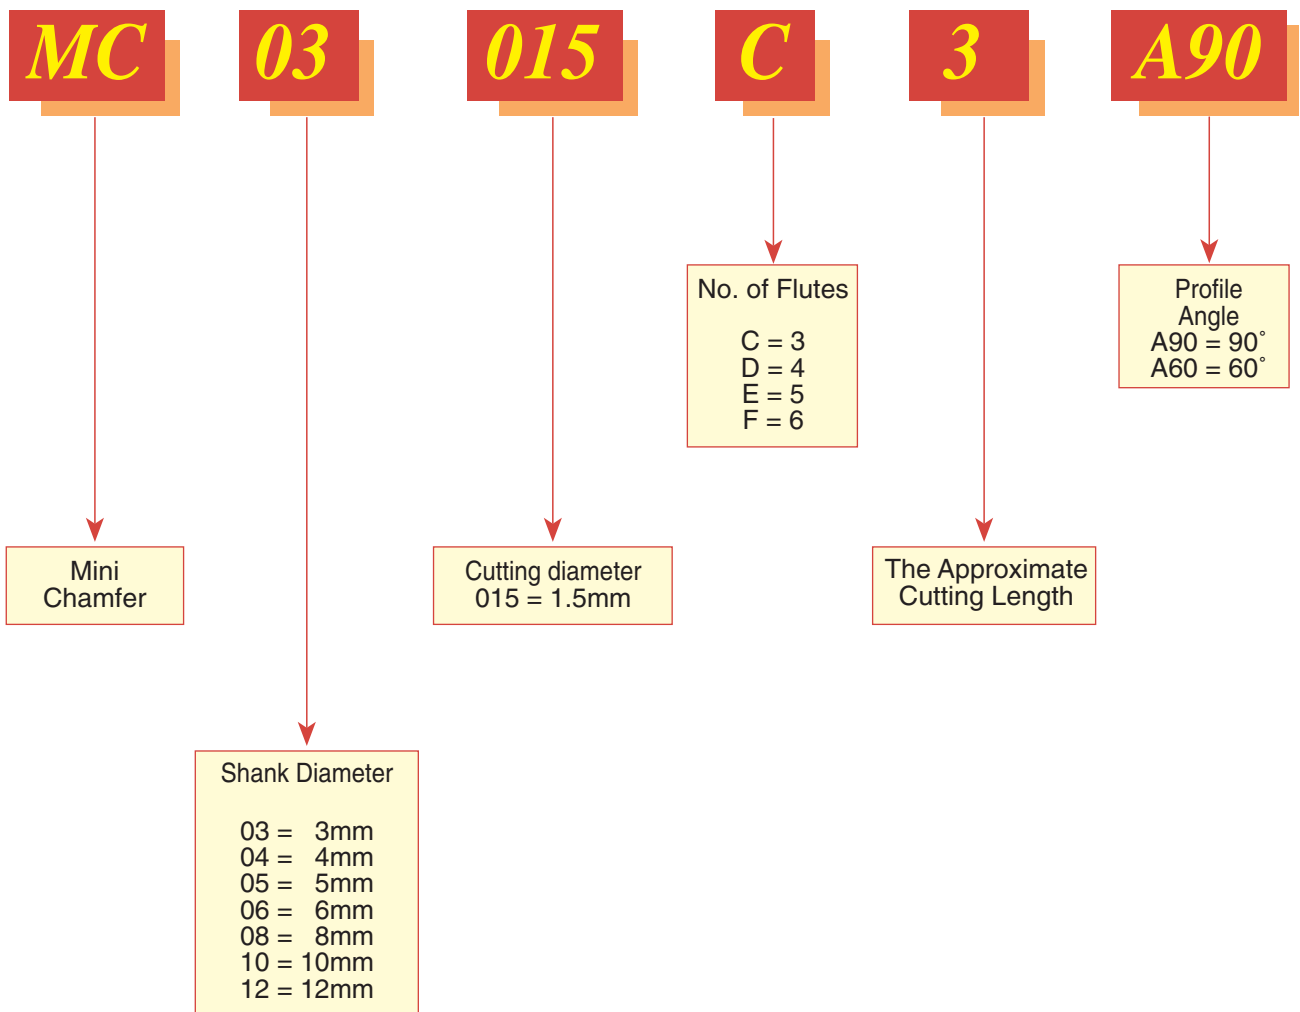

## Mini Chamfer

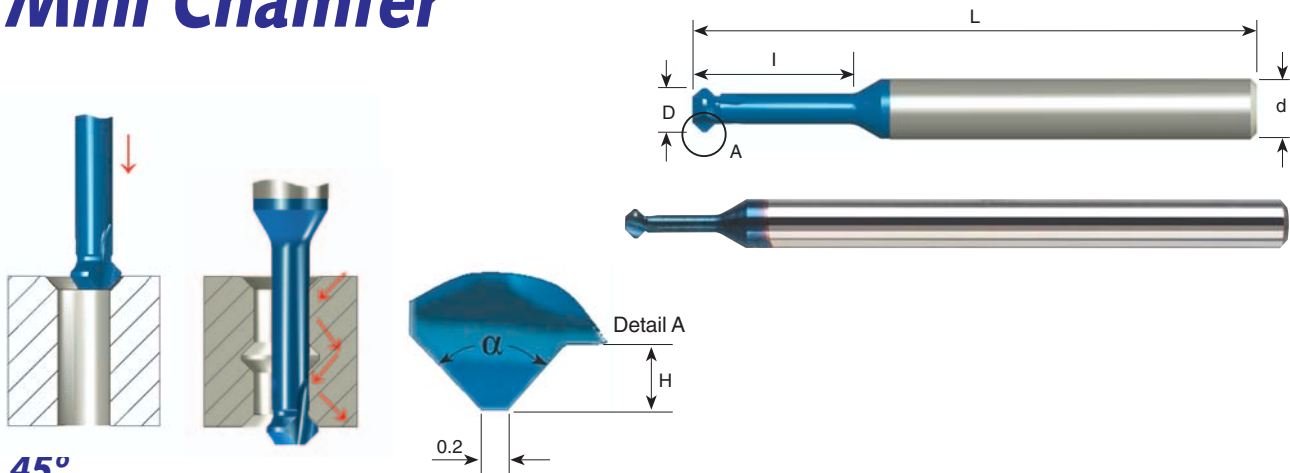

**45°**

Ordering Code	d	D	l	H	$\alpha$	No. of Flutes	L
MC03015C3 A90	3	1.5	3.8	0.3	90°	3	39
MC0302C5 A90	3	2.0	5.0	0.4	90°	3	39
MC03025C6 A90	3	2.5	6.3	0.5	90°	3	39
MC0303C7 A90	3	3.0	7.5	0.6	90°	3	39
MC04035C9 A90	4	3.5	8.8	0.7	90°	3	51
MC0404C10 A90	4	4.0	10.0	0.8	90°	3	51
MC05045C11 A90	5	4.5	11.3	1.0	90°	3	51
MC0505C12 A90	5	5.0	12.5	1.1	90°	3	51
MC06055C13 A90	6	5.5	13.8	1.2	90°	3	51
MC0606C15 A90	6	6.0	15.0	1.5	90°	3	51

## Long Reach 45°

Ordering Code	d	D	l	H	$\alpha$	No. of Flutes	L
MC0303C12 A90	3	3.0	12.0	0.6	90°	3	39
MC04035C14 A90	4	3.5	14.0	0.7	90°	3	51
MC0404C16 A90	4	4.0	16.0	0.8	90°	3	51
MC05045C18 A90	5	4.5	18.0	1.0	90°	3	51
MC0505C20 A90	5	5.0	20.0	1.1	90°	3	51
MC06055C22 A90	6	5.5	22.0	1.2	90°	3	58
MC0606C24 A90	6	6.0	24.0	1.5	90°	3	58
MC0808D28 A90	8	8.0	28.0	1.6	90°	4	64
MC1010E35 A90	10	10.0	35.0	1.8	90°	5	73
MC1212F42 A90	12	12.0	42.0	2.1	90°	6	84

**30°**

Ordering Code	d	D	l	H	$\alpha$	No. of Flutes	L
MC0302C5 A60	3	2.0	5.0	0.4	60°	3	39
MC0303C7 A60	3	3.0	7.5	0.6	60°	3	39
MC04035C9 A60	4	3.5	8.8	0.7	60°	3	51
MC0404C10 A60	4	4.0	10.0	0.8	60°	3	51
MC05045C11 A60	5	4.5	11.3	1.0	60°	3	51
MC0505C12 A60	5	5.0	12.5	1.1	60°	3	51

## Mini Chamfer Kit

Kit KMC	Qty
MC 0303 C12 A90	1
MC 03025 C6 A90	1
MC 0404 C10 A90	1
MC 04035 C9 A90	1
MC 05045 C11 A90	1
MC 0606 C24 A90	1



## Special Solid Carbide Tools




As part of being a service-oriented company, C.P.T. produces specials according to customer's requirements.

Special tools are supplied in short delivery times.



# Turning Tools

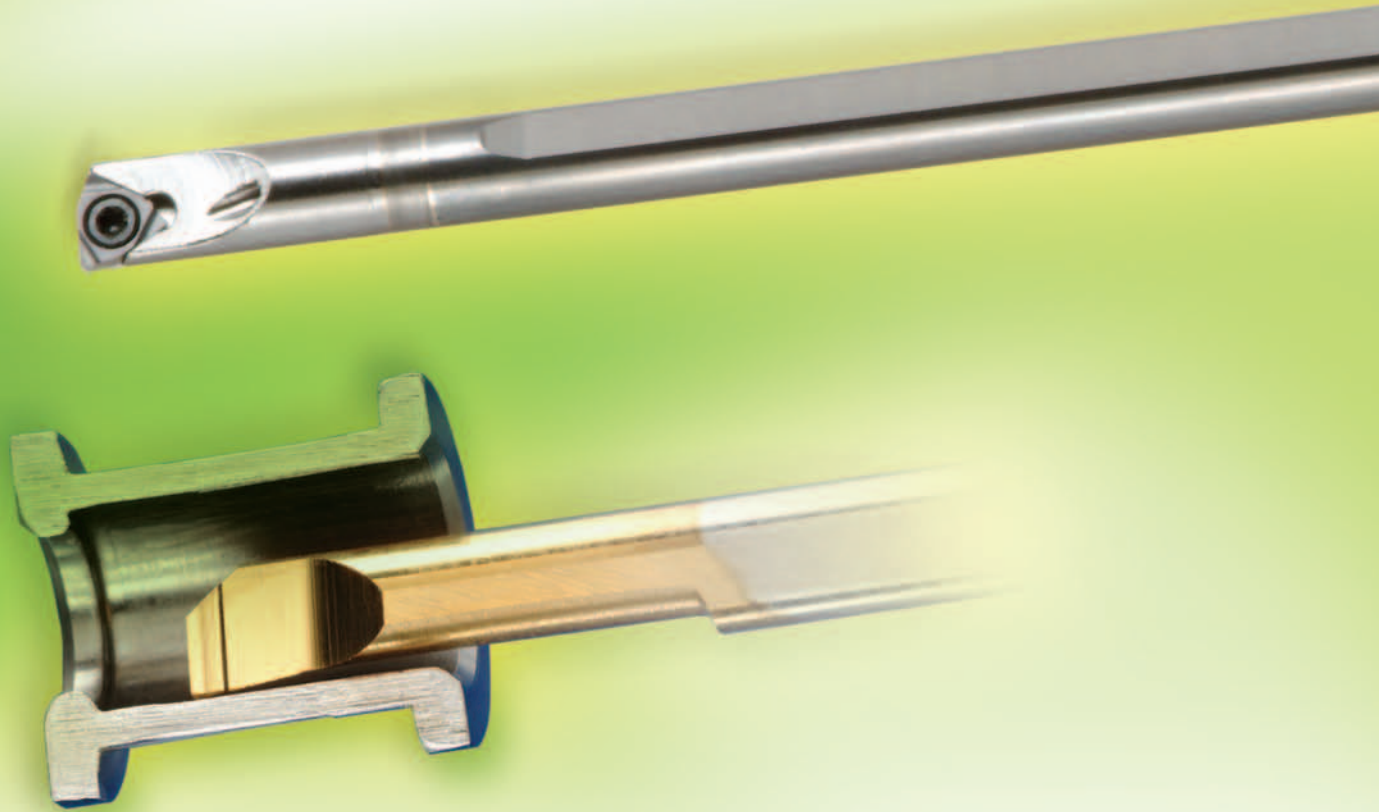

## Contents:


## Page:

Carbide Shank Boring Bars and Inserts

138




## Carbide Shank Boring Bars and Inserts

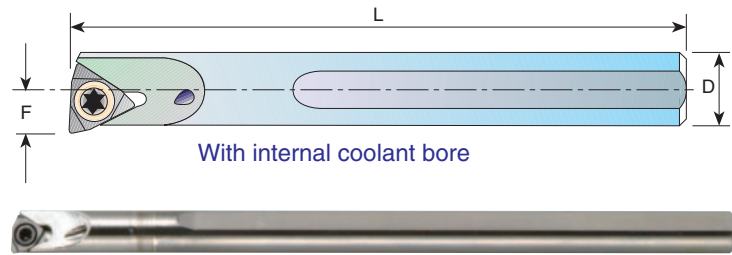


D	Ordering Code	L	F	Min. Bore Dia.	Screw	Key
6	<b>SIR 0006 H06CT</b>	100	3.3	6.5	S6	K6
8	<b>SIR 0008 K06CT</b>	125	4.3	8.6	S6	K6
10	<b>SIR 0010 M06CT</b>	150	5.3	10.6	S6	K6

Insert ordering code: 06 IR TURN BMA  
Nose radius R= 0.2 mm

For turning small bores see pages 141-145

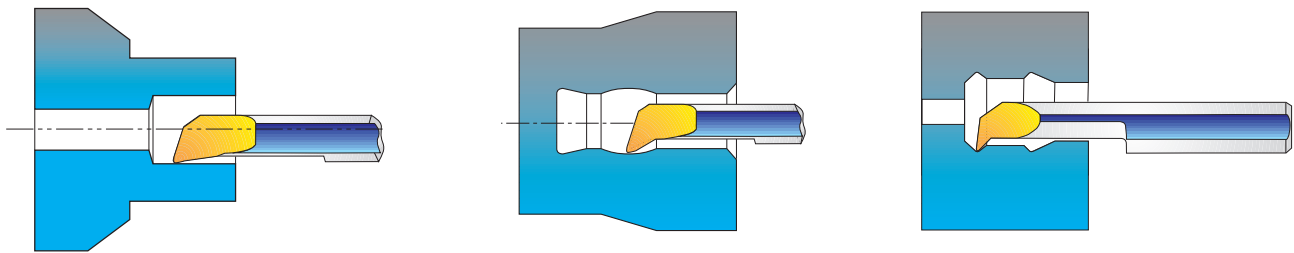

# Tiny Tools

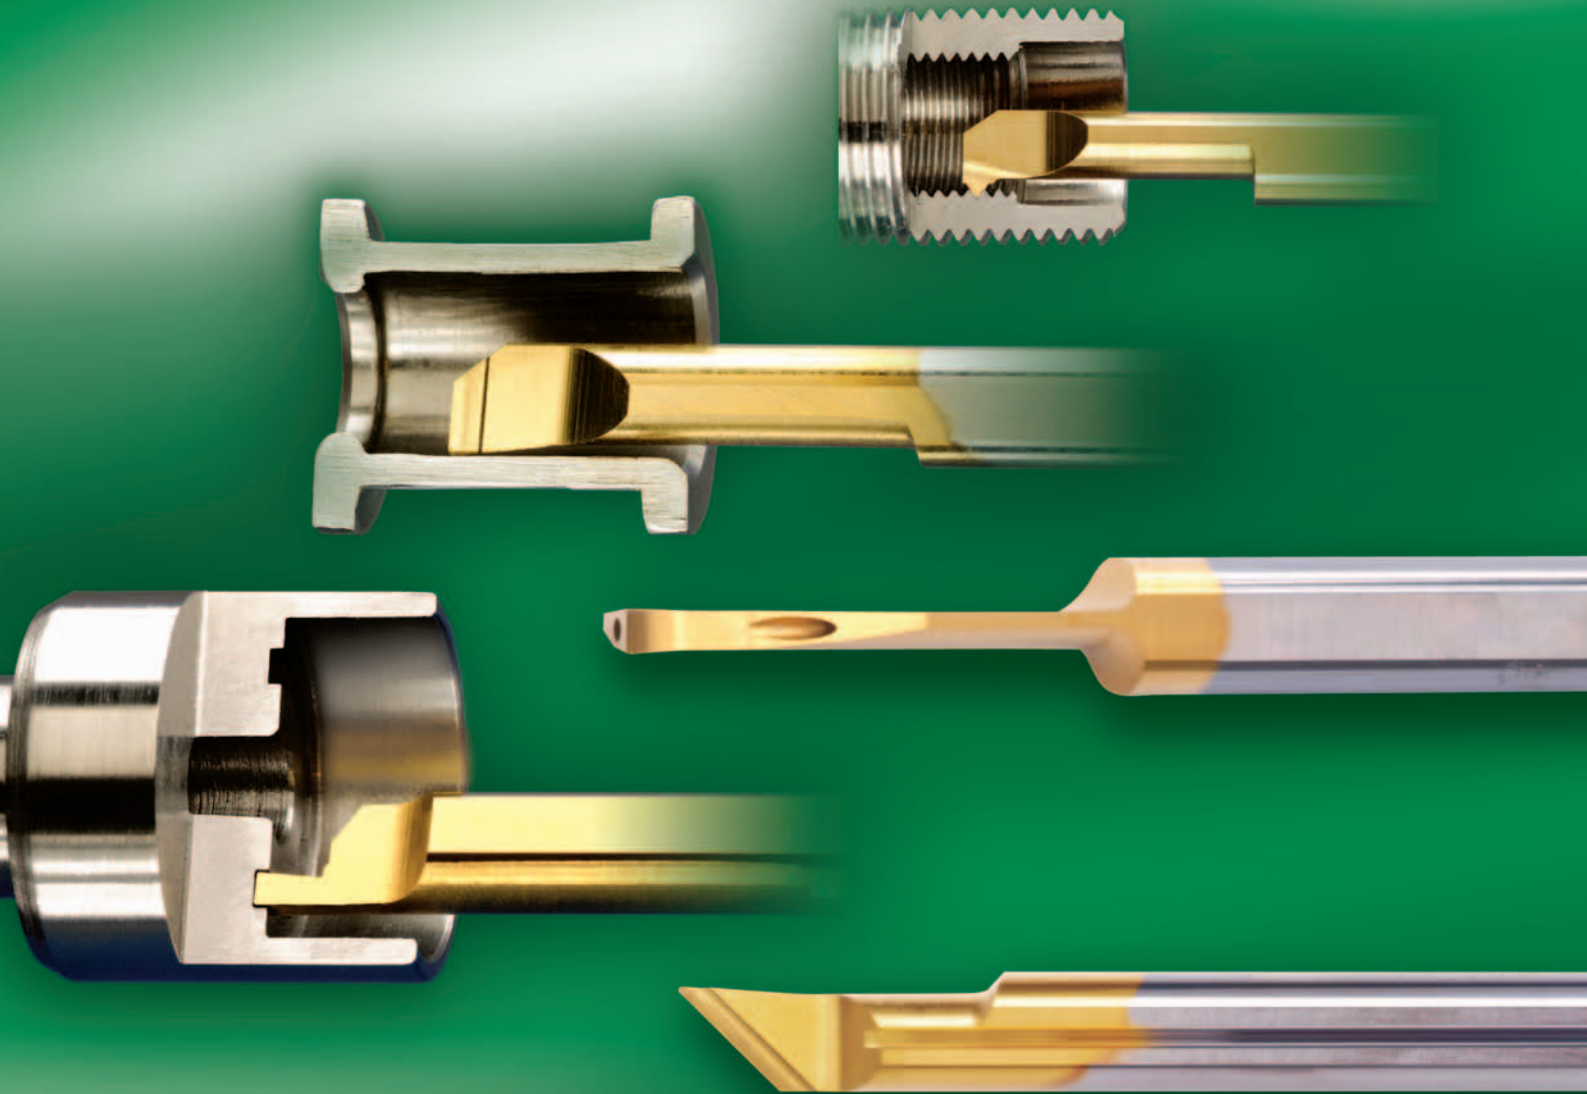


## Solid Carbide tools for working in small bores

These tools are made for the high-tech, medical and small component industry. All tools include cooling channel on the shank, enabling the cooling fluid to reach efficiently the cutting edge, for easy chip removal and smooth cutting operations.


Contents:	Page:	Contents:	Page:
Product Identification	140	MGR Chamfering and Profiling Bars	150
MTR Boring Bars	141	MKR Grooving Bars	151
MXR Back Turning Bars	142	MFR Face Grooving Bars	152
MPR Profiling and Boring Bars	143	MFL Face Grooving Bars	153
MUR Profiling, 90° Face Cutting Bars	144	MVR Deep Face Grooving Bars	154
MQR Profiling and Boring Bars	145	MZR Face Grooving Bars	155
MIR Threading Bars	146-147	Tiny Tools Bar Holders	156
MCR Threading Bars	148	Tiny Tools Kits	157
MWR Chamfering and Boring Bars	149	Technical Section	158

# Product Identification

## Tiny Bars Ordering Codes

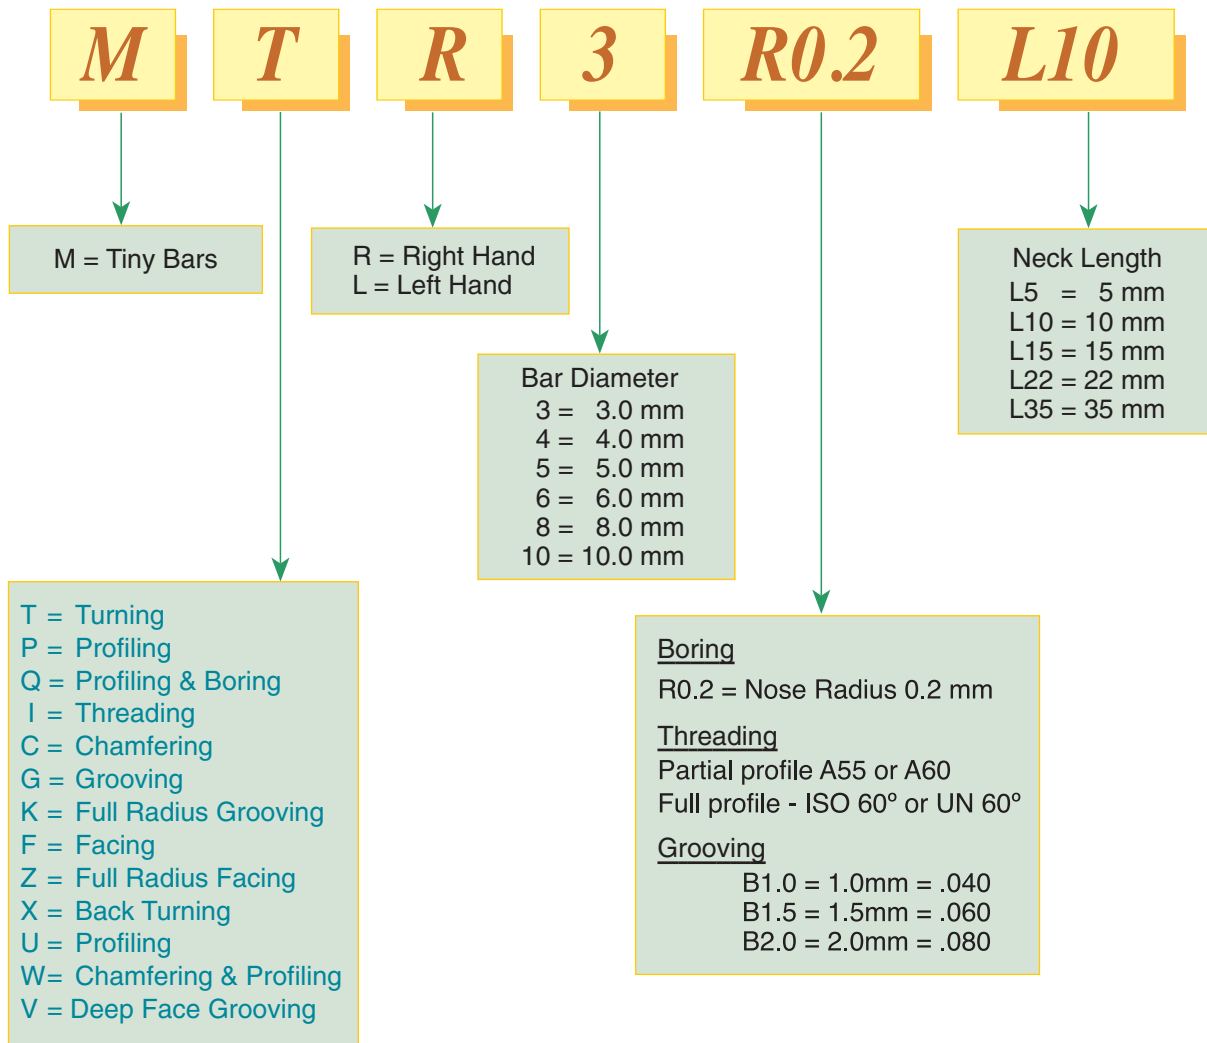

## MTR Bars Boring - with Coolant Channel

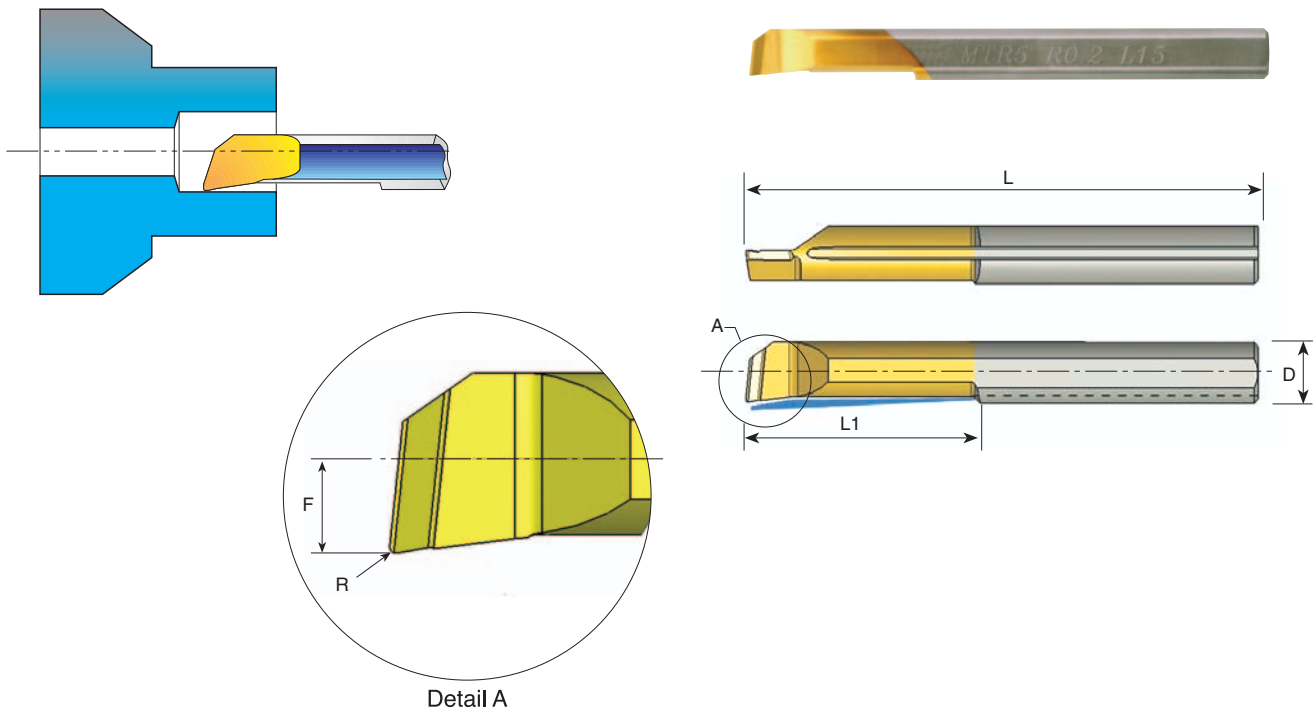

Detail A


D	Ordering Code	L	L1	R	F	Min. Bore Dia.	Holder*
3.0	<b>MTR 1 R0.05 L4</b>	39	4	0.05	0.5	1.0	SIM 0020 H3
3.0	<b>MTR 1.5R0.10 L6</b>	39	6	0.10	0.7	1.5	SIM 0020 H3
3.0	<b>MTR 2 R0.15 L5</b>	39	5	0.15	0.8	2.1	SIM 0020 H3
3.0	<b>MTR 2 R0.15 L10</b>	39	10	0.15	0.8	2.1	SIM 0020 H3
3.0	<b>MTR 3 R0.05 L10</b>	39	10	0.05	1.3	3.1	SIM 0020 H3
3.0	<b>MTR 3 R0.05 L15</b>	39	15	0.05	1.3	3.1	SIM 0020 H3
3.0	<b>MTR 3 R0.2 L10</b>	39	10	0.20	1.3	3.1	SIM 0020 H3
3.0	<b>MTR 3 R0.2 L15</b>	39	15	0.20	1.3	3.1	SIM 0020 H3
4.0	<b>MTR 4 R0.2 L10</b>	50	10	0.20	1.7	4.1	SIM 0020 H4
4.0	<b>MTR 4 R0.2 L15</b>	50	15	0.20	1.7	4.1	SIM 0020 H4
5.0	<b>MTR 5 R0.2 L15</b>	50	15	0.20	2.1	5.1	SIM 0020 H5
5.0	<b>MTR 5 R0.2 L22</b>	50	22	0.20	2.1	5.1	SIM 0020 H5
6.0	<b>MTR 6 R0.2 L15</b>	50	15	0.20	2.8	6.1	SIM 0020 H6
6.0	<b>MTR 6 R0.2 L22</b>	50	22	0.20	2.8	6.1	SIM 0020 H6
6.0	<b>MTR 6 R0.2 L30</b>	58	30	0.20	2.8	6.1	SIM 0020 H6
8.0	<b>MTR 8 R0.2 L15</b>	63	15	0.20	3.8	8.1	SIM 0020 H8
8.0	<b>MTR 8 R0.2 L22</b>	63	22	0.20	3.8	8.1	SIM 0020 H8
10.0	<b>MTR10R0.2 L35</b>	72	35	0.20	4.8	10.1	SIM 0020 H10

Order example: MTR 4 R0.2 L15 BXC

For L.H. bars specify MTL instead of MTR

\* For additional holders see page 156

## MXR Bars Back Turning - with Coolant Channel

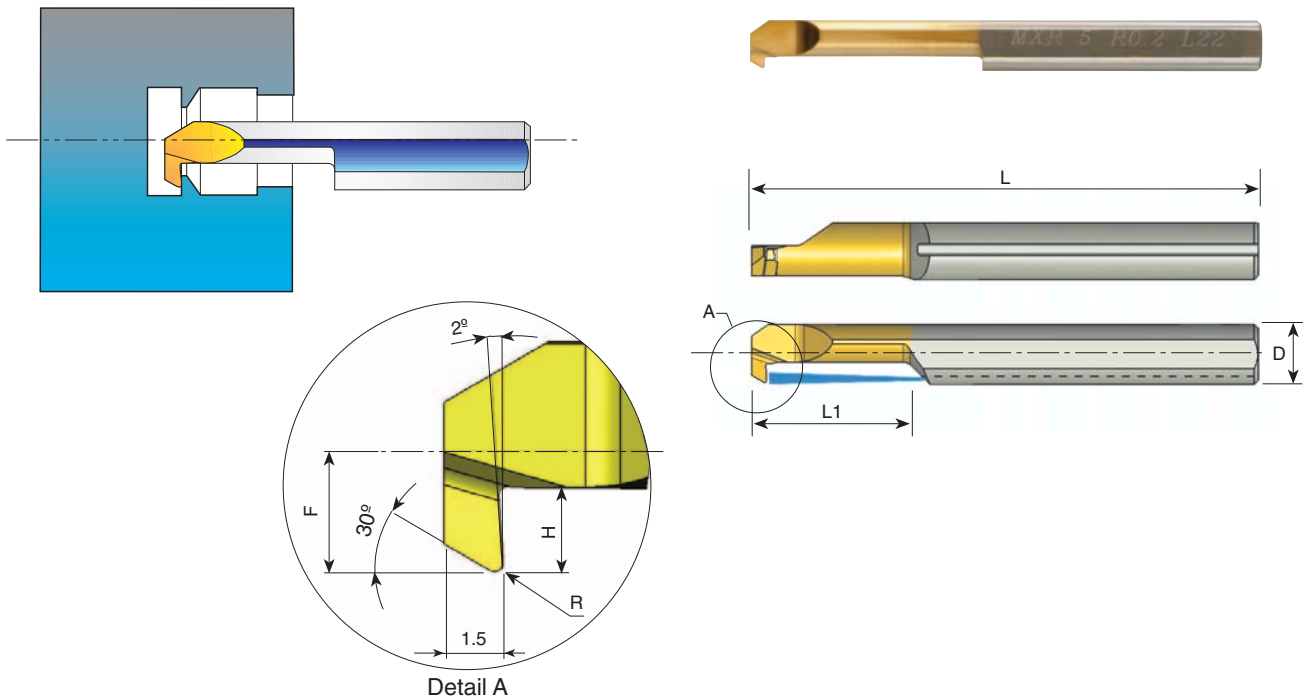


D	Ordering Code	L	L1	R	H	F	Min. Bore Dia.	Holder*
4.0	<b>MXR 4 R0.1 L10</b>	50	10	0.10	0.5	1.3	3.1	SIM 0020 H4
4.0	<b>MXR 4 R0.15 L10</b>	50	10	0.15	0.8	1.6	4.1	SIM 0020 H4
4.0	<b>MXR 4 R0.15 L15</b>	50	15	0.15	0.8	1.6	4.1	SIM 0020 H4
5.0	<b>MXR 5 R0.2 L15</b>	50	15	0.20	1.0	2.2	5.1	SIM 0020 H5
5.0	<b>MXR 5 R0.2 L22</b>	50	22	0.20	1.0	2.2	5.1	SIM 0020 H5
6.0	<b>MXR 6 R0.2 L15</b>	50	15	0.20	1.8	2.8	6.1	SIM 0020 H6
6.0	<b>MXR 6 R0.2 L22</b>	50	22	0.20	1.8	2.8	6.1	SIM 0020 H6

Order example: MXR 4 R0.15 L15 BXC

\* For additional holders see page 156

## MPR Bars Profiling and Boring - with Coolant Channel

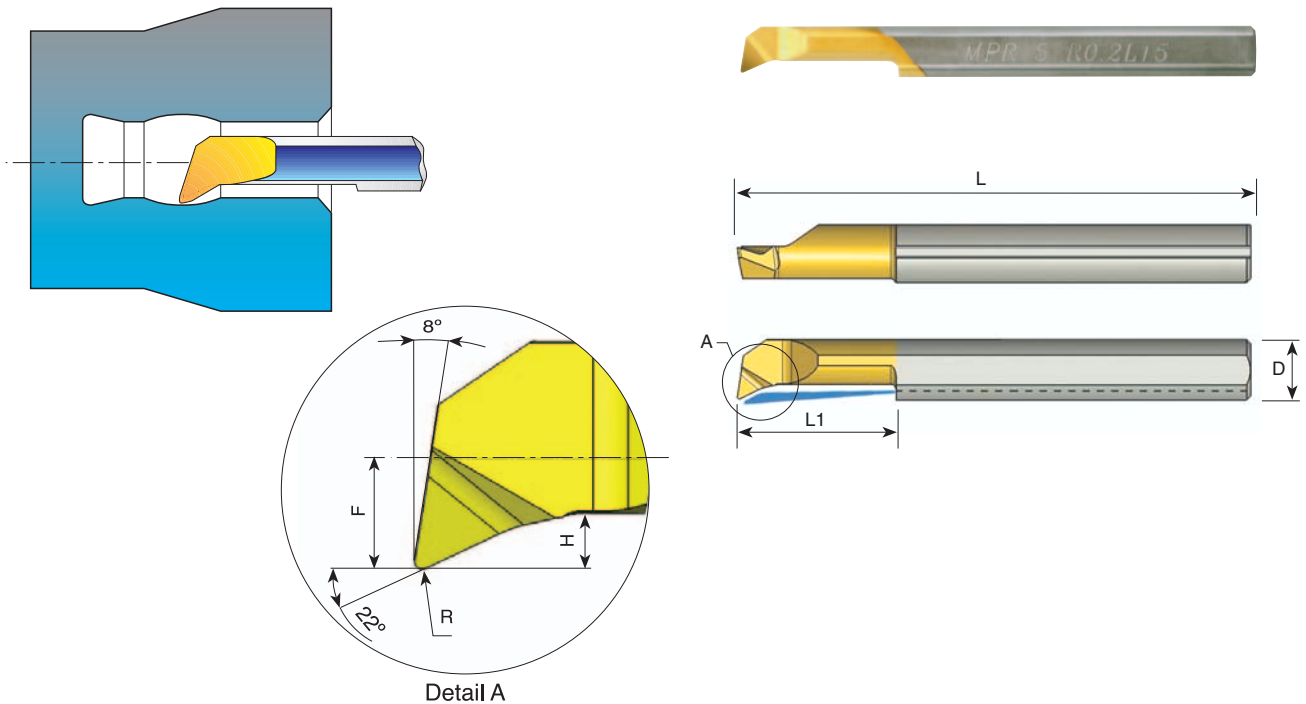

D	Ordering Code	L	L1	R	H	F	Min. Bore Dia.	Holder*
3.0	<b>MPR 1 R0.05 L4</b>	39	4	0.05	0.2	0.5	1.0	SIM 0020 H3
3.0	<b>MPR 1.5 R0.10L6</b>	39	6	0.10	0.3	0.7	1.5	SIM 0020 H3
3.0	<b>MPR 2 R0.15 L5</b>	39	5	0.15	0.5	0.8	2.1	SIM 0020 H3
3.0	<b>MPR 2 R0.15L10</b>	39	10	0.15	0.5	0.8	2.1	SIM 0020 H3
3.0	<b>MPR 3 R0.05L10</b>	39	10	0.05	0.7	1.3	3.1	SIM 0020 H3
3.0	<b>MPR 3 R0.05L15</b>	39	15	0.05	0.7	1.3	3.1	SIM 0020 H3
3.0	<b>MPR 3 R0.2 L10</b>	39	10	0.20	0.7	1.3	3.1	SIM 0020 H3
3.0	<b>MPR 3 R0.2 L15</b>	39	15	0.20	0.7	1.3	3.1	SIM 0020 H3
4.0	<b>MPR 4 R0.2 L10</b>	50	10	0.20	0.8	1.7	4.1	SIM 0020 H4
4.0	<b>MPR 4 R0.2 L15</b>	50	15	0.20	0.8	1.7	4.1	SIM 0020 H4
5.0	<b>MPR 5 R0.2 L15</b>	50	15	0.20	1.2	2.1	5.1	SIM 0020 H5
5.0	<b>MPR 5 R0.2 L22</b>	50	22	0.20	1.2	2.1	5.1	SIM 0020 H5
6.0	<b>MPR 6 R0.2 L15</b>	50	15	0.20	1.4	2.8	6.1	SIM 0020 H6
6.0	<b>MPR 6 R0.2 L22</b>	50	22	0.20	1.4	2.8	6.1	SIM 0020 H6
8.0	<b>MPR 8 R0.2 L15</b>	63	15	0.20	1.6	3.8	8.1	SIM 0020 H8
8.0	<b>MPR 8 R0.2 L22</b>	63	22	0.20	1.6	3.8	8.1	SIM 0020 H8
10.0	<b>MPR 10R0.2 L35</b>	72	35	0.20	2.0	4.8	10.1	SIM 0020 H10


Order example: MPR 4 R0.2 L15 BXC

For L.H. bars specify MPL instead of MPR

\* For additional holders see page 156



## MUR Bars Profiling, 90° Face Cutting - with Coolant Channel

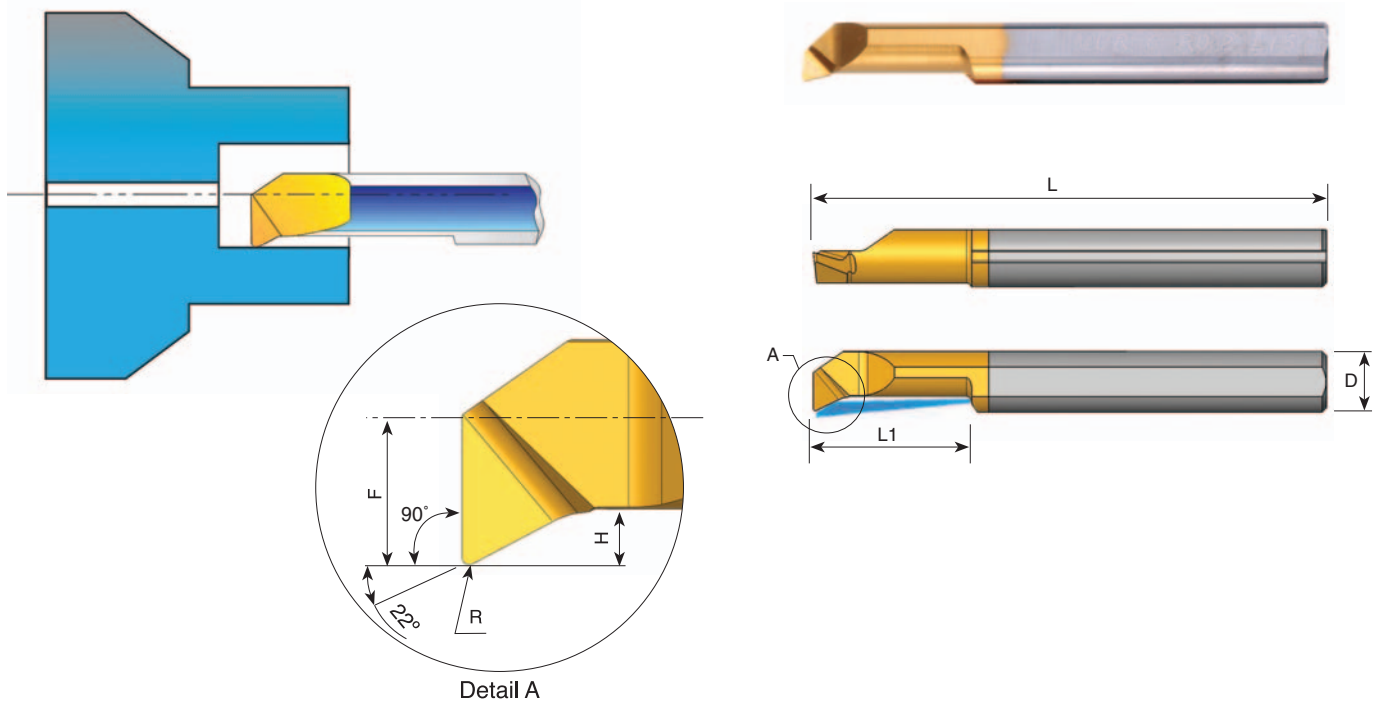


D	Ordering Code	L	L1	R	H	F	Min. Bore Dia.	Holder*
3.0	<b>MUR 3 R0.05 L10</b>	39	10	0.05	0.4	1.3	3.1	SIM 0020 H3
3.0	<b>MUR 3 R0.05 L15</b>	39	15	0.05	0.4	1.3	3.1	SIM 0020 H3
4.0	<b>MUR 4 R0.1 L10</b>	51	10	0.10	0.5	1.7	4.1	SIM 0020 H4
4.0	<b>MUR 4 R0.1 L15</b>	51	15	0.10	0.5	1.7	4.1	SIM 0020 H4
5.0	<b>MUR 5 R0.15 L15</b>	51	15	0.15	0.7	2.1	5.1	SIM 0020 H5
5.0	<b>MUR 5 R0.15 L22</b>	51	22	0.15	0.7	2.1	5.1	SIM 0020 H5
6.0	<b>MUR 6 R0.15 L15</b>	51	15	0.15	0.9	2.8	6.1	SIM 0020 H6
6.0	<b>MUR 6 R0.15 L22</b>	51	22	0.15	0.9	2.8	6.1	SIM 0020 H6
8.0	<b>MUR 8 R0.2 L22</b>	64	22	0.20	1.1	3.8	8.1	SIM 0020 H8

Order example: MUR 5 R0.15 L15 BXC

\* For additional holders see page 156

## MQR Bars Profiling and Boring - with Coolant Channel

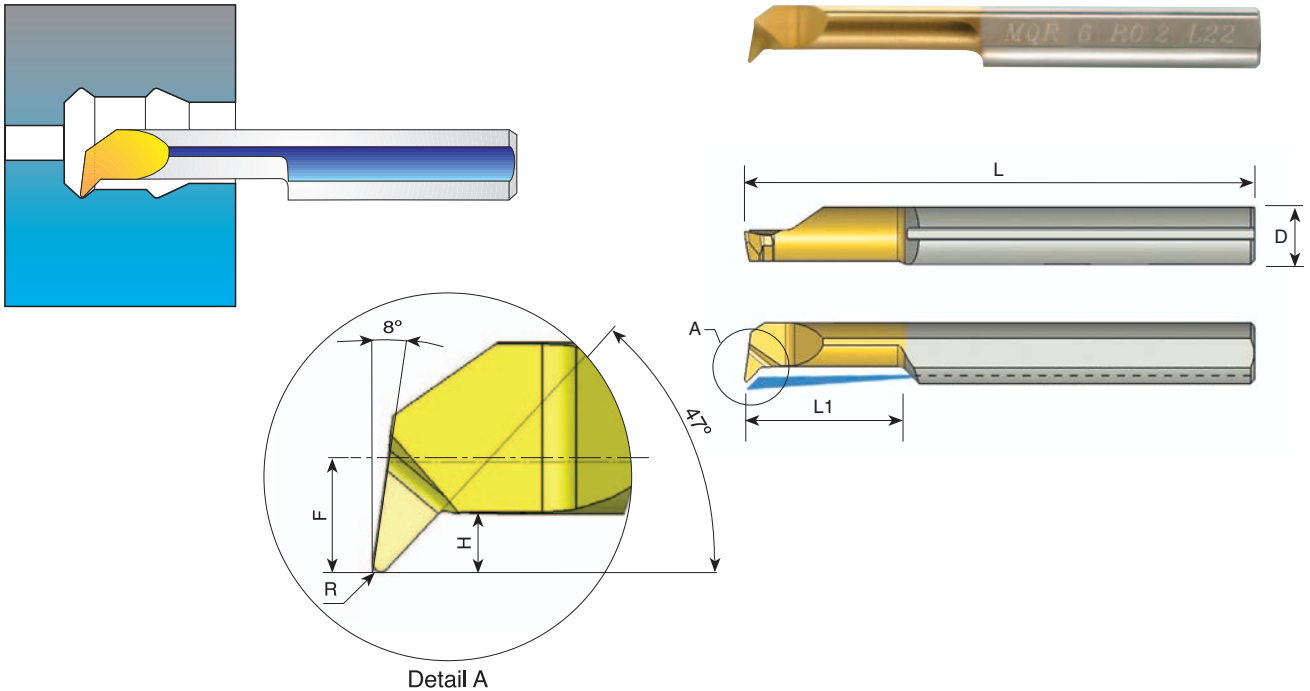


D	Ordering Code	L	L1	R	H	F	Min. Bore Dia.	Holder*
4.0	<b>MQR 4 R0.2 L10</b>	50	10	0.20	0.8	1.8	4.1	SIM 0020 H4
4.0	<b>MQR 4 R0.2 L15</b>	50	15	0.20	0.8	1.8	4.1	SIM 0020 H4
5.0	<b>MQR 5 R0.2 L15</b>	50	15	0.20	1.0	2.3	5.1	SIM 0020 H5
5.0	<b>MQR 5 R0.2 L22</b>	50	22	0.20	1.0	2.3	5.1	SIM 0020 H5
6.0	<b>MQR 6 R0.2 L15</b>	50	15	0.20	1.4	2.8	6.1	SIM 0020 H6
6.0	<b>MQR 6 R0.2 L22</b>	50	22	0.20	1.4	2.8	6.1	SIM 0020 H6
8.0	<b>MQR 8 R0.2 L22</b>	64	22	0.20	1.6	3.8	8.1	SIM 0020 H8

Order example: MQR 5 R0.2 L15 BXC

\* For additional holders see page 156

## MIR Bars Threading - with Coolant Channel

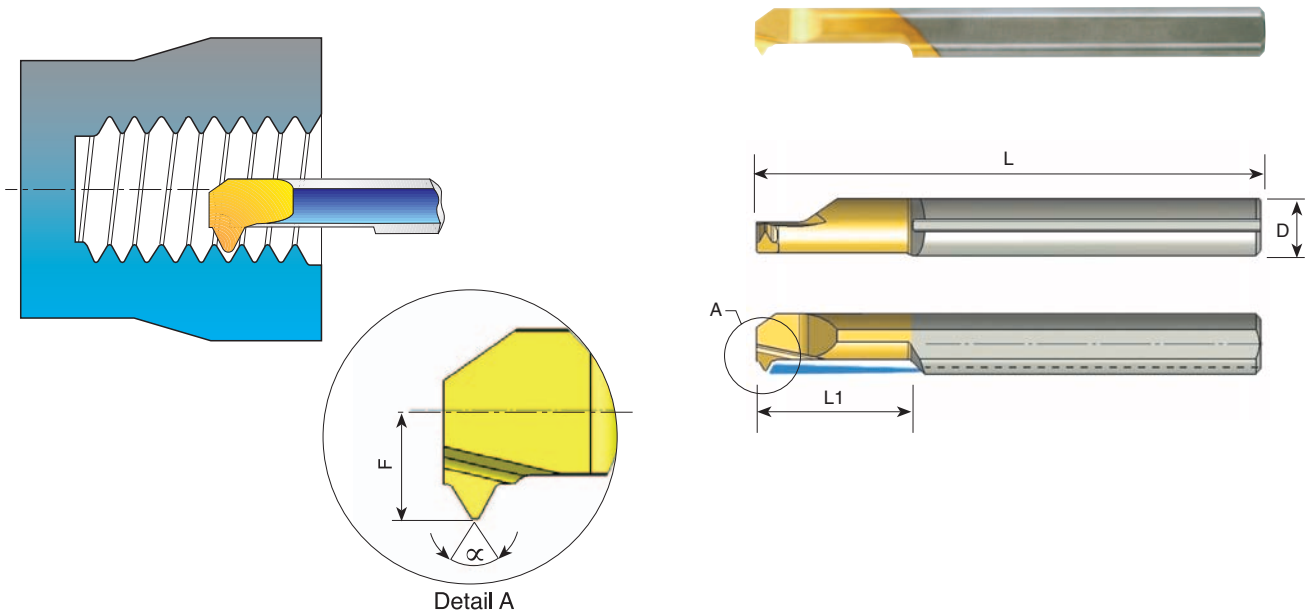

### Partial Profile 60° & 55°


D	Ordering Code	L	L1	$\alpha$	Pitch Range		F	Min. Bore Dia.	Holder*
					mm	TPI			
3.0	<b>MIR 2 L8 A60</b>	39	8	60	0.45-0.7	56-32	1.0	2.1	SIM 0020 H3
3.0	<b>MIR 3 L15 A60</b>	39	15	60	0.8 -1.0	32-24	1.4	3.2	SIM 0020 H3
3.0	<b>MIR 3 L15 A55</b>	39	15	55	0.5 -1.0	48-24	1.4	3.2	SIM 0020 H3
4.0	<b>MIR 4 L15 A60</b>	50	15	60	0.8 -1.0	32-24	1.8	4.1	SIM 0020 H4
4.0	<b>MIR 4 L15 A55</b>	50	15	55	0.5 -1.0	48-24	1.8	4.1	SIM 0020 H4
5.0	<b>MIR 5 L15 A60</b>	50	15	60	1.0 -1.25	24-20	2.3	5.1	SIM 0020 H5
5.0	<b>MIR 5 L15 A55</b>	50	15	55	0.5 -1.25	48-20	2.3	5.1	SIM 0020 H5
6.0	<b>MIR 6 L15 A60</b>	50	15	60	1.0 -1.5	24-16	2.6	6.0	SIM 0020 H6
6.0	<b>MIR 6 L15 A55</b>	50	15	55	0.5 -1.5	48-16	2.6	6.0	SIM 0020 H6
8.0	<b>MIR 8 L22 A60</b>	64	22	60	1.0 -2.0	24-13	3.6	8.0	SIM 0020 H8

Order example: MIR 5 L15 A60 BXC

For L.H. bars specify MIL instead of MIR

\* For additional holders see page 156

## MIR Bars Threading - with Coolant Channel

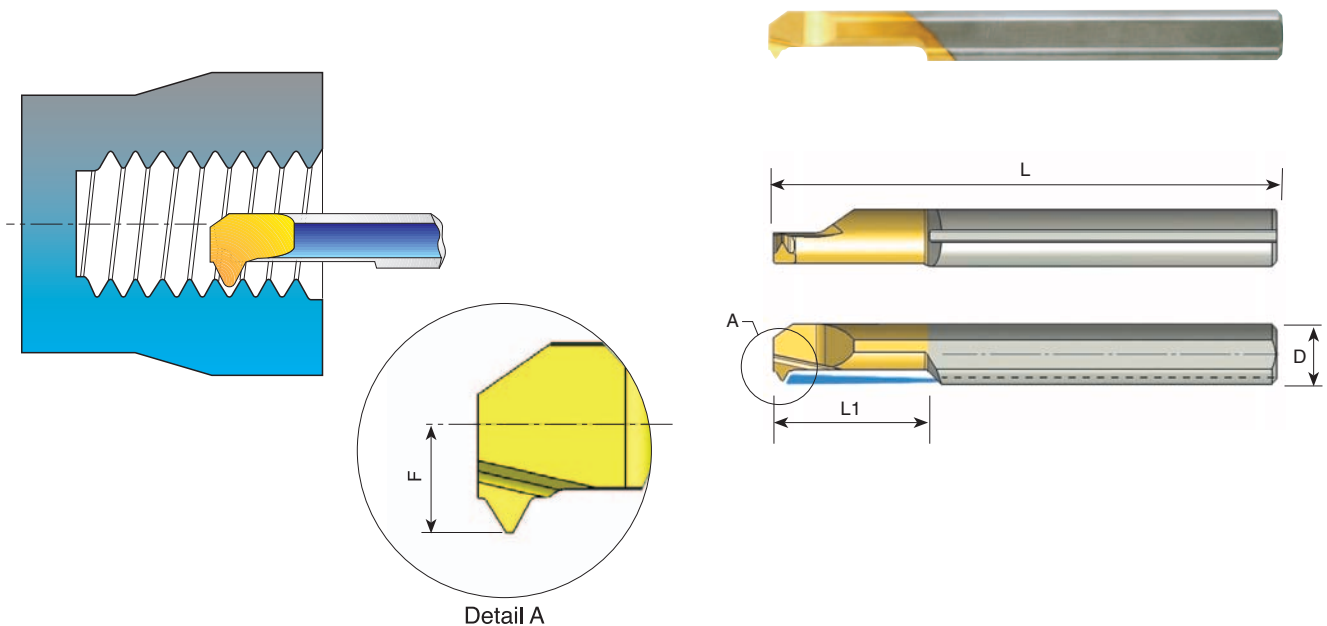

### Full Profile – ISO 60°

D	Ordering Code	Pitch mm	L	L1	F	Min. Bore Dia.	Holder*
3.0	<b>MIR 3 L15 0.5 ISO</b>	0.5	39	15	1.4	3.2	SIM 0020 H3
3.0	<b>MIR 3 L15 0.75 ISO</b>	0.75	39	15	1.4	3.2	SIM 0020 H3
4.0	<b>MIR 4 L15 0.5 ISO</b>	0.5	50	15	1.8	4.1	SIM 0020 H4
4.0	<b>MIR 4 L15 0.75 ISO</b>	0.75	50	15	1.8	4.1	SIM 0020 H4
5.0	<b>MIR 5 L15 1.0 ISO</b>	1.0	50	15	2.2	4.9	SIM 0020 H5
6.0	<b>MIR 6 L22 1.25 ISO</b>	1.25	50	22	2.8	6.1	SIM 0020 H6

Order example: MIR 5 L15 1.0 ISO BXC

### Full Profile – UN 60°


D	Ordering Code	Pitch TPI	L	L1	F	Min. Bore Dia.	Holder*
3.0	<b>MIR 3 L15 36 UN</b>	36	39	15	1.4	3.2	SIM 0020 H3
3.0	<b>MIR 3 L15 32 UN</b>	32	39	15	1.4	3.2	SIM 0020 H3
4.0	<b>MIR 4 L15 36 UN</b>	36	50	15	1.8	4.1	SIM 0020 H4
4.0	<b>MIR 4 L15 32 UN</b>	32	50	15	1.8	4.1	SIM 0020 H4
5.0	<b>MIR 5 L15 28 UN</b>	28	50	15	2.2	4.9	SIM 0020 H5
5.0	<b>MIR 5 L18 20 UN</b>	20	50	18	2.3	5.0	SIM 0020 H5

Order example: MIR 4 L15 36 UN BXC

For L.H. bars specify MIL instead of MIR

\* For additional holders see page 156

## MCR Bars Chamfering and Boring - with Coolant Channel

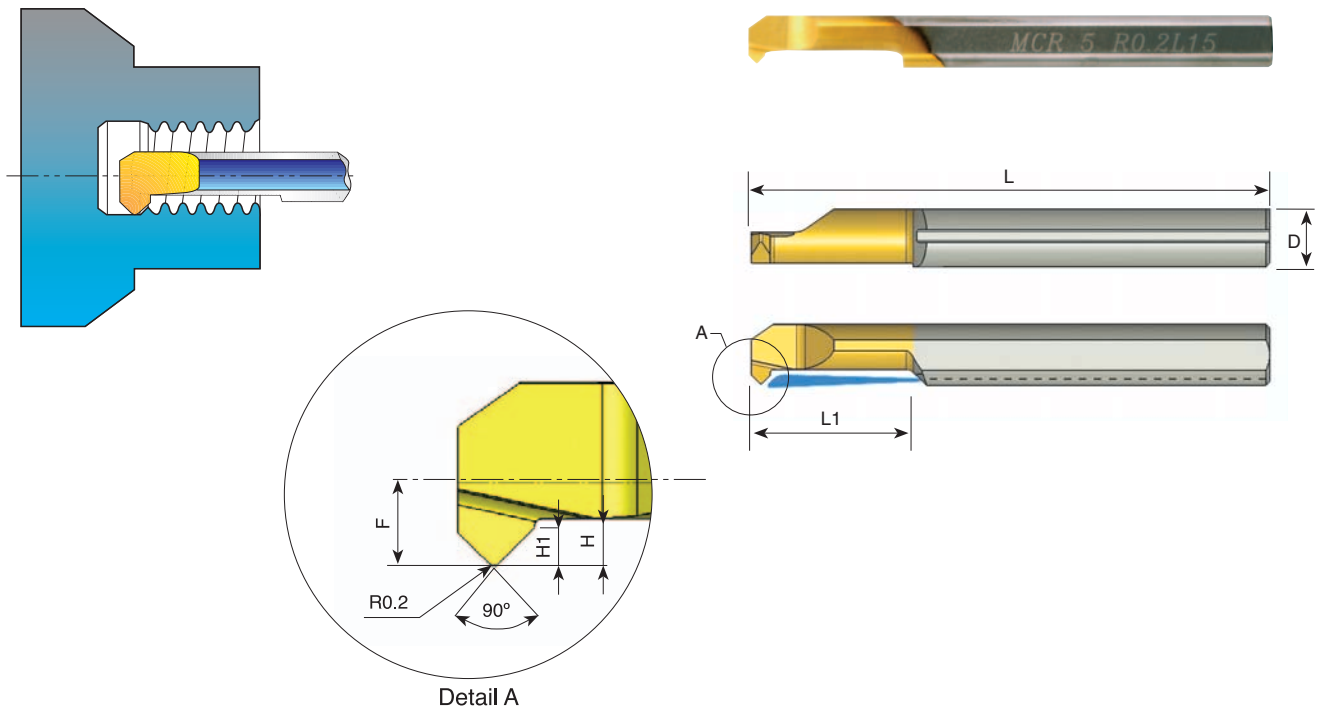


D	Ordering Code	L	L1	R	H	H1	F	Min. Bore Dia.	Holder*
3.0	<b>MCR 3 R0.2 L10</b>	39	10	0.20	0.7	0.3	1.3	3.1	SIM 0020 H3
4.0	<b>MCR 4 R0.2 L15</b>	50	15	0.20	0.8	0.4	1.7	4.1	SIM 0020 H4
5.0	<b>MCR 5 R0.2 L15</b>	50	15	0.20	1.2	0.7	2.1	5.1	SIM 0020 H5
6.0	<b>MCR 6 R0.2 L15</b>	50	15	0.20	1.4	0.7	2.8	6.1	SIM 0020 H6

Order example: MCR 4 R0.2 L15 BXC

For L.H. bars specify MCL instead of MCR

\* For additional holders see page 156

## MWR Bars Chamfering and Profiling - with Coolant Channel

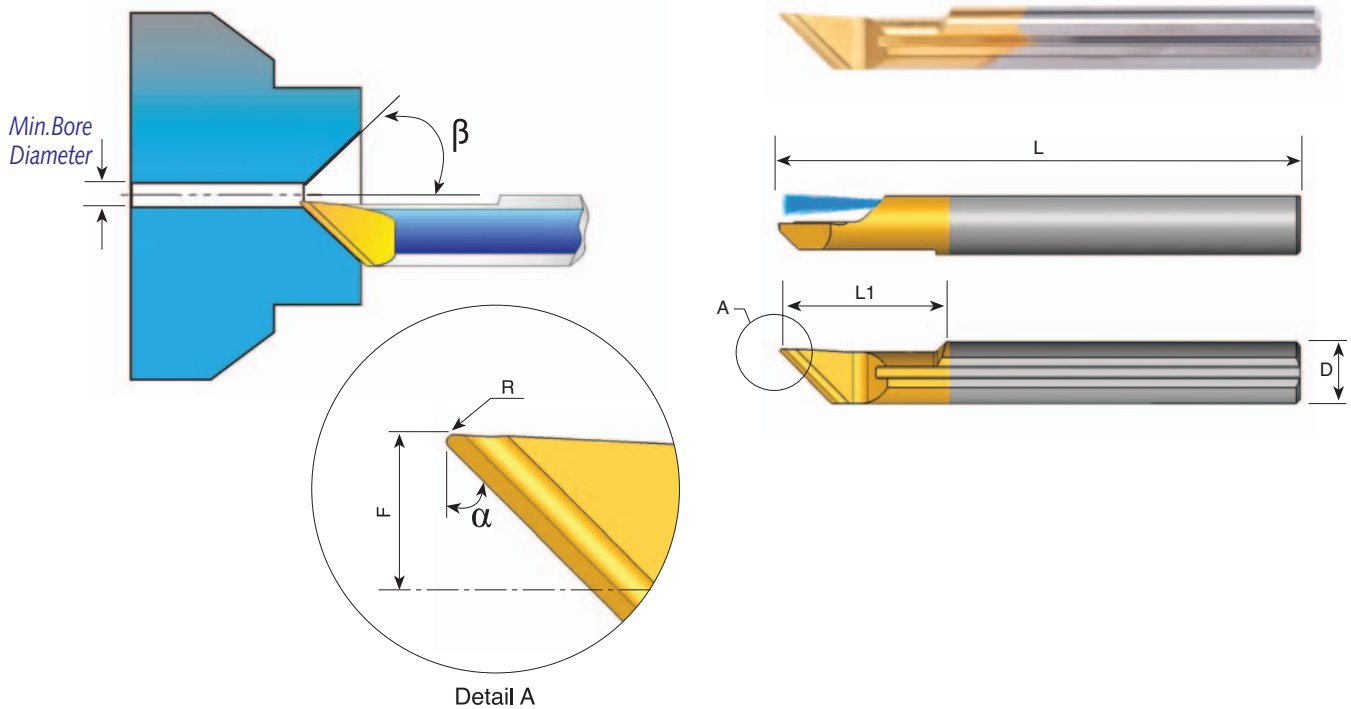


D	Ordering Code	L	L1	R	$\alpha$	$\beta$	F	Min. Bore Dia.	Holder*
6.0	<b>MWR 6 R0.2 A90</b>	51	15.0	0.20	45°	45°	2.3	1.0	SIM 0020 H6
6.0	<b>MWR 6 R0.2 A60</b>	51	15.0	0.20	60°	30°	2.3	1.0	SIM 0020 H6

Order example: MWR 6 R0.2 A90 BXC

\* For additional holders see page 156



## MGR Bars Grooving - with Coolant Channel

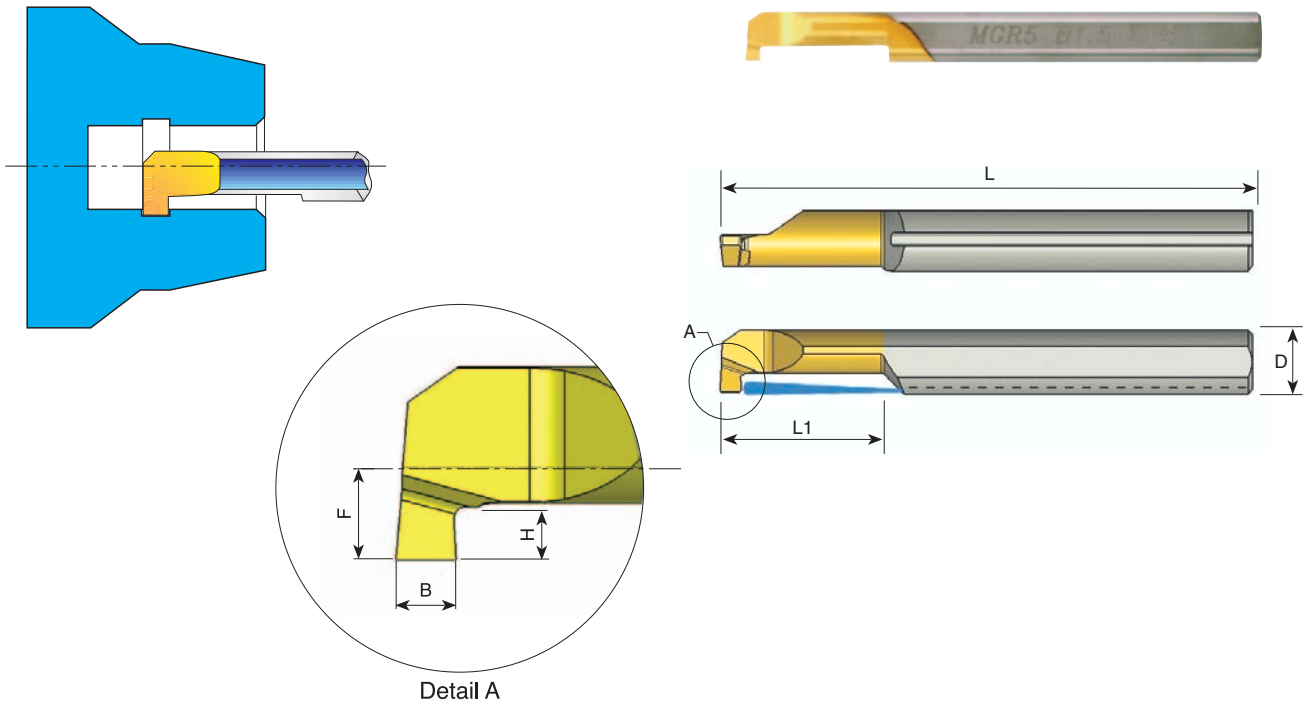


D	Ordering Code	L	L1	B	H	F	Min. Bore Dia.	Holder*
4.0	<b>MGR 4 B1.0 L10</b>	50	10	1.0	1.0	1.7	4.1	SIM 0020 H4
4.0	<b>MGR 4 B1.5 L10</b>	50	10	1.5	1.0	1.7	4.1	SIM 0020 H4
5.0	<b>MGR 5 B1.0 L15</b>	50	15	1.0	1.2	2.3	5.1	SIM 0020 H5
5.0	<b>MGR 5 B1.5 L15</b>	50	15	1.5	1.2	2.3	5.1	SIM 0020 H5
5.0	<b>MGR 5 B2.0 L15</b>	50	15	2.0	1.2	2.3	5.1	SIM 0020 H5
6.0	<b>MGR 6 B1.0 L15</b>	50	15	1.0	1.4	2.8	6.1	SIM 0020 H6
6.0	<b>MGR 6 B1.5 L15</b>	50	15	1.5	1.4	2.8	6.1	SIM 0020 H6
6.0	<b>MGR 6 B2.0 L15</b>	50	15	2.0	1.4	2.8	6.1	SIM 0020 H6

Order example: MGR 5 B1.5 L15 BXC

For L.H. bars specify MGL instead of MGR

\* For additional holders see page 156

## MKR Bars Full Radius Grooving - with Coolant Channel

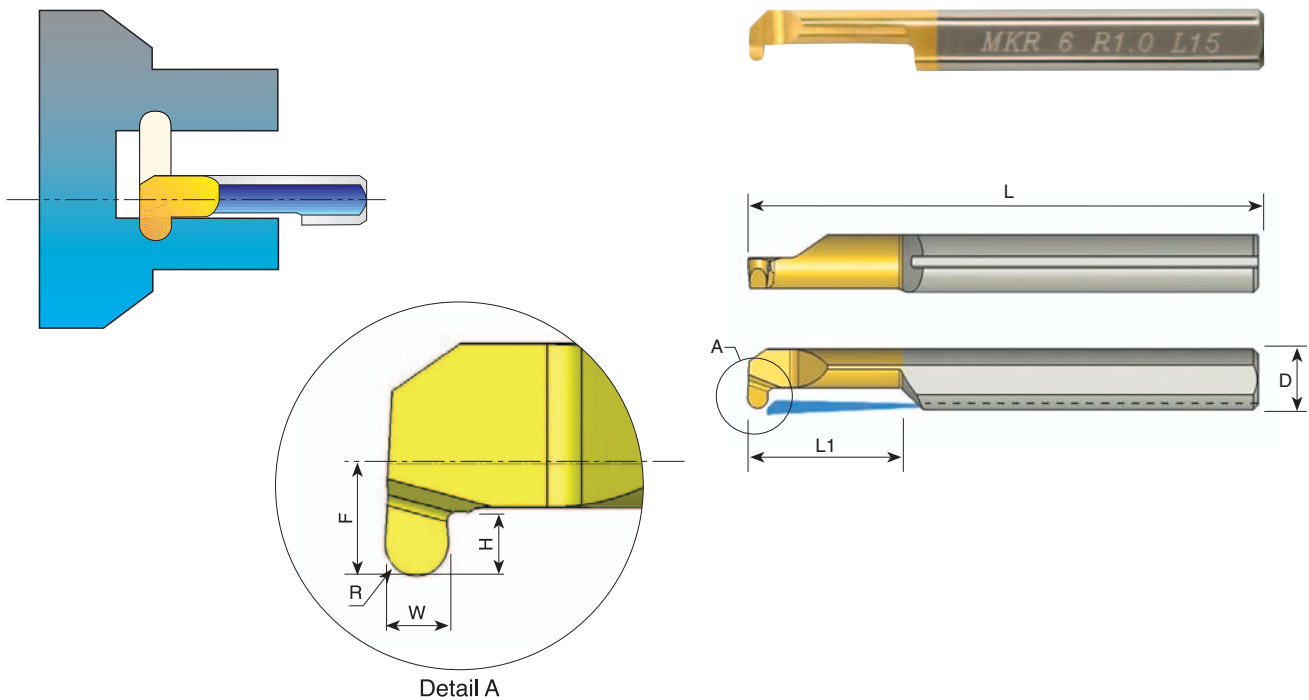


D	Ordering Code	L	L1	R	W	H	F	Min. Bore Dia.	Holder*
4.0	<b>MKR 4 R0.5 L10</b>	50	10	0.50	1.0	1.0	1.7	4.1	SIM 0020 H4
4.0	<b>MKR 4 R0.75 L10</b>	50	10	0.75	1.5	1.0	1.7	4.1	SIM 0020 H4
5.0	<b>MKR 5 R0.5 L15</b>	50	15	0.50	1.0	1.2	2.3	5.1	SIM 0020 H5
5.0	<b>MKR 5 R0.75 L15</b>	50	15	0.75	1.5	1.2	2.3	5.1	SIM 0020 H5
5.0	<b>MKR 5 R1.0 L15</b>	50	15	1.00	2.0	1.2	2.3	5.1	SIM 0020 H5
6.0	<b>MKR 6 R0.5 L15</b>	50	15	0.50	1.0	1.6	2.8	6.1	SIM 0020 H6
6.0	<b>MKR 6 R0.75 L15</b>	50	15	0.75	1.5	1.6	2.8	6.1	SIM 0020 H6
6.0	<b>MKR 6 R1.0 L15</b>	50	15	1.00	2.0	1.6	2.8	6.1	SIM 0020 H6

Order example: MKR 5 R1.0 L15 BXC

For L.H. bars specify MKL instead of MKR

\* For additional holders see page 156

## MFR Bars Face Grooving - with Coolant Channel

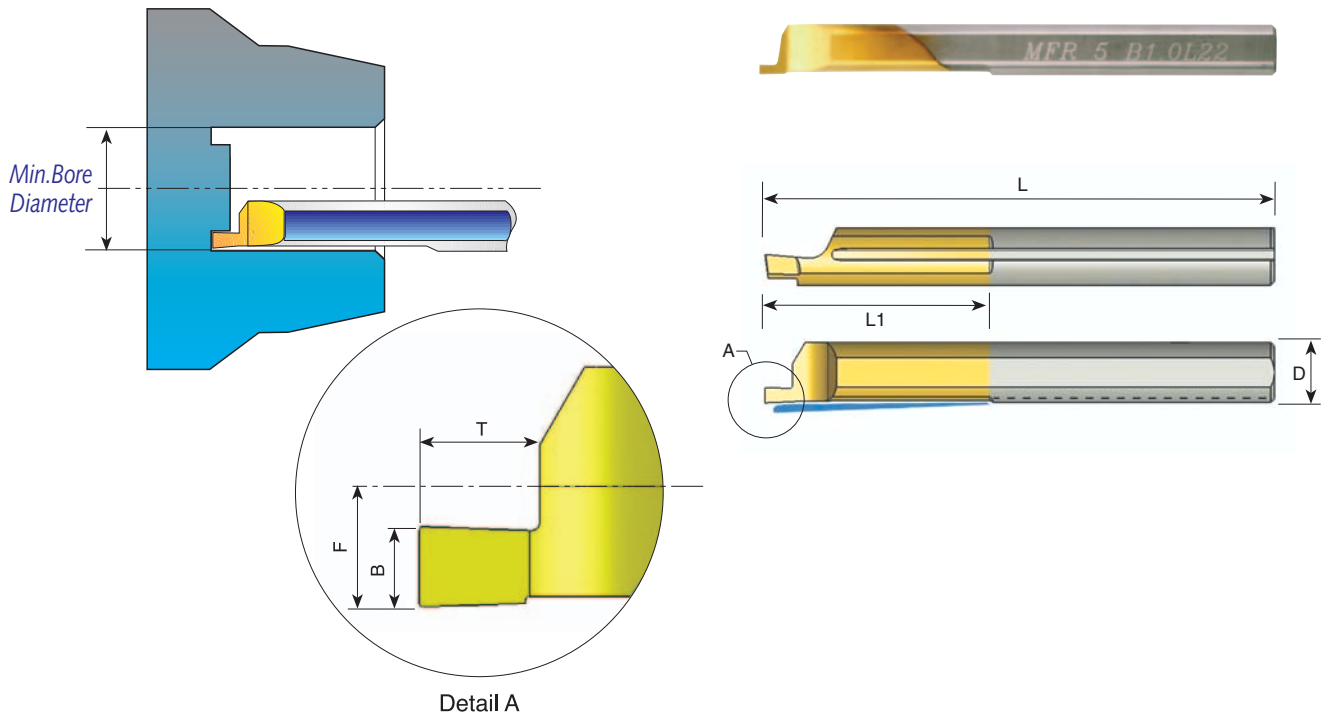


D	Ordering Code	L	L1	B	T	F	Min. Bore Dia.	Holder*
4.0	<b>MFR 4 B0.75 L15</b>	50	15	0.75	1.2	1.95	5.0	SIM 0020 H4
4.0	<b>MFR 4 B1.0 L15</b>	50	15	1.0	1.5	1.95	5.0	SIM 0020 H4
5.0	<b>MFR 5 B0.75 L22</b>	50	22	0.75	1.2	2.45	6.0	SIM 0020 H5
5.0	<b>MFR 5 B1.0 L22</b>	50	22	1.0	1.5	2.45	6.0	SIM 0020 H5
5.0	<b>MFR 5 B1.5 L22</b>	50	22	1.5	2.5	2.45	6.0	SIM 0020 H5
6.0	<b>MFR 6 B1.0 L22</b>	50	22	1.0	1.5	2.95	8.0	SIM 0020 H6
6.0	<b>MFR 6 B1.5 L22</b>	50	22	1.5	2.5	2.95	8.0	SIM 0020 H6
6.0	<b>MFR 6 B2.0 L22</b>	50	22	2.0	3.0	2.95	8.0	SIM 0020 H6
8.0	<b>MFR 8 B2.5 L22</b>	63	22	2.5	3.5	3.95	10.0	SIM 0020 H8

Order example: MFR 5 B1.0 L22 BXC

\* For additional holders see page 156

## MFL Bars Face Grooving - with Coolant Channel

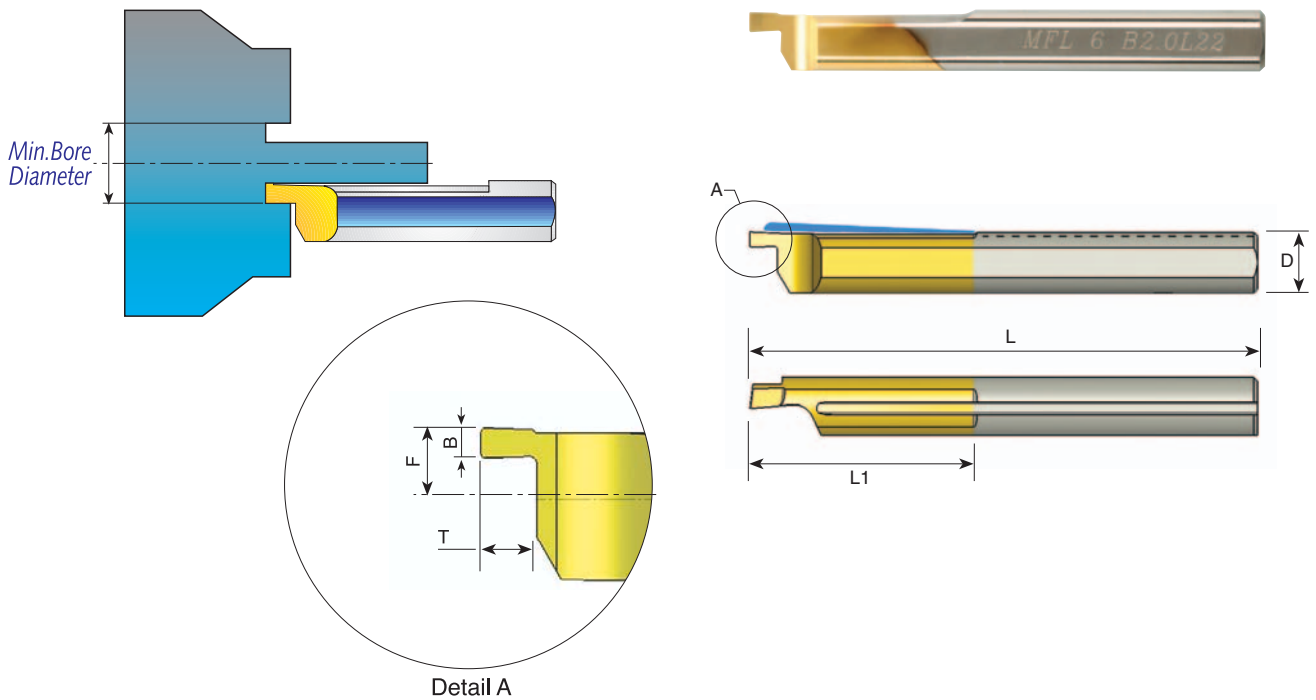


D	Ordering Code	L	L1	B	T	F	Min. Bore Dia.	Holder*
4.0	<b>MFL 4 B0.75 L15</b>	50	15	0.75	1.2	1.75	5.0	SIM 0020 H4
4.0	<b>MFL 4 B1.0 L15</b>	50	15	1.0	1.5	1.75	5.0	SIM 0020 H4
5.0	<b>MFL 5 B0.75 L22</b>	50	22	0.75	1.2	2.25	6.0	SIM 0020 H5
5.0	<b>MFL 5 B1.0 L22</b>	50	22	1.0	1.5	2.25	6.0	SIM 0020 H5
5.0	<b>MFL 5 B1.5 L22</b>	50	22	1.5	2.5	2.25	6.0	SIM 0020 H5
6.0	<b>MFL 6 B1.0 L22</b>	50	22	1.0	1.5	2.75	8.0	SIM 0020 H6
6.0	<b>MFL 6 B1.5 L22</b>	50	22	1.5	2.5	2.75	8.0	SIM 0020 H6
6.0	<b>MFL 6 B2.0 L22</b>	50	22	2.0	3.0	2.75	8.0	SIM 0020 H6
8.0	<b>MFL 8 B2.5 L22</b>	63	22	2.5	3.5	3.75	10.0	SIM 0020 H8

Order example: MFL 6 B1.0 L22 BXC

\* For additional holders see page 156

## MVR Bars Deep Face Grooving - with 2 Coolant Bores

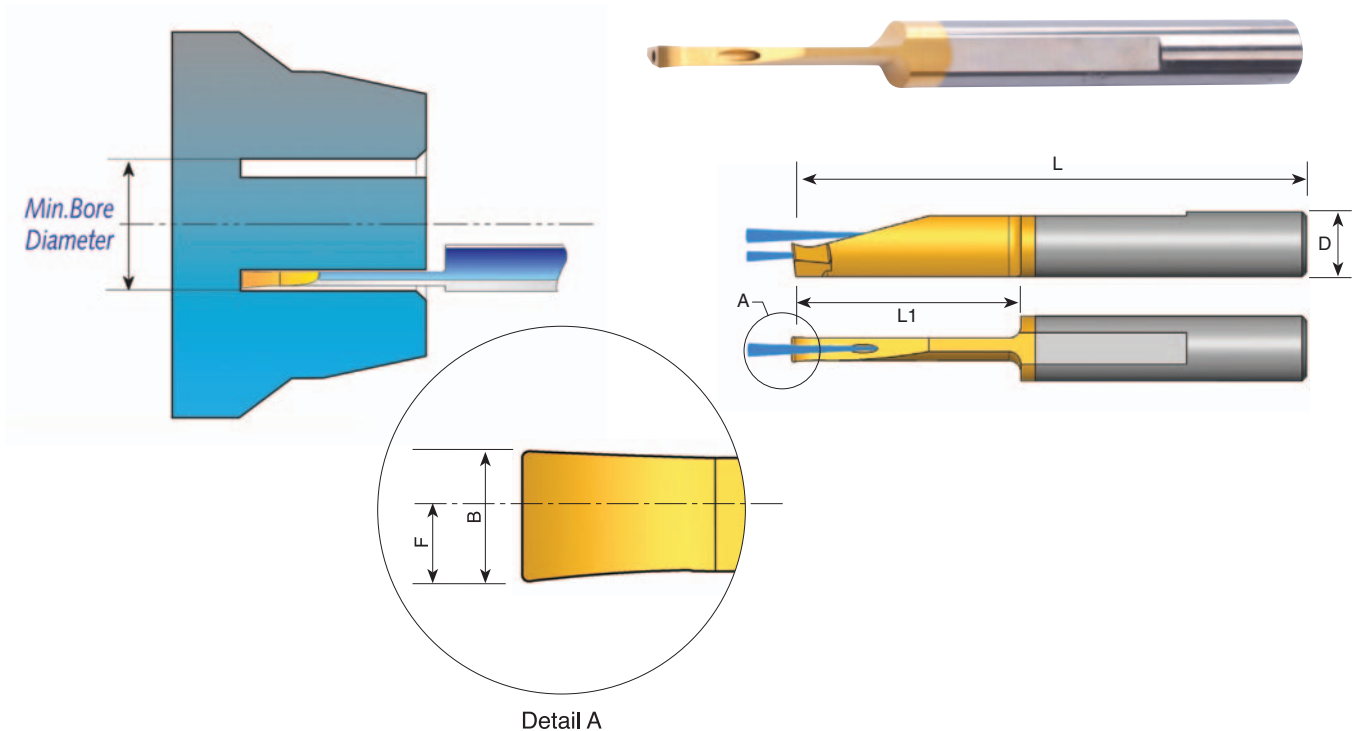


Detail A

D	Ordering Code	L	L1	B	F	Min. Bore Dia.	Holder*
6.0	<b>MVR 6 B2.0 L15</b>	51	15	2.0	1.7	12.0	SIM 0020 H6
6.0	<b>MVR 6 B2.0 L22</b>	51	22	2.0	1.7	12.0	SIM 0020 H6
6.0	<b>MVR 6 B2.5 L22</b>	51	22	2.5	2.2	12.0	SIM 0020 H6
8.0	<b>MVR 8 B3.0 L27</b>	51	27	3.0	2.5	15.0	SIM 0020 H8

Order example: MVR 6 B2.0 L22 BXC

\* For additional holders see page 156

## MZR Bars Face Grooving - with Coolant Channel

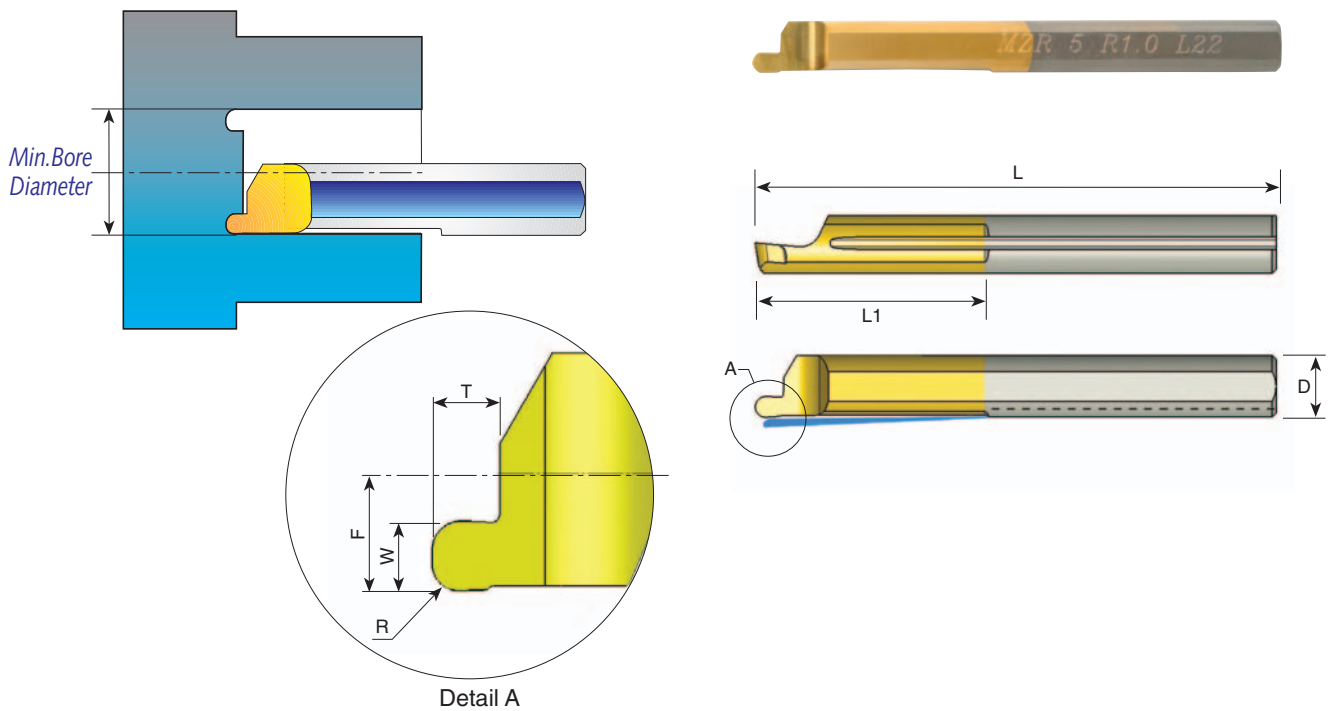


D	Ordering Code	L	L1	R	W	T	F	Min. Bore Dia.	Holder*
4.0	<b>MZR 4 R0.5 L15</b>	50	15	0.50	1.0	1.2	1.95	5.0	SIM 0020 H4
4.0	<b>MZR 4 R0.75 L15</b>	50	15	0.75	1.5	1.5	1.95	5.0	SIM 0020 H4
5.0	<b>MZR 5 R0.5 L22</b>	50	22	0.50	1.0	1.2	2.45	6.0	SIM 0020 H5
5.0	<b>MZR 5 R0.75 L22</b>	50	22	0.75	1.5	1.5	2.45	6.0	SIM 0020 H5
5.0	<b>MZR 5 R1.0 L22</b>	50	22	1.00	2.0	2.5	2.45	6.0	SIM 0020 H5
6.0	<b>MZR 6 R0.5 L22</b>	50	22	0.50	1.0	1.2	2.95	8.0	SIM 0020 H6
6.0	<b>MZR 6 R0.75 L22</b>	50	22	0.75	1.5	1.5	2.95	8.0	SIM 0020 H6
6.0	<b>MZR 6 R1.0 L22</b>	50	22	1.00	2.0	2.5	2.95	8.0	SIM 0020 H6

Order example: MZR 5 R0.5 L22 BXC

\* For additional holders see page 156


## Tiny Tools Bar Holders

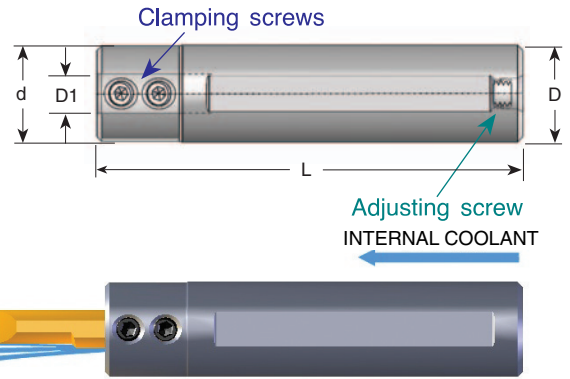

D1	Ordering Code	L	D	d	Key	Clamping Screw	Adjusting Screw
3.0	<b>SIM0012 H3</b>	88	12	12	K25	S24	S35
3.0	<b>* SIM0016 H3S</b>	75	16	20	K25	S25	S35S
3.0	<b>SIM0016 H3</b>	88	16	20	K25	S25	S35
3.0	<b>SIM0020 H3</b>	88	20	20	K25	S25	S35
3.0	<b>* SIM0022 H3</b>	88	22	22	K25	S25	S35
4.0	<b>SIM0012 H4</b>	88	12	12	K25	S24	S35
4.0	<b>* SIM0016 H4S</b>	75	16	20	K25	S25	S35S
4.0	<b>SIM0016 H4</b>	88	16	20	K25	S25	S35
4.0	<b>SIM0020 H4</b>	88	20	20	K25	S25	S35
4.0	<b>* SIM0022 H4</b>	88	22	22	K25	S25	S35
5.0	<b>SIM0012 H5</b>	88	12	12	K25	S24	S35
5.0	<b>* SIM0016 H5S</b>	75	16	20	K25	S25	S35S
5.0	<b>SIM0016 H5</b>	88	16	20	K25	S25	S35
5.0	<b>SIM0020 H5</b>	88	20	20	K25	S25	S35
5.0	<b>* SIM0022 H5</b>	75	22	22	K25	S25	S35
6.0	<b>* SIM0016 H6S</b>	75	16	20	K25	S25	S35S
6.0	<b>SIM0016 H6</b>	88	16	20	K25	S25	S35
6.0	<b>SIM0020 H6</b>	88	20	20	K25	S25	S35
6.0	<b>* SIM0022 H6</b>	88	22	22	K25	S25	S35
8.0	<b>SIM0020 H8</b>	88	20	20	K25	S25	S35
10.0	<b>SIM0020 H10</b>	88	20	20	K25	S25S	S35







\*Can also be used with Swiss type lathe machines

## Tiny Bar Holders Ordering Codes

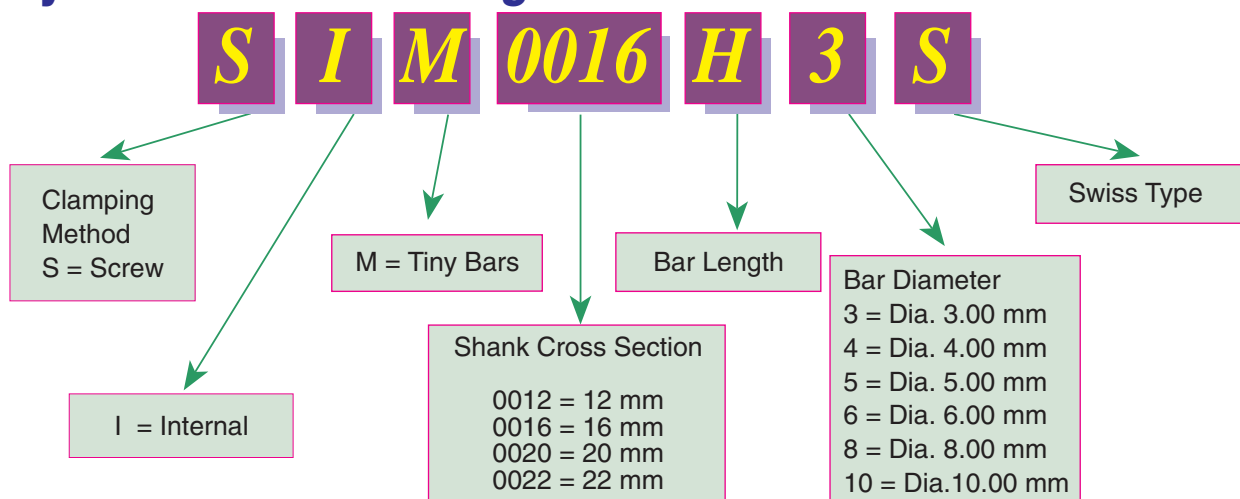










## Tiny Tools Kits



KT4-20	KT5-20
MTR 4 R0.2 L10	MTR 5 R0.2 L15
MPR 4 R0.2 L10	MPR 5 R0.2 L15
MIR 4 L15 A60	MIR 5 L15 A60
MCR 4 R0.2 L15	MCR 5 R0.2 L15
MGR 4 B1.5 L10	MGR 5 B1.5 L15
MFR 4 B1.0 L15	MFR 5 B1.0 L22
SIM 0020 H4	SIM 0020 H5
K25	K25

-  Boring
-  Profiling
-  Threading
-  Chamfering
-  Grooving
-  Face Grooving

Tiny Tools Bar Holder



Order example: KT4-20

Also available are kits with a 16mm or 22mm shank diameter bar holder.

Order example: KT4-16

# Technical Section

Carbide Grade: **BXC (P30 - P50, K25 - K40)**

PVD TiN coated grade for low cutting speed, Works well with a wide range of stainless steels.

## Cutting speed for Tiny Tools

ISO Standard	Materials	Cutting Speed m/min
<b>P</b>	Low & Medium Carbon Steel	20-140
	High Carbon Steel	30-100
	Alloy Steels & Treated Steels	40- 90
<b>M</b>	Stainless Steels	20- 90
	Cast Steels	40- 90
<b>K</b>	Cast Iron	40-120
<b>N</b>	Non-Ferrous & Aluminium	50-120
<b>S</b>	Super alloy and Titanium	15- 30
<b>H</b>	Hard Materials	13- 30

**Recommended Feed Rate: 0.01 - 0.03 mm/rev**

## Threading Passes

Pitch:	mm	0.5	0.7	0.8	1.0	1.25	1.5
	TPI	48	36	32	24	20	16
Number of Passes		6-12	7-14	7-16	8-18	8-20	10-22





