



Past 50 years of challenge, Next 50 years of creativity.

KORLOY

2016-2017 KORLOY CUTTING TOOLS

TOOLING SYSTEM


TURNING

MILLING

DRILL

BRAZED TOOLS

CHIP BREAKERS




DRILL

ENDMILLS

GRADES

TECHNICAL INFORMATION



50th Anniversary Since 1966





50 Years KORLOY

Past 50 years of challenge, Next 50 years of creativity.



CONTENTS

GRADES & CHIP BREAKERS

TURNING

MULTI FUNCTIONAL TOOLS

A Grades

A02 Korloy grades system

Turning Grades

A03 Turning grade selections

A04 CVD coated grades

A11 PVD coated grades

A13 Uncoated grades

A15 Cermet grades

A18 Coated Cermet grades

Milling Grades

A20 Milling grade selections

A21 CVD coated grades

A23 PVD coated grades

A26 Uncoated Carbide grades

A27 Milling Cermet grades

B Turning Chip Breakers

B02 Application range of Korloy main Chip Breakers

B04 Recommended Chip Breakers for workpiece

B12 New chip breakers

Inserts

B18 Turning Insert Code System (ISO)

B20 Turning Insert (Negative)

B55 Turning Insert (Positive)

B79 Aluminum Insert (Positive)

B87 cBN Inserts

B91 PCD Inserts

External Tool Holder

B93 External tool Holder

B98 Features of Double clamp / lever lock system

B99 Double clamp system

B104 Lever Lock System

B112 Wedge Clamp System

B114 Clamp on System

B116 Multi Lock System

B123 Screw on System

B130 Ceramic Holder

Boring Bar

B132 Boring Bar

B136 Double clamp system

B138 Lever Lock System

C Application Example

C02 Application Example

C04 Technical Information for Multi Functional tools

KGT Series

C07 KGT Series

C22 KGT Blade for Parting off

MGT Series

C23 MGT Series

MGT Aluminum Wheel Series

C37 MGT Aluminum Wheel

A Solid Endmills & Solid Drills

A28 Solid Endmills grade selections

A29 Ultra fine grain cemented carbides

A30 Solid Drills grade selections

Others(turning / milling / endmills)

A31 Diamond coated grades

A32 cBN grades

A37 PCD grades

Chip Breakers

A38 Chip Breaker for Turning

A41 Chip Breaker for Milling

A43 Chip Breaker for Drilling

B Boring Bar

B141 Clamp on System

B142 Multi Lock System

B144 Screw on System

B150 Compact Mini

B153 Carbide Shank Boring Bar

HSK/ KM Tooling system

B156 Technical Information

B159 HSK tooling system

B165 KM tooling system

Cartridges

B169 Cartridges

B171 Clamp on System

B173 Screw on System

Save Turn

B175 Save Turn Technical Information for Save Turn

B176 Save Turn

Auto tools

B182 Technical Information for Auto tools

B183 ISO / Blade / Multi Utility type

B194 KGT / MGT type

B197 MSB Tool type

B203 Sleeve

C Saw-man

C41 Saw-man

TB-M/TB

C44 TB-M/TB

Grooving / Parting off

C45 TBH

C46 IGH / DBH

C47 GFT / GFIP

C48 GH / GFIK

C49 EH / PH

New Fine Tools

C50 New Fine Tools

MULTI FUNCTIONAL TOOLS

THREADING

C Multi Turn

C53 Multi Turn

Bearing Solutions

C56 Bearing Solution

D Threading Code System

D02 Threading Holder / Insert Code System

Technical Information for Threading

D03 Technical Information for Threading

D09 Threading Insert with Chip Breaker

Thread Inserts

D10 Partial profile 60°/ Partial profile 55°

D12 ISO Metric

D16 American UN
(UN, UNC, UNF, UNEF, UNS)

D18 Whit Worth (BSW, BSF, BSP, BSB)

D22 British Standard Pipe Thread

D22 National Pipe Thread (NPT / NPTF)

D23 Round DIN405 (RD)

D24 Trapez DIN103 (TD)

D24 American ACME

D25 Stub ACME

E Insert

E02 Milling Insert Code System (ISO)

E04 Milling Inserts

E24 KORLOY Cutters

E31 KORLOY Shanks

E33 KORLOY Modular Adaptors

Face Milling Cutters

E34 Mill-max
Mill-max Plus (E35, E41)

E44 Turbo Mill

E47 Double Mill

E49 Power Buster

E54 Rich Mill

E102 Aero Mill / Aero Mill plus / Aero Mill Mini

E110 PCD face cutter

Cutters for Molds

E111 Alpha Mill

E143 BT / HSK Tooling System

E144 BT Tooling System (Single Edge)

E147 HSK Tooling System (Single Edge)

E150 BT Tooling System (Multi Edge)

E154 HSK Tooling System (Multi Edge)

E158 BT Tooling System(modular)

E159 HSK Tooling System(modular)

E160 Technical Information for Future Mill /
FMR P-Positive

E175 Future Mill

E199 Future Mill P-Positive

E208 HRMDouble

E223 HRM

C Special Order Form

C63 Special Order Form for MGT

C65 Special Order Form for V-Pulley Insert

D Thread Inserts

D26 UNJ (Unified Constant Thread)

D28 American Buttress (ABUT)

D28 British Buttress (BBUT)

D29 Metric Buttress (SAGE) / AP2

D30 API Buttress Casing

D30 API Round Casing & Tubing

D30 Extreme Line Casing

Thread Holders

D31 External / Internal Holder

D33 Vertical Type Holder

Thread Milling

D34 Technical Information for Thread Milling

D44 Thread Milling Inserts

D49 Thread Milling Holder

Solid Threading Endmills

D50 Solid Threading Endmills

E Cutters for Molds

E228 Tank Mill

E229 Laser Mill / BFE / GBE / BRE

E247 HAVE

E249 HAVE (Single Edge / Multi Edge)

E251 O-Ring Cutter

E253 Chamfer Tool

E261 T-Cutter

Milling Cutter for Aluminum

E262 Technical Information for Pro-A Mill /
Pro-X Mill / Pro-L Mill

E269 Pro-A Mill

E272 Pro-X Mill

E277 Pro-L Mill

E280 HSK Tooling System (Single Edge)

E281 Modular Adaptor

Side Milling Cutters

E283 Side Milling Cutters

E289 Side cutter

E294 Wind Mill

Milling Cutter for Cast iron at high feed

E298 Technical information for High feed Cutter

E300 Technical information for Storm Mill

E301 Technical information for Shave Mill /
Shave Mill Ultra

E304 Technical information for Cube Mill / Couple Mill

E307 High feed Cutter

E315 Shave Mill / Shave Mill Ultra

MILLING

CONTENTS

MILLING

E Detail Information of Milling Cutter and Arbor

E318 Actual Designation of Milling Cutter and Arbor

E Gear Tools

E321 Gear Cutter
E331 Gear Cutter Order Form
E332 Indexable Hob Special Order Form
E334 Special Boring Tool Order Form

ENDMILLS

F Technical Information for Endmills

F02 Endmill Code System
F04 KORLOY Endmills

Solid Endmills

F08 H-Max
F13 H Endmill
F18 V Endmill
F21 I-Max
F44 Z Endmill
F51 I+ Endmill
F66 F Endmill
F69 Micro Endmill
F71 Solid Endmills for Hard-to-cut material

F Solid Endmills

F74 S+ Endmill
F77 Solid Endmill for Aluminum
F80 A+ Endmill
F85 C-Max
F89 D-Max
F92 PCD Endmill

Brazed Endmills

F94 Brazed Endmill

Special Endmill Order Form

F100 Special Endmill Order Form

DRILL

G Technical Information for Drills

G02 KORLOY Drills
G04 Available Insert

Indexable Drills

G06 KING DRILL
G21 KING DRILL(for through coolant system with a lathe)
G25 KING DRILL(for large diameter drilling)
G27 TPDC
G32 TPDB
G39 Technical information fo WPDC
G42 Center Drill
G43 WPDC

Solid Drills

G45 Mach Drill +
G52 Mach Drill

G Solid Drill

G64 Mach long Drill +
G69 Mach long Drill
G73 Vulcan Drill
G76 Carbide Drill
G79 Burnishing Drill
G80 Top solid Drill
G81 PCD Drill
G82 Gun Drill

Reamer

G88 Indexable Reamer
G94 Chucking / Machine Reamer
G97 PCD Reamer
G98 Cermet Reamer
G99 Broach Reamer

BRAZED TOOLS

H Technical Information for Brazed Tools

H02 KORLOY Ultra-Fine Grades : F-Series
Corrosion & Magnetism Proof Grade : IN-Series

General Cutting Tools

H03 Cemented Carbide, Cermet Blank, Square Blank
H06 Round bar Blank / Ring Blank
H07 Helix Blank / Square Bits
H09 Auto Tool Bits
H10 Chuck Jaw

H Mining & Construction Tools

H11 Cemented carbide blank for taper bits
H12 Cemented carbide blank for cross bits
H12 Boring Crown Blank / Bit for Construction

Rotating Brazing Tools

H13 Rotating Brazing Tool
H14 Special Rotating Brazing Tool Order Form

TOOLING SYSTEM

I Tooling System

I 02 DBT Series
I 03 HSK Tooling System
I 04 Balancing System
I 05 Tooling System Index
I 06 DHE Series
I 09 DSC Series
I 17 CPM Series

I Tooling System

I 19 NPM Series
I 21 DCS / DC / TC
I 22 Collet Chuck Series
I 23 SDC Series
I 29 HPS Series
I 31 GSK Series
I 33 DSK Series

TOOLING SYSTEM

I Tooling System

- I 36 GERC
- I 39 DST Series
- I 41 NPU
- I 42 DTN Series
- I 44 TCA / TER
- I 46 Side Lock Arbor Series
- I 48 Face Mill Arbor Series
- I 51 Morse Taper Arbor Series

I Tooling System

- I 52 Angular Head Series
- I 60 FBH Series
- I 64 TBC / FBC Series
- I 67 FBB / DBC / KMB
- I 70 SMB / SMH
- I 72 Modular System / Modular Arbor
- I 75 EXT Bar / RDC Bar
- I 77 DAMPING PRO
- I 84 Others

TOOLING EXAMPLES

J Industrial Tooling Example

- J02 Gear Machining Solution
- J04 Ship Building Industrial Solution
- J07 Role Machining Solution
- J08 Railway Industrial Solution
- J10 Pipe Industrial Solution
- J12 Bearing working Solution
- J13 Development Industrial Solution
- J14 Aviation Industrial Solution
- J18 Slitter Knife

J Automobile Tooling Examples

- J19 Crankshaft
- J20 Knuckle
- J22 Brake
- J24 Connecting Rod
- J26 Block
- J28 Head

PARTS

K Parts

- K02 Shim
- K03 Cartridge / Chip Breaker
- K03 Chip Cover / Clamp
- K04 Coolant Bolt / Wrench Bolt
- K04 Lever
- K05 Locator / Nut

K Parts

- K05 Pin / Screw
- K06 Shim Pin
- K07 Spring / Wrench
- K07 Stop Ring / Washer
- K07 Stopper / Nozzle

TECHNICAL INFORMATION

L General Information I

- L02 Workpiece material grades
- L06 Steel, Non-ferrous metal symbol list
- L07 SI unit conversion table
- L08 Hardness calculating table
- L09 Properties of Korloy grades
- L10 Technical Info. for Stainless steel

Technical Information

- L12 Technical Information for Turning

L Technical Information

- L20 Technical Information for Milling
- L24 Technical Information for Tapers
- L27 Technical Information for Endmills
- L30 Technical Information for Drills

General Information II

- L36 The comparison of chip breakers
- L37 KORLOY Grades
- L42 The comparison of grades for Turning / Milling

OLD-FASHIONED PRODUCT INFORMATION

M Old-fashioned product information

- M02 Grade
- M02 External Holder
- M03 Fine Tool
- M03 Threading Tool

M Old-fashioned product information

- M03 Mill-Max
- M04 Gen-Mill
- M04 Jip Drill
- M04 LPD / SPD / NPD

INDEX

N INDEX



SAFETY GUIDE OF CARBIDE PRODUCTS

**KORLOY Inc. is continuously trying to develop safer and higher quality products
Please be aware of the safety guidelines below prior to using KORLOY Inc. products**

- It is generally accepted that the proper handling of cemented carbide tools requires awareness of safety as noted above. For more information, please contact us.
- KORLOY does not accept any responsibility for any accident caused by inappropriate use, abuse of tools, or changes to the products.

1. PL (Product Liability)

In accordance with the PL (Product Liability) law, we have attached a WARNING label on the case of KORLOY products. There is no warning on the surface of the tools. Please read this safety guidelines before using carbide tools and provide safety education to all users.

2. Basic characteristics of CEMENTED CARBIDE tools

Cemented carbide tools are made of carbides, nitrides, carbonitrides, oxides of Tungsten(W), Titanium(Ti), Alluninum(Al), Silicon(Si), Tantalum(Ta), Boron(B) etc and metal omponent like Cobalt(Co), Nickel(Ni), Chrom(Cr), Molybdenum(Mo) as binder. Cemented carbides tools have high hardness and specific gravity.

Generally there's no smell but according to usage and treatment, appreance and color could be changed

3. Precaution for CEMENTED CARBIDE tools

- 1) Cemented carbides are extremely hard and brittle at the same time.
Impact shock or excessive clamping power could cause fracture or breaking of the tool.
- 2) Cemented carbides have large sepcific gravity, thus they require special attention as a heavy material when you handle big sizes or large quantities.
- 3) Cemented carbides have different thermal expansion coefficient with steel and ferrous materials. Shrink fit or swell fit products may cause trouble if they are used at undesirable conditions like extremly high or low temperatures.
- 4) There are several cemented carbide products having sharp cutting edges.
Be careful not to handle the tools with bare hands which may cause cuts or injury, especially when removing the tools from the case, do not touch the cutting edge and be careful not to drop it.
- 5) Storing carbide tools in a corrosive atmosphere may cause erosion which can reduce toughness.
- 6) Please refer to the catalouge safety guidance prior to handling the tools.
- 7) Do not absue tools under inappropriate conditions.

4. Precaution for machining (grinding, welding, EDM) of CEMENTED CARBIDE tools


- 1) Surface condition can affect the toughness of the tool, so it is recommended to use a diamond grinding wheel.
- 2) Grinding of cemented carbide creates mist and dust. It contains harmful compositions like Cobalt(Co), thus it is recommended to use a mask, mist collection, and other protective facilities. If the dust gets in your skin or eye, rinse immediately with continously running water.
- 3) In case of grinding with coolant, coolant contains harmful metal components which cause environmental problems.
Handle the coolant according to the manufacturer's recommendations.
- 4) Check for cracks after re-grinding carbide tool and reuse.
- 5) Marking with laser or electric pen may cause cracks on the carbide tool. The crack can shortened tool life.
- 6) EDM of carbide may cause residual cracks on the carbide tool, so if necessary , remove the crack with a grinding process.
- 7) Brazing of carbide tools at extremly high or low temperatures compare with the melting point of brazing materials may cause loosening or breakage.
- 8) Overheating a oil base coolant may cause a fire or flames, thus be prepared for fire prevention.

5. METALCUTTING SAFETY


	DANGEROUS FACTOR	SAFETY COUNTERPLAN
Cutting tools	· Sharp cutting edge of cutting tools may cut your bare-hand	· Use gloves when pulling out the insert from the case or mounting it on the machine
	· Inappropriate conditions or usage may cause fragmentation and expel parts of tools which may cause injury	· Use glasses or safety cover for your safety · Use the tools within the recommended range · Please refer to catalogue and safety guidelines first.
	· Severe load on tool and premature wear of cutting edge may bring excessive cutting force on tool, causing fracture of the tool and may cause injury	· Use glasses or safety cover for your safety · Change the tool as required before excessive wear or fracture
	· Chips evacuated during cutting are hot and sharp and may cause burns and cuts	· Use glasses or safety cover for your safety · Stop machining and put safety glove on and use a hook tool to remove chips
	· Touching the workpiece immediately after cutting may cause burns	· Use gloves or safety cover for your safety
	· Be aware of sparks, fire, or explosion of hot chips generated during the cutting operation	· Do not use at the place where having explosive materials · Prepare for fire extinguishments
	· In case of high RPM machining, vibration and chattering may occur due to the improper balance of the machine	· Use glasses or safety cover for your safety · Check first if there's any chattering, vibration or strange noises prior to your main cutting operation
	· Touching a burr remaining on the workpiece with a bare-hand may cause a cut	· Do not touch the burr with bare-hand · Use gloves or safety cover for your safety
	· Loose clamping of the workpiece may cause the tool to fracture and result in damage to the cutter body and possible injury	· Clamp the workpiece tightly
Indexable tools	· Tools are operated to right-hand direction normally. Left-hand direction operation can cause fracture of tool and body damage	· Do not use left-hand direction without notice · Check the package of product to check the availability of left-hand operation
	· Loose clamping of inserts and parts may result in ejection of the tool during cutting and may cause serious injury	· Check the clamping of inserts and parts prior to machining, and use original parts only
	· Over loaded clamping of inserts by a lever (such as a pipe) may cause dangerous fracturing of parts and inserts	· Do not use lever inappropriately
Rotating tools	· In case of high speed machining, parts and inserts can be forced out by centrifugal force	· Use within recommended condition · Use glasses or safety cover for your safety
	· Since cutter has sharp cutting edges touching with a bare-hand may cause a cut	· Use gloves or safety cover for your safety
	· It is dangerous to use glove with rotating machine · Contact with body or clothes is dangerous with rotating parts	· Do not wear gloves when you work with rotating machine · Keep your body and clothes away from rotating machine
	· Vibration generated by balancing trouble may cause a fracture and ejection of the tool which may cause serious injury	· RPM should be controlled within recommended condition · Check the balance of rotating part periodically
	· In case of drilling, the uncut bottom core can fly out of the part with high speed and cause serious injury	· Use gloves or safety cover for your safety
Brazed tools	· The edges of small diameter drill are sharp and easy to break	· Use gloves or safety cover for your safety
	· Fragmentation and ejection of brazed carbide tip may cause injury	· Check the brazed tip before using. · Do not use at high temperature cutting condition
ETC	· There's a possibility of breaking the carbide tip after several brazing	· Do not use brazing a tip that has been brazed several times
	· Abusing may cause fragmentation of tool and is very dangerous.	· Stick to safety regulations and guidelines

KORLOY Inc. Code System

Grade Name for Coated Carbide

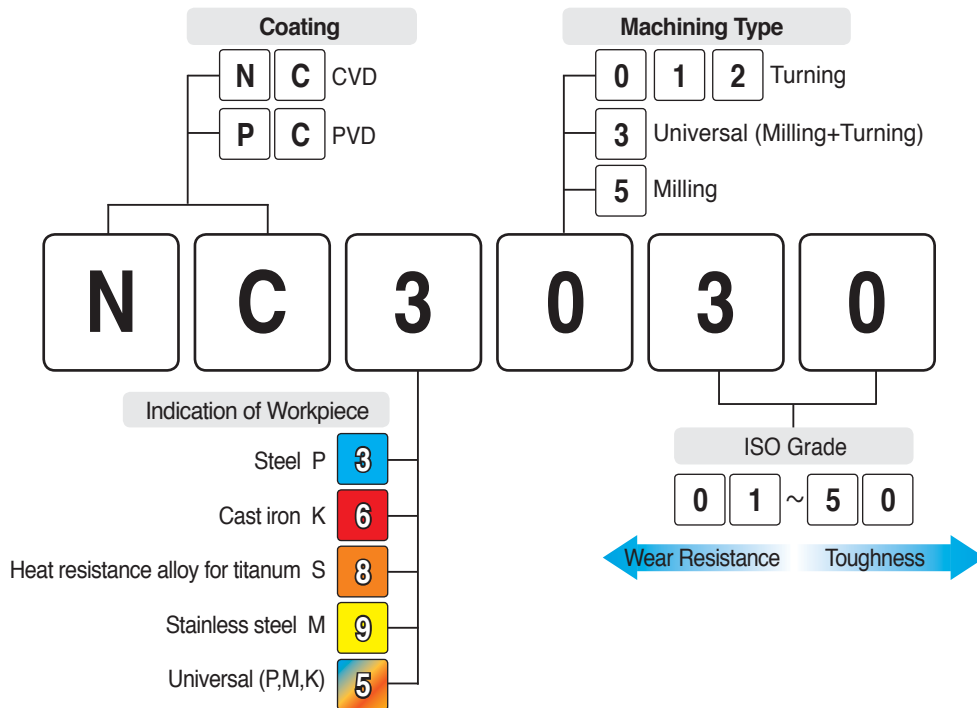

Chip Breaker

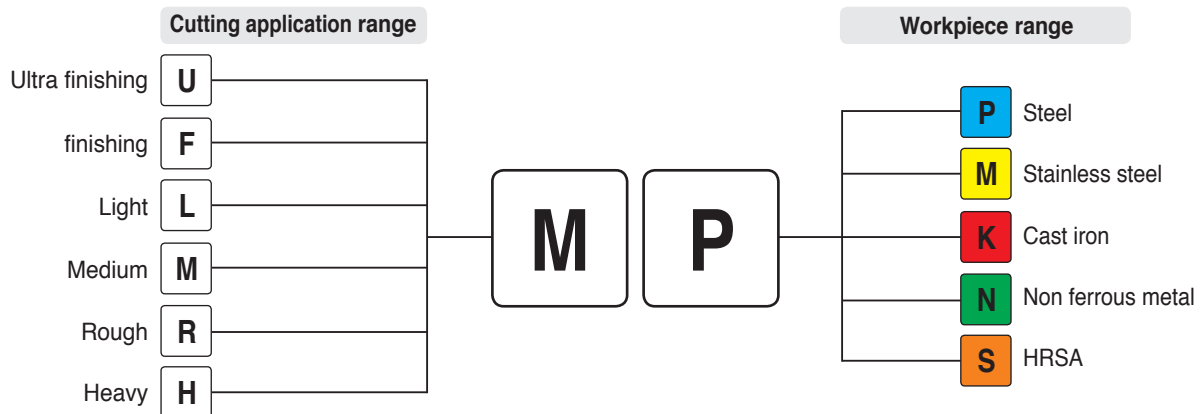


The same chip breaker code is used for both negative type and positive type.


Terminology of tool formula

TERM	CODE	UNIT
Tool diameter	D	mm
Cutting speed	vc	m/min
Revolution per minute	n	min ⁻¹
Feed per minute	vf	mm/min
Feed per revolution	fn	mm/rev
Feed per tooth	fz	mm/t
Tooth	z	
Axial depth of cut	ap	mm
Radial depth of cut	ae	mm
Peak feed	pf	mm

TERM	CODE	UNIT
Horse power requirement	Pc	kW
Specific cutting resistance	kc	MPa
Torque	Mc	N.m
Thrust	Tc	N
Cycle time	tc	min
Tool life	T	min
Flank wear	V _B	mm
Crater wear	Kt	mm
Nose radius	r	mm

How to use Tool4U (Web quotation requirement)

- 1** Contact with Korloy Homepage
<http://www.korloy.com> (Korloy homepage)
- 2** Click  Tool4U banner-icon on the web site
- 3** Main page

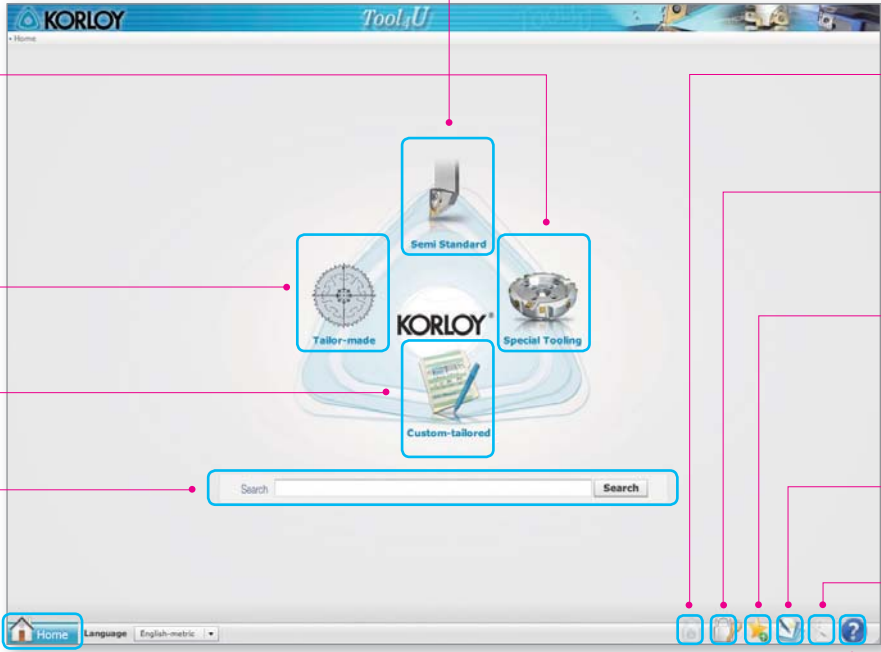

1 Semi standard
Standard but different in size

2 Tailor-made
Standard no korloy item

3 Special Tooling
For special tolling such as gear, edge miller, railway, non-standard indexable & facemill

4 Custom-tailored
Customized item by special request

5 Search
You can search by designation

6 Home
Click here to go on to the mail page

7 Administrator
Only administrators may access this menu

8 Login/Logout
Login, Logout & Register as a member here

9 My favorite
You can organize shortcuts on your favorite items (registered member only)


10 Memo
You can save short text here

11 My quotation
You can check your quotation list here

12 Help
Functional description of each menu

3 Screen shot

• Screen shot 1 : step3. Product detail

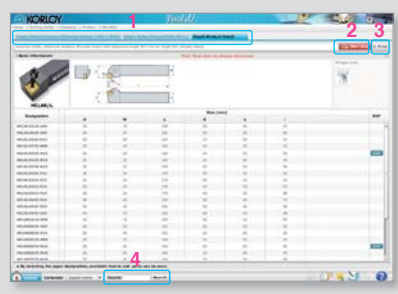

- 1. Step** : Select category, product and check product detail
- 2. Next step** : Open new window for changing dimension
- 3. Print** : Print current page
- 4. Search** : Search product by designation

• Screen shot 2 : Size input page



Enter essential information needed to quote and click "Quote" button to send e-mail

A

GRADES & CHIP BREAKERS

Korloys new grades are designed with optimal substrates for each application and are PVD coated for high temperature, high hardness and oxidation resistance, or CVD coated for high temperature and wear resistance. Additionally, the improved post-coating treatment provides superior surface finishes to ensure the highest levels of quality and productivity.





Grades

A02 Grades system

Turning Grades

- A03 Turning grade selections
- A04 CVD coated grades
- A11 PVD coated grades
- A13 Uncoated Carbide grades
- A15 Cermet grades
- A18 Coated Cermet grades

Milling Grades

- A20 Milling grade selections
- A21 CVD coated grades
- A23 PVD coated grades
- A26 Uncoated Carbide grades
- A27 Milling Cermet grades

Solid Endmills & Solid Drills Grades

- A28 Solid Endmills grade selections
- A29 Ultra fine grain cemented carbide
- A30 Solid Drills grade selections

Others (Turning/Milling/Endmills)


- A31 Diamond coated grades
- A32 cBN grades
- A37 PCD grades

Chip Breakers

- A38 Chip Breaker for Turning
- A41 Chip Breaker for Milling
- A43 Chip Breaker for Drilling

Grades system

Cutting Tool	Uncoated carbide	P	Steel	ST05E	ST10P	ST15	ST20E	A30	ST30N	ST30E	ST40E	ST45	ST46	
		M	Stainless steel	U10E	U2	A30	A40							
		K	Cast iron	H01	H2	H05	H10	G10E						
		S	Titanium alloy	H01	H05									
		N	Non-ferrous metal	H01	H05									
		H	Hardened steel	H01										
	Coated carbide for turning	P	Steel	NC3010	NC3215	NC3220	NC3225	NC3120	NC3030	NC5330	NC500H			
		M	Stainless steel	PC8105	PC8110	PC8115	NC9025	NC5330	PC5300	PC9030	PC5400			
		K	Cast iron	NC6205	NC6210	NC6215	NC5330	PC5300	PC5400					
		S	HRSA	PC8105	PC8110	PC8115	NC5330	PC5300	PC5400					
		N	Non-ferrous metal	ND1000	PD1000									
		H	Hardened steel	PC8110	PC8115									
	Coated carbide for milling	P	Steel	NC5330	NC5340	NCM325	PC3500	PC3600	PC5300	PC5400	NC5350	NCM335	PC3545	
		M	Stainless steel	NC5330	NC5340	NCM325	PC5300	PC9530	NC5350	NCM335	PC5400			
K		Cast iron	PC8110	PC6510	NC5330	PC5300	NC5340	PC5400						
S		HRSA	PC5300	PC5400										
N		Non-ferrous metal	ND2000	PD2000										
H		Hardened steel	PC2005	PC2010	PC2015	PC210F								
Coated carbide for Drills, Endmills	P	Steel	PC3500	PC5300	PC5335	PC5400	NC5335							
	M	Stainless steel	PC5300	PC5335	PC5400									
	K	Cast iron	PC6510	PC5300										
	S	HRSA	PC5300	PC5400										
	N	Non-ferrous metal	H05											
Turning Cermet	P	Steel	CN1500	CN2000	CN2500	CN20								
	K	Cast iron	CN1500	CN2500										
Coated cermet	P	Steel	CC1500	CC2500	CC125									
Milling Cermet	P	Steel	CN2000	CN20	CN30									
Solid Endmills	P M K	General	PC203F	PC210F	PC215F	PC220	PC221F	PC303S	PC310U	PC315E	PC320	PC325	FA2	
	S	HRSA	PC210	PC220	PC320	PC325								
	H	Hardened steel	PC203F	PC303S	PC310U									
	N	Non-ferrous metal	ND3000	PD3000	PC210C	H01	H05S	FA2						
Solid Drills	P M K	General	PC205F	PC325U	PC215G	PC315G	PC230F							
	N	Non-ferrous metal	FG2											
cBN	K	Cast iron	DBN500	DBN700	DBN800									
	S	HRSA	DBN700											
	H	Hardened steel	DBNX10	DBNX20	DBNX25	DB1000	DB2000	DBN250	DBN350	DBN700				
Coated cBN	H	Hardened steel	DNC100	DNC250	DNC350	DNC400								
PCD	N	Non-ferrous metal	DP90	DP150	DP200									
Wear resistance Tool	Ultra fine grain cemented carbide	Z	Ultra fine grain cemented carbide	FS1	FA1	FCC								
	Uncoated carbide	V	Wear parts	D1	D2	D3	G5	G6	K20G					
		I	Corrosion resistance	IN10	IN20	IN40								
Mining Tool	Uncoated carbide	E	General	GR10	GR20	GR30	GR35	GR40	GR50					

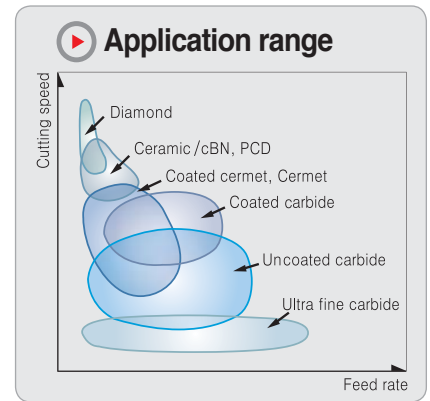


The best way to choose KORLOY turning inserts

Selection system

Workpiece	Steel					Stainless steel				Cast iron				Nonferrous				HRSA				Hardened				
ISO	P01	P10	P20	P30	P40	P50	M10	M20	M30	M40	K01	K10	K20	K30	N01	N10	N20	N30	S01	S10	S20	S30	H01	H10	H20	H30
Coated carbide	NC3010, NC3215, NC3220, NC3225, NC3120, NC3030, NC500H, NC5330, PC5300, PC5400					PC8105, PC8110, PC8115, NC9025, NC5330, PC5300, PC9030, PC5400				NC6205, NC6210, NC6215, NC5330, PC5300, PC5400				ND1000, PD1000				PC8105, PC8110, PC8115, NC5330, PC5300, PC5400				PC8110, PC8115				
	CN1500, CN2000, CN2500, CN20									CN1500, CN2500																
										DBN700, DBN800, DBN500				DP90, DP150, DP200				DBN700				DNC100, DNC250, DNC400, DNC350				
	ST05E, ST10P, ST15, ST20E, A30, ST30N, ST30E, ST40E, ST45, ST46					U10E, U2				A40				H01, H2, H05, H10, G10E				H01, H05				H01				
Cermet																										
cBN / PCD																										
Uncoated carbide																										

Application range of turning grades

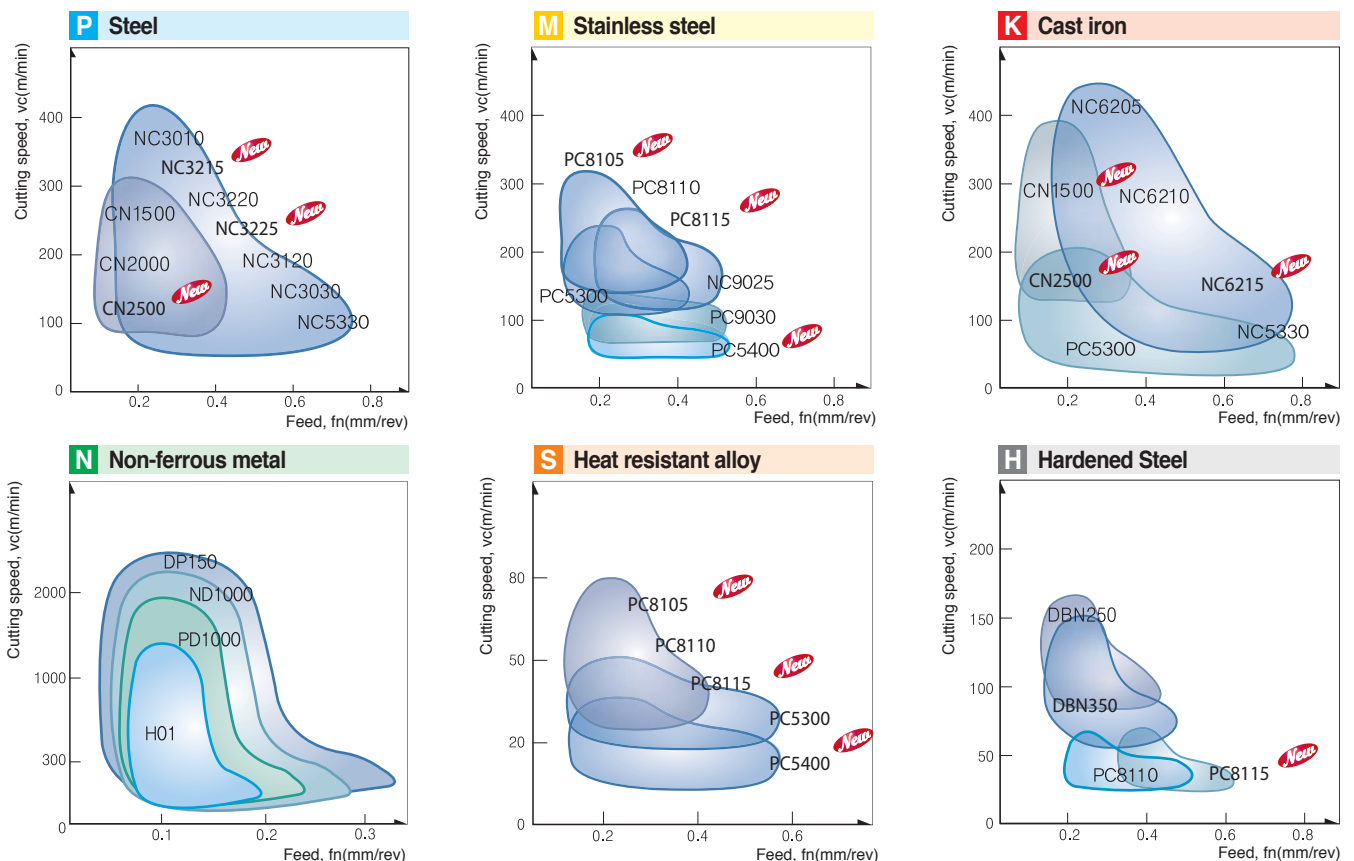

CVD coated Grades

Grade for all applications of steel

NC3215 *New* / NC3225 *New*

- Universal grade especially for machining forged automobile components and bearing steel both in continuous and interrupted cutting
- Available for all kinds of steels - carbon steel, alloy steel, rolled steel, tool steel, mild steel, bearing steel and other special kinds of steel
- New coating technology increases welding resistance and chipping resistance, which leads to longer tool life.



▶ Features

<p>Unstable tool life</p> <p>Flaking</p> <p>Built-up edge</p> <p>Competitor</p>	<p>Stable tool like</p> <p>Less Flaking</p> <p>Less built-up edge</p> <p>NC3215 / NC3225</p>
<p>Poor wear resistance</p> <p>Wear on rake surface</p> <p>Severe VB wear</p> <p>Competitor</p>	<p>Increased wear resistance</p> <p>Less wear on rake surface</p> <p>Little VB wear</p> <p>NC3215 / NC3225</p>
<p>Previous coating</p>	<p>New coating</p>

▶ Disperse cutting force → Reduce chipping → Increase tool life → **Improved productivity**


Grade for all applications of steel

NC3220

- NC 3220 covers a wide application range for all kinds of steels (carbon steel, alloy steel, forged steel, rolled steel, tool steel, mild steel, bearing steel and other special steels) in both continuous and interrupted machining
- Improved surface roughness and lower cutting force ensure better lubrication and wear resistance on rake surface.

▶ Features

- TiN coating layer with superior welding resistance
- Al₂O₃ coating layer with superior heat resistance
- TiCN coating layer with superior chipping resistance
- Exclusive substrate material for coating with improved wear resistance.

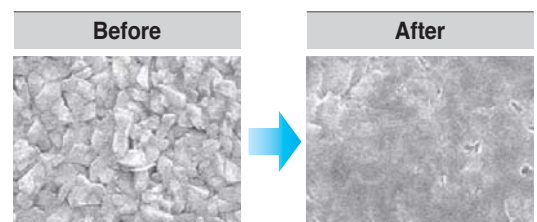

New technology of surface treatment improves welding resistance and stability in machining.



CVD coated Grades

Universal grade for cast iron **NC6215** *New*




- Universal grade for machining cast iron in continuous/interrupted cutting including gray cast iron(GC) and ductile cast iron(GCD)
- New coating technology increases welding resistance and chipping resistance, which leads to longer tool life.


▶ Features

- ▶ Flaking occurs at competitor's in interrupted machining of cast iron.
-> KORLOY's new coating technology **ensures better flaking resistance**

- ▶ Damage on blade occurs at competitor's in interrupted machining of cast iron.
-> KORLOY's high toughness substrate(K15) **ensures stronger cutting edge**

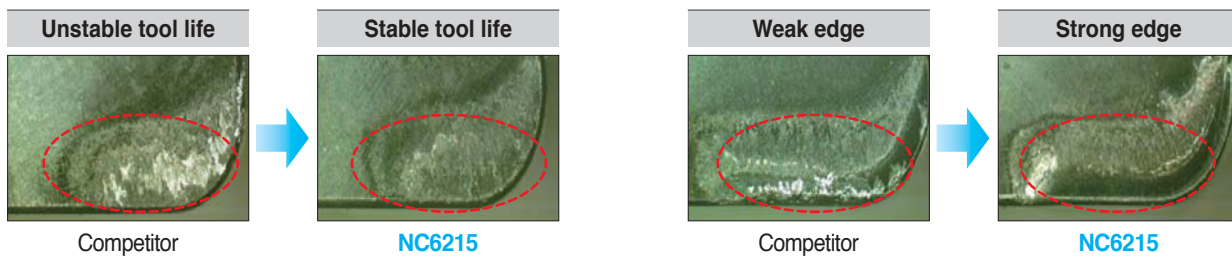



- ▶ Heavy wear occurs at competitor's in continuous / interrupted machining of cast iron at high feed.
-> KORLOY's new chip breaker 'VR' for high feed machining increases wear resistance.

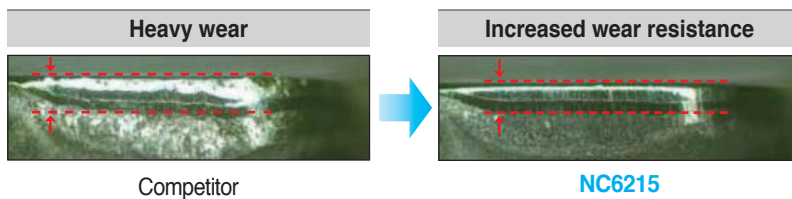

Turning grade for cast iron **NC6205 / NC6210**

- NC6205 - Superior cutting performance in continuous and high speed machining
- NC6210 - Stable tool life in continuous and interrupted turning

▶ Recommended cutting conditions and grade line-up

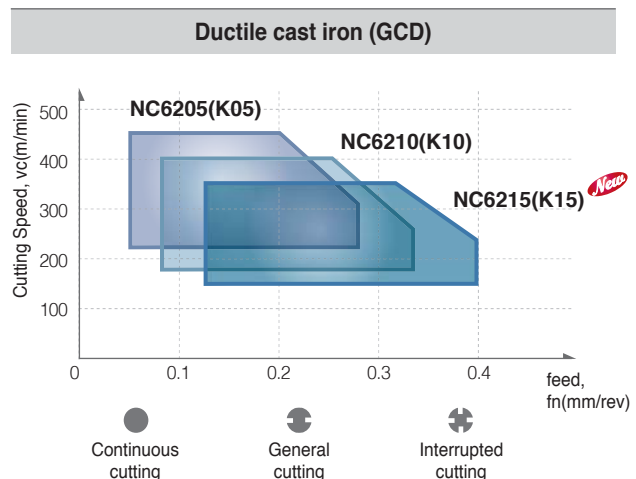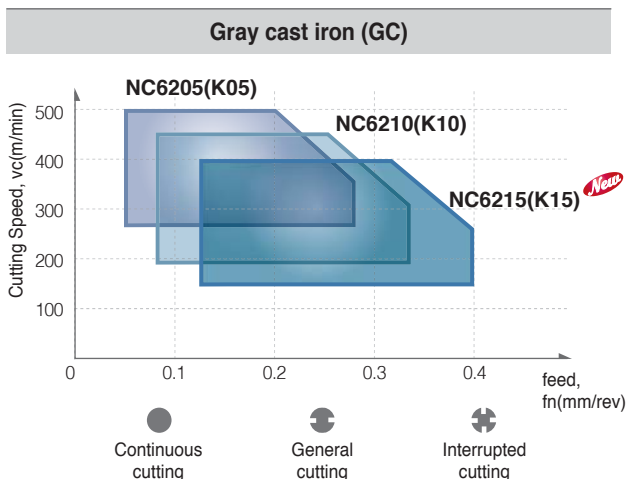

▶ Selection system

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	NC3010	295 (170 ~ 420)	P05	NC3010
		NC3215 <i>New</i>	295 (170 ~ 420)	P10	NC3215 <i>New</i>
		NC3220	260 (150 ~ 370)	P15	NC3220
	Interrupted cutting	NC3225 <i>New</i>	260 (150 ~ 370)	P20	NC3225 <i>New</i>
		NC3120	260 (120 ~ 370)	P25	NC3120
		NC3030	205 (120 ~ 290)	P30	NC3030
		NC5330	205 (120 ~ 290)	P35	NC5330
NC500H	205 (120 ~ 290)	P40	NC500H		
M Stainless steel	Continuous cutting	NC9025	240 (150 ~ 330)	M20	
	Interrupted cutting			M30	NC9025
				M40	NC5330
K Cast iron	Continuous cutting	NC6205	315(180 ~ 450)	K01	NC6205
		NC6210	250 (130 ~ 370)	K10	NC6210
	Interrupted cutting	NC6215 <i>New</i>	220 (130 ~ 310)	K20	NC6215 <i>New</i>
		NC5330	190 (110 ~ 270)	K30	NC5330
S HRSA	Continuous cutting	NC5330	40 (20 ~ 60)	S10	
	Interrupted cutting			S20	NC5330

▶ The features of CVD turning grades



CVD Coated grades	ISO	Features
NC3010	P05 ~ P10	<ul style="list-style-type: none"> • High speed cutting for steel • Combining excellent wear resistance substrate with chipping and heat resistance Al₂O₃ increased stability • MT-TiCN + Al₂O₃ + TiN
NC3215 <i>New</i>	P10 ~ P15	<ul style="list-style-type: none"> • Continuous machining of general steel and forged steel at high speed • Substrate with excellent thermal crack /plastic deformation resistance, coating with improved chipping resistance for continuous machining • MT-TiCN + Al₂O₃ + TiN
NC3220	P15 ~ P20	<ul style="list-style-type: none"> • Medium to high speed machining of steel • Universal grade combining substrate with wear resistance and toughness and Al₂O₃ coating with oxidation resistance and fracture resistance • Special treatment on the outermost layer • MT-TiCN + Al₂O₃ + TiN
NC3225 <i>New</i>	P20 ~ P25	<ul style="list-style-type: none"> • Universal grade for general steel and forged steel • 1st recommended grade for general machining with the use of high toughness substrate and coating layer with improved welding/chipping resistance • MT-TiCN + Al₂O₃ + TiN
NC3120	P20 ~ P25	<ul style="list-style-type: none"> • Medium to roughing for steel • Combining excellent fracture resistance substrate with chipping resistance and heat resistance Al₂O₃ increased stability • MT-TiCN + TiC + Al₂O₃
NC3030	P25 ~ P35	<ul style="list-style-type: none"> • Medium to low speed machining of steel and interrupted roughing • Harmony between substrate with excellent wear/fracture resistance and Al₂O₃ film with excellent thermal / chipping resistance • Increased stability in wide ranges of cutting conditions • MT-TiCN + TiC + Al₂O₃ + TiN
NC5330	P30 ~ P35 M25 ~ M35 K15 ~ K25 S15 ~ S25	<ul style="list-style-type: none"> • Stainless Steel/General Cutting for Mild Steel & Forging Steel • MT-TiCN + Al₂O₃ + TiN
NC9025	M25 ~ M35	<ul style="list-style-type: none"> • Stainless Steel/General Cutting for Mild Steel & Forging Steel • MT-TiCN + Al₂O₃ + TiN
NC500H	P25 ~ P35	<ul style="list-style-type: none"> • Heavy interrupted cutting for steel • Plastic deformation and fracture resistance substrate with chipping resistance and heat resistance Al₂O₃ increased stability in wide ranges of cutting conditions • MT-TiCN + TiC + Al₂O₃ + TiN
NC6205	K01 ~ K10	<ul style="list-style-type: none"> • General cutting for gray cast iron and ductile cast iron • High hardness substrate and improved adhesion of thick Al₂O₃ show superior wear resistance • MT-TiCN + Al₂O₃
NC6210	K05 ~ K15	<ul style="list-style-type: none"> • General cutting for gray cast iron and ductile cast iron • Tough substrate and improved adhesion of thick Al₂O₃ show superior wear resistance • MT-TiCN + Al₂O₃
NC6215 <i>New</i>	K10 ~ K20	<ul style="list-style-type: none"> • Universal grade for gray cast iron and ductile cast iron • High toughness substrate and adhesive Al₂O₃ coating layer ensure excellent cutting performance. • MT-TiCN + Al₂O₃



Cutting performance (NC3215 / NC3225)


P Alloy Steel (SNCM cast)

- **Workpiece** Part for engine
- **Cutting condition**
 - vc(m/min) = 100
 - fn(mm/rev) = 0.15
 - ap(mm) = 3.0
 - wet
- **Designation**
 - INSERT CNMG120408-MP(NC3225)
 - HOLDER PCLNR2525-M12
- **Test result**





P Carbon Steel (SM20C)

- **Workpiece** Part for fuel system
- **Cutting condition**
 - vc(m/min) = 250~380
 - fn(mm/rev) = 0.2~0.3
 - ap(mm) = 15~2.0
 - wet
- **Designation**
 - INSERT CNMG120412-MP(NC3215)
 - HOLDER PCLNL2525-M12
- **Test result**





P Carbon Steel (SM40C cold forging)

- **Workpiece** Part for steering
- **Cutting condition**
 - vc(m/min) = 170
 - fn(mm/rev) = 0.3
 - ap(mm) = 2.7~3.0
 - wet
- **Designation**
 - INSERT DNMG150408-MP(NC3215)
 - HOLDER DDJNL2525-M15
- **Test result**





P Carbon Steel (S55CR hot forging)

- **Workpiece** Part for steering
- **Cutting condition**
 - vc(m/min) = 230
 - fn(mm/rev) = 0.3
 - ap(mm) = 0.5~1.5
 - wet
- **Designation**
 - INSERT CNMG120408-MP(NC3225)
 - HOLDER PCLNL2525-M12
- **Test result**





P Carbon Steel (SM45C cold forging)

- **Workpiece** Part for steering
- **Cutting condition**
 - vc(m/min) = 200~250
 - fn(mm/rev) = 0.25~0.35
 - ap(mm) = 1.0~2.0
 - wet
- **Designation**
 - INSERT DNMG150612-LP(NC3215)
 - HOLDER DDJNL2525-M15
- **Test result**



P Alloy Steel (SCR420 cold forging)

- **Workpiece** Part for mission
- **Cutting condition**
 - vc(m/min) = 160
 - fn(mm/rev) = 0.13
 - ap(mm) = 1.0
 - wet
- **Designation**
 - INSERT DNMG150608-LP(NC3225)
 - HOLDER DDJNL2525-M15
- **Test result**




Cutting performance (NC3220)

P Alloy Steel (SCR420H, hot forging)

■ Cutting condition $vc(m/min) = 360\sim430$
 $fn(mm/rev) = 0.2$
 $ap(mm) = 1.2\sim1.5$
 (external machining / facing), wet

■ Designation **INSERT** CNMG120408-VB(NC3220)
HOLDER PCLNR2225-M12

■ Test result

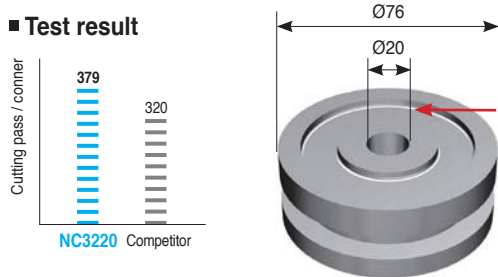


P Carbon Steel(S48C, cold forging)

■ Cutting condition $vc(m/min) = 280$
 $fn(mm/rev) = 0.2\sim0.25$
 $ap(mm) = 1$
 dry

■ Designation **INSERT** CNMG120412-VB(NC3220)
HOLDER PCLNR2525-M12

■ Test result

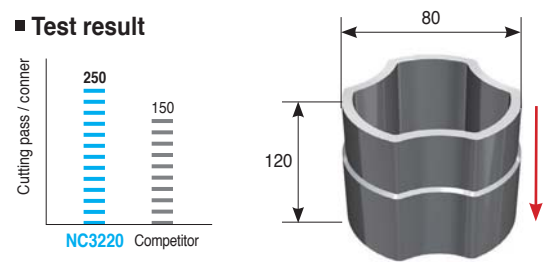


P Alloy Steel (SCM420H, hot forging)

■ Cutting condition $vc(m/min) = 80\sim500$
 $fn(mm/rev) = 0.15\sim0.3$
 (External machining / facing / grooving / tapping)
 $ap(mm) = 0.7\sim1.5$, wet

■ Designation **INSERT** DNMG150608-VB(NC3220)
HOLDER PDJNR2525-M15

■ Test result

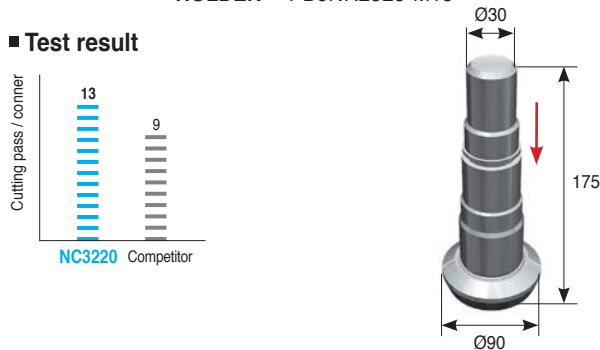


P Carbon Steel(S53C, cold forging)

■ Cutting condition $vc(m/min) = 280$
 $fn(mm/rev) = 0.2\sim0.25$
 (External machining / internal machining)
 $ap(mm) = 1$, dry

■ Designation **INSERT** DNMG150608-VB(NC3220)
HOLDER PDJNR2525-M15

■ Test result

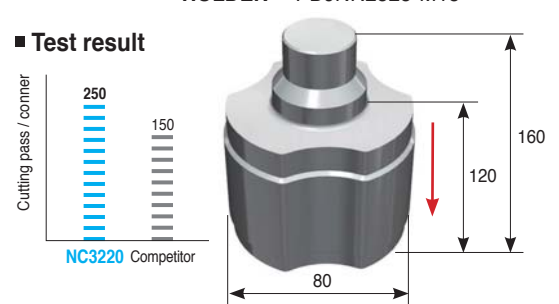


P Alloy Steel (SCR series, cold forging)

■ Cutting condition $vc(m/min) = 314$
 $fn(mm/rev) = 0.25$
 (external machining / facing)
 $ap(mm) = 1$, wet

■ Designation **INSERT** CNMG120408-VM(NC3220)
HOLDER PCLNR2525-M12

■ Test result

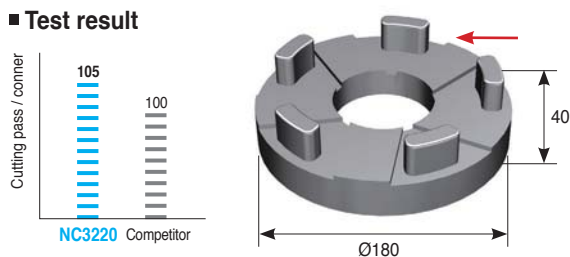


Cutting performance (NC6215)

K Ductile cast iron (GCD600)

- **Workpiece** Diff. case (Ø154)
- **Cutting condition** $vc(m/min) = 350\sim580$
 $fn(mm/rev) = 0.2\sim0.3$
 $ap(mm) = 1.5\sim2.5$, wet
- **Designation** INSERT WNMG080412-VR(NC6215)
HOLDER Special holder


■ Test result



K Ductile cast iron (GCD500)

- **Workpiece** Diff. case (Ø134)
- **Cutting condition** $vc(m/min) = 560$
 $fn(mm/rev) = 0.08\sim0.2$
 $ap(mm) = 1.5\sim2.5$, wet
- **Designation** INSERT WNMG080412-B25(NC6215)
HOLDER Special holder


■ Test result



K Gray cast iron (GC250)

- **Workpiece** Break disc
- **Cutting condition** $vc(m/min) = 550$
 $fn(mm/rev) = 0.3$
 $ap(mm) = 2$, wet
- **Designation** INSERT CNMG120412-VR(NC6215)
HOLDER PCLNR2525-M12


■ Test result



K Ductile cast iron (GCD500)

- **Workpiece** Pulley
- **Cutting condition** $vc(m/min) = 300$
 $fn(mm/rev) = 0.2$
 $ap(mm) = 1.2$, wet
- **Designation** INSERT WNMG080408-VR(NC6215)
HOLDER Special holder



■ Test result



K Ductile cast iron (GCD550D)

- **Workpiece** Crank shaft
- **Cutting condition** $vc(m/min) = 300$
 $fn(mm/rev) = 0.2\sim0.3$
 $ap(mm) = 3$, wet
- **Designation** INSERT DNMG150612-VR(NC6215)
HOLDER Special holder


■ Test result



K Ductile cast iron (GCD450)

- **Workpiece** Oil pump housing
- **Cutting condition** $vc(m/min) = 220$
 $fn(mm/rev) = 0.25$
 $ap(mm) = 2$, wet
- **Designation** INSERT CNMG120412-VR(NC6215)
HOLDER DCLNR2525-M12

■ Test result




Cutting performance (NC6205 / NC6210)

K Gray cast iron(GC250)

■ Cutting condition
 $vc(m/min) = 390$
 $fn(mm/rev) = 0.25$
 $ap(mm) = 2.0$
 wet

■ Designation INSERT CNMG120412-VK(NC6210)
 HOLDER PCLNR2525-M12

■ Test result

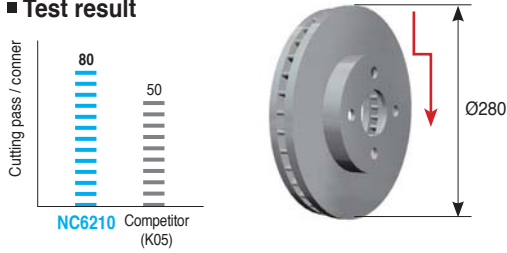


K Ductile cast iron(GCD600), in interrupted machining

■ Cutting condition
 $vc(m/min) = 120$
 $fn(mm/rev) = 0.30$
 $ap(mm) = 1.5$, wet
 Interrupted facing

■ Designation INSERT CNMA120408(NC6205, NC6210)
 HOLDER DCLNL3232-P12

■ Test result

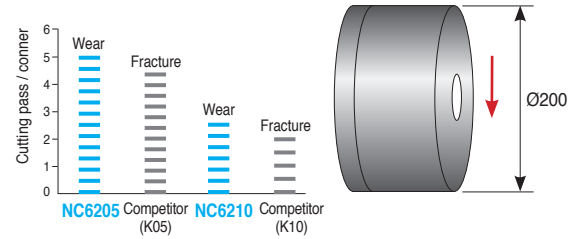


K Ductile cast iron(GCD550)

■ Cutting condition
 $vc(m/min) = 120$
 $fn(mm/rev) = 0.28$
 $ap(mm) = 2.0$
 wet

■ Designation INSERT WNMG080412-VK(NC6205)
 HOLDER DWLNL2525-M08

■ Test result

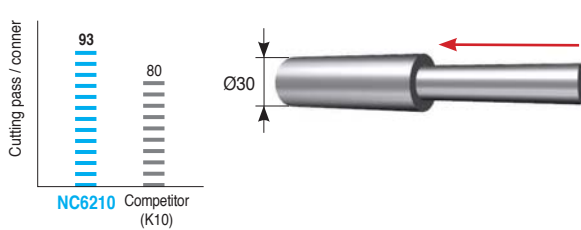


K Gray cast iron(GC250)

■ Cutting condition
 $vc(m/min) = 350$
 $fn(mm/rev) = 0.25$
 $ap(mm) = 0.7$
 wet

■ Designation INSERT CNMG120408-VK(NC6210)
 HOLDER DCLNR2525-M12

■ Test result

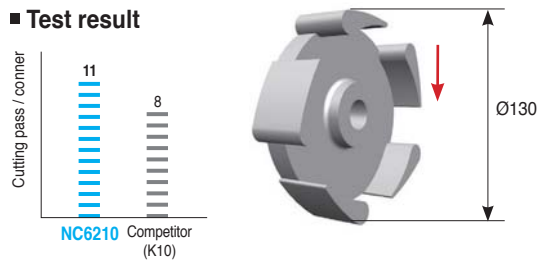


PVD Coated Grades

Turning grade for heat resistant alloy and stainless steel

PC8105 *New*


- Micro grain carbide minimizes chipping of cutting edge due to enhanced edge strength
- Latest PVD coating technology with high hardness and high temperature oxidation resistance
- Improved surface roughness and lower cutting force ensure better lubrication and wear resistance on rake surface.

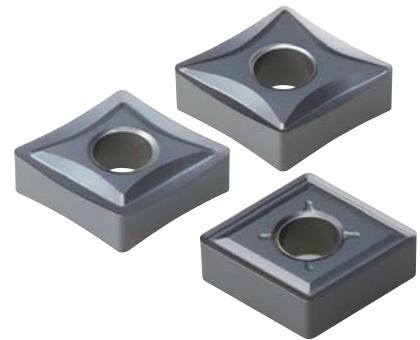

PC8110

- Substrate with superior wear resistance and plastic deformation resistance at high temperature
- PVD coating technology with high hardness and oxidation resistance at high temperature
- Long tool life when machining heat resistant alloy and stainless steel at high speed

▶ Features of PC8100 Series




It prevents wear at a high temperature to apply excellent surface roughness and coating with oxidation resistance and high hardness.

It improves wear resistance to equalize submicron matrix, secure stability between corners and improve chipping- and wear resistance


PC8115 *New*

- Ultra fine matrix technology increases wear resistance and chipping resistance.
- PVD coating technology with high hardness and oxidation resistance at high temperature
- Strong cutting edge and excellent chipping resistance guarantees stable machining.
- Long tool life when machining heat resistant alloy and stainless steel at middle to low speed and medium cutting to roughing

Coating surface treatment technology (Pictures of coating layer)

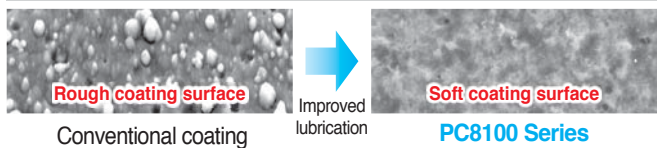

Oxidation resistant coating technology (Pictures of coating layer heat-treated at 900°C)

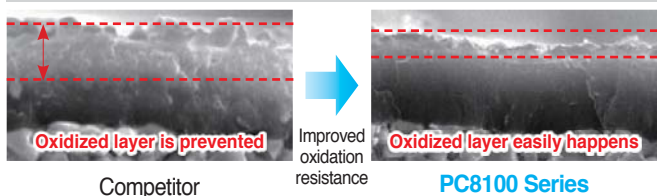

▶ Selection system of PVD coated grade

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range	
P	Steel	PC5300	175 (100 ~ 250)	P30	PC5300	
			145 (80 ~ 120)	P40		PC5400 <i>New</i>
M	Continuous cutting	PC8105 <i>New</i>	175 (120 ~ 230)	M01	PC8105 <i>New</i>	
			160 (110 ~ 210)	M10		PC8110
			150 (100 ~ 200)	M20		PC8115 <i>New</i>
	Interrupted cutting	PC5300	135 (80 ~ 190)	M30	PC5300	
			130 (80 ~ 180)	M40	PC9030	
			110 (80 ~ 140)	M50	PC5400 <i>New</i>	
S	Continuous cutting	PC8105 <i>New</i>	55 (40 ~ 70)	S01	PC8105 <i>New</i>	
			50 (35 ~ 65)	S10	PC8110	
			45 (30 ~ 60)	S20	PC8115 <i>New</i>	
	Interrupted cutting	PC5300	40 (20 ~ 60)	S30	PC5300	
			35 (20 ~ 50)	S40	PC5400 <i>New</i>	
			90 (65 ~ 115)	H10	PC8115 <i>New</i>	
H	Hardened	PC8110	100 (70 ~ 130)	H01	PC8110	
			90 (65 ~ 115)	H10	PC8115 <i>New</i>	



▶ The features of PVD coated grades


PVD Coated grades	ISO	Features
PC8105 <i>New</i>	M05~M15 S01~S10	<ul style="list-style-type: none"> For high speed and continuous finishing of hard-to-cut materials and STS Excellent cutting performance with high wear resistance and oxidation resistance Ultra fine substrate and the new TiAlN coating layer
PC8110	M10~M20 S05~S15 H01~H10	<ul style="list-style-type: none"> For high speed and continuous medium cutting of hard-to-cut materials and STS Excellent tool life with high wear/plastic deformation resistance at high temperature New TiAlN coating layer and substrate with excellent thermal resistance
PC8115 <i>New</i>	M15~M25 S10~S20 H05~H15	<ul style="list-style-type: none"> For medium to low speed and medium to rough cutting of hard-to-cut materials and STS Excellent tool life with high wear resistance and chipping resistance Ultra fine substrate and the new TiAlN coating layer
PC5300	P30~P40 M20~M30 K20~K25 S15~S25	<ul style="list-style-type: none"> Universal grade for stainless, HRSA, steel and interrupted cast iron machining High chipping and welding resistance for longer tool life New TiAlN coating and ultra fine grain substrate adopted
PC9030	M25~M35	<ul style="list-style-type: none"> Medium, roughing and heavy interrupted cutting for stainless steel TiAlN coating and ultra fine grain substrate adopted High chipping and welding resistance for stable machining
PC5400 <i>New</i>	P35~P45 M30~M40 K30~K35 S25~S35	<ul style="list-style-type: none"> For medium cutting for hard-to-cut materials, stainless steel, steel, and cast iron at medium or low speed Stable machinability with chipping resistance, fracture resistance and welding resistance Ultra fine substrate with high toughness and new AlCrN layer

Cutting performance (PC8105 / PC8110 / PC8115)

S Inconel 718

- Cutting condition**
 - vc(m/min) = 50
 - fn(mm/rev) = 0.15
 - ap(mm) = 0.5
 - wet
- Designation**
 - INSERT CNMG120408-VP3(PC8105)
 - HOLDER PCLNR2525-M12


Test result

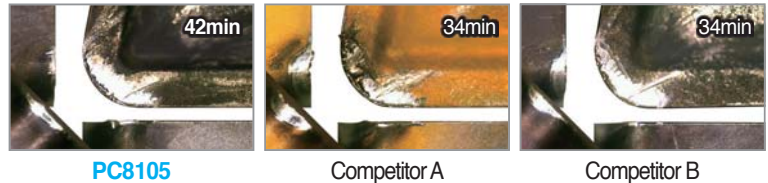

S Inconel 718

- Cutting condition**
 - vc(m/min) = 50
 - fn(mm/rev) = 0.15
 - ap(mm) = 1.5
 - wet
- Designation**
 - INSERT CNMG120408-VP3(PC8115)
 - HOLDER PCLNR2525-M12


Test result

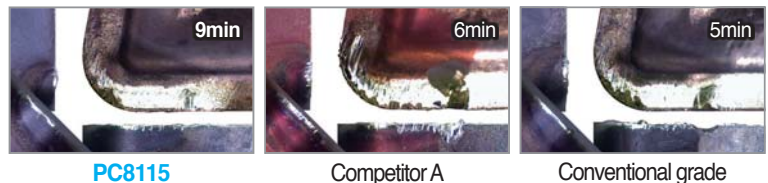

M Stainless steel (STS316L)

- Cutting condition**
 - vc(m/min) = 80
 - fn(mm/rev) = 0.2
 - ap(mm) = 7.0
 - wet
- Designation**
 - INSERT CNMG120408-VP3(PC8115)
 - HOLDER PCLNR2525-M12



Test result



S Inconel 625

- Cutting condition**
 - vc(m/min) = 60
 - fn(mm/rev) = 0.2
 - ap(mm) = 2
 - wet
- Designation**
 - INSERT DNMG150608-HS(PC8110)
 - HOLDER DDLNL2525-M15

Test result




KORLOY Uncoated Carbide Grades

Uncoated carbide grades for turning application of titanium


H01

- Increased wear resistance and chipping resistance with the use of ultra fine substrate
- Improved welding resistance and chipping resistance with the use of special surface treatment and sharp cutting edge of VP chip breaker
- Excellent tool life when finishing titanium alloy at high speed




H05

- The 1st recommended grade for machining titanium alloy in a variety of cutting conditions
- Improved welding resistance and chipping resistance with the use of special surface treatment and sharp cutting edge of VP chip breaker
- Ideal for medium cutting of titanium alloy
- On top of that, we recommend a PVD coated universal grade, PC5300 in interrupted machining or roughing of titanium alloy.



Grades Line up

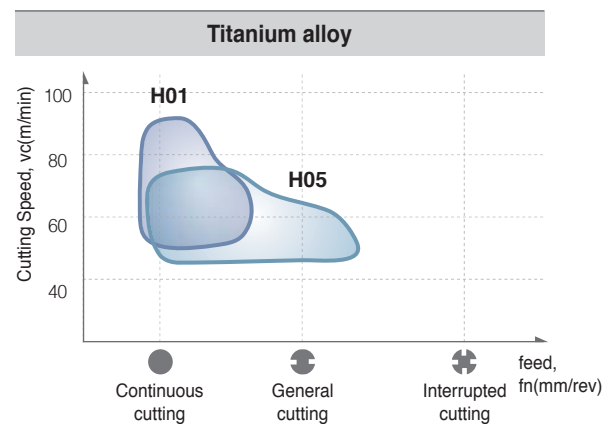

Selection system

Workpiece	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	ST10P	150 (110 ~ 190)	P10	← ST10P
	ST15	135 (100 ~ 170)	P20	← ST15
	ST20E	120 (90 ~ 150)	P30	← ST20E
	A30	110 (80 ~ 140)	P40	← A30
K Cast iron	H2	160 (120 ~ 200)	K01	← H2
	H01, H05	150 (110 ~ 190)	K10	← H01 ← H05
	H10, G10E	140 (100 ~ 180)	K20	← H10 ← G10E
N Aluminum alloy	H01	600 (450 ~ 750)	N10	← H01
	H05	425 (320 ~ 530)	N20	← H05
S Titanium alloy	H01	55 (40 ~ 70)	S01	← H01
	H05	50 (35 ~ 65)	S10	← H05
H High hardness steel	H01	80 (55 ~ 105)	H10	← H01

Main application

Workpiece	Composition	Features	Workpiece
P	WC-TiC-TaC-Co	Heat resistance, excellent plastic deformation resistance	Carbon steel, Alloy steel, Stainless steel
M	WC-TiC-TaC-Co	General tools stable heat resistance with strength	Carbon steel, Alloy steel, Stainless steel, Cast steel
K	WC-Co	High strength and superior wear resistance	Cast iron, Non-ferrous metal, Plastic, etc
S	WC-Co	Excellent wear resistance and chipping resistance	Titanium alloy



▶ Properties of Uncoated Carbide

Workpiece	Grade	Hardness (HRA)	TRS (kgf/mm ²)	Young's modulus (10 ³ kgf/mm ²)	Thermal expansion coefficient(10 ⁻⁶ /°C)	Thermal conductivity (cal/cm · sec·°C)
P	ST05E	92.7	140	-	-	-
	ST10P	92.1	175	48	6.2	25
	ST20E	91.9	200	56	5.2	45
	A30	91.3	230	53	5.2	-
M	U10E	92.4	170	47	-	-
	U2	91.1	210	-	-	88
	A30	91.3	230	53	5.2	-
	A40	89.2	270	-	-	-
K	H2	93.2	185	61	4.4	105
	H01	92.9	210	66	4.7	109
	G10E	90.9	250	63	-	105
S	H01	92.9	210	66	4.7	109
	H05	91.8	250	-	-	-


1KPa = 102kgf/m², 1w/mk = 2.39×10⁻³cal/cm·sec·°C

Cutting performance (H01 / H05)

S Titanium alloy (Ti-6Al-4V)

- Cutting condition**
 - vc(m/min) = 100
 - fn(mm/rev) = 0.1
 - ap(mm) = 0.5
 - wet
- Designation**
 - INSERT CNMG120408-VP1(H01)
 - HOLDER PCLNR2525-M12


Test result

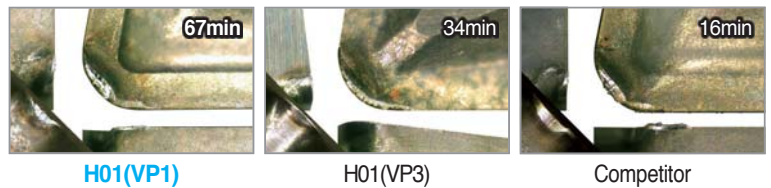

S Titanium alloy (Ti-6Al-4V)

- Cutting condition**
 - vc(m/min) = 80
 - fn(mm/rev) = 0.2
 - ap(mm) = 2.0
 - wet
- Designation**
 - INSERT CNMG120408-VP3(H05)
 - HOLDER PCLNR2525-M12


Test result

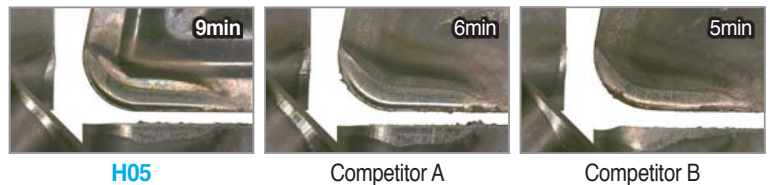

S Titanium alloy (Ti-6Al-4V)

- Workpiece** Part of an industrial machine
- Cutting condition**
 - vc(m/min) = 60
 - fn(mm/rev) = 0.2
 - ap(mm) = 0.8
 - wet
- Designation**
 - INSERT CNMG120408-VP2(H01)
 - HOLDER PCLNL2525-M12


Test result



S Titanium alloy (Ti-6Al-4V)

- Workpiece** Part of an industrial machine
- Cutting condition**
 - vc(m/min) = 50
 - fn(mm/rev) = 0.15
 - ap(mm) = 2.0
 - wet
- Designation**
 - INSERT CNMG120408-VP3(H05)
 - HOLDER PCLNL2525-M12

Test result



Cermet Grades

Solution for turning application of steel

CN1500 *New*

- For continuous machining of cold/hot forged steel and Sintered ferrous alloy at high speed and low depth of cut
- Excellent wear resistance and crater resistance
- Improved surface roughness acquired by optimized cutting edges




CN2500 *New*

- For high interrupted machining of cold/hot forged steel and Sintered ferrous alloy at high feed and high depth of cut
- Excellent resistance against chipping, fracture and thermal crack
- Improved surface roughness acquired by optimized cutting edges



▶ Recommended cutting condition

Division	Workpiece	Grade	Recommended cutting speed(m/min)		
			Minimum	Recommended	Maximum
Turning	SM10C, SS440	CN1500	150	270	400
		CN2500	130	240	350
	SM45C	CN1500	150	250	350
		CN2500	130	220	300
	SCM440, Sintered fe ferrous alloy	CN1500	120	220	300
		CN2500	100	200	250

▶ Grade Line up

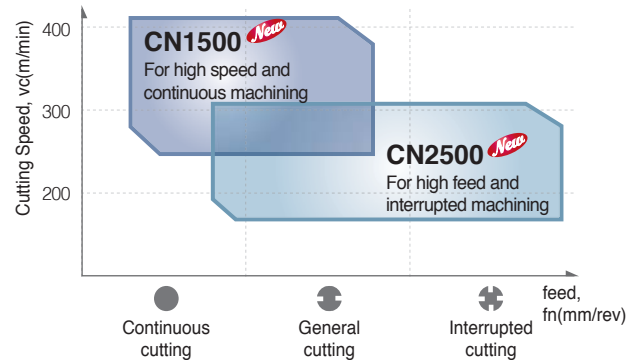

▶ Chip breakers Line up

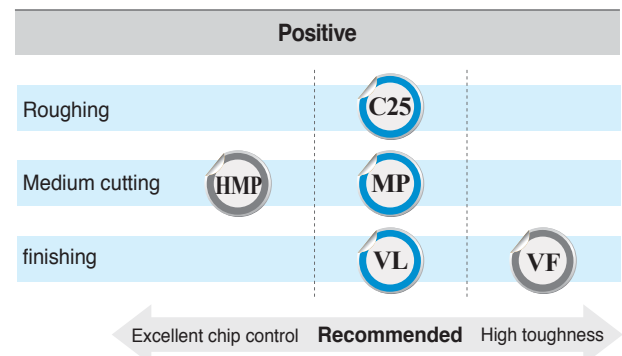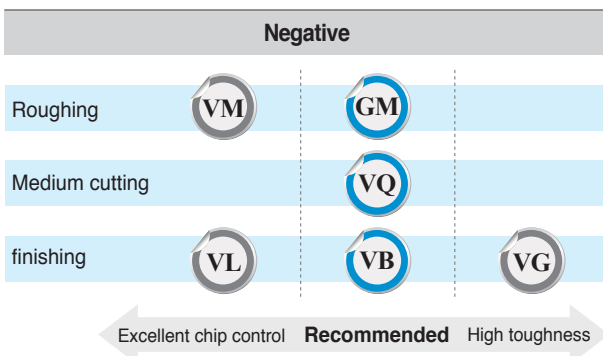

▶ Selection system

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	CN1500 <i>New</i>	250 (150 ~ 350)	P10	CN1500 <i>New</i>
	Interrupted cutting	CN2500 <i>New</i>	220 (130 ~ 300)	P20	
				P30	CN2500 <i>New</i>



Comparison of chip breakers


Insert types	Machining types	Application range	Chip breakers				
			KORLOY	CompetitorA	CompetitorB	CompetitorC	CompetitorD
Nega type	Continuous cutting	For machining mild steel with enhanced chip control	VL	FA	GP	TF	FA
	Continuous cutting	For continuous cutting with stronger cutting edges than VL chip breaker	VG	FG	XP	TSF	LU
	General cutting	For low interrupted cutting with stronger cutting edges than VG chip breaker	VB	FG	CQ	TS	SE
	General cutting	For medium cutting to finishing at low interruption	VQ	MC	HQ	AS, ZM	SU
	Interrupted cutting	For medium cutting to roughing at high interruption	GM	MT	HS	TM	GU
Posi type	Continuous cutting	For machining mild steel with enhanced chip control	VL	FA	GP	PF	FP
	Continuous cutting	Enhanced chip control when machining internal diameter with stronger cutting edges than VL chip breaker	VF	FG-PC	HQ	PS	LU
	General cutting	Stronger cutting edges than VF chip breaker	MP	FG	HQ	PS	LU
	General cutting	For medium cutting to finishing at low interruption	HMP	FG	HQ	PM	SU
	Interrupted cutting	For medium cutting to roughing at high interruption	C25	MT	GK	24	SC

Cutting performance (CN1500)

P Carbon steel (SM45C)

- Cutting condition**
 $vc(m/min) = 200$
 $n(rpm) = 1,800$
 $fn(mm/rev) = 0.1$
 $ap(mm) = 0.3$
 wet
- Designation** INSERT CCMT09T304-HMP(CN1500)
 HOLDER SCLCR2020-K09


Test result



P Alloy Steel (SCM430)

- Cutting condition**
 $vc(m/min) = 230$
 $n(rpm) = 2,000$
 $fn(mm/rev) = 0.12$
 $ap(mm) = 0.8$
 wet
- Designation** INSERT TNMG160404-VQ(CN1500)
 HOLDER DTGNR3232-P16



Test result



P Bearing steel (STB2)

- Cutting condition**
 $vc(m/min) = 200$
 $n(rpm) = 2,500$
 $fn(mm/rev) = 0.1$
 $ap(mm) = 0.3$
 wet
- Designation** INSERT DCMT11T302-VF(CN1500)
 HOLDER SDJCR2525-M11



Test result



P Sintered ferrous alloy

- Cutting condition**
 $vc(m/min) = 160$
 $n(rpm) = 1,200$
 $fn(mm/rev) = 0.17$
 $ap(mm) = 0.2$
 wet
- Designation** INSERT SNMG120408-GM(CN1500)
 HOLDER MSRRN2525-M12

Test result




Cutting performance (CN2500)

P Carbon steel (SM45C)

- **Cutting condition**
 - vc(m/min) = 185
 - n(rpm) = 2,300
 - fn(mm/rev) = 0.15
 - ap(mm) = 0.4
 - wet

- **Designation** INSERT CCMT09T304-MP(CN2500)
- HOLDER SCLCR2020-K09

■ Test result




P Alloy Steel (SCR420H)

- **Cutting condition**
 - vc(m/min) = 200
 - n(rpm) = 2,000
 - fn(mm/rev) = 0.15
 - ap(mm) = 0.2
 - wet

- **Designation** INSERT DCMT11T304-HMP(CN2500)
- HOLDER SDJCR2525-M11

■ Test result





P Sintered ferrous alloy

- **Cutting condition**
 - vc(m/min) = 280
 - n(rpm) = 2,000
 - fn(mm/rev) = 0.2
 - ap(mm) = 0.2
 - wet

- **Designation** INSERT VBMT160404-MP(CN2500)
- HOLDER SVABL-2020-K16

■ Test result




P Alloy Steel (SCM415)

- **Cutting condition**
 - vc(m/min) = 300
 - n(rpm) = 2,200
 - fn(mm/rev) = 0.25
 - ap(mm) = 0.3
 - wet

- **Designation** INSERT CNMG120408-GM(CN2500)
- HOLDER PCLNR2525-M12

■ Test result




P Carbon steel (SM45C)

- **Cutting condition**
 - vc(m/min) = 300
 - n(rpm) = 2,800
 - fn(mm/rev) = 0.25
 - ap(mm) = 0.4
 - wet

- **Designation** INSERT CNMG120404-VB(CN2500)
- HOLDER PCLNR3232P-16

■ Test result




P Alloy Steel (SCR420)

- **Cutting condition**
 - vc(m/min) = 200
 - n(rpm) = 2,300
 - fn(mm/rev) = 0.2
 - ap(mm) = 0.3
 - wet

- **Designation** INSERT CCMT09T304-HMP(CN2500)
- HOLDER SCLCR2020-K09

■ Test result




KORLOY Coated Cermet Grades

▶ Features

- ▶ Impact resistance and superior toughness substrate prevents chipping and fracture at the initial stage ensuring longer tool life
- ▶ Lubricant coating layer improves chip flow and reduces insert load

High hardness, smooth coating, Lubricant layer

Tough substrate

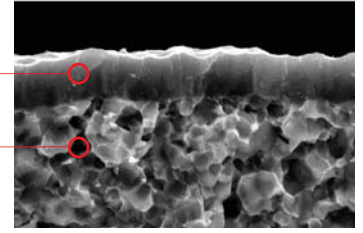

Coated cermet for machining carbon steel, alloy steel and sintered ferrous components


CC1500 *New*

- Coating layer : Excellent lubrication and surface roughness
- Substrate : Excellent chipping resistance



▶ Recommended cutting condition

Division	Workpiece	Grade	Nose R	Recommended cutting speed(m/min)		
				Minimum	Recommended	Maximum
Turning	SM10C, SS400	CC1500	08	200	350	450
		CC115	08	180	290	400
	SM45C	CC1500	08	200	300	400
		CC115	08	180	270	350
	SCM440 SCM420 SCM430 Sintered ferrous alloy	CC1500	08	180	270	350
		CC115	08	150	250	300

▶ Grades Line up

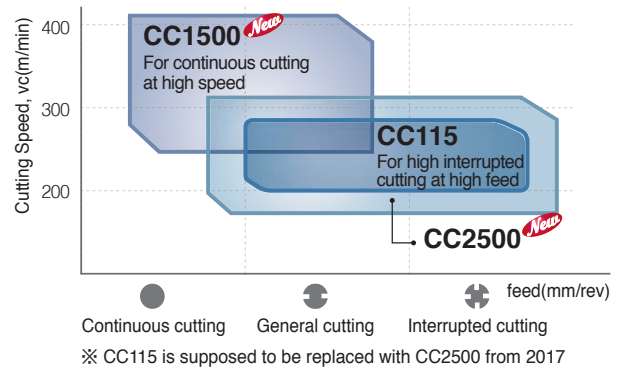

▶ Chip breakers Line up

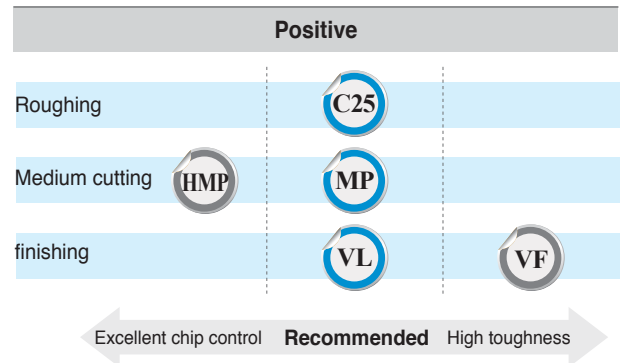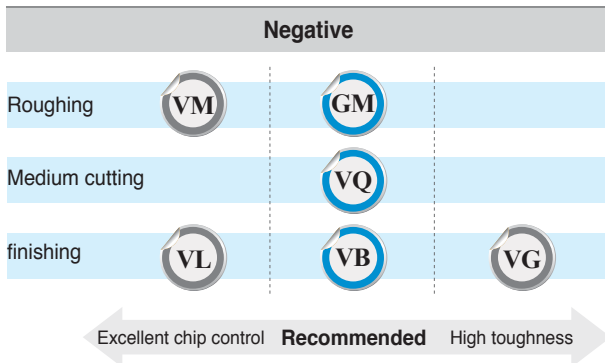

▶ Selection system

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	CC1500 <i>New</i>	350 (260 ~ 440)	P10	CC1500 <i>New</i>
	Interrupted cutting	CC2500 <i>New</i>	310 (230 ~ 390)	P20	CC2500 <i>New</i>
		CC125	230 (150 ~ 300)	P30	CC125

▶ The features of KORLOY coated cermet grade

Coated cermet	ISO	Features
CC1500 <i>New</i>	P10 ~ P20	• PVD coated Cermet • Light cutting for steel and cast iron in high speed machining • Optimized for precision boring
CC2500 <i>New</i>	P20 ~ P30	• PVD coated Cermet • Light cutting for steel and cast iron in medium or high speed machining • Dry and wet cutting are available
CC125	P25 ~ P35	• PVD coated Cermet • High toughness cermet for Turning





Cutting performance (CC1500)

P Carbon steel (SM20C)

- **Workpiece** Nipple
- **Cutting condition**
 - vc(m/min) = 170
 - n(rpm) = 2,000
 - fn(mm/rev) = 0.12
 - ap(mm) = 0.12
 - wet
- **Designation** INSERT TPMT110304-MP(CC1500)
HOLDER S20R-STWPR/L-11



■ Test result



P Alloy Steel (SCM440)

- **Workpiece** Plate carrier
- **Cutting condition**
 - vc(m/min) = 450
 - n(rpm) = 2,500
 - fn(mm/rev) = 0.2
 - ap(mm) = 0.2
 - wet
- **Designation** INSERT DCMT11T304-HMP(CC1500)
HOLDER A20Q-SDUCR/L-11



■ Test result



P Carbon steel (SM45C)

- **Workpiece** Cut plate carrier
- **Cutting condition**
 - vc(m/min) = 300
 - n(rpm) = 2,500
 - fn(mm/rev) = 0.3
 - ap(mm) = 0.4
 - wet
- **Designation** INSERT CCMT09T304-C25(CC1500)
HOLDER SCACR/L1212-F09



■ Test result



P Alloy Steel (SCM420)

- **Workpiece** Pinion
- **Cutting condition**
 - vc(m/min) = 250
 - n(rpm) = 2,500
 - fn(mm/rev) = 0.2
 - ap(mm) = 0.5
 - wet
- **Designation** INSERT DNMG150604-VL(CC1500)
HOLDER S32S-PDSNR/L-15



■ Test result



P hot forging (SCM430)

- **Workpiece** Valve
- **Cutting condition**
 - vc(m/min) = 230
 - fn(mm/rev) = 0.8
 - ap(mm) = 0.12
 - wet
- **Designation** INSERT TNMG160404-VQ(CC1500)
HOLDER PTTNR/L1616-H16



■ Test result



P Sintered ferrous alloy

- **Workpiece** Sprocket
- **Cutting condition**
 - vc(m/min) = 160
 - fn(mm/rev) = 0.17
 - ap(mm) = 0.2
 - wet
- **Designation** INSERT SNMG120408-VM(CC1500)
HOLDER MSKNR/L3232-P12

■ Test result




The best way to choose KORLOY Milling inserts

Selection system

Workpiece	P Steel					M Stainless steel				K Cast iron					N Nonferrous			S HRSA			H Hardened				
	P01	P10	P20	P30	P40	P50	M10	M20	M30	M40	K01	K10	K20	K30	K40	N01	N10	N20	S10	S20	S30	H01	H10	H20	H30
Coated carbide																									
Cermet																									
cBN / PCD																									
Uncoated carbide																									

Application range of Milling grades

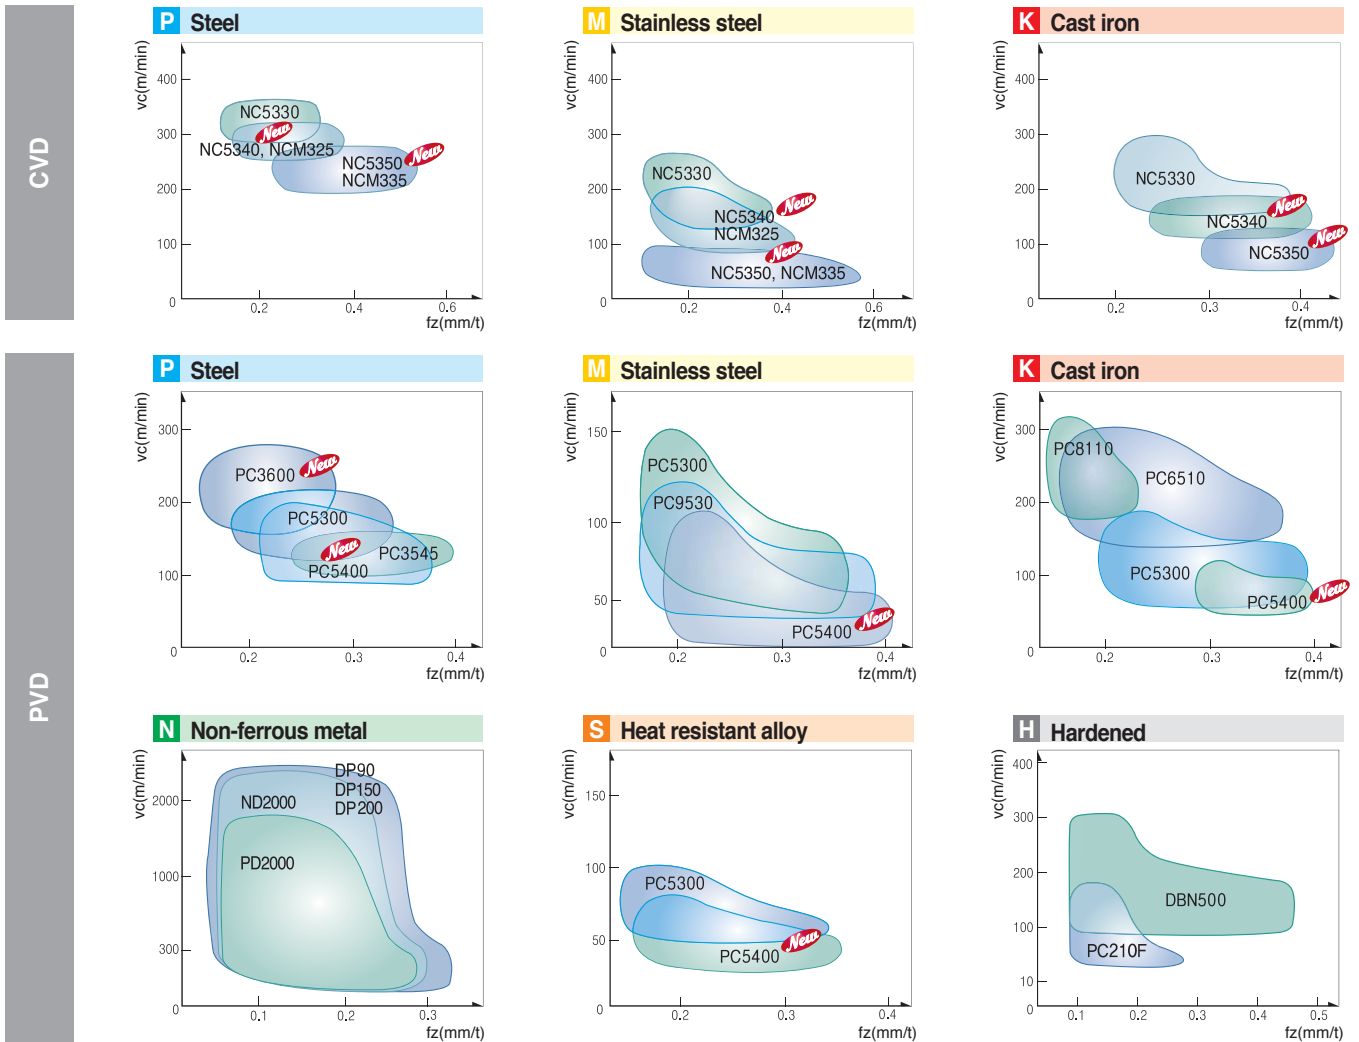

CVD Coated grades

Universal CVD coated grades

NC5330 / NC5340 / NC5350


New

New

- Excellent quality and universal purpose applicable to P.M.K
- High toughness substrate and coating layer with excellent surface roughness and welding resistance



▶ Coating structure



- | TiN film : Smooth surface roughness and superior anti built-up-edge
- | Fine columnar TiCN film : Optimal toughness and hardness
- | TiCN film : High toughness and wear resistance
- | Al₂O₃ film : Excellent oxidation resistance

▶ Selection system of CVD coated grades

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	NC5330	205 (120 ~ 290)	P20 P25	NC5330
	Continuous cutting	NC5340 <i>New</i> NCM325	230 (130 ~ 330)	P30 P35	NC5340 <i>New</i> → NCM325
	Interrupted cutting	NC5350 <i>New</i> NCM335	205 (120 ~ 290)	P40 P45	NC5350 <i>New</i> → NCM335
M Stainless steel	Continuous cutting	NC5330	140 (80 ~ 200)	M10 M20	
	Continuous cutting	NC5340 <i>New</i> NCM325	155 (90 ~ 220)	M25 M30	NC5340 <i>New</i> → NCM325
	Interrupted cutting	NC5350 <i>New</i> NCM335	140 (80 ~ 200)	M35 M40	NC5350 <i>New</i> → NCM335
K Cast iron	Continuous cutting	NC5330	190 (110 ~ 270)	K10 K20	NC5330
		NC5340 <i>New</i>	150 (80 ~ 250)	K30	NC5340 <i>New</i>

▶ The features of CVD Milling grades


CVD Coated grades	ISO	Features
NC5330	P20 ~ P30 M20 ~ M30 K15 ~ K25	<ul style="list-style-type: none"> • For high speed milling of steel and stainless steel • Superior wear resistance and chipping resistance grade for steel and stainless steel • MT-TiCN + Al₂O₃ + TiN
NC5340 <i>New</i> NCM325	P30 ~ P40 M25 ~ M35 K25 ~ K30	<ul style="list-style-type: none"> • For high speed milling of steel and stainless steel • Optimized grade for steel & stainless steel by employing proper substrate and hard coating • MT-TiCN + Al₂O₃ + TiN
NC5350 <i>New</i> NCM335	P35 ~ P45 M30 ~ M40	<ul style="list-style-type: none"> • For interrupted and rough milling of steel and stainless steel • Toughest substrate with hard coating provides stable cutting and tool life for severe interrupted cutting • MT-TiCN + Al₂O₃ + TiN



Cutting performance (NC5330 / NC5340)


P Alloy steel (SCM440)

- Cutting condition**
 - vc(m/min) = 250
 - fz(mm/t) = 0.30
 - ap(mm) = 2.0
 - dry
- Designation**
 - INSERT SDKN1504AESN-SU(NC5330)
 - HOLDER ADN5125R
- Test result**

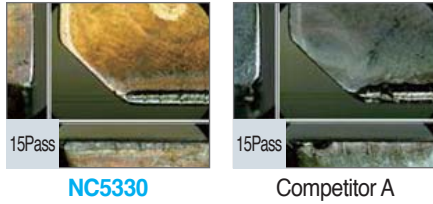


P Alloy steel (SCM440)

- Cutting condition**
 - vc(m/min) = 300
 - fn(mm/rev) = 0.30
 - ap(mm) = 2.0
 - wet
- Designation**
 - INSERT SPCN1203EDR(NC5340)
 - HOLDER EPN4125R
- Test result**

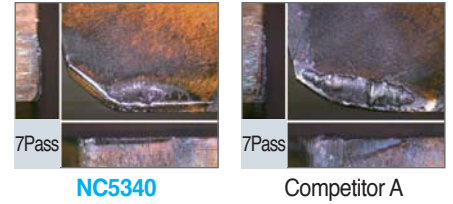


M Stainless steel (STS304)

- Cutting condition**
 - vc(m/min) = 150
 - fz(mm/t) = 0.25
 - ap(mm) = 2.0
 - dry
- Designation**
 - INSERT SDKN1504AESN-SU(NC5330)
 - HOLDER ADN5125R
- Test result**

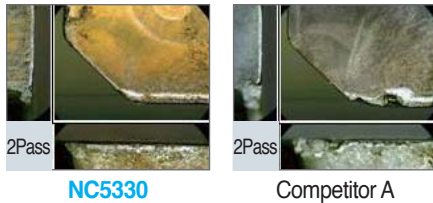


P Carbon steel (S45C)

- Cutting condition**
 - vc(m/min) = 350
 - fn(mm/rev) = 0.35
 - ap(mm) = 2.0
 - wet
- Designation**
 - INSERT SPCN1203EDR(NC5340)
 - HOLDER EPN4125R
- Test result**

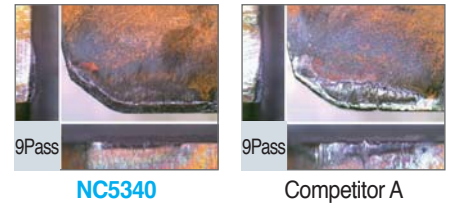


K Ductile cast iron (FCD500)

- Cutting condition**
 - vc(m/min) = 200
 - fz(mm/t) = 0.20
 - ap(mm) = 5.0
 - dry
- Designation**
 - INSERT SDKN1504AESN-SU(NC5330)
 - HOLDER ADN5100R
- Test result**

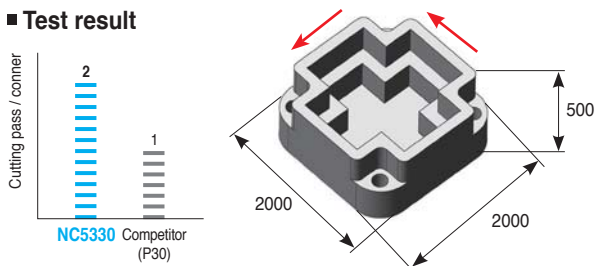

K Gray cast iron (FC250)

- Cutting condition**
 - vc(m/min) = 400
 - fn(mm/rev) = 0.20
 - ap(mm) = 3.0
 - wet
- Designation**
 - INSERT SPCN1203EDR(NC5340)
 - HOLDER EPN4100R
- Test result**

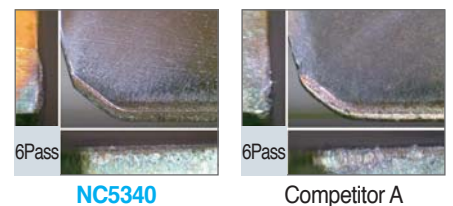

PVD Coated Grades

PVD new grade for steel milling

PC3600(SU/MU)


- Coating layer with high hardness and oxidation resistance at high temperature ensures stable tool life.
- Superior wear resistance and impact resistance in high speed machining of P grade materials
 - SU : for general purpose - MU : for cost efficiency



Universal PVD Grade

PC5300


- High efficiency during machining for carbon steel / cast iron / stainless steel / HRSA
- Stable machining due to specific carbide substrate with strong toughness and high hardness that restrains fracture by chipping
- Excellent wear resistance due to special coating film with oxidation resistance, thermal stability, and surface smoothness

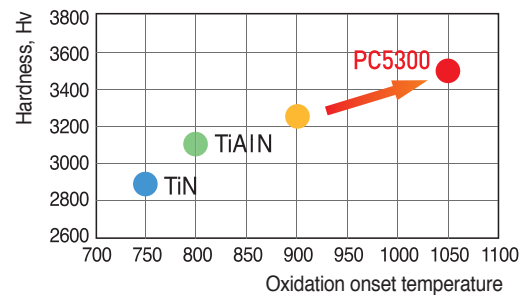

PC5400 New

- New PVD coating layer with high toughness and lubrication
- High adhesive strength between substrate with high toughness and the coating layer
- Excellent cutting edge strength and chipping resistance ensure stable machinability for P, M, K, S.

▶ Features

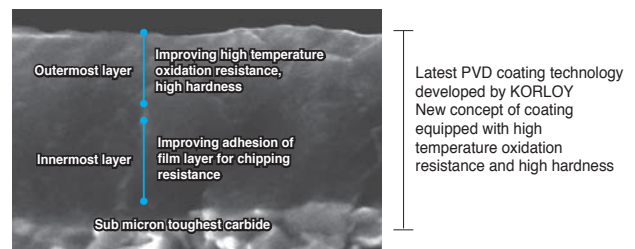

▶ Selection system of PVD coated grades

Workpiece	Machining types	Recommended grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	PC3500	235 (180 ~ 290)	P20	PC3500 → PC3600
		PC3600		P30	
	Interrupted cutting	PC5300 New	195 (150 ~ 240)	P40	PC5300 → PC5400 New → PC3545
		PC5400 New	145 (80 ~ 210)	P50	
		PC3545	170 (130 ~ 210)		
M Stainless steel	Continuous cutting	PC5300	130 (100 ~ 160)	M20	PC5300 → PC9530 → PC5400 New
	Interrupted cutting	PC9530	125 (80 ~ 150)	M30	
		PC5400 New	110 (80 ~ 140)	M40	
K Cast iron	Continuous cutting	PC8110	180 (140 ~ 230)	K05	PC8110 → PC6510
		PC6510		K10	
	Interrupted cutting	PC5300	145 (11~180)	K20	PC5300 → PC5400 New
		PC5400 New	125 (85~160)	K30	
S HSRA	Continuous cutting	PC5300	55 (40 ~ 70)	S10	PC5300
	Interrupted cutting	PC5400 New	40 (30 ~ 50)	S30	PC5400 New
H High hardness steel	Continuous cutting	PC2005 New	60 (80 ~ 40)	H01	PC2005 New
		PC2010 New	55 (70 ~ 40)	H10	PC2010 New
		PC2015 New	50 (65 ~ 35)	H20	PC2015 New
		PC210F	50 (65 ~ 35)	H30	PC210F



The features of PVD coated grades


PVD Coated grades	ISO	Features
PC3500 PC3600	P20 ~ P30	<ul style="list-style-type: none"> Milling grade for medium and roughing of steel New coating layer with superior wear resistance and oxidation resistance with high toughness substrate TiAlN / New coating • Grooving, Cutting, Milling
PC3545	P35 ~ P45	<ul style="list-style-type: none"> Medium and rough milling for steel Enhanced chipping resistant substrate • K-Gold coating
PC5300	P30~P40 K20~K30 M20~M30 S15~S25	<ul style="list-style-type: none"> Superior universal grade for steel, cast iron, hard to cut material, stainless steel New coating and ultra fine grain provide wear resistance and oxidation resistance For turning, milling, grooving, parting, drilling, and threading
PC5400 <i>New</i>	P35~P45 K25~K35 M30~M40 S25~S35	<ul style="list-style-type: none"> Universal grade for interrupted machining of steel, cast iron, hard-to-cut materials and stainless steel with stable machinability New coating layer with high toughness and lubrication on ultra fine grain substrate with high toughness AlCrN series new coating • For turning, milling, grooving and drilling
PC8110	K05~K15	<ul style="list-style-type: none"> Medium and rough cutting for hard to cut material and stainless steel • Superior wear resistance for finishing cast iron New coating and ultra fine grain provide wear resistance and oxidation resistance • For turning, milling, grooving, parting
PC6510	K05~K15	<ul style="list-style-type: none"> High speed milling grade for cast iron and aluminum K-Gold coating
PC9530	M25 ~ M35	<ul style="list-style-type: none"> Milling grade for cast iron and aluminum in medium to low cutting speed The toughest sub-micron substrate provides excellent cutting performance at high feed TiAlN coating • For milling, drilling
PC2005 <i>New</i>	H01 ~ H10	<ul style="list-style-type: none"> Exclusive for Laser Mill in milling of high hardness workpieces and press mold steel Utmost wear resistance due to high hardness substrate and coating • Ultra high hardness K-Brown coating
PC2010 <i>New</i>	H05 ~ H15	<ul style="list-style-type: none"> Exclusive for Laser Mill in milling of pre hardened steel and plastic mold steel High hardness enhanced cutting edges due to ultra fine WC and high contents binder for expanding application range to high hardness steel and pre hardened steel • Ultra high hardness K-Brown coating
PC2015 <i>New</i>	H10 ~ H20	<ul style="list-style-type: none"> Exclusive for Laser Mill in milling of carbon steel and cast Lubricative coating layer and high contents substrate for machining mild steel and hard-to-cut cast materials
PC210F	H10 ~ H20	<ul style="list-style-type: none"> High speed milling grade for hardened steel, cast iron, and stainless steel(Laser Mill) New coating and ultra fine grain provide wear resistance and oxidation resistance Endmilling

Cutting performance (PC3600)

P Alloy tool steel (SS41)

- Cutting condition**
 $vc(m/min) = 216$
 $fz(mm/t) = 0.39$
 $ap(mm) = 1.0$
 dry
- Designation**
 INSERT TPKN2204PDSR-SU(PC3600)
 HOLDER PPN4125R


Test result

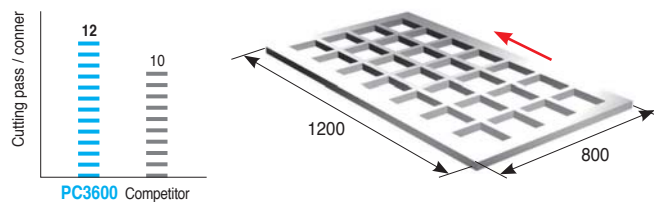

P Alloy steel (SCM415)

- Cutting condition**
 $vc(m/min) = 228$
 $fz(mm/t) = 0.15$
 $ap(mm) = 1.0$
 dry
- Designation**
 INSERT SDKN1504AESN-SU(PC3600)
 HOLDER ADN5315R


Test result

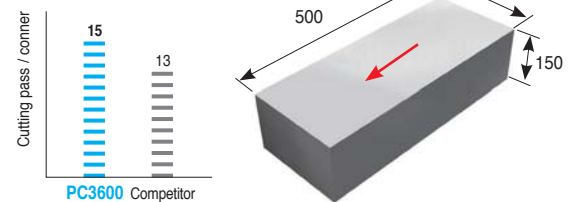

P Carbon steel (SM45C)

- Cutting condition**
 $vc(m/min) = 306$
 $fz(mm/t) = 0.13$
 $ap(mm) = 2.0$
 dry
- Designation**
 INSERT SDKN1203AESN-SU(PC3600)
 HOLDER ADN4315R


Test result

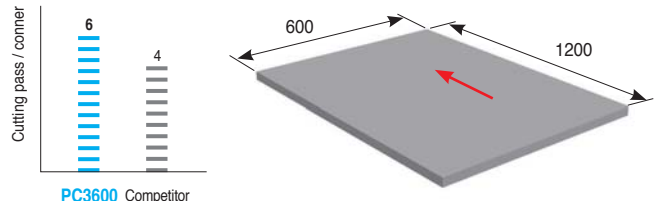

P Alloy tool steel (STD11)

- Cutting condition**
 $vc(m/min) = 200$
 $fz(mm/t) = 0.2$
 $ap(mm) = 2.0$
 dry
- Designation**
 INSERT SPKN1504EDSR-SU(PC3600)
 HOLDER EPN5160R


Test result (340min machining)

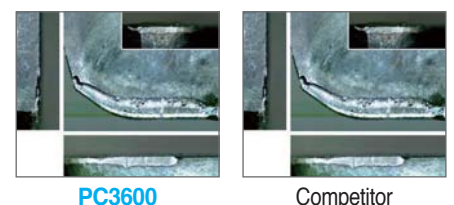

Cutting performance (PC5300)


P Mold steel (KP4M)

- Cutting condition**
 - vc(m/min) = 250
 - fn(mm/rev) = 1.0
 - ap(mm) = 1.0
 - dry
- Designation**
 - INSERT WNMX130520ZNN-MM(PC5300)
 - HOLDER HRMDCM13050HR-3
- Test result**

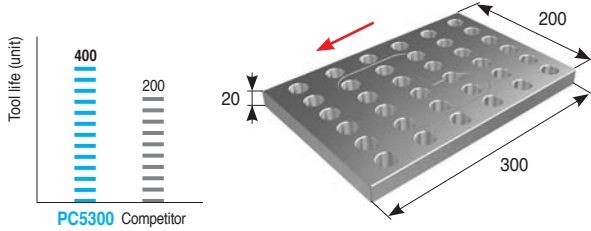

M Stainless steel (STS316)


- Cutting condition**
 - vc(m/min) = 65
 - fn(mm/rev) = 0.14
 - ap(mm) = 3.0
 - wet
- Designation**
 - INSERT SEET14M4AGSN-MM(PC5300)
 - HOLDER FMACM4100HR
- Test result**

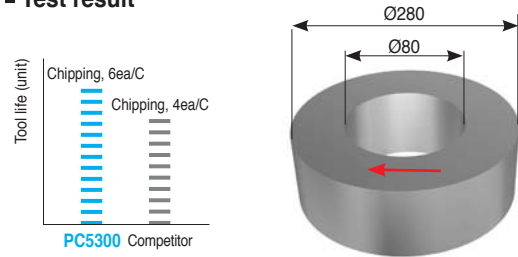

Cutting performance (PC5400)


P Carbon steel (SM45C)

- Cutting condition**
 - vc(m/min) = 250
 - fz(mm/t) = 1.2
 - ap(mm) = 1.0
 - dry
- Designation**
 - INSERT WNMX130520ZNN-MM(PC5400)
 - HOLDER HRMDCM13050HR-4
- Test result**

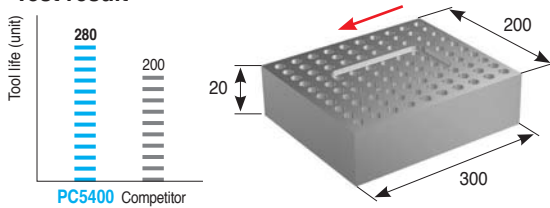


P Alloy steel (SCR440)

- Cutting condition**
 - vc(m/min) = 180
 - fz(mm/t) = 0.2
 - ap(mm) = 2.0
 - dry
- Designation**
 - INSERT PDKT1605M0-MM(PC5400)
 - HOLDER FMRC5063HRD-H
- Test result**

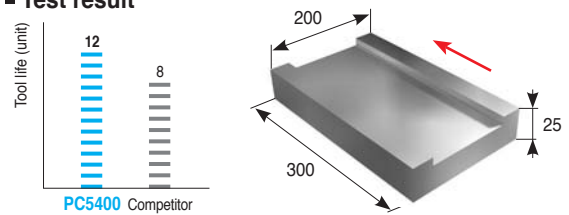


M Stainless steel (STS316)

- Cutting condition**
 - vc(m/min) = 50
 - fz(mm/t) = 0.1
 - ap(mm) = 4.0
 - ae(mm) = 15.0
 - dry
- Designation**
 - INSERT APMT1604PDSR-MM(PC5400)
 - HOLDER AMC3063HS
- Test result**

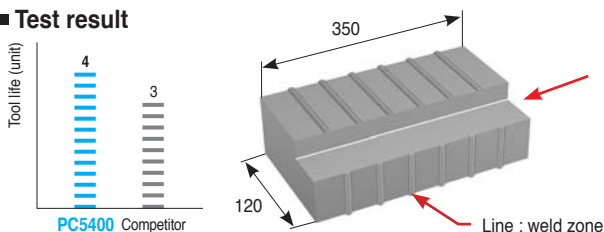

S Heat-resistant alloy (Inconel 718)


- Cutting condition**
 - vc(m/min) = 60
 - fz(mm/t) = 0.1
 - ap(mm) = 2.5
 - wet
- Designation**
 - INSERT SNMX1206ANN-MM(PC5400)
 - HOLDER RM8AC4080HR
- Test result**

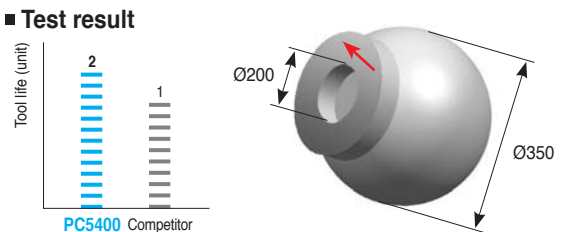

A Milling Grades


Uncoated Carbide Grades

- Features**
- ▶ Due to KORLOY's advanced sintering technology, our uncoated carbide grades have a fine alloy structure which is necessary to get superior quality from a uncoated cutting tool

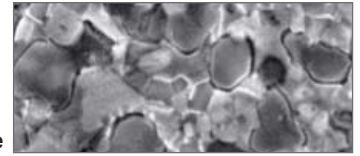


P type

- Advantages**
- ▶ Consist of P,M,K carbide grades and can be used in all kinds of workpiece
 - ▶ Excellent quality at machining with coolant, due to the superior thermal crack resistance of the carbide
 - ▶ Due to the special design of carbides, it has fine micro structure and low affinity with workpiece
 - ▶ It has excellent toughness and produces lower cutting loads

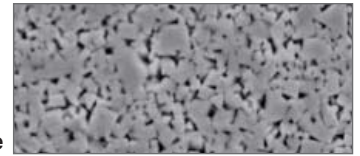

M type

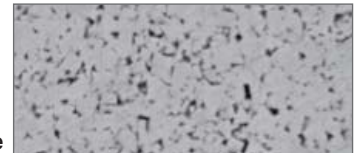

K type

Selection system

Workpiece	Grade	Recommended cutting speed(m/min)	ISO	Application range
P	Steel	A30	P30	A30
K	Cast iron	H01, H05	K10	H01, H05, H10, G10E
		H10, G10E	K20	
N	Aluminum alloy	H01	N10	H01, H05
	Copper alloys	H05	N20	

Main composition and application range

Workpiece	Composition	Features	Workpiece
P	WC-TiC-TaC-Co	Excellent thermal shock resistance and plastic deformation resistance	Carbon steel, Alloy steel, Stainless steel
M	WC-TiC-TaC-Co	General grades with thermal shock resistance and hardness	Carbon steel, Alloy steel, Stainless steel, Cast steel
K	WC-Co	High hardness and superior wear resistance	Cast iron, Non-ferrous metal, Non metal

The physical properties of grades

Workpiece	Grade	Hardness (HRA)	TRS (kgf / mm ²)	Young's modulus (10 ³ kgf / mm ²)	Thermal expansion coefficient(10 ⁻⁶ / °C)	Thermal conductivity (cal / cm-sec-°C)
P	ST05E	92.7	140	-	-	-
	ST10P	92.1	175	48	6.2	25
	ST20E	91.9	200	56	5.2	45
	A30	91.3	230	53	5.2	-
M	U10E	92.4	170	47	-	-
	U2	91.1	210	-	-	88
	A30	91.3	230	53	5.2	-
	A40	89.2	270	-	-	-
K	H2	93.2	185	61	4.4	105
	H01	92.9	210	66	4.7	109
	G10E	90.9	250	63	-	105

1KPa = 102kgf/m², 1w/mk = 2.39×10⁻³cal/cm-sec-°C



Milling Cermet Grades

Features

- ▶ High hardness substrate ensures long tool life in high speed milling.
- ▶ High toughness cutting edge ensures long tool life even in high impact machining.
- ▶ Chemically stable substrate provides excellent surface finish of the workpiece.

Selection system

Workpiece	Machining types	Grade	Recommended cutting speed(m/min)	ISO	Application range
P Steel	Continuous cutting	CN2000	250 (200 ~ 300)	P10	
		CN20	180 (130 ~ 230)	P20	
	Interrupted cutting	CN30	150 (100 ~ 200)	P30	

The features of main cermet grades

Cermet Grade	ISO	Features
CN2000	P20 ~ P30	• Universal grade from finishing to roughing of steel • Functionally Gradient Material
CN20	P20 ~ P30	• For general turning and milling of steel • Universal cermet with wear resistance and toughness
CN30	P25 ~ P35	• For milling of steel • Cermet with high toughness

The physical properties of grades

Workpiece	Grade	Hardness(Hv)	TRS(kgf/mm ²)	SG(g·cm ⁻³)
P	CN2000	< 1800	210 <	6.8 ~ 7.0
	CN20	< 1600	220 <	6.7 ~ 7.0
	CN30	< 1500	240 <	7.0 ~ 7.3


Cutting performance (CN30)

P Carbon steel (SM45C)

- **Cutting condition** vc(m/min) = 120~150
fz(mm/t) = 0.07~0.13
ap(mm) = 2.0
dry

- **Designation** INSERT SDCN42MT
HOLDER ADN4315R

Test result




P Mold steel (KP4M)

- **Cutting condition** vc(m/min) = 230
fz(mm/t) = 0.1~0.15
ap(mm) = 1.0
dry

- **Designation** INSERT SDCN42MT
HOLDER ADN4315R

Test result



Selection of Solid endmill grades

Item	Grade		Item	Grade	
	Coated	Uncoated		Coated	Uncoated
H-Max	PC203F		Endmill for HRSA	PC210	
H Endmill <i>New</i>	PC303S, PC310U		S+ Endmill <i>New</i>	PC325	
V Endmill <i>New</i>	PC215F		Aluminum solid endmill	PD3000	H01
I-Max	PC220	FA2	A+ Endmill <i>New</i>	H05S	
Z Endmill <i>New</i>	PC315E		C-Max	PC210C	
I+ Endmill <i>New</i>	PC320		D-Max	ND3000	
F Endmill	PC203F		Brazed endmill	PC221F	FCC
Micro Endmill	PC215F				

Selection system of PVD coated grades

Workpiece	grade	ISO	Application range
P Steel	PC303S <i>New</i>	P01	
	PC310U <i>New</i>	P10	PC303S <i>New</i> → PC203F → PC310U <i>New</i>
	PC315F <i>New</i>	P20	
	PC320 <i>New</i>	P30	PC315E <i>New</i> → PC320 <i>New</i> → PC215F → PC220 → FA2 → PC221F FCC
		P40	
M Stainless steel	PC303S <i>New</i>	M01	
	PC310U <i>New</i>	M10	PC303S <i>New</i> → PC203F → PC310U <i>New</i>
	PC210 <i>New</i>	M20	PC210 <i>New</i> → PC325 <i>New</i> → PC315F <i>New</i> → PC320 → PC215F → PC220
	PC325 <i>New</i>	M30	
	PC315E <i>New</i>	M40	
K Cast iron	PC303S <i>New</i>	K01	
	PC310U <i>New</i>	K10	PC303S <i>New</i> → PC203F → PC310U <i>New</i>
	PC315F <i>New</i>	K20	
	PC320 <i>New</i>	K30	PC315E <i>New</i> → PC320 <i>New</i> → PC215F → PC220 → FA2
		K40	
N Non ferrous	ND3000	N01	ND3000 → PD3000 → H01 → H05S
	PD3000	N05	
	H01	N10	
	H05S	N20	PC210C → FA2
	PC210C	N30	
	FA2	N40	
S HRSA	PC210 <i>New</i>	S10	
	PC325 <i>New</i>	S20	PC210 <i>New</i> → PC325 <i>New</i> → PC315E <i>New</i> → PC320 → PC215F → PC220 → FA2
	PC315E <i>New</i>	S30	
	PC303S <i>New</i>	S30	
H High hardness steel	PC303S <i>New</i>	H01	
	PC203F	H10	PC303S <i>New</i> → PC203F → PC310U <i>New</i>
	PC310U <i>New</i>	H20	



The features of PVD coated grades

Workpiece	ISO	Features
PC303S <i>New</i>	P05~P15 / M05~M15 K05~K15	<ul style="list-style-type: none"> Excellent wear/chipping resistance in high speed machining due to the combination of ultra fine substrate and PVD coating For high speed machining of high hardness steel New film applied with excellent oxidation resistance and hardness at high temperature
PC310U <i>New</i>	P10~P20 / M10~M20 K10~K20	<ul style="list-style-type: none"> Excellent wear/chipping resistance in high speed machining due to the combination of ultra fine substrate and PVD coating For high speed machining of high hardness steel New film applied with excellent oxidation resistance and hardness at high temperature
PC315E / PC320 <i>New</i>	P20~P35 / M20~M30 K20~K35 / S20~S30	<ul style="list-style-type: none"> Excellent wear/welding resistance in high speed machining due to the combination of ultra fine substrate and PVD coating For low/medium speed machining of general steel New film applied with excellent chipping/wear resistance
PC325 / PC210 <i>New</i>	M15~M25 S15~S25	<ul style="list-style-type: none"> For low/medium speed machining of stainless steel and heat resistant alloy Excellent wear/welding resistance in high speed machining due to the combination of ultra fine substrate and PVD coating New film applied with excellent welding/oxidation resistance
PC210C	N10~N20	<ul style="list-style-type: none"> Excellent combination of chipping resistance substrate and K-Silver coating file having wear resistance, good lubrication
ND3000	N01~N05	<ul style="list-style-type: none"> For electrode machining of graphite at medium to high speeds Dia. coating layer with high wear resistance and lubrication
PD3000	N05~N10	<ul style="list-style-type: none"> For non-ferrous metals(Aluminum alloy) machining DLC(Diamond Like Carbon) coating layer with high wear resistance and lubrication



Ultra fine grain cemented carbide

- ▶ **Features**
 - ▶ Ultra fine grade has better toughness than general cemented carbide with same hardness. These properties allow it to replace High Speed Steel
 - ▶ This is achieved through a high oxidation temperature(1200°C) with high hardness, and provides superior performance for high speed cutting and dry cutting

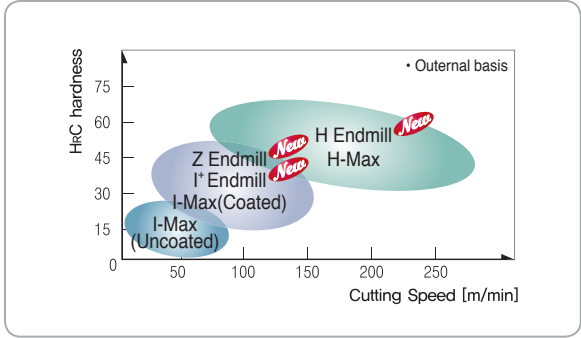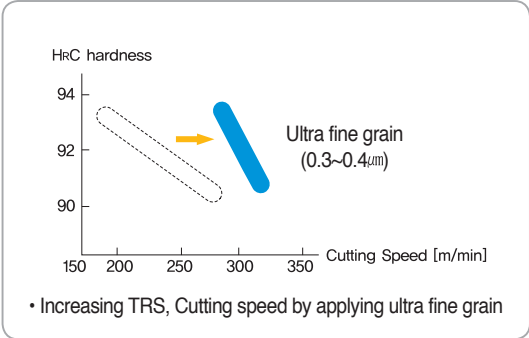

▶ Features of Korloy endmills

Index	Features
H Endmill / H-Max (Endmill for high hardness steel)	<ul style="list-style-type: none"> • Negative cutting edges proper to machine high hardness heat-treated workpiece under H_RC70 • Longer tool life with the use of ultra fine substrate and high hardness film
Z Endmill / I⁺ Endmill (Endmill for general cutting)	<ul style="list-style-type: none"> • Excellent in machining various workpieces such as carbon steel, cast iron, pre hardened steel, etc. under H_RC70 • Longer tool life with the use of ultra fine substrate and new coating technology
SSEA / A⁺ Endmill (Endmill for aluminum)	<ul style="list-style-type: none"> • Suitable for high speed machining in aluminum and other non-ferrous materials • Can accomplish excellent surface finishing, superior chip removal in high feed rate
IFSE / S⁺ Endmill (Endmill for hard-to-cut materials)	<ul style="list-style-type: none"> • Sharp cutting edge and high rake angle with streamline chip pocket shows good cutting performance in stainless steel machining where work hardening is a problem.
C-Max	<ul style="list-style-type: none"> • Excellent combination of chipping resistant substrate and CrN coating film having wear resistance and chipping resistance
D-Max	<ul style="list-style-type: none"> • Optimum coated property with fine diamond particle in nonferrous metal machining as graphi increasing tool life and good surface roughness through improved edge geometry • Available to cutting application in intermittent cutting condition and high precision machining as well



Selection of drill grades

Item	Grade	
	Coated	Uncoated
MSD	PC205F	FG2
MSD Plus <i>New</i>	PC325U	FG2
MLD	PC215G, PC315G	FG2
MLD Plus <i>New</i>		
VZD	PC230F	
SSD		FG2

Selection system

Workpiece	ISO	Application range
P Steel	P01	
	P10	
	P20	PC215G <i>New</i> → PC315G <i>New</i> → PC205F → PC325U <i>New</i> → PC230F
	P30	
M Stainless steel	M01	
	M10	
	M20	PC215G <i>New</i> → PC315G <i>New</i> → PC205F → PC325U <i>New</i>
	M30	
K Cast iron	K01	
	K10	
	K20	PC215G <i>New</i> → PC315G <i>New</i> → PC205F → PC325U <i>New</i>
	K30	
N HRSA	N01	
	N10	FG2
	N20	
	N30	

The features of PVD coated grades

Grade	ISO	Features
PC205F	P20 ~ P35 M20 ~ M30 K20 ~ K35	<ul style="list-style-type: none"> • Universal grade for machining steel, cast iron, stainless steel, heat resistant alloy, etc. • Substrate with excellent wear/chipping resistance and TiAlN film
PC325U <i>New</i>	P20 ~ P35 M20 ~ M30 K20 ~ K35	<ul style="list-style-type: none"> • Universal grade for machining steel, cast iron, stainless steel, etc. • Stable cutting performance with excellent wear/chipping resistance • Increased welding resistance due to lubricative new coating at medium to high speed
PC215G <i>New</i>	P15 ~ P30 M15 ~ M25 K15 ~ K30	<ul style="list-style-type: none"> • Universal grade for machining steel, cast iron, etc. • Stable cutting performance with excellent wear/chipping resistance
PC315G <i>New</i>	P15 ~ P30 M15 ~ M25 K15 ~ K30	<ul style="list-style-type: none"> • Universal grade for machining steel, cast iron, stainless steel, etc. • Stable cutting performance with excellent wear/chipping resistance • Increased welding resistance due to lubricative new coating at medium to high speed
PC230F	P25 ~ P35	<ul style="list-style-type: none"> • For machining general steel at medium to high speed • Stable cutting performance with excellent wear/chipping resistance
FG2	N05 ~ N25	<ul style="list-style-type: none"> • Increased wear/chipping resistance with the use of ultra fine substrate





Diamond Coated Grades


- ▶ **Features**
 - ▶ Increased tool life of up to 150% due to KORLOY's nano technology
 - ▶ The nano-size (~100nm) of diamond particles decreases the friction co-efficient. Less friction leads to better chip flow
 - ▶ Due to the minimized built-up is guaranteed edges, the excellent surfaces finish



Application range

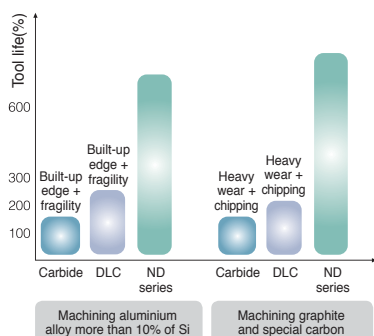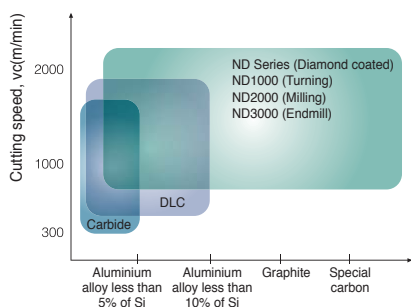

Cutting Performance of ND Series

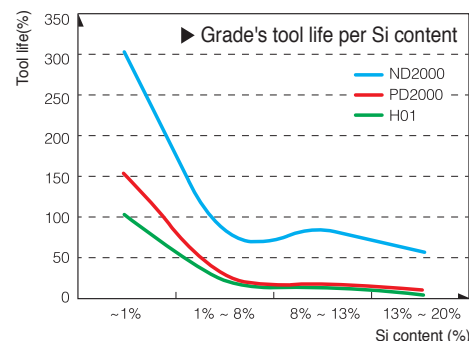


- Graphite machining
 - Mold making by graphite electrode
 - For machining raw material of anode
 - lithium ion secondary battery
 - Special carbon machining
- Aluminium alloy machining
 - Al6061(Aircraft, frame)
 - Al7075(Aircraft)
 - Al4032(Cylinder head)

- ▶ **Recommended products**
 - ▶ Insert for aluminium machining (AK breaker, MA breaker)
 - ▶ Endmill for aluminium machining (D-Max)

DLC Coated Grades

- ▶ **Features**
 - ▶ Hardness of film is up to Hv 7000, tool life is 3~6times of cemented carbide cutting tool
 - ▶ Good surface finish can be acquired due to the lubrication effect that led from low friction co-efficient (<0.1)
 - ▶ Suitable for non-ferrous material machining

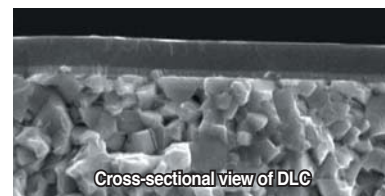


- ▶ **Application** ▶ For aluminum, carbon, plastic, wood / Insert, drill, endmill

Cutting performance (Built-up edge / surface finish, FMACM3100R)

Grade	View	Top face	Major cutting edge	Surface finish of workpiece
Uncoated				
DLC				

• Workpiece : AC2B
 • Cutting length : 12m • Cutting condition : vc=1500m/min, fz=0.15mm/t, ap=2mm, Dry

Application range

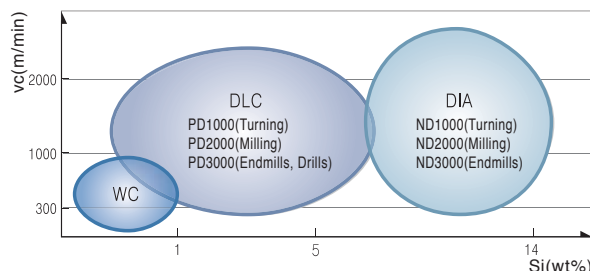

Leader of DLC coated cutting tool for aluminum machining







Brand new cBN insert

- Features**
- ▶ Excellent hardness and thermal resistance by sintering KORLOY's main constituents and special ceramic binder at high pressure and high temperature
 - ▶ Excellent hardness and wear resistance for higher productivity in machining cast iron and heat-treated alloy at high speed


▶ Insert type

High precision		Wear resistance		Productivity	
					
For regrinding type	One use type	Multi-corner type	Multi-corner type (coated)	Solid type	Grooving type


cBN Application range

cBN Coated Multi-Cornered cBN	One use type
 <p>2NU-CNGA120408</p> <ul style="list-style-type: none"> • Easy handling of corners • Strong Brazing • Excellent tool life compared to non-coated insertse 	 <p>NU-CNGA120408</p> <ul style="list-style-type: none"> • Economic price. Easy handling of tools • A wide variety of series • Smaller than expensive cBN and dramatic cost down • Strong weld face and stable cutting performance
Multi edge type	Regrinding type
 <p>2NU-CNGA120408</p> <ul style="list-style-type: none"> • Price per edge is more reasonable compare to normal single cornered, one-used type • Insert with several brazed cBN • Wide application of continuous to interrupted machining 	 <p>CNMA120408</p> <ul style="list-style-type: none"> • Long tool life • Excellent wear resistance, High hardness • Saved tool cost due to the regrinding insert 3~4 time

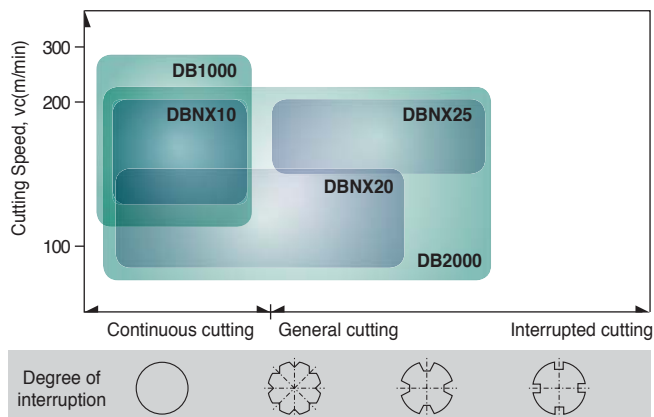










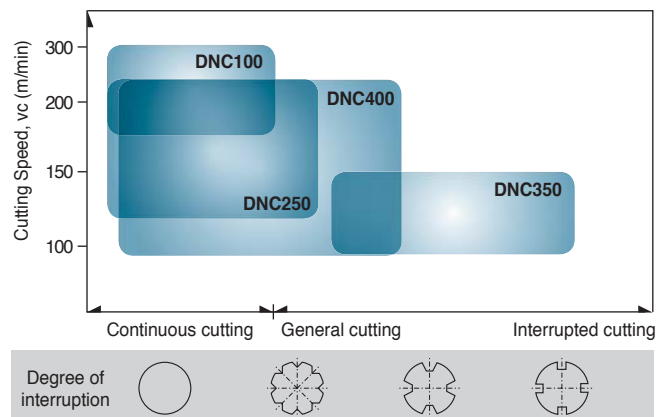





cBN Application range



Coated cBN Application range



Cutting conditions of cBN grades

ISO	Grades	Insert color	Application	Cutting Speed v_c						feed, f_n	Depth of cut, a_p	
				50	100	150	200	250	300			
H Heat-treated steel	Coated	DNC100 <i>New</i>		Continuous cutting at high speed	180  300						0.03~0.3	0.03~0.3
		DNC250		Continuous and low interrupted cutting at high speed	120  220						0.05~0.3	0.05~0.3
		DNC350		Medium and high interrupted cutting	90  150						0.05~0.3	0.05~0.3
		DNC400 <i>New</i>		Continuous and medium interrupted cutting	90  220						0.05~0.3	0.05~0.5
	Non-coated	DBNX10		Continuous cutting at high speed	150  200						0.03~0.13	0.03~0.2
		DB1000		Continuous cutting at high speed	130  250						0.03~0.15	0.03~0.2
		DBNX20		Highly efficient cutting	120  150						0.03~0.3	0.03~0.5
		DBNX25		Interrupted cutting at high speed	150  200						0.03~0.3	0.03~0.5
		DBN250		Medium and low interrupted cutting	80  120						0.03~0.2	0.03~0.3
		DB2000		Medium and low interrupted cutting	80  200						0.03~0.2	0.03~0.3
		DBN350		High interrupted cutting	80  110						0.03~0.2	0.03~0.3
		DBN400		High speed and high depth of cut	120  220						0.10~0.3	0.5

Solid type cBN

DBN400

Features


- ▶ For medium and light interrupted cutting of heat-treated steel
- ▶ Balanced grade of wear resistance and shock resistance
- ▶ Solid type for highly efficient machining

Features of solid type




- ▶ Increased productivity at high speed and high depth of cut
- ▶ Ideal for removing cemented layer and machining the welds
- ▶ Stable welding with the use of 3-face blazing
- ▶ Excellent performance at varying depth of cuts

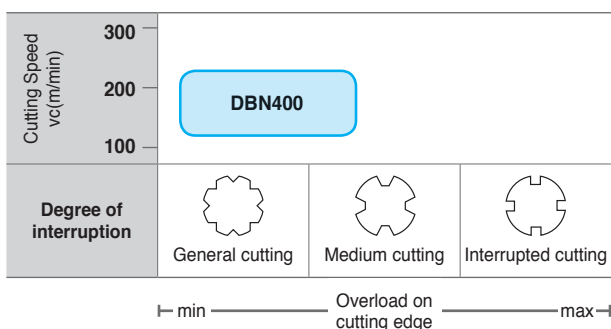

Application range



Recommended cutting condition

Cutting Speed v_c (m/min)	120  220
feed f_n (mm/rev)	0.1  0.3
Depth of cut per time a_p (mm)	 0.5




A Others


Coated cBN

DNC100 *New*

- ▶ Excellent thermal resistance
- ▶ Coating layer with high hardness, oxidation resistance and chipping resistance

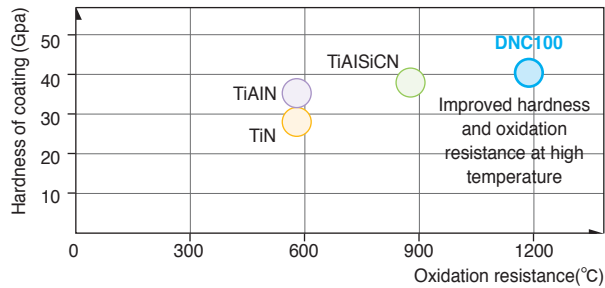

Application range

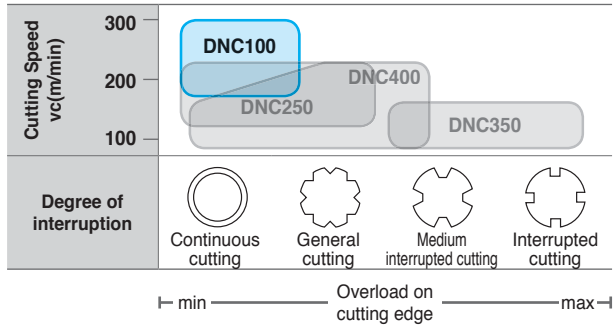

Recommended cutting condition



Cutting Speed v_c (m/min)	180 ————— 300
feed f_n (mm/rev)	0.03 ————— 0.3
Depth of cut a_p (mm)	0.03 ————— 0.3

- Increased oxidation resistance and wear resistance due to high hardness coating layer
- Dramatically improved fracture resistance and chipping resistance


Coated Multi-Cornered cBN

DNC250

- ▶ Stable and long tool life
- ▶ Cost effective by multi-cornered one-use insert

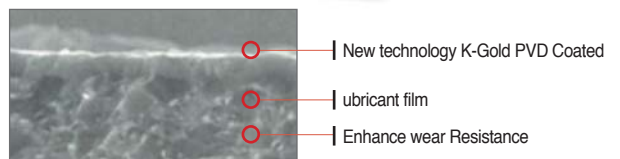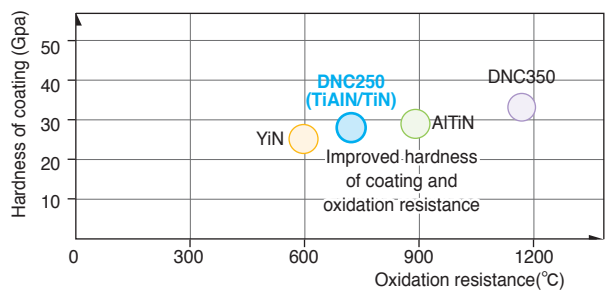

Application range

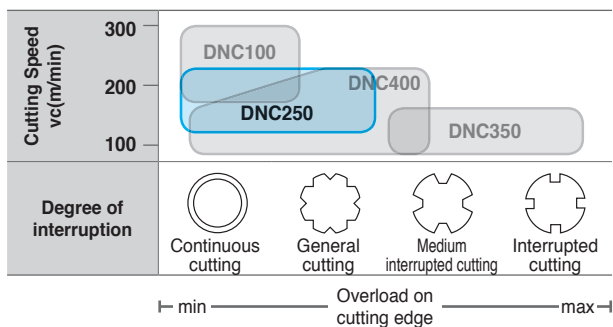



Recommended cutting condition

Cutting Speed v_c (m/min)	120 ————— 220
feed f_n (mm/rev)	0.05 ————— 0.3
Depth of cut a_p (mm)	0.05 ————— 0.3




Coated cBN for high interrupted cutting DNC350

- ▶ **Features**
 - ▶ Excellent tool life and productivity in interrupted cutting
 - ▶ New PVD coating applied with high hardness and oxidation resistance

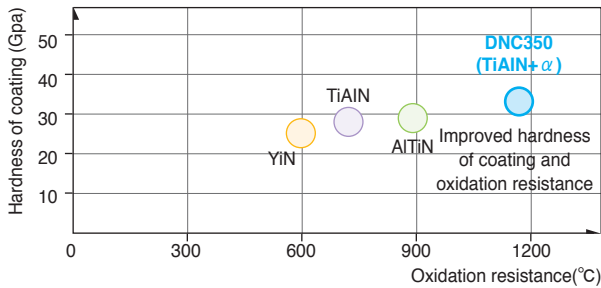

- For machining heat-treated steel in continuous and medium interrupted cutting
- Longer tool life due to coating layer
- Solid type for universal purpose

Application range

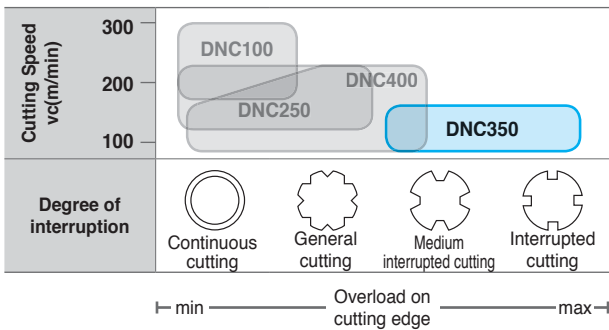

Recommended cutting condition

Cutting Speed v_c (m/min)	90 — 150
feed f_n (mm/rev)	0.05 — 0.3
Depth of cut a_p (mm)	0.05 — 0.3

Solid type coated cBN DNC400 *New*


- ▶ **Features**
 - ▶ For machining heat-treated steel in continuous and medium interrupted cutting
 - ▶ Longer tool life due to coating layer
 - ▶ Solid type for universal purpose



Features of solid type cBN

- ▶ Increased productivity at high speed and high depth of cut
- ▶ Ideal for removing cemented layer and the welds
- ▶ Better welding stability due to 3-face blazing
- ▶ Excellent cutting performance at varying depth of cuts

Application range

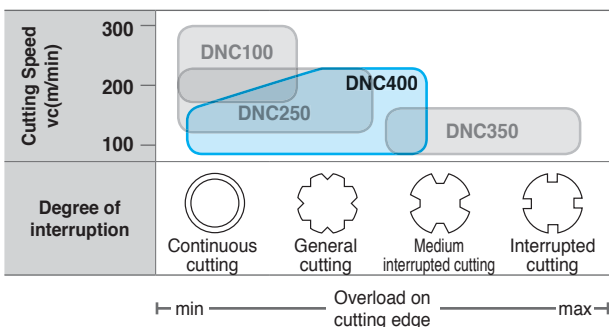

Recommended cutting condition

feed f_n (mm/rev)	DNC400	0.05 — 0.3
	DNC250	0.05 — 0.3
	DNC350	0.05 — 0.3
Depth of cut a_p (mm)	DNC400	0.05 — 0.5
	DNC250	0.05 — 0.3
	DNC350	0.05 — 0.3

Non-coated cBN

DB1000

- ▶ **Features**
 - ▶ Non-coated cBN with the highest wear resistance at high speed
 - ▶ Excellent tool life in continuous to light interrupted cutting
 - ▶ Improved fracture resistance along with high wear resistance
 - Higher thermal resistance and hardness due to pure TiCN ceramic binder




Non-coated cBN

DB2000

- ▶ **Features**
 - ▶ Universal grade for overall machining of heat-treated
 - ▶ Stable tool life in continuous to low/medium interrupted cutting
 - ▶ Both fracture resistance and wear resistance acquired with the use of pure ceramic binder
 - ▶ Stable surface roughness




▶ New technology of high purity ceramic binding materials

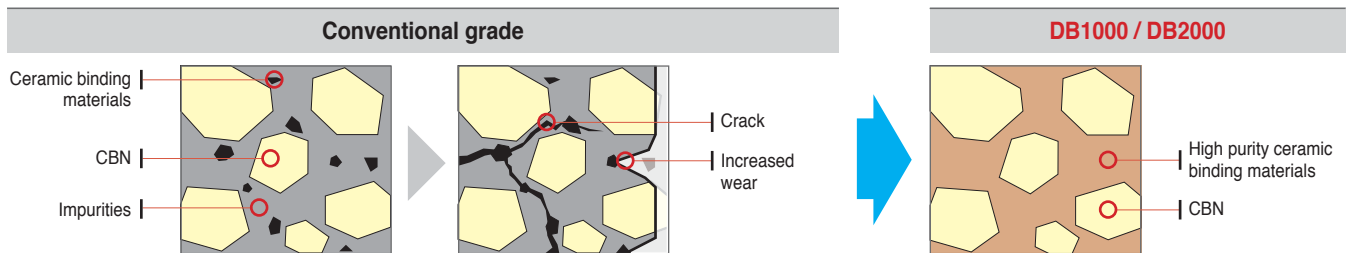

Impurities included in conventional grade's ceramic binder caused inferior thermal resistance and hardness of sintered compounds, which led to crack(fracture) and wear

DB2000 dramatically minimizes impurities with the use of high purity ceramic binding materials and enhances thermal resistance and toughness.

▶ Application range

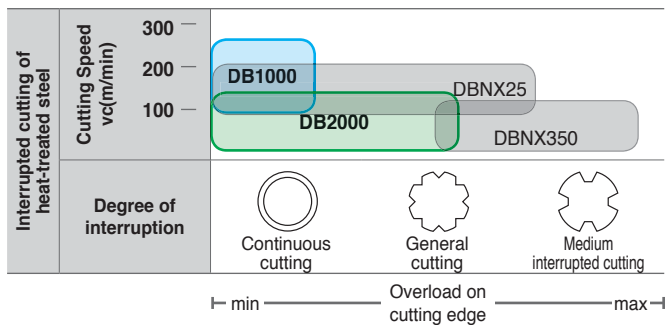

▶ Recommended cutting condition (DB1000)

Cutting Speed vc(m/min)	130 ————— 250
feed fn(mm/rev)	0.03 ————— 0.15
Depth of cut ap(mm)	0.03 ————— 0.2

▶ Recommended cutting condition (DB2000)

Cutting Speed vc(m/min)	50 ————— 200
feed fn(mm/rev)	0.03 ————— 0.2
Depth of cut ap(mm)	0.03 ————— 0.3



Technical information for PCD insert

Features KORLOY PCD products are manufactured by using high quality PCD tips under ultra high temperatures and pressure. The PCD tip is welded on the qualified KORLOY carbide insert
KORLOY high quality PCD products meet a wide range of application needs in turning, milling, and endmills.

- ▶ Excellent tool life for aluminum alloy and copper alloy
- ▶ Excellent tool life for Ceramic, high-silicon aluminum and rock or stone
- ▶ Excellent tool life for rubber, carbon, graphite and wood

PCD Grade


Grade	Features	Application	Grain size(μm)	Hardness(Hv)	TRS(kgf/mm ²)
DP90	Coarse diamond grain has been used to get excellent wear resistance enough to machine cemented-carbide, high Si aluminum alloy	Cemented carbide Ceramic roughing High Si aluminum alloy Rock, Stone	50	10,000 ~ 12,000	110
DP150	By use of fine diamond grain having good bonding property, it is suitable for machining of non-ferrous metal, graphite	High Si aluminum alloy Copper, Bronze alloy Rubber, Wood, Carbon	5	10,000 ~ 12,000	200
DP200	By use of ultra fine diamond grain, it is possible to make sharp cutting edge. Thus it is appropriate grade to machine non-ferrous material	Plastic Wood Precise finishing of aluminum	0.5	8,000 ~ 10,000	220

Recommended cutting condition


Workpiece	Cutting speed (m/min)	Feed (mm/rev)	Depth of cut (mm)	Recommended grade	
				1 st	2 nd
Aluminum alloy (4%~8% Si)	1000 ~ 3000	0.1 ~ 0.6	~ 3	DP150	DP200
Aluminum alloy (9%~14% Si)	600 ~ 2500	0.1 ~ 0.5	~ 3	DP150	DP200
Aluminum alloy (15%~18% Si)	300 ~ 700	0.1 ~ 0.4	~ 3	DP150	DP200
Copper, Bronze alloy	~ 1000	0.05 ~ 0.2	~ 3	DP150	DP200
Reinforced plastic	~ 1000	0.1 ~ 0.3	~ 2	DP150	DP200
Wood	~ 4000	0.1 ~ 0.4	-	DP150	DP200
Cemented carbide	10 ~ 30	~ 0.2	~ 0.5	DP90	DP150

Cutting performance


Continuous cutting test(Workpiece:Al-25%Si)

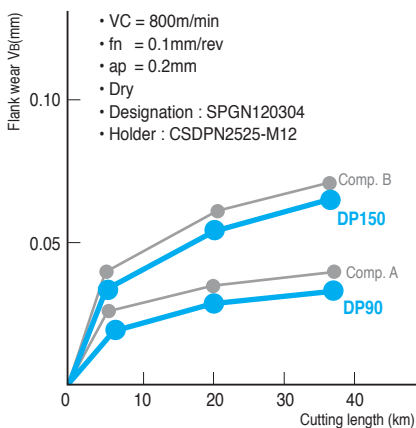






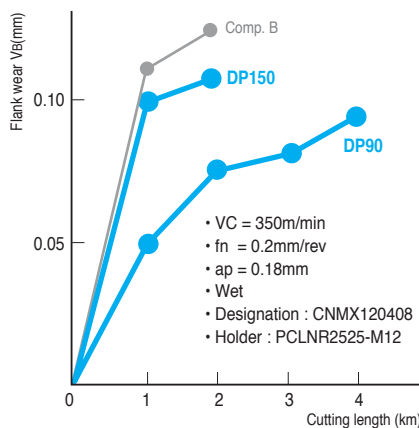



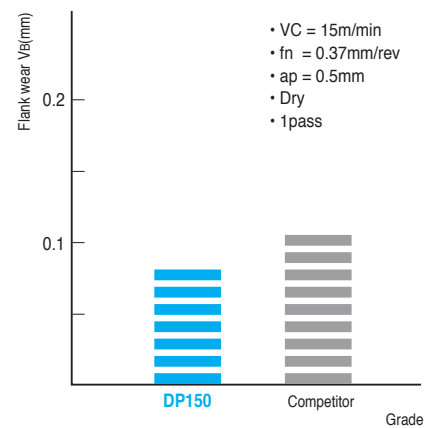














Interrupted cutting test(Workpiece:Al-20%Si)



Cutting test of cemented carbide















KORLOY Chip Breaker For Turning

Geometry	Cutting edge	Application range													Features										
		feed rate f_n (mm/rev)																							
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3												
depth of cut a_p (mm)																									
													0.1	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	11.6	13
V Series	VG							0.10~0.35																	For finishing <ul style="list-style-type: none"> Ensures stable chip flow even at very small depth of cut Suitable for copying
	VQ							0.10~0.40																	For Medium to Finish Cutting <ul style="list-style-type: none"> Strong cutting edge makes excellent cutting performance at interrupted cutting
	VL							0.10~0.35																	For Finishing <ul style="list-style-type: none"> Stable chip control in high toughness material; low carbon steel, pipe steel & steel plates Improved chip control for facing, copy machining and better surface finish
	VF							0.05~0.35																	For Finishing <ul style="list-style-type: none"> Good chip control quality on varied depth of cut Excellent cutting edge strength has been acquired due to the special chip-breaker
	VB							0.15~0.45																	For Finishing <ul style="list-style-type: none"> Improved chip control for smaller depth of cuts Excellent chip control in copying, corner R machining
	VC							0.12~0.45																	For Medium to Finish Cutting <ul style="list-style-type: none"> Stable chip control in copying and internal machining with various depths of cut
	VM							0.10~0.50																	For Medium cutting <ul style="list-style-type: none"> Wide available chip control range from medium-finishing to medium-roughing Suitable chip breaker for CNC machining
	VK							0.15~0.50																	For Medium to Roughing of Milling <ul style="list-style-type: none"> Optimal for high speed machining and interrupted machining
	VH																								For Heavy duty cutting <ul style="list-style-type: none"> Designed specifically for heavy machining Specialized chip breaker for the heavy industries like Ship building, Power plant industry
	VT																								For Heavy duty cutting <ul style="list-style-type: none"> Designed specifically for heavy machining Specialized chip breaker for the heavy industries like Ship building, Power plant industry
	VP1																								For Finishing <ul style="list-style-type: none"> High positive cutting edge Reduced contract chip minimizes temperature to improve tool life
	VP2																								For Medium to Finish Cutting <ul style="list-style-type: none"> Stable chip control and high machinability in copying with various depths of cut

Notice : Application ranges are based on main cutting material



























KORLOY Chip Breaker For Turning

Geometry	Cutting edge	Application range											Features			
		feed rate f_n (mm/rev)														
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0		6.3		
		depth of cut a_p (mm)														
		0.1	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	11.6	13		
V Series	VP3					0.05~0.45			0.5~4.5							For Medium cutting <ul style="list-style-type: none"> High positive cutting edge with wide land Stable cutting performance in interrupted machining with high toughness Stable machinability and chip control in machining with high depth of cut
	VR						0.20~0.50			1.2~5.0						For Medium cutting of cast iron and Medium to Roughing of steel <ul style="list-style-type: none"> High feed machining with the combination of wide land and pockets Shallow chip breaker design prevents chip blocking at high feed Decreased wear on major cutting edge due to special treatment on blade
-P Series	LP					0.10~0.40			0.5~2.5							For Medium to Finish cutting of steel <ul style="list-style-type: none"> Angle land decreases cutting resistance for better surface roughness Special dot design prevents chip blocking by clear chip breaking
	MP					0.10~0.45			0.5~4.4							For Medium cutting <ul style="list-style-type: none"> Increased productivity due to excellent chip control in various conditions Stable tool life by reducing cutting load at high speed and high feed
H Series	HR						0.25~0.65			2.5~7.0						For Light-alloy, Stainless-steel machining <ul style="list-style-type: none"> Sharp cutting edge generates low cutting force Specially designed tough main cutting edge Suitable for cutting of low carbon steel, stainless steel, aluminum
	HA		0.03~0.30				0.5~2.5									For Light-alloy, Stainless-steel machining <ul style="list-style-type: none"> Sharp cutting edge generates low cutting force Specially designed tough main cutting edge Suitable for cutting of low carbon steel, stainless steel, aluminum
	HS					0.10~0.40			1.0~4.0							For Medium cutting of Stainless steel <ul style="list-style-type: none"> Exclusive design for stainless steel cutting provide longer tool life Wear resistance have been reinforced through high rake angle of chip breaker land
G Series	GM					0.10~0.50			0.7~4.0							For Medium to Light cutting <ul style="list-style-type: none"> Excellent chip control at general cutting conditions Strong cutting edge strength provides good performance at intermittent and fast feed cutting
	GR						0.30~0.80			3.0~8.0						For Medium to Roughing <ul style="list-style-type: none"> Suitable for deep depth of cut and high feed cutting of steel and cast iron Suitable for intermittent cutting
	GH						0.30~1.30			3.0~11.0						For Heavy duty cutting <ul style="list-style-type: none"> Suitable for heavy duty cutting due to strong cutting edge Wide chip control range with low cutting force
	GS					0.15~0.50			1.5~5.5							For Medium to Roughing of Stainless-steel <ul style="list-style-type: none"> Exclusive chip breaker for stainless steel
B Series	B25						0.50~1.00			4.0~10.0						For General cutting <ul style="list-style-type: none"> Suitable for general cutting condition cutting

Notice : Application ranges are based on main cutting material



























KORLOY Chip Breaker For Turning

Geometry	Cutting edge	Application range													Features									
		feed rate f_n (mm/rev)																						
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3											
depth of cut a_p (mm)																								
0.1													0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	11.6	13
V-Posi Series	VF			<div style="display: flex; justify-content: space-between;"> 0.05~0.25 0.1~1.5 </div>													For Finishing <ul style="list-style-type: none"> Improved surface finish and size accuracy due to stable inner boring 							
	VL			<div style="display: flex; justify-content: space-between;"> 0.05~0.20 0.1~1.0 </div>													For Finishing <ul style="list-style-type: none"> Superior chip control in low carbon steel, pipes, and steel plates 							
	VP1			<div style="display: flex; justify-content: space-between;"> 0.01~0.25 0.1~1.5 </div>													For Finishing <ul style="list-style-type: none"> Excellent chip control in application with micro depth of cut and low feed Low cutting load and superb surface finish Optimal for both internal and external machining 							
H-Posi Series	HMP			<div style="display: flex; justify-content: space-between;"> 0.08~0.40 0.5~3.5 </div>													For Medium cutting <ul style="list-style-type: none"> Excellent chip control at wide range of cutting conditions Suitable for stainless steel cutting 							
C Series	C25			<div style="display: flex; justify-content: space-between;"> 0.10~0.35 1.0~3.0 </div>													For Medium cutting <ul style="list-style-type: none"> Suitable for interrupted cutting and cast iron machining Good surface finish due to low cutting force Suitable for both boring and outer diameter turning 							
P-Posi Series	MP			<div style="display: flex; justify-content: space-between;"> 0.05~0.30 0.3~3.0 </div>													For Medium cutting <ul style="list-style-type: none"> Sharp cutting edge and wide chip pocket for low cutting load Stable chip control at varying depth of cuts Excellent cutting performance when machining automobile components 							
AL Series	AK			<div style="display: flex; justify-content: space-between;"> 0.03~0.40 0.1~4.0 </div>													For Aluminum cutting <ul style="list-style-type: none"> High rake angle and low resistance cutting edge secures long tool life in continuous cutting of aluminum turning High speed of finishing operation 							
	AR			<div style="display: flex; justify-content: space-between;"> 0.05~0.50 0.5~4.0 </div>													For Aluminum cutting <ul style="list-style-type: none"> High stability of cutting edge secures great performance in high speed and interrupted machining High speed of medium and interrupted operation 							
Auto tool Series	KF			<div style="display: flex; justify-content: space-between;"> 0.01~0.12 0.01~1.0 </div>													For Finishing <ul style="list-style-type: none"> Shallow depth of cut with sharp edge. Longer tool life at high speed cutting due to low cutting force Good surface finish 							
	KM			<div style="display: flex; justify-content: space-between;"> 0.04~0.15 0.05~1.5 </div>													For Medium to Finish Cutting <ul style="list-style-type: none"> Improved chip control makes tool life long and better machining 							
Wiper tool Series	LW			<div style="display: flex; justify-content: space-between;"> 0.15~0.60 1.0~5.0 </div>													For Medium cutting(Wiper) <ul style="list-style-type: none"> Guarantees excellent surface roughness and good chip controls at high feed machining 							
	VW			<div style="display: flex; justify-content: space-between;"> 0.15~0.50 0.5~3.5 </div>													For Finishing(Wiper) <ul style="list-style-type: none"> Improved surface roughness at shallow depth of cut and high feed due to strong cutting edge 							

Notice : Application ranges are based on main cutting material



























KORLOY Chip Breaker For Milling

Geometry	Cutting edge	Application range											Features											
		feed rate f_n (mm/rev)																						
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0		6.3										
depth of cut a_p (mm)																								
											0.1	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	11.6	13	
MX Series	MX																							For General Milling <ul style="list-style-type: none"> Possible to increase productivity through increase feed and depth Excellent heat resistance due to the special chip breaker design of top face of insert
RichMill Series-FM3	MA																							For Aluminum Milling <ul style="list-style-type: none"> Sharp cutting edge for low cutting load, which is ideal for machining steel, hard-to-cut materials and aluminum
	ML																							For machining Hard-to-cut materials <ul style="list-style-type: none"> Low cutting resistance for light cutting and machining hard-to-cut materials with excellent tool life and surface roughness
	MM																							For Medium to Roughing <ul style="list-style-type: none"> Available for most of applications with universal design for general milling
	MM																							For Aluminum Milling <ul style="list-style-type: none"> Sharp cutting edge design ensures low cutting resistance and excellent machining in difficult-to-cut materials, aluminum and light machining
RichMill Series-RM4	MA																							For Finishing of Milling <ul style="list-style-type: none"> Low cutting force chip breaker design ensures longer tool life and excellent machining in difficult-to-cut material and light machining
	MF																							For Medium to Roughing of Milling <ul style="list-style-type: none"> Suitable geometry design for general milling has wider ranges of machining
	MM																							For Aluminum <ul style="list-style-type: none"> Sharp cutting edge and lubricated top face show excellent chip flow and welding resistance in aluminum machining
RichMill Series-RM8	MA																							For Finishing of Milling <ul style="list-style-type: none"> Low cutting force chip breaker design ensures longer tool life and excellent machining in difficult-to-cut material and light machining
	ML																							For machining Hard-to-cut materials <ul style="list-style-type: none"> Low cutting resistance for excellent tool life and surface roughness in machining hard-to-cut materials
	MM																							For Medium to Roughing of Milling <ul style="list-style-type: none"> Suitable geometry design for general milling has wider ranges of machining
	MF																							For Finishing of Milling <ul style="list-style-type: none"> Low cutting force chip breaker design ensures longer tool life and excellent machining in difficult-to-cut material and light machining

Notice : Application ranges are based on main cutting material

















KORLOY Chip Breaker For Milling

Geometry	Cutting edge	Application range												Features
		feed rate f_n (mm/rev)												
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	
depth of cut ap(mm)														
0.1 0.16 0.25 0.4 0.63 1.0 1.6 2.5 4.0 6.3 10.0 11.6 13														
RichMill Series-RMT	MM			0.05~0.30	0.5~8.0									For Medium to Roughing of Milling <ul style="list-style-type: none"> Suitable geometry design for general milling has wider ranges of machining
RichMill Series-PM16	MA			0.05~0.30	0.3~5.5									For Aluminum <ul style="list-style-type: none"> Sharp cutting edge design ensures low cutting resistance and excellent machining in difficult-to-cut materials, aluminum and light machining
	MF			0.05~0.40	0.3~5.5									For Finishing of Milling <ul style="list-style-type: none"> Low cutting force chip breaker design ensures longer tool life and excellent machining in difficult-to-cut material and light machining
	ML			0.05~0.35	0.3~5.5									For machining Hard-to-cut materials <ul style="list-style-type: none"> Low cutting resistance for excellent tool life and surface roughness in machining hard-to-cut materials
	MM			0.10~0.45	0.5~5.5									For Medium to Roughing of Milling <ul style="list-style-type: none"> Suitable geometry design for general milling has wider ranges of machining
	W			0.05~0.30	0.3~2.0									For Finishing of Milling (Wiper) <ul style="list-style-type: none"> Wiper insert provides improved surface roughness due to special cutting edge
	MA			0.10~0.40	0.5~16									For Aluminum <ul style="list-style-type: none"> Sharp cutting edge and lubricated top face show excellent chip flow and welding resistance in aluminum machining
Alpha Mill Series	MF			0.05~0.15	0.5~16									For Finishing of Milling <ul style="list-style-type: none"> Low cutting force chip breaker design ensures longer tool life and excellent machining in difficult-to-cut material and light machining
	MM			0.10~0.25	0.5~16									For Medium to Roughing of Milling <ul style="list-style-type: none"> Suitable geometry design for general milling has wider ranges of machining
	ML			0.05~0.15	0.5~16									For hard-to-cut material machining <ul style="list-style-type: none"> The chip breaker with low cutting resistance ensures superior machinability in hard-to-cut materials
	MF			0.05~0.20	0.5~5.0									For Finishing of Milling <ul style="list-style-type: none"> Special design for light cutting of gummy materials like stainless steel and hard to machine material provide fine surface finish and longer tool life
Futur Mill Series	MM			0.05~0.30	1.0~5.0									For Medium cutting of Milling <ul style="list-style-type: none"> Chip breaker design to cover general cutting condition provides wide available application range Ground type and as sintered type is available

Notice : Application ranges are based on main cutting material









KORLOY Chip Breaker For Milling

Geometry	Cutting edge	Application range													Features									
		feed rate f_n (mm/rev)																						
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3											
depth of cut a_p (mm)																								
0.1													0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	11.6	13
Futur Mill Series	MR			0.05~0.35													1.5~5.0	For Roughing of Milling <ul style="list-style-type: none"> Strongest cutting edge strength provide stable tool life even in case of severe cutting with heavy intermittent and heavy roughing 						
	MA			0.10~0.35													0.5~5.0	For Aluminum <ul style="list-style-type: none"> Sharp cutting edge and lubricated top face show excellent chip flow and welding resistance in aluminum machining 						
Futur Mill Series P-Posi	MA			0.30~0.60													0.3~6.0	For Aluminum Milling <ul style="list-style-type: none"> Excellent surface roughness due to buffed surface in machining aluminum 						
	ML			0.30~0.50													0.3~3.0	For machining Titanium and Inconel <ul style="list-style-type: none"> Low cutting resistance and high hardness cutting edges for excellent surface roughness in machining titanium and Inconel 						
	MF			0.12~0.50													0.3~6.0	For Medium cutting <ul style="list-style-type: none"> Low cutting resistance for light cutting 						
	MM			0.20~0.70													0.3~6.0	For Medium to Rough Milling <ul style="list-style-type: none"> Universal purpose for most of milling applications 						
	None C/B			0.3~0.5													0.30~0.50	For machining high hardness steel <ul style="list-style-type: none"> Ideal for machining high hardness mold steel and heat resistant alloy 						

Notice : Application ranges are based on main cutting material

KORLOY Chip Breaker For Drilling

Geometry	Cutting edge	Application range													Features									
		feed rate f_n (mm/rev)																						
		0.04	0.063	0.10	0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3											
depth of cut a_p (mm)																								
0.1													0.16	0.25	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	11.6	13
KING DRILL Series	PD			0.04~0.20													60~300	For general steel machining <ul style="list-style-type: none"> Chip breaker with strong cutting edge for universal applications with steel, stainless steel, and cast iron 						
	ND			0.04~0.10													100~400	Non-ferrous metals <ul style="list-style-type: none"> Chip breaker with sharp and polished cutting edge for aluminum and non-ferrous metals. Machining with King Drill ensures good chip flow and resistance to chip welding. 						
	LD			0.04~0.15													40~250	For general steel (mild steel and forged steel) <ul style="list-style-type: none"> Superior chip control in machining of mild steel, forged steel and stainless steel 						

Notice : Application ranges are based on main cutting material



Turning Chip Breakers

- B02 Application range of KORLOY Main Chip Breakers
- B04 Recommended Chip Breakers for workpiece
- B12 New Chip Breakers

Inserts

- B18 Turning Insert Code System (ISO)
- B20 Turning Insert (Negative)
- B55 Turning Insert (Positive)
- B79 Aluminum Insert (Positive)
- B87 cBN Insert
- B91 PCD Insert

External Tool Holder

- B93 External Tool Holder Code System (ISO)
- B94 Index for External Holder
- B97 Instruction of External Holder
- B98 Features of Double Clamp / Lever lock System
- B99 Double Clamp System
- B104 Lever Lock System
- B112 Wedge Clamp System
- B114 Clamp On System
- B116 Multi Lock System
- B123 Screw On System
- B130 Ceramic Holder

Boring Bar

- B132 Boring Bar Code System (ISO)
- B133 Index for Boring Bar
- B135 Instruction of Boring Bar assembly
- B136 Double Clamp System
- B138 Lever Lock System
- B141 Clamp On System
- B142 Multi Lock System
- B144 Screw On System
- B150 Compact Mini
- B151 Carbide Shank Boring Bar




TURNING

HSK/KM Tooling System

- B156 Technical Information for HSK / KM Tooling System
- B158 Index for HSK / KM Tooling System
- B159 HSK Tooling System
- B165 KM Tooling System

Cartridges

- B169 Cartridge Code System (ISO)
- B170 Index for Cartridge
- B171 Clamp On System
- B173 Screw On System



SAVE TURN

- B175 Technical Information for Save Turn
- B176 Save Turn Insert
- B177 SSave Turn Holder
- B180 Save Turn Boring Bar



Auto Tools

- B182 Technical Information for Auto Tools
- B183 ISO Type
- B188 Blade Type
- B191 Multi Utility Type
- B194 KGT / MGT Type
- B197 MSB Tool
- B203 Sleeve

B





TURING

Korloy turing tools cover a wide application range with a full line-up of ISO tools that produce high quality and high precision parts for all manufacturers requirements.

B Turning Chip Breakers

Applications range of chip breakers

▶ Negative inserts

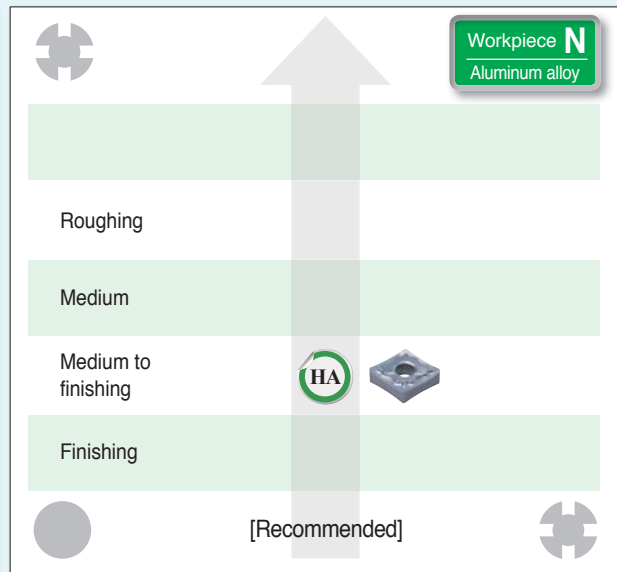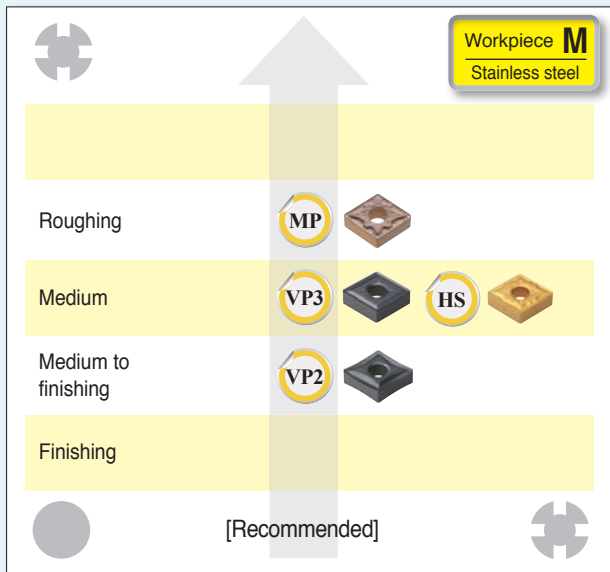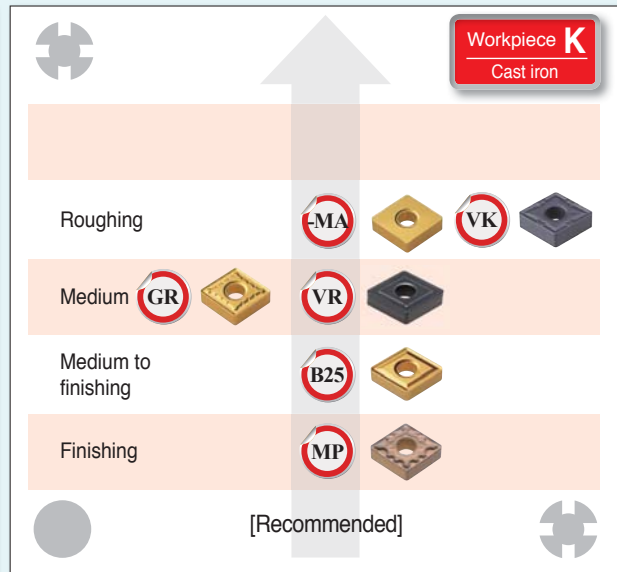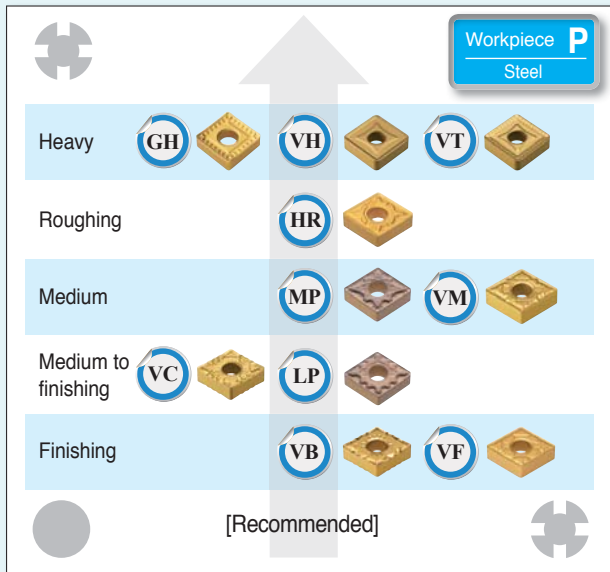

Applications range of chip breakers

▶ Positive inserts

Workpiece P
Steel

Roughing

Medium **C25**

Medium to finishing **HMP** **MP**

Finishing **VL** **VF**

[Recommended]

Workpiece K
Cast iron

Roughing

Medium **C25**

Medium to finishing **MP**

Finishing

[Recommended]

Workpiece M
Stainless steel

Roughing

Medium **C25**

Medium to finishing **HMP** **MP**

Finishing **VL**

[Recommended]

Workpiece N
Aluminum alloy

Roughing

Medium **AR**

Medium to finishing **AK**

Finishing

[Recommended]

Workpiece S
Heat resistant alloy

Roughing

Medium

Medium to finishing **MP**

Finishing **VPI** **VL**

[Recommended]



B Turning Chip Breakers

Recommended chip breaker for workpiece


Workpiece
P
Steel

Materials : SM10C, SM15C, SM25C, SS400, SCr415, SCM415, etc. Soft steel


Hardness : under 180HB

Depth of cut (mm)	C/B	Cutting edge	Feed (mm/rev)	Grades	Cutting Speed (m/min)	Insert shape					
						80°	55°	90°	60°	35°	80°
Negative	0.2 ~ 0.8 ~ 1.5 finishing	VL	0.1 ~ 0.2 ~ 0.35	NC3215 NC3225 CN1500 CN2500	305 250 260 230	CNMG p. B20	DNMG p. B27	SNMG p. B35	TNMG p. B43	VNMG p. B49	WNMG p. B51
	0.5 ~ 1.0 ~ 1.5 finishing	VF	0.05 ~ 0.15 ~ 0.35	NC3215 NC3220 NC3225 NC5330	305 270 270 210	CNMG p. B20	DNMG p. B26	SNMG p. B35	TNMG p. B43	VNMG p. B49	WNMG p. B51
	0.5 ~ 1.0 ~ 2.0 finishing	VB	0.15 ~ 0.2 ~ 0.4	NC3215 NC3225 CN1500 CN2500	340 250 240 210	CNMG p. B20	DNMG p. B26		TNMG p. B42		WNMG p. B51
	0.5 ~ 1.5 ~ 3.5 medium to finishing	VC	0.12 ~ 0.25 ~ 0.45	NC3215 NC3220 NC3225 NC5330	285 250 255 200	CNMG p. B21	DNMG p. B28	SNMG p. B36	TNMG p. B44	VNMG p. B49	WNMG p. B52
	0.5 ~ 1.0 ~ 2.5 medium to finishing	LP	0.10 ~ 0.25 ~ 0.40	NC3215 NC3225	300 250	CNMG p. B21	DNMG p. B27	SNMG p. B35	TNMG p. B44	VNMG p. B49	WNMG p. B52
	0.5 ~ 1.5 ~ 4.5 medium to finishing	MP	0.15 ~ 0.30 ~ 0.45	NC3215 NC3225	300 265	CNMG p. B22	DNMG p. B28	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B53
	1.0 ~ 2.5 ~ 5.0 medium to finishing	VM	0.10 ~ 0.25 ~ 0.50	NC3215 NC3220 NC3225 NC5330 CN1500 CN2500	295 260 260 205 220 200	CNMG p. B22	DNMG p. B29	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B53
	2.5 ~ 4.0 ~ 7.0 roughing	HR	0.25 ~ 0.45 ~ 0.65	NC3215 NC3220 NC3225 NC5330	270 240 240 190	CNMG p. B24	DNMG p. B31	SNMG p. B38	TNMG p. B47		WNMG p. B54
	6.0 ~ 10.0 ~ 15.0 Heavy (General)	VH	0.7 ~ 1.0 ~ 1.4	NC3215 NC3030 NC500H NC5330	50~250 50~150 50~150 50~150	CNMM p. B25		SNMM p. B39			
	7.0 ~ 12.0 ~ 17.0 Heavy (High feed cutting)	VT	0.75 ~ 1.2 ~ 1.6	NC3215 NC3030 NC500H NC5330	50~250 50~150 50~150 50~150	CNMM p. B25		SNMM p. B39			

P Negative

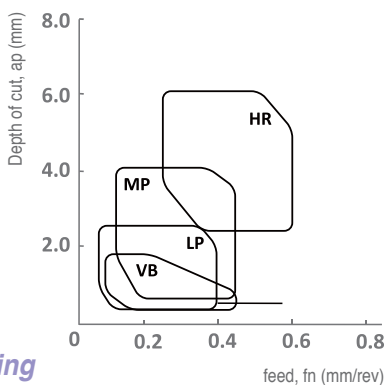

P Positive

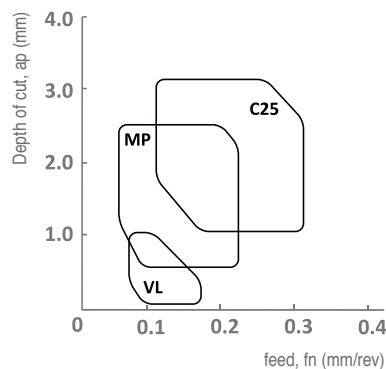

• The first recommended cutting condition






































Workpiece
P
Steel

Recommended chip breaker for workpiece

Materials : SM10C, SM15C, SM25C, SS400, SCr415, SCM415, etc. Soft steel

Hardness : under 180HB

Depth of cut (mm)	C/B	Cutting edge	Feed (mm/rev)	Grades	Cutting Speed (m/min)	Insert shape					
											
Positive	0.1 ~ 1.0 finishing	VL 	0.05 ~ 0.1 ~ 0.2	NC3215 NC3220 NC3225 NC5330 CN1500 CN2500	305 270 270 210 260 240	CCMT  p. B58	DCMT  p. B62	SCMT  p. B64	TCMT  p. B68	VB(C)MT  p. B74(B76)	
	0.1 ~ 1.5 finishing	VF 	0.05 ~ 0.15 ~ 0.25	NC3215 NC3220 NC3225 NC5330 CC1500 CN1500 CN2500	305 270 270 210 260 250 230	CCMT  p. B57	DCMT  p. B62	SCMT  p. B64	TC(P)MT  p. B68(B72)	VB(C)MT  p. B74(B76)	
	0.5 ~ 3.0 medium to finishing	MP 	0.1 ~ 0.2 ~ 0.35	NC3215 NC3225 CN1500 CN2500	300 250 240 200	CCMT  p. B58	DCMT  p. B62	SCMT  p. B64	TC(P)MT  p. B68(B72)	VB(C)MT  p. B73(B76)	
	0.5 ~ 3.0 medium to finishing	HMP 	0.08 ~ 0.20 ~ 0.40	NC3215 NC3220 NC3225 NC5330 CN1500 CN2500	320 285 285 225 240 220	CCMT  p. B58	DCMT  p. B62	SCMT  p. B64	TCMT  p. B68	VB(C)MT  p. B73(B76)	
	1.0 ~ 3.0 medium	C25 	0.10 ~ 0.25 ~ 0.35	NC3215 NC3220 NC3225 NC5330 CN1500 CN2500	320 285 285 225 230 210	CCMT  p. B58	DCMT  p. B62	SCMT  p. B64	TCMT  p. B69		

•: The first recommended cutting condition

B Turning Chip Breakers

Recommended chip breaker for workpiece

Workpiece
P
Steel

Materials : S45C, S55C, SCM430, SCM440, etc. General steel

Hardness : under 180~260HB

Depth of cut (mm)	C/B	Cutting edge	Feed (mm/rev)	Grades	Cutting Speed (m/min)	Insert shape					
						80°	55°	90°	60°	35°	80°
Negative	0.5 ~ 1.0 ~ 1.5 finishing	VF	0.05 ~ 0.15 ~ 0.35	NC3215 NC3225 NC5330	305 270 250	CNMG p. B20	DNMG p. B26	SNMG p. B35	TNMG p. B43	VNMG p. B49	WNMG p. B51
	0.5 ~ 1.0 ~ 2.0 finishing	VB	0.15 ~ 0.2 ~ 0.4	NC3215 NC3225 CN1500 CN2500	340 250 230 190	CNMG p. B20	DNMG p. B26		TNMG p. B42		WNMG p. B51
	0.5 ~ 1.0 ~ 2.5 medium	LP	0.10 ~ 0.25 ~ 0.40	NC3215 NC3225	300 250	CNMG p. B21	DNMG p. B27	SNMG p. B35	TNMG p. B44	VNMG p. B47	WNMG p. B52
	0.5 ~ 1.5 ~ 4.5 medium	MP	0.15 ~ 0.30 ~ 0.45	NC3215 NC3225	300 250	CNMG p. B22	DNMG p. B28	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B53
	0.5 ~ 1.5 ~ 3.5 Medium to finishing	VC	0.12 ~ 0.25 ~ 0.45	NC3215 NC3220 NC3225 NC5330	285 255 250 200	CNMG p. B21	DNMG p. B28	SNMG p. B36	TNMG p. B44	VNMG p. B49	WNMG p. B52
	1.0 ~ 2.5 ~ 5.0 medium	VM	0.10 ~ 0.25 ~ 0.50	NC3215 NC3220 NC3225 NC5330 CN1500 CN2500	260 245 245 205 210 170	CNMG p. B22	DNMG p. B29	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B53
	2.5 ~ 4.0 ~ 7.0 Roughing	HR	0.25 ~ 0.45 ~ 0.65	NC3215 NC3220 NC3225 NC5330	270 240 240 190	CNMG p. B24	DNMG p. B31	SNMG p. B38	TNMG p. B47		WNMG p. B54
	6.0 ~ 10.0 ~ 15.0 Heavy (General)	VH	0.7 ~ 1.0 ~ 1.4	NC3215 NC3030 NC500H NC5330	50~250 50~150 50~150 50~150	CNMM p. B25		SNMM p. B39			
	7.0 ~ 12.0 ~ 17.0 Heavy (High feed cutting)	VT	0.75 ~ 1.2 ~ 1.6	NC3215 NC3030 NC500H NC5330	50~250 50~150 50~150 50~150	CNMM p. B25		SNMM p. B39			
	Positive	0.1 ~ 0.5 ~ 1.0 finishing	VL	0.05 ~ 0.1 ~ 0.2	NC3215 NC3220 NC3225 NC5330 CN1500 CN2500	345 310 310 240 250 210	CCMT p. B58	DCMT p. B62	SCMT p. B64	TCMT p. B61	VB(C)MT p. B74(76)
0.1 ~ 0.5 ~ 1.5 finishing		VF	0.05 ~ 0.15 ~ 0.25	NC3215 NC3220 NC3225 NC5330 CC1500 CN1500 CN2500	285 300 300 230 260 240 210	CCMT p. B57	DCMT p. B62	SCMT p. B64	TC(P)MT p. B68(B72)	VCMT p. B74(B76)	
0.30 ~ 1.5 ~ 3.0 Medium to finishing		MP	0.05 ~ 0.15 ~ 0.35	NC3215 NC3225	300 250	CCMT p. B58	DCMT p. B62	SCMT p. B64	TC(P)MT p. B68(B72)	VB(C)MT p. B73(B76)	
1.0 ~ 2.0 ~ 3.0 medium		C25	0.1 ~ 0.15 ~ 0.35	NC3215 NC3220 NC3225 NC5330 CN1500 CN2500	320 285 285 225 230 200	CCMT p. B58	DCMT p. B62	SCMT p. B64	TCMT p. B69		

• The first recommended cutting condition



Workpiece
P
Steel

Recommended chip breaker for workpiece

Materials : SNC415, SNC815, SNCM240, SNCM439, STS12, STS61, etc
SCM440, Hardened steel
Hardness : 260~350HB

Depth of cut (mm)	C/B	Cutting edge	Feed (mm/rev)	Grades	Cutting Speed (m/min)	Insert shape					
						80°	55°	90°	60°	35°	80°
Negative	0.5 ~ 1.0 ~ 1.5 finishing	VF	0.08 ~ 0.15 ~ 0.30	NC3215 NC3220 NC3225	180 159 159	CNMG p. B20	DNMG p. B26	SNMG p. B35	TNMG p. B43	VNMG p. B49	WNMG p. B51
	0.5 ~ 1.0 ~ 2.0 finishing	VB	0.15 ~ 0.2 ~ 0.4	NC3215 CN1500 CN2500	200 220 200	CNMG p. B20	DNMG p. B26		TNMG p. B42		WNMG p. B51
	0.5 ~ 1.5 ~ 3.5 Medium to finishing	VC	0.12 ~ 0.25 ~ 0.45	NC3215 NC3220 NC3225 NC5330	168 148 150 200	CNMG p. B21	DNMG p. B28	SNMG p. B36	TNMG p. B44	VNMG p. B49	WNMG p. B52
	0.5 ~ 1.0 ~ 2.5 medium	LP	0.10 ~ 0.25 ~ 0.40	NC3215 NC3225	250 200	CNMG p. B21	DNMG p. B27	SNMG p. B35	TNMG p. B44	VNMG p. B49	WNMG p. B52
	0.5 ~ 1.5 ~ 4.5 medium	MP	0.15 ~ 0.30 ~ 0.45	NC3215 NC3225	250 200	CNMG p. B22	DNMG p. B28	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B52
	1.0 ~ 2.5 ~ 5.0 medium	VM	0.15 ~ 0.25 ~ 0.50	NC3215 NC3220 NC3225 CN1500 CN2500	174 153 153 120 100	CNMG p. B22	DNMG p. B29	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B53
	2.5 ~ 4.0 ~ 7.0 Roughing	HR	0.25 ~ 0.35 ~ 0.60	NC3215 NC3220 NC3225 NC5330	159 142 142 112	CNMG p. B24	DNMG p. B31	SNMG p. B38	TNMG p. B47		WNMG p. B54
	6.0 ~ 10.0 ~ 15.0 Heavy (General)	VH	0.7 ~ 1.0 ~ 1.4	NC3215 NC3030 NC500H NC5330	50~250 50~150 50~150 50~150	CNMM p. B25		SNMM p. B39			
	7.0 ~ 12.0 ~ 17.0 Heavy (High feed cutting)	VT	0.75 ~ 1.2 ~ 1.6	NC3215 NC3030 NC500H NC5330	50~250 50~150 50~150 50~150	CNMM p. B25		SNMM p. B39			
Positive	0.1 ~ 0.5 ~ 1.0 finishing	VL	0.05 ~ 0.1 ~ 0.2	NC3215 NC3220 NC3225 NC5330 CN1500 CN2500	305 310 310 240 210 190	CCMT p. B58	DCMT p. B62	SCMT p. B63	TCMT p. B68	VB(C)MT p. B74(B76)	
	0.1 ~ 0.5 ~ 1.5 finishing	VF	0.05 ~ 0.15 ~ 0.25	NC3215 NC3220 NC3225 NC5330 CC1500 CN1500 CN2500	330 300 300 230 260 250 240	CCMT p. B57	DCMT p. B62	SCMT p. B64	TC(P)MT p. B68(B72)	VB(C)MT p. B74(B76)	
	0.30 ~ 1.5 ~ 3.0 Medium to finishing	MP	0.05 ~ 0.15 ~ 0.35	NC3215 NC3225 NC5300 CN1500 CN2500	305 285 225 240 220	CCMT p. B58	DCMT p. B62	SCMT p. B64	TC(P)MT p. B68(B72)	VB(C)MT p. B73(B76)	
	1.0 ~ 2.0 ~ 3.0 medium	C25	0.1 ~ 0.15 ~ 0.35	NC3215 NC3220 NC3225 NC5330 CN1500 CN2500	320 285 285 225 100 80	CCMT p. B58	DCMT p. B62	SCMT p. B64	TCMT p. B69		

• The first recommended cutting condition

B Turning Chip Breakers

Recommended chip breaker for workpiece


Workpiece
M
Stainless steel

Materials : STS304, STS316, STS430, STS630
Ferrite, austenite, martensite, precipitation hardening stainless steels
Hardness : 135~300HB


Depth of cut (mm)	C/B	Cutting edge	Feed (mm/rev)	Grades	Cutting Speed (m/min)	Insert shape					
						80°	55°	90°	60°	35°	80°
Negative	0.5 ~ 1.5 ~ 4.0 Medium to finishing	VP2	0.10 ~ 0.20 ~ 0.40	PC8105 PC8110 PC8115 PC5300 PC5400	185 170 160 135 120	CNMG p. B22	DNMG p. B29	SNMG p. B36	TNMG p. B45		WNMG p. B52
	1.0 ~ 2.0 ~ 4.5 medium	VP3	0.15 ~ 0.23 ~ 0.45	PC8105 PC8110 PC8115 PC5300 PC5400	175 160 150 130 110	CNMG p. B22	DNMG p. B28	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B53
	1.0 ~ 2.5 ~ 4.0 medium	HS	0.10 ~ 0.20 ~ 0.40	PC8110 PC9030	160 135	CNMG p. B21	DNMG p. B30	SNMG p. B36	TNMG p. B44	VNMG p. B50	WNMG p. B52
	0.5 ~ 1.5 ~ 4.5 Roughing	MP	0.15 ~ 0.30 ~ 0.45	PC8105 PC8110 PC8115 PC5300	195 160 150 130	CNMG p. B22	DNMG p. B29	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B53
Positive	0.1 ~ 0.5 ~ 1.0 finishing	VL	0.05 ~ 0.1 ~ 0.2	PC8105 PC8110 PC8115 PC5300 PC5400 NC5330 NC9025	215 195 190 165 135 165 165	CCMT p. B57	DCMT p. B62	SCMT p. B64	TCMT p. B68	VB(C)MT p. B73(B76)	
	0.30 ~ 1.5 ~ 3.0 Medium to finishing	MP	0.05 ~ 0.15 ~ 0.35	PC8105 PC8110 PC8115 PC5300 PC5400 NC5330 NC9025	190 175 170 135 120 150 150	CCMT p. B58	DCMT p. B62	SCMT p. B64	TC(P)MT p. B68(B72)	VB(C)MT p. B73(B76)	
	1.0 ~ 1.5 ~ 3.0 medium	C25	0.08 ~ 0.13 ~ 0.25	PC8110 PC9030	170 155	CCMT p. B58	DCMT p. B62	SCMT p. B64	TCMT p. B69		

• The first recommended cutting condition

M Negative

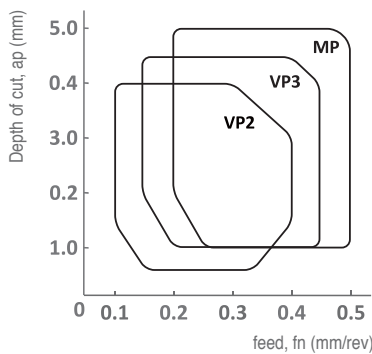



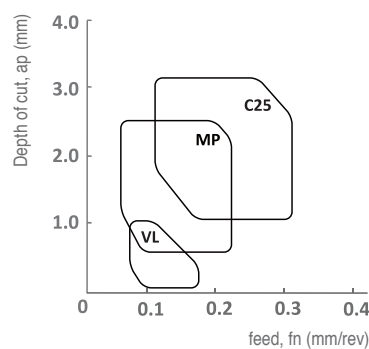




















































M Positive



Workpiece
K
 Cast iron


Recommended chip breaker for workpiece

Materials : GC250, GC300, GCD400, GCD700, etc : Gray cast iron, Ductile cast iron
 Hardness : 135 ~185HB
 Tensile strength : 450N/mm²


	Depth of cut (mm)	C/B	Cutting edge	Feed (mm/rev)	Grades	Cutting Speed (m/min)	Insert shape					
							80°	55°	90°	60°	35°	80°
Negative	1.0 ~ 2.5 ~6.0 Roughing	C/B no 		0.15 ~ 0.30 ~0.60	DBNX10 DBN500 DBN700 NC6205 NC6210 NC6215	150 ~ 200 200 ~ 500 500 ~ 2000 170 ~ 420 140 ~ 350 120 ~ 290	CNMA  p. B20	DNMA  p. B26	SNMA  p. B34	TNMA  p. B42		
	1.0 ~ 2.5 ~5.0 Roughing	VK 		0.15 ~ 0.25 ~0.60	NC6205 NC6210 NC6215	450~550 350~450 200~250	CNMG  p. B23	DNMG  p. B30	SNMG  p. B38	TNMG  p. B47	VNMG  p. B50	WNMG  p. B54
	1.0 ~ 3.0 ~4.5 Roughing	VR 		0.2 ~ 0.35 ~0.60	NC6215	200~250	CNMG  p. B24	DNMG  p. B31	SNMG  p. B38	TNMG  p. B47		WNMG  p. B54
	1.0 ~ 3.0 ~4.5 medium to roughing	GR 		0.20 ~ 0.35 ~0.50	NC6205 NC6210 NC6215	180~370 150~330 130~280	CNMG  p. B23	DNMG  p. B30	SNMG  p. B38	TNMG  p. B46		WNMG  p. B54
	0.5 ~ 2.0 ~3.5 Medium to finishing	B25 		0.2 ~ 0.35 ~0.60	NC6205 NC6210 NC6215	170~380 140~320 120~290	CNMG  p. B23	DNMG  p. B30	SNMG  p. B37	TNMG  p. B46		
	0.5 ~ 1.0 ~2.5 finishing	MP 		0.10 ~ 0.25 ~0.40	NC6215	200~250	CNMG  p. B22	DNMG  p. B22	SNMG  p. B37	TNMG  p. B45	VNMG  p. B50	WNMG  p. B53
Positive	0.30 ~ 1.5 ~3.0 Medium to finishing	MP 		0.1 ~ 0.2 ~0.35	NC6215	200-250	CCMT  p. B58	DCMT  p. B62	SCMT  p. B64	TC(P)MT  p. B68	VB(C)MT  p. B74(B76)	
	1.0 ~ 2.0 ~3.5 medium	C25 		0.10 ~ 0.25 ~0.40	NC6205 NC6210 NC6215	340 285 200	CCMT  p. B58	DCMT  p. B62	SCMT  p. B64	TCMT  p. B69		

●: The first recommended cutting condition

K Negative

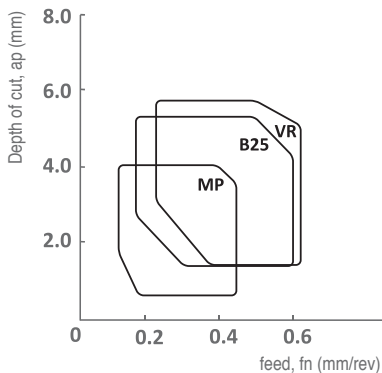

K Positive

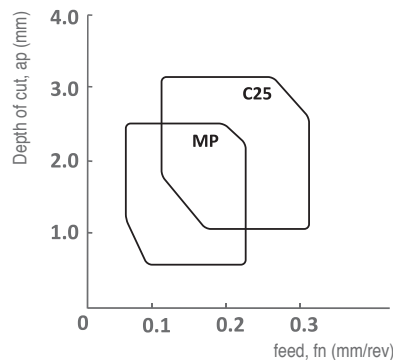

B Turning Chip Breakers

Recommended chip breaker for workpiece

Workpiece
N
Aluminum alloy

Materials : Aluminum alloy

Hardness : 20~110HB

	Depth of cut (mm)	C/B	Cutting edge	Feed (mm/rev)	Grades	Cutting Speed (m/min)	Insert shape					
							80°	55°	90°	60°	35°	80°
Negative	0.5 ~ 2.0 ~6.0 medium	HA		0.1 ~ 0.2 ~0.5	H01	500	CNMG p. B21	DNMG p. B27	SNMG p. B35	TNMG p. B43	VNMG p. B49	WNMG p. B51
Positive	0.1 ~ 1.0 ~4.0 Medium to finishing	AK		0.03 ~ 0.2 ~0.4	H01 ND1000 PD1000	1000	CCGT p. B80	DCGT p. B81	SCGT p. B83	TCGT p. B84	VB(C)GT p. B85(B86)	RCGT p. B82
	0.5 ~ 1.5 ~4.0 medium	AR		0.05 ~ 0.3 ~0.5	H01 ND1000 PD1000	1000	CCGT p. B80	DCGT p. B81	SCGT p. B83	TCGT p. B84	VB(C)GT p. B85(B86)	RCGT p. B82


Materials : Copper Bronze alloy

Hardness : 20~110HB


	Depth of cut (mm)	C/B	Cutting edge	Feed (mm/rev)	Grades	Cutting Speed (m/min)	Insert shape					
							80°	55°	90°	60°	35°	80°
Negative	0.5 ~ 2.0 ~4.0 Medium to finishing	HA		0.1 ~ 0.2 ~0.5	H01	1000	CNMG p. B21	DNMG p. B27	SNMG p. B35	TNMG p. B43	VNMG p. B49	WNMG p. B51
Positive	0.1 ~ 1.0 ~3.0 Medium to finishing	AK		0.03 ~ 0.2 ~0.3	H01	1000	CCGT p. B80	DCGT p. B81	SCGT p. B83	TCGT p. B84	VB(C)GT p. B85(B86)	RCGT p. B82
	0.5 ~ 1.5 ~3.0 medium	AR		0.05 ~ 0.25 ~0.4	H01	1000	CCGT p. B80	DCGT p. B81	SCGT p. B83	TCGT p. B84	VB(C)GT p. B85(B87)	RCGT p. B82

● : The first recommended cutting condition

N Negative

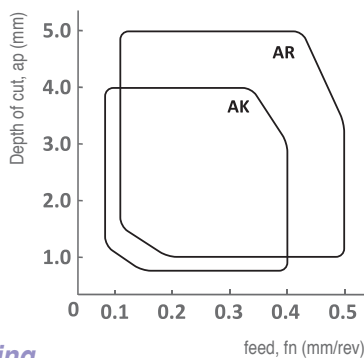

N Positive

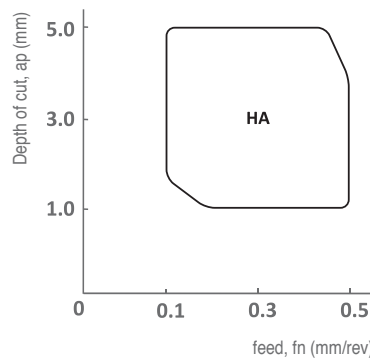

Workpiece
S
Heat resistant alloy

Recommended chip breaker for workpiece


Materials : Inconel, Nimonic, Stellite, Ti alloy

Hardness : 160~350HB


Depth of cut (mm)	C/B	Cutting edge	Feed (mm/rev)	Grades	Cutting Speed (m/min)	Insert shape						
						80°	55°	90°	60°	35°	80°	
Negative	0.1 ~ 0.5 ~ 1.5 finishing	VP1	0.05 ~ 0.10 ~ 0.20	PC8110 PC5300 NC5330	60 50 50	CNMG p. B20	DNMG p. B26					
	0.5 ~ 1.5 ~ 4.0 Medium to finishing	VP2	0.10 ~ 0.20 ~ 0.40	PC8110 PC5300	60 45	CNMG p. B21	DNMG p. B28	SNMG p. B36	TNMG p. B44		WNMG p. B52	
	1.0 ~ 2.0 ~ 4.5 medium	VP3	0.15 ~ 0.23 ~ 0.45	PC8110 PC5300	60 40	CNMG p. B22	DNMG p. B29	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B53	
	1.5 ~ 2.0 ~ 4.5 Roughing	MP	0.15 ~ 0.3 ~ 0.45	PC8110 PC8115	60 50	CNMG p. B22	DNMG p. B28	SNMG p. B37	TNMG p. B45	VNMG p. B50	WNMG p. B53	
	1.5 ~ 3.0 ~ 5.5 Roughing	GS	0.10 ~ 0.25 ~ 0.50	PC8110 PC5300	50 40	CNMG p. B23	DNMG p. B30	SNMG p. B37	TNMG p. B46		WNMG p. B53	
Positive	0.1 ~ 0.5 ~ 1.5 finishing	VP1	0.05 ~ 0.10 ~ 0.20	PC8110 PC5300	60 45	CCGT p. B57	DCGT p. B61			VCGT p. B75		
	0.1 ~ 0.5 ~ 1.0 finishing	VL	0.05 ~ 0.1 ~ 0.2	PC8110 PC8115	60 50	CCMT p. B58	DCMT p. B62	SCMT p. B64	TCMT p. B68	VCMT p. B74(B76)		
	0.5 ~ 1.0 ~ 3.0 medium	MP	0.1 ~ 0.2 ~ 0.35	PC8110 PC8115	60 50	CCMT p. B58	DCMT p. B62	SCMT p. B64	TC(P)MT p. B68	VB(C)MT p. B74(B76)		

•: The first recommended cutting condition

S Negative

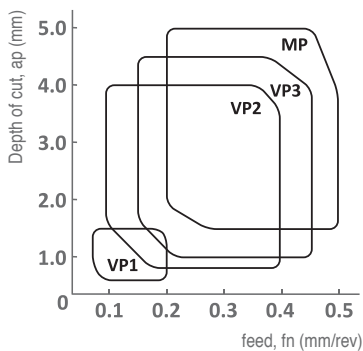

S Positive

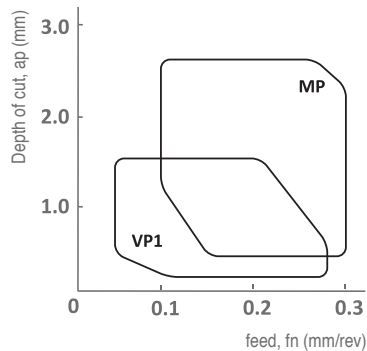

New Chip Breakers

LP Chip Breaker [For medium cutting to finishing]

- Chip breaker for forged steel of automobile parts and normal steel.
- Quad dots improve productivity through efficient chip control at high feed.
- Angle land minimizes cutting force.

▶ Features of LP chip breaker


▶ Front dot

- Higher stability of chip curls at high feed
- Excellent chip control when copying
- Lower cutting force at low depth of cut and high feed


▶ Variable land

- Less crater wear
- Prevents chipping on minor cutting edge


▶ Flat zone



- Larger chip pocket for better chip evacuation at high feed
- Reduced cutting force with larger contact surface of chips

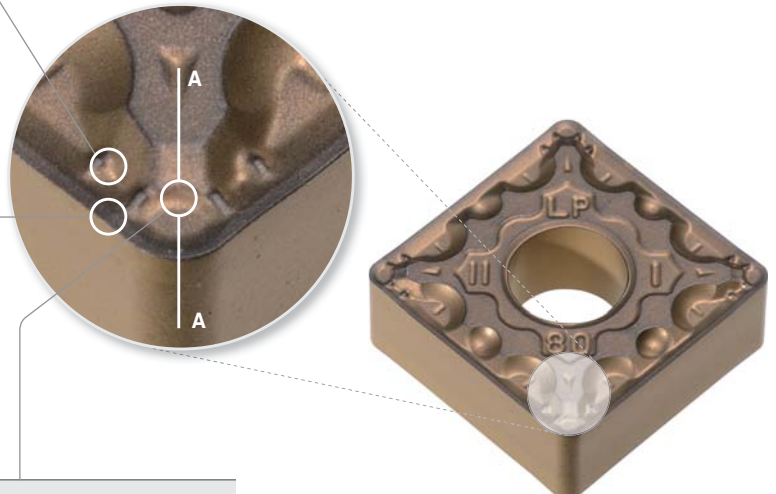


▶ Application Range (Medium to finish cutting)

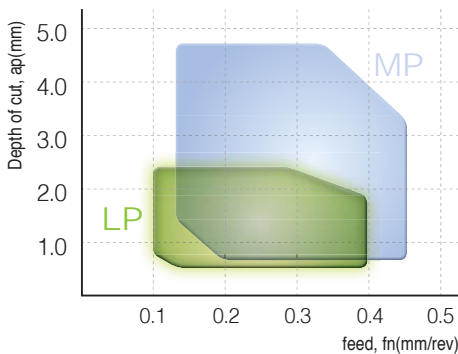


▶ Cutting performance

Medium feed (0.25mm/rev)

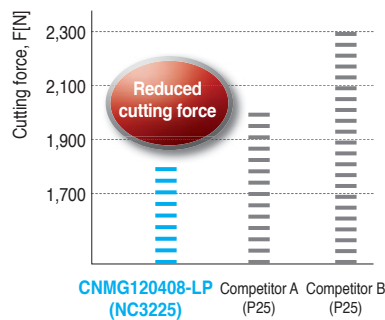

High feed (0.40mm/rev)

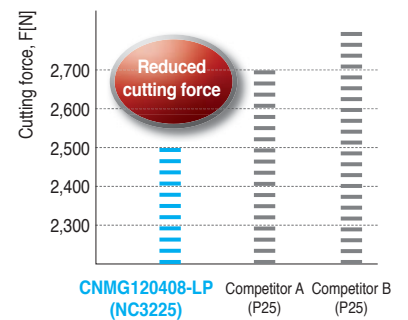

New Chip Breakers

MP Chip Breaker [For medium cutting]

- Chip breaker for forged steel of automobile parts and all other steels.
- Quad dots improve productivity through efficient chip control at high feed.
- Angle land minimizes cutting force.

Features of MP Chip Breaker


▶ Front two step dot

- Higher stability of chip curls at high feed
- Excellent chip control when copying
- Lower cutting force at high depth of cut



▶ Variable land

- Less crater wear
- Prevents chipping on minor cutting edge
- Higher toughness at high depth of cut and interrupted cutting


▶ Flat zone



- Larger chip pocket for better chip evacuation at high feed
- Reduced cutting force with larger contact surface of chips

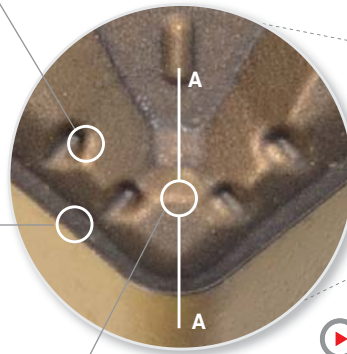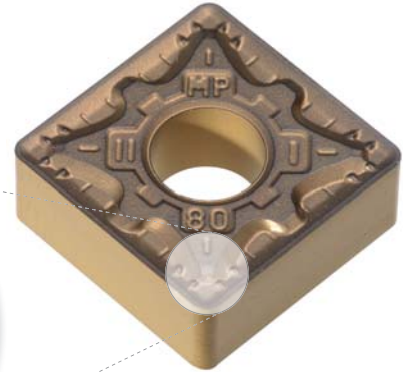


Application Range (Medium to finish cutting)

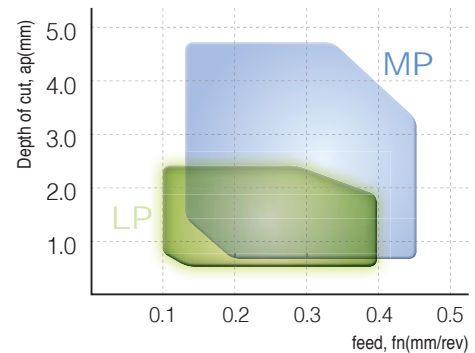


Wear resistance test

- **Workpiece** SCM440 (Alloy steel)
Ø100
Outer diameter machining
- **Cutting conditions** vc(m/min) = 280
ap(mm) = 1.5
fn(mm/rev) = 0.25 / 0.40
wet
- **Tool** CNMG120408-MP

Medium feed (0.25mm/rev)

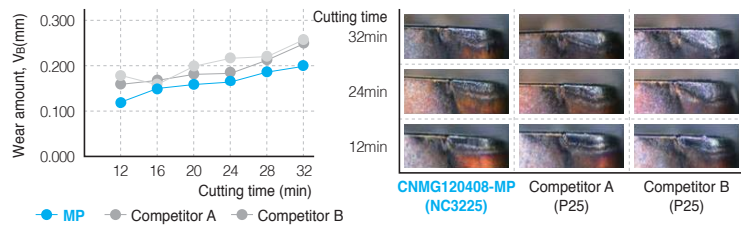


High feed (0.40mm/rev)

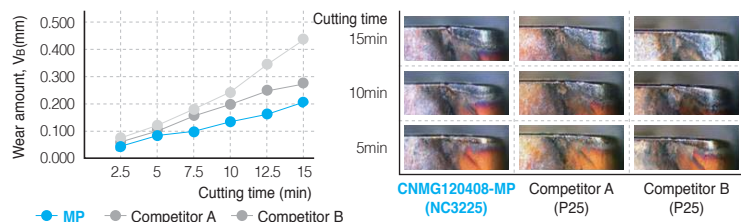

New Chip Breakers

VR Chip Breaker [For roughing]

- Increased stability when machining gray cast iron and ductile cast iron
- Increased productivity at high speed and high feed

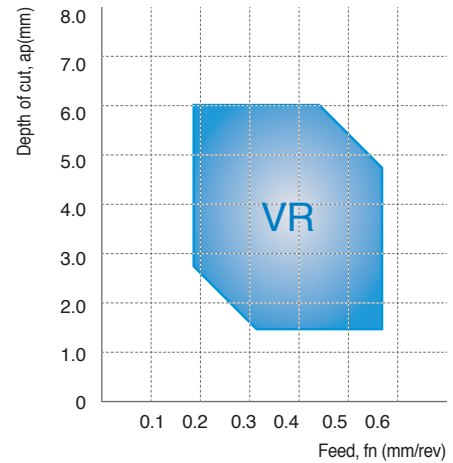


▶ Features of VR chip breaker

- ▶ Wide land and pocket improve cutting performance at high feed
- ▶ Optimal cutting edge design for unstable and interrupted machining


▶ Performance

- Severe wear in continuous/interrupted machining of cast iron
→ Longer tool life due to new VR chip breaker which is specially designed for high feed machining

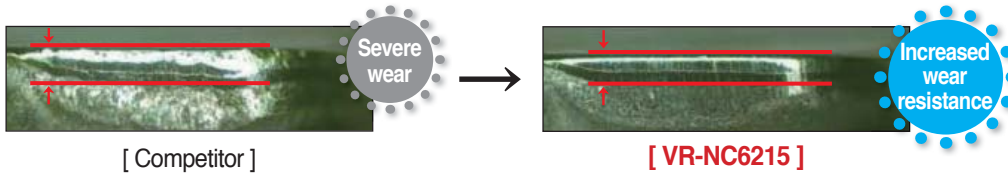


MP Chip Breaker [For medium machining]

- For continuous cutting of forged steel at high feed
- Turning insert for internal machining of automobile components



▶ Features of VR chip breaker

- ▶ Three-dimensional 2 step chip breaker
 - Stable chip control in unstable internal machining
 - Prevents chip blocking at internal diameter at varying depth of cut and feed.
- ▶ Stronger cutting edge and wide chip pocket
 - Increased chipping resistance in unstable internal machining

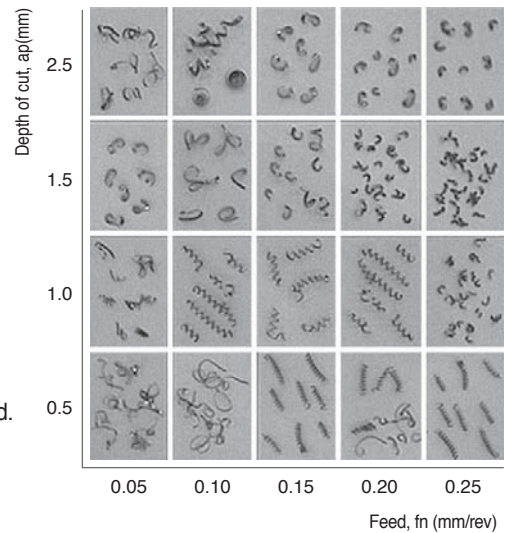

▶ Cutting performance

- **Workpiece** SCM440
- **Cutting conditions** $vc=200\text{m/min}$, $ap=0.5\sim 2.5\text{mm}$
 $fn=0.05\sim 0.25\text{mm/rev}$
- **Tool** CCMT09T304-MP




New Chip Breakers

VH / VT Chip Breaker [Heavy duty machining]

- Heavy duty chip breaker suitable for Heavy machining in the ship building and power plant industries
- Suitable for large vertical machines when machining shafts, rollers, rotors and optimal for the big flange machining

▶ Special features of VH


- For good chip control in heavy machining (comprehensive type)



- ▶ Designed from the study of heavy cutting mechanism
- ▶ Smooth chip control from the high rake angle
- ▶ Wider cutting edge land provides stronger cutting
- ▶ Unique cutting edge treatment provides smooth cutting
- ▶ Optimized chip pocket design provides smooth chip flow


▶ Special features of VT

- For long tool life and stable cutting (higher feeds, big depth) in heavy machining



- ▶ Designed from the study of heavy cutting mechanism
- ▶ Strong edge design provides long and stable cutting (2 step rake angle of cutting edge)
- ▶ Varied cutting edge land strengthens the cutting edge
- ▶ The positioning of the chip breaking convex dot deflects the machining heat, optimizes inserts wear & absorb shock

Applications range of Chip breakers

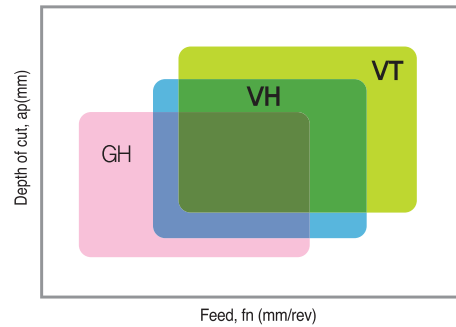


GH : $ap=5.0\sim 12.0\text{mm}$ / $fn=0.55\sim 1.20\text{mm/rev}$
 VH : $ap=6.0\sim 15.0\text{mm}$ / $fn=0.70\sim 1.40\text{mm/rev}$
 VT : $ap=7.0\sim 17.0\text{mm}$ / $fn=0.75\sim 1.60\text{mm/rev}$



LW / VW Chip Breaker [High feed cutting]


- Improved productivity with higher feed rates and surface finishes
- Improved wear resistance and toughness

▶ Special features of LW




- ▶ **Curvilinear cutting edge**
 - Reduces cutting force
- ▶ **Cutting edge design able to handle deeper depth of cuts**
 - lower cutting load & reduces heat
- ▶ **Greater chip control at shallow depths of cuts**
 - Chip pocket design improves smooth chip flow
- ▶ **For shallow depth cutting and low speed machining**
 - 3D design at the corner

▶ Special features of VW




- ▶ **Excellent Finishing applications**
 - Excellent chip control
- ▶ **Insert design great for stable clamping**
 - Chip breaker designed close to the cutting edge
- ▶ **Similar cutting edge to C/B for medium**
 - strong cutting edge
- ▶ **3 Dimensional dot design on cutting corner**
 - reduces cutting force and good chip control at shallow depth of cut

Wiper Insert

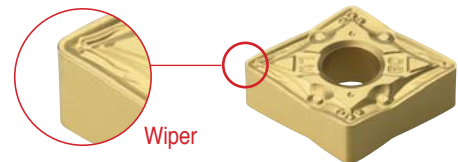

- ▶ High productivity
- ▶ Improved surface roughness
- ▶ High feed-reducing machining time
- ▶ Improved tool life due to reduce cutting force

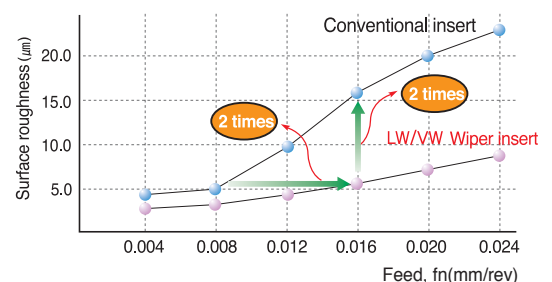

New Chip Breakers


VL Chip Breaker [Mild steel]

- Improved chip control for machining material that have high toughness such as low carbon steel, pipe, steel plate etc
- Improved chip control and decreased cutting load on external, facing, and copying applications
- Improved strength of the cutting edge for measurable efficiency in automated production



- ▶ **Special features of VL**
 - ▶ **2 steps designed chip-breaker** - Suitable Mild steel
 - ▶ **Designed with special dots** - Stable chip control on the low feed and cutting depth
 - ▶ **Applied side rake angle** - Stable chip breaking on the low cutting depth
 - Improved chip control on facing, copying applications
 - Decreased cutting load and better surface finish

▶ Chip control test


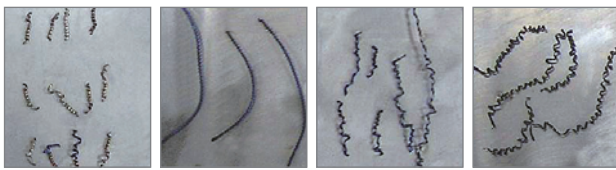


VL Chip Breakers Competitor A Competitor B Competitor C

- **Workpiece** SM20C
- **Cutting conditions** vc=250m/min, ap=0.5mm
fn=0.2mm/rev(Side), wet
- **Designation** DNMG150408-VL


▶ FEM Cutting simulation analysis in the design

- ▶ For design of geometry, chip shapes and chip flow are predictable
- ▶ Optimal chip breaker design by various cutting conditions and workpieces

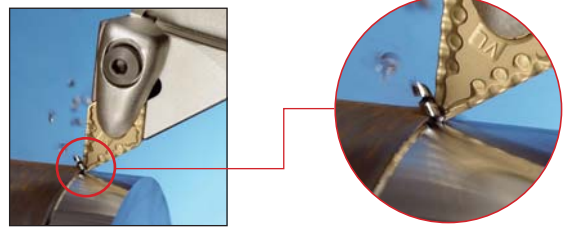


VB Chip Breaker [Copying]

- Excellent chip evacuation in continuous and high speed machining of various workpieces.
- Longer tool life due to 3 dimensional chip breaker realizing low cutting resistance and high rigidity of the cutting edge.
- Stable chip control in copying and internal machining.



▶ Special features of VB

6 bumps on the insert corner
Superior chip control and chip cutting in copying with various depths of cut

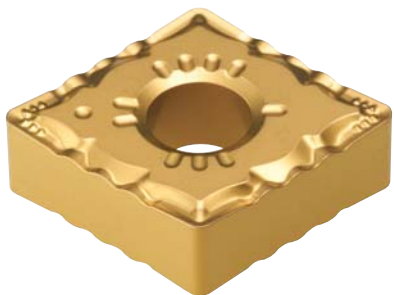


Side rake angle
Superb chip cutting in facing and copying
Superior tool life due to improved surface roughness and lower cutting resistance

Cutting edge on 100° part for medium machining (For CNMG)

Excellent chip evacuation and toughness in machining with high depth of cut

▶ Performance

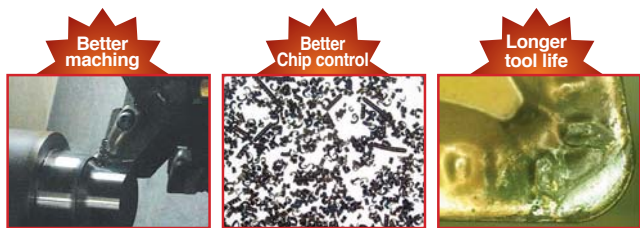

VB Chip Breakers



Conventional chip breaker

New Chip Breakers

VC Chip Breaker [Medium-finishing]

- Superior chip evacuation in high speed and continuous machining of various workpieces (carbon steel, alloy steel etc.)
- Korloy 3 dimensional chip breaker ensures longer tool life due to low cutting load and improved cutting edge strength.
- Stable chip control in copying and internal machining




▶ Features of VC chip breaker

4 bums on the insert corner

Excellent chip control in various depths of cut and superb chip cutting in external, internal, copy machining and facing.

▶ Superior chip control in copy machining

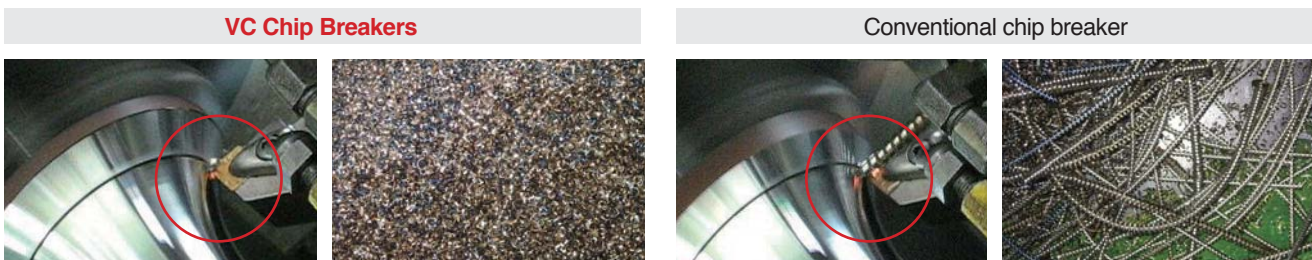

VP Chip Breaker [For hard-to-cut materials machining]

- High positive cutting edge reduces chip contact
- Minimized temperature while machining ensures longer tool life
- Stable machining with superior chip evacuation in high depths of cut

▶ VP1(for finishing)

High positive cutting edge

- ▶ Longer tool life due to minimizing chip contact and reducing cutting heat while machining.
- ▶ Recommended cutting condition • $f_n=0.05\sim0.2\text{mm/rev}$ • $a_p=0.1\sim1.5\text{mm}$

▶ VP2(for medium to finishing)

High positive cutting edge and side rake angle

- ▶ Improved machining performance with stable chip control in ball machining with various depth of cuts.
- ▶ Recommended cutting condition • $f_n=0.05\sim0.4\text{mm/rev}$ • $a_p=0.5\sim4.0\text{mm}$


▶ VP3(for medium machining)

High positive cutting edge and wide land


- ▶ Stable machinability in interrupted machining toughness. Stable chip evacuation and machining in machining with high depth of cut.
- ▶ Recommended cutting condition • $f_n=0.1\sim0.45\text{mm/rev}$ • $a_p=1.0\sim4.5\text{mm}$

▶ Machining of Hard-to-cut material (Difficulty factors of Hard-to-cut material)


- ▶ Rapid wear on the cutting edge.
- ▶ Frequent fracture and chipping on the cutting edge.
- ▶ High cutting resistance.
- ▶ Rapidly rising temperature on the cutting edge.
- ▶ Increased built-up-edge due to bad chip control.




VP1



VP2



VP3

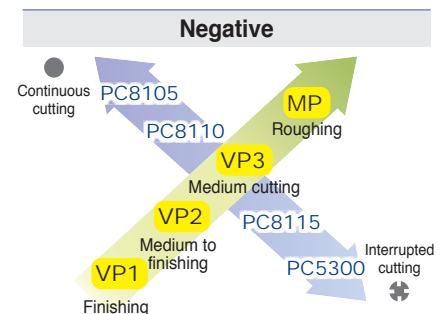

Chip breaker line-up for hard-to-cut materials *Turning*



B Turning Insert Code System (ISO)

C

N

M

G

12

1

2

3

4

5

Insert Shape

Relief Angle


Tolerance

Cross Section Type

Cutting Edge Length,
Diameter of Inscribed Circle


1 Insert Shape

C N M G 12 04 08 - MP

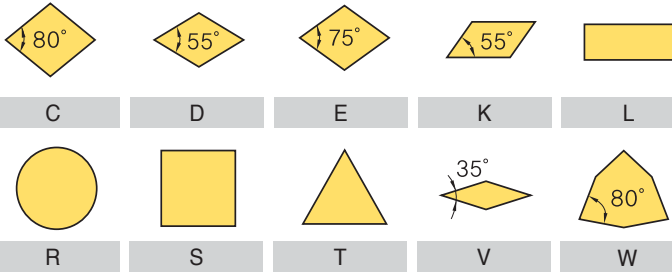


2 Relief Angle

C N M G 12 04 08 - MP

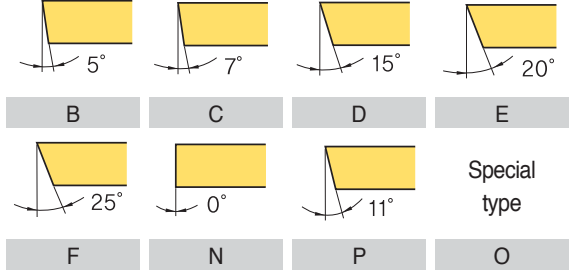

3 Tolerance

C N M G 12 04 08 - MP

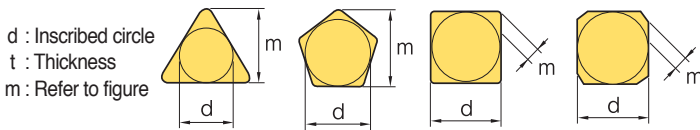

Class	d	m	t
A	±0.025	±0.005	±0.025
C	±0.025	±0.013	±0.025
H	±0.013	±0.013	±0.025
E	±0.025	±0.025	±0.025
G	±0.025	±0.025	±0.13
J*	±0.05 ~ ±0.15	±0.005	±0.025
K*	±0.05 ~ ±0.15	±0.013	±0.025
L*	±0.05 ~ ±0.15	±0.025	±0.025
M*	±0.05 ~ ±0.15	±0.08 ~ ±0.20	±0.13
N*	±0.05 ~ ±0.15	±0.08 ~ ±0.18	±0.025
U*	±0.08 ~ ±0.25	±0.13 ~ ±0.38	±0.13

* Sides are based on unground insert

Tolerance on C,E,H,M,O,P,R,S,T,W Insert Shape (Exceptional case)


d	Tolerance on d		Tolerance on m	
	J, K, L, M, N	U	M, N	U
6.35	±0.05	±0.08	±0.08	±0.13
9.525	±0.05	±0.08	±0.08	±0.13
12.7	±0.08	±0.13	±0.13	±0.20
15.875	±0.10	±0.18	±0.15	±0.27
19.05	±0.10	±0.18	±0.15	±0.27
25.4	±0.13	±0.25	±0.18	±0.38

Tolerance on D Insert Shape (Exceptional case)

d	Tolerance on d	Tolerance on m
6.35	±0.05	±0.11
9.525	±0.05	±0.11
12.7	±0.08	±0.15
15.875	±0.10	±0.18
19.05	±0.10	±0.18

4 Cross Section Type

C N M G 12 04 08 - MP

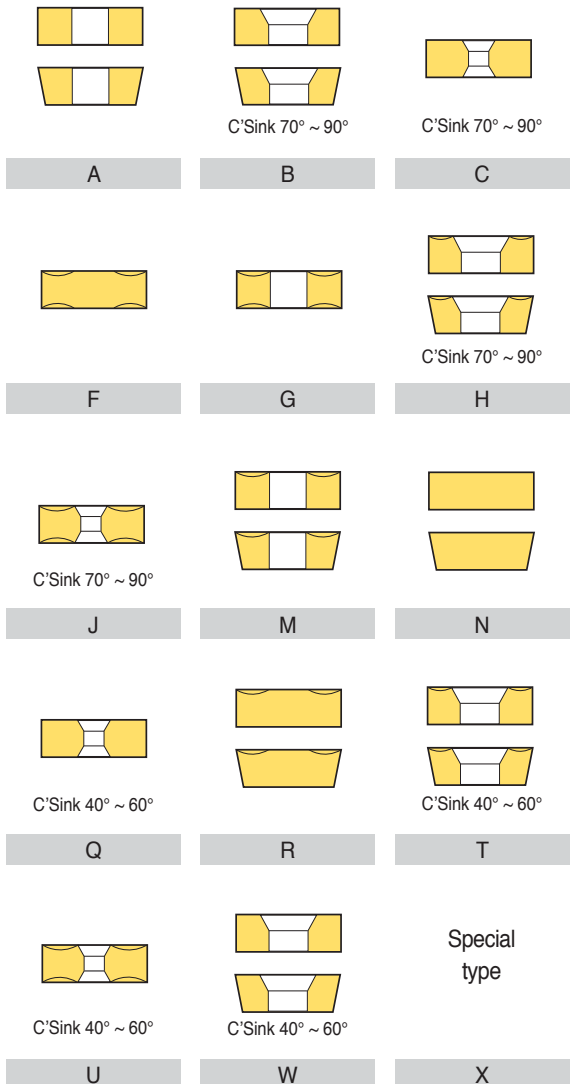

04

08

-

MP

6

7

8

Height of Cutting Edge

Nose Radius (Nose R)


Chip Breaker for Turning

5 Cutting Edge Length, Diameter of Inscribed Circle
C N M G 12 04 08 - MP

Symbol								Inch	IC d(mm)
C	d	S	T	R	V	W			
03	04	03	06	03	-	02	1.2(5)	3.97	
04	05	04	08	04	08	S3	1.5(6)	4.76	
05	06	05	09	05	09	03	1.8(7)	5.56	
-	-	-	-	06	-	-	-	6.00	
06	07	06	11	06	11	04	2	6.35	
08	09	07	13	07	13	05	2.5	7.94	
-	-	-	-	08	-	-	-	8.00	
09	11	09	16	09	16	06	3	9.525	
-	-	-	-	10	-	-	-	10.00	
11	13	11	19	11	19	07	3.5	11.11	
-	-	-	-	12	-	-	-	12.00	
12	15	12	22	12	22	08	4	12.70	
14	17	14	24	14	24	09	4.5	14.29	
16	19	15	27	15	27	10	5	15.875	
-	-	-	-	16	-	-	-	16.00	
17	21	17	30	17	30	11	5.5	17.46	
19	23	19	33	19	33	13	6	19.05	
-	-	-	-	20	-	-	-	20.00	
22	27	22	38	22	38	15	7	22.225	
-	-	-	-	25	-	-	-	25.00	
25	31	25	44	25	44	17	8	25.40	
32	38	31	54	31	54	21	10	31.75	
-	-	-	-	32	-	-	-	32.00	


() Symbol for small size insert

7 Nose Radius (Nose R)
C N M G 12 04 08 - MP



Symbol		Corner Radius	
Metric	Inch	Metric	Inch
01	0	0.1	0.004
02	0.5	0.2	0.008
04	1	0.4	1/64
08	2	0.8	1/32
12	3	1.2	3/64
16	4	1.6	1/16
20	5	2.0	5/64
24	6	2.4	3/32
28	7	2.8	7/64
32	8	3.2	1/8
00	-	Round insert(Inch)	
M0	-	Round insert(Metric)	

6 Height of Cutting Edge
C N M G 12 04 08 - MP

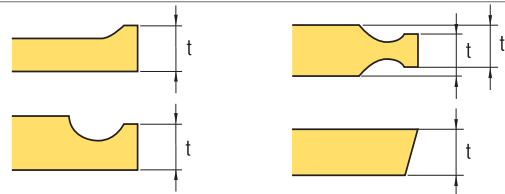


Symbol		Height of Cutting Edge(t)	
Metric	Inch	mm	Inch
01	1(2)	1.59	1/16
T0	1.125	1.79	9/128
T1	1.2	1.98	5/64
02	1.5(3)	2.38	3/32
T2	1.75	2.78	7/64
03	2	3.18	1/8
T3	2.5	3.97	5/32
04	3	4.76	3/16
05	3.5	5.56	7/32
06	4	6.35	1/4
07	5	7.94	5/16
09	6	9.52	3/8
11	7	11.11	7/16
12	8	12.70	1/2

() Symbol for small size insert

8 Chip Breaker for Turning
C N M G 12 04 08 - MP

Negative Insert Chip Breaker

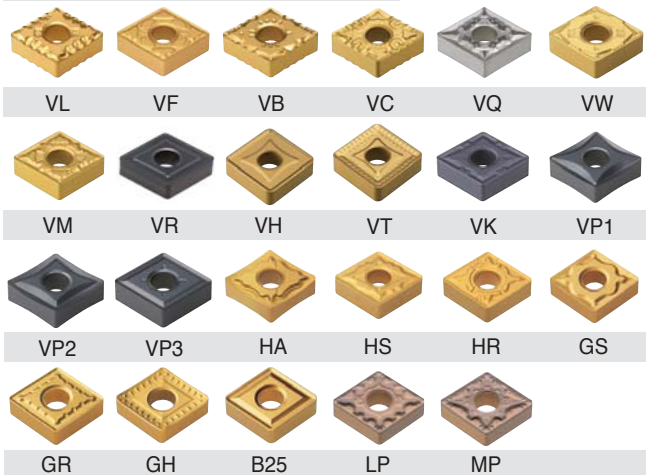


Positive Insert Chip Breaker



B Turning Insert (Negative)

CN○○○

Rhombic **80° Negative**



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.18	3.81
12	12.7	4.76	5.16
16	15.875	6.35	6.35
19	19.05	6.35	7.93

Workpiece	Material												Machining types				
	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel	P	M	K	N	S	H	●	⊙	⊛		
Steel							●	●	●	●	●	●	●	●	●	●	
Stainless steel		●	●	●	●	●											
Cast iron			●	●	●	●											
Non-ferrous metal				●	●	●											
Heat resistant alloy, Titanium alloy					●	●											
Hardened steel																	

	Inserts	Designation	Cermets		Coated		Coated										Uncoated		Cutting Condition												
			CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)			
Finishing	VP1	CNMG 120402-VP1																										0.01~0.10	0.10~1.00		
		120404-VP1																										0.05~0.15	0.10~1.50		
		120408-VP1																										0.07~0.20	0.10~1.50		
Roughing	CNMA	090308																										0.10~0.30	0.50~3.00		
		120404																●	●								●	0.15~0.60	1.00~5.00		
		120408																	●	●							●	0.15~0.60	1.00~6.00		
		120412																		●	●								0.15~0.70	1.50~6.00	
		120416																		●	●								0.20~0.80	2.00~6.00	
		160608																			●	●							0.15~0.70	2.00~6.00	
		160612																			●	●							0.15~0.70	2.00~6.00	
		160616																				●							0.15~0.70	2.00~6.00	
		190608																				●	●							0.15~0.70	2.00~10.00
		190612																					●	●						0.15~0.70	2.00~10.00
190616																					●	●						0.20~1.00	3.00~10.00		
Finishing	VB	CNMG 120404-VB	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.15~0.35	0.30~2.00	
		120408-VB	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.15~0.45	0.50~2.00	
		120412-VB							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.20~0.50	0.50~2.00	
Finishing	VF	CNMG 090304-VF						●	●	●	●																	0.07~0.30	0.50~1.50		
		090308-VF																											0.10~0.30	0.50~1.50	
		120404-VF						●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.07~0.30	0.50~1.50	
		120408-VF						●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.40	0.50~1.50	
		120412-VF																											0.10~0.50	0.60~1.50	
Finishing (Cermets)	VG	CNMG 090304-VG																											0.07~0.30	0.50~1.50	
		090308-VG																											0.10~0.30	0.50~1.50	
		120404-VG	●	●																									0.07~0.30	0.50~1.50	
		120408-VG	●																										0.10~0.40	0.50~1.50	
Finishing (Mild steel)	VL	CNMG 120404-VL	●		●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.25	0.10~1.00	
		120408-VL	●		●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.35	0.20~1.50	
		120412-VL							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.35	0.20~1.50	


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MCKNR/L	B116	MCRNR/L	B117
MCLNR/L	B116	PCBNR/L	B104
MCMNN	B116	PCLNR/L	B105



CN○○○

Rhombic 80° Negative



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.18	3.81
12	12.7	4.76	5.16
19	19.05	6.35	7.93

Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Machining types				
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	N																											
Heat resistant alloy, Titanium alloy	S																											
Hardened steel	H																											

Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	HD1	H05	fn (mm/rev)	ap (mm)			
Finishing (wiper)	VW	CNMG 120404-VW																										0.10~0.30	0.50~3.00	
		120408-VW																										0.15~0.50	0.50~4.00	
Medium to finishing	HA	CNMG 120404-HA																										0.05~0.20	0.80~3.50	
		120408-HA																										0.10~0.40	0.80~3.50	
		120412-HA																										0.13~0.55	0.80~3.50	
Medium to finishing	HC	CNMG 120404-HC					●					●	●															0.05~0.30	0.80~3.50	
		120408-HC					●	●				●	●															0.08~0.40	0.80~4.00	
		120412-HC																										0.17~0.50	1.00~4.00	
Medium to finishing	LP	CNMG 120404-LP									●			●														0.10~0.35	0.3~2.0	
		120408-LP									●			●														0.10~0.40	0.5~2.5	
		120412-LP									●			●														0.13~0.45	0.8~3.0	
Medium to finishing	VC	CNMG 120404-VC					●	●					●															0.10~0.35	0.30~2.00	
		120408-VC																										0.15~0.40	0.50~3.00	
		120412-VC																										0.15~0.45	0.50~3.00	
Medium to finishing	VP2	CNMG 120404-VP2																										0.05~0.30	0.10~3.00	
		120408-VP2																										0.10~0.40	0.50~4.50	
Medium to finishing	VQ	CNMG 090304-VQ																										0.05~0.30	0.50~3.50	
		090308-VQ																										0.08~0.30	0.80~4.00	
		120404-VQ		●	●	●	●					●																0.05~0.30	0.80~4.00	
		120408-VQ		●	●	●	●					●																	0.08~0.40	0.80~4.00
		120412-VQ										●			●															
Medium	GM	CNMG 120404-GM			●																							0.05~0.30	0.90~5.00	
		120408-GM		●	●	●			●	●		●	●															0.10~0.50	1.00~5.00	
		120412-GM																										0.18~0.60	1.30~5.00	
		190608-GM										●																0.10~0.50	1.00~8.00	


🔄 Cutting edge geometry A38 ~ A43
 🔄 Recommended chip breaker B04 ~ B11
 🔄 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MCKNR/L	B116	MCRNR/L	B117
MCLNR/L	B116	PCBNR/L	B104
MCMNN	B116	PCLNR/L	B105



CN○○○

 Rhombic **80° Negative**



Dimensions(mm)			
Size	d	t	d1
12	12.7	4.76	5.16
16	15.875	6.35	6.35
19	19.05	6.35	7.93
25	25.4	7.94-9.52	9.12

Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Machining types
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	● General cutting
Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	● Interrupted cutting
Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

Inserts	Designation	Cermet		Coated		Coated													Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	HO1	HO5	fn (mm/rev)	ap (mm)				
Medium to roughing B25	CNMG 120404-B25	●	●	●		●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●			0.17~0.45	1.00~5.00			
	120408-B25	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			0.23~0.60	1.50~5.00		
	120412-B25			●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			0.25~0.60	2.00~5.00		
	160608-B25					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			0.25~0.60	2.00~6.50		
	160612-B25					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			0.27~0.60	2.00~6.50		
	160616-B25					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			0.27~0.60	2.00~6.50		
	190604-B25												●	●											●			0.20~0.45	3.00~8.00		
	190608-B25											●	●				●	●							●			0.25~0.60	3.00~8.00		
	190612-B25									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			0.30~0.60	3.00~8.00	
190616-B25									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			0.23~0.70	3.00~8.00		
Medium to roughing GS	CNMG 120404-GS														●	●								●	●			0.05~0.25	0.10~3.00		
	120408-GS														●	●									●	●			0.10~0.50	1.00~5.00	
	120412-GS														●	●									●	●			0.13~0.65	1.00~5.00	
	160608-GS																									●	●			0.10~0.50	1.00~6.50
	160612-GS																									●	●			0.13~0.65	1.00~6.50
	190612-GS																									●	●			0.13~0.65	1.00~7.80
190616-GS																									●	●			0.13~0.65	1.00~7.80	
Roughing GR	CNMG 120408-GR									●	●	●	●	●			●	●	●										0.20~0.50	1.00~7.00	
	120412-GR									●	●	●	●	●			●	●											0.25~0.50	1.30~7.00	
	120416-GR																●												0.25~0.60	1.80~6.00	
	160608-GR																	●	●										0.20~0.70	1.00~8.00	
	160612-GR									●	●	●	●	●				●	●										0.25~0.70	1.30~8.00	
	160616-GR																	●	●										0.25~0.75	1.80~8.00	
	190608-GR																												0.20~0.70	1.70~10.00	
	190612-GR									●	●	●	●	●																0.30~0.75	1.70~10.00
	190616-GR									●	●	●	●	●																0.30~0.80	1.80~10.00
	190624-GR																													0.35~0.85	2.00~12.00
250724-GR																													0.40~1.00	2.30~15.00	
250924-GR																													0.40~1.00	2.30~15.00	
Roughing VK	CNMG 120408-VK																												0.20~0.50	1.00~5.00	
	120412-VK																													0.25~0.50	1.30~6.00
	120416-VK																													0.25~0.60	1.80~7.00

 Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
● : Stock item


Available tool holders			
Designation	Page	Designation	Page
MCKNR/L	B116	MCRNR/L	B114
MCLNR/L	B116	PCBNR/L	B107
MCMNN	B116	PCLNR/L	B105



B Turning Insert (Negative)






CN○○○

 Rhombic 80° Negative



Dimensions(mm)			
Size	d	t	d1
12	12.7	4.76	5.16
16	15.875	6.35	6.35
19	19.05	6.35	7.93
25	25.4	9.52	9.12

Workpiece	Material	Grade	Machining types													
			●	●	●	●	●	●	●	●	●	●	●	●		
Steel	P		●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	M		●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K		●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	N															
Heat resistant alloy, Titanium alloy	S															
Hardened steel	H															


Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Roughing 	CNMG 120404-HR																									0.15~0.30	0.80~6.00	
	120408-HR						●				●	●														0.20~0.50	1.00~7.00	
	120412-HR						●				●	●														0.25~0.70	1.30~7.00	
	120416-HR																									0.32~0.75	1.80~7.00	
	160608-HR																									0.20~0.50	1.00~8.00	
	160612-HR						●		●		●															0.25~0.70	1.30~8.00	
	160616-HR							●																		0.30~0.80	1.80~8.00	
	160624-HR																									0.32~0.90	2.30~10.00	
	190608-HR																										0.20~0.50	1.70~10.00
	190612-HR										●		●				●										0.25~0.70	1.30~10.00
	190616-HR										●		●														0.30~0.80	1.80~10.00
	190624-HR												●														0.32~0.90	2.30~10.00
	250924-HR											●															0.40~1.00	2.30~10.00
Roughing 	CNMG 120408-VR																									0.25~0.55	1.2~7.0	
	120412-VR									●		●							●								0.30~0.60	1.5~7.0
	120416-VR									●		●							●								0.35~0.65	1.7~7.0
	160612-VR																			●							0.35~0.70	2.0~8.0
	190612-VR												●							●							0.35~0.70	2.0~10.0
	190616-VR																			●							0.35~0.75	2.2~10.0
Medium to finishing 	CNMM 120408-HA																									0.10~0.40	0.80~3.50	
Medium 	CNMM 120408-GM																									0.10~0.50	1.00~5.00	
Roughing 	CNMM 120408-GR																									0.20~0.50	1.00~7.00	
	120412-GR																										0.25~0.50	1.30~7.00
	190612-GR											●															0.30~0.75	1.70~10.00
	190616-GR																										0.30~0.80	1.80~10.00

 Cutting edge geometry A38 ~ A43  Recommended chip breaker B04 ~ B11  Code system B18 ~ B19 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MCKNR/L	B116	MCRNR/L	B117
MCLNR/L	B116	PCBNR/L	B104
MCMNN	B116	PCLNR/L	B105



CN



Dimensions(mm)			
Size	d	t	d1
12	12.7	4.76	5.16
16	15.875	4.76~6.35	6.35
19	19.05	6.35	7.93
25	25.4	7.94~9.52	9.12

Rhombic **80° Negative**

Workpiece	Steel	P																	Machining types	
	Stainless steel	M																	● Continuous cutting	
Cast iron	K																	● General cutting		
Non-ferrous metal	N																	● Interrupted cutting		
Heat resistant alloy, Titanium alloy	S																			
Hardened steel	H																			

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	HD1	H05	fn (mm/rev)	ap (mm)		
Heavy 	CNMM 120408-GH								●		●	●															0.30~0.60	2.50~8.00	
	120412-GH								●	●		●																0.30~0.70	2.50~8.00
	160412-GH																											0.30~0.70	2.50~8.00
	160424-GH																											0.30~1.20	2.50~8.00
	160612-GH											●																0.30~0.90	2.50~8.00
	160616-GH																											0.30~1.20	2.50~8.00
	160624-GH																											0.30~1.50	2.50~8.00
	190608-GH													●														0.30~0.60	2.50~8.00
	190612-GH							●	●	●			●	●														0.30~0.70	3.00~8.00
	190616-GH							●	●	●			●	●														0.45~0.90	3.00~8.00
	190624-GH							●	●	●			●															0.55~1.20	4.00~9.00
	250716-GH																											0.50~1.00	4.50~10.00
	250724-GH								●	●																		0.55~1.20	5.00~12.00
250924-GH							●	●	●			●	●														0.55~1.20	5.00~12.00	
250950-GH																											0.65~1.30	6.00~12.00	
Heavy (General) 	CNMM 190612-VH								●																		0.50~0.90	5.00~10.00	
	190616-VH								●																			0.50~1.10	5.00~10.00
	190624-VH								●																			0.60~1.20	6.00~12.00
	250724-VH								●																			0.70~1.40	6.00~15.00
	250924-VH								●																			0.70~1.40	6.00~15.00
Heavy (High feed cutting) 	CNMM 190612-VT								●			●	●														0.60~1.00	6.00~13.00	
	190616-VT								●																			0.60~1.10	5.00~10.00
	190624-VT								●																			0.60~1.60	7.00~13.00
	250724-VT								●																			0.75~16.0	7.00~17.00
	250924-VT								●																			0.75~16.0	7.00~17.00

Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
● : Stock item


Available tool holders			
Designation	Page	Designation	Page
MCKNR/L	B116	MCRNR/L	B117
MCLNR/L	B116	PCBNR/L	B104
MCMNN	B116	PCLNR/L	B105



B Turning Insert (Negative)

DN ○ ○

Rhombic 55° Negative



Dimensions(mm)			
Size	d	t	d1
11	9.525	3.18~4.76	3.81
15	12.7	4.76~6.35	5.16
19	15.875	6.35	7.93

Workpiece	Steel	P	M	K	N	S	H	Machining types	
	Stainless steel							● Continuous cutting	● General cutting
Cast iron									
Non-ferrous metal									
Heat resistant alloy, Titanium alloy									
Hardened steel									

Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Finishing VP1	DNNG	150404-VP1																									0.05~0.15	0.10~1.50
		150408-VP1																									0.07~0.20	0.10~1.50
		150604-VP1																									0.05~0.15	0.10~1.50
		150608-VP1																									0.07~0.20	0.10~1.50
Roughing	DNMA	110408																								0.17~0.45	0.80~3.00	
		150404																								0.17~0.55	0.40~4.00	
		150408																								0.25~0.55	0.80~4.00	
		150412																								0.25~0.65	.50~4.00	
		150604																								0.17~0.55	0.40~4.00	
		150608																								0.25~0.55	0.80~4.00	
		150612																								0.25~0.65	1.20~4.00	
	190608																								0.30~0.80	2.50~13.00		
Finishing VB	DNMG	150404-VB	●		●	●	●	●		●	●												●		0.10~0.35	0.30~2.00		
		150408-VB	●			●	●	●		●	●	●											●		0.15~0.45	0.50~2.00		
		150412-VB								●	●	●													0.15~0.45	0.50~2.00		
		150604-VB	●		●	●	●	●	●		●	●	●												0.10~0.35	0.30~2.00		
		150608-VB	●			●	●	●	●		●	●	●								●				0.15~0.45	0.50~2.00		
		150612-VB								●	●	●	●												0.20~0.50	0.50~2.50		
Finishing VF	DNMG	110402-VF																							0.05~0.20	0.20~1.00		
		110404-VF																							0.07~0.30	0.50~1.50		
		110408-VF																							0.10~0.40	0.50~1.50		
		150404-VF								●		●						●				●			0.07~0.30	0.50~1.50		
		150408-VF										●													0.10~0.40	0.50~1.50		
		150412-VF																							0.15~0.50	0.60~1.50		
		150604-VF								●	●	●	●												0.13~0.30	0.50~1.50		
		150608-VF								●	●	●	●												0.10~0.40	0.50~1.50		
	150612-VF										●													0.15~0.50	0.60~1.50			
Finishing (Cermet) VG	DNMG	110404-VG																							0.07~0.30	0.50~1.50		
		110408-VG																							0.10~0.40	0.50~1.50		
		150404-VG																							0.07~0.30	0.50~1.50		
		150408-VG																							0.10~0.40	0.50~1.50		
		150604-VG	●	●																					0.13~0.30	0.50~1.50		
		150608-VG	●																						0.10~0.40	0.50~1.50		


Cutting edge geometry A38 ~ A43 Recommended chip breaker B04 ~ B11 Code system B18 ~ B19 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MDJNR/L	B117	PDJNR/L	B106, 160
MDNNN	B117	PDNNR/L	B106
MDQNR/L	B118	PDSNR/L	B138
MDUNR/L	B142	PDUNR/L	B139



DN ○ ○

Dimensions(mm)			
Size	d	t	d1
11	9.525	4.76	3.81
15	12.7	4.76~6.35	5.16



Rhombic 55° Negative

Workpiece	Machining types															
	P	M	K	N	S	H	1	2	3	4	5	6	7	8	9	10
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermet		Coated		Coated													Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)			
Finishing (Mild steel)	VL	DNMG 110408-VL																										0.05~0.20	0.10~1.00	
		150404-VL						●		●	●		●															0.05~0.25	0.10~1.50	
		150408-VL								●	●		●															0.05~0.30	0.20~1.50	
		150412-VL																											0.10~0.30	0.25~1.50
		150604-VL	●					●		●																			0.05~0.25	0.10~1.50
		150608-VL	●					●		●				●															0.05~0.30	0.20~1.50
		150612-VL																											0.10~0.30	0.25~1.50
Finishing (wiper)	VW	DNMG 150404-VW																										0.10~0.35	0.30~3.00	
		150408-VW																										0.10~0.40	0.30~3.00	
		150604-VW																										0.10~0.35	0.30~3.00	
		150608-VW						●				●																0.10~0.40	0.30~3.00	
Medium to finishing	HA	DNMG 150404-HA																				●	●	●			0.05~0.30	0.80~3.50		
		150408-HA																				●	●	●			0.10~0.40	0.80~3.50		
		150604-HA								●				●									●	●	●			0.05~0.30	0.80~3.50	
		150608-HA																					●	●	●			0.10~0.40	0.80~3.50	
Medium to finishing	HC	DNMG 150404-HC																									0.05~0.30	0.05~3.50		
		150408-HC						●																			0.08~0.40	0.80~4.00		
		150412-HC																									0.13~0.50	0.90~4.00		
		150604-HC																									0.05~0.30	0.80~4.00		
		150608-HC												●													0.08~0.40	0.80~4.00		
		150612-HC																										0.13~0.50	0.90~4.00	
Medium to finishing	LP	DNMG 150404-LP							●		●	●															0.10~0.35	0.3~2.0		
		150408-LP							●		●	●															0.10~0.40	0.5~2.5		
		150412-LP								●		●	●														0.13~0.45	0.8~3.0		
		150604-LP								●		●	●														0.10~0.35	0.3~2.0		
		150608-LP								●		●	●														0.10~0.40	0.5~2.5		
		150612-LP										●																0.13~0.45	0.8~3.0	

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
MDJNR/L	B117	PDJNR/L	B106, 160
MDNNN	B117	PDNNR/L	B106
MDQNR/L	B118	PDSNR/L	B138
MDUNR/L	B142	PDUNR/L	B139



B Turning Insert (Negative)

DN 






 Rhombic 55° Negative



Dimensions(mm)			
Size	d	t	d1
11	9.525	3.18~4.76	3.81
15	12.7	4.76~6.35	5.16

Workpiece													Machining types				
	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel											
	P	M	K	N	S	H											
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
● General cutting
✱ Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)		
Medium to finishing 	DNMG	150404-VC					●																			0.10~0.35	0.30~2.00		
		150408-VC						●																			0.15~0.40	0.50~3.00	
		150412-VC							●																			0.15~0.45	0.50~3.00
		150604-VC						●	●		●	●											●					0.10~0.35	0.30~2.00
		150608-VC						●	●		●	●		●														0.15~0.40	0.50~3.00
		150612-VC																										0.15~0.45	0.50~3.00
Medium to finishing 	DNMG	150404-VP2																			●	●	●	●	●		0.05~0.30	0.10~3.00	
		150408-VP2																			●	●	●	●	●		0.10~0.40	0.50~4.50	
		150604-VP2									●										●	●	●	●	●		0.05~0.30	0.10~3.00	
		150608-VP2									●										●	●	●	●	●		0.10~0.40	0.50~4.50	
Medium to finishing (Cermet) 	DNMG	110404-VQ	●	●																							0.05~0.30	0.50~3.50	
		110408-VQ																										0.08~0.40	0.80~4.00
		150404-VQ	●	●	●	●	●																					0.05~0.30	0.80~3.50
		150408-VQ	●	●	●	●	●					●																0.08~0.40	0.80~4.00
		150604-VQ	●	●	●	●	●					●																0.05~0.30	0.80~4.00
		150608-VQ	●	●	●	●	●					●																0.08~0.40	0.80~4.00
Medium 	DNMG	150404-GM																									0.05~0.30	0.90~5.00	
		150408-GM	●		●							●															0.10~0.50	1.00~5.00	
		150412-GM																										0.13~0.60	1.30~5.00
		150604-GM			●	●							●															0.05~0.30	0.90~5.00
		150608-GM						●		●			●															0.10~0.50	1.00~5.00
		150612-GM											●															0.13~0.60	1.30~5.00
Medium 	DNMG	110404-MP																									0.10~0.40	0.4~3.8	
		110408-MP																										0.15~0.40	0.5~4.0
		110412-MP																										0.15~0.50	0.8~4.2
		110504-MP																										0.10~0.40	0.4~3.8
		110508-MP																										0.15~0.40	0.5~4.0
		110512-MP																										0.15~0.50	0.8~4.2
		150404-MP									●		●		●					●		●						0.10~0.40	0.4~4.0
		150408-MP									●		●		●					●		●	●	●				0.15~0.45	0.5~4.5
		150412-MP									●		●		●					●		●	●					0.15~0.50	0.8~5.0
		150604-MP									●		●		●					●		●	●					0.10~0.40	0.4~4.0
		150608-MP									●		●		●					●		●	●					0.15~0.45	0.5~4.5
		150612-MP									●		●		●					●		●	●					0.15~0.50	0.8~5.0


 Cutting edge geometry A38 ~ A43  Recommended chip breaker B04 ~ B11  Code system B18 ~ B19 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MDJNR/L	B117	PDJNR/L	B106, 160
MDNNN	B117	PDNNR/L	B106
MDQNR/L	B118	PDSNR/L	B138
MDUNR/L	B142	PDUNR/L	B139



DN ○ ○

Size	Dimensions(mm)		
	d	t	d1
11	9.525	4.76	3.81
15	12.7	4.76~6.35	5.16



Rhombic 55° Negative

Workpiece	Machining types															
	P	M	K	N	S	H	1	2	3	4	5	6	7	8	9	10
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)
Medium HS	DNMG 110404-HS																●							●		0.05~0.35	0.80~2.50
	110408-HS																●							●		0.10~0.40	1.00~2.50
	150404-HS																	●					●		0.05~0.35	0.80~4.00	
	150408-HS																	●	●				●		0.10~0.40	1.00~4.00	
	150412-HS																									0.13~0.55	1.00~4.50
	150604-HS																	●	●					●		0.05~0.35	0.80~4.00
	150608-HS																	●	●					●		0.10~0.40	1.00~4.50
150612-HS																		●					●		0.10~0.55	1.00~4.50	
Medium VM	DNMG 110404-VM		●								●															0.05~0.30	0.90~4.00
	110408-VM							●		●	●			●												0.10~0.50	1.00~4.00
	110412-VM																									0.13~0.50	1.30~4.00
	150404-VM		●								●						●	●	●							0.05~0.30	0.90~5.00
	150408-VM		●	●					●		●	●	●				●	●	●							0.10~0.50	1.00~5.00
	150412-VM																	●	●							0.13~0.60	1.30~5.00
	150604-VM		●	●	●						●	●	●				●	●	●							0.05~0.30	0.90~5.00
150608-VM		●						●		●	●	●				●	●	●					●		0.10~0.50	1.00~5.00	
150612-VM			●								●	●					●	●							0.13~0.60	1.30~5.00	
Medium VP3	DNMG 150404-VP3																	●	●	●	●		●	●	0.05~0.30	0.10~3.00	
	150408-VP3																	●	●	●	●		●	●	0.10~0.45	0.50~5.00	
	150412-VP3																	●	●	●	●		●	●	0.12~0.50	0.50~5.00	
	150604-VP3																	●	●	●	●		●	●	0.05~0.30	0.10~3.00	
	150608-VP3																	●	●	●	●		●	●	0.10~0.45	0.50~5.00	
	150612-VP3																	●	●	●	●		●	●	0.12~0.50	0.50~5.00	
Medium (wiper) LW	DNMG 150408-LW																									0.15~0.50	0.70~4.50
	150412-LW																									0.20~0.60	1.00~5.00
	150608-LW									●																0.15~0.50	0.70~4.50
	150612-LW																									0.20~0.60	1.00~5.00

↻ Cutting edge geometry A38 ~ A43
 ↻ Recommended chip breaker B04 ~ B11
 ↻ Code system B18 ~ B19
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
MDJNR/L	B117	PDJNR/L	B106, 160
MDNNN	B117	PDNNR/L	B106
MDQNR/L	B118	PDSNR/L	B138
MDUNR/L	B142	PDUNR/L	B139



B Turning Insert (Negative)





DN ○ ○

 Rhombic 55° Negative



Dimensions(mm)			
Size	d	t	d1
15	12.7	4.76~6.35	5.16

Workpiece	Material Compatibility												Machining types		
	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel	P	M	K	N	S	H	Continuous cutting	General cutting	Interrupted cutting
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)	
Medium to roughing 	DNMG 150402-B25																										0.15~0.40	0.50~3.50
	150404-B25			●			●			●	●	●					●										0.17~0.45	1.00~4.00
	150408-B25			●			●		●	●	●	●				●	●										0.17~0.55	1.50~4.00
	150412-B25						●			●		●					●										0.25~0.55	1.50~4.00
	150425-B25																										0.35~0.65	2.50~5.50
	150602-B25																										0.15~0.40	0.50~3.50
	150604-B25		●					●		●	●	●	●				●	●									0.17~0.55	1.50~4.00
	150608-B25		●					●	●	●	●	●	●				●	●					●	●			0.17~0.55	1.50~4.00
	150612-B25							●			●		●				●	●									0.25~0.55	1.50~4.00
150625-B25																										0.35~0.65	2.50~5.50	
Medium to roughing 	DNMG 150404-GS																										0.07~0.40	1.00~5.00
	150408-GS																	●									0.10~0.50	1.00~5.00
	150412-GS																										0.13~0.65	1.00~5.00
	150604-GS												●									●	●				0.07~0.40	1.00~5.00
	150608-GS																	●				●	●				0.10~0.50	1.00~5.00
	150612-GS																	●									0.10~0.65	1.00~5.00
Roughing 	DNMG 150408-GR									●	●					●	●										0.20~0.50	1.00~7.00
	150412-GR																●	●									0.25~0.90	1.30~7.00
	150416-GR																										0.30~0.75	1.80~7.00
	150608-GR									●	●	●					●	●									0.20~0.50	1.00~7.00
	150612-GR									●	●						●	●									0.25~0.70	1.30~7.00
	150616-GR									●	●																0.20~0.75	1.80~7.00
Roughing 	DNMG 150404-VK																●										0.15~0.50	0.08~6.00
	150408-VK																●										0.20~0.50	1.00~7.00
	150412-VK																●	●									0.25~0.70	1.30~7.00
	150604-VK																										0.20~0.50	1.00~7.00
	150608-VK																	●									0.20~0.50	1.00~7.00
	150612-VK																	●	●								0.25~0.70	1.30~7.00


 Cutting edge geometry A38 ~ A43
  Recommended chip breaker B04 ~ B11
  Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MDJNR/L	B117	PDJNR/L	B106, 160
MDNNN	B117	PDNNR/L	B106
MDQNR/L	B118	PDSNR/L	B138
MDUNR/L	B142	PDUNR/L	B139



DN

Dimensions(mm)			
Size	d	t	d1
15	12.7	4.76~6.35	5.16
19	15.875	6.35	7.93



Rhombic **55° Negative**

Workpiece	Material												Machining types					
	Steel	P	M	K	N	S	H	●	●	●	●	●	●	●	●	●	●	●
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	HD1	HD5	fn (mm/rev)	ap (mm)		
Roughing 	DNMG 150408-HR																										0.20~0.50	1.00~7.00	
	150412-HR																											0.25~0.70	1.30~7.00
	150416-HR																											0.30~0.75	1.80~7.00
	150608-HR						●				●																	0.20~0.50	1.00~7.00
	150612-HR						●																					0.25~0.70	1.30~7.00
	150616-HR						●																					0.20~0.75	1.80~7.00
	190612-HR																											0.20~0.75	1.80~8.00
Roughing 	DNMG 150408-VR																										0.25~0.55	1.2~7.0	
	150412-VR																											0.30~0.60	1.5~7.0
	150608-VR																											0.25~0.55	1.2~7.0
	150612-VR																											0.30~0.60	1.5~7.0
Medium (Shaft) 	DNMX 150404R-SH																										0.15~0.30	1.00~4.00	
	150408R-SH																											0.15~0.50	1.50~5.00
	150604R-SH																											0.15~0.30	1.00~4.00
	150608R-SH																											0.15~0.50	1.50~5.00
	150404L-SH																											0.15~0.30	1.00~4.00
	150408L-SH																											0.15~0.50	1.50~5.00
	150604L-SH																											0.15~0.30	1.00~4.00
	150608L-SH																											0.15~0.50	1.50~5.00

Cutting edge geometry **A38 ~ A43** Recommended chip breaker **B04 ~ B11** Code system **B18 ~ B19** ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MDJNR/L	B117	PDJNR/L	B106, 160
MDNNN	B117	PDNNR/L	B106
MDQNR/L	B118	PDSNR/L	B138
MDUNR/L	B142	PDUNR/L	B139

B Turning Insert (Negative)

KN



Dimensions(mm)		
Size	d	t
16	9.525	4.76

Parallelogram **55° Negative**


Workpiece												Machining types						
	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel	P	M	K	N	S	H	●	●	✱			
Steel							●	●	✱	●	●	●	●	●	●	●	●	●
Stainless steel		●																
Cast iron			●															
Non-ferrous metal				●														
Heat resistant alloy, Titanium alloy					●													
Hardened steel						●												

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)		
Medium 	KNUX 160405R11					●	●	●	●	●	●	●	●	●	●	●	●						●			0.20~0.35	1.00~6.00		
		160410R11																									0.30~0.60	1.50~6.00	
		160405L11					●	●	●	●	●	●	●	●	●	●	●											0.20~0.35	1.00~6.00
		160410L11																										0.30~0.60	1.50~6.00
Roughing 	KNUX 160405R12					●	●	●	●	●	●	●	●	●	●	●											0.25~0.35	1.50~6.00	
		160410R12					●																					0.40~0.70	1.50~6.00
		160405L12																										0.25~0.35	1.50~6.00
		160410L12									●	●																0.40~0.70	1.50~6.00

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
CKJNR/L	B114	CKUNR/L	B141
CKNNR/L	B114		

RN



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.18	3.81
12	12.7	4.76	5.16
15	15.875	6.35	6.35
19	19.05	6.35	7.93
25	25.4	6.35~9.52	9.12
31	31.75	9.52	12.7

Round **Negative**

Workpiece												Machining types						
	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel	P	M	K	N	S	H	●	●	✱			
Steel							●	●	✱	●	●	●	●	●	●	●	●	●
Stainless steel		●																
Cast iron			●															
Non-ferrous metal				●														
Heat resistant alloy, Titanium alloy					●													
Hardened steel						●												


Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)		
Medium to roughing 	RNMG B25																										0.90~4.50	0.09~0.90	
		120400-B25																										1.20~4.80	0.12~1.20
		150600-B25																										1.15~1.50	1.50~7.50
		190600-B25																										1.90~7.60	0.19~1.90
		250600-B25																										2.50~10.0	0.25~2.50
		250900-B25																										2.50~10.0	0.25~2.50
		310900-B25																										3.50~13.0	0.30~2.50

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item



SN ○ ○

□ Square 90° Negative



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.18	3.81
12	12.7	4.76	5.16
15	15.875	6.35	6.35
19	19.05	6.35	7.93

Workpiece	Steel	P																		Machining types
	Stainless steel	M																		
Cast iron	K																		● Continuous cutting ● General cutting ✱ Interrupted cutting	
Non-ferrous metal	N																			
Heat resistant alloy, Titanium alloy	S																			
Hardened steel	H																			


Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition												
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	HD1	HD5	fn (mm/rev)	ap (mm)			
Roughing		SNGA 090304																									0.17~0.50	0.50~4.50		
		090308																										0.17~0.50	0.50~4.50	
		120404																										0.15~0.60	1.50~8.00	
		120408																										0.15~0.60	1.50~8.00	
		120412																										0.20~0.80	1.50~8.00	
		150608																										0.20~0.80	2.00~10.00	
		150616																										0.20~0.90	2.00~10.00	
		190608																											0.15~0.60	3.00~12.00
		190612																											0.20~0.80	3.00~12.00
Finishing		SNGG 120408-HU																									0.10~0.30	0.20~1.50		
Medium		SNGG 090304R																									0.12~0.35	1.00~3.00		
		090308R																										0.15~0.35	1.00~3.00	
		120404R		●																								0.15~0.35	1.00~4.00	
		120408R																										0.15~0.35	1.00~4.00	
		120412R																										0.15~0.35	1.00~4.00	
		090304L																										0.12~0.35	1.00~3.00	
		090308L																										0.15~0.35	1.00~3.00	
		120404L																										0.15~0.35	1.00~4.00	
		120408L																										0.15~0.35	1.00~4.00	
120412L																										0.15~0.35	1.00~4.00			

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders					
Designation	Page	Designation	Page	Designation	Page
MSBNR/L	B118	MSRNR/L	B119	PSDNN	B108
MSDNN	B118	MSSNR/L	B120	PSKNR/L	B109, B139
MSKNR/L	B119	PSBNR/L	B108	PSSNR/L	B109

B Turning Insert (Negative)

SN



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.18	3.81
12	12.7	3.18~4.76	5.16
15	15.875	4.76~6.35	6.35
19	19.05	4.76~6.35	7.93
25	25.4	6.35~9.52	9.12

□ Square 90° Negative

Workpiece	Steel	P															Machining types	
	Stainless steel		M															
Cast iron		K																● General cutting
Non-ferrous metal		N																✦ Interrupted cutting
Heat resistant alloy, Titanium alloy		S																
Hardened steel		H																

	Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition								
			CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)
Roughing	SNGN	090302																									0.05~0.30	0.50~4.00
		090304																									0.10~0.35	0.50~4.00
		090308																									0.10~0.40	1.00~4.00
		120304																									0.13~0.50	1.30~5.00
		120308																									0.15~0.60	1.50~6.00
		120312																									0.17~0.60	1.70~6.00
		120402																									0.10~0.45	1.00~5.00
		120404																									0.13~0.50	1.30~5.00
		120408																									0.15~0.60	1.50~6.00
		120412																									0.17~0.60	1.70~6.00
		120424																									0.20~0.65	2.00~6.00
		150402																									0.10~0.50	0.50~6.00
		150408																									0.15~0.60	1.50~8.00
		150412																									0.17~0.60	2.00~8.00
		150416																									0.20~0.65	2.50~8.50
		190402																									0.10~0.60	2.00~8.50
		190412																									0.17~0.70	2.50~10.00
		190416																									0.20~0.75	2.50~10.00
		250604																									0.30~0.80	3.00~12.00
		250616																									0.35~1.00	4.00~12.00
Medium	SNGX	120408R																								0.15~0.35	1.00~4.00	
Roughing	SNMA	090304																								0.10~0.45	0.50~4.50	
		090308																								0.15~0.50	0.50~4.50	
		090312																								0.20~0.50	0.50~4.50	
		120402																								0.10~0.50	1.00~4.50	
		120404																								0.15~0.60	1.00~5.00	
		120408							●								●	●								0.15~0.70	1.00~6.00	
		120412															●	●								0.20~0.80	1.50~6.00	
		120416															●	●								0.30~1.00	2.00~6.00	
		120430																								0.30~0.70	2.50~5.00	
		150612															●									0.20~0.80	2.00~8.00	
		150616																								0.25~0.85	2.50~10.00	
		190608																								0.20~0.80	2.00~10.00	
		190612															●	●								0.20~0.80	2.00~10.00	
		190616															●	●								0.25~0.85	2.50~10.00	
		190624																								0.35~0.90	3.00~10.00	
		250724																								0.40~1.00	3.00~13.00	
250924																								0.40~1.00	3.00~13.00			


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders					
Designation	Page	Designation	Page	Designation	Page
MSBNR/L	B118	MSRNR/L	B119	PSDNN	B108
MSDNN	B118	MSSNR/L	B120	PSKNR/L	B109, B139
MSKNR/L	B119	PSBNR/L	B108	PSSNR/L	B109



SN ○ ○

Square **90° Negative**



Size	Dimensions(mm)		
	d	t	d1
09	9.525	3.18	3.81
12	12.7	4.76	5.16

Workpiece	Material	P	M	K	N	S	H	Machining types																
								<ul style="list-style-type: none"> ● Continuous cutting ● General cutting * Interrupted cutting 																
Steel		●	●	●	●	●																		
Stainless steel			●																					
Cast iron				●																				
Non-ferrous metal					●																			
Heat resistant alloy, Titanium alloy																								
Hardened steel																								

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition													
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)				
Finishing		SNMG 120404-VB	●			●	●																					0.15~0.35	0.30~2.00		
		120408-VB	●	●	●	●																							0.15~0.40	0.50~2.00	
Finishing		SNMG 090304-VF																											0.07~0.30	0.50~1.50	
		090308-VF																											0.07~0.30	0.50~1.50	
		120404-VF						●		●																				0.07~0.30	0.50~1.50
		120408-VF						●		●		●																		0.10~0.40	0.50~1.50
		120412-VF																												0.20~0.50	0.50~1.50
Finishing (Cermet)		SNMG 090304-VG		●																									0.07~0.30	0.50~1.50	
		090308-VG																											0.10~0.30	0.50~1.50	
		120404-VG																											0.07~0.30	0.50~1.50	
		120408-VG																											0.10~0.40	0.50~1.50	
Finishing (Mid steel)		SNMG 120408-VL					●		●														●					0.10~0.35	0.20~1.50		
Medium to finishing		SNMG 120404-HA																							●	●		0.10~0.35	0.80~3.50		
		120408-HA																							●	●	●	0.10~0.40	0.80~3.50		
		120412-HA																											0.13~0.55	0.80~3.50	
Medium to finishing		SNMG 120404-HC																											0.05~0.35	0.80~4.00	
		120408-HC																											0.08~0.40	0.80~4.00	
Medium to finishing		SNMG 120404-LP									●																		0.10~0.35	0.3~2.0	
		120408-LP									●		●																0.10~0.40	0.5~2.5	
		120412-LP										●		●																0.13~0.45	0.8~3.0


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders					
Designation	Page	Designation	Page	Designation	Page
MSBNR/L	B118	MSRNR/L	B119	PSDNN	B108
MSDNN	B118	MSSNR/L	B120	PSKNR/L	B109, B139
MSKNR/L	B119	PSBNR/L	B108	PSSNR/L	B109



B Turning Insert (Negative)

SN



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.18	3.81
12	12.7	4.76	5.16
15	15.875	6.35	6.35
19	19.05	6.35	7.93

Square **90° Negative**

Workpiece	Material													Machining types				
	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel	P	M	K	N	S	H	●	●	⚙	●	●	
Steel							●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel		●																
Cast iron			●															
Non-ferrous metal				●														
Heat resistant alloy, Titanium alloy					●													
Hardened steel						●												

Inserts	Designation	Cermets		Coated		Coated										Uncoated		Cutting Condition												
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6215	P05300	P05400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)			
Medium to finishing	VC	SNMG 120408-VC							●	●	●															0.15~0.40	0.50~3.50			
Medium to finishing	VP2	SNMG 120404-VP2																								0.05~0.35	0.10~3.00			
		120408-VP2																									0.10~0.45	0.50~4.50		
		120412-VP2																										0.10~0.50	0.50~5.00	
Medium	GM	SNMG 120404-GM																									0.05~0.30	0.90~5.00		
		120408-GM		●			●				●																	0.10~0.50	1.00~5.00	
		120412-GM										●																	0.13~0.60	1.30~5.00
Medium	HS	SNMG 090304-HS																									0.05~0.25	1.00~2.50		
		090308-HS																										0.10~0.30	1.00~2.50	
		120404-HS																											0.05~0.30	1.00~4.50
		120408-HS																											0.10~0.40	1.00~4.50
		120412-HS																											0.13~0.55	1.00~4.50
		150612-HS																											0.13~0.55	1.00~6.10
		150616-HS																											0.15~0.60	1.00~4.50
		190612-HS																											0.13~0.55	1.00~7.60
190616-HS																											0.15~0.60	1.00~7.60		
Medium	MP	SNMG 090304-MP																									0.10~0.40	0.4~3.8		
		090308-MP																										0.15~0.40	0.5~4.0	
		090404-MP																										0.10~0.40	0.4~3.8	
		090408-MP																										0.15~0.40	0.5~4.0	
		120404-MP																										0.10~0.40	0.4~4.0	
		120408-MP																										0.15~0.45	0.5~4.5	
		120412-MP																										0.15~0.50	0.8~5.0	


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders					
Designation	Page	Designation	Page	Designation	Page
MSBNR/L	B118	MSRNR/L	B119	PSDNN	B108
MSDNN	B118	MSSNR/L	B120	PSKNR/L	B109, B139
MSKNR/L	B119	PSBNR/L	B108	PSSNR/L	B109



SN

Square **90° Negative**



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.18	3.81
12	12.7	4.76	5.16
15	15.875	6.35	6.35
19	19.05	6.35	7.93
25	25.4	7.94	9.12

Workpiece	Steel	P	M	K	N	S	H									Machining types		
	Stainless steel	M	K	N	S	H												
Cast iron																		
Non-ferrous metal																		
Heat resistant alloy, Titanium alloy																		
Hardened steel																		

Continuous cutting
 General cutting
 Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)		
Medium VM	SNMG 090304-VM																										0.05~0.30	0.90~3.50	
	SNMG 090308-VM																											0.10~5.00	1.00~3.50
	SNMG 120404-VM	●					●		●	●	●	●					●	●									0.05~0.30	0.90~5.00	
	SNMG 120408-VM	●							●	●	●	●					●	●	●		●		●				0.10~0.50	1.00~5.00	
	SNMG 120412-VM									●		●					●	●					●				0.13~0.60	1.30~5.00	
	SNMG 190612-VM																										0.25~0.60	2.50~7.50	
Medium VP3	SNMG 120404-VP3																●	●	●	●	●		●	●		0.05~0.30	0.10~3.00		
	SNMG 120408-VP3																●	●	●	●	●		●	●		0.10~0.45	1.00~5.00		
	SNMG 120412-VP3																●	●	●	●	●		●	●		0.12~0.50	1.00~5.00		
Medium (Cermet) VQ	SNMG 090304-VQ																										0.05~0.30	0.50~3.50	
	SNMG 090308-VQ																										0.08~0.30	0.80~4.00	
	SNMG 120404-VQ	●	●																								0.05~0.30	0.80~4.00	
	SNMG 120408-VQ	●	●							●																	0.08~0.40	0.80~4.00	
Medium to roughing B25	SNMG 090308-B25																										0.17~0.45	0.80~3.50	
	SNMG 120404-B25	●	●					●	●	●	●	●				●											0.17~0.45	1.00~3.50	
	SNMG 120408-B25	●	●					●	●	●	●	●				●	●	●	●				●			0.23~0.60	1.50~5.00		
	SNMG 120412-B25		●					●	●	●	●	●				●	●										0.25~0.60	2.00~5.00	
	SNMG 120416-B25							●		●	●	●					●										0.35~0.70	2.50~5.00	
	SNMG 120420-B25																										0.40~0.70	3.00~5.00	
	SNMG 150608-B25											●															0.25~0.60	1.50~6.00	
	SNMG 150612-B25									●																	0.25~0.60	2.00~6.00	
	SNMG 150616-B25									●	●																0.35~0.70	2.00~6.00	
	SNMG 190608-B25								●		●	●					●										0.25~0.60	3.00~8.00	
	SNMG 190612-B25								●		●	●	●				●	●					●				0.30~0.60	3.00~8.00	
	SNMG 190616-B25								●		●	●					●							●			0.35~0.70	3.00~8.00	
	SNMG 250716-B25																										0.35~0.70	4.00~12.00	
	SNMG 250724-B25								●			●															0.50~1.00	5.00~12.00	
SNMG 250924-B25								●																					
Medium to roughing GS	SNMG 120404-GS																●										0.10~0.45	0.80~4.50	
	SNMG 120408-GS																●	●					●		●		0.10~0.50	1.00~5.00	
	SNMG 120412-GS																	●					●				0.13~0.65	1.00~5.00	
	SNMG 120416-GS																										0.15~0.70	1.00~5.00	
	SNMG 190612-GS																●	●									0.30~0.80	1.70~9.00	


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders					
Designation	Page	Designation	Page	Designation	Page
MSBNR/L	B118	MSRNR/L	B119	PSDNN	B108
MSDNN	B118	MSSNR/L	B120	PSKNR/L	B109, B139
MSKNR/L	B119	PSBNR/L	B108	PSSNR/L	B109



B Turning Insert (Negative)

SN



Dimensions(mm)			
Size	d	t	d1
12	12.7	4.76	5.16
15	15.875	6.35	6.35
19	19.05	6.35	7.93
25	25.4	7.94~9.52	9.12

□ Square 90° Negative

Workpiece	Steel	P	M	K	N	S	H	Machining types													
	Stainless steel		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


Inserts	Designation	Cermets		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Roughing GR	SNMG 120404-GR																									0.15~0.45	0.08~6.00	
	120408-GR									●	●	●					●	●								0.20~0.50	1.00~7.00	
	120412-GR									●	●						●	●								0.20~0.50	1.00~7.00	
	150608-GR									●	●															0.25~0.60	1.00~7.00	
	150612-GR								●	●	●	●														0.29~0.75	1.40~7.00	
	190608-GR								●	●		●						●								0.30~0.80	1.70~9.00	
	190612-GR								●	●		●	●					●								0.30~0.80	1.70~9.00	
	190616-GR								●	●		●	●					●								0.31~0.82	1.90~12.30	
	250724-GR								●	●		●															0.45~1.20	2.60~14.00
	250924-GR								●	●		●															0.50~1.20	2.60~14.00
Roughing HR	SNMG 120408-HR								●																	0.20~0.50	1.00~7.00	
	120412-HR																									0.25~0.70	1.30~7.00	
	120416-HR																									0.32~0.75	1.80~7.00	
	150608-HR																	●								0.20~0.50	1.80~8.00	
	150612-HR																	●								0.20~0.70	1.30~8.00	
	150616-HR																									0.30~0.80	1.80~8.00	
	150624-HR																									0.32~0.90	2.20~8.00	
	190608-HR																									0.20~0.50	1.00~10.00	
	190612-HR																										0.25~0.70	1.30~10.00
	190616-HR								●	●		●														0.30~0.80	1.80~10.00	
	190624-HR								●	●		●														0.32~0.90	2.30~10.00	
250724-HR								●	●		●														0.40~1.20	2.30~15.00		
250924-HR								●	●		●														0.40~1.20	2.30~15.00		
Roughing VK	SNMG 120404-VK																									0.15~0.50	0.08~8.00	
	120408-VK																									0.20~0.50	1.00~7.00	
	120412-VK																									0.20~0.50	1.00~7.00	
Roughing VR	SNMG 120408-VR																									0.25~0.55	1.2~7.0	
	120412-VR																									0.30~0.60	1.5~7.0	
	190612-VR																									0.35~0.70	2.0~10.0	
	190616-VR																									0.35~0.75	2.2~10.0	
Medium GM	SNMM 120408-GM																									0.10~0.50	1.00~5.00	
	120412-GM																									0.13~0.60	1.30~5.00	

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders					
Designation	Page	Designation	Page	Designation	Page
MSBNR/L	B118	MSRNR/L	B119	PSSNR/L	B109
MSDNN	B118	MSSNR/L	B120	PSDNN	B108
MSKNR/L	B119	PSBNR/L	B108	PSKNR/L	B109, B139



SN



Dimensions(mm)			
Size	d	t	d1
12	12.7	4.76	5.16
15	15.875	6.35	6.35
19	19.05	6.35	7.93
25	25.4	7.94~9.52	9.12

Square **90° Negative**

Workpiece	Steel	P																	Machining types
	Stainless steel	M																	
Cast iron	K																	● Continuous cutting ● General cutting ✱ Interrupted cutting	
Non-ferrous metal	N																		
Heat resistant alloy, Titanium alloy	S																		
Hardened steel	H																		

Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	HD1	H05	fn (mm/rev)	ap (mm)	
Roughing 	SNMM 120408-GR																									0.20~0.50	1.00~7.00	
	120412-GR										●																0.25~0.65	1.30~7.00
	190612-GR										●																0.25~0.65	1.30~11.50
	190616-GR																										0.32~0.85	1.80~11.50
Heavy 	SNMM 120408-GH											●	●	●												0.30~0.60	2.50~8.00	
	120412-GH											●	●														0.30~0.70	2.50~8.00
	150612-GH												●	●													0.30~0.70	2.50~8.00
	190612-GH											●	●	●													0.30~0.70	3.00~8.00
	190616-GH									●	●	●	●	●													0.45~1.00	4.00~9.00
	190624-GH									●	●	●	●	●													0.55~1.20	4.00~9.00
	250724-GH									●	●	●	●	●													0.55~1.20	5.00~12.00
	250924-GH									●	●	●	●	●													0.55~1.20	5.00~12.00
250932-GH																										0.55~1.20	5.00~12.00	
Heavy (General) 	SNMM 190612-VH										●															0.50~0.90	5.00~10.00	
	190616-VH										●																0.50~1.10	5.00~10.00
	190624-VH										●																0.60~1.20	6.00~12.00
	250724-VH										●		●														0.70~1.40	6.00~15.00
	250920-VH																										0.70~1.40	6.00~15.00
	250924-VH									●	●																0.70~1.40	6.00~15.00
	250716-VH																										0.70~1.50	6.00~14.00
Heavy (High feed cutting) 	SNMM 190612-VT										●			●												0.60~1.00	6.00~13.00	
	190616-VT										●			●													0.60~1.10	6.00~13.00
	190624-VT									●	●																0.60~1.60	7.00~13.00
	250724-VT									●				●													0.75~1.60	7.00~15.00
	250920-VT																										0.75~1.60	7.00~15.00
	250924-VT									●	●			●													0.75~1.60	7.00~17.00
	250716-VT																										0.75~1.60	7.00~15.00

Cutting edge geometry **A38 ~ A43** Recommended chip breaker **B04 ~ B11** Code system **B18 ~ B19** ● : Stock item


Available tool holders					
Designation	Page	Designation	Page	Designation	Page
MSBNR/L	B118	MSRNR/L	B119	PSSNR/L	B109
MSDNN	B118	MSSNR/L	B120	PSDNN	B108
MSKNR/L	B119	PSBNR/L	B108	PSKNR/L	B109, B139



B Turning Insert (Negative)

SN ○ ○

□ Square 90° Negative



Dimensions(mm)			
Size	d	t	d1
12	12.7	3.18~4.76	5.16
15	15.875	4.76	-
19	19.05	4.76	-
25	25.4	7.94	-

Workpiece	Material Groups												Machining types					
	P	M	K	N	S	H												
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition												
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)			
Medium to roughing	SNMN	120304																									0.17~0.45	1.00~3.50		
		120308																										0.23~0.60	1.50~6.00	
		120312																										0.25~0.60	2.00~5.00	
		120404																										0.17~0.45	1.00~3.50	
		120408																										0.23~0.60	1.50~5.00	
		120412																										0.25~0.60	2.00~5.00	
		150404																										0.20~0.50	1.50~6.00	
		150408																											0.25~0.60	1.50~6.00
		150412																											0.25~0.60	2.00~6.00
		190416																											0.35~0.70	2.00~6.00
Medium	SNMX	120408R																									0.15~0.35	1.00~4.00		
Medium to roughing	SNUN	120408																									0.23~0.60	1.50~5.00		
		120412																									0.25~0.60	2.00~5.00		
		190412																									0.30~1.00	3.00~10.00		
		120412TN																									0.25~0.60	2.00~5.00		
		250724TN																										0.30~1.20	3.00~12.00	


↻ Cutting edge geometry A38 ~ A43
 ↻ Recommended chip breaker B04 ~ B11
 ↻ Code system B18 ~ B19
 ● : Stock item

Available tool holders					
Designation	Page	Designation	Page	Designation	Page
MSBNR/L	B118	MSRNR/L	B119	PSSNR/L	B109
MSDNN	B118	MSSNR/L	B120	PSDNN	B108
MSKNR/L	B119	PSBNR/L	B108	PSKNR/L	B109, B139



TN ○ ○

Triangular **60° Negative**



Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.40
16	9.525	3.18~4.76	3.81
22	12.7	4.76	5.16
27	15.875	6.35	6.35

Workpiece	Machining types														
	P	M	K	N	S	H	1	2	3	4	5	6	7	8	9
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Continuous cutting
 General cutting
 Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)		
Roughing		TNGA 110302																									0.05~0.30	0.20~3.00	
		110304																									0.05~0.30	0.40~3.00	
		160304																									0.10~0.35	0.40~4.00	
		160402																									0.10~0.30	0.20~4.00	
		160404	●																								0.10~0.35	0.40~5.00	
		160408																									0.12~0.40	0.50~5.00	
		220304																									0.10~0.35	0.50~5.00	
		220402																										0.05~0.30	0.20~3.00
		220404																										0.10~0.35	0.40~5.00
		220408																										0.10~0.40	0.50~5.00
		220412																										0.12~0.45	1.00~5.50
		270612																										0.12~0.45	1.00~7.00
270624																										0.20~0.55	2.00~7.00		
Finishing		TNGG 160402R-SC	●																							0.03~0.20	0.10~1.50		
		160404R-SC	●																							0.05~0.25	0.30~2.00		
		160402L-SC																									0.03~0.20	0.10~1.50	
		160404L-SC																									0.05~0.25	0.30~2.00	
Medium		TNGG 110304R																								0.05~0.30	0.50~2.50		
		160402R	●																							0.08~0.30	0.50~3.50		
		160404R	●	●																						0.12~0.30	1.00~3.50		
		160408R	●																							0.15~0.35	1.30~3.50		
		220404R	●																							0.12~0.30	1.00~5.00		
		220408R	●																							0.15~0.35	1.30~5.00		
		220412R																								0.17~0.40	1.50~5.00		
		110304L																									0.05~0.30	0.50~2.50	
		160402L																									0.08~0.30	0.50~3.50	
		160404L	●	●																							0.12~0.30	1.00~3.50	
		160408L	●																								0.15~0.35	1.30~3.50	
		220404L																									0.12~0.30	1.00~5.00	
		220408L																									0.15~0.35	1.30~5.00	
		220412L																									0.17~0.40	1.50~5.00	

↻ Cutting edge geometry **A38 ~ A43**
 ↻ Recommended chip breaker **B04 ~ B11**
 ↻ Code system **B18 ~ B19**
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
MTENN	B120	PTGNR/L	B110
MTFNR/L	B120	PTTNR/L	B111
MTGNR/L	B121	WTENN	B112
MTJNR/L	B121	WTJNR/L	B112
PTFNR/L	B110,140	WTXNR/L	B112



B Turning Insert (Negative)

TN ○ ○

Triangular 60° Negative



Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.40
16	9.525	3.18~4.76	3.81
22	12.7	4.76	5.16
27	15.875	6.35	6.35
33	15.875	9.52	7.93

Workpiece	Material	Machining types												
		P	M	K	N	S	H	1	2	3	4	5	6	7
Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	M													
Cast iron	K	●	●	●										
Non-ferrous metal	N													
Heat resistant alloy, Titanium alloy	S													
Hardened steel	H													

● Continuous cutting
 ● General cutting
 ● Interrupted cutting


Inserts	Designation	Cermets			Coated		Coated											Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)		
Medium	TNGN	110302																									0.05~0.25	0.20~2.50	
		110304																										0.10~0.30	0.50~2.50
		110308																										0.10~0.30	0.80~2.50
		160302																										0.05~0.30	0.20~3.00
		160304																										0.10~0.30	0.50~4.00
		160308																										0.10~0.40	0.80~4.00
		160404																										0.10~0.40	0.50~4.00
		160408																										0.10~0.40	1.00~4.00
		160412																										0.10~0.50	1.50~4.50
		220404																										0.10~0.35	1.00~4.00
		220408																										0.15~0.40	1.50~5.00
		220412																										0.20~0.50	1.50~5.00
		220416																										0.25~0.55	1.50~5.00
		220424																										0.30~0.65	2.00~5.00
270630																										0.35~0.70	2.00~5.00		
Roughing	TNMA	110308																									0.05~0.30	0.50~3.00	
		160404																●	●								0.10~0.30	1.00~4.00	
		160408							●									●	●								0.10~0.40	1.00~4.00	
		160412																	●	●							0.10~0.50	1.50~4.50	
		160416																		●							0.15~0.55	1.50~4.50	
		220404																									0.10~0.35	1.00~4.00	
		220408																	●	●							0.15~0.40	1.50~5.00	
		220412								●									●	●							0.20~0.50	1.50~5.00	
		220416																		●							0.25~0.55	1.50~5.00	
		220420																										0.30~0.65	2.00~5.00
		220432																										0.35~0.70	2.00~5.00
		270608																										0.20~0.45	2.00~7.00
		270612																										0.25~0.55	3.00~7.00
		270616																										0.30~0.65	3.00~7.00
330924																										0.35~0.75	3.00~9.00		
Finishing	TNMG	160404-VB	●		●	●	●																				0.10~0.35	0.30~1.50	
		160408-VB	●		●	●	●	●	●	●	●	●											●				0.15~0.45	0.50~7.00	
		220408-VB							●	●	●	●															0.15~0.45	0.50~2.50	
		220412-VB																									0.20~0.50	0.70~2.50	

⚙ Cutting edge geometry A38 ~ A43
 🔄 Recommended chip breaker B04 ~ B11
 🔗 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MTENN	B120	PTGNNR/L	B110
MTFNRR/L	B120	PTTNNR/L	B111
MTGNRR/L	B121	WTENN	B112
MTJNNR/L	B121	WTJNNR/L	B112
PTFNRR/L	B110,140	WTXNNR/L	B112

TN ○ ○

Triangular 60° Negative



Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.40
16	9.525	4.76	3.81
22	12.7	4.76	5.16

Workpiece	Steel	P															Machining types
	Stainless steel	M															
Cast iron	K															● Continuous cutting ● General cutting ✱ Interrupted cutting	
Non-ferrous metal	N																
Heat resistant alloy, Titanium alloy	S																
Hardened steel	H																

Inserts	Designation	Cermert		Coated		Coated												Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	HD1	H05	fn (mm/rev)	ap (mm)		
Finishing	VL	TNMG 160404-VL	●				●			●																	0.05~0.25	0.10~1.00	
		TNMG 160408-VL	●				●			●																	0.10~0.35	0.20~1.50	
		TNMG 160412-VL																									0.15~0.40	0.20~1.50	
		TNMG 220408-VL																									0.10~0.35	0.20~1.50	
		TNMG 220412-VL																										0.10~0.35	0.50~2.00
Finishing	VF	TNMG 110304-VF	●	●										●													0.05~0.20	0.20~1.00	
		TNMG 160404-VF	●	●				●		●				●												●	0.07~0.30	0.50~1.50	
		TNMG 160408-VF						●	●	●				●													0.10~0.40	0.50~1.50	
		TNMG 160412-VF																										0.15~0.50	0.50~1.50
		TNMG 220404-VF																								●	0.10~0.40	0.50~1.50	
		TNMG 220408-VF																										0.10~0.40	0.50~1.50
Finishing (Cermert)	VG	TNMG 110304-VG	●	●																							0.05~0.20	0.20~1.00	
		TNMG 160404-VG	●	●																							0.07~0.30	0.50~1.50	
		TNMG 160408-VG	●																									0.10~0.40	0.50~1.50
		TNMG 220404-VG																										0.10~0.40	0.50~1.50
Finishing (wiper)	VW	TNMG 160404-VW																									0.10~0.35	0.30~3.00	
		TNMG 160408-VW															●										0.10~0.40	0.30~3.00	
Medium to finishing	HA	TNMG 160404-HA												●												●	0.05~0.30	0.80~3.50	
		TNMG 160408-HA												●	●											●	0.10~0.40	0.80~3.50	
		TNMG 160412-HA																									●	0.13~0.55	0.80~3.50
		TNMG 220408-HA																								●	0.10~0.40	0.80~5.30	
Medium to finishing	HC	TNMG 160404-HC					●						●														0.05~0.35	0.50~3.50	
		TNMG 160408-HC					●		●				●	●													0.08~0.40	0.80~4.00	
		TNMG 160412-HC																									0.13~0.50	0.90~4.00	
		TNMG 220408-HC																									0.08~0.40	0.80~4.00	


🔄 Cutting edge geometry A38 ~ A43
🔄 Recommended chip breaker B04 ~ B11
🔄 Code system B18 ~ B19
● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MTENN	B120	PTGNR/L	B110
MTFNR/L	B120	PTTNR/L	B111
MTGNR/L	B121	WTENN	B112
MTJNR/L	B121	WTJNR/L	B112
PTFNR/L	B110,140	WTXNR/L	B112

B Turning Insert (Negative)

TN○○○

Triangular 60° Negative



Dimensions(mm)			
Size	d	t	d1
16	9.525	3.18~4.76	3.81
22	12.7	4.76	5.16

Workpiece	Material Compatibility												Machining types		
	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel	P	M	K	N	S	H	Continuous cutting	General cutting	Interrupted cutting
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermert		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	P05300	P05400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)		
Medium to finishing	LP	TNMG 160404-LP					●				●																0.10~0.35	0.3~2.0	
		TNMG 160408-LP					●				●																	0.10~0.40	0.5~2.5
		TNMG 160412-LP										●																0.13~0.45	0.8~3.0
Medium to finishing	VC	TNMG 160404-VC					●			●	●																0.10~0.35	0.30~2.00	
		TNMG 160408-VC						●		●	●																0.15~4.00	0.50~3.00	
		TNMG 160412-VC								●	●																0.15~4.50	0.50~3.00	
		TNMG 220408-VC								●	●																0.15~0.40	0.50~3.00	
		TNMG 220412-VC									●	●																0.15~0.45	0.50~3.00
Medium to finishing	VP2	TNMG 160404-VP2								●								●	●	●	●	●		●		0.05~0.30	0.10~3.00		
		TNMG 160408-VP2									●								●	●	●	●	●		●		0.10~0.45	0.50~5.00	
		TNMG 160412-VP2																		●	●	●	●	●		●		0.13~0.55	0.80~3.30
		TNMG 220404-VP2																		●	●	●	●				0.05~0.30	0.80~5.00	
		TNMG 220408-VP2																		●	●	●	●				0.10~0.40	0.80~5.00	
Medium to finishing (Cermert)	VQ	TNMG 110304-VQ																									0.05~0.30	0.50~3.50	
		TNMG 160404-VQ	●	●	●	●	●																				0.05~0.35	0.50~3.50	
		TNMG 160408-VQ	●	●	●	●	●				●																	0.08~0.40	0.80~4.00
		TNMG 220404-VQ																										0.05~0.35	0.50~4.00
Medium	GM	TNMG 160404-GM		●	●			●	●			●															0.05~0.30	0.80~5.00	
		TNMG 160408-GM		●	●			●	●			●																0.10~0.50	1.00~5.00
		TNMG 160412-GM																										0.13~0.60	1.30~5.00
		TNMG 220404-GM																										0.05~0.30	0.90~6.30
		TNMG 220408-GM								●																		0.10~0.50	1.00~6.60
		TNMG 220412-GM																										0.13~0.60	1.30~6.60


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MTENN	B120	PTGNNR/L	B110
MTFNRR/L	B120	PTTNNR/L	B111
MTGNRR/L	B121	WTENN	B112
MTJNNR/L	B121	WTJNNR/L	B112
PTFNRR/L	B110,140	WTXNNR/L	B112








TN○○○

Triangular **60° Negative**



Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.40
16	9.525	4.76	3.81
22	12.7	4.76	5.16

Workpiece	Material																Machining types		
	P	M	K	N	S	H												●	⊛
Steel																		●	⊛
Stainless steel																		●	⊛
Cast iron																		●	⊛
Non-ferrous metal																		●	⊛
Heat resistant alloy, Titanium alloy																		●	⊛
Hardened steel																		●	⊛

Inserts	Designation	Cermert		Coated		Coated											Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)	
Medium 	TNMG 160404-HS													●	●		●	●			●	●				0.08~0.35	0.50~4.00	
	TNMG 160408-HS													●	●		●	●			●	●				0.10~0.40	1.00~4.50	
	TNMG 160412-HS																●	●				●				0.13~0.55	1.00~4.50	
	TNMG 220404-HS																●	●								0.05~0.30	0.90~6.30	
	TNMG 220408-HS														●	●		●	●			●	●				0.10~0.40	1.00~6.30
	TNMG 220412-HS																●	●				●					0.13~0.55	1.00~6.30
Medium 	TNMG 160404-MP						●			●	●					●		●	●							0.10~0.40	0.4~3.5	
	TNMG 160408-MP						●			●	●					●		●	●							0.15~0.45	0.5~4.0	
	TNMG 160412-MP						●			●	●					●		●	●							0.15~0.50	0.8~4.5	
	TNMG 220404-MP									●	●								●	●						0.10~0.35	0.4~5.0	
	TNMG 220408-MP									●	●								●	●							0.15~0.45	0.5~5.5
	TNMG 220412-MP										●	●								●	●						0.15~0.50	0.8~6.0
Medium 	TNMG 110308-VM																									0.05~0.30	0.80~4.00	
	TNMG 160404-VM		●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●							0.05~0.30	0.90~5.00
	TNMG 160408-VM		●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●			●				0.10~0.50	1.00~5.00
	TNMG 160412-VM		●	●			●		●		●						●	●									0.13~0.60	1.30~5.00
	TNMG 220404-VM									●							●	●									0.05~0.30	0.90~6.60
	TNMG 220408-VM								●	●		●					●	●		●							0.10~0.50	1.00~6.60
Medium 	TNMG 160404-VP3																●	●	●	●	●					0.05~0.30	0.10~3.00	
	TNMG 160408-VP3																●	●	●	●	●					0.10~0.45	0.50~5.00	
Medium (wiper) 	TNMG 160408-LW						●																			0.15~0.50	0.70~4.50	
	TNMG 160412-LW																										0.20~0.60	1.00~5.00


Cutting edge geometry A38 ~ A43 Recommended chip breaker B04 ~ B11 Code system B18 ~ B19 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MTENN	B120	PTGNR/L	B110
MTFNR/L	B120	PTTNR/L	B111
MTGNR/L	B121	WTENN	B112
MTJNR/L	B121	WTJNR/L	B112
PTFNR/L	B110,140	WTXNR/L	B112

B Turning Insert (Negative)

TN ○ ○

Triangular 60° Negative



Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.40
16	9.525	3.18~4.76	3.81
22	12.7	4.76	5.16
27	15.875	6.35	6.35
33	19.05	7.94~9.52	7.93

Workpiece	Material		Machining types																			
	Symbol	Code	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Steel	P		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	M		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	N		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	S		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermets		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)		
Medium to roughing 	TNMG 110308-B25																									0.17~0.40	1.50~3.00		
	160304-B25																										0.17~0.45	2.00~3.50	
	160308-B25											●															0.17~0.55	2.00~3.50	
	160312-B25																										0.25~0.55	2.00~3.50	
	160316-B25																										0.30~0.60	2.50~3.00	
	160404-B25		●	●				●	●	●	●	●					●	●									0.17~0.45	2.00~3.50	
	160408-B25		●	●				●	●	●	●	●					●	●					●				0.17~0.55	2.00~3.50	
	160412-B25			●				●			●	●	●					●										0.25~0.55	2.00~3.50
	160416-B25																	●	●									0.30~0.60	2.50~3.00
	220404-B25							●		●	●	●	●															0.17~0.45	1.50~5.00
	220408-B25							●		●	●	●	●					●										0.17~0.55	2.00~5.00
	220412-B25							●		●	●	●	●					●										0.25~0.55	2.00~5.00
	220416-B25							●		●	●	●	●					●										0.30~0.60	2.00~5.00
	220424-B25																											0.35~0.70	3.00~7.00
	220432-B25																											0.40~0.75	3.50~7.00
	270608-B25												●															0.17~0.55	2.00~5.00
	270612-B25							●		●	●	●	●															0.25~0.55	3.00~7.00
	270616-B25																											0.30~0.60	3.00~7.00
330716-B25								●			●																0.35~0.70	3.00~9.00	
330924-B25																											0.40~0.80	3.00~9.00	
Medium to roughing 	TNMG 160404-GS																●	●					●	●			0.05~0.35	1.00~4.50	
	160408-GS										●							●	●		●			●	●			0.10~0.50	1.00~5.00
	160412-GS																											0.13~0.65	1.00~5.00
	220408-GS																							●				0.10~0.50	1.00~6.80
	220412-GS																											0.15~0.40	1.20~6.00
Roughing 	TNMG 160408-GR										●	●					●	●									0.20~0.50	1.00~7.00	
	160412-GR										●	●					●											0.23~0.54	1.20~8.00
	220408-GR										●	●	●	●			●	●										0.22~0.61	1.10~7.80
	220412-GR										●	●	●				●	●										0.28~0.78	1.20~7.80
	220416-GR										●	●						●										0.31~0.75	1.50~7.80
	270608-GR												●															0.31~0.75	1.50~7.80
	270612-GR											●	●															0.31~0.75	1.50~7.80
	270616-GR												●															0.36~1.00	1.60~7.80
	330924-GR													●														0.40~1.00	2.00~9.00


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MTENN	B120	PTGNR/L	B110
MTFNR/L	B120	PTTNR/L	B111
MTGNR/L	B121	WTENN	B112
MTJNR/L	B121	WTJNR/L	B112
PTFNR/L	B110,140	WTXNR/L	B112








TN ○ ○

Triangular 60° Negative



Dimensions(mm)			
Size	d	t	d1
16	9.525	4.76	3.81
22	12.7	4.76	5.16
27	15.875	6.35	6.35
33	19.05	7.94~9.52	7.93

Workpiece	Steel	P																Machining types
	Stainless steel	M																
Cast iron	K																● Continuous cutting ◐ General cutting ✱ Interrupted cutting	
Non-ferrous metal	N																	
Heat resistant alloy, Titanium alloy	S																	
Hardened steel	H																	

Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	HD1	H05	fn (mm/rev)	ap (mm)			
Roughing 	TNMG 160408-HR					●																					0.20~0.50	1.00~7.00		
	160412-HR						●																					0.25~0.60	1.30~7.00	
	220404-HR																											0.20~0.45	1.00~7.50	
	220408-HR																											0.20~0.50	1.00~8.00	
	220412-HR																											0.25~0.60	1.30~8.00	
	220416-HR																											0.32~0.70	1.80~8.00	
	270608-HR																											0.35~0.50	1.80~13.00	
	270612-HR																												0.35~0.70	2.30~13.00
	270632-HR																												0.40~0.90	3.00~13.00
	330716-HR																												0.40~0.70	3.00~14.00
330924-HR																												0.45~0.90	3.30~16.00	
Roughing 	TNMG 160404-VK																											0.15~0.50	0.80~5.00	
	160408-VK																												0.20~0.50	1.00~5.50
	160416-VK																												0.15~0.50	1.50~5.50
	220408-VK																												0.15~0.55	1.00~5.50
	220412-VK																												0.25~0.60	1.50~6.00
	220416-VK																												0.25~0.60	2.00~6.00
Roughing 	TNMG 160408-VR																											0.25~0.55	1.2~7.0	
	160412-VR																												0.35~0.65	1.7~7.0
	160416-VR																												0.35~0.70	2.0~10.0
	220408-VR																												0.35~0.70	2.0~10.0
	220412-VR																												0.35~0.70	2.0~10.0
	220416-VR																												0.35~0.75	2.2~10.0
Medium 	TNMM 160412-GM																											0.13~0.60	1.30~5.00	
	220408-GM																												0.10~0.50	1.00~6.60
	220412-GM																												0.13~0.60	1.30~6.60
	220416-GM																												0.15~0.65	1.50~7.00
Roughing 	TNMM 220408-GR																												0.22~0.61	1.10~7.80
	220412-GR																												0.28~0.78	1.20~7.80
	220416-GR																												0.31~0.75	1.50~7.80


 Cutting edge geometry **A38 ~ A43**
  Recommended chip breaker **B04 ~ B11**
  Code system **B18 ~ B19**
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MTENN	B120	PTGNNR/L	B110
MTFNNR/L	B120	PTTNNR/L	B111
MTGNNR/L	B121	WTENN	B112
MTJNNR/L	B121	WTJNNR/L	B112
PTFNNR/L	B110,140	WTXNNR/L	B112

B Turning Insert (Negative)

TN ○ ○





 Triangular 60° Negative



Dimensions(mm)			
Size	d	t	d1
16	9.525	4.76	3.81
22	12.7	4.76	5.16
27	15.875	6.35	6.35
33	19.05	9.52	7.93

Workpiece	Machining types										
	P	M	K	N	S	H	●	●	●	●	●
Steel	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting


Inserts	Designation	Cermert		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Heavy 	TNMM 160408-GH										●															0.20~0.50	1.00~7.00	
	220408-GH										●																0.25~0.60	1.30~7.00
	220412-GH								●		●																0.20~0.50	1.00~8.00
	220416-GH										●																0.25~0.60	1.30~8.00
	270616-GH											●															0.32~0.70	1.80~8.00
	270624-GH																										0.35~0.50	1.80~13.00
	330924-GH																										0.35~0.70	2.30~13.00
Medium to roughing 	TNMN 160408		●																							0.10~0.30	1.00~4.00	
	220408		●																								0.15~0.40	1.50~5.00
	220412																										0.20~0.50	1.50~5.00
Medium (Sharft) 	TNMX 160404R-SH																									0.15~0.30	0.50~4.00	
	160408R-SH																										0.15~0.45	1.00~4.0
	160404L-SH																										0.15~0.30	0.50~4.00
	160408L-SH																										0.15~0.45	1.00~4.0
Medium to roughing 	TNMX 160402R		●	●																							0.10~0.30	0.50~3.00
	160404R		●						●	●	●	●															0.12~0.30	1.00~3.50
	160408R		●							●	●																0.15~0.35	1.30~3.40
	220404R																										0.12~0.30	1.00~5.00
	220408R																										0.15~0.35	1.30~5.00
	160404L		●							●	●	●															0.12~0.30	1.00~3.50
	160408L									●	●	●															0.15~0.35	1.30~3.40

 Cutting edge geometry A38 ~ A43
  Recommended chip breaker B04 ~ B11
  Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MTENN	B120	PTGNNR/L	B110
MTFNRR/L	B120	PTTNNR/L	B111
MTGNRR/L	B121	WTENN	B112
MTJNNR/L	B121	WTJNNR/L	B112
PTFNRR/L	B110,140	WTXNNR/L	B112



VNOO



Dimensions(mm)			
Size	d	t	d1
16	9.525	4.76	3.81

Rhombic **35° Negative**

Workpiece	Machining types																
	Steel	P	M	K	N	S	H	●	◐	◑	◒	◓	◔	◕	◖	◗	
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	HD1	H05	fn (mm/rev)	ap (mm)	
Medium to finishing	HA	VNMG 160408-HA																									0.10~0.40	0.80~3.50
Finishing	VB	VNMG 160404-VB	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		0.10~0.35	0.30~1.50
		VNMG 160408-VB	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		0.15~0.45
Finishing	VF	VNMG 160402-VF	●					●	●																		0.06~0.20	0.30~1.00
		VNMG 160404-VF	●	●				●	●			●				●											0.08~0.30	0.50~1.50
		VNMG 160408-VF	●					●	●			●															0.10~0.40	0.50~1.50
		VNMG 160412-VF	●					●	●			●																0.15~0.50
Finishing (Cermet)	VG	VNMG 160404-VG	●																								0.08~0.30	0.50~1.50
		VNMG 160408-VG	●																								0.10~0.40	0.50~1.50
Finishing (Mild steel)	VL	VNMG 160404-VL	●	●			●		●		●																0.05~0.20	0.10~1.00
		VNMG 160408-VL	●	●	●			●		●	●	●															0.10~0.25	0.20~1.50
Medium to finishing	HA	VNMG 160404-HA																					●	●		0.08~0.35	0.50~3.00	
		VNMG 160408-HA																									0.10~0.40	0.80~3.50
Medium to finishing	LP	VNMG 160404-LP																									0.10~0.35	0.3~1.5
		VNMG 160408-LP																									0.10~0.40	0.5~2.0
		VNMG 160412-LP																									0.10~0.45	0.8~2.5
Medium to finishing	VC	VNMG 160404-VC	●		●				●																		0.10~0.35	0.30~2.00
		VNMG 160408-VC	●						●																		0.15~4.00	0.50~3.00

Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MVJNR/L	B121	MVVNN	B122
MVQNR/L	B122	MVUNR/L	B143

B Turning Insert (Negative)

VN○○○











Size	Dimensions(mm)		
	d	t	d1
16	9.525	4.76	3.81
22	12.7	4.76	5.16

Rhombic 35° Negative

Workpiece	Steel	P	M	K	N	S	H	Machining types	
	Stainless steel		•	•	•	•			•
	Cast iron		•	•	•	•			•
	Non-ferrous metal				•	•			•
	Heat resistant alloy, Titanium alloy						•		•
	Hardened steel						•		•

• Continuous cutting
 ◐ General cutting
 ◑ Interrupted cutting


Inserts	Designation	Cermets		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)		
 Medium to finishing (Cement)	VNMG	160404-VQ	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	0.10~0.40	0.50~3.50
		160408-VQ	•	•	•	•	•				•													•	•	•	•	0.12~0.45	0.50~3.50
 Medium	VNMG	160404-GM	•	•	•						•													•	•		0.08~0.45	0.50~3.50	
		160408-GM	•	•	•						•														•	•		0.10~0.50	1.00~4.00
 Medium	VNMG	160404-HS												•				•	•	•	•	•	•	•	•		0.08~0.35	0.50~4.00	
		160408-HS																	•	•	•	•	•	•	•	•		0.10~0.40	1.00~4.50
 Medium	VNMG	160404-MP								•		•	•							•	•			•	•		0.10~0.40	0.4~3.5	
		160408-MP								•		•	•							•	•			•	•		0.15~0.45	0.5~4.0	
		160412-MP																							•	•		0.15~0.50	0.8~4.5
 Medium	VNMG	160404-VP3																						•	•		0.05~0.30	0.10~3.00	
		160408-VP3																							•	•		0.10~0.45	0.50~5.00
 Medium	VNMG	160404-VM	•	•					•		•	•	•				•	•	•					•	•		0.08~0.45	0.50~3.50	
		160408-VM	•	•					•		•	•	•	•			•	•	•					•	•	•	0.10~0.50	1.00~4.00	
		160412-VM									•														•	•		0.20~0.50	1.50~4.00
		220404-VM																							•	•		0.08~0.45	1.00~5.00
		220408-VM																					•	•		0.10~0.50	1.50~5.00		
 Medium to roughing	VNMG	160408-HR																						•	•		0.10~0.50	1.00~4.00	
 Roughing	VNMG	160412-VK																						•	•		0.15~0.50	0.80~4.00	
		160404-B25	•	•	•																			•	•				

🔄 Cutting edge geometry A38 ~ A43
 🔄 Recommended chip breaker B04 ~ B11
 🔄 Code system B18 ~ B19
 • : Stock item

Available tool holders			
Designation	Page	Designation	Page
MVJNR/L	B121	MVVNN	B122
MVQNR/L	B122	MVUNR/L	B143



WN ○ ○



Dimensions(mm)			
Size	d	t	d1
06	9.525	4.76	3.81
08	12.7	4.76	5.16

Trigon **80° Negative**

Workpiece	Steel	P															Machining types
	Stainless steel	M															
Cast iron	K															● Continuous cutting ● General cutting ✦ Interrupted cutting	
Non-ferrous metal	N																
Heat resistant alloy, Titanium alloy	S																
Hardened steel	H																

Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)		
Roughing 	WNMA 060404																										0.10~0.30	0.50~3.00	
	060408																	●										0.10~0.30	0.50~3.00
	060412																											0.10~0.40	1.00~3.00
	080404																		●									0.15~0.60	1.00~5.00
	080408																	●	●	●								0.15~0.60	1.00~6.00
	080412																	●	●									0.15~0.70	1.50~6.00
	080416																	●										0.15~0.70	1.50~6.00
Finishing 	WNMG 080404-VB					●	●		●	●		●															0.10~0.35	0.30~1.50	
	080408-VB								●	●	●	●																0.15~0.45	0.50~2.00
Finishing 	WNMG 060404-VF		●			●					●																0.07~0.30	0.50~1.50	
	060408-VF						●		●																			0.10~0.40	0.50~1.50
	080404-VF						●		●			●																0.07~0.30	0.50~1.50
	080408-VF								●			●																0.10~0.40	0.50~1.50
	080412-VF																											0.20~0.50	0.50~1.50
Finishing (Cermet) 	WNMG 060404-VG																										0.07~0.30	0.50~1.50	
	060408-VG																											0.10~0.40	0.50~1.50
	080404-VG	●	●																									0.07~0.30	0.50~1.50
	080408-VG	●																										0.10~0.40	0.50~1.50
Finishing (Mild steel) 	WNMG 060404-VL																										0.05~0.25	0.20~1.50	
	080404-VL										●																	0.05~0.25	0.10~1.00
	080408-VL						●			●		●																0.10~0.35	0.20~1.50
Finishing (wiper) 	WNMG 080404-VW																										0.10~0.30	0.50~3.00	
	080408-VW																											0.15~0.50	0.50~4.00
Medium to finishing 	WNMG 060404-HA																						●	●	●		0.05~0.30	0.10~3.00	
	060408-HA																							●	●			0.10~0.40	0.80~3.50
	080404-HA										●				●									●	●	●		0.05~0.30	0.80~3.50
	080408-HA															●								●	●	●		0.10~0.40	0.80~3.50
	080412-HA																											0.13~0.55	0.80~3.50


Cutting edge geometry **A38 ~ A43** Recommended chip breaker **B04 ~ B11** Code system **B18 ~ B19** ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MWLNRL	B122	WWLNRL	B113
PWLNRL	B140		



B Turning Insert (Negative)

WN○○○



Dimensions(mm)			
Size	d	t	d1
06	9.525	4.76	3.81
08	12.7	4.76	5.16

Trigon 80° Negative

Workpiece	Material		Machining types														
	Symbol	Code	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Steel	P		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	M																
Cast iron	K		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	N																
Heat resistant alloy, Titanium alloy	S																
Hardened steel	H																

● Continuous cutting
 ● General cutting
 ● Interrupted cutting


Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition												
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)			
Medium to finishing 	WNMG 060404-HC																										0.05~0.30	0.80~4.00		
	080404-HC																											0.05~0.30	0.80~4.00	
	080408-HC										●	●																0.08~0.40	0.80~4.00	
Medium to finishing 	WNMG 080404-LP						●			●		●															0.10~0.35	0.3~2.0		
	080408-LP						●			●		●																0.10~0.40	0.5~2.5	
	080412-LP						●			●		●																0.13~0.45	0.8~3.0	
Medium to finishing 	WNMG 080404-VC																										0.15~0.40	0.15~4.00		
	080408-VC						●		●	●																		0.15~0.45	0.15~4.50	
	080412-VC						●			●	●	●																0.15~0.45	0.15~4.50	
Medium to finishing 	WNMG 080404-VP2																●	●									0.10~0.45	0.50~5.00		
	080408-VP2																●	●	●	●				●				0.12~0.50	0.50~5.00	
	080412-VP2																●	●	●	●	●			●				0.05~0.30	0.10~3.00	
Medium to finishing (Cermet) 	WNMG 060404-VQ		●																									0.05~0.30	0.50~4.00	
	060408-VQ																												0.08~0.30	0.80~4.00
	080404-VQ		●	●	●																								0.05~0.30	0.50~4.00
	080408-VQ		●		●	●					●																		0.08~0.40	0.80~4.00
	080412-VQ										●																		0.10~0.35	0.80~3.50
Medium 	WNMG 080404-GM									●							●	●		●								0.05~0.30	0.90~5.00	
	080408-GM									●							●	●		●								0.10~0.50	1.00~5.00	
	080412-GM																●	●		●								0.18~0.60	0.30~5.00	
Medium 	WNMG 060404-HS																●	●										0.05~0.20	1.00~2.50	
	060408-HS																●	●		●								0.10~0.20	1.00~2.50	
	060412-HS																●	●		●								0.10~0.30	1.00~3.50	
	080404-HS																●	●		●								0.05~0.30	1.00~4.50	
	080408-HS																●	●		●								0.10~0.40	1.00~4.50	
	080412-HS																●	●		●								0.13~0.55	1.00~4.50	

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MWLNLR/L	B122	WWLNLR/L	B113
PWLNLR/L	B140		



WN



Dimensions(mm)			
Size	d	t	d1
06	9.525	4.76	3.81
08	12.7	4.76	5.16

Trigon **80° Negative**

Workpiece	Steel	P													Machining types					
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K	●	●	●																
Non-ferrous metal	N																			
Heat resistant alloy, Titanium alloy	S																			
Hardened steel	H																			

Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)	
	WNMG 080404-MP					●																		●		0.10~0.40	0.4~4.0	
	080408-MP					●																		●		0.15~0.45	0.5~4.5	
	080412-MP					●																		●		0.15~0.50	0.8~5.0	
	080416-MP																										0.18~0.55	0.1~5.0
	WNMG 060402-VM																									0.05~0.30	0.90~3.50	
	060404-VM					●																					0.10~0.45	1.00~3.50
	060408-VM					●																					0.10~0.50	1.00~4.00
	060412-VM																										0.13~0.60	1.30~4.00
	080404-VM																										0.05~0.30	0.90~5.00
	080408-VM																										0.10~0.50	1.00~5.00
	WNMG 080404-VP3																								●	●	0.10~0.45	0.50~5.00
	080408-VP3																								●	●	0.12~0.50	0.50~5.00
	080412-VP3																								●	●	0.05~0.30	0.10~3.00
	WNMG 060408-LW					●																					0.15~0.60	0.50~3.50
	060412-LW																										0.20~0.70	0.80~3.50
	080408-LW					●																					0.15~0.60	1.00~5.00
	080412-LW					●																					0.20~0.70	1.00~6.00
	WNMG 080404-B25					●																					0.17~0.45	1.00~5.00
	080408-B25					●																					0.23~0.60	1.50~5.00
	080412-B25					●																					0.25~0.60	2.00~5.00
	WNMG 060404-GS																										0.05~0.25	0.10~3.00
	060408-GS																										0.10~0.50	1.00~4.00
	060412-GS																										0.10~0.50	1.00~4.00
	080404-GS																										0.05~0.25	0.10~3.00
	080408-GS																										0.10~0.50	1.00~5.00
	080412-GS																										0.13~0.65	1.00~5.00

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
MWLNLR/L	B122	WWLNLR/L	B113
PWLNLR/L	B140		



B Turning Insert (Negative)







WN○○○

 Trigon **80° Negative**



Dimensions(mm)			
Size	d	t	d1
06	9.525	4.76	3.81
08	12.7	4.76	5.16
10	15.875	6.35	6.35
13	19.05	6.35	7.93

Workpiece	Machining types												
	P	M	K	N	S	H							
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermets		Coated		Coated										Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)
Roughing 	WNMG 080404-GR																	●								0.15~0.50	0.08~6.00
	080408-GR						●	●	●		●	●						●	●							0.20~0.50	1.00~7.00
	080412-GR						●	●	●		●	●						●	●							0.25~0.50	1.30~7.00
	080416-GR						●																			0.25~0.60	1.80~6.00
Roughing 	WNMG 060408-HR																									0.20~0.40	1.00~5.50
	060412-HR																									0.25~0.50	1.10~5.50
	080408-HR						●				●															0.20~0.50	1.00~7.00
	080412-HR						●				●															0.25~0.65	1.30~7.00
Roughing 	WNMG 080404-VK																	●								0.15~5.00	0.08~6.00
	080408-VK																	●	●							0.20~5.00	1.00~7.00
	080412-VK																	●	●							0.25~5.00	1.30~7.00
	080416-VK																									0.25~6.00	1.89~6.00
Roughing 	WNMG 080408-VR																	●								0.25~0.55	1.2~7.0
	080412-VR																	●								0.30~0.60	1.5~7.0
Medium to roughing 	WNMM 100608-B25											●														0.30~0.80	3.00~8.00
	130612-B25																									0.40~0.90	4.00~10.00
Medium (Shaft) 	WNMX 080404R-SH																									0.15~0.30	1.00~4.00
	080408R-SH																									0.15~0.50	1.50~5.00
	080404L-SH																									0.15~0.30	1.00~4.00
	080408L-SH																									0.15~0.50	1.50~5.00


 Cutting edge geometry A38 ~ A43
  Recommended chip breaker B04 ~ B11
  Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
MWLNLR/L	B122	WWLNLR/L	B113
PWLNLR/L	B140		





Rhombic 80° Positive
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
03	3.5	1.39	1.9
04	4.3	1.79	2.3
06	6.35	2.38	2.8
09	9.525	3.97	4.4

Workpiece	Material		Machining types																
	Color	Code	● Continuous cutting ● General cutting ✳ Interrupted cutting																
Steel	P	●●●●●●●●●●●●●●●●●●●●																	
Stainless steel	M	●●●●●●●●●●●●●●●●●●●●																	
Cast iron	K	●●●●●●●●●●●●●●●●●●●●																	
Non-ferrous metal	N	●●●●●●●●●●●●●●●●●●●●																	
Heat resistant alloy, Titanium alloy	S	●●●●●●●●●●●●●●●●●●●●																	
Hardened steel	H	●●●●●●●●●●●●●●●●●●●●																	

Inserts	Designation	Cermet		Coated		Coated											Uncoated		Cutting Condition												
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)				
Finishing		CCET	0301005R																								0.01~0.05	0.10~0.30			
			030101R																										0.01~0.05	0.10~0.30	
			030102R																											0.01~0.05	0.10~0.30
			030104R																											0.01~0.05	0.10~0.30
			0401005R																											0.01~0.10	0.10~0.50
			040101R																											0.01~0.10	0.10~0.50
			040102R																											0.01~0.10	0.10~0.50
			040104R																											0.01~0.10	0.10~0.50
			0301005L																											0.01~0.05	0.10~0.30
			030101L																											0.01~0.05	0.10~0.30
			030102L			●																				●	●			0.01~0.05	0.10~0.30
			030104L																											0.01~0.05	0.10~0.30
			0401005L																											0.01~0.10	0.10~0.50
			040101L																											0.01~0.10	0.10~0.50
			040102L			●																				●	●			0.01~0.10	0.10~0.50
040104L																											0.01~0.10	0.10~0.50			
Finishing (High precision)		CCET	0602005MFR-KF																									0.01~0.06	0.04~1.30		
			060201MFR-KF																					●					0.02~0.08	0.05~1.50	
			060202MFR-KF																						●				0.03~0.11	0.06~1.70	
			09T3005MFR-KF																										0.02~0.08	0.05~1.50	
			09T301MFR-KF																							●			0.03~0.11	0.06~1.70	
			09T302MFR-KF																							●			0.04~0.15	0.08~2.00	
			0602005MFL-KF																										0.01~0.06	0.04~1.30	
			060201MFL-KF																										0.02~0.08	0.05~1.50	
			060202MFL-KF																										0.03~0.11	0.06~1.70	
			09T3005MFL-KF																										0.02~0.08	0.05~1.50	
			09T301MFL-KF																								●		0.03~0.11	0.06~1.70	
			09T302MFL-KF																								●		0.04~0.15	0.08~2.00	
Medium to finishing (High precision)		CCET	0602005MFR-KM																									0.01~0.06	0.04~1.30		
			060201MFR-KM																							●		0.02~0.08	0.05~1.50		
			060202MFR-KM																						●			0.03~0.11	0.06~1.70		
			09T3005MFR-KM																									0.02~0.08	0.05~1.50		
			09T301MFR-KM																							●		0.03~0.11	0.06~1.70		
			09T302MFR-KM																							●		0.04~0.15	0.08~2.00		
			0602005MFL-KM																									0.01~0.06	0.04~1.30		
			060201MFL-KM																									0.02~0.08	0.05~1.50		
			060202MFL-KM																									0.03~0.11	0.06~1.70		
			09T3005MFL-KM																									0.02~0.08	0.05~1.50		
			09T301MFL-KM																								●	0.03~0.11	0.06~1.70		
			09T302MFL-KM																								●	0.04~0.15	0.08~2.00		

Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
SCACR/L	B123,177	SCLCR/L	B123,144,150,151,177



B Turning Insert (Positive)



Rhombic 80° Positive
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
06	6.35	2.38	2.8
09	9.525	3.97	4.4
12	12.7	4.76	5.5

Workpiece	Machining types											
	P	M	K	N	S	H						
Steel	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	P C5300	P C5400	P C8105	P C8110	P C8115	P C9030	H01	H05	fn (mm/rev)	ap (mm)		
Finishing 	CCGT	060202-C05																									0.06~0.11	0.06~1.70	
		060204-C05																										0.08~0.17	0.10~1.70
		09T304-C05																										0.11~0.23	0.10~2.00
		09T308-C05																										0.08~0.30	0.20~2.00
		120404-C05																										0.07~0.27	0.10~2.70
		120408-C05																										0.08~0.30	0.20~2.70
Finishing 	CCGT	060202-HFP																									0.03~0.06	0.06~1.20	
		060204-HFP																	●									0.05~0.12	0.10~1.20
		060208-HFP																										0.05~0.12	0.12~1.40
		09T302-HFP																										0.04~0.16	0.08~1.50
		09T304-HFP											●							●				●				0.06~0.18	0.10~1.50
		09T308-HFP																		●								0.08~0.25	0.20~1.50
		120404-HFP																										0.06~0.20	0.10~2.00
		120408-HFP																										0.10~0.25	0.20~2.00
Finishing 	CCGT	0602003R-KF																									0.01~0.06	0.04~1.30	
		060201R-KF																										0.02~0.08	0.05~1.50
		060202R-KF																						●				0.03~0.11	0.06~1.70
		09T3003R-KF																										0.02~0.08	0.05~1.50
		09T301R-KF																							●			0.03~0.11	0.06~1.70
		09T302R-KF																							●			0.04~0.15	0.08~2.00
		0602003L-KF																										0.01~0.06	0.04~1.30
		060201L-KF																										0.02~0.08	0.05~1.50
		060202L-KF																										0.03~0.11	0.06~1.70
		09T3003L-KF																										0.02~0.08	0.05~1.50
		09T301L-KF																										0.03~0.11	0.06~1.70
		09T302L-KF																										0.04~0.15	0.08~2.00
Finishing 	CCGT	060201-VP1																	●	●	●	●	●		●		0.05~0.06	0.06~1.00	
		060202-VP1																		●	●	●	●	●	●	●	●	0.03~0.10	0.08~1.50
		060204-VP1											●							●	●	●	●	●	●	●	●	0.05~0.12	0.10~1.50
		09T301-VP1																		●	●	●	●	●	●	●	●	0.03~0.13	0.06~1.00
		09T302-VP1																		●	●	●	●	●	●	●	●	0.04~0.15	0.08~1.50
		09T304-VP1																		●	●	●	●	●	●	●	●	0.06~0.20	0.10~1.50


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SCACR/L	B123,177	SCLCR/L	B123,144,151,177





Rhombic 80° Positive
Relief Angle : 7°



Size	Dimensions(mm)		
	d	t	d1
06	6.35	2.38	2.8
09	9.525	3.97	4.4
12	12.7	4.76	5.5

Workpiece	Material	Machining types																		
		● Continuous cutting ◐ General cutting ✖ Interrupted cutting																		
Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	M	●	●	●	●															
Cast iron	K	●	●	●	●															
Non-ferrous metal	N																			
Heat resistant alloy, Titanium alloy	S																			
Hardened steel	H																			

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition												
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)			
Finishing (High precision) 	CCGT	060201MFN-VP1																									0.03~0.06	0.06~1.00		
		060202MFN-VP1																										0.03~0.10	0.08~1.50	
		060204MFN-VP1																										0.05~0.12	0.10~1.50	
		09T301MFN-VP1																										0.03~0.13	0.06~1.00	
		09T302MFN-VP1																										0.04~0.15	0.08~1.50	
		09T304MFN-VP1																										0.06~0.20	0.10~1.50	
Medium to finishing 	CCGT	0602003R-KM																									0.01~0.06	0.04~1.30		
		060201R-KM																										0.02~0.08	0.05~1.50	
		060202R-KM																						●				0.03~0.11	0.06~1.70	
		09T3003R-KM																										0.02~0.08	0.06~1.50	
		09T301R-KM																										0.03~0.11	0.06~1.70	
		09T302R-KM																										0.04~0.15	0.08~2.00	
		0602003L-KM																										0.01~0.06	0.04~1.30	
		060201L-KM																											0.02~0.08	0.05~1.50
		060202L-KM																											0.03~0.11	0.06~1.70
		09T3003L-KM																											0.02~0.08	0.06~1.50
	09T301L-KM																											0.03~0.11	0.06~1.70	
	09T302L-KM																											0.04~0.15	0.08~2.00	
Finishing 	CCMT	060202-HFP																										0.03~0.06	0.08~1.20	
		060204-HFP																											0.05~0.12	0.10~1.20
		060208-HFP																											0.05~0.12	0.10~1.40
		09T302-HFP														●													0.04~0.16	0.08~1.50
		09T304-HFP													●														0.06~0.18	0.10~1.50
		09T308-HFP																											0.08~0.25	0.20~1.50
		120404-HFP																											0.07~0.22	0.10~2.00
		120408-HFP																											0.08~0.30	0.12~2.20
Finishing 	CCMT	060202-VF							●		●	●								●			●					0.05~0.20	0.30~1.00	
		060204-VF	●	●	●			●		●	●									●	●		●						0.10~0.25	0.30~1.00
		09T302-VF						●		●	●												●						0.04~0.16	0.80~1.50
		09T304-VF	●	●	●			●		●	●									●	●		●						0.05~0.20	0.30~1.50
		09T308-VF			●					●	●									●	●		●						0.10~0.25	0.30~1.50
		120404-VF						●		●	●									●			●						0.07~0.22	0.10~2.00


Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SCACR/L	B123,177	SCLCR/L	B123,144,151,177

B Turning Insert (Positive)

CC○○

Rhombic **80° Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
06	6.35	2.38	2.8
08	7.94	3.18	3.4
09	9.525	3.97	4.4
12	12.7	4.76	5.5

Workpiece	Material		Compatibility																Machining types						
	Symbol	Material	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	
Steel	P	Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	M	Stainless steel																							
Cast iron	K	Cast iron	●	●	●	●	●																		
Non-ferrous metal	N	Non-ferrous metal																							
Heat resistant alloy, Titanium alloy	S	Heat resistant alloy, Titanium alloy																							
Hardened steel	H	Hardened steel																							

● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)		
Finishing	VL	CCMT 060204-VL	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.04~0.10	0.08~0.90	
		CCMT 09T304-VL	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.10	0.10~1.00
		CCMT 09T308-VL	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.15	0.10~1.00
Medium to finishing	HMP	CCMT 060202-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.03~0.12	0.10~1.50	
		CCMT 060204-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.06~0.17	0.20~2.40
		CCMT 060208-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.23	0.40~2.40
		CCMT 09T302-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.07~0.22	0.10~2.00
		CCMT 09T304-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.23	0.30~3.00
		CCMT 09T308-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.30	0.50~3.00
		CCMT 120404-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.09~0.27	0.30~3.60
		CCMT 120408-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.24~0.36	1.00~3.60
CCMT 120412-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.14~0.43	0.70~3.60		
Medium to finishing	MP	CCMT 060202-MP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.04~0.12	0.20~1.50	
		CCMT 060204-MP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.15	0.30~1.50
		CCMT 09T302-MP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.07~0.15	0.30~2.00
		CCMT 09T304-MP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.25	0.50~2.50
		CCMT 09T308-MP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.30	0.50~2.50
Medium	C25	CCMT 060202-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.03~0.12	0.40~2.00	
		CCMT 060204-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.15	0.60~2.30
		CCMT 060208-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.07~0.20	0.80~2.30
		CCMT 080308-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.25	0.80~2.30
		CCMT 09T304-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.25	0.80~3.00
		CCMT 09T308-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.30	1.00~3.00
		CCMT 120404-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.32	0.80~3.00
		CCMT 120408-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.12~0.36	1.20~3.50
CCMT 120412-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.15~0.40	1.40~3.50		


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SCACR/L	B123,177	SCLCR/L	B123,144,151,177



CP

Rhombic 80° Positive
Relief Angle : 11°



Dimensions(mm)			
Size	d	t	d1
08	7.94	2.38	3.4
09	9.525	3.18	4.4

Workpiece	Machining types															
	P	M	K	N	S	H	1	2	3	4	5	6	7	8	9	10
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition												
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	HD1	HD5	fn (mm/rev)	ap (mm)			
Finishing	CPGT	080202	●																							0.06~0.20	0.10~2.00			
		080204	●	●																							0.08~0.20	0.30~2.00		
		080208																										0.10~0.25	0.50~2.00	
		090302																										0.04~0.20	0.30~1.50	
		090304	●	●																									0.06~0.25	0.50~2.00
		090308																											0.08~0.30	0.70~2.50
Finishing	CPGT	080204-C05																										0.02~0.15	0.50~1.70	
		080208-C05																										0.04~0.18	0.50~1.70	
		090304-C05																										0.03~0.20	0.70~2.00	
		090308-C05																										0.05~0.20	0.70~2.00	
Medium to finishing	CPGT	090308-HMP																										0.05~0.20	0.70~2.00	
Finishing	CPMT	080204-VF																										0.05~0.20	0.30~1.20	
		080208-VF																										0.10~0.25	0.30~1.20	
		090304-VF																										0.05~0.20	0.30~1.50	
		090308-VF																										0.10~0.25	0.30~1.50	


⚙️ Cutting edge geometry A38 ~ A43
 ⚙️ Recommended chip breaker B04 ~ B11
 ⚙️ Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SCLPRL	B144, B152		

B Turning Insert (Positive)





DC ○ ○ ○

 Rhombic **55° Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
07	6.35	2.38	2.8
11	9.525	3.97	4.4

Workpiece	Material	Machining types																
		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermert		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Finishing (High precision) 	DCET	0702005MFR-KF																									0.01~0.06	0.04~1.30
		070201MFR-KF																						●			0.02~0.08	0.05~1.50
		070202MFR-KF																						●			0.03~0.11	0.06~1.70
		11T3005MFR-KF																									0.02~0.08	0.05~1.50
		11T301MFR-KF																							●		0.03~0.11	0.06~1.70
		11T302MFR-KF																							●		0.04~0.15	0.08~2.00
		0702005MFL-KF																									0.01~0.06	0.04~1.30
		070201MFL-KF																							●		0.02~0.08	0.05~1.50
		070202MFL-KF																									0.03~0.11	0.06~1.70
		11T3005MFL-KF																									0.02~0.08	0.05~1.50
		11T301MFL-KF																									0.03~0.11	0.06~1.70
		11T302MFL-KF																									0.04~0.15	0.08~2.00
Medium to finishing (High precision) 	DCET	0702005MFR-KM																								0.01~0.06	0.04~1.30	
		070201MFR-KM																						●		0.02~0.08	0.05~1.50	
		070202MFR-KM																						●		0.03~0.11	0.06~1.70	
		11T3005MFR-KM																								0.02~0.08	0.05~1.50	
		11T301MFR-KM																							●		0.03~0.11	0.06~1.70
		11T302MFR-KM																							●		0.04~0.15	0.08~2.00
		0702005MFL-KM																									0.01~0.06	0.04~1.30
		070201MFL-KM																									0.02~0.08	0.05~1.50
		070202MFL-KM																									0.03~0.11	0.06~1.70
		11T3005MFL-KM																									0.02~0.08	0.05~1.50
		11T301MFL-KM																									0.03~0.11	0.06~1.70
		11T302MFL-KM																									0.04~0.15	0.08~2.00
Finishing 	DCGT	070202-C05																								0.06~0.11	0.06~1.50	
		070204-C05																								0.05~0.17	0.08~1.50	
		11T302-C05																								0.04~0.15	0.08~2.00	
		11T304-C05																								0.06~0.23	0.10~2.00	
		11T308-C05																								0.08~0.30	0.20~2.00	
Finishing 	DCGT	070202-HFP																							0.03~0.10	0.06~1.00		
		070204-HFP																								0.05~0.12	0.08~1.00	
		070208-HFP																								0.06~0.12	0.10~1.00	
		11T301-HFP																								0.03~0.13	0.06~1.00	
		11T302-HFP																								0.04~0.15	0.08~1.50	
		11T304-HFP																						●		0.06~0.20	0.10~1.50	
		11T308-HFP																						●		0.08~0.25	0.20~1.50	

 Cutting edge geometry A38 ~ A43  Recommended chip breaker B04 ~ B11  Code system B18 ~ B19 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
SDACR/L	B123	SDQCR/L	B145
SDJCR/L	B124, 177	SDUCR/L	B145
SDNCN	B124, 178	SDZCR/L	B146



DC ○ ○



Rhombic **55° Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
07	6.35	2.38	2.8
11	9.525	3.97	4.4

Workpiece		P M K N S H	Machining types																										
			● Continuous cutting ⊕ General cutting ✱ Interrupted cutting																										
Steel		P	●	⊕	✱	●	⊕	●	⊕	●	⊕	●	⊕	●	⊕	●	⊕	●	⊕	●	⊕	●	⊕	●	⊕	●	⊕		
Stainless steel		M	●	⊕	✱																								
Cast iron		K	●	⊕	✱	●	⊕															●	⊕	●	⊕	●	⊕		
Non-ferrous metal		N																				●	⊕	●	⊕	●	⊕		
Heat resistant alloy, Titanium alloy		S																					●	⊕	●	⊕	●	⊕	
Hardened steel		H																						●	⊕	●	⊕	●	⊕

Inserts	Designation	Cermet		Coated		Coated													Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)			
Finishing 	DCGT	0702003R-KF																									0.01~0.06	0.04~1.30		
		070201R-KF																										0.02~0.08	0.05~1.50	
		070202R-KF																										0.03~0.11	0.06~1.50	
		11T3003R-KF																										0.02~0.08	0.05~1.50	
		11T301R-KF																							●			0.03~0.11	0.06~1.70	
		11T302R-KF																							●			0.04~0.15	0.08~2.00	
		0702003L-KF																										0.01~0.06	0.04~1.30	
		070201L-KF																											0.02~0.08	0.05~1.50
		070202L-KF																											0.03~0.11	0.06~1.50
		11T3003L-KF																											0.02~0.08	0.05~1.50
		11T301L-KF																											0.03~0.11	0.06~1.70
	11T302L-KF																											0.04~0.15	0.08~2.00	
Finishing 	DCGT	070201-VP1															●	●	●	●	●			●		0.03~0.06	0.06~1.00			
		070202-VP1															●	●	●	●	●			●		0.03~0.10	0.08~1.50			
		070204-VP1								●							●	●	●	●	●			●		0.05~0.12	0.10~1.50			
		11T301-VP1															●	●	●	●	●				●		0.03~0.13	0.06~1.00		
		11T302-VP1															●	●	●	●	●			●		0.04~0.15	0.08~1.50			
		11T304-VP1															●	●	●	●	●			●		0.06~0.20	0.10~1.50			
Finishing (High precision) 	DCGT	070201MFN-VP1																			●					0.03~0.06	0.06~1.00			
		070202MFN-VP1																				●					0.03~0.10	0.08~1.50		
		070204MFN-VP1																				●					0.05~0.12	0.10~1.50		
		11T301MFN-VP1																				●					0.03~0.13	0.06~1.00		
		11T302MFN-VP1																				●					0.04~0.15	0.08~1.50		
		11T304MFN-VP1																				●					0.06~0.20	0.10~1.50		
Medium to finishing 	DCGT	0702003R-KM																									0.01~0.06	0.04~1.30		
		070201R-KM																										0.02~0.08	0.05~1.50	
		070202R-KM																										0.03~0.11	0.06~1.50	
		11T3003R-KM																										0.02~0.08	0.05~1.50	
		11T301R-KM																										0.03~0.11	0.06~1.70	
		11T302R-KM																										0.04~0.15	0.08~2.00	
		0702003L-KM																										0.01~0.06	0.04~1.30	
		070201L-KM																										0.02~0.08	0.05~1.50	
		070202L-KM																										0.03~0.11	0.06~1.50	
		11T3003L-KM																										0.02~0.08	0.05~1.50	
		11T301L-KM																										0.03~0.11	0.06~1.70	
	11T302L-KM																										0.04~0.15	0.08~2.00		

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
SDACR/L	B123	SDQCR/L	B145
SDJCR/L	B124, 177	SDUCR/L	B145
SDNCN	B124, 178	SDZCR/L	B146



B Turning Insert (Positive)

DC○○○

Rhombic 55° Positive
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
07	6.35	2.38	2.8
11	9.525	3.97	4.4

Workpiece	Material Group										Machining types		
	P	M	K	N	S	H					Continuous cutting	General cutting	
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermets		Coated		Coated										Uncoated		Cutting Condition													
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	P C5300	P C5400	P C8105	P C8110	P C8115	P C9030	H01	H05	fn (mm/rev)	ap (mm)				
Finishing	HFP	DCMT	070202-HFP	●	●									●														0.03~0.10	0.06~1.00		
			070204-HFP																										0.05~0.12	0.08~1.00	
			070208-HFP																											0.06~0.12	0.10~1.00
			11T301-HFP																											0.03~0.13	0.06~1.00
			11T302-HFP												●															0.04~0.15	0.08~1.50
			11T304-HFP																											0.06~0.20	0.10~1.50
			11T308-HFP																											0.08~0.25	0.20~1.50
Finishing	VL	DCMT	070204-VL	●	●	●		●			●								●	●	●	●	●	●	●	●	●	●	●	0.04~0.10	0.08~0.90
			11T304-VL	●	●	●	●	●	●	●	●	●															●		0.05~0.10	0.10~1.00	
			11T308-VL	●	●	●	●	●	●	●	●	●																		0.08~0.15	0.10~1.00
Finishing	VF	DCMT	070202-VF			●		●		●																			0.03~0.10	0.06~1.00	
			070204-VF		●	●		●		●						●													0.05~0.20	0.30~1.20	
			11T302-VF	●				●		●		●																		0.04~0.15	0.08~1.50
			11T304-VF	●	●	●				●							●													0.05~0.20	0.30~1.50
			11T308-VF	●		●															●										0.10~0.25
Medium to finishing	HMP	DCMT	070202-HMP	●	●			●		●																			0.03~0.12	0.10~1.50	
			070204-HMP	●	●	●		●		●		●					●												0.06~0.17	0.20~2.30	
			070208-HMP					●		●		●																		0.08~0.23	0.40~2.30
			11T302-HMP							●		●												●	●				0.04~0.22	0.10~2.00	
			11T304-HMP	●	●	●		●		●		●					●													0.08~0.23	0.30~3.00
			11T308-HMP	●	●	●		●		●		●					●													0.10~0.30	0.50~3.00
Medium	MP	DCMT	070202-MP	●	●	●	●	●		●		●																	0.04~0.12	0.12~1.80	
			070204-MP	●	●	●	●	●		●		●																		0.05~0.15	0.30~1.80
			070208-MP	●	●	●	●	●		●		●																		0.08~0.22	0.30~1.80
			11T302-MP	●	●	●	●	●		●		●																		0.04~0.15	0.30~2.00
			11T304-MP	●	●	●	●	●		●		●																		0.08~0.20	0.50~2.30
			11T308-MP	●	●	●	●	●		●		●																		0.10~0.30	0.50~2.30
Medium	C25	DCMT	070202-C25	●	●	●	●	●		●		●																	0.03~0.15	0.30~2.00	
			070204-C25	●	●	●	●	●		●		●																		0.05~0.20	0.50~2.50
			070208-C25	●	●	●	●	●		●		●																		0.06~0.25	0.80~2.50
			11T302-C25	●	●	●	●	●		●		●																		0.04~0.25	0.50~2.50
			11T304-C25	●	●	●	●	●		●		●																		0.08~0.30	0.80~3.00
			11T308-C25	●	●	●	●	●		●		●																		0.10~0.30	1.00~3.00


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SDACR/L	B123	SDQCR/L	B145
SDJCR/L	B124, 177	SDUCR/L	B145
SDNCN	B124, 178	SDZCR/L	B146



RC

Round **R° Positive** Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
10	10.0	3.18	3.6
12	12.0	4.76	4.2
16	16.0	6.35	5.2
20	20.0	6.35	6.5
25	25.0	7.94	7.25
32	32.0	9.52	9.55

Workpiece		Material	Machining types																								
			● Continuous cutting ● General cutting ✱ Interrupted cutting																								
Steel	P		●	●	✱	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	M																										
Cast iron	K		●	●	✱																						
Non-ferrous metal	N																										
Heat resistant alloy, Titanium alloy	S																										
Hardened steel	H																										


Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Medium	RCMX								●	●																	0.25~0.50	1.50~4.00
		1003M0							●	●																	0.30~0.60	2.50~5.00
		1204M0							●	●								●									0.40~0.70	3.00~7.00
		1606M0									●	●						●									0.48~0.90	3.50~9.00
		2006M0											●					●									0.55~1.20	4.00~12.00
		2507M0												●													0.65~1.50	5.00~15.00
	3209M0											●																

A Cutting edge geometry A38 ~ A43
 B Recommended chip breaker B04 ~ B11
 C Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
PRDCN	B107	PRGCR/L	B107

SC

Square **90° Positive** Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.97	4.4
12	12.7	4.76	5.5

Workpiece		Material	Machining types																								
			● Continuous cutting ● General cutting ✱ Interrupted cutting																								
Steel	P		●	●	✱	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	M																										
Cast iron	K		●	●	✱																						
Non-ferrous metal	N																										
Heat resistant alloy, Titanium alloy	S																										
Hardened steel	H																										

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)	
Finishing	SCGT																										0.11~0.23	0.10~2.00
		09T304-C05																									0.08~0.30	0.20~2.00
		120408-C05																									0.08~0.33	0.20~2.00

A Cutting edge geometry A38 ~ A43
 B Recommended chip breaker B04 ~ B11
 C Code system B18 ~ B19
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
SSBCR/L	B125	SSKCR/L	B126,173
SSDCN	B125	SSSCR/L	B126,173



B Turning Insert (Positive)

SC ○ ○

 Square **90° Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
06	6.35	2.38	2.8
09	9.525	3.97	4.4
12	12.7	4.76	5.5

Workpiece	Material Groups												Machining types			
	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel	P	M	K	N	S	H	Continuous cutting	General cutting	Interrupted cutting	
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermets		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)	
Finishing	HFP	SCGT	09T304-HFP		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.25	0.10~1.50
		SCMT	09T304-HFP		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.25
Finishing	VF	SCMT	09T304-VF		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.20	0.30~1.50
Finishing	VL	SCMT	09T304-VL		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.10	0.10~1.00
		SCMT	09T308-VL		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.15	0.10~1.00
Medium to finishing	HMP	SCMT	09T304-HMP		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.23	0.30~3.00
		SCMT	09T308-HMP		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.30	0.50~3.00
		SCMT	120404-HMP		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.09~0.27	0.30~3.60
		SCMT	120408-HMP		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.12~0.36	0.60~3.60
Medium to finishing	MP	SCMT	09T304-MP		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.25	0.30~2.80
		SCMT	09T308-MP		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.30	0.50~2.80
		SCMT	120408-MP		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.15~0.35	0.80~3.50
Medium	C25	SCMT	060204-C25		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.25	0.40~2.50
		SCMT	09T304-C25		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.25	0.60~3.00
		SCMT	09T308-C25		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.30	1.00~3.00
		SCMT	120404-C25		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.30	0.80~3.80
		SCMT	120408-C25		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.12~0.38	1.20~3.80


 Cutting edge geometry A38 ~ A43
  Recommended chip breaker B04 ~ B11
  Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SSBCR/L	B125	SSKCR/L	B126, 173
SSDCN	B125	SSSCR/L	B126, 173



SP


Square 90° Positive
 Relief Angle : 11°



Dimensions(mm)			
Size	d	t	d1
06	6.35	2.38	2.8
07	7.94	2.38	-
09	9.525	3.18	3.4
12	12.7	4.76	-
15	15.875	4.76	-
19	19.05	4.76	-

Workpiece	Machining types															
	P	M	K	N	S	H	1	2	3	4	5	6	7	8	9	10
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated														Uncoated		Cutting Condition						
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	HO1	HO5	fn (mm/rev)	ap (mm)	
Medium to finishing	SPGA 060204																									0.50~0.25	0.50~2.00	
	090308T	●	●																								0.10~0.25	0.70~3.00
	090308T-Z (Z=Special Nega land)	●																									0.10~0.25	0.70~3.00
Medium to finishing	SPGN 070202																										0.03~0.10	0.50~2.00
	070208																										0.10~0.25	0.70~3.00
	090302																										0.03~0.10	0.50~3.00
	090304																										0.08~0.20	0.70~3.50
	090308																										0.10~0.25	0.70~3.50
	120302																										0.03~0.20	0.50~3.00
	120304																										0.08~0.20	1.00~5.00
	120308										●																0.10~0.25	1.00~5.00
	120312																										0.15~0.30	1.00~5.00
	120316																										0.18~0.33	1.00~5.00
	120402																										0.03~0.20	0.50~3.00
	120404																										0.08~0.20	1.00~5.00
	120408																										0.10~0.25	1.00~5.00
	120412																										0.15~0.30	1.00~5.00
	120416																										0.18~0.33	1.00~5.00
	120430																										0.20~0.60	2.00~5.00
	120440																										0.25~0.70	3.00~5.00
	150404																										0.08~0.20	1.50~7.00
	150408																										0.10~0.25	1.50~7.00
	150412																										0.15~0.30	1.50~7.00
	150416																										0.18~0.33	1.50~7.00
	150420																										0.20~0.45	1.50~7.00
190404																										0.08~0.20	1.50~9.00	
190408																										0.10~0.25	1.50~9.00	
190412																										0.15~0.45	1.50~9.00	
190416																										0.18~0.60	1.50~9.00	
190424																										0.25~0.70	2.50~9.00	
Finishing	SPGR 090304-F																										0.05~0.20	0.30~2.00
	120304-F																										0.10~0.25	0.50~2.00

 Cutting edge geometry A38 ~ A43
  Recommended chip breaker B04 ~ B11
  Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
CSDPN	B114	SSKCR/L	B146
CSKPR/L	B115		




B Turning Insert (Positive)

SP ○○



Square **90° Positive**
Relief Angle : 11°



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.18	3.4~4.4
12	12.7	3.18	-
15	15.875	4.76	-
19	19.05	4.76	-
25	25.4	6.35	-

Workpiece	Machining types																								
	P	M	K	N	S	H	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermets		Coated		Coated											Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)		
Medium 	SPGR	090308-M																									0.10~0.40	1.00~3.50	
		120308-M																										0.20~0.40	1.50~4.00
Finishing 	SPGT	090304-C05	●																								0.11~0.23	0.10~2.00	
		090308-C05																										0.08~0.30	0.20~2.00
Medium to finishing 	SPGT	090304R																									0.08~0.23	0.30~3.00	
		090308R																										0.10~0.30	0.50~3.00
		090304L	●																									0.08~0.23	0.30~3.00
		090308L	●																									0.10~0.30	0.50~3.00
Finishing 	SPMT	090304-VF																									0.05~0.20	0.30~1.50	
		090308-VF																										0.10~0.25	0.30~1.50
Finishing 	SPMR	090304-F																									0.05~0.20	0.30~2.00	
		120304-F								●	●																0.10~0.25	0.50~2.00	
Medium 	SPMR	090308-M								●	●																0.10~0.40	1.00~3.50	
		120308-M								●	●																0.10~0.40	1.50~4.00	
		120312-M									●																0.20~0.40	1.50~4.00	
Medium to finishing 	SPUN	120304																									0.10~0.30	1.00~5.00	
		120308								●																	0.15~0.40	1.00~5.00	
		150412																									0.20~0.50	1.00~5.00	
		190412																									0.20~0.50	1.50~7.00	
		190416																									0.25~0.60	2.00~7.00	
		250620																									0.30~0.80	3.00~10.0	
		120308SN																									0.15~0.40	1.00~5.00	


Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
CSDPN	B114	SSKPR/L	B146
CSKPR/L	B115		



TB ○○

Dimensions(mm)			
Size	d	t	d1
06	3.97	1.59	2.16



Triangular 60° Positive
Relief Angle : 5°

Workpiece	Machining types															
	P	M	K	N	S	H	●	●	●	●	●	●	●	●	●	●
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


Inserts	Designation	Cermert		Coated		Coated										Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)
Finishing	TBGT	060102L	●																					●	●	0.05~0.20	0.10~1.30
		060104L	●																								0.08~0.20

🔄 Cutting edge geometry A38 ~ A43
🔄 Recommended chip breaker B04 ~ B11
🔄 Code system B18 ~ B19
● : Stock item

Available tool holders			
Designation	Page	Designation	Page
STUBR	B148		

TC ○○

Dimensions(mm)			
Size	d	t	d1
09	5.56	2.38	2.5
11	6.35	2.38	2.8



Triangular 60° Positive
Relief Angle : 7°

Workpiece	Machining types															
	P	M	K	N	S	H	●	●	●	●	●	●	●	●	●	●
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermert		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Finishing	TCGT	090204-C05																								0.05~0.19	0.10~1.70	
		110204-C05																									0.08~0.22	0.10~1.70
		110208-C05																									0.28~0.20	0.10~1.70

🔄 Cutting edge geometry A38 ~ A43
🔄 Recommended chip breaker B04 ~ B11
🔄 Code system B18 ~ B19
● : Stock item


Available tool holders			
Designation	Page	Designation	Page
STACR/L	B126,178	STTCR/L	B127,174
STFCR/L	B126,173	STWCR/L	B174
STGCR/L	B127		



TC ○○



Triangular 60° Positive
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
09	5.56	2.38	2.5
11	6.35	2.38	2.8
16	9.523	3.97	4.4

Workpiece	Machining types																						
	P	M	K	N	S	H	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermets		Coated												Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)	
Medium	C25	TCMT 090204-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.06~0.18	0.40~2.50	
		TCMT 090208-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.25	0.80~2.50	
		TCMT 110202-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.04~0.12	0.40~2.00	
		TCMT 110204-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.06~0.20	0.60~2.50
		TCMT 110208-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.25	0.80~2.50
		TCMT 16T304-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.28	0.80~3.00
		TCMT 16T308-C25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.30	1.00~3.00


Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
STACR/L	B126,178	STTCR/L	B127,174
STFCR/L	B126,173	STWCR/L	B174
STGCR/L	B127		

TO ○○



Triangular 60° Positive
Relief Angle : 8°



Dimensions(mm)			
Size	d	t	d1
06	3.97	1.59	2.15
09	5.56	2.38	2.8
14	8.2	3.0	3.8

Workpiece	Machining types																								
	P	M	K	N	S	H	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermets		Coated												Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Medium to finishing	TOEH	TOEH 060102L																								0.05~0.17	0.10~1.50	
		TOEH 090204L																									0.05~0.20	0.30~2.50
		TOEH 140304L	●																								0.05~0.25	0.30~2.50


Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
 ● : Stock item



B Turning Insert (Positive)

TP ○○

 Triangular **60° Positive**
Relief Angle : 11°



Dimensions(mm)			
Size	d	t	d1
08	4.76	2.38	2.3
09	5.56	2.38	-
11	6.35	2.38~3.18	3.4
16	9.525	3.18~4.76	4.4
22	12.7	4.76	-
27	15.875	4.76~6.35	-

Workpiece	Machining types											
	P	M	K	N	S	H	●	●	●	●	●	●
Steel	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Finishing	TPGH	080202L	●																							0.01~0.12	0.06~1.70	
		080204L	●	●																							0.01~0.15	0.08~1.70
		110202L																									0.01~0.12	0.06~2.00
		110204L																									0.01~0.15	0.08~2.00
Medium to finishing	TPGN	090204																								0.07~0.20	0.70~2.00	
		110302																								0.05~0.15	0.50~2.00	
		110304									●													●		0.07~0.20	0.70~3.00	
		110308									●													●		0.10~0.25	1.00~3.00	
		160302																								0.05~0.18	1.00~5.00	
		160304									●	●												●		0.07~0.20	1.00~5.00	
		160308									●	●												●		0.10~0.25	1.00~5.00	
		160310																									0.10~0.25	1.00~5.00
		160312											●														0.15~0.30	1.00~5.00
		160316											●														0.15~0.30	1.00~5.00
		160404																									0.07~0.20	1.00~5.00
		220404											●														0.07~0.20	1.50~7.00
		220408											●														0.10~0.25	1.50~7.00
		220412											●														0.15~0.30	1.50~7.00
		220430																									0.30~0.45	1.50~7.00
220440																									0.30~0.50	1.50~7.00		
270408																									0.15~0.25	3.00~8.00		
270608																									0.15~0.25	3.00~8.00		
Finishing	TPGR	110302-F																								0.05~0.15	0.10~1.50	
		110304-F																								0.05~0.20	0.30~1.50	
		160304-F																								0.08~0.25	0.50~2.00	
Medium	TPGR	110308-M																								0.13~0.30	1.00~3.00	
		160308-M																								0.13~0.30	1.00~5.00	

 Cutting edge geometry A38 ~ A43
  Recommended chip breaker B04 ~ B11
  Code system B18 ~ B19
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
STFPR/L	B147	STUPR/L	B150
CTFPR/L	B115	CTGPR/L	B115



TP



Triangular 60° Positive
Relief Angle : 11°



Dimensions(mm)			
Size	d	t	d1
08	4.76	2.38	2.3
09	5.56	2.38	3.0
11	6.35	3.18	3.4
16	9.525	3.18~4.76	4.4

Workpiece	Machining types															
	P	M	K	N	S	H	1	2	3	4	5	6	7	8	9	10
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermert		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)		
Finishing	C05	TPGT 110304-C05	●																								0.05~0.30	0.50~2.00	
		160404-C05																										0.05~0.30	0.80~2.00
Finishing	HFP	TPGT 110304-HFP																									0.05~0.25	0.30~1.50	
		160308-HFP																									0.05~0.25	0.30~1.50	
Medium to finishing	C05	TPGT 080202R																									0.05~0.20	0.30~1.50	
		110302R																									0.05~0.20	0.30~1.50	
		110304R	●																								0.05~0.20	0.50~2.00	
		110308R																									0.07~0.25	0.50~2.00	
		160404R	●																								0.05~0.20	0.70~3.00	
		160408R																									0.05~0.20	0.70~3.00	
		080202L	●																					●	●	0.05~0.20	0.30~1.50		
		110302L																									0.05~0.20	0.30~1.50	
		110304L	●	●																								0.05~0.20	0.50~2.00
		110308L																										0.07~0.25	0.50~2.00
160404L	●																									0.05~0.20	0.70~3.00		
160408L																										0.05~0.20	0.70~3.00		
Medium to finishing	C05	TPGX 090202L																									0.10~0.20	0.30~1.00	
		090204L		●																							0.10~0.25	0.50~1.00	
		090208L																									0.10~0.30	1.00~1.00	
		110304L																									0.10~0.25	0.50~1.20	
Finishing	F	TPMR 090202-F																									0.05~0.15	0.10~1.00	
		090204-F																									0.05~0.15	0.10~1.00	
		110302-F																									0.05~0.15	0.10~1.50	
		110304-F					●	●	●	●	●						●								●		0.05~0.20	0.30~1.50	
		110308-F																									0.05~0.25	0.30~1.50	
		160304-F					●	●	●	●	●	●													●	●	0.08~0.25	0.50~2.00	
		160308-F																									0.08~0.25	0.50~3.00	


🔄 Cutting edge geometry A38 ~ A43
 🔄 Recommended chip breaker B04 ~ B11
 🔄 Code system B18 ~ B19
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
STFPR/L	B147	STUPR/L	B150
CTFPR/L	B115	CTGPR/L	B115



B Turning Insert (Positive)

TP ○○

 Triangular **60° Positive**
Relief Angle : 11°



Dimensions(mm)			
Size	d	t	d1
09	5.56	3.18	-
11	6.35	3.18	3.4
16	9.525	3.18~4.76	4.4
22	12.7	4.76	-
33	19.05	6.35	-

Workpiece	Machining types											
	P	M	K	N	S	H						
Steel	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
● General cutting
● Interrupted cutting


Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)	
Medium M	TPMR	110304-M																									0.10~0.25	0.70~3.00
		110308-M					●		●		●																0.13~0.30	1.00~3.00
		160304-M										●															0.10~0.25	1.00~5.00
		160308-M							●	●		●		●													0.13~0.30	1.00~5.00
		160312-M										●															0.15~0.35	1.00~5.00
		220408-M								●																	0.13~0.30	1.50~7.00
Medium to finishing	TPUN	090308																									0.10~0.30	0.50~2.00
		110208																									0.15~0.40	1.00~3.00
		110304																									0.10~0.30	1.00~3.00
		110308																									0.15~0.40	1.00~3.00
		160304									●	●															0.10~0.30	1.00~5.00
		160308									●	●															0.15~0.40	1.00~5.00
		160312										●															0.20~0.50	1.50~5.00
		220404																									0.10~0.30	1.50~7.00
		220408									●	●															0.15~0.40	1.50~7.00
		220412																									0.20~0.50	1.50~7.00
		330620																									0.30~0.70	3.00~10.00
		160308TN																									0.15~0.40	1.00~5.00
		160312TN																									0.20~0.50	1.50~5.00
	220412TN																									0.20~0.50	1.50~7.00	
Finishing VL	TPMT	110304-VL	●		●																						0.05~0.15	0.10~1.30
Finishing VF	TPMT	110304-VF		●				●	●	●	●		●					●			●						0.05~0.20	0.30~1.50
		110308-VF						●	●	●	●		●					●			●						0.10~0.25	0.30~1.50
		160404-VF																									0.05~0.20	0.30~2.00
		160408-VF																									0.10~0.25	0.30~2.00
Medium to finishing MP	TPMT	110304-MP	●		●	●	●											●	●								0.05~0.20	0.20~1.50

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
STFPR/L	B147	STUPR/L	B150
CTFPR/L	B115	CTGPR/L	B115



VB



Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.8
16	9.525	4.76	4.4

Rhombic 35° Positive
Relief Angle : 5°

Workpiece	Machining types															
	P	M	K	N	S	H										
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
● General cutting
● Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)
Finishing 	VBGT 110301-HFP																									0.07~0.20	0.50~1.50
	160408-HFP																										0.15~0.25
Finishing 	VBGT 1103003R-KF																									0.01~0.06	0.04~1.30
	110301R-KF																									0.02~0.08	0.05~1.50
	110302R-KF																						●			0.03~0.13	0.06~1.70
	1103003L-KF																									0.01~0.06	0.04~1.30
	110301L-KF																									0.02~0.08	0.05~1.50
	110302L-KF																									0.03~0.13	0.06~1.70
Medium to finishing 	VBGT 160404																									0.07~0.20	0.50~1.50
	160408																									0.15~0.25	0.70~2.00
Medium to finishing 	VBGT 1103003R-KM																									0.01~0.06	0.04~1.30
	110301R-KM																									0.02~0.08	0.05~1.50
	110302R-KM																									0.03~0.13	0.06~1.70
	1103003L-KM																									0.01~0.06	0.04~1.30
	110301L-KM																									0.02~0.08	0.05~1.50
	110302L-KM																									0.03~0.13	0.06~1.70
Finishing 	VBMT 160404-MP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.20	0.30~2.00
	160408-MP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.25	0.50~2.30
	160412-MP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.35	0.50~2.30


⤷ Cutting edge geometry **A38 ~ A43**
 ⤷ Recommended chip breaker **B04 ~ B11**
 ⤷ Code system **B18 ~ B19**
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SVABR/L	B127	SVVBN	B129
SVHBR/L	B128	SVQBR/L	B148
SVJBR/L	B128,178	SVUBR/L	B149



B Turning Insert (Positive)

VB ○○



Dimensions(mm)			
Size	d	t	d1
11	6.35	2.38~3.18	2.8~3.4
16	9.525	4.76	4.4

 Rhombic **35° Positive**
Relief Angle : 5°

Workpiece	Material				Workability															Machining types					
	P	M	K	N	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15		16	17	18	19	20
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	<ul style="list-style-type: none"> ● Continuous cutting ● General cutting ✦ Interrupted cutting
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

	Inserts	Designation	Cermet		Coated		Coated												Uncoated		Cutting Condition							
			CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	P C5300	P C5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)
Finishing	VB	VBMT 160404-VB	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.08~0.20	0.2~1.5
		VBMT 160408-VB	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.23
Finishing	VF	VBMT 160404-VF	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.20	0.30~1.00
		VBMT 160408-VF	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.25	0.30~1.00
Finishing (Mild steel)	VL	VBMT 160404-VL	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.20	0.30~1.50
		VBMT 160408-VL	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.20	0.30~1.50
		VBMT 160412-VL	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.10~0.25	0.30~1.50
Medium to finishing		VBMT 160404	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.07~0.20	0.50~1.50
		VBMT 160408	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.15~0.25	0.70~2.00
Medium to finishing	HMP	VBMT 110204-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.03~0.20	0.15~2.50
		VBMT 110208-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.03~0.25	0.15~2.50
		VBMT 110304-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.03~0.20	0.15~2.70
		VBMT 110308-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.05~0.25	0.40~2.70
		VBMT 160404-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.07~0.20	0.20~2.70
		VBMT 160408-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.09~0.27	0.50~2.70
		VBMT 160412-HMP	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.11~0.32	0.50~2.70	

Cutting edge geometry A38 ~ A43

Recommended chip breaker B04 ~ B11

Code system B18 ~ B19


● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SVABR/L	B127	SVVBN	B129
SVHBR/L	B128	SVQBR/L	B148
SVJBR/L	B128,178	SVUBR/L	B149









VC ○○

 Rhombic **35° Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.8~3.4
16	9.525	4.76	4.4

Workpiece	Steel	P	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●																Machining types	
	Stainless steel	M	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●																● Continuous cutting	
	Cast iron	K	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●																● General cutting	
	Non-ferrous metal	N	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●																● Interrupted cutting	
	Heat resistant alloy, Titanium alloy	S	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●																	
	Hardened steel	H	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●																	

Inserts	Designation	Cermet		Coated		Coated													Uncoated		Cutting Condition							
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	PC9030	H01	H05	fn (mm/rev)	ap (mm)	
Finishing (High precision) 	VCET	1103005MFR-KF																									0.01~0.06	0.04~1.30
			110301MFR-KF																	●							0.02~0.08	0.05~1.50
			110302MFR-KF																		●						0.03~0.11	0.06~1.70
			1103005MFL-KF																								0.01~0.06	0.04~1.30
			110301MFL-KF																								0.02~0.08	0.05~1.50
			110302MFL-KF																								0.03~0.11	0.06~1.70
Medium to finishing (High precision) 	VCET	1103005MFR-KM																								0.02~0.08	0.05~1.50	
			110301MFR-KM																		●					0.03~0.11	0.06~1.70	
			110302MFR-KM																		●					0.04~0.15	0.08~2.00	
			1103005MFL-KM																							0.02~0.08	0.05~1.50	
			110301MFL-KM																							0.03~0.11	0.06~1.70	
			110302MFL-KM																							0.04~0.15	0.08~2.00	
Finishing 	VCGT	110302-HFP																								0.02~0.18	0.10~1.00	
			110304-HFP																							0.03~0.18	0.15~1.20	
			110308-HFP																							0.04~0.23	0.20~1.20	
			160404-HFP						●	●											●					0.04~0.20	0.15~1.50	
			160408-HFP						●	●											●					0.05~0.25	0.20~1.50	
Finishing 	VCGT	110301-VP1																		●	●	●	●	●	●	0.02~0.15	0.05~0.50	
			110302-VP1																		●	●	●	●	●	0.02~0.18	0.10~1.00	
			110304-VP1							●											●	●	●	●	●	0.03~0.18	0.15~1.20	
Finishing (High precision) 	VCGT	110301MFN-VP1																					●			0.02~0.15	0.05~0.50	
			110302MFN-VP1																				●			0.02~0.18	0.10~1.00	
			110304MFN-VP1																				●			0.03~0.18	0.15~1.20	
Finishing 	VCGT	1103003R-KF																								0.01~0.06	0.04~1.30	
			110301R-KF																							0.02~0.08	0.05~1.50	
			110302R-KF																				●			0.03~0.13	0.06~1.70	
			1103003L-KF																							0.01~0.06	0.04~1.30	
			110301L-KF																							0.02~0.08	0.05~1.50	
			110302L-KF																							0.03~0.13	0.06~1.70	


Cutting edge geometry A38 ~ A43 Recommended chip breaker B04 ~ B11 Code system B18 ~ B19 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SVJCR/L	B128, 148, 178	SVQCR/L	B148
SVVCN	B129	SVUCR/L	B144

B Turning Insert (Positive)

VC ○ ○

 Rhombic **35° Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
08	4.76	2.38	2.3
11	6.35	3.18	2.8~3.4
16	9.525	4.76	4.4

Workpiece	Machining types											
	P	M	K	N	S	H						
Steel	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
● General cutting
● Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition												
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)			
Finishing	KM	VCMT	1103003R-KM																								0.01~0.06	0.04~1.30		
			110301R-KM																									0.02~0.08	0.05~1.50	
			110302R-KM																					●				0.03~0.13	0.06~1.70	
			1103003L-KM																									0.01~0.06	0.04~1.30	
			110301L-KM																										0.02~0.08	0.05~1.50
			110302L-KM																										0.03~0.13	0.06~1.70
Finishing (High precision)	VP1	VCGX	120300MFR-VP1																								0.02~0.10	0.05~0.50		
			120301MFR-VP1																									0.02~0.15	0.05~0.50	
			120302MFR-VP1																									0.02~0.18	0.10~1.00	
Finishing	HFP	VCMT	110302-HFP																								0.02~0.18	0.10~1.00		
			110304-HFP																									0.03~0.18	0.15~1.20	
			110308-HFP																									0.04~0.23	0.20~1.20	
			160404-HFP																									0.04~0.20	0.15~1.50	
			160408-HFP																										0.05~0.25	0.20~1.50
Finishing	VF	VCMT	080202-VF					●																			0.05~0.20	0.30~1.00		
			080204-VF										●														0.10~0.25	0.30~1.00		
			110304-VF					●		●	●																0.03~0.18	0.15~1.20		
			160404-VF		●			●		●	●		●										●				0.04~0.20	0.15~1.50		
Finishing (Mild steel)	VL	VCMT	160404-VL					●	●		●										●	●				0.05~0.20	0.30~1.50			
			160408-VL					●	●		●	●										●	●				0.05~0.20	0.30~1.50		
			160412-VL																									0.10~0.25	0.30~1.50	
Medium to finishing	HMP	VCMT	160404-HMP					●	●	●	●	●									●	●				0.10~0.25	0.30~2.60			
			160408-HMP							●	●	●	●									●	●				0.13~0.33	0.60~2.60		
Medium to finishing	MP	VCMT	160404-MP					●		●											●	●				0.08~0.18	0.30~2.00			
			160408-MP					●		●												●	●				0.10~0.23	0.50~2.30		
			160412-MP																				●	●				0.10~0.33	0.50~2.30	


 Cutting edge geometry A38 ~ A43
  Recommended chip breaker B04 ~ B11
  Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SVJCR/L	B128,148,178	SVQCR/L	B148
SVVCN	B129	SVUCR/L	B144



VP ○○





Dimensions(mm)			
Size	d	t	d1
08	6.35	2.38	2.3
11	6.35	3.18	2.8



Triangular 60° Positive
Relief Angle : 11°

Workpiece	Machining types															
	P	M	K	N	S	H										
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ✦ Interrupted cutting

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition											
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)		
Finishing (High precision) 	VPET	0802005MFR-KF																									0.01~0.12	0.05~0.50	
		080201MFR-KF																					●				0.02~0.15	0.05~0.50	
		080202MFR-KF																					●				0.02~0.18	0.10~1.00	
		0802005MFL-KF																										0.01~0.12	0.05~0.50
		080201MFL-KF																										0.02~0.15	0.05~0.50
		080202MFL-KF																										0.02~0.18	0.10~1.00
Medium to finishing (High precision) 	VPET	0802005MFR-KM																									0.01~0.12	0.05~0.50	
		080201MFR-KM																					●				0.02~0.15	0.05~0.50	
		080202MFR-KM																					●				0.02~0.18	0.10~1.00	
		0802005MFL-KM																										0.01~0.12	0.05~0.50
		080201MFL-KM																										0.02~0.15	0.05~0.50
		080202MFL-KM																										0.02~0.18	0.10~1.00
Finishing 	VPGT	110301-VP1																		●	●	●	●	●			0.02~0.15	0.05~0.50	
		110302-VP1																		●	●	●	●	●			0.02~0.18	0.10~1.00	
		110304-VP1																		●	●	●	●	●			0.03~0.18	0.15~1.20	
Finishing (High precision) 	VPGT	110301MFN-VP1																				●					0.02~0.15	0.05~0.50	
		110302MFN-VP1																					●				0.02~0.18	0.10~1.00	
		110304MFN-VP1																					●				0.03~0.18	0.15~1.20	

↻ Cutting edge geometry A38 ~ A43
 ↻ Recommended chip breaker B04 ~ B11
 ↻ Code system B18 ~ B19
 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
SVABR/L	B127	SVVBN	B128
SVJBR/L	B128, 178		

B Turning Insert (Positive)

WB○○○



Trigon 80° Positive
Relief Angle : 5°



Dimensions(mm)			
Size	d	t	d1
02	3.97	1.59	2.2
S3	4.76	2.38	2.4

Workpiece	Machining types											
	P	M	K	N	S	H						
Steel	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition										
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC9030	H01	H05	fn (mm/rev)	ap (mm)	
Medium to finishing	WBGT 020102R																									0.01~0.05	0.10~0.30	
	S30204R																										0.01~0.10	0.10~0.50
	020102L			●																			●	●		0.01~0.08	0.10~0.40	
	S30202L			●																						0.01~0.08	0.10~0.40	
	S30204L																										0.01~0.10	0.10~0.50


➔ Cutting edge geometry A38 ~ A43 ➔ Recommended chip breaker B04 ~ B11 ➔ Code system B18 ~ B19 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SWUBR/L	B150		

WC○○○



Trigon 80° Positive
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
08	12.7	4.76	5.5

Workpiece	Machining types											
	P	M	K	N	S	H						
Steel	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermet		Coated		Coated										Uncoated		Cutting Condition									
		CN1500	CN2000	CN2500	CC1500	CC2500	NC3010	NC3215	NC3120	NC3220	NC3225	NC3030	NC5330	NC9020	NC9025	NC6205	NC6210	NC6215	PC5300	PC5400	PC8105	PC8110	PC8115	H01	H05	fn (mm/rev)	ap (mm)
Medium to finishing	WCGT 080408-C05																									0.08~0.30	0.20~2.70

➔ Cutting edge geometry A38 ~ A43 ➔ Recommended chip breaker B04 ~ B11 ➔ Code system B18 ~ B19 ● : Stock item


Available tool holders			
Designation	Page	Designation	Page
SWACR/L	B129	SWLCR/L	B149



Technical Information for Aluminum


▶ AK special chip breaker for aluminum

- ▶ Unique and 3-dimensional rake angle controls chip breaking and chip flow ensuring longer tool life and reducing cutting load
- ▶ High rake angle at cutting edge part reduces cutting load to increase tool life.
- ▶ Buffed finish on top face controls chip flow reducing built-up edge

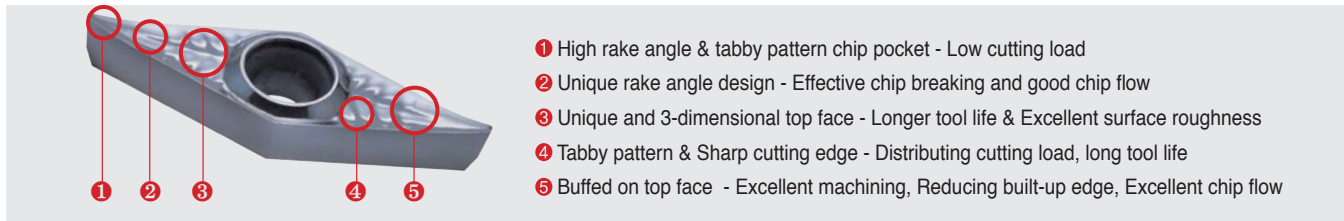


▶ AR special chip breaker for aluminum


- ▶ AR chip breaker ensures reliability and good cutting performance at high feed, speed and interrupted machining

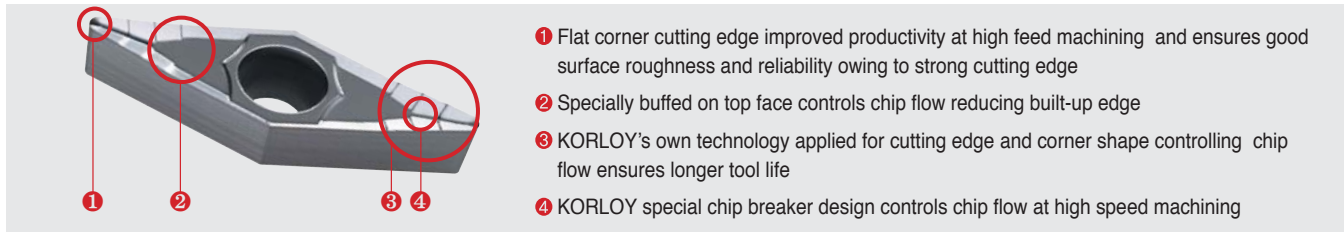

▶ AK and AR chip breaker specially developed for aluminum

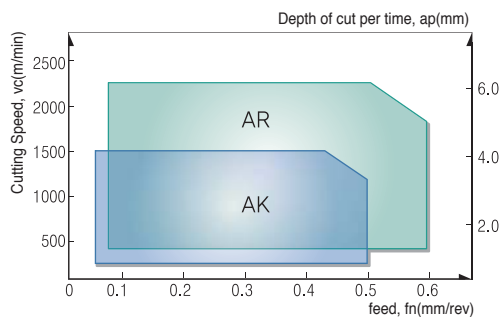

	Recommendation range	Grades
AK	$a_p=0.1\sim5.0$ mm $f_n=0.03\sim0.5$ mm/rev	H01(Uncoated cemented carbides K10~K20) ND1000(Diamond coating)
AR	$a_p=0.5\sim6.0$ mm $f_n=0.05\sim0.6$ mm/rev	H01(Uncoated cemented carbides K10~K20) ND1000(Diamond coating) PD1000(DLC coating)

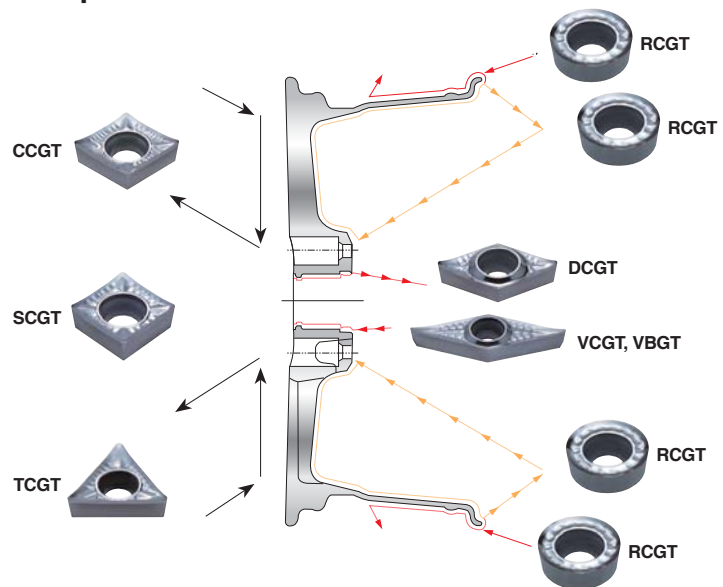

▶ Features of H01 and cutting conditions


- Useful for aluminum and alloyed steel machining
- Buffed on top face reduced built-up edge
- 3-dimensional design reduced cutting load and shows good performance at high feed and speed machining

Workpiece		Hardness(HB)	kc(MPa)	vc(m/min)	f_n (mm/rev)
Aluminum alloy (forged)	before heat treatment	50 ~ 70	500 ~ 600	1000 ~ 2500	0.1 ~ 0.6
	after heat treatment	90 ~ 110	700 ~ 900	300 ~ 1000	0.1 ~ 0.5
Aluminum alloy (cast)	before heat treatment	70 ~ 80	700 ~ 800	300 ~ 1000	0.1 ~ 0.6
	after heat treatment	80 ~ 100	800 ~ 950	200 ~ 600	0.1 ~ 0.4
Copper alloy	-	90 ~ 110	700	250 ~ 600	0.1 ~ 0.5
Non-ferrous metal, etc	-	100	1700	150 ~ 300	0.1 ~ 0.6

B Aluminum Insert (Positive)



CC ○ ○

 Rhombic **80° Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
06	6.35	2.38	2.8
09	9.525	3.97	4.4
12	12.7	4.76	5.5

Workpiece	Steel	P					Machining types
	Stainless steel	M					
Cast iron	K						● Continuous cutting
Non-ferrous metal	N	⊕	⊕	●	⊕	⊕	● General cutting
Heat resistant alloy, Titanium alloy	S						⊕ Interrupted cutting
Hardened steel	H						

Inserts	Designation	Coated			Uncoated		Cutting Condition	
		PC5040	PC130	PD1000	H01	H10	fn (mm/rev)	ap (mm)
AK 	CCGT 060202-AK	●			●		0.01~0.12	0.05~3.00
	060204-AK	●			●		0.02~0.15	0.10~3.00
	060208-AK				●		0.02~0.20	0.10~4.00
	09T302-AK	●			●		0.02~0.20	0.05~3.00
	09T304-AK	●	●		●		0.02~0.30	0.10~5.00
	09T308-AK	●			●		0.03~0.50	0.10~5.00
	120402-AK				●		0.02~0.30	0.05~4.00
	120404-AK	●	●		●	●	0.03~0.50	0.10~5.00
	120408-AK				●		0.04~0.80	0.10~5.50
AR 	CCGT 060202-AR				●		0.02~0.30	0.30~4.00
	060204-AR						0.03~0.35	0.50~4.50
	060208-AR						0.04~0.50	0.50~4.50
	09T302-AR						0.03~0.45	0.30~4.00
	09T304-AR				●		0.04~0.50	0.50~4.50
	09T308-AR				●		0.05~0.60	0.50~6.00
	120402-AR				●		0.04~0.50	0.30~5.00
	120404-AR				●	●	0.05~0.60	0.50~6.00
	120408-AR				●		0.06~0.65	0.50~6.00
120412-AR						0.08~0.70	0.50~6.50	


 Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SCACR/L	B123, 177	SCLCR/L	B133, 144, 177




DC ○ ○

 Rhombic **55° Positive**
Relief Angle : 7°

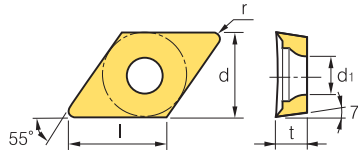


Dimensions(mm)			
Size	d	t	d1
07	6.35	2.38	2.8
11	9.525	3.97	4.4

Workpiece	Steel	P						Machining types
	Stainless steel	M						
Cast iron	K							
Non-ferrous metal	N	✦	✦	●	✦	✦		
Heat resistant alloy, Titanium alloy	S							
Hardened steel	H							

Inserts	Designation	Coated			Uncoated		Cutting Condition	
		PC5040	PC130	PD1000	H01	H10	fn (mm/rev)	ap (mm)
AK 	DCGT	070202-AK	●			●	0.01~0.20	0.05~3.00
		070204-AK	●	●		●	0.02~0.30	0.10~4.00
		070208-AK	●			●	0.03~0.40	0.10~4.00
		11T302-AK	●			●	0.02~0.30	0.05~4.00
		11T304-AK	●	●	●	●	0.03~0.50	0.10~5.00
		11T308-AK	●			●	0.03~0.50	0.10~5.00
		11T312-AK				●	0.04~0.60	0.15~5.00
AR 	DCGT	070202-AR				●	0.02~0.30	0.30~4.00
		070204-AR				●	0.03~0.40	0.50~5.00
		070208-AR				●	0.04~0.50	0.50~5.00
		11T302-AR					0.03~0.45	0.30~6.00
		11T304-AR				●	0.04~0.50	0.50~6.00
		11T308-AR				●	0.05~0.60	0.50~6.00
		11T312-AR				●	0.08~0.65	0.50~6.50

 Cutting edge geometry **A38 ~ A43**

 Recommended chip breaker **B04 ~ B11**

 Code system **B18 ~ B19**

● : Stock item


Available tool holders			
Designation	Page	Designation	Page
SDACR/L	B123	SDQCR/L	B145
SDJCR/L	B124,177	SDUCR/L	B145
SDNCN	B124,178	SDZCR/L	B146



B Aluminum Insert (Positive)



RC ○○

Round **Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
06	6.0	2.38	2.8
08	8.0	3.18	3.35
10	10.0	3.18~3.97	4.4
12	12.0	4.76	4.4

Workpiece	Steel	P					Machining types
	Stainless steel	M					
Cast iron	K						● Continuous cutting
Non-ferrous metal	N	⚡	⚡	●	⚡	⚡	● General cutting
Heat resistant alloy, Titanium alloy	S						⚡ Interrupted cutting
Hardened steel	H						

Inserts	Designation	Coated			Uncoated		Cutting Condition	
		PC5040	PC130	PD1000	H01	H10	fn (mm/rev)	ap (mm)
AK 	RCGT 0602M0-AK						0.05~0.20	0.50~2.00
	0803M0-AK						0.05~0.25	0.50~2.50
	1003M0-AK				●		0.10~0.30	1.00~3.00
	10T3M0-AK						0.10~0.30	1.00~3.00
	1204M0-AK						0.10~0.35	1.00~3.50
AR 	RCGT 0602M0-AR						0.05~0.20	0.50~2.00
	0803M0-AR						0.05~0.25	0.50~2.50
	1003M0-AR				●		0.10~0.30	1.00~3.00
	10T3M0-AR						0.10~0.30	1.00~3.00
	1204M0-AR						0.10~0.35	1.00~3.50


 Cutting edge geometry A38 ~ A43
  Recommended chip breaker B04 ~ B11
  Code system B18 ~ B19
 ● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SRDCN	B124	SRGCR/L	B125





SC ○ ○

 Square **90° Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
09	9.525	3.97	4.4
12	12.7	4.76	5.5

Workpiece	Steel	P					Machining types
	Stainless steel	M					
Cast iron	K						<ul style="list-style-type: none"> ● Continuous cutting ● General cutting ✦ Interrupted cutting
Non-ferrous metal	N	✦	✦	●	✦	✦	
Heat resistant alloy, Titanium alloy	S						
Hardened steel	H						

Inserts	Designation	Coated			Uncoated		Cutting Condition	
		PC5040	PC130	PD1000	H01	H10	fn (mm/rev)	ap (mm)
AK 	SCGT	09T302-AK	●				0.02~0.30	0.10~4.00
		09T304-AK	●			●	0.04~0.40	0.10~5.00
		09T308-AK				●	0.03~0.40	0.10~5.00
		120404-AK				●	0.03~0.50	0.10~5.00
		120408-AK				●	0.04~0.60	0.15~5.50
		120416-AK					0.04~0.60	0.15~5.50
AR 	SCGT	09T302-AR					0.03~0.40	0.50~5.00
		09T304-AR				●	0.04~0.50	0.50~6.00
		09T308-AR					0.04~0.50	0.50~6.50
		120404-AR				●	0.05~0.60	0.50~6.50
		120408-AR					0.05~0.60	0.50~7.00
		120416-AR					0.05~0.60	0.50~7.00

 Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
● : Stock item

Available tool holders			
Designation	Page	Designation	Page
SSBCR/L	B125	SSKCR/L	B126
SSDCN	B125	SSSCR/L	B126




B Aluminum Insert (Positive)

TC ○○



Triangular **60° Positive**
Relief Angle : 7°



Dimensions(mm)			
Size	d	t	d1
09	5.56	2.38	2.5
11	6.35	2.38	2.8
16	9.525	3.97	4.4

Workpiece	Steel	P					Machining types
	Stainless steel	M					
Cast iron	K						● General cutting
Non-ferrous metal	N	✱	✱	●	✱	✱	✱ Interrupted cutting
Heat resistant alloy, Titanium alloy	S						
Hardened steel	H						

Inserts	Designation	Coated			Uncoated		Cutting Condition	
		PC5040	PC130	PD1000	H01	H10	fn (mm/rev)	ap (mm)
AK 	TCGT	090202-AK					0.01~0.12	0.05~3.00
		090204-AK				●	0.02~0.15	0.10~4.00
		110202-AK	●				0.02~0.20	0.05~4.00
		110204-AK	●			●	0.03~0.30	0.10~4.00
		110208-AK					0.03~0.40	0.10~5.00
		16T302-AK				●	0.02~0.30	0.05~5.00
		16T304-AK		●		●	0.03~0.40	0.10~5.50
		16T308-AK				●	0.03~0.50	0.10~5.50
		16T312-AK					0.04~0.60	0.15~5.50
		16T316-AK					0.05~0.80	0.15~5.50
		16T325-AK					0.06~0.90	0.20~7.00
AR 	TCGT	090202-AR					0.02~0.18	0.30~3.00
		090204-AR				●	0.02~0.25	0.30~5.00
		110202-AR					0.02~0.30	0.30~4.00
		110204-AR				●	0.03~0.40	0.30~5.00
		110208-AR					0.04~0.45	0.50~6.00
		16T302-AR				●	0.03~0.45	0.30~5.00
		16T304-AR				●	0.04~0.50	0.50~6.00
		16T308-AR				●	0.05~0.60	0.50~6.00
		16T312-AR					0.06~0.65	0.50~6.00
		16T316-AR					0.08~0.70	0.50~6.50
		16T325-AR					0.10~0.10	0.80~7.00


Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
● : Stock item

Available tool holders			
Designation	Page	Designation	Page
STACR/L	B126,178	STTCR/L	B127,174
STFCR/L	B126,173	STWCR/L	B174
STGCR/L	B127		





VB ○○

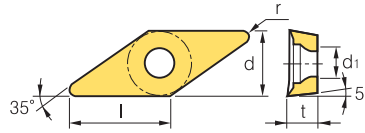 Rhombic **35° Positive**
Relief Angle : 5°



Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.8
16	9.525	4.76	4.4

Workpiece	Steel	P					Machining types
	Stainless steel	M					
Cast iron	K						● Continuous cutting
Non-ferrous metal	N	●	●	●	●	●	● General cutting
Heat resistant alloy, Titanium alloy	S						✱ Interrupted cutting
Hardened steel	H						

Inserts	Designation	Coated			Uncoated		Cutting Condition	
		PC205K	PC8110	PD1000	H01	H10	fn (mm/rev)	ap (mm)
AK 	VBGT 110302-AK				●		0.02~0.15	0.05~3.00
	110304-AK				●		0.02~0.15	0.10~4.00
	110308-AK						0.03~0.18	0.10~5.00
	160402-AK						0.03~0.30	0.05~4.00
	160404-AK				●		0.03~0.40	0.10~5.00
	160408-AK				●		0.03~0.50	0.10~5.00
	160412-AK						0.05~0.60	0.10~5.50
AR 	VBGT 110302-AR						0.02~0.35	0.30~3.00
	110304-AR						0.03~0.45	0.30~4.00
	110308-AR						0.03~0.50	0.50~6.00
	160402-AR						0.04~0.45	0.30~5.00
	160404-AR				●		0.04~0.50	0.50~6.00
	160408-AR				●		0.05~0.60	0.50~6.00
	160412-AR						0.05~0.70	0.50~6.50

 Cutting edge geometry **A38 ~ A43**
 Recommended chip breaker **B04 ~ B11**
 Code system **B18 ~ B19**
● : Stock item


Available tool holders			
Designation	Page	Designation	Page
SVABR/L	B127	SVVBN	B129
SVHBR/L	B128	SVQBR/L	B148
SVJBR/L	B128,178	SVUBR/L	B149



B Aluminum Insert (Positive)

VC ○○

Rhombic **35° Positive**
Relief Angle : 7°

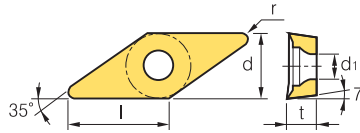

Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.8
13	7.94	3.18	3.4
16	9.525	4.76	4.4
22	12.7	5.56	5.6

Workpiece	Steel	P					Machining types
	Stainless steel	M					
Cast iron	K						● General cutting
Non-ferrous metal	N	✳	✳	●	✳	✳	✳ Interrupted cutting
Heat resistant alloy, Titanium alloy	S						
Hardened steel	H						

Inserts	Designation	Coated			Uncoated		Cutting Condition	
		PC5040	PC130	PD1000	H01	H10	fn (mm/rev)	ap (mm)
AK 	VCGT 110301-AK						0.02~0.15	0.05~3.00
	110302-AK	●			●		0.02~0.20	0.05~3.00
	110304-AK	●			●		0.02~0.25	0.10~4.00
	110308-AK						0.03~0.30	0.10~5.00
	130302-AK	●					0.02~0.35	0.10~5.00
	130304-AK	●			●		0.03~0.35	0.10~5.00
	130308-AK						0.04~0.40	0.10~5.00
	160402-AK				●		0.02~0.30	0.05~5.00
	160404-AK			●	●		0.03~0.40	0.10~5.00
	160408-AK				●		0.03~0.50	0.10~5.00
	160412-AK						0.03~0.50	0.10~5.00
	220516-AK						0.03~0.60	0.10~7.00
	220525-AK						0.05~0.70	0.10~7.00
220530-AK					●	0.08~1.00	0.10~7.00	
AR 	VCGT 110301-AR						0.02~0.20	0.10~3.00
	110302-AR				●		0.02~0.25	0.30~3.00
	110304-AR				●		0.03~0.35	0.30~4.00
	110308-AR						0.04~0.45	0.50~6.00
	130302-AR						0.02~0.40	0.50~3.00
	130304-AR				●		0.03~0.45	0.50~4.00
	130308-AR						0.04~0.50	0.50~5.00
	160402-AR				●		0.03~0.40	0.30~5.00
	160404-AR				●		0.04~0.50	0.50~6.00
	160408-AR				●		0.05~0.60	0.50~6.00
	160412-AR						0.06~0.65	0.50~6.50
	220516-AR						0.10~0.65	0.80~6.50
	220525-AR						0.10~0.70	0.80~7.00
220530-AR					●	0.12~0.75	1.00~7.00	

Cutting edge geometry A38 ~ A43
 Recommended chip breaker B04 ~ B11
 Code system B18 ~ B19
 ● : Stock item






Available tool holders			
Designation	Page	Designation	Page
SVJCR/L	B128,148,178	SVQCR/L	B148
SVVCN	B129	SVUCR/L	B144



cBN

Multi-Corner Type (Negative)

Dimensions(mm)			
Size	d	t	d1
12	12.7	4.76	5.16
15	12.7	4.76-6.358	3.4
16	9.525	4.76	3.81

Inserts	Designation	Uncoated										Available tool holders			
		DNC250	DNC350	DNC400	DB1000	DB2000	DBN400	DBN250	DBN300	DBN700A	DBNX20	Designation		Page	
 CN ○○ 80° Nega	2NU-CNGA	120404	●	●		●	●				●	DCBNR/L	DCLNR/L	B 99	B 99
		120404F	●				●					MCKNR/	MCLNR/L	B116	B116
		120404T	●			●	●					MCMNN	PCBNR/L	B116	B104
		120404W	●									PCLNR/L		B105	
		120404WF	●												
		120408	●	●		●	●					●			
		120408F	●				●								
		120408T	●			●	●								
		120408W	●	●		●	●					●			
		120408WF	●				●								
		120408WT	●			●	●								
		120412	●	●											
		120412F	●												
		120412T	●												
		120412W	●			●	●					●			
		120412WF	●				●								
		120412WT				●	●								
	T-2NU-CNGA	120408	●												
	2NU-CNMA	120404							●						
		120408							●						
 DN ○○ 55° Nega	2NS-CNGA	120408			●			●							
	2NU-DNGA	150404	●	●		●	●		●		●	DDJNR/L	MDJNR/L	B 100	B 117
		150404F	●				●					MDNNN	MDQNR/L	B117	B118
		150404T	●			●	●					MDUNR/L	PDJNR/L	B142	B105
		150408	●	●		●	●		●		●	PDNNR/L	PDSNR/L	B106	B138
		150408F	●				●					PDUNR/L		B139	
		150408T	●			●	●								
		150412	●	●											
		150412F	●												
		150412T	●												
		150608													
	T-2NU-DNGA	150412	●												
 SN ○○ 90° Nega	4NU-SNGA	120404	●			●	●				DSBnr/L	MSBnr/L	B100	B118	
		120404F					●					MSDNN	MSKnr/L	B118	B119
		120404T				●	●					MSRnr/L	MSSnr/L	B119	B120
		120408	●			●	●					PSBnr/L	PSDNN	B108	B108
		120408F					●					PSKnr/L		B109	
		120408T				●	●								
		120412													
	2NS-SNGA	120408			●			●							
 TN ○○ 60° Nega	3NU-TNGA	160404	●	●		●	●		●	●	MTENN	MTFnr/L	B120	B120	
		160404F	●				●					MTGnr/	MTJnr/L	B121	B121
		160404T	●			●	●					PTFnr/L	PTGnr/L	B110	B110
		160408	●	●		●	●					PTTnr/L	WTENN	B111	B112
		160408F	●				●					WTJnr/L	WTXnr/L	B112	B112
		160408T	●			●	●								
		160412		●											
	2NS-TNGA	160408			●			●							
 VN ○○ 35° Nega	2NU-VNGA	160404	●	●		●	●		●	●	MVJnr/L		B121		
		160404F	●				●					MVQnr/L		B122	
		160404T	●			●	●					MVUNr/L		B143	
		160408	●	●		●	●		●	●		MVVNN		B122	
		160408F	●				●								
		160408T	●			●	●								
		160412		●											
	2NS-VNGA	160408			●			●							






● : Stock item



cBN

Multi-Corner Type (Positive)

Dimensions(mm)			
Size	d	t	d1
06	6.35	2.38	2.8
07	6.35	2.38	2.8
09	9.525	3.97	4.4
11	9.525	3.97	4.4






Inserts	Designation	Uncoated										Available tool holders	
		DNC250	DNC350	DNC400	DB1000	DB2000	DBN400	DBN250	DBN300	DBN700A	DBN20	Designation	Page
 	2NU-CCGW	060202	●									SCACR/L	B123
		060202F	●									SCLCR/L	B123
		060202T	●										
		060204	●			●	●						
		060204F	●				●						
		060204T	●			●	●						
		060208				●	●						
		060208F					●						
		060208T				●	●						
		09T304	●	●		●	●		●		●		
		09T304F	●				●						
		09T304T	●			●	●						
		09T308	●	●		●	●		●		●		
		09T308F	●				●						
		09T308T	●			●	●						
		09T308W	●										
		09T308WF	●										
		 	2NU-DCGW	070204				●	●				SDACR/L
070204F							●				SDJCR/L	B124	
070204T						●	●				SDNCN	B145	
070208						●	●				SDQCR/L	B145	
070208F							●				SDUCR/L	B146	
070208T						●	●				SDZCR/L		
11T304	●			●		●	●		●		●		
11T304F	●						●						
11T304T	●					●	●						
11T308	●			●		●	●		●		●		
11T308F	●						●						
11T308T	●					●	●						
	T-2NU-DCGW	11T304	●										
 	3NU-TCGW	090204	●								STACR/L	B126	
		090204F	●								STFCR/L	B126	
		090204T	●								STGCR/L	B127	
											STTCR/L	B127	



cBN

Multi-Corner Type (Positive)

Dimensions(mm)			
Size	d	t	d1
11	6.35	3.18	2.4
16	9.525	4.76	3.81

Inserts	Designation	Uncoated										Available tool holders	
		DNC250	DNC350	DNC400	DB1000	DB2000	DBN400	DBN250	DBN300	DBN700A	DBNX20	Designation	Page
 <p>TP 60° Posi</p>	3NU-TPGB	110304	●					●				CTFPR/L CTGPR/L	B115 B115
		110304F	●										
		110304T	●										
		110308	●					●					
		110308F	●										
		110308T	●										
 <p>TP 60° Posi</p>	3NU-TPGN	110304			●	●					CTFPR/L CTGPR/L	B115 B141 B115	
		110304F					●						
		110304T				●	●						
		110308				●	●						
		110308F					●						
		110308T				●	●						
		160304	●	●									
		160308	●	●									
 <p>TP 60° Posi</p>	3NU-TPGW	110304	●	●		●	●			●			
		110304F	●				●						
		110304T	●			●	●						
		110308	●	●		●	●			●			
		110308F	●				●						
		110308T	●			●	●						
 <p>VB 35° Posi</p>	2NU-VBGW	160404	●	●		●	●		●	●	SVABR/L SVHBR/L SVJBR/L SVQBR/L SVUBR/L	B127 B128 B128 B148 B149	
		160404F	●				●						
		160404T	●			●	●						
		160408	●	●		●	●		●	●			
		160408F	●				●						
		160408T	●			●	●						
		 <p>VC 35° Posi</p>	2NU-VCGW	160404	●	●		●	●				
160404F	●						●						
160404T	●					●	●						
160408	●			●		●	●			●			
160408F	●						●						
160408T	●					●	●						

● : Stock item












cBN

Regrinding Type (Negative / Positive)

Size	Dimensions(mm)		
	d	t	d1
09	9.525	3.97	4.4
11	6.35~9.525	3.8~3.97	3.4~4.4
12	12.7	4.76	5.16

Size	Dimensions(mm)		
	d	t	d1
15	12.7	4.76	5.16
16	9.525	4.76	3.81~4.4

Inserts	Designation		Uncoated										Available tool holders			
			DNC250	DNC350	DNC400	DB1000	DB2000	DBN400	DBN250	DBN300	DBN700A	DBNX20	Designation		Page	
 CNMA	120404							●				DCBNR/L	MCKNR/L	B99	B116	
	120408							●			●	DCLNR/L	MCLNR/L	B100	B116	
	120408							●				PCBNR/L	MCMNN	B104	B116	
												PCLNR/L		B105		
 DNMA	150404							●				DDJNR/L	MDJNR/L	B100	B117	
	150408							●	●			MDNNN	MDQNR/L	B117	B118	
												MDUNR/L	PDJNR/L	B142	B105	
												PDNNR/L	PDSNR/L	B106	B137	
												PDUNR/L		B139		
 SNMA	120404							●				DSBNR/L	MSBNR/L	B100	B118	
	120408							●				MSDNN	MSKNR/L	B118	B119	
												MSRNR/L	MSSNR/L	B119	B120	
												PSBNR/L	PSDNN	B108	B108	
												PSKNR/L		B109		
 TNMA	160404							●				MTENNS	MTFNR/L	B120	B120	
	160408							●				MTGNR/L	MTJNR/L	B121	B121	
												PTFNR/L	PTGNR/L	B110	B110	
												PTTNR/L	WTENN	B111	B112	
												WTJNR/L	WTXNR/L	B112	B112	
 VNMA	160404							●				MVJNR/L		B121		
	160408							●				MVQNR/L		B122		
	160404							●				MVUNR/L		B143		
												MVVNN		B122		
 CCMW (CCMW)	09T304							●				SCACR/L		B123		
												SCLCR/L		B123		
 DCGW	11T308							●				SDACR/L		B123		
	11T308							●				SDJCR/L		B124		
												SDNCN/L		B124		
 TPGB	110304							●	●			CTFPR/L		B115	B141	
	110308							●				CTGPR/L		B115		
 VBMA	160404							●				SVABR/L		B127		
	160408							●				SVHBR/L		B128		
												SVJBR/L		B128		
												SVQBR/L		B148		
												SVUBR/L		B149		








● : Stock item



PCD

Insert (Negative / Positive)

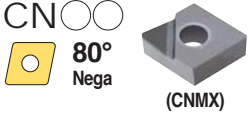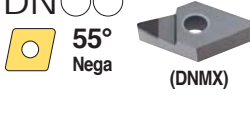Dimensions(mm)				Dimensions(mm)			
Size	d	t	d1	Size	d	t	d1
06	6.35	2.38	2.8	11	9.525	3.97	4.4
07	6.35	2.38	2.8	12	12.7	4.76	5.16
08	7.94	2.38	3.4	15	12.7	4.76	5.16
09	9.525	3.18	4.4	16	9.525	4.76	3.81

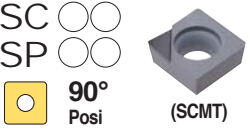Inserts	Designation	Grades			Available tool holders				
		DP90	DP150	DP200	Designation		Page		
 <p>CNMM 80° Nega (CNMX)</p>	CNMM	120404	●		DCBNR/L	DCLNR/L	B 99	B 99	
		120408	●		MCKNR/L	MCLNR/L	B116	B116	
		120412			MCMNN	PCBNR/L	B116	B104	
	CNMX	120404			PCLNR/L		B105		
		120408							
		120412							
 <p>DNMM 55° Nega (DNMX)</p>	DNMM	150404	●		DDJNR/L	MDJNR/L	B100	B117	
		150408	●		MDNNN	MDQNR/L	B116	B118	
		150412			MDUNR/L	PDJNR/L	B142	B105	
	DNMX	150404			PDNNR/L	PDSNR/L	B106	B138	
		150408			PDUNR/L		B139		
		150412							
 <p>TNMX 60° Nega</p>	TNMX	160404			MTENNS	MTFNR/L	B120	B120	
		160408			MTGNR/L	MTJNR/L	B121	B121	
		160412			PTFNR/L	PTGNR/L	B110	B110	
					PTTNR/L	WTENN	B111	B112	
				WTJNR/L	WTXNR/L	B112	B112		
 <p>VNMX 35° Nega</p>	VNMX	160404			MVJNR/L		B121		
		160408			MVQNR/L		B122		
		160412			MVUNR/L		B143		
					MVVNN		B122		
 <p>CCMT 80° Posi</p>	CCMT	060202	●		SCACR/L		B123		
		060204	●		SCLCR/L		B123		
		060208							
		09T304		●					
		09T308		●					
		09T312							
	CPMT	080204							
		080208							
		080212							
		090304							
		090308							
		090312							
	 <p>DCMT 55° Posi</p>	DCMT	070202	●		SDACR/L		B123	
			070204	●		SDJCR/L		B124	
		070208			SDNCN		B145		
		11T302			SDQCR/L		B145		
		11T304		●	SDUCR/L		B146		
		11T308		●	SDZCR/L				
 <p>SCMT 90° Posi</p>	SCMT	09T304			SSBCR/L		B125		
		09T308			SSDCN		B125		
		09T312			SSKCR/L		B126		
	SPGW	090302			SSSCR/L		B126		
		090304							
		090308							


● : Stock item




PCD Insert (Positive)

Dimensions(mm)			
Size	d	t	d1
06	3.97	1.59	2.8
08	4.76	2.38	2.4
09	5.56~9.525	2.38~3.18	2.55

Dimensions(mm)			
Size	d	t	d1
11	9.525	3.97	4.4
12	6.35	2.38~3.18	2.8~3.4
16	12.7	3.18	4.4

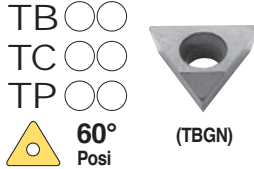
Inserts	Designation	Grades			Available tool holders					
		DP90	DP150	DP200	Designation	Page				
 <p>TB ○○ TC ○○ TP ○○ 60° Posi (TBGN)</p>	TBGW	060102 060104				STUBR/L	B150			
	TCMT	090201 090202 090204 110201 110202 110204				STACR/L STFCR/L STFPR/L STGCR/L STTCR/L	B126 B126 B154 B127 B127			
	TPGB	080204 080208 090204 090208 110304 110308		●						
		TPGW	080202 080204 090204 090208 110302 110304 110308 160404 160408	●						
			TPGT	110302 110304				STFPR/L STUPR/L	B147 B150	
				VBMT	110302 110304 110308 160402 160404 160408 160412		●		SVABR/L SVHBR/L SVJBR/L SVQBR/L SVUBR/L	B127 B128 B128 B148 B149
			VCMT		110302 110304 110308 160404 160408 160412		●		SVJCR SVVCN	B128 B129
					TPGN	090204 090208 110302 110304 110308 160302 160304 160308		●		CTFPR/L CTGPR/L
	SPGN					090304 090308 120304 120308		●		CSDPN CSKPR/L



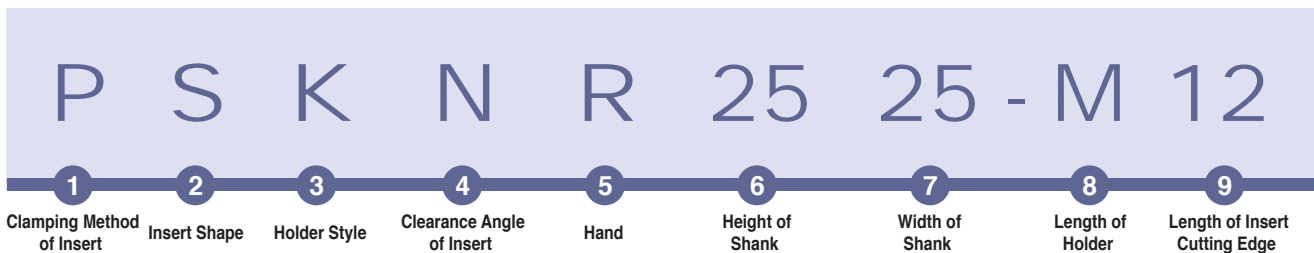


1 Clamping Method of Insert

P S K N R 25 25 - M 12




Top clamping without hole

C




Top and hole clamping (Multi clamp, pin and clamp)

D




Top and hole clamping (Multi clamp, pin and clamp)

M




Hole clamping (Pin lock)

P



Screw on

S




Top and hole clamping (Wedge clamp, pin and clamp)


W

2 Insert Shape


P S K N R 25 25 - M 12




C




D




E




K




L




R




S



T




V




W

3 Holder Style


P S K N R 25 25 - M 12




B




D




E




F




G




J




K




L




N




R




S



T




V




Y

4 Clearance Angle of Insert


P S K N R 25 25 - M 12




B




C




D




E



F




N




P

5 Hand


P S K N R 25 25 - M 12



L




N



R

6 Height of Shank


P S K N R 25 25 - M 12

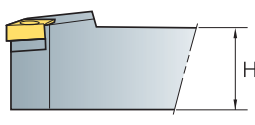

H

7 Width of Shank


P S K N R 25 25 - M 12



W

8 Length of Holder


P S K N R 25 25 - M 12

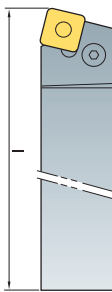


A - 32	H - 100	Q - 180	X-Special Item
B - 40	J - 110	R - 200	
C - 50	K - 125	S - 250	
D - 60	L - 140	T - 300	
E - 70	M - 150	U - 350	
F - 80	N - 160	V - 400	
G - 90	P - 170	W - 450	

9 Length of Insert Cutting Edge


P S K N R 25 25 - M 12




A,B,K




C,D,E,M,V




H




L




O




P




R



S



T



W



Double Clamp System

Cutting Shape										
Designation	DCBNR/L	DCKNR/L	DCLNR/L	DDJNR/L	DSBNR/L	DSDNN	DSKNR/L	DSSNR/L	DTFNR/L	DTGNR/L
Approach angle	75°	75°	95°	93°	75°	45°	75°	45°	90°	90°
Page	B99	B99	B99	B100	B100	B101	B101	B101	B102	B102
Turning	●		●	●	●	●		●		●
Copying				●						
Facing		●	●				●	●	●	
Chamfering						●				
Back turning			●	●						

Cutting Shape										
Designation	DVJNR/L	DVVNN	DWLNR							
Approach angle	93°	72.5°	95°							
Page	B102	B103	B103							
Turning	●	●	●							
Copying	●	●								
Facing			●							
Chamfering										
Back turning	●		●							

Lever Lock System

Cutting Shape										
Designation	PCBNR/L	PCKNR/L	PCLNR/L	PDJNR/L	PDNNR/L	PRDCN	PRGCR/L	PSBNR/L	PSDNN	PSKNR/L
Approach angle	75°	75°	95°	93°	62.5°	-	-	75°	45°	75°
Page	B104	B104	B105	B105, B106	B106	B107	B107	B108	B108	B109
Turning	●	●	●	●	●	●	●	●	●	
Copying				●	●	●	●			
Facing			●							●
Chamfering										
Back turning			●	●						

Cutting Shape										
Designation	PSSNR/L	PTFNR/L	PTGNR/L	PTTNR/L	PWLNR/L					
Approach angle	45°	90°	90°	60°	95°					
Page	B109	B110	B110	B111	B111					
Turning	●		●	●	●					
Copying										
Facing	●	●			●					
Chamfering				●						
Back turning					●					



Wedge Clamp System

Cutting Shape										
Designation	WTENN	WTJNR/L	WTXNR/L	WWLNR/L						
Approach angle	60°	93°	105°	95°						
Page	B112	B112	B112	B113						
Turning	●	●	●	●						
Copying	●	●	●							
Facing				●						
Chamfering										
Back turning		●	●	●						

Clamp on System

Cutting Shape										
Designation	CKJNR/L	CKNNR/L	CSDPN	CSKPR/L	CTFPR/L	CTGPR/L				
Approach angle	93°	62.5°	45°	75°	90°	90°				
Page	B114	B114	B114	B115	B115	B115				
Turning	●	●	●			●				
Copying	●	●								
Facing				●	●					
Chamfering										
Back turning	●									

Multi Lock System

Cutting Shape										
Designation	MCKNR/L	MCLNR/L	MCMNN	MCRNR/L	MDJNR/L	MDNNN	MDQNR/L	MSBNR/L	MSDNN	MSKNR/L
Approach angle	75°	95°	50°	75°	93°	62.5°	107.5°	75°	45°	75°
Page	B116	B116	B116	B117	B117	B117	B118	B118	B118	B119
Turning		●	●	●	●	●	●	●	●	
Copying					●	●	●			
Facing	●	●								●
Chamfering										
Back turning		●			●		●			

Cutting Shape										
Designation	MSRR/L	MSSNR/L	MTENN	MTFNR/L	MTGNR/L	MTJNR/L	MVJNR/L	MVQNR/L	MVVNN	MWLNR/L
Approach angle	75°	45°	60°	90°	90°	93°	93°	117.5°	72.5°	95°
Page	B119	B120	B120	B120	B121	B121	B121	B122	B122	B122
Turning	●	●	●		●	●	●	●	●	●
Copying			●			●	●	●	●	
Facing		●		●		●				●
Chamfering										
Back turning						●	●	●		●

Screw on System

Cutting Shape										
Designation	SCACR/L	SCLCR/L	SDACR/L	SDJCR/L	SDNCN	SRDCN	SRGCR/L	SSBCR/L	SSDCN	SSKCR/L
Approach angle	90°	95°	90°	93°	62.5°	-	-	75°	45°	75°
Page	B123	B123	B123	B124	B124	B124	B125	B125	B125	B126
Turning	●	●	●	●	●	●	●	●	●	
Copying			●	●	●	●	●			
Facing		●								●
Chamfering										
Back turning		●		●						

Cutting Shape										
Designation	SSSCR/L	STACR/L	STFCR/L	STGCR/L	STTCR/L	SVABR/L	SVHBR/L	SVJBR/L	SVJCR/L	SVVBN
Approach angle	45°	90°	90°	90°	60°	90°	107.5°	93°	93°	72.5°
Page	B126	B126	B126	B127	B127	B127	B128	B128	B128	B129
Turning	●	●		●	●	●	●	●	●	●
Copying						●	●	●	●	●
Facing	●		●							
Chamfering										
Back turning						●	●	●	●	

Cutting Shape										
Designation	SVVCN	SWACR/L								
Approach angle	72.5°	90°								
Page	B129	B129								
Turning	●	●								
Copying	●									
Facing										
Chamfering										
Back turning										

Ceramic Holder

Cutting Shape										
Designation	CCNLR/L	CRDNN	CRGNR/L	CSDNN	CSKNR/L	CTFNR/L	CTGNR/L			
Approach angle	95°	-	-	45°	75°	90°	90°			
Page	B130	B130	B130	B130	B131	B131	B131			
Turning	●	●	●	●			●			
Copying			●							
Facing	●				●	●				
Chamfering										
Back turning	●									



Instruction of External Holder

Double Clamp System

- Wrench
- Wrench
- Screw
- Clamp
- Insert
- Spring
- Screw
- Shim

Lever Lock System

- Insert
- Shim Pin
- Shim
- Lever
- Screw
- Wrench

Wedge Clamp System

- Wrench
- Screw
- Wedge Clamp
- Ring
- Insert
- Shim Pin
- Shim
- Nut
- Wrench

Clamp on System

- Wrench
- Screw
- Clamp
- Spring
- Insert
- Wrench
- Screw
- Shim

Multi Lock System

- Wrench
- Clamp
- Screw
- Wrench
- Insert
- Shim Pin
- Shim

Screw on System




- Wrench
- Screw
- Insert
- Wrench
- Screw
- Shim

B Features of Double Clamp / Lever Lock System

Double Clamp System

Stable clamping with double clamp system




- ▶ **Features** ▶ Simple and powerful clamping system operated by only a single clamp screw
- ▶ The powerful double-clamping system (upper and internal) is suitable for machining in very tough cutting conditions
- ▶ The holder offers precision due to the special design in the rear of the clamp
- ▶ Compact and optimized design for avoiding chip interference with a powerful clamp

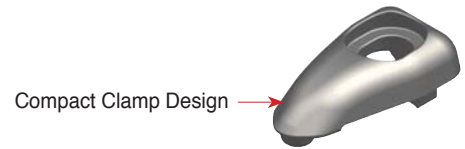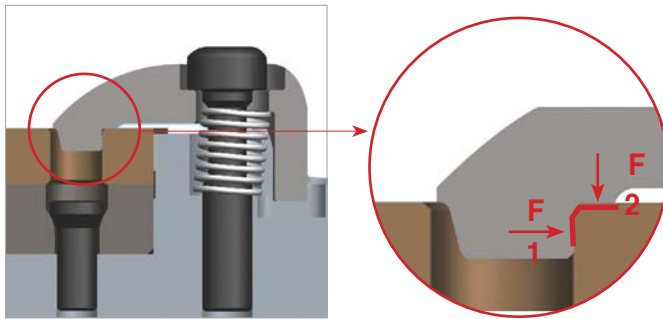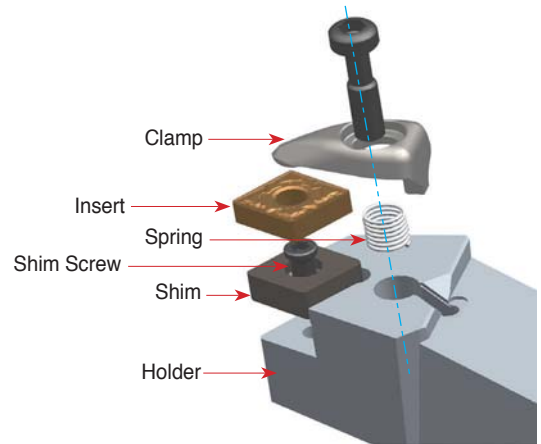

Lever Lock System

Stable clamping with double clamp system



- ▶ **Features** ▶ The holder offers precision due to the special design due to the improved Lever tip seat
- ▶ The durability of parts has been improved
- ▶ Superior tool life due to powerful clamping system and optimized design of part.
- ▶ Part designation on holder body makes it easy to check the right part description for each product
- ▶ Adjustable coolant nozzle gives the option to change the direction of the coolant to optimize chip control and improve tool life

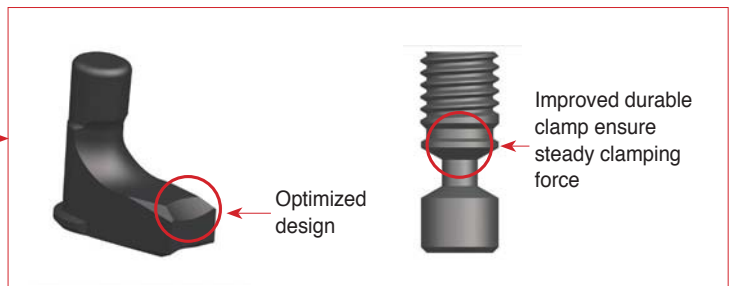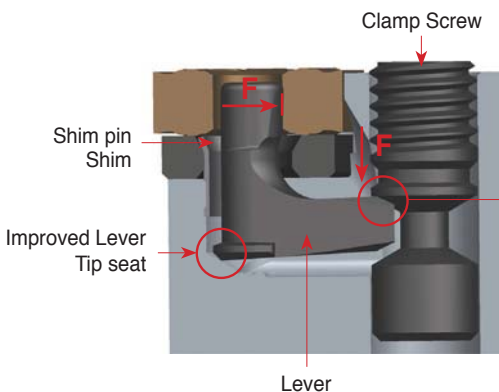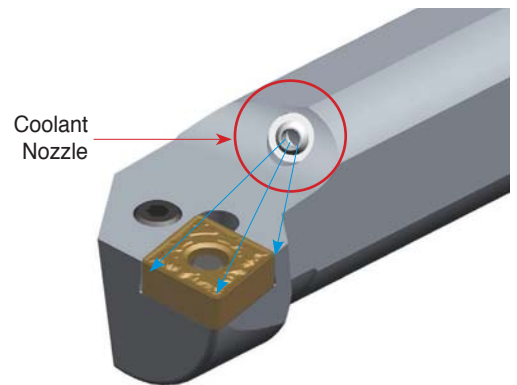

DCBNR/L



CN□□

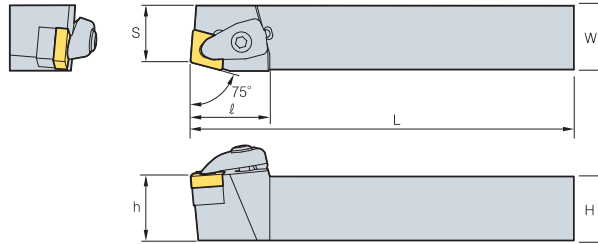

75°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DCBNR/L 2020-K12	●	●	20	20	125	17	20	31	CN□□1204□□	CVH4	CHX0518	SC44V	FTKA0410	SPR0714	HW30P
2525-M12	●	●	25	25	150	22	25	31							
3225-P12	●		32	25	170	22	32	31							
DCBNR/L 2525-M16			25	25	150	22	25	36	CN□□1606□□	CVH5	CHX0622	SC54V	FTNA0511	SPR0811	HW40L
3232-P16			32	32	170	27	32	36							
3232-P19	●	●	32	32	170	27	32	40							
DCBNR/L 4040-S19			40	40	250	35	40	40	CN□□1906□□	CVH6	CHX0622	SC63V	FTNA0511	SPR0811	HW40L



➔ Applicable inserts B20 ~ B25

● : Stock item

DCKNR/L



CN□□

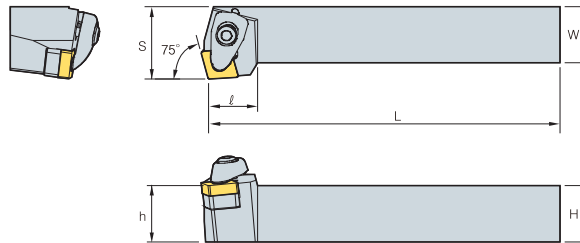

75°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DCKNR/L 2020-K12			20	20	125	25	20	21	CN□□1204□□	CVH4	CHX0518	SC44V	FTKA0410	SPR0714	HW30P
2525-M12	●	●	25	25	150	32	25	21							
3225-P12			32	25	170	32	32	21							
DCKNR/L 3232-P16			32	32	170	40	32	26	CN□□1606□□	CVH5	CHX0622	SC54V	FTNA0511	SPR0811	HW40L
4040-S16			40	40	250	50	40	26							



➔ Applicable inserts B20 ~ B25

● : Stock item

DCLNR/L



CN□□

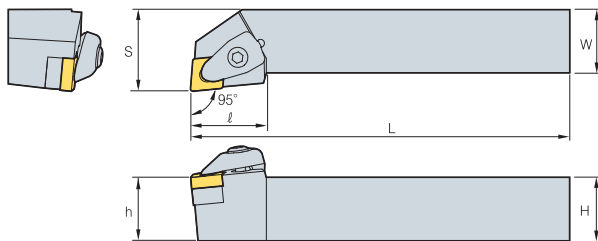

95°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DCLNR/L 2020-K09			20	20	125	25	20	24.5	CN□□0903□□	CVH3	CHX0415	SC32V	FTKA0307	SPR0510	HW25P
2525-M09			25	25	150	32	25	24.5							
2020-K12	●	●	20	20	125	25	20	30							
DCLNR/L 2525-M12	●	●	25	25	150	32	25	30	CN□□1204□□	CVH4	CHX0518	SC44V	FTKA0410	SPR0714	HW30P
3225-P12	●	●	32	25	170	32	32	30							
3232-P12	●	●	32	32	170	40	32	30							
DCLNR/L 2525-M16	●	●	25	25	150	32	25	36	CN□□1606□□	CVH5	CHX0622	SC54V	FTNA0511	SPR0811	HW40L
3225-P16	●	●	32	25	170	32	32	36							
3232-P16	●	●	32	32	170	40	32	36							
DCLNR/L 2525-M19			25	25	150	32	25	40	CN□□1906□□	CVH6	CHX0622	SC63V	FTNA0511	SPR0811	HW40L
3225-P19			32	25	170	32	32	40							
3232-P19	●	●	32	32	170	40	32	40							
DCLNR/L 4040-S19	●	●	40	40	250	50	40	40	CN□□1906□□	CVH6	CHX0622	SC63V	FTNA0511	SPR0811	HW40L


➔ Applicable inserts B20 ~ B25

● : Stock item





B Double Clamp System

DDJNR/L



DN□□

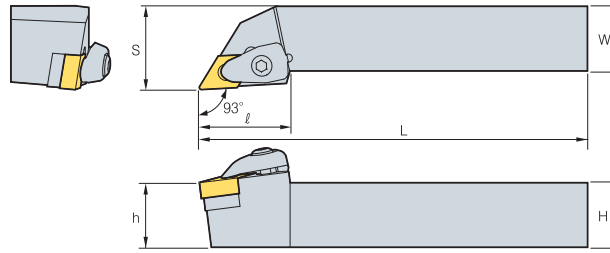

93°

• R type insert

(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DDJNR/L 2020-K11	●	●	20	20	125	25	20	30	DN□□1104□□	CVH3	CHX04	15SD32V	FTKA0307	SPR0510	HW25P
2525-M11	●	●	25	25	150	32	25	30							
3225-P11			32	25	170	32	32	30							
3232-P11			32	32	170	40	32	30							
DDJNR/L 2020-K15	●	●	20	20	125	25	20	35	DN□□1204□□	CVH4	CHX0518	SD43V	FTKA0410	SPR0714	HW30P
2525-M15	●	●	25	25	150	32	25	35							
3225-P15	●	●	32	25	170	32	32	35							
3232-P15	●	●	32	32	170	40	32	35							
DDJNR/L 2020-K15-3	●	●	20	20	125	25	20	35	DN□□1506□□	CVH4	CHX0518	SD44V	FTKA0410	SPR0714	HW30P
2525-M15-3	●	●	25	25	150	32	25	35							
3225-P15-3	●	●	32	25	170	32	32	35							
3232-P15-3	●	●	32	32	170	40	32	35							



➔ Applicable inserts B26 ~ B31

● : Stock item

DSBNR/L



SN□□

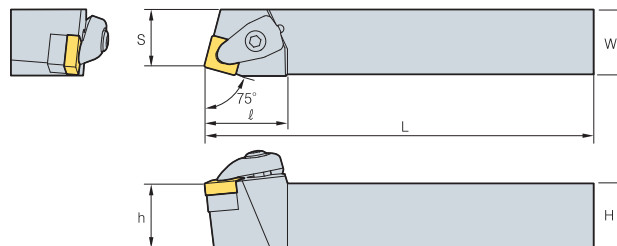

75°

• R type insert

(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DSBNR/L 2020-K09			20	20	125	17	20	25	SN□□0903□□	CVH3	CHX0415	SS32V	FTKA0307	SPR0510	HW25P
2525-M09			25	25	150	22	25	25							
DSBNR/L 2020-K12	●	●	20	20	125	17	20	32	SN□□1204□□	CVH4	CHX0518	SS44V	FTKA0410	SPR0714	HW30P
2525-M12	●	●	25	25	150	22	25	32							
3225-P12	●		32	25	170	22	32	32							
3232-P12			32	32	170	27	32	32							
DSBNR/L 2525-M15			25	25	150	22	25	38	SN□□1506□□	CVH5	CHX0622	SS54V	FTNA0511	SPR0811	HW40L
3225-P15			32	25	170	22	32	38							
3232-P15			32	32	170	27	32	38							
3232-P19			32	32	170	27	32	43							
DSBNR/L 4040-S19			40	40	250	35	40	43	SN□□1906□□	CVH6	CHX0622	SS64V	FTNA0511	SPR0811	HW40L

➔ Applicable inserts B33 ~ B40



● : Stock item



DSDNN



SN□□

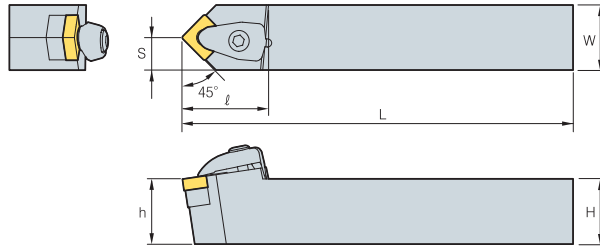

45°


• R type insert
(mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
DSDNN 2020-K09		20	20	125	10	20	26.5	SN□□0903□□	CVH3	CHX0415	SS32V	FTKA0307	SPR0510	HW25P
2020-K12	●	20	20	125	10	20	33	SN□□1204□□	CVH4	CHX0518	SS44V	FTKA0410	SPR0714	HW30P
2525-M12	●	25	25	150	12.5	25	33							
3225-P12	●	32	25	170	12.5	32	33							
3232-P12	●	32	32	170	16	32	33	SN□□1506□□	CVH5	CHX0622	SS54V	FTNA0511	SPR0811	HW40L
2525-M15		25	25	150	12.5	25	39.4							
3232-P15		32	32	170	16	32	38							
3232-P19	●	32	32	170	16	32	43	SN□□1906□□	CVH6	CHX0622	SS64V	FTNA0511	SPR0811	HW40L
4040-S19		40	40	250	20	40	45							



➔ Applicable inserts B33 ~ B40

● : Stock item

DSKNR/L



SN□□

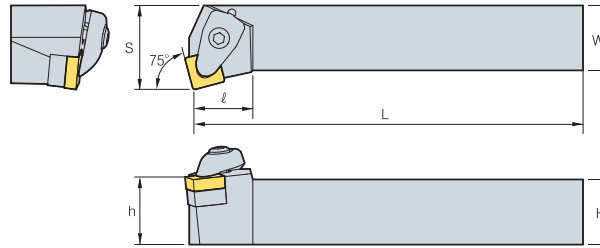

75°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DSKNR/L 2020-K09			20	20	125	25	20	20	SN□□0903□□	CVH3	CHX0415	SS32V	FTKA0307	SPR0510	HW25P
2020-K12	●	●	20	20	125	25	20	23	SN□□1204□□	CVH4	CHX0518	SS44V	FTKA0410	SPR0714	HW30P
2525-M12	●		25	25	150	32	25	23							
3232-P12	●		32	32	170	40	32	23							
3232-P15			32	32	170	40	32	28	SN□□1506□□	CVH5	CHX0622	SS54V	FTNA0511	SPR0811	HW40L
3232-P19			32	32	170	40	32	35	SN□□1906□□	CVH6	CHX0622	SC64V	FTNA0511	SPR0811	HW40L
4040-S19			40	40	250	50	40	43							



➔ Applicable inserts B33 ~ B40

● : Stock item

DSSNR/L



SN□□

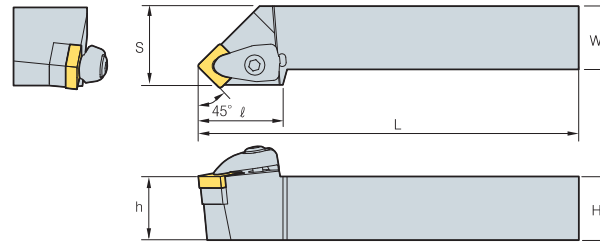

45°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DSSNR/L 2020-K09			20	20	125	25	20	28.5	SN□□0903□□	CVH3	CHX0415	SS32V	FTKA0307	SPR0510	HW25P
2020-K12	●	●	20	20	125	25	20	35	SN□□1204□□	CVH4	CHX0518	SS44V	FTKA0410	SPR0714	HW30P
2525-M12	●	●	25	25	150	32	25	35							
3225-P12	●		32	25	170	32	32	35							
3232-P12	●		32	32	170	40	32	35	SN□□1506□□	CVH5	CHX0622	SS54V	FTNA0511	SPR0811	HW40L
2525-M15			25	25	150	32	25	38.5							
3232-P15			32	32	170	40	32	38.5							
3232-P19	●		32	32	170	40	32	46	SN□□1906□□	CVH6	CHX0622	SS64V	FTNA0511	SPR0811	HW40L
4040-S19			40	40	250	50	40	46							

➔ Applicable inserts B33 ~ B40

● : Stock item





B Double Clamp System

DTFNR/L



TN□□

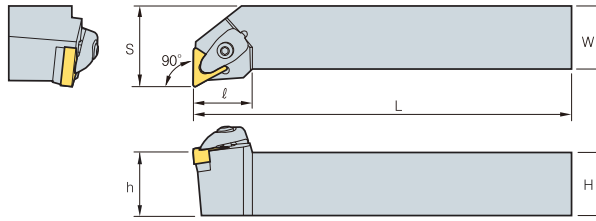

90°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DTFNR/L 2020-K16			20	20	125	25	20	24.5	TN□□1604□□						
			25	25	150	32	25	24.5							
			32	32	170	40	32	23.5							
DTFNR/L 2525-M16			25	25	150	32	25	24.5	TN□□2204□□						
DTFNR/L 3232-P16			32	32	170	40	32	33							
DTFNR/L 3225-P22			32	25	170	32	32	33							
DTFNR/L 3232-P22			32	32	170	40	32	33							



➔ Applicable inserts B41 ~ B48

● : Stock item

DTGNR/L



TN□□

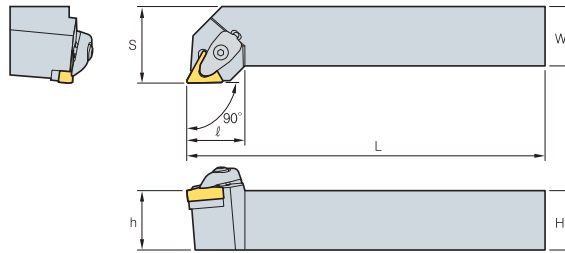

90°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DTGNR/L 2020-K16			20	20	125	25	20	24.5	TN□□1604□□						
			25	25	150	32	25	24.5							
			32	32	170	40	32	24.5							
DTGNR/L 2525-M16			25	25	150	32	25	32.6	TN□□2204□□						
DTGNR/L 3232-P16			32	32	170	40	32	32.6							
DTGNR/L 3225-P22			32	25	170	32	32	32.6							
DTGNR/L 3232-P22			32	32	170	40	32	32.6							



➔ Applicable inserts B41 ~ B48

● : Stock item

DVJNR/L



VN□□

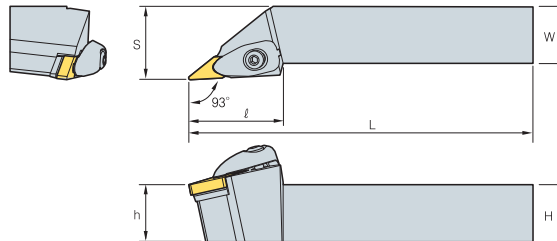

93°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench
	R	L													
DVJNR/L 2020-K16	●	●	20	20	125	25	20	41.5	VN□□1604□□						
	●	●	25	25	150	32	25	41.5							
	●	●	32	32	170	40	32	41.5							
DVJNR/L 2525-M16	●	●	25	25	150	32	25	41.5							
DVJNR/L 3232-P16	●	●	32	32	170	40	32	41.5							

➔ Applicable inserts B49 ~ B50



● : Stock item



DVVNN



VN□□

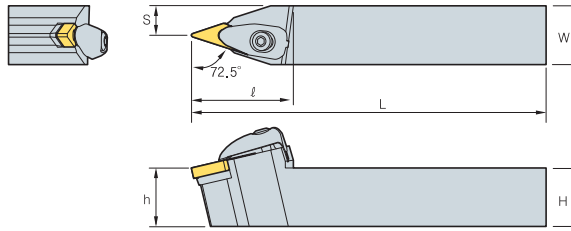

72.5°
• R type insert
(mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench						
DVVNN 2020-K16		20	20	125	10	20	40	VN□□1604□□												
2525-M16	●	25	25	150	12.5	25	40								CVH3V	CHX0518	SV32V	FTNA03508	SPR0714	HW30P
3232-P16		32	32	170	16	32	40													



➔ Applicable inserts B49 ~ B50

● : Stock item

DWLNR/L



WN□□

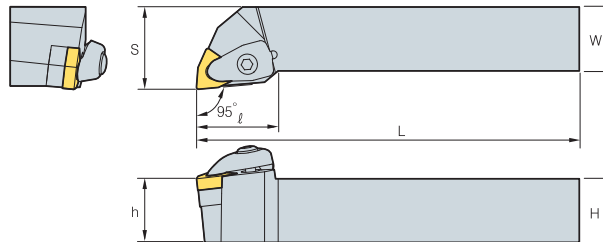

95°
• R type insert
(mm)


Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Wrench						
	R	L																			
DWLNR/L 2020-K06	●	●	20	20	125	25	20	26	WN□□0604□□												
2525-M06	●		25	25	150	32	25	26								CVH3	CHX0415	SW32V	FTKA0307	SPR0510	HW25P
2020-K08	●	●	20	20	125	25	20	32													
2525-M08	●	●	25	25	150	32	25	32	WN□□0804□□	CVH4	CHX0518	SW44V	FTKA0410	SPR0714	HW30P						

➔ Applicable inserts B51 ~ B54



● : Stock item

B Lever Lock System

PCBNR/L



CN□□

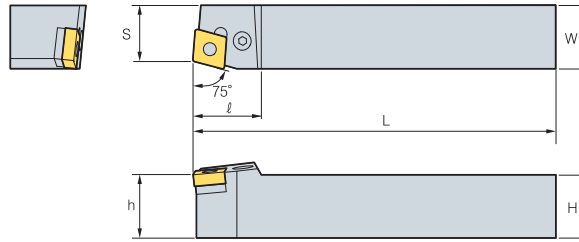

75°

• R type insert

(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch	
	R	L														
PCBNR/L	2020-K12	●	●	20	20	125	17	20	27	CN□□1204□□	LV4	VHX0821	SC42	SP4	HW30L	LSPS4
	2525-M12	●	●	25	25	150	22	25	27							
	3225-P12	●	●	32	25	170	22	32	27							
	2525-M16	●	●	25	25	150	22	25	33	CN□□1606□□	LV5	VHX0825	SC53	SP5	HW30L	LSPS6
	3232-P16	●	●	32	32	170	27	32	33							
	3232-P19	●	●	32	32	170	27	32	36	CN□□1906□□	LV6N	VHX1027N	SC63N	SP6N	HW40L	LSPS6
	4040-S19	●	●	40	40	250	35	40	36							
	4040-S25	●	●	40	40	250	35	40	47	CN□□2509□□	LV8N	VHX1236N	SC84N	SP8N	HW50L	LSPS8
4040-S25-5	●	●	40	40	250	35	40	47	CN□□2507□□							
5050-T25	●	●	50	50	300	43	50	47	CN□□2509□□							

PCBNR/L	2020-K12N			20	20	125	17	20	27	CN□□1204□□	LV4N	VHX0820N	SC42N	SP4N	HW30L	LSPS4
	2525-M12N			25	25	150	22	25	27							
	3225-P12N			32	25	170	22	32	27							
	2525-M16N			25	25	150	22	25	33	CN□□1606□□	LV5N	VHX0820AN	SC53N	SP5N	HW30L	LSPS5
	3232-P16N			32	32	170	27	32	33							



➔ Applicable inserts B20 ~ B25

● : Stock item

PCKNR/L



CN□□

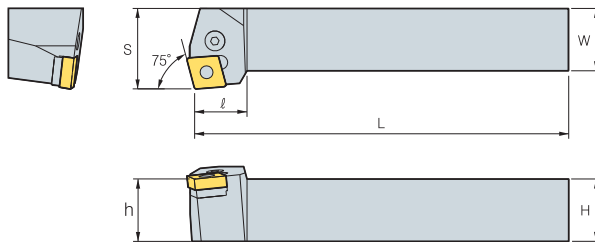

95°

• R type insert

(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch	
	R	L														
PCKNR/L	2020-K12	●	●	20	20	125	25	20	27	CN□□1204□□	LV4	VHX0821	SC42	SP4	HW30L	LSPS4
	2525-M12	●	●	25	25	150	32	25	27							
	3225-P12			32	25	170	40	32	30							
	3232-P16			32	32	170	40	32	26	CN□□1606□□	LV5	VHX0825	SC53	SP5	HW30L	HW30L
	4040-S16			40	40	250	50	40	25							
PCKNR/L	2020-K12N			20	20	125	25	20	27	CN□□1204□□	LV4N	VHX0820N	SC42N	SP4N	HW30L	LSPS4
	2525-M12N			25	25	150	32	25	27							
	3225-P12N			32	25	170	40	32	30							
	3232-P16N			32	32	170	40	32	26	CN□□1606□□	LV5N	VHX0820AN	SC53N	SP5N	HW30L	LSPS5
	4040-S16N			40	40	250	50	40	25							

➔ Applicable inserts B20 ~ B25


● : Stock item





- Improved holders and parts ensure performance and durability
- "N" stand for New type (Holders and parts)



PCLNR/L



CN□□

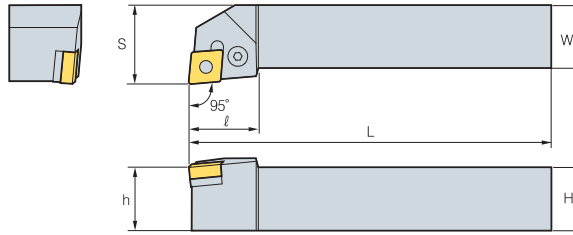

95°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
	R	L													
PCLNR/L 1616-H09	●		16	16	100	20	16	20	CN□□0903□□	LV3	VHX0617	SC32	SP3	HW25L	LSPS3
2020-K09	●	●	20	20	125	25	20	22							
2525-M09	●	●	25	25	150	32	25	22							
PCLNR/L 1616-H12	●	●	16	16	100	20	16	28	CN□□1204□□	LV4	VHX0821	SC42	SP4	HW30L	LSPS4
2020-K12	●	●	20	20	125	25	20	28							
2525-M12	●	●	25	25	150	32	25	28							
PCLNR/L 3225-P12	●	●	32	25	170	32	32	28	CN□□1606□□	LV5	VHX0825	SC53	SP5	HW30L	LSPS5
3232-P12	●	●	32	32	170	40	32	28							
2525-M16	●	●	25	25	150	32	25	33							
PCLNR/L 3232-P16	●	●	32	32	170	40	32	33	CN□□1906□□	LV6N	VHX1027N	SC63N	SP6N	HW40L	LSPS6
2525-M19	●	●	25	25	150	32	25	36							
3225-P19	●		32	25	170	32	32	36							
PCLNR/L 3232-P19	●	●	32	32	170	40	32	36	CN□□2509□□	LV8N	VHX1236N	SC84N	SP8N	HW50L	LSPS8
4040-P19	●	●	40	40	170	50	40	36							
4040-S19	●	●	40	40	250	50	40	36							
PCLNR/L 4040-S25	●	●	40	40	250	50	40	47	CN□□2507□□	LV8N	VHX1236N	SC84N	SP8N	HW50L	LSPS8
5050-T25		●	50	50	300	60	50	47							
4040-S25-5			40	40	250	50	40	47							
PCLNR/L 5050-S25-5			50	50	300	60	50	47							
PCLNR/L 1616-H09N			16	16	100	20	16	20	CN□□0903□□	LV3N	VHX0617N	SC32N	SP3N	HW25L	LSPS3
2020-K09N			20	20	125	25	20	22							
2525-M09N			25	25	150	32	25	22							
PCLNR/L 1616-H12N			16	16	100	20	16	28	CN□□1204□□	LV4N	VHX0820N	SC42N	SP4N	HW30L	LSPS4
2020-K12N	●		20	20	125	25	20	28							
2525-M12N	●		25	25	150	32	25	28							
PCLNR/L 3225-P12N			32	25	170	32	32	28	CN□□1606□□	LV5N	VHX0820AN	SC53N	SP5N	HW30L	LSPS5
3232-P12N			32	32	170	40	32	28							
2525-M16N			25	25	150	32	25	33							
PCLNR/L 3232-P16N			32	32	170	40	32	33							



➔ Applicable inserts B20 ~ B25

● : Stock item

PDJNR/L



DN□□

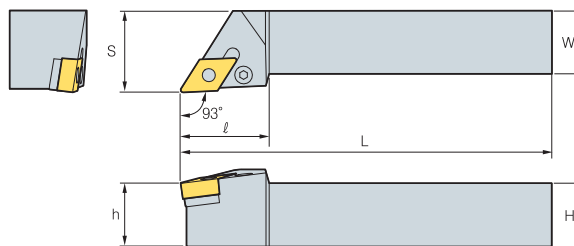

93°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
	R	L													
PDJNR/L 1616-H11	●	●	16	16	100	20	16	25	DN□□1104□□	LV3	VHX0617	SD317	SP3	HW25L	LSPS3
2020-K11	●	●	20	20	125	25	20	25							
2525-M11			25	25	150	32	25	30							
PDJNR/L 2020-K15			20	20	125	25	20	35	DN□□1506□□	LV4B	VHX0821	SD42	SP4	HW30L	LSPS4
2525-M15			25	25	150	32	25	35							
3225-P15			32	25	170	32	32	35							
PDJNR/L 3232-P15			32	32	170	40	32	35	DN□□1504□□	LV4	VHX0821	SD42	SP4	HW30L	LSPS4
2020-K15-3			20	20	125	25	20	35							
2525-M15-3			25	25	150	32	25	35							
PDJNR/L 3232-P15-3			32	32	170	40	32	35							

➔ Applicable inserts B26 ~ B31

● : Stock item

Turning





B

B Lever Lock System

PDJNR/L



DN□□

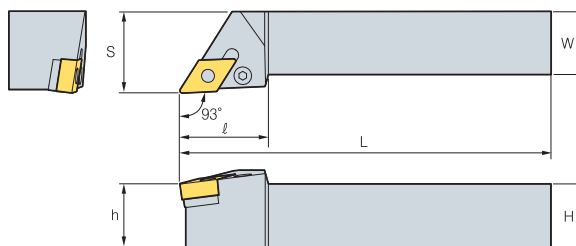

93°


• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
	R	L													
PDJNR/L 1616-H11N			16	16	100	20	16	25	DN□□1104□□	LV3AN	VHX0617N	SD32N	SP3N-1	HW25L	LSPS3
2020-K11N			20	20	125	25	20	25							
2525-M11N			25	25	150	32	25	30							
2020-K15N			20	20	125	25	20	35							
2525-M15N	●		25	25	150	32	25	35	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	HW30L	LSPS4
3225-P15N			32	25	170	32	32	35							
3232-P15N			32	32	170	40	32	35							
2020-K15-3N			20	20	125	25	20	35	DN□□1504□□	LV4BN	VHX0821N	SD43N	SP4N	HW30L	LSPS4
2525-M15-3N			25	25	150	32	25	35							
3232-P15-3N			32	32	170	40	32	35							



➔ Applicable inserts B26 ~ B31

● : Stock item

PDNNR/L



DN□□

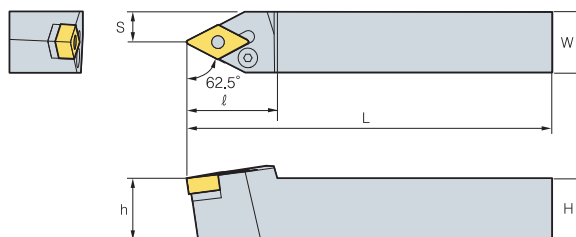

62.5°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
	R	L													
PDNNR/L 2020-K15	●		20	20	125	8	20	37	DN□□1506□□	LV4B	VHX0821	SD42	SP4	HW30L	LSPS4
2525-M15	●	●	25	25	150	12.5	25	37							
3232-P15	●		32	32	170	16	32	37							
4025-M15			40	25	150	12.5	32	37							
2525-M15-3	●		25	25	150	12.5	25	37	DN□□1504□□	LV4	VHX0821	SD42	SP4	HW30L	LSPS4
4025-M15-3			40	25	150	12.5	25	37							
PDNNR/L 2020-K15N			20	20	125	8	20	37	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	HW30L	LSPS4
2525-M15N			25	25	150	12.5	25	37							
3232-P15N			32	32	170	16	32	37							
2525-M15-3N			25	25	150	12.5	25	37	DN□□1504□□	LV4BN	VHX0821N	SD43N	SP4N	HW30L	LSPS4
3232-P15-3N			32	32	170	16	32	37							

➔ Applicable inserts B26 ~ B31


● : Stock item



PRDCN



RCMX

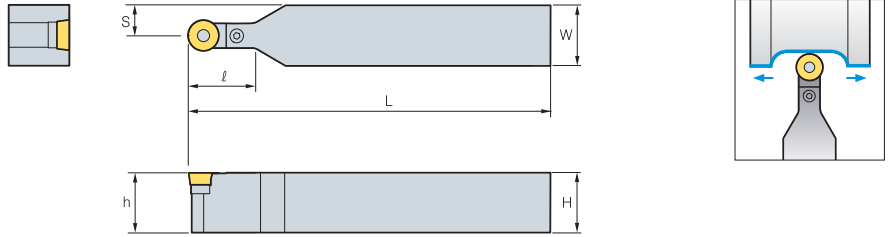

(mm)

Designation	Stock	H	W	L	S	h	l	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch	
PRDCN	2020-M10	●	20	20	150	15	20	24	RCMX 1003M0	LR10	VHX0514	SR10	SP3	HW20L	LSPS3
	2525-M10	●	25	25	150	17.5	25	24							
	2525-M12	●	25	25	150	18.5	25	24	RCMX 1204M0	LR12	VHX0617	SR12	SP3	HW25L	LSPS3
	2020-K12	●	20	20	125	16	20	24							
	3225-Q12	●	32	25	180	18.5	32	24	RCMX 1606M0	LR16	VHX0621	SR16	SP4	HW25L	LSPS4
	2525-Q16	●	25	25	180	20.5	25	30							
	3225-Q16	●	32	25	180	20.5	32	30							
	3232-Q16	●	32	32	180	24	32	35							
	3232-Q20	●	32	32	180	26	32	40	RCMX 2006M0	LR20	VHX0823	SR20	SP20	HW30L	LSPS5
	4040-S25	●	40	40	250	32.5	40	42	RCMX 2507M0	LR25	VHX1030	SR25	SP6N	HW40L	LSPS6
4040-T25	●	40	40	300	32.5	40	42								
5050-U32	●	50	50	350	41	50	52	RCMX 3209M0	LR32	VHX1236	SR32	SP8N	HW50L	LSPS8	


Applicable inserts B63

● : Stock item

PRGCR/L



RCMX

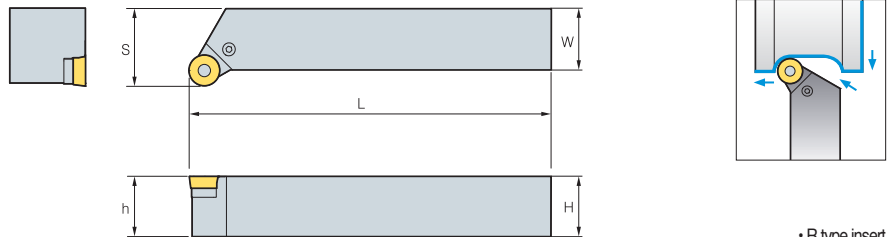

• R type insert
(mm)


Designation	Stock		H	W	L	S	h	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch	
	R	L													
PRGCR/L	2020-K10	●	●	20	20	125	25	20	RCMX 1003M0	LR10	VHX0514	SR10	SP3	HW20L	LSPS3
	2525-M10	●	●	25	25	150	32	25							
	2020-K12	●	●	20	20	125	25	20	RCMX 1204M0	LR12	VHX0617	SR12	SP3	HW25L	LSPS3
	2525-M12	●	●	25	25	150	32	25							
	3225-P12	●	●	32	25	170	32	32	RCMX 1606M0	LR16	VHX0621	SR16	SP4	HW25L	LSPS4
	2525-M16	●	●	25	25	150	32	25							
	3225-P16	●	●	32	25	170	32	32							
	3232-P20	●	●	32	32	170	40	32							
	4040-S25	●	●	40	40	250	50	40	RCMX 2006M0	LR20	VHX0823	SR20	SP20	HW30L	LSPS5
									RCMX 2507M0	LR25	VHX1030	SR25	SP6N	HW40L	LSPS6

Applicable inserts B63



● : Stock item

B Lever Lock System

PSBNR/L



SN□□

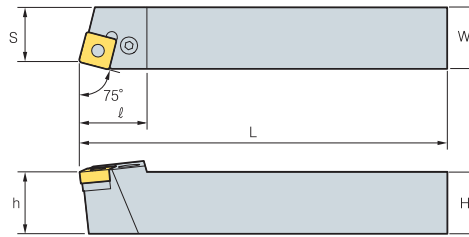

75°



• R type insert (mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
	R	L													
PSBNR/L 1616-H09		●	16	16	100	13	16	21	SN□□0903□□	LV3	VHX0617	SS32	SP3	HW25L	LSPS3
2020-K09			20	20	125	17	20	23	SN□□1204□□	LV4	VHX0821	SS42	SP4	HW30L	LSPS4
2020-K12	●	●	20	20	125	17	20	28							
2525-M12	●	●	25	25	150	22	25	28	SN□□1506□□	LV5	VHX0825	SS53	SP5	HW30L	LSPS5
3225-P12	●	●	32	32	170	22	32	28							
3232-P12			32	32	170	27	32	28	SN□□1906□□	LV6N	VHX1027N	SS63N	SP6N	HW40L	LSPS6
2525-M15	●	●	25	25	150	22	25	35							
3232-P15	●	●	32	32	170	27	32	35	SN□□2507□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8
3232-P19	●	●	32	32	170	27	32	40							
4040-S19	●	●	40	40	250	35	40	40	SN□□2509□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8
4040-S25	●	●	40	40	250	35	40	50							
4040-S25-6	●	●	40	40	250	35	40	50	SN□□2507□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8
5050-T25	●	●	50	50	300	43	50	50							
PSBNR/L 1616-H09N			16	16	100	13	16	21	SN□□0903□□	LV3N	VHX0617N	SS32N	SP3N	HW25L	LSPS3
2020-K09N			20	20	125	17	20	23	SN□□1204□□	LV4N	VHX0820N	SS42N	SP4N	HW30L	LSPS4
2020-K12N			20	20	125	17	20	28							
2525-M12N			25	25	150	22	25	28	SN□□1506□□	LV5N	VHX0820AN	SS53N	SP5N	HW30L	LSPS5
3225-P12N			32	25	150	22	25	28							
3232-P12N			32	32	170	27	32	28							
2525-M15N			25	25	150	22	25	35							
3232-P15N			32	32	170	27	32	35							

Applicable inserts B33 ~ B40

● : Stock item

PSDNN

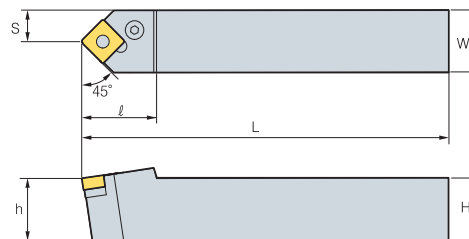

45°

(mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
2020-K12	●	20	20	125	10	20	30	SN□□1204□□	LV4	VHX0821	SS42	SP4	HW30L	LSPS4
2525-M12	●	25	25	150	12.5	25	30							
3225-P12		32	25	170	12.5	32	30	SN□□1506□□	LV5	VHX0825	SS53	SP5	HW30L	LSPS5
3232-P12	●	32	32	170	16	32	40							
2525-M15	●	25	25	150	12.5	25	40	SN□□1906□□	LV6N	VHX1027N	SS63N	SP6N	HW40L	LSPS6
3232-P15		32	32	170	16	32	40							
3225-P19		32	25	170	12.5	32	40	SN□□2507□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8
3232-P19	●	32	32	170	16	32	40							
4040-S19	●	40	40	250	20	40	40	SN□□2509□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8
4040-S25	●	40	40	250	20	40	50							
5050-T25	●	50	50	300	25	50	50	SN□□1204□□	LV4N	VHX0821AN	SS42	SP4	LSPS4	HW30L
4040-S25-6	●	40	40	250	20	40	50							
5050-T25-6	●	50	50	300	25	50	50							
PSDNN 1616-H09N		16	16	100	8	16	23	SN□□0903□□	LV3N	VHX0617N	SS32N	SP3N	HW25L	LSPS3
2020-K12N		20	20	125	10	20	30	SN□□1204□□	LV4N	VHX0820N	SS42N	SP4N	HW30L	LSPS4
2525-M12N		25	25	150	12.5	20	30							
3225-P12N		32	25	170	12.5	32	30	SN□□1506□□	LV5N	VHX0820AN	SS53N	SP5N	HW30L	LSPS5
3232-P12N		32	32	170	16	32	40							
2525-M15N		25	25	150	12.5	25	40	SN□□1906□□	LV6N	VHX1027N	SS63N	SP6N	HW40L	LSPS6
3232-P15N		32	32	170	16	32	40							
3232-P15N		32	25	170	16	32	40	SN□□2507□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8
3232-P19		32	32	170	16	32	40							
3232-P19		32	25	170	12.5	32	40							
4040-S19		40	40	250	20	40	40							
4040-S25		40	40	250	20	40	50							
5050-T25	●	50	50	300	25	50	50							

Applicable inserts B36 ~ B40

● : Stock item





B

Turning

PSKNR/L



SN□□

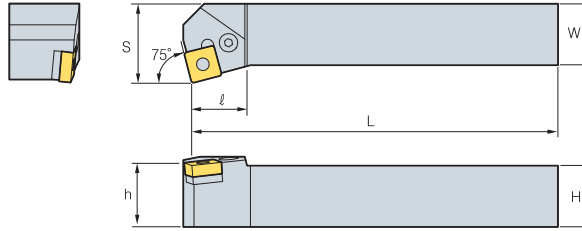

75°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch	
	R	L														
PSKNR/L	1616-H09		16	16	100	20	16	17	SN□□0903□□	LV3	VHX0617	SS32	SP3	HW25L	LSPS3	
	2020-K09	●	20	20	125	25	20	20								
	2020-K12	●	●	20	20	125	25	20	23	SN□□1204□□	LV4	VHX0821	SS42	SP4	HW30L	LSPS4
	2525-M12	●	●	25	25	150	32	25	23							
	3232-P12			32	32	170	40	32	23	SN□□1506□□	LV5	VHX0825	SS53	SP5	HW30L	LSPS5
	2525-M15	●		25	25	150	32	25	28							
	3232-P15	●	●	32	32	170	40	32	28	SN□□1906□□	LV6N	VHX1027N	SS63N	SP6N	HW40L	LSPS6
	3232-P19	●	●	32	32	170	40	32	41.5							
	4040-S19	●	●	40	40	250	50	40	41.5	SN□□2507□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8
	4040-S25	●		40	40	250	50	40	46							
4040-S25-6	●		40	40	250	50	40	46	SN□□2509□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8	
5050-T25-6	●		50	50	300	60	50	37.5	SN□□2509□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8	
PSKNR/L	1616-H09N		16	16	100	20	16	17	SN□□0903□□	LV3N	VHX0617N	SS32N	SP3N	HW25L	LSPS3	
	2020-K09N		20	20	125	25	20	20								
	2020-K12N		20	20	125	25	20	26	SN□□1204□□	LV4N	VHX0820N	SS42N	SP4N	HW30L	LSPS4	
	2525-M12N		25	25	150	32	25	26								
	3232-P12N		32	32	170	40	32	26	SN□□1506□□	LV5N	VHX0820AN	SS53N	SP5N	HW30L	LSPS5	
	2525-M15N		25	25	150	32	25	32								
	3232-P15N		32	32	170	40	32	32								



➔ Applicable inserts B33 ~ B40

● : Stock item

PSSNR/L



SN□□

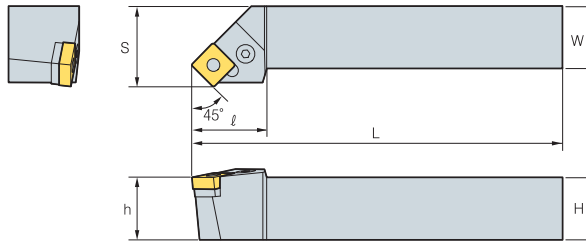

45°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
	R	L													
PSSNR/L	1616-H09	●	16	16	100	20	16	25	SN□□0903□□	LV3	VHX0617	SS32	SP10	HW25L	LSPS3
	2020-K12	●	●	20	20	125	25	30							
	2525-M12	●	●	25	25	150	32	36	SN□□1204□□	LV4	VHX0821	SS42	SP4	HW30L	LSPS4
	3232-P12			32	32	170	40	40							
	2525-M15	●		25	25	150	32	36	SN□□1506□□	LV5	VHX0825	SS53	SP5	HW30L	LSPS5
	3232-P15	●	●	32	32	170	40	45							
	3232-P19	●	●	32	32	170	40	41.5	SN□□1906□□	LV6N	VHX1027N	SS63N	SP6N	HW40L	LSPS6
	4040-R19	●		40	40	200	50	41.5							
	4040-S19	●	●	40	40	250	50	41.5	SN□□2507□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8
	4040-S25	●		40	40	250	50	48							
4040-S25-6	●	●	40	40	250	50	48	SN□□2509□□	LV8N	VHX1236N	SS84N	SP8N	HW50L	LSPS8	
PSSNR/L	1616-H09N		16	16	100	20	16	25	SN□□0903□□	LV3N	VHX0617N	SS32N	SP3	HW25L	LSPS3
	2020-K12N		20	20	125	25	30								
	2525-M12N		25	25	150	32	36	SN□□1204□□	LV4N	VHX0821N	SS42N	SP4N	HW30L	LSPS4	
	3225-P12N		32	25	170	32	45								
	3232-P12N		32	32	170	40	40	SN□□1506□□	LV5N	VHX08209N	SS53N	SP5N	HW30L	LSPS5	
	2525-M15N		25	25	150	32	36								
	3232-P15N		32	32	170	40	45								

➔ Applicable inserts B33 ~ B40



● : Stock item

B Lever Lock System

PTFNR/L



TN□□

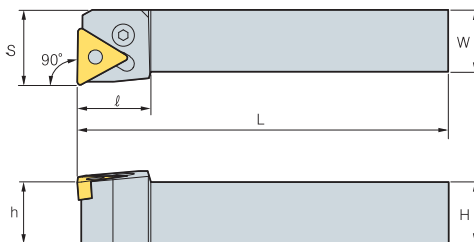


90°
• R type insert (mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
	R	L													
PTFNR/L	1616-H16	● ●	16	16	100	20	16	20	TN□□1604□□	LV3	VHX0617	ST317	SP3	HW25L	LSPS3
	2020-K16	● ●	20	20	125	25	20	20							
	2525-M16	● ●	25	25	150	32	25	20							
	2525-M22	● ●	25	25	150	32	25	25							
	3232-P22	●	32	32	170	40	32	25							
	3232-P27		32	32	170	40	32	34							
4040-S27		40	40	250	50	40	34	TN□□2706□□	LV5	VHX0825	ST53	SP5	HW30L	LSPS5	
PTFNR/L	1616-H16N		16	16	100	20	16	20	TN□□1604□□	LV3N	VHX0617N	ST317N	SP3N	HW25L	LSPS3
	2020-K16N		20	20	125	25	20	20							
	2525-M16N		25	25	150	32	25	20							
	2525-M22N		25	25	150	32	25	25							
	3232-P22N		32	32	170	40	32	25							
	3232-P27N		32	32	170	40	32	34							
4040-S27N		40	40	250	50	40	34	TN□□2706□□	LV5AN	VHX0823N	ST53N	SP5N	HW30L	LSPS5	



Applicable inserts B41 ~ B48

● : Stock item

PTGNR/L



TN□□

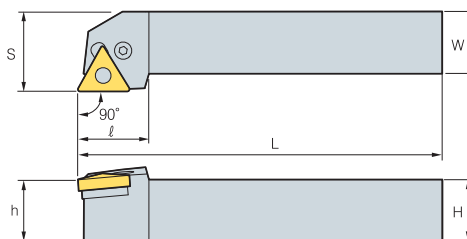

90°
• R type insert (mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
	R	L													
PTGNR/L	1212-F11	●	12	12	80	16	12	16	TN□□1103□□	LV2	VHX0509B	-	-	HW20L	-
	1616-H11	●	16	16	100	20	16	18							
	2020-K11		20	20	125	25	20	19							
	2525-M11		25	25	150	32	25	20							
	1616-H16	● ●	16	16	100	20	16	20							
	2020-K16	● ●	20	20	125	25	20	20							
	2525-M16	● ●	25	25	150	32	25	20							
	3232-P16	●	32	32	170	40	32	20							
	2525-M22	● ●	25	25	150	32	25	28							
	3232-P22	● ●	32	32	170	40	32	28							
3232-P27	●	32	32	170	40	32	33								
4040-S27		40	40	250	50	40	33	TN□□2706□□	LV5	VHX0825	ST53	SP5	HW30L	LSPS5	
PTGNR/L	1616-H16N		16	16	100	20	16	20	TN□□1604□□	LV3N	VHX0617N	ST317N	SP3N	HW25L	LSPS3
	2020-K16N		20	20	125	25	20	20							
	2525-M16N		25	25	150	32	25	20							
	3232-P16N		32	32	170	40	32	20							
	2525-M22N		25	25	150	32	25	28							
	3232-P22N		32	32	170	40	32	28							
3232-P27N		32	32	170	40	32	33								
4040-S27N		40	40	250	50	40	33	TN□□2706□□	LV5AN	VHX0823N	ST53N	SP5N	HW30L	LSPS5	

Applicable inserts B41 ~ B48



● : Stock item



PTTNR/L



TN□□

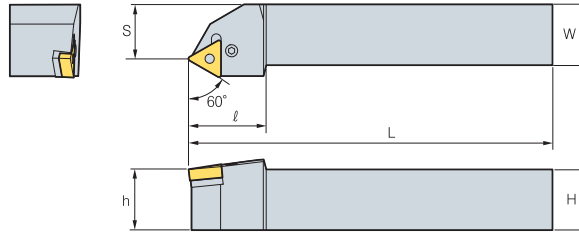

60°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch
	R	L													
PTTNR/L	1616-H16		16	16	100	13	16	25	TN□□1604□□	LV3	VHX0617	ST317	SP3	HW25L	LSPS3
	2020-K16	●	20	20	125	17	20	25							
	2525-M16	●	25	25	150	22	25	32	TN□□2204□□	LV4	VHX0821	ST42	SP4	HW30L	LSPS4
	2525-M22	●	25	25	150	22	25	32							
PTTNR/L	1616-H16N		16	16	100	13	16	25	TN□□1604□□	LV3N	VHX0617N	ST317N	SP3N	HW25L	LSPS3
	2020-K16N		20	20	125	17	20	25							
	2525-M16N		25	25	150	22	25	32	TN□□2204□□	LV4N	VHX0821N	ST42N	SP4N	HW30L	LSPS4
	2525-M22N		25	25	150	22	25	32							


➔ Applicable inserts B41 ~ B48

● : Stock item


PWLNR/L




WN□□

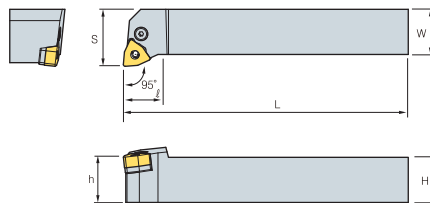

[Fig.1]

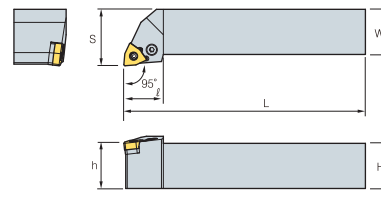

[Fig.2]



95°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim Pin	Wrench	ShimPin Punch	Fig
	R	L														
PWLNR/L	1616-H06	● ●	16	16	100	20	16	20	WN□□0604□□	LV3	VHX0617	ST317	SP3	HW25L	LSPS3	1
	2020-K06	● ●	20	20	125	25	20	20								
	2525-M06	● ●	25	25	150	32	25	26								
	2020-K08	● ●	20	20	125	25	20	26	WN□□0804□□	LV4	VHX0821	ST42	SP4	HW30L	LSPS4	2
	2525-M08	● ●	25	25	150	32	25	26								
PWLNR/L	1616-H06N		16	16	100	20	16	20	WN□□0604□□	LV3N	VHX0617N	ST317N	SP3N	HW25L	LSPS3	1
	2020-K06N		20	20	125	25	20	20								
	2525-M06N		25	25	150	32	25	20								
	2020-K08N		20	20	125	25	20	26	WN□□0804□□	LV4N	VHX0820N	ST42N	SP4N	HW30L	LSPS4	2
	2525-N08N		25	25	150	32	25	26								

➔ Applicable inserts B51 ~ B54



● : Stock item

B Wedge Clamp System

WTENN



TN□□

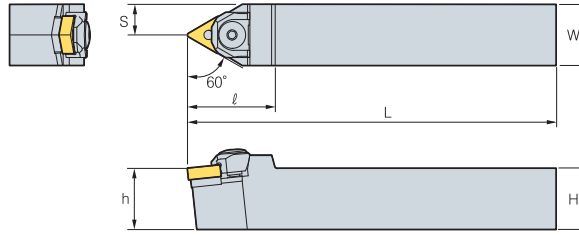

60°

• R type insert
(mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Wedge Clamp	Screw	StopperRing	Shim	Shim Pin	Nut	Wrench	
WTENN	2020-K16	●	20	20	125	10	20	36	TN□□1604□□					SP3M-1 SP3M	N0407	HW30L
	2525-M16	●	25	25	150	12.5	25	36								
	2525-M22	●	25	25	150	12.5	25	42								
3232-P22	●	32	32	170	16	32	42	TN□□2204□□					SP4M	N0508	HW30L	



➔ Applicable inserts B41 ~ B48

● : Stock item

WTJNR/L



TN□□

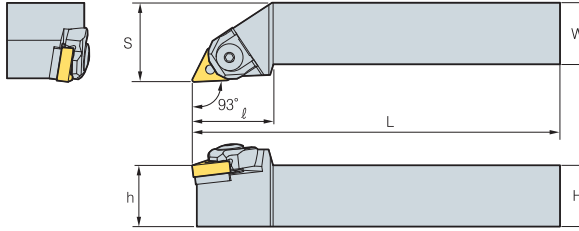

93°


• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Wedge Clamp	Screw	StopperRing	Shim	Shim Pin	Nut	Wrench	
	R	L															
WTJNR/L	2020-K16	●	●	20	20	125	25	20	33	TN□□1604□□					SP3M-1 SP3M	N0407	HW30L
	2525-M16	●	●	25	25	150	32	25	33								
	3232-P16	●	●	32	32	170	40	32	33								
2525-M22	●	●	25	25	150	32	25	35	TN□□2204□□					SP4M	N0508	HW30L	
3232-P22	●	●	32	32	170	40	32	35									



➔ Applicable inserts B41 ~ B48

● : Stock item

WTXNR/L



TN□□

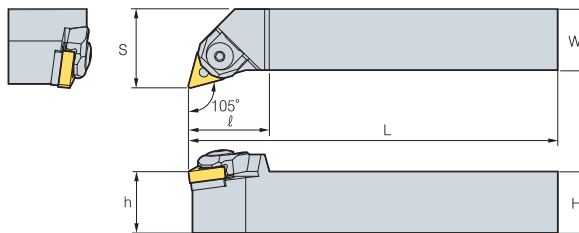

105°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Wedge Clamp	Screw	StopperRing	Shim	Shim Pin	Nut	Wrench	
	R	L															
WTXNR/L	2020-K16	●	●	20	20	125	25	20	30	TN□□1604□□					SP3M-1 SP3M	N0407	HW25L HW30L
	2525-M16	●	●	25	25	150	32	25	33								
	3232-P16			32	32	170	40	32	33								

➔ Applicable inserts B41 ~ B48



● : Stock item



WWLNR/L



WN□□

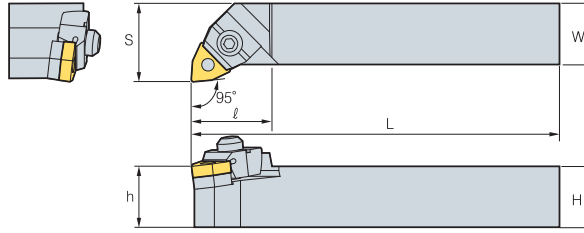

95°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Wedge Clamp	Screw	C-Ring	Shim	Shim Pin	Nut	Wrench
	R	L														
WWLNR/L 2020-K08	●	●	20	20	125	25	20	32	WN□□0804□□	CMH6R/L3						
2525-M08	●	●	25	25	150	32	25	33		CMH6R2	MHX0630	CR05	SW43M	SP2M SP4M	N0508	HW30L HW40L
3232-P08	●	●	32	32	170	40	32	33		CMH6R2						

↻ Applicable inserts B51 ~ B54

● : Stock item





B Clamp on System

CKJNR/L



KN□□

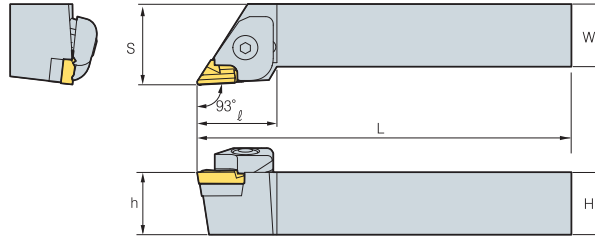

93°

• R type insert (mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Spring	Shim	Pin+Spring	Shim Screw	Wrench
CKJNR 2020-K16	●	20	20	125	25	20	32	KN□□1604□□R							
2525-M16	●	25	25	150	32	25	32								
3225-M16		32	25	150	32	32	32								
3225-P16	●	32	25	170	32	32	32								
3232-P16	●	32	32	170	40	32	32								
4040-R16	●	40	40	200	50	40	32								
CKJNL 2020-K16	●	20	20	125	25	20	32	KN□□1604□□L							
2525-M16	●	25	25	150	32	25	32								
3232-P16	●	32	32	170	40	32	32								
4040-R16		40	40	200	50	40	32								



➔ Applicable inserts B32

● : Stock item

CKNNR/L



KN□□

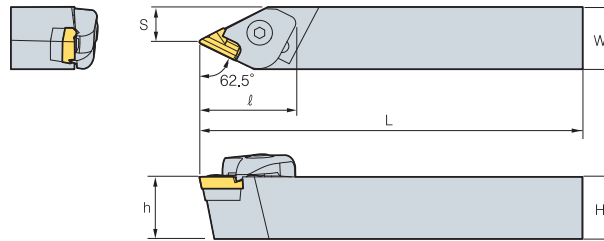

62.5°


• R type insert (mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Spring	Shim	Pin+Spring	Shim Screw	Wrench
CKNNR 2525-M16	●	25	25	150	14.3	25	37	KN□□1604□□R							
3232-P16		32	32	170	16.8	32	37								
CKNNL 2525-M16		25	25	150	14.3	25	37	KN□□1604□□L							
3232-P16	●	32	32	170	16.8	32	37								



➔ Applicable inserts B32

● : Stock item

CSDPN



SP□R

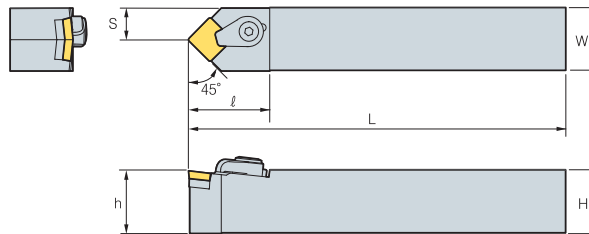

45°

• R type insert (mm)


Designation	Stock	H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	C-Ring	Wrench
CSDPN 1616-H09		16	16	100	8	16	30	SP□R 0903□□						
2525-M12	●	25	25	150	12.5	25	35	SP□R 1203□□						

➔ Applicable inserts B65 ~ B66



● : Stock item



CSKPR/L



SP□R

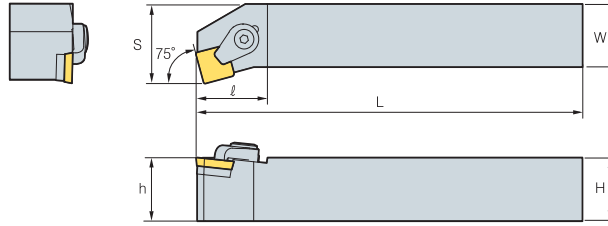

75°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	C-Ring	Wrench
	R	L													
CSKPR/L 2525-M12			25	25	150	32	20	32	SP□R 1203□□	CH6R0	CHX0622C	SS42C	SP3C	CR04C	HW30L



➔ Applicable inserts B65 ~ B66

● : Stock item

CTFPR/L



TP□R

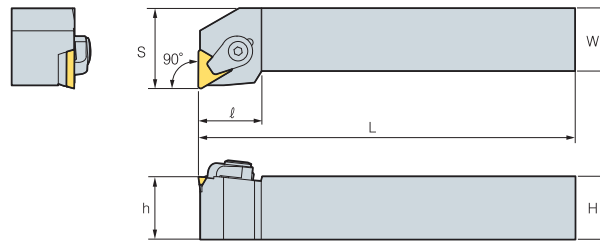

90°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	C-Ring	Wrench
	R	L													
CTFPR/L 2020-K16	●	●	25	25	125	25	20	32	TP□R 1603□□	CH6R5	CHX0622C	ST32C	SP3C	CR04C	HW30L
CTFPR/L 2525-M16	●		25	25	150	32	25	32							



➔ Applicable inserts B70 ~ B72

● : Stock item

CTGPR/L



TP□R

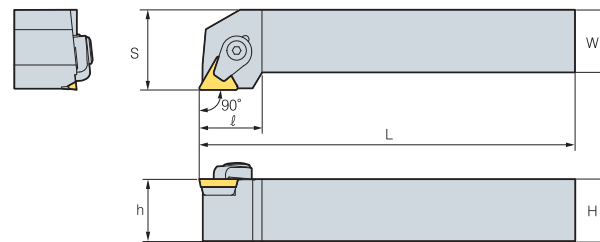

90°

• R type insert
(mm)


Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	C-Ring	Wrench
	R	L													
CTGPR/L 1212-F11	●		12	12	80	16	12	20	TP□R 1103□□	CH53R1	CHX0515C	-	-	CR03C	HW25L
CTGPR/L 1616-H11	●		16	16	100	20	16	20							
CTGPR/L 2020-K11			20	20	125	25	20	20	TP□R 1603□□	CH6R5	CHX0622C	ST32C	SP3C	CR04C	HW30L
CTGPR/L 2020-K16	●	●	20	20	125	25	20	25							
CTGPR/L 2525-M16	●	●	25	25	150	32	25	25	TP□R 2204□□	CH83R1	CHX0823C	ST43C	SP4C	CR05C	HW40L
CTGPR/L 2525-M22	●		25	25	150	32	25	32							
CTGPR/L 3232-P22			32	32	170	40	32	32							

➔ Applicable inserts B70 ~ B72



● : Stock item

B Multi Lock System

MCKNR/L



CN□□

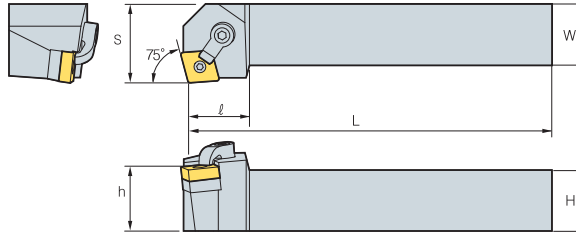

75°


• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MCKNR/L 2020-K12			20	20	125	25	20	32	CN□□1204□□	CDH6N	DHA1/4-25	SC43D	SP4D	HW31.8L HW23.8L
2525-M12	●		25	25	150	32	25	32						
3232-P12			32	32	170	40	32	32						



➔ Applicable inserts B20 ~ B25

● : Stock item

MCLNR/L



CN□□

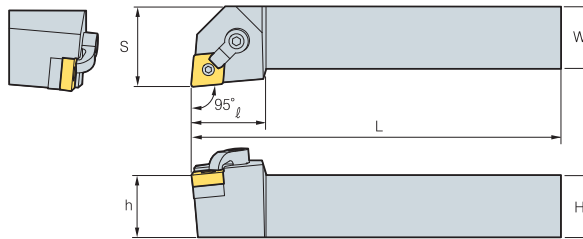

95°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MCLNR/L 1616-H09			16	16	100	20	16	25	CN□□0903□□	CDH7N	DHA10-32-19	SC32D	SP3DS	HW23.8L HW19.8L
2020-K09			20	20	125	25	20	25						
2525-M09			25	25	150	32	25	25						
2020-K12			20	20	125	25	20	32	CN□□1204□□	CDH6N	DHA1/4-25	SC43D	SP4D	HW31.8L HW23.8L
2525-M12	●		25	25	150	32	25	32						
3225-P12			32	25	170	32	32	32						
3232-P12	●		32	32	170	40	32	32	CN□□1606□□	CDH8N	DHA5/16-32	SC53D	SP5D	HW39.7L HW31.8L
2525-M16	●		25	25	150	32	25	33						
3232-P16	●		32	32	170	40	32	33						
4040-S16			40	40	250	50	40	33	CN□□1906□□	CDH8N	DHA5/16-32	SC63D	SP6D	HW39.7L HW35.7L
2525-M19			25	25	150	32	25	38						
3232-P19			32	32	170	40	32	38						
4040-S19			40	40	250	50	40	38	CN□□2507□□	CDH8N3	DHA3/8-35	SC84D	SP8D	HW39.7L HW47.6L
4040-S25			40	40	250	50	40	38						



➔ Applicable inserts B20 ~ B25

● : Stock item

MCMNN



CN□□

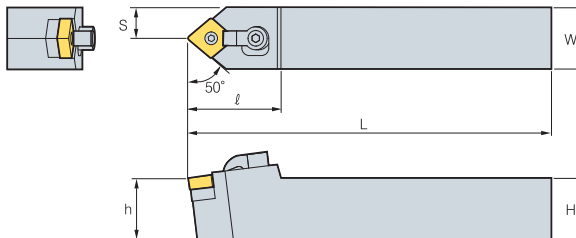

50°

• R type insert
(mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
2525-M12		25	25	150	12.5	25	32						
3232-P12		32	32	170	16	32	32						
2525-M16		25	25	150	12.5	25	40	CN□□1606□□	CDH8N	DHA5/16-32	SC53S	SP5D	HW39.7L HW31.8L
3232-P16		32	32	170	16	32	40						
3232-P19		32	32	170	16	32	40						
4040-S19		40	40	250	20	40	32	CN□□1906□□	CDH8N	DHA5/16-32	SD63D	SP6D	HW39.7L HW35.7L

➔ Applicable inserts B20 ~ B25

● : Stock item





B

Turning

MCRNR/L



CN□□

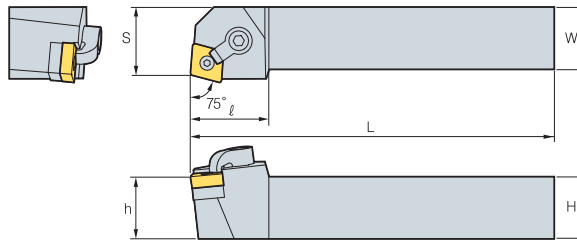

75°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MCRNR/L 2020-K12			20	20	125	22	20	32	CN□□1204□□	CDH8N1	DHA5/16-32	SC43D	SP4D	HW39.7L HW23.8L
			25	25	150	27	25	32						
			25	25	150	27	25	33						
MCRNR/L 2525-M12			25	25	150	27	25	32	CN□□1606□□	CDH8N1	DHA5/16-32	SC53D	SP5D	HW39.7L HW31.8L
			32	32	170	35	32	33						
MCRNR/L 3232-P16			32	32	170	35	32	38	CN□□1906□□	CDH8N1	DHA5/16-32	SC63D	SP6D	HW39.7L HW35.7L
MCRNR/L 4040-S19			40	40	250	43	40	38						



➔ Applicable inserts B20 ~ B25

● : Stock item

MDJNR/L



DN□□

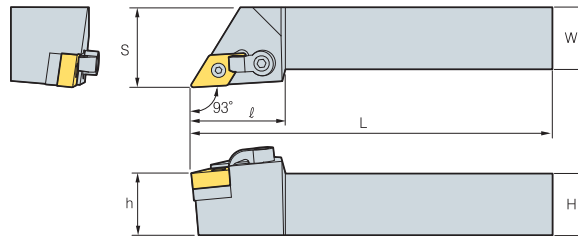

93°


• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MDJNR/L 2020-K11			20	20	125	25	20	32	DN□□1204□□	CDH6N	DHA1/4-19	SD32D	SP3D	HW31.8L HW19.8L
			25	25	150	32	25	32						
MDJNR/L 2020-K15-3	●		20	20	125	25	20	36	DN□□1504□□	CDH6N	DHA1/4-25	SD43D	SP4D	HW31.8L HW23.8L
MDJNR/L 2525-M15-3	●		25	25	150	32	25	36						
MDJNR/L 3232-P15-3			32	32	170	40	32	36						
MDJNR/L 2020-K15			20	20	125	25	20	36	DN□□1506□□	CDH6N	DHA1/4-25	SD43D	SP4DL	HW31.8L HW23.8L
MDJNR/L 2525-M15			25	25	150	32	25	36						
MDJNR/L 3232-P15			32	32	170	40	32	36						



➔ Applicable inserts B26 ~ B31

● : Stock item

MDNNN



DN□□

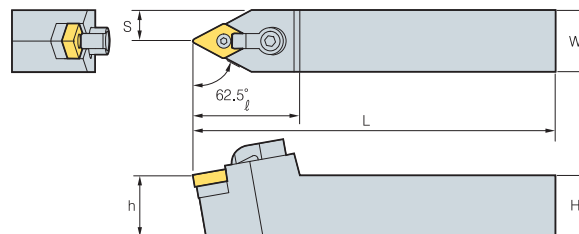

62.5°

(mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
MDNNN 2525-M15		25	25	150	12.5	25	41	DN□□1506□□	CDH8N	DHA5/16-32	SD43D	SP4DL	HW39.7L HW23.8L

➔ Applicable inserts B26 ~ B31



● : Stock item

B Multi Lock System

MDQNR/L



DN□□

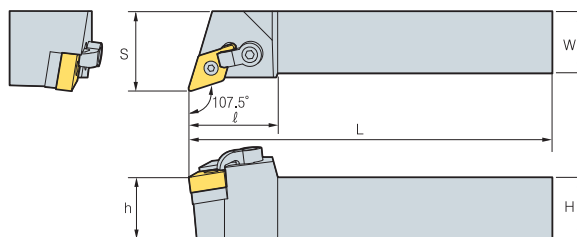

107.5°


• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MDQNR/L 2525-M15-3		●	25	25	150	32	25	36	DN□□1504□□	CDH6N	DHA1/4-25	SD43D	SP4D	HW31.8L HW23.8L
			32	32	170	40	32	36						
2525-M15	●	●	25	25	150	32	25	36	DN□□1506□□	CDH6N	DHA1/4-25	SD43D	SP4DL	HW31.8L HW23.8L
			32	32	170	40	32	36						



➔ Applicable inserts B26 ~ B31

● : Stock item

MSBNR/L



SN□□

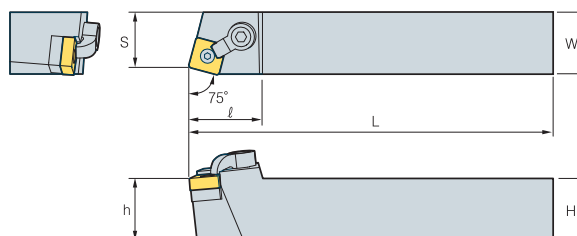

75°


• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MSBNR/L 2020-K12			20	20	125	17	20	32	SN□□1204□□	CDH8N1	DHA5/16-32	SS43D	SP4D	HW39.7L HW23.8L
			25	25	150	22	25	32						
2525-M12			25	25	150	22	25	32	SN□□1506□□	CDH8N	DHA5/16-32	SS53D	SP5D	HW39.7L HW31.8L
2525-M15			25	25	150	22	25	35						
3232-P15			32	32	170	22	32	35	SN□□1906□□	CDH8N	DHA5/16-32	SS63D	SP6D	HW39.7L HW35.7L
3232-P19			32	32	170	27	32	40						
4040-S19			40	40	250	35	40	40						



➔ Applicable inserts B33 ~ B40

● : Stock item

MSDNN



SN□□

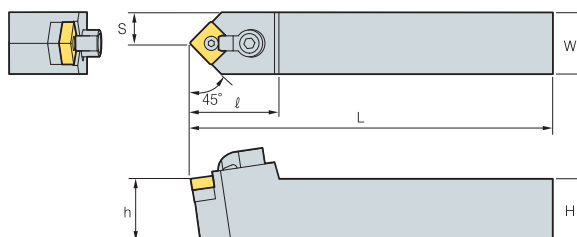

45°

(mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
2020-K09		20	20	125	10	20	28						
2020-K12		20	20	125	10	20	32	SN□□1204□□	CDH8N1	DHA5/16-32	SS43D	SP4D	HW39.7L HW23.8L
2525-M12		25	25	150	12.5	25	32						
3225-P12		32	25	170	12.5	32	32	SN□□1506□□	CDH8N	DHA5/16-32	SS53D	SP5D	HW39.7L HW31.8L
2525-M15		25	25	150	12.5	25	35						
3225-P15		32	25	170	12.5	32	35	SN□□1906□□	CDH8N	DHA5/16-32	SS63D	SP6D	HW39.7L HW35.7L
3232-P15		32	32	170	16	32	35						
4040-S15		40	40	250	20	40	35						
3232-P19		32	32	170	16	32	42						
4040-S19		40	40	250	20	40	42						

➔ Applicable inserts B33 ~ B40



● : Stock item



MSKNR/L



SN□□

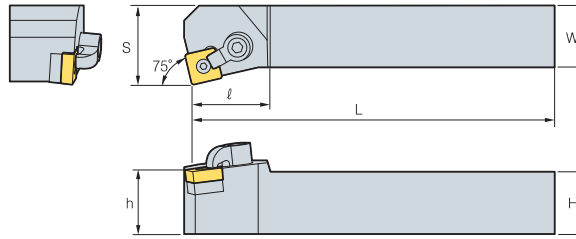

75°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MSKNR/L	1616-H09		16	16	100	20	16	28	SN□□0903□□	CDH7N	DHA10-32-19	SS32D	SP3DS	HW19.8L HW23.8L
	2020-K09		20	20	125	22	20	28						
	2020-K12		20	20	125	25	20	32						
	2525-M12		25	25	150	32	25	32	SN□□1204□□	CDH8N1	DHA5/16-32	SS43D	SP4D	HW39.7L HW23.8L
	3225-P12		32	25	170	32	32	32						
	2525-M15		25	25	150	32	25	35	SN□□1506□□	CDH8N	DHA5/16-32	SS53D	SP5D	HW39.7L HW31.8L
	3232-P15		32	32	170	40	32	35						
	3232-P19		32	32	170	40	32	40						
	4040-S19		40	40	250	50	40	40	SN□□1906□□	CDH8N	DHA5/16-32	SS63D	SP6D	HW39.7L HW35.7L
4040-S25		40	40	250	50	40	40							
			40	40	250	50	40	40	SN□□2507□□	CDH8N3	DHA3/8-35	SS84D	SP8D	HW47.6L HW39.7L



➔ Applicable inserts B33 ~ B40

● : Stock item

MSRNR/L



SN□□

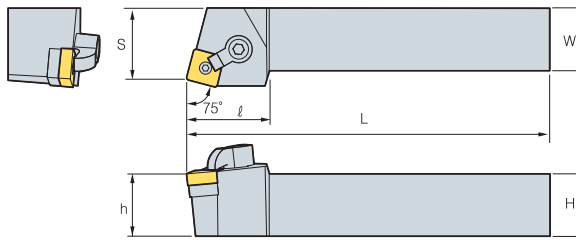

75°

• R type insert
(mm)


Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MSRNR/L	1616-H09		16	16	100	17	16	28	SN□□0903□□	CDH7N	DHA10-32-19	SS32D	SP3DS	HW19.8L HW23.8L
	2020-K09		20	20	125	22	20	28						
	2020-K12		20	20	125	22	20	32						
	2525-M12		25	25	150	27	25	32	SN□□1204□□	CDH8N1	DHA5/16-32	SS43D	SP4D	HW39.7L HW23.8L
	2525-M15		25	25	150	27	25	35						
	3232-P15		32	32	170	35	32	35	SN□□1506□□	CDH8N	DHA5/16-32	SS53D	SP5D	HW39.7L HW31.8L
	3225-P19		32	25	170	27	32	40						
	3232-P19		32	32	170	35	32	40						
	4040-S19		40	40	250	43	40	40	SN□□1906□□	CDH8N	DHA5/16-32	SS63D	SP6D	HW39.7L HW35.7L
4040-S25		40	40	250	43	40	40							
			40	40	250	43	40	40	SN□□2507□□	CDH8N3	DHA3/8-35	SS84D	SP8D	HW47.6L HW39.7L

➔ Applicable inserts B33 ~ B40



● : Stock item

B Multi Lock System

MSSNR/L



SN□□

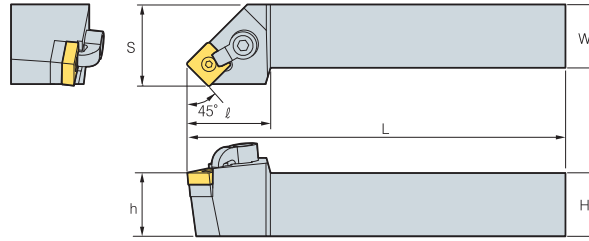

45°


• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MSSNR/L 1616-H09			16	16	100	20	16	28	SN□□0903□□	CDH7N	DHA10-32-19	SS32D	SP3DS	HW19.8L HW23.8L
2020-K09			20	20	125	25	20	28						
2020-K12			20	20	125	25	20	32	SN□□1204□□	CDH8N1	DHA5/16-32	SS43D	SP4D	HW39.7L HW23.8L
2525-M12			25	25	150	32	25	32						
2525-M15			25	25	150	32	25	35	SN□□1506□□	CDH8N1	DHA5/16-32	SS53D	SP5D	HW39.7L HW31.8L
3232-P15			32	32	170	40	32	35						
3232-P19			32	32	170	40	32	40	SN□□1906□□	CDH8N1	DHA5/16-32	SS63D	SP6D	HW39.7L HW35.7L
4040-S19			40	40	250	50	40	40						



↻ Applicable inserts B33 ~ B40

● : Stock item

MTENN



TN□□

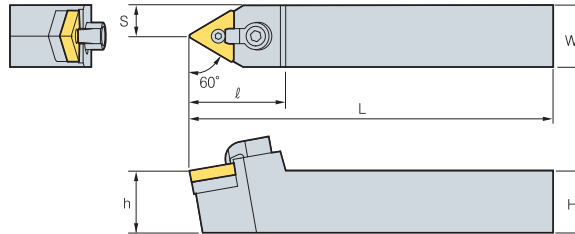

60°

(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MTENN 2020-K16			20	20	125	10	20	32	TN□□1604□□	CDH7N	DHA10-32-19	ST32D	SP3D	HW23.8L HW19.8L
2525-M16			25	25	150	12.5	25	32						
2525-M22			25	25	150	12.5	25	35	TN□□2204□□	CDH8N1	DHA5/16-32	ST43D	SP4D	HW39.7L HW23.8L
3232-P27			32	32	170	16	32	35						
4040-S33			40	40	250	20	40	40	TN□□3307□□	CDH8N	DHA5/16-32	ST63D	SP6DL	HW39.7L HW35.7L



↻ Applicable inserts B41 ~ B48

● : Stock item

MTFNR/L



TN□□

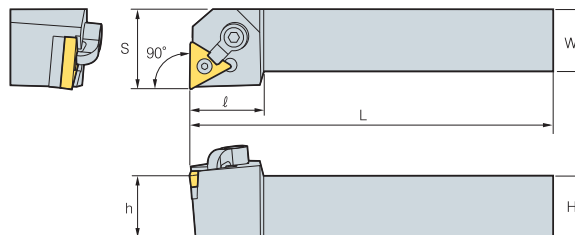

90°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MTFNR/L 1616-H16			16	16	100	20	16	32	TN□□1604□□	CDH7N	DHA10-32-19	ST32D	SP3D	HW23.8L HW19.8L
2020-K16			20	20	125	25	20	32						
2525-M16			25	25	150	32	25	32	TN□□2204□□	CDH8N1	DHA5/16-32	ST43D	SP4D	HW39.7L HW23.8L
2525-M22			25	25	150	32	25	32						
3232-P22			32	32	170	40	32	32	TN□□2706□□	CDH8N1	DHA5/16-32	ST53D	SP5D	HW39.7L HW31.8L
4040-S22			40	40	250	50	40	32						
3232-P27			32	32	170	40	32	35	TN□□2706□□	CDH8N1	DHA5/16-32	ST53D	SP5D	HW39.7L HW31.8L
4040-S27			40	40	250	50	40	35						
4040-S33			40	40	250	50	40	40	TN□□3307□□	CDH8N	DHA5/16-32	ST63D	SP6DL	HW39.7L HW35.7L

↻ Applicable inserts B41 ~ B48



● : Stock item



MTGNR/L



TN□□

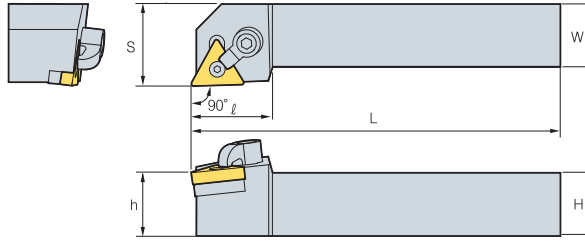

90°

• R type insert (mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MTGNR/L	1616-H16		16	16	100	20	16	32	TN□□1604□□	CDH7N	DHA10-32-19	ST32D	SP3D	HW23.8L HW19.8L
	2020-K16		20	20	125	25	20	32						
	2525-M16		25	25	150	32	25	32						
	2525-M22		25	25	150	32	25	32	TN□□2204□□	CDH8N1	DHA5/16-32	ST43D	SP4D	HW39.7L HW23.8L
	3232-P22		32	32	170	40	32	32						
	3232-P27		32	32	170	40	32	35	TN□□2706□□	CDH8N1	DHA5/16-32	ST53D	SP5D	HW39.7L HW31.8L
	4040-S27		40	40	250	50	40	35						
4040-S33		40	40	250	50	40	40	TN□□3307□□	CDH8N	DHA5/16-32	ST63D	SP6DL	HW39.7L HW35.7L	



➔ Applicable inserts B41 ~ B48

● : Stock item

MTJNR/L



TN□□

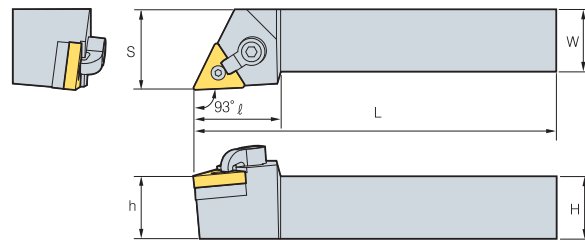

93°

• R type insert (mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MTJNR/L	2020-K16		20	20	125	25	20	32	TN□□1604□□	CDH7N	DHA10-32-19	ST32D	SP3D	HW23.8L HW19.8L
	2525-M16	●	25	25	150	32	25	32						
	2525-M22		25	25	150	32	25	32						
	3232-P22		32	32	170	40	32	32	TN□□2204□□	CDH8N1	DHA5/16-32	ST43D	SP4D	HW39.7L HW23.8L
	3232-P27		32	32	170	40	32	35						
	4040-S27		40	40	250	50	40	35	TN□□2706□□	CDH8N1	DHA5/16-32	ST53D	SP5D	HW39.7L HW31.8L
	4040-S33		40	40	250	50	40	40						



➔ Applicable inserts B41 ~ B48

● : Stock item

MVJNR/L



VN□□

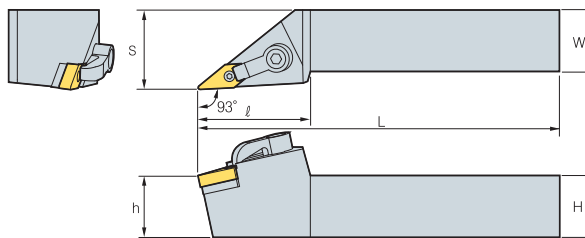

93°

• R type insert (mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MVJNR/L	2020-K16		20	20	125	25	20	37	VN□□1604□□	CDH8N2	DHA5/16-32	SV32D	SP3D	HW39.7L HW19.8L
	2525-M16		25	25	150	32	25	37						
	3232-P16		32	32	170	40	32	37						
	2525-M22		25	25	150	32	25	50	VN□□2204□□	CDH8N2	DHA5/16-32	SV43D	SP4D	HW39.7L HW23.8L
	3232-P22		32	32	170	40	32	50						
	4040-S22		40	40	250	50	40	50						

➔ Applicable inserts B49 ~ B50

● : Stock item





B Multi Lock System

MVQNR/L



VN□□

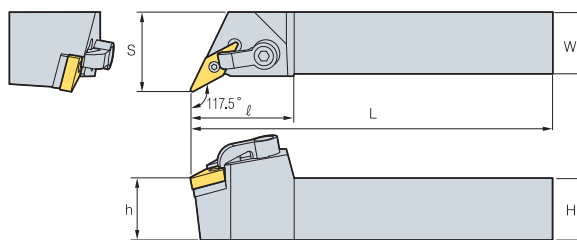

117.5°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MVQNR/L 2020-K16	●	●	20	20	125	25	20	42	VN□□1604□□	CDH8N2	DHA5/16-32	SV32D	SP3D	HW39.7L HW19.8L
2525-M16	●	●	25	25	150	32	25	42						
3232-P16			32	32	170	40	32	37						



➔ Applicable inserts B49 ~ B50

● : Stock item

MVVNN



VN□□

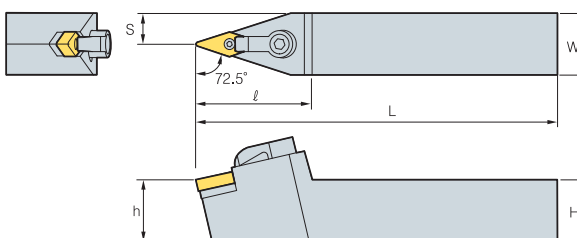

72.5°


(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MVVNN 2020-K16	●		20	20	125	25	20	42	VN□□1604□□	CDH8N2	DHA5/16-32	SV32D	SP3D	HW39.7L HW19.8L
2525-M16	●		25	25	150	32	25	42						



➔ Applicable inserts B49 ~ B50

● : Stock item

MWLNR/L



WN□□

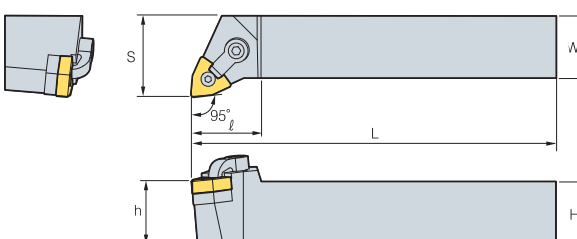

95°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Pin	Wrench
	R	L												
MWLNR/L 2020-K06			20	20	125	25	20	32	WN□□0604□□	CDH7N	DHA10-32-19	SW32D	SP3D	HW19.8L HW23.8L
2525-M06			25	25	150	32	25	32						
3232-P06			32	32	170	40	32	32						
2020-K08	●		20	20	125	25	20	32	WN□□0804□□	CDH6N	DHA1/4-21	SW43D	SP4D	HW31.8L HW23.8L
2525-M08	●	●	25	25	150	32	25	32						
3232-P08			32	32	170	40	32	32						

➔ Applicable inserts B51 ~ B54



● : Stock item



SCACR/L



CC□□

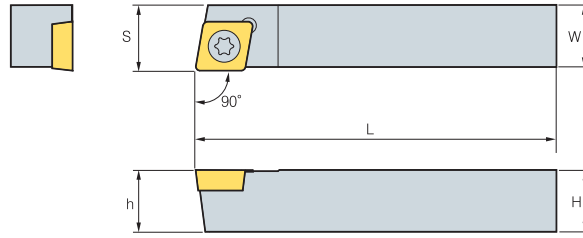

90°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench
	R	L										
SCACR/L 1010-E06		●	10	10	70	10.5	10	CC□□0602□□	FTKA02565	-	-	TW07P
1212-F09			12	12	80	12.5	12	CC□□09T3□□	FTKA03508	-	-	TW15P



➔ Applicable inserts B55 ~ B58, B80

● : Stock item

SCLCR/L



CC□□

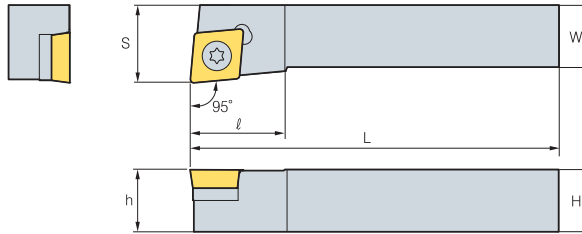

95°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	l	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
SCLCR/L 0808-D06	●	●	08	08	60	10	08	10	CC□□0602□□	FTKA02565	-	-	TW07P
1010-E06	●	●	10	10	70	16	10	10	CC□□09T3□□	FTGA03508	-	-	TW15P
1212-F09	●	●	12	12	80	20	12	16					
1616-H09	●	●	16	16	100	20	16	16	CC□□H204□□	FTGA0411F	SC42S	SHXN0610F	TW15P HW40L
2020-K09	●	●	20	20	125	25	20	16					
2020-K12	●	●	20	20	125	25	20	25					
2525-M12	●	●	25	25	150	32	25	26					



➔ Applicable inserts B55 ~ B58, B80

● : Stock item

SDACR/L



DC□□

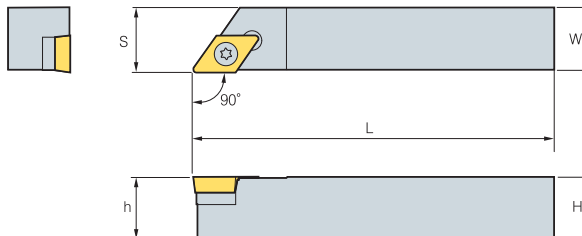

90°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench
	R	L										
SDACR/L 1010-E07			10	10	70	10.5	10	DC□□0702□□	FTKA02565	-	-	TW07P
1212-F11	●		12	12	80	12.5	12	DC□□11T3□□	FTKA03508	-	-	TW15P
1616-H11	●		16	16	100	16.5	16		FTGA03512	SD32S	SHXN0509F	TW15P, HW35L

➔ Applicable inserts B60 ~ B62, B81

● : Stock item





B Screw on System

SDJCR/L



DC□□

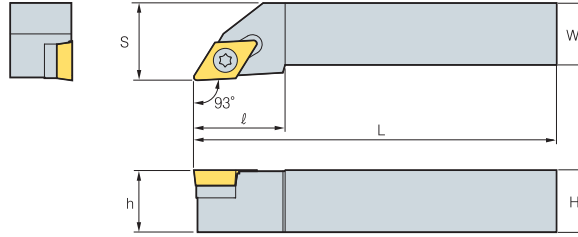

93°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
SDJCR/L	1010-E07	●	10	10	70	12	10	15	DC□□0702□□	FTKA02565	-	-	TW07P
	1212-F07	●	12	12	80	16	12	15					
	1616-H07	●	16	16	100	20	16	18					
	2020-K07	●	20	20	125	25	20	15					
	1212-F11	●	12	12	80	16	12	15	DC□□11T3□□	FTGA03512	SD32S	SHXN0509F	TW15P, HW35L
	1616-H11	●	16	16	100	20	16	24					
	2020-K11	●	20	20	125	25	20	24					
	2525-M11	●	25	25	150	32	25	29					



➤ Applicable inserts B60 ~ B62, B81

● : Stock item

SDNCN



DC□□

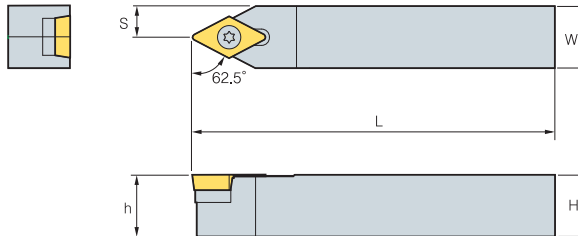

62.5°

(mm)

Designation	Stock	H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench	
												SDNCN
	1212-F07	●	12	12	80	6	12					
	1212-H11	●	12	12	100	6	12	DC□□11T3□□	FTGA03508	-	-	TW15P
	1616-H11	●	16	16	100	8	16	DC□□11T3□□	FTGA03512	SD32S	SHXN0509F	TW15P, HW35L
	2020-K11	●	20	20	125	10	20					



➤ Applicable inserts B60 ~ B62, B81

● : Stock item

SRDCN



RCGT

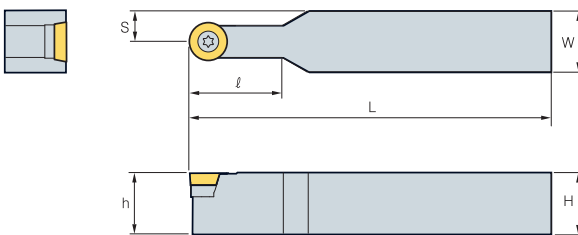

(mm)

Designation	Stock	H	W	L	S	h	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	1212-F06	●	12	12	80	6	12					
	1616-H06		16	16	100	8	16					
	2525-M06	●	25	25	150	12.5	25	RCGT 0803M0	FTNA0307	-	-	TW09P
	1616-H08	●	16	16	100	8	16					
	2020-K08		20	20	125	10	20					
	2525-M08	●	25	25	150	12.5	25	RCGT 1003M0	FTKA03511A	SR10S	SHXN0509F	TW15P HW35L
	1616-H10		16	16	100	8	16					
	2020-K10	●	20	20	125	10	25					
	2525-M10	●	25	25	150	12.5	25	RCGT 1204M0	FTGA03512	SR12S	SHXN0509F	TW15P HW35L
	2020-K12		20	20	125	10	28					
	2525-M12	●	25	25	150	12.5	28					

➤ Applicable inserts B82



● : Stock item



SRGCR/L



RCGT

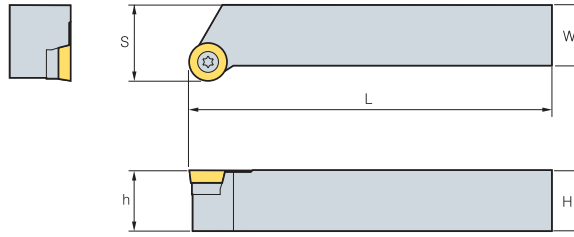

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench
	R	L										
SRGCR/L 1010-E06			10	10	70	12	10	RCGT 0602M0	FTKA02565	-	-	TW07P
	●		12	12	80	16	12					
			16	16	100	20	16					
			16	16	100	20	16					
SRGCR/L 1616-H08			16	16	100	20	16	RCGT 0803M0	FTNA0307	-	-	TW09P
			20	20	125	25	20					
			25	25	150	32	25					
SRGCR/L 2020-K10	●	●	20	20	125	25	20	RCGT 1003M0	FTKA03511A	SR10S	SHXN0509F	TW15P HW35L
			25	25	150	32	25					
	●	●	20	20	125	25	20					
	●	●	25	25	150	32	25					
SRGCR/L 2525-M12	●	●	25	25	150	32	25	RCGT 1204M0	FTGA03512	SR12S	SHXN0509F	TW15P HW35L



➔ Applicable inserts **B82**

● : Stock item

SSBCR/L



SC□□

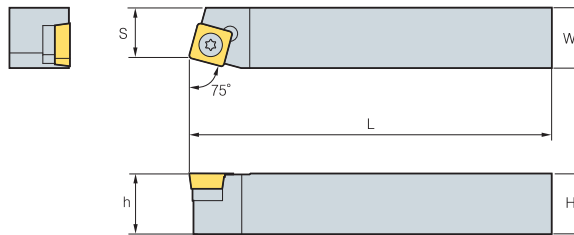

75°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench
	R	L										
SSBCR/L 1212-F09			12	12	80	11	12	SC□□09T3□□	FTGA03508	-	-	TW15P
	●		16	16	100	13	16					
			20	20	125	17	20					
SSBCR/L 1616-H09			16	16	100	13	16	SC□□1204□□	FTGA03512	SS32S	SHXN0509F	TW15P, HW35L
SSBCR/L 2020-K12			20	20	125	17	20	SC□□1204□□	FTGA0411F	SS42S	SHXN0610F	TW15P, HW40L



➔ Applicable inserts **B63, B83**

● : Stock item

SSDCN



SC□□

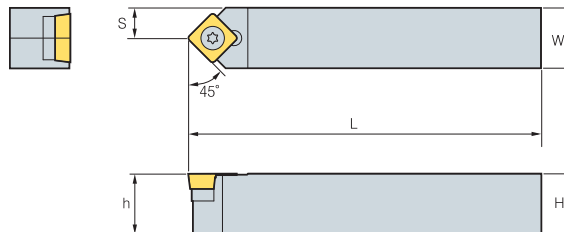

45°

(mm)

Designation	Stock	H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench
SSDCN 1212-F09	●	12	12	80	6	12	SC□□09T3□□	FTGA03508	-	-	TW15P
SSDCN 1616-H09	●	16	16	100	8	16		FTGA03512	SS32S	SHXN0509F	TW15P, HW35L

➔ Applicable inserts **B63, B83**



● : Stock item

B Screw on System

SSKCR/L



SC□□

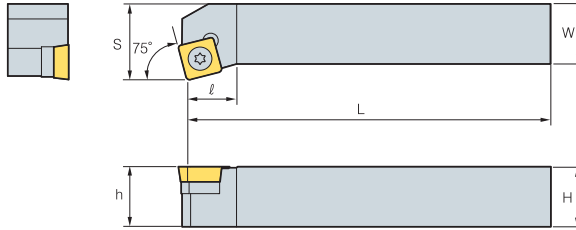

75°

• R type insert (mm)

Designation	Stock		H	W	L	S	h	l	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
SSKCR/L 1616-H09			16	16	100	20	16	13	SC□□09T3□□	FTGA03512	SS32S	SHXN0509F	TW15P, HW35L



➤ Applicable inserts B63, B83

● : Stock item

SSSCR/L



SC□□

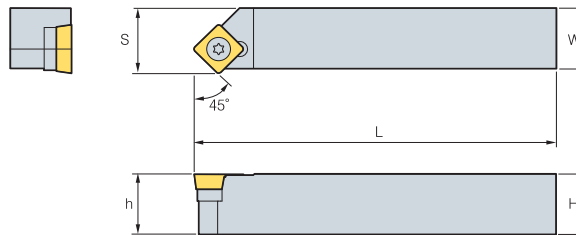

45°

• R type insert (mm)

Designation	Stock		H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench
	R	L										
SSSCR/L 1616-H09	●		16	16	100	17	16	SC□□09T3□□	FTGA03512	SS32S	SHXN0509F	TW15P, HW35L
2020-K12	●	●	20	20	125	21	20	SC□□1204□□	FTGA0411F	SS42S	SHXN0610F	TW15P, HW40L
2525-M12	●	●	25	25	150	26	25	SC□□1204□□	FTGA0411F	SS42S	SHXN0610F	TW15P, HW40L



➤ Applicable inserts B63, B83

● : Stock item

STACR/L



TC□□

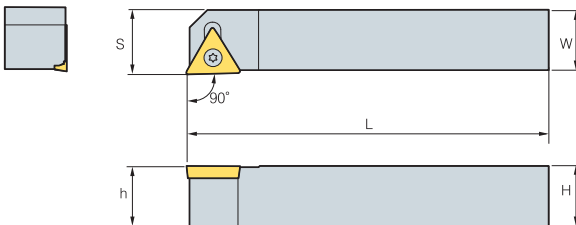

90°

• R type insert (mm)

Designation	Stock		H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench
	R	L										
STACR/L 1010-E09			10	10	70	10.5	10	TC□□0902□□	FTKA02206	-	-	TW06P
1212-F11	●		12	12	80	12.5	12	TC□□1102□□	FTKA02565	-	-	TW07P



➤ Applicable inserts B66, B79

● : Stock item

STFCR/L



TC□□

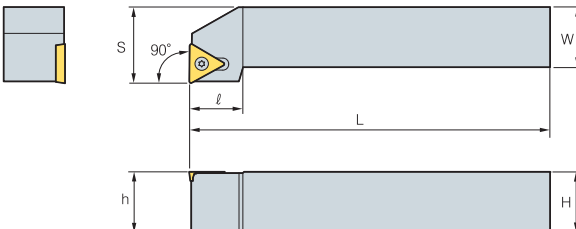

90°

• R type insert (mm)

Designation	Stock		H	W	L	S	h	l	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
STFCR/L 1010-E09			10	10	70	12	10	10	TC□□0902□□	FTKA02206	-	-	TW06P
1212-F11	●		12	12	80	16	12	14	TC□□1102□□	FTKA02565	-	-	W07P
1616-H11	●		16	16	100	20	16	14	TC□□16T3□□	FTGA03512	ST32S	SHXN0509F	TW15P, HW35L
1616-H16			16	16	100	20	16	19					
2020-K16	●	●	20	20	125	25	20	19					
2525-M16	●	●	25	25	150	32	25	25.2	TC□□16T3□□	FTGA03512	ST32S	SHXN0509F	TW15P, HW35L

➤ Applicable inserts B67 ~ B69, B84

● : Stock item





B

Turning

STGCR/L



TC□□

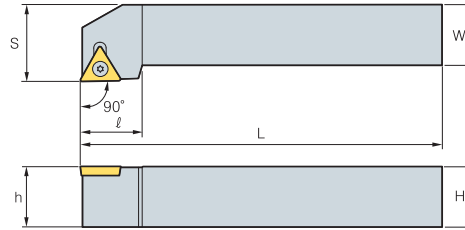

90°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
STGCR/L	0808-D09		08	08	60	10	08	11	TC□□0902□□	FTKA02206	-	-	TW06P
	1010-E09	●	10	10	70	12	10	11					
	1212-F11	●	12	12	80	16	12	14	TC□□1102□□	FTKA02565	-	-	TW07P
	1616-H11	●	16	16	100	20	16	16					
	1616-H16	●	16	16	100	20	16	21	TC□□16T3□□	FTGA03512	ST32S	SHXN0509F	TW15P, HW35L
2020-K16	●	20	20	125	25	20	21						
2525-M16	●	25	25	150	32	25	21						



➔ Applicable inserts B67 ~ B69, B84

● : Stock item

STTCR/L



TC□□

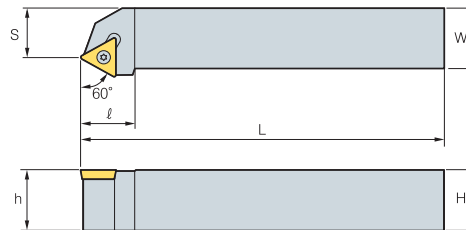

60°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
STTCR/L	1616-H11		16	16	100	13	16	14	TC□□1102□□	FTKA02565	-	-	TW07P
	1616-H16		16	16	100	13	16	19					
	2020-K16		20	20	125	17	20	19	TC□□16T3□□	FTGA03512	ST32S	SHXN0509F	TW15P, HW35L



➔ Applicable inserts B67 ~ B69, B84

● : Stock item

SVABR/L



VB□□

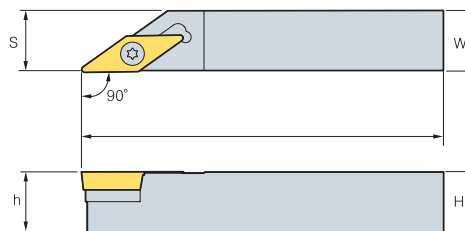

90°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench
	R	L										
SVABR/L	1616-H16		16	16	100	16.5	16	VB□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P, HW35L
	2020-K16		20	20	125	20.5	20					

➔ Applicable inserts B73 ~ B74, B85



● : Stock item

B Screw on System

SVHBR/L



VB□□

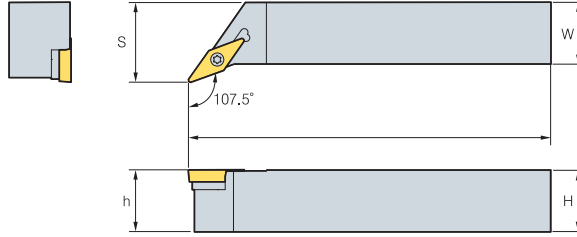

107.5°
• R type insert
(mm)

Designation	Stock		H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench
	R	L										
SVHBR/L 2525-M16	●	●	25	25	150	32	25	VB□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P, HW35L
3225-P16	●	●	32	25	170	32	32					



➤ Applicable inserts B73 ~ B74, B85

● : Stock item

SVJBR/L



VB□□

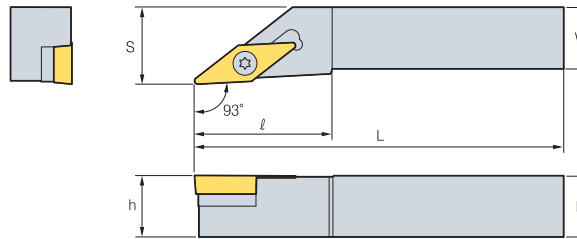

93°
• R type insert
(mm)

Designation	Stock		H	W	L	S	h	l	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
SVJBR/L 1212-F11	●	●	12	12	80	16	12	27	VB□□1102□□	FTKA02565	-	-	TW07P
1616-H11	●		16	16	100	20	16	27					
2020-K11	●	●	20	20	125	25	20	27					
1616-H16	●		16	16	100	20	16	36	VB□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P, HW35L
2020-K16	●	●	20	20	125	25	20	41					
2525-M16	●	●	25	25	150	32	25	41	VB□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P, HW35L
3225-P16	●	●	32	25	170	32	32	55					
3232-P16	●		32	32	170	40	33	55					



➤ Applicable inserts B73 ~ B74, B85

● : Stock item

SVJCR/L



VC□□

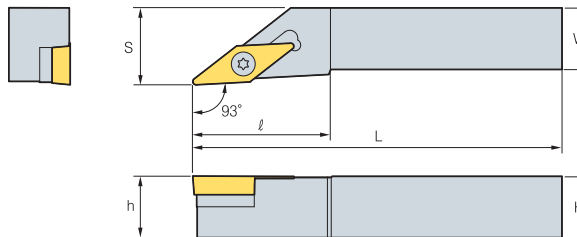

93°
• R type insert
(mm)

Designation	Stock		H	W	L	S	h	l	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
SVJCR/L 1212-F11	●		12	12	80	16	12	25	VC□□1103□□	FTKA02565	-	-	TW07P
1616-H11	●		16	16	100	20	16	25					
2020-K11	●	●	20	20	125	25	20	25					
1212-F13			12	12	80	16	12	32	VC□□1303□□	FTKA0307	-	-	TW09P
1616-H13			16	16	100	20	16	32					
2020-K13	●		20	20	125	25	20	32					
1616-H16			16	16	100	20	16	40	VC□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P, HW35L
2020-K16	●	●	20	20	125	25	20	40					
2525-M16	●	●	25	25	150	32	25	40					

➤ Applicable inserts B75 ~ B76, B86



● : Stock item



SVVBN



VB□□

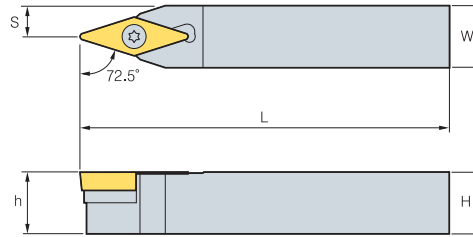

72.5°

(mm)

Designation	Stock	H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench	
SVVBN	1212-F11	●	12	12	80	6	VB□□1102□□	FTKA02565	-	-	TW07P	
	1616-H11		16	16	100	8						16
	2020-K11	●	20	20	125	10						20
SVVBN	1616-H16	●	16	16	100	8	VB□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P, HW35L	
	2020-K16	●	20	20	125	10						20
	2525-M16	●	25	25	150	12.5						25
	3225-P16	●	32	25	170	12.5						32



↪ Applicable inserts B73 ~ B74, B85

● : Stock item

SVVCN



VC□□

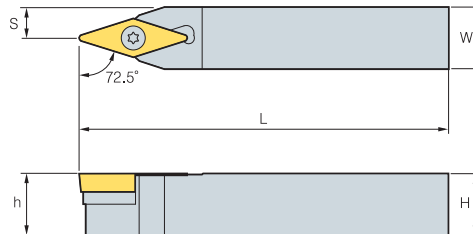

72.5°

(mm)

Designation	Stock	H	W	L	S	h	Insert	Screw	Shim	ShimScrew	Wrench	
SVVCN	1212-F11	●	12	12	80	6	VC□□1103□□	FTKA02565	-	-	TW07P	
	1616-H11		16	16	100	8						16
	2020-K11	●	20	20	125	10						20
SVVCN	1212-F13		12	12	80	6	VC□□1303□□	FTNA0307	-	-	TW09P	
	1616-H13		16	16	100	8						16
	2020-K13		20	20	125	10						20
	1616-H16		16	16	100	8						16
SVVCN	2020-K16	●	20	20	125	10	VC□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P HW35L	
	2525-M16	●	25	25	150	12.5						25



↪ Applicable inserts B75 ~ B76, B86

● : Stock item

SWACR/L



WC□□

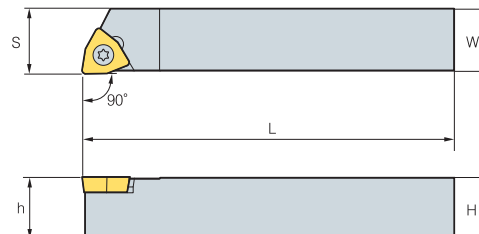

90°

• R type insert

(mm)

Designation	Stock		H	W	L	S	h	Insert	Screw	Wrench
	R	L								
SWACR/L	1010-E04		10	10	70	10.1	10	WC□□0402□□	FTKA02565	TW07P
	1212-F04		12	12	80	12.1	12			
	1616-H06		16	16	100	16.1	16	WC□□06T3□□	FTGA03508	TW15P
	2020-K08		20	20	125	20.1	20	WC□□0804□□	FTGA0411F	TW15P

↪ Applicable inserts B78



● : Stock item

B Ceramic Holder

CCLNR/L



CN□N

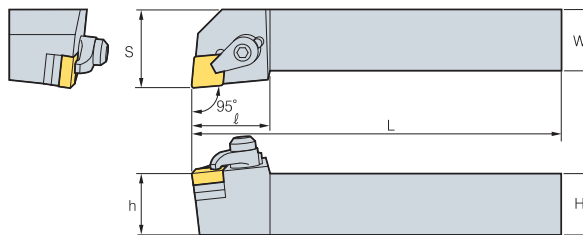

95°

• R type insert

(mm)



Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	Screw	Shim	Spring	Wrench
	R	L												
CCLNR/L 2525-M12C	●		25	25	150	32	25	32	CN□N 1204□□ 1207□□	CH6R3	MHX0630 SHX0310	SC42CC	SR3	HW40L HW20L

● : Stock item

CRDNN



RN□N

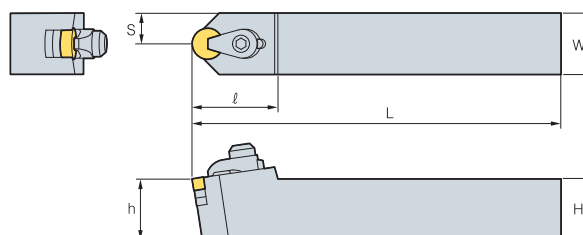

(mm)



Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	Screw	Shim	Spring	Wrench
	R	L												
CRDNN 2525-M12C	●		25	25	150	12.5	25	35	RN□N 1204□□ 1207□□	CH6R3	MHX0630 SHX0310	SC42CC	SR3	HW40L HW20L

● : Stock item

CRGNR/L



RN□N

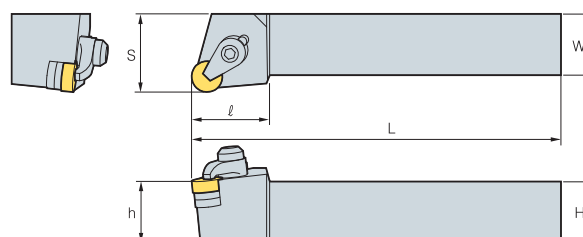


• R type insert

(mm)



Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	Screw	Shim	Spring	Wrench
	R	L												
CRGNR/L 2525-M12C	●		25	25	150	32	25	32	RN□N 1204□□ 1207□□	CH6R3	MHX0630 SHX0310	SR42CC	SR3	HW40L HW20L

● : Stock item

CSDNN



SN□N

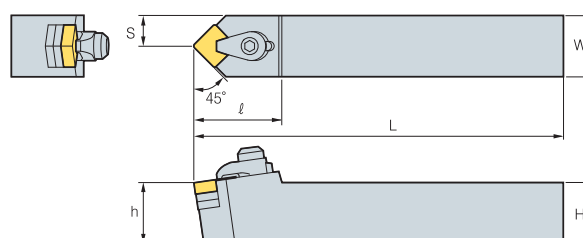

45°


(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	Screw	Shim	Spring	Wrench
	R	L												
CSDNN 2525-M12C	●		25	25	125	12.5	25	35	SN□N 1204□□ 1207□□	CH6R3	MHX0630 SHX0310	SS42CC	SR3	HW40L HW20L



● : Stock item



CSKNR/L



SN□N

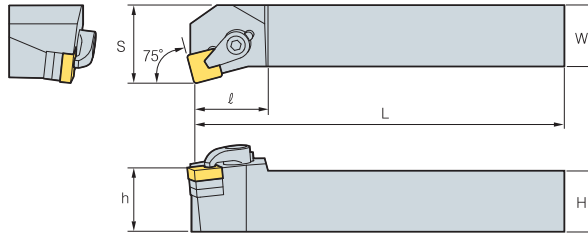


75°

• R type insert
(mm)



Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	Screw	Shim	Spring	Wrench
	R	L												
CSKNR/L 2525-M12C	●		25	25	150	32	25	28	SN□N 1204□□ 1207□□	CH6R3	MHX0630 SHX0310	SR42CC	SR3	HW40L HW20L

● : Stock item

CTFNR/L



TN□N

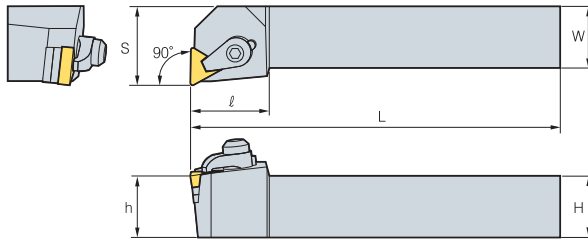

90°

• R type insert
(mm)



Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	Screw	Shim	Spring	Wrench
	R	L												
CTFNR/L 2525-M16C	●		25	25	150	32	25	32	TN□N 1604□□ 1607□□	CH6R3	MHX0630 SHX0310	ST32CC	SR3	HW40L HW20L

● : Stock item

CTGNR/L



TN□N

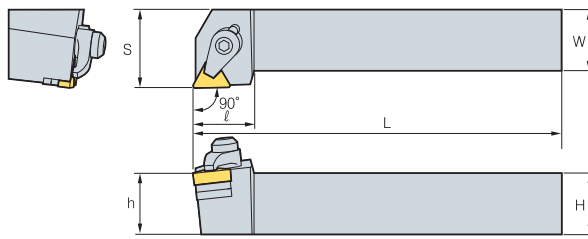

90°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Clamp	Screw	Shim	Spring	Wrench
	R	L												
CTGNR/L 2525-M16C	●		25	25	150	32	25	32	TN□N 1604□□ 1607□□	CH6R3	MHX0630 SHX0310	ST32CC	SR3	HW40L HW20L

● : Stock item



Note) Generally, two shims are clamped to a Ceramic Holder.

However, only one shim is used in clamping 1207□□ and 1607□□ sized inserts.

B Boring Bar Code System(ISO)

S 12 M - S T F P R - 11

1

2

3

4

5

6

7

8

9

Type of Bar

Bar Diameter

Bar Length

Method of Mounting Insert

Insert Shape

Lead Angle of Boring Bar

Relief Angle of Insert

Hand of Bar

Length of Cutting Edge

1

Type of Bar


S 12 M - S T F P R - 11

- "A" Steel with coolant hole
- "E" Carbide bar with fixed steel head and coolant hole
- "C" Carbide shank
- "S" Steel shank
- "X" Special type

2

Bar Diameter

S 12 M - S T F P R - 11



3

Bar Length


S 12 M - S T F P R - 11

length(L) (mm)	
H	100
J	110
K	125
M	150
N	160
Q	180
R	200
S	250
T	300
U	350
V	400
W	450
Y	500

4

Method of Mounting Insert


S 12 M - S T F P R - 11

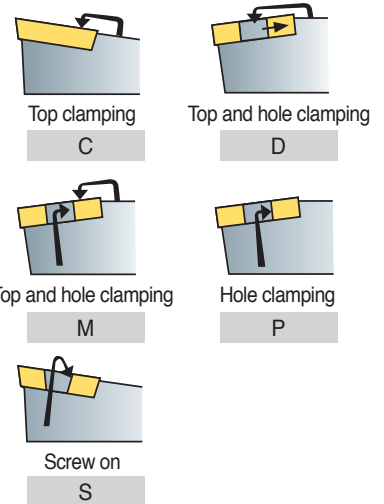

5

Insert Shape


S 12 M - S T F P R - 11



6

Lead Angle of Boring Bar


S 12 M - S T F P R - 11

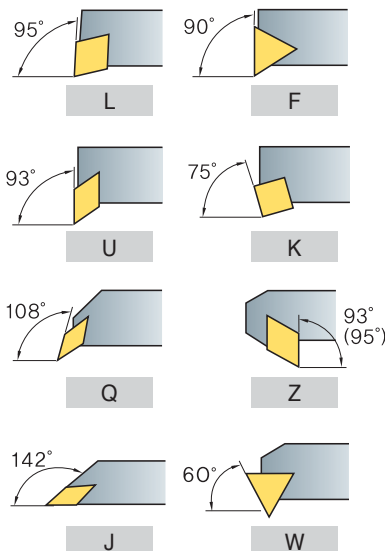

7

Relief Angle of Insert


S 12 M - S T F P R - 11

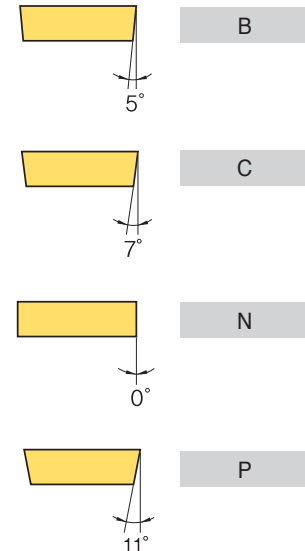

8

Hand of Bar


S 12 M - S T F P R - 11



9

Length of Cutting Edge

S 12 M - S T F P R - 11

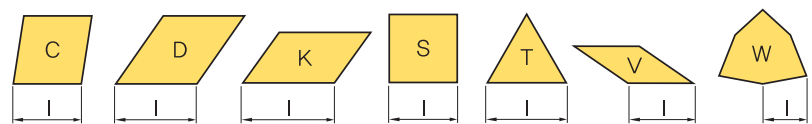

Double Clamp System

Cutting Shape								
Designation	DCLNR/L	DDUNR/L	DSKNR/L	DTFNR/L	DWLNR/L			
Approach angle	95°	93°	75°	90°	95°			
Page	B136	B136	B136	B137	B137			
Copying		●						
Facing	●				●			
Back turning		●						
Turning	●	●	●	●	●			

Lever Lock System

Cutting Shape								
Designation	PCLNR/L	PDSNR/L	PDUNR/L	PSKNR/L	PTFNR/L	PWLNR/L		
Approach angle	95°	62.5°	93°	75°	90°	95°		
Page	B138	B138	B139	B139	B140	B140		
Copying		●	●					
Facing	●					●		
Back turning		●	●			●		
Turning	●	●	●	●	●	●		

Clamp on System

Cutting Shape								
Designation	CKUNR/L	CSKPR/L	CTFPR/L					
Approach angle	93°	75°	90°					
Page	B141	B141	B141					
Copying								
Facing								
Back turning	●							
Turning	●	●	●					

Multi Lock System

Cutting Shape								
Designation	MCLNR/L	MDUNR/L	MSKNR/L	MTFNR/L	MVUNR/L	MWLNR/L		
Approach angle	95°	93°	75°	90°	93°	95°		
Page	B142	B142	B142	B143	B143	B143		
Copying		●			●			
Facing	●					●		
Back turning		●			●			
Turning	●	●	●	●	●	●		

Screw on System

Cutting Shape								
Designation	SCLCR/L	SCLPR/L	SDQCR/L	SDUCR/L	SDZCR/L	SSKCR/L	SSKPR/L	STFCR/L
Approach angle	95°	95°	107.5°	93°	3°	75°	75°	90°
Page	B142	B142	B145	B145	B146	B146	B146	B147
Copying			●	●				
Facing	●	●						
Back turning			●	●	●			
Turning	●	●	●	●	●	●	●	●

Cutting Shape								
Designation	STFPR/L	STWPR/L	SVJCR/L	SVQBR/L	SVQCR/L	SVUBR/L	SVUCR/L	SWLCR/L
Approach angle	90°	60°	142°	108°	108°	93°	93°	95°
Page	B147	B147	B148	B148	B148	B149	B149	B149
Copying			●	●	●	●	●	●
Facing								
Back turning				●	●	●	●	●
Turning	●	●	●	●	●	●	●	●

Compact Mini

Cutting Shape								
Designation	SCLCR/L	STUBR/L	STUPR/L	SWUBR/L				
Approach angle	95°	93°	93°	93°				
Page	B150	B150	B150	B150				
Copying								
Facing	●	●						
Back turning			●					
Turning	●	●	●	●				

Carbide Shank Boring Bar

Designation	SCLCR/L	SCLPR/L	SDQCR/L	SDUCR/L	STFCR/L
Approach angle	95°	95°	107.5°	93°	91°
Page	B151	B152	B152	B153	B153

Designation	STFPR/L	STUBR/L	STUPR/L	SWUBR/L	-
Approach angle	91°	93°	93°	93°	-
Page	B154	B154	B155	B155	-


Sleeve

Shape	
Designation	SL
Page	B196




Instructions of Boring Bar assembly


Double Clamp System

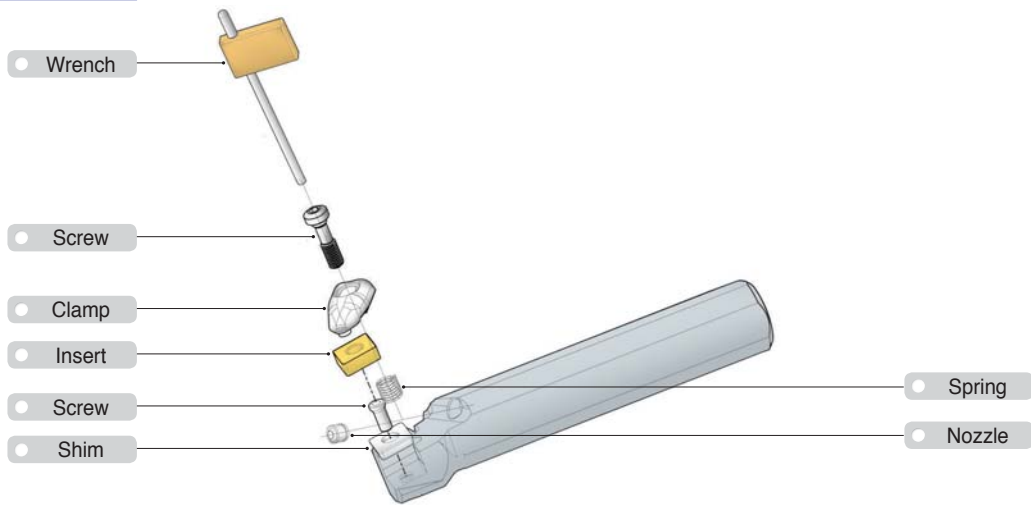


Lever Lock System

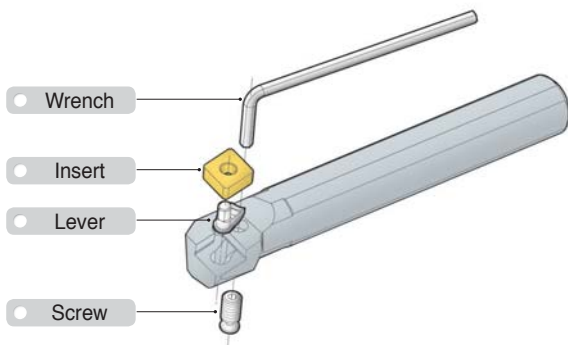


Clamp on System

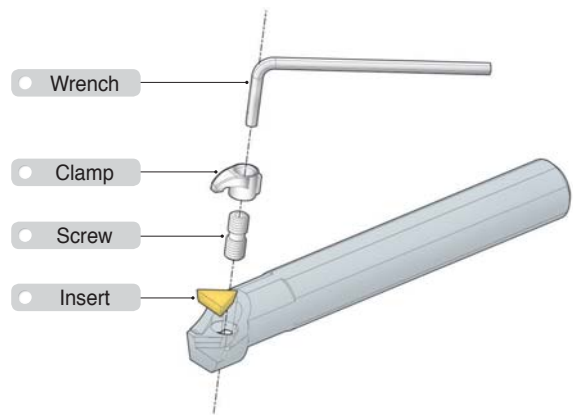

Multi Lock System

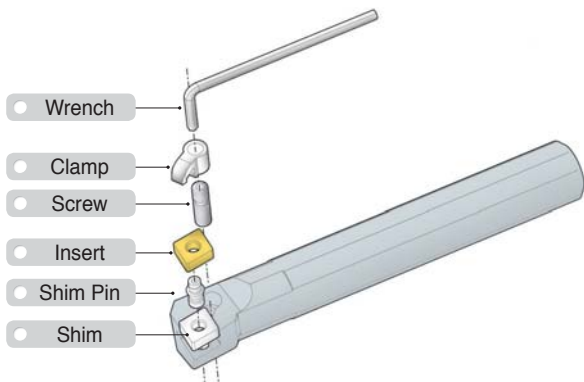

Screw on System


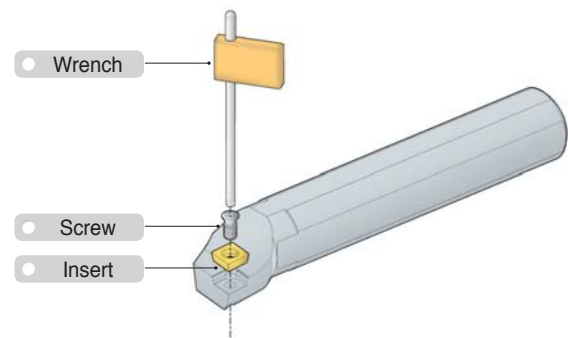


B Double Clamp System

DCLNR/L



CN□□

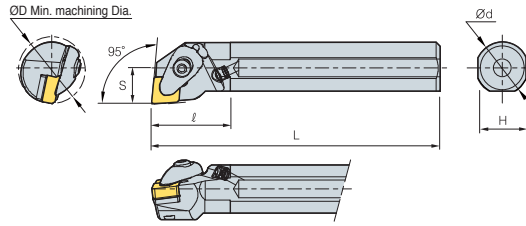

95°

• R type insert

(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Nozzle	Wrench
	R	L														
A25R-DCLNR/L-09			32	25	23	200	17	27	CN□□0903□□	CVH3	CHX0415	SC32V	FTKA0307	SPR0510	CN0605	HW25P
A25R-DCLNR/L-12	●	●	32	25	23	200	17	28	CN□□1204□□	CVH4	CHX0518	SC42V	FTKA0410	SPR0714	CN0605	HW30P
A32S-DCLNR/L-12	●		40	32	30	250	22	27								
A40T-DCLNR/L-12	●		50	40	37	300	27	30								
A50U-DCLNR/L-116			63	50	47	350	35	40	CN□□1604□□	CVH5	CHX0622	SC54V	FTNA0511	SPR0811	CN0605	HW40L



↻ Applicable inserts, see pages B20~B25

● : Stock item

DDUNR/L



DN□□

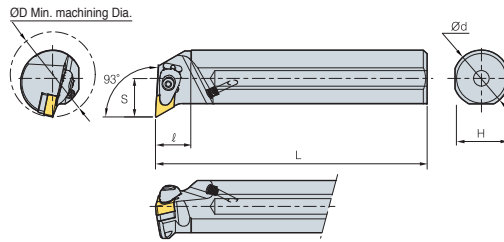

93°

• R type insert

(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Nozzle	Wrench
	R	L														
A40T-DDUNR/L-15	●		50	40	37	300	27	25	DN□□1506□□	CVH4	CHX0518	SD43V	FTKA0410	SPR0714	CN0605	HW30P
A50U-DDUNR/L-15		●	63	50	47	350	35	30								
A40T-DDUNR/L-15 -3			50	40	37	300	27	25	DN□□1504□□	CVH4	CHX0518	SD44V	FTKA0410	SPR0714	CN0605	HW30P
A50U-DDUNR/L-15 -3			63	50	47	350	35	30								



↻ Applicable inserts, see pages B26~B31

● : Stock item

DSKNR/L



SN□□

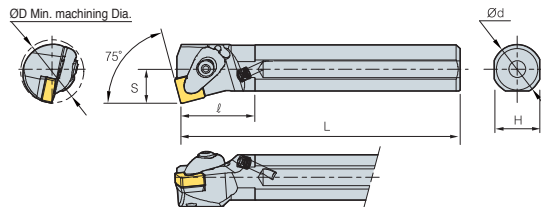

75°

• R type insert


(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Nozzle	Wrench
	R	L														
A25R-DSKNR/L-09	●	●	32	25	23	200	17	27	SN□□0903□□	CVH3	CHX0415	SS32V	FTKA0307	SPR0510	CN0605	HW25P
A25R-DSKNR/L-12		●	32	25	23	200	17	28	SN□□1204□□	CVH4	CHX0518	SS42V	FTKA0410	SPR0714	CN0605	HW30P
A32S-DSKNR/L-12	●		40	32	30	250	22	28								
A40T-DSKNR/L-12			50	40	37	300	27	28								



↻ Applicable inserts, see pages B33~B40



DTFNR/L



TN□□

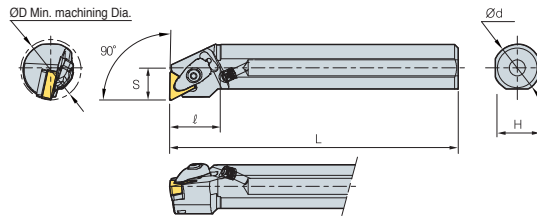

90°

• R type insert

(mm)

Designation	Stock		ØD	Ød	H	L	S	l	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Nozzle	Wrench
	R	L														
A25R-DTFNR/L-16	●	●	32	25	23	200	17	27	TN□□1604□□	CVH3	CHX0415	ST32V	FTKA0307	SPR0510	CN0605	HW25P
A32S-DTFNR/L-16	●		40	32	30	250	22	27	TN□□1604□□	CVH3	CHX0415	ST32V	FTKA0307	SPR0510	CN0605	HW25P
A40T-DTFNR/L-22	●		50	40	37	300	27	33	TN□□2204□□	CVH4	CHX0518	ST44V	FTKA0410	SPR0714	CN0605	HW30P
A50U-DTFNR/L-22	●		63	50	47	350	35	33	TN□□2204□□	CVH4	CHX0518	ST44V	FTKA0410	SPR0714	CN0605	HW30P



↻ Applicable inserts, see pages B41~B48

● : Stock item

DWLNR/L



WN□□

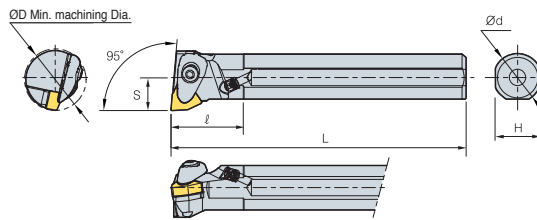

95°

• R type insert

(mm)

Designation	Stock		ØD	Ød	H	L	S	l	Insert	Clamp	ClampScrew	Shim	Shim Screw	Spring	Nozzle	Wrench
	R	L														
A25R-DWLNR/L-06	●		32	25	23	200	17	19	WN□□0604□□	CVH3	CHX0415	SW32V	FTKA0307	SPR0510	CN0605	HW25P
A32S-DWLNR/L-06	●		40	32	30	250	22	20		CVH3	CHX0415	SW32V	FTKA0307	SPR0510	CN0605	HW25P
A40T-DWLNR/L-06			50	40	37	300	27	25		CVH3	CHX0415	SW32V	FTKA0307	SPR0510	CN0605	HW25P
A25R-DWLNR/L-08	●		33	25	23	200	17	20	WN□□0804□□	CVH4	CHX0518	SW42V	FTKA0410	SPR0714	CN0605	HW30P
A32S-DWLNR/L-08	●	●	40	32	30	250	22	24		CVH4	CHX0518	SW42V	FTKA0410	SPR0714	CN0605	HW30P
A40T-DWLNR/L-08	●		50	40	37	300	27	25		CVH4	CHX0518	SW42V	FTKA0410	SPR0714	CN0605	HW30P
A50U-DWLNR/L-08	●	●	63	50	47	350	35	32		CVH4	CHX0518	SW42V	FTKA0410	SPR0714	CN0605	HW30P


↻ Applicable inserts, see pages B51~B54

● : Stock item



Features of Double Clamp (Boring bar)

Longer tool life and excellent surface finish can be achieved with the adjustable Coolant Nozzle





B Lever Lock System

PCLNR/L



CN□□

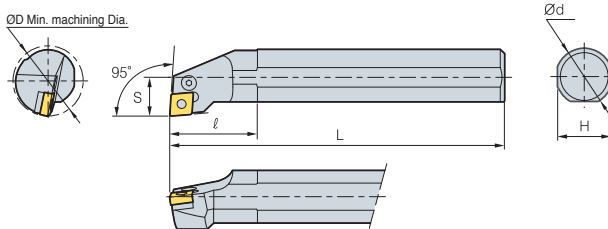


• R type insert 95° (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Lever	Screw	Shim	Shim pin	Shim pin Punch	Wrench
	R	L													
S16R-PCLNR/L-09	●	●	20	16	15	200	11	28	CN□□0903□□	LV3C	VHX0509B	-	-	-	HW20L
S20S-PCLNR/L-09	●	●	25	20	18	250	13	32		LV4A	VHX0613A	-	-	-	HW25L
S25R-PCLNR/L-09	●		32	25	23	200	17	36	CN□□1204□□	LV4	VHX1027	SC63	SP6	LSPS6	HW30L
S25R-PCLNR/L-12	●	●	32	25	23	200	17	40		LV4	VHX1027	SC63	SP6	LSPS6	HW40L
S32S-PCLNR/L-12	●	●	40	32	30	250	22	50		LV4A	VHX0613A	-	-	-	HW25L
S40T-PCLNR/L-12	●	●	50	40	37	300	27	55		LV4	VHX0821	SC42B	SP4	LSPS4	HW30L
S50U-PCLNR/L-12	●	●	63	50	47	350	35	55	CN□□1906□□	LV6	VHX1027	SC63	SP6	LSPS6	HW40L
S50U-PCLNR/L-19	●	●	70	50	47	350	35	63	LV4A	VHX0613A	-	-	-	HW25L	
A25R-PCLNR/L-12	●		32	25	24	200	17	40	CN□□1204□□	LV4	VHX0821	SC42B	SP4	LSPS4	HW30L
A32S-PCLNR/L-12			44	32	31	250	22	50		LV4	VHX0821	SC42B	SP4	LSPS4	HW30L
A40T-PCLNR/L-12			50	40	37	300	27	60							
S16R-PCLNR/L-09N			20	16	15	200	11	25	CN□□0903□□	LV3CN	VHX0509BN	-	-	-	HW20L
S20S-PCLNR/L-09N			25	20	18	250	13	25		LV4AN	VHX0613N	-	-	-	HW25L
S25R-PCLNR/L-09N			32	25	23	200	17	25	CN□□1204□□	LV4AN	VHX0613N	-	-	-	HW25L
S25R-PCLNR/L-12N	●		32	25	23	200	17	25		LV4AN	VHX0613N	-	-	-	HW25L
S25T-PCLNR/L-12N	●		32	25	23	300	17	25		LV4N	VHX0817N	SC42N	SP4N	LSPS4	HW30L
S32S-PCLNR/L-12N			40	32	30	250	22	30		LV4AN	VHX0820N	SC42N	SP4N	LSPS4	HW30L
S32U-PCLNR/L-12N	●		40	32	30	350	22	30	CN□□1906□□	LV4N	VHX0820N	SC42N	SP4N	LSPS4	HW30L
S40T-PCLNR/L-12N			50	40	37	300	27	30		LV4N	VHX0820N	SC42N	SP4N	LSPS4	HW30L
S50U-PCLNR/L-12N			63	50	47	350	35	30	LV4N	VHX0820N	SC42N	SP4N	LSPS4	HW30L	
S50U-PCLNR/L-19N			63	50	47	350	35	30	CN□□1906□□	LV6N	VHX1027N	SC63N	SP6N	LSPS6	HW40L
A16R-PCLNR/L-09N			20	16	15	200	11	28	CN□□0903□□	LV3CN	VHX0509BN	-	-	-	HW20L
A20S-PCLNR/L-09N			25	20	18	250	13	25		LV4AN	VHX0613N	-	-	-	HW25L
A25R-PCLNR/L-09N			32	25	23	200	17	25	CN□□1204□□	LV4AN	VHX0613N	-	-	-	HW25L
A25R-PCLNR/L-12N			32	25	23	200	17	25		LV4N	VHX0817N	SC42N	SP4N	LSPS4	HW30L
A32R-PCLNR/L-12N			40	32	30	250	22	30		LV4AN	VHX0820N	SC42N	SP4N	LSPS4	HW30L
A40T-PCLNR/L-12N			50	40	37	300	27	30		LV4N	VHX0820N	SC42N	SP4N	LSPS4	HW30L
A50U-PCLNR/L-12N			63	50	47	350	35	30	CN□□1906□□	LV4N	VHX0820N	SC42N	SP4N	LSPS4	HW30L
A50U-PCLNR/L-19N			63	50	47	350	35	30		LV6N	VHX1027N	SC63N	SP6N	LSPS6	HW40L



↻ Applicable inserts, see pages B20~B25

● : Stock item

PDSNR/L



DN□□

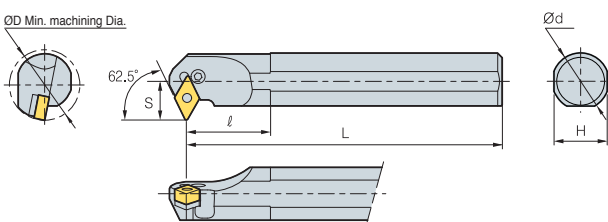

• R type insert 62.5° (mm)


Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Lever	Screw	Shim	Shim pin	Shim pin Punch	Wrench
	R	L													
S32S-PDSNR/L-15	●	●	40	32	30	250	22	45	DN□□1506□□	LV4B	VHX0821	SD42	SP4	LSPS4	HW30L
S40T-PDSNR/L-15	●	●	50	40	37	300	27	43		LV4B	VHX0821	SD42	SP4	LSPS4	HW30L
S32S-PDSNR/L-15-3			40	32	30	450	22	45	DN□□1504□□	LV4	VHX0821	SD42	SP4	LSPS4	HW30L
S40T-PDSNR/L-15-3			50	40	37	300	27	43		LV4	VHX0821	SD42	SP4	LSPS4	HW30L
A32S-PDSNR/L-15			40	32	31	250	22	45	DN□□1506□□	LV4B	VHX0821	SD42	SP4	LSPS4	HW30L
A32S-PDSNR/L-15-3			40	32	31	250	22	45	DN□□1504□□	LV4	VHX0821	SD42	SP4	LSPS4	HW30L
S32S-PDSNR/L-15N			40	32	30	250	22	15	DN□□1506□□	LV4BN	VHX0821	SD42N	SP4N	LSPS4	HW30L
S40T-PDSNR/L-15N			50	40	37	300	27	15		LV4BN	VHX0821	SD42N	SP4N	LSPS4	HW30L
S32S-PDSNR/L-15-3N			40	32	30	250	22	15	DN□□1504□□	LV4BN	VHX0821	SD42N	SP4N	LSPS4	HW30L
S40T-PDSNR/L-15-3N			50	40	37	300	27	15		LV4BN	VHX0821	SD42N	SP4N	LSPS4	HW30L
A32S-PDSNR/L-15N			40	32	30	250	22	15	DN□□1506□□	LV4BN	VHX0821	SD42N	SP4N	LSPS4	HW30L
A40T-PDSNR/L-15N			50	40	37	300	27	15	DN□□1504□□	LV4BN	VHX0821	SD42N	SP4N	LSPS4	HW30L
A32S-PDSNR/L-15-3N			40	32	30	450	22	15		LV4BN	VHX0821	SD42N	SP4N	LSPS4	HW30L
A40T-PDSNR/L-15-3N			50	40	37	300	27	15	LV4BN	VHX0821	SD42N	SP4N	LSPS4	HW30L	

↻ Applicable inserts, see pages B26~B31


● : Stock item



PDUNR/L



DN□□

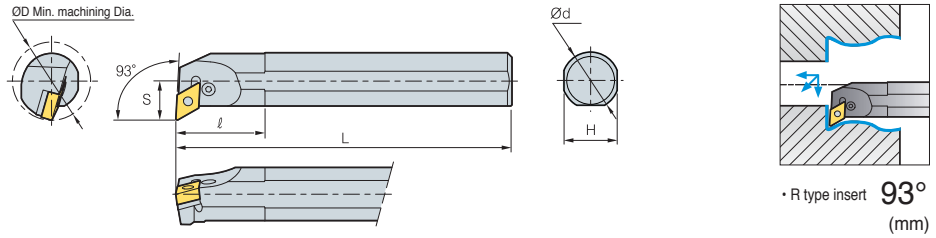


• R type insert 93° (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Lever	Screw	Shim	Shim pin	Shim pin Punch	Wrench
	R	L													
S20S-PDUNR/L-11	●		25	20	18	250	13	30		LV3D	VHX0512B	-	-	-	HW20L
S25R-PDUNR/L-11	●	●	32	25	23	200	17	35	DN□□1104□□						
S32S-PDUNR/L-11			40	32	30	250	22	40		LV3	VHX0617	SD317	SP3	LSPS3	HW25L
S32S-PDUNR/L-15	●	●	40	32	30	250	22	50							
S40T-PDUNR/L-15	●	●	50	40	37	300	27	50	DN□□1506□□	LV4B	VHX0821	SD42	SP4	LSPS4	HW30L
S50U-PDUNR/L-15	●	●	63	50	47	350	35	63							
S32S-PDUNR/L-15-3			40	32	30	250	22	50	DN□□1504□□	LV4	VHX0821	SD42	SP4	LSPS4	HW30L
S40T-PDUNR/L-15-3			50	40	37	300	27	50							
A32S-PDUNR/L-15			40	32	31	250	22	50	DN□□1506□□	LV4B	VHX0821	SD42	SP4	LSPS4	HW30L
A32S-PDUNR/L-15-3			40	32	31	250	22	50	DN□□1504□□	LV4	VHX0821	SD42	SP4	LSPS4	HW30L
S20S-PDUNR/L-11N			25	20	18	250	13	25		LV3DN	VHX0512BN	-	-	-	HW20L
S25R-PDUNR/L-11N			32	25	23	200	17	35	DN□□1104□□						
S32S-PDUNR/L-11N			40	32	30	250	22	40		LV3AN	VHX0617N	SD317N	SP3N-1	LSPS3	HW30L
S32S-PDUNR/L-15N			40	32	30	250	22	50							
S32U-PDUNR/L-15N			40	32	30	350	22	50	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	LSPS4	HW30L
S40T-PDUNR/L-15N			50	40	37	300	27	50							
S50U-PDUNR/L-15N	●		63	50	47	350	35	50							
S32S-PDUNR/L-15-3N			40	32	30	250	22	50	DN□□1506□□	LV4BN	VHX0821N	SD43N	SP4N	LSPS4	HW30L
S40T-PDUNR/L-15-3N			50	40	37	300	27	50							
A20S-PDUNR/L-11N			25	20	18	250	13	25		LV3DN	VHX0512BN	-	-	-	HW20L
A25R-PDUNR/L-11N			32	25	23	200	17	35	DN□□1104□□						
A32S-PDUNR/L-11N			40	32	30	250	22	40		LV3AN	VHX0617N	SD317N	SP3N-1	LSPS3	HW30L
A32S-PDUNR/L-15N			40	32	30	250	22	50							
A40T-PDUNR/L-15N			50	40	37	300	27	50	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	LSPS4	HW30L
A50U-PDUNR/L-15N			63	50	47	350	35	50							
A32S-PDUNR/L-15-3N			40	32	30	250	22	50	DN□□1506□□	LV4BN	VHX0821N	SD43N	SP4N	LSPS4	HW30L
A40T-PDUNR/L-15-3N			50	40	37	300	27	50							


⊗ Applicable inserts, see pages B26-B31

● : Stock item

PSKNR/L



SN□□

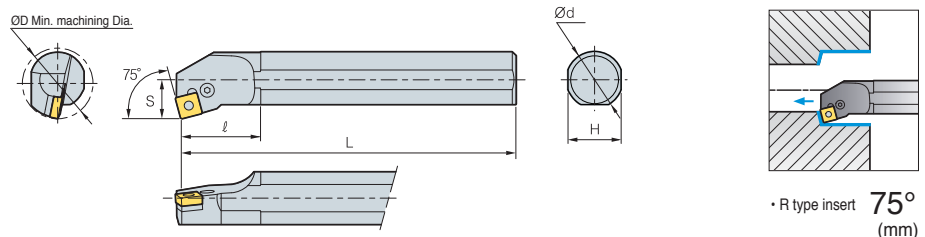

• R type insert 75° (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Lever	Screw	Shim	Shim pin	Shim pin Punch	Wrench
	R	L													
S25R-PSKNR/L-12	●	●	32	25	23	200	17	42		LV4A	VHX0613A	-	-	-	HW30L
S32S-PSKNR/L-12	●		40	32	30	250	22	45	SN□□1204□□	LV4	VHX0821	SS42B	SP4	LSPS4	HW30L
S40T-PSKNR/L-12	●		50	40	37	300	27	50							
A25R-PSKNR/L-12			32	25	23	200	17	42	SN□□1204□□	LV4A	VHX0613A	-	SP4	-	HW25L
A32S-PSKNR/L-12			40	32	30	250	22	50		LV4	VHX0821	SS42B	SP4	LSPS4	HW30L
S25R-PSKNR/L-12N			32	25	23	200	17	25		LV4AN	VHX0613N	-	-	-	HW25L
S32S-PSKNR/L-12N			40	32	30	250	22	30	SN□□1204□□	LV4N	VHX0821N	SS42N	SP4N	LSPS4	HW30L
S40T-PSKNR/L-12N			50	40	37	300	27	30							
A25R-PSKNR/L-12N			32	25	23	200	17	25		LV4AN	VHX0613N	-	-	-	HW25L
A32S-PSKNR/L-12N			40	32	30	250	22	30	SN□□1204□□	LV4N	VHX0821N	SS42N	SP4N	LSPS4	HW30L
A40T-PSKNR/L-12N			50	40	37	300	27	30							

⊗ Applicable inserts, see pages B33-B40

● : Stock item




B Lever Lock System

PTFNR/L



TN□□

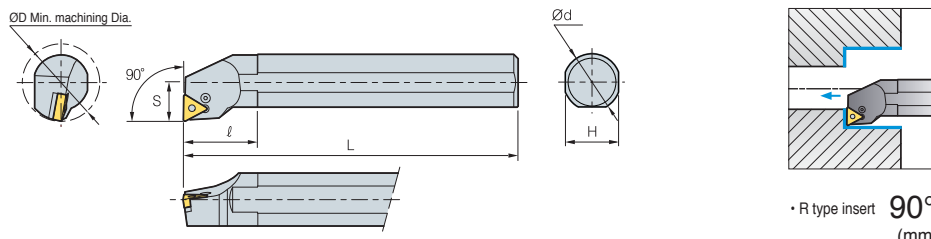


• R type insert 90° (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Lever	Screw	Shim	Shim pin	Shim pin Punch	Wrench
	R	L													
S16R-PTFNR/L-11	●		20	16	15	200	11	28	TN□□1103□□	LV2	VHX0509B	-	-	-	HW25L
S20S-PTFNR/L-11	●		25	20	18	250	13	33		LV3B	VHX0512B	-	-	-	HW20L
S25R-PTFNR/L-11	●		32	25	23	200	17	36		LV3	VHX0617	ST317B	SP3	LSPS3	HW25L
S25R-PTFNR/L-16	●	●	32	25	23	200	17	42	TN□□1604□□	LV3	VHX0617	ST317B	SP3	LSPS3	HW25L
S32S-PTFNR/L-16	●	●	44	32	30	250	22	50		LV3	VHX0617	ST317B	SP3	LSPS3	HW25L
S40T-PTFNR/L-16	●	●	54	40	37	300	27	55		LV3	VHX0617	ST317B	SP3	LSPS3	HW25L
A25R-PTFNR/L-16			32	25	24	200	17	40	TN□□1604□□	LV3BN	VHX0512B	-	-	-	HW20L
A32S-PTFNR/L-16			40	32	31	250	22	50		LV3B	VHX0512B	-	-	-	HW20L
S25R-PTFNR/L-16N	●		32	25	23	300	17	40		LV3N	VHX0617N	ST317N	SP3N	LSPS3	HW25L
S32S-PTFNR/L-16N			44	32	30	250	22	50	TN□□1604□□	LV3BN	VHX0512B	-	-	-	HW20L
S40T-PTFNR/L-16N			54	40	37	300	27	55		LV3N	VHX0617N	ST317N	SP3N	LSPS3	HW25L
A25R-PTFNR/L-16N			32	25	23	200	17	42		LV3BN	VHX0512B	-	-	-	HW20L
A32S-PTFNR/L-16N			44	32	30	250	22	50	TN□□1604□□	LV3N	VHX0617N	ST317N	SP3N	LSPS3	HW25L
A40T-PTFNR/L-16N			54	40	37	300	27	55		LV3N	VHX0617N	ST317N	SP3N	LSPS3	HW25L


↻ Applicable inserts, see pages B41~B48

● : Stock item

PWLNR/L



WN□□

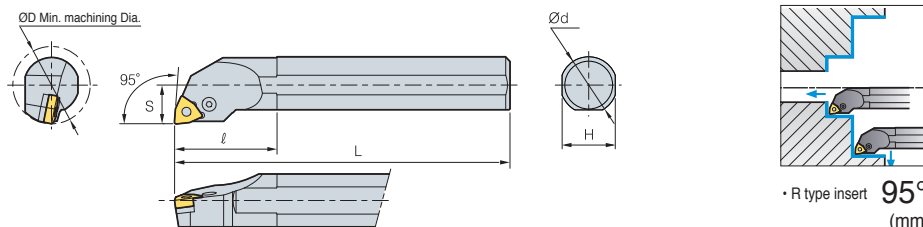

• R type insert 95° (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Lever	Screw	Shim	Shim pin	Shim pin Punch	Wrench
	R	L													
S20S-PWLNR/L-06	●	●	25	20	18	250	13	40	WN□□0604□□	LV3B	VHX0512B	-	-	-	HW20L
S25R-PWLNR/L-06	●		32	25	23	200	17	40		LV3B	VHX0613B	SW317	SP3	LSPS3	HW25L
S32S-PWLNR/L-06	●		44	32	30	250	22	45		LV4A	VHX0613A	-	-	-	HW25L
S25R-PWLNR/L-08	●	●	32	25	23	200	17	45	WN□□0804□□	LV4	VHX0821	SW42	SP4	LSPS3	HW30L
S32S-PWLNR/L-08	●	●	44	32	30	250	22	50		LV4N	VHX0820N	SW42N	SP4N	LSPS4	HW30L
S20S-PWLNR/L-06N			25	20	18	250	13	40	WN□□0604□□	LV3BN	VHX0512BN	-	-	-	HW20L
S25R-PWLNR/L-06N			32	25	23	200	17	40		LV3BN	VHX0512BN	-	-	-	HW20L
S32S-PWLNR/L-06N			44	32	30	250	22	45		LV3N	VHX0617N	SW317N	SP3N	LSPS3	HW25L
S25R-PWLNR/L-08N			32	25	23	200	17	25	WN□□0804□□	LV4AN	VHX0613N	-	-	-	HW25L
S32S-PWLNR/L-08N			44	32	30	250	22	25		LV4N	VHX0820N	SW42N	SP4N	LSPS4	HW30L

↻ Applicable inserts, see pages B51~B54

● : Stock item




- Improved holders and parts ensure performance and durability
- “N” stand for New type (Holders and parts)



CKUNR/L



KN□□

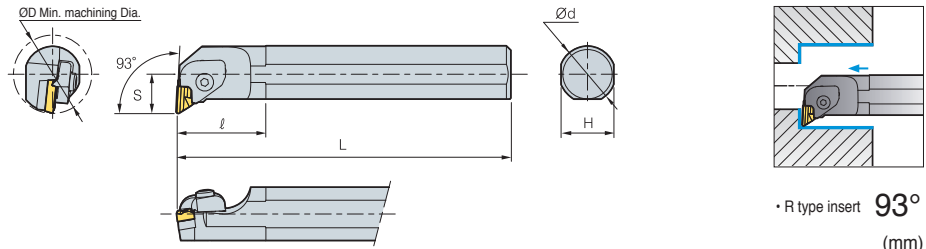

• R type insert **93°**
(mm)

Designation	Stock	ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Spring	Shim	pin+Spring	Shim Screw	Wrench
S32S-CKUNR-16	●	40	32	30	250	22	70	KN□□1604□□L	CTH6LI	CHX0625	SR3 SR4	SK33CL	PN0515	SHX0310	HW40L HW20L
S40T-CKUNR-16	●	50	40	37	300	27	60		CTH6RI	CHX0625	SR3 SR4	SK33C	PN0515	SHX0310	HW40L HW20L
S50U-CKUNR-16	●	63	50	43	350	35	55								
S32S-CKUNL-16		40	32	30	250	22	70	KN□□1604□□R	CTH6RI	CHX0625	SR3 SR4	SK33C	PN0515	SHX0310	HW40L HW20L
S40T-CKUNL-16		50	40	37	300	27	60								
S50U-CKUNL-16		63	50	43	350	35	55								

➡ Applicable inserts, see pages B32


• Use left handed insert for right handed holder

● : Stock item

CSKPR/L



SP□□

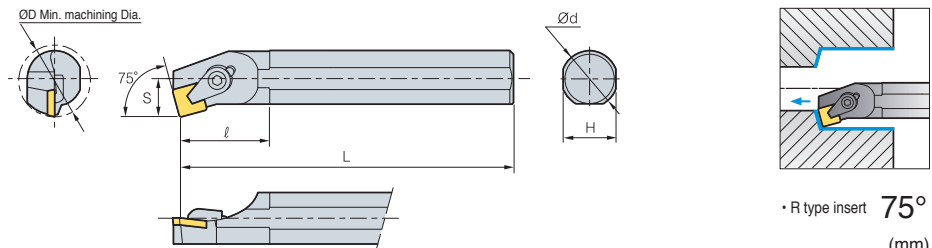

• R type insert **75°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	C-ring	Wrench
	R	L											
S16R-CSKPR/L-09	●		20	16	15	200	11	30	SP□□0903□□	CH4R1C	CHX0414	CR02C	HW25L
S20S-CSKPR/L-09			25	20	18	250	13	36		CH5R5C	CHX0519C	CR03C	HW30L
S20S-CSKPR/L-12	●		25	20	18	250	13	28	SP□□1203□□	CH6R5	CH0616	CR04C	HW30L
S25R-CSKPR/L-12			32	25	23	300	17	40					


➡ Applicable inserts, see pages B65~B66

● : Stock item

CTFPR/L



TP□□

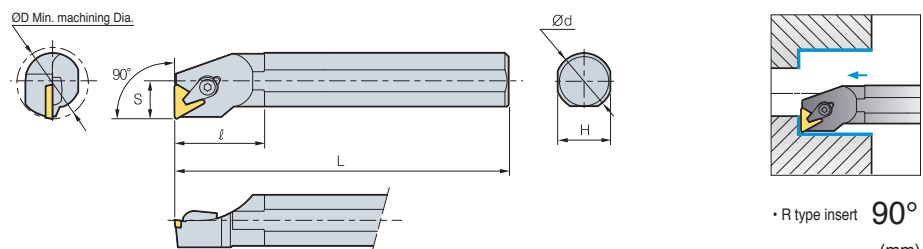


• R type insert **90°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	C-ring	Shim	Shim pin	Wrench
	R	L													
S12M-CTFPR/L-11	●		16	12	11	150	9	26	TP□□1103□□L	CH4R1C	CHX0414C	CR02C	-	-	HW25L
S16R-CTFPR/L-11	●		20	16	15	200	11	40		CH5R5C	CHX0519C	CR03C	-	-	HW30L
S20S-CTFPR/L-11	●		25	20	18	250	13	40							
S16R-CTFPR/L-16	●		20	16	15	200	11	40	TP□□1603□□L	CH6R5	CHX0622C	CR04C	ST32C	SP3C	HW30L
S20S-CTFPR/L-16	●		25	20	18	250	13	40							
S25R-CTFPR/L-16	●		32	25	23	200	17	40							
S32S-CTFPR/L-16	●		40	32	30	250	22	45	TP□□2204□□L	CH83R1	CH0823C	CR05C	ST43C	SP4C	HW40L
S40T-CTFPR/L-16			50	40	37	300	27	60							
S40T-CTFPR/L-22			50	40	37	300	27	60							



➡ Applicable inserts, see pages B70~B72

● : Stock item

MCLNR/L



CN□□

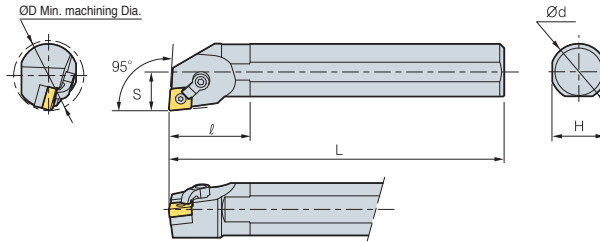

• R type insert 95°
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Shim	Shim pin	Wrench
	R	L												
S20S-MCLNR/L-09			25	20	18	250	13	30	CN□□0903□□	CDH7N	DHA10-32-19	-	SP3D3	HW19.8L HW23.8L
S25R-MCLNR/L-09			32	25	23	200	17	36						
S25R-MCLNR/L-12	●		32	25	23	200	17	36					SP4DS	HW31.8L
S32S-MCLNR/L-12	●		40	32	30	250	22	50	CN□□1204□□	CDH6N	DHA1/4-21	SC43D	SP4D	HW23.8L
S40T-MCLNR/L-12			50	40	37	300	27	60						
A25R-MCLNR/L-12			32	25	23	200	17	40	CN□□1204□□	CDH6N	DHA1/4-21	-	SP4DS	HW31.8L
A32S-MCLNR/L-12			40	32	30	250	22	50				SC43D	SP4D	HW23.8L



➔ Applicable inserts, see pages B20~B25

● : Stock item

MDUNR/L



DN□□

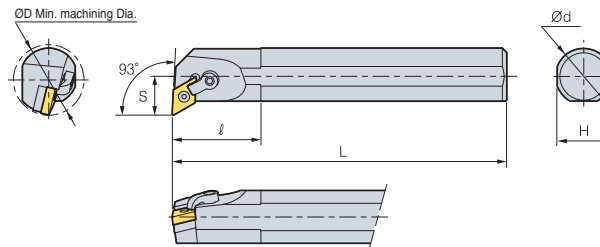


• R type insert 93°
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Shim	Shim pin	Wrench
	R	L												
S32S-MDUNR/L-15-3			40	32	30	250	22	50						
S40T-MDUNR/L-15-3			50	40	37	300	27	60	DN□□1504□□	CDH6N	DHA1/4-21	SD43D	SP4D	HW31.8L HW23.8L
A32S-MDUNR/L-15-3			40	32	30	250	22	50						



➔ Applicable inserts, see pages B26~B31

● : Stock item

MSKNR/L



SN□□

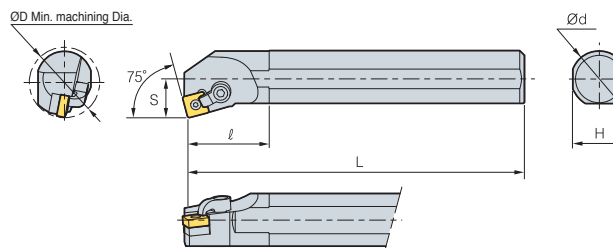

• R type insert 75°
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Shim	Shim pin	Wrench
	R	L												
S25R-MSKNR/L-12			32	25	23	200	17	36					SP4DS	HW39.7L
S32S-MSKNR/L-12			40	32	30	250	22	50	SN□□1204□□	CDH8N1	DHA5/16-28	SS43D	SP4D	HW23.8L
S40T-MSKNR/L-12			50	40	37	300	27	60						
A25R-MSKNR/L-12			32	25	23	200	17	40					SP4DS	HW39.7L
A32S-MSKNR/L-12			40	32	30	250	22	50	SN□□1204□□	CDH8N1	DHA5/16-28	SS43D	SP4D	HW23.8L
A40T-MSKNR/L-12			50	40	37	300	27	60						

➔ Applicable inserts, see pages B33~B40



● : Stock item



MTFNR/L



TN□□

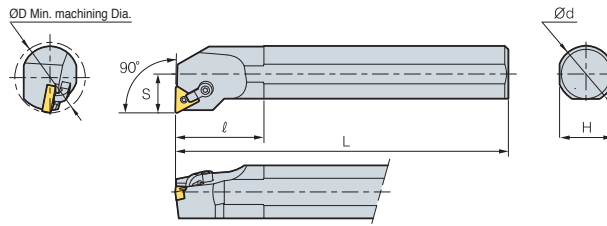

• R type insert **90°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Shim	Shim pin	Wrench
	R	L												
S25R-MTFNR/L-16			32	25	23	200	17	36	TN□□1604□□	CDH7N1	DHA10-32-19	-	SP3D3	HW23.8L
S32S-MTFNR/L-16			40	32	30	250	22	50		CDH7N1	DHA10-32-19	ST32D	SP3D	HW19.8L
S40T-MTFNR/L-16			50	40	37	300	27	60	TN□□1604□□	CDH7N1	DHA10-32-19	-	SP3D3	HW23.8L
A25R-MTFNR/L-16			32	25	23	200	17	40		CDH7N1	DHA10-32-19	ST32D	SP3D	HW19.8L
A32S-MTFNR/L-16			40	32	30	250	22	50						



↻ Applicable inserts, see pages B41~B48

● : Stock item

MVUNR/L



VN□□

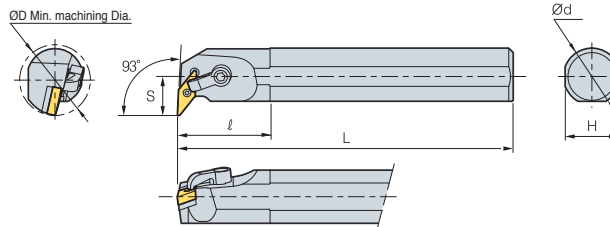


• R type insert **93°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Shim	Shim pin	Wrench
	R	L												
S32S-MVUNR/L-16			40	32	30	250	22	50	VN□□1604□□	CDH8N2	DHA5/16-28	SV32D	SP3D	HW39.7L HW19.8L
S40T-MVUNR/L-16			50	40	37	300	27	60		CDH8N2	DHA5/16-28	SV32D	SP3D	HW39.7L HW19.8L
A32S-MVUNR/L-16			40	32	30	250	22	50	VN□□1604□□	CDH8N2	DHA5/16-28	SV32D	SP3D	HW39.7L HW19.8L
A40T-MVUNR/L-16			50	40	37	300	27	60		CDH8N2	DHA5/16-28	SV32D	SP3D	HW39.7L HW19.8L



↻ Applicable inserts, see pages B49~B50

● : Stock item

MWLNRL/L



WN□□

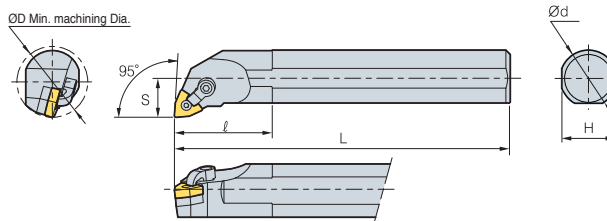

• R type insert **95°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Clamp	ClampScrew	Shim	Shim pin	Wrench
	R	L												
S25R-MWLNRL/L-06	●		32	25	23	200	17	36	WN□□0604□□	CDH7N	DHA10/32-19	-	SP3D3	HW23.8L
S32S-MWLNRL/L-06			40	32	30	250	22	50		CDH7N	DHA10/32-19	SW32D	SP3D	HW19.8L
S40T-MWLNRL/L-06			50	40	37	300	27	60	WN□□0804□□	CDH6N	DHA1/4-21	-	SP4DS	HW31.8L HW23.8L
S25R-MWLNRL/L-08	●	●	32	25	23	200	17	36		CDH6N	DHA1/4-21	SW43D	SP4D	HW31.8L HW23.8L
S32S-MWLNRL/L-08	●		40	32	30	250	22	50	WN□□0604□□	CDH7N	DHA10/32-19	-	SP3D3	HW31.8L
S40T-MWLNRL/L-08	●		50	40	37	300	27	60		CDH7N	DHA10/32-19	SW32D	SP3D	HW19.8L
A25R-MWLNRL/L-06			32	25	23	200	17	40	WN□□0604□□	CDH6N	DHA1/4-21	-	SP4DS	HW31.8L
A32S-MWLNRL/L-06			40	32	30	250	22	50		CDH6N	DHA1/4-21	SW43D	SP4D	HW23.8L
A25R-MWLNRL/L-08			32	25	23	200	17	40	WN□□0804□□	CDH7N	DHA10/32-19	-	SP3D3	HW31.8L
A32S-MWLNRL/L-08			40	32	30	250	22	50		CDH7N	DHA10/32-19	SW32D	SP3D	HW19.8L



↻ Applicable inserts, see pages B51~B54

● : Stock item

SCLCR/L



CC□□

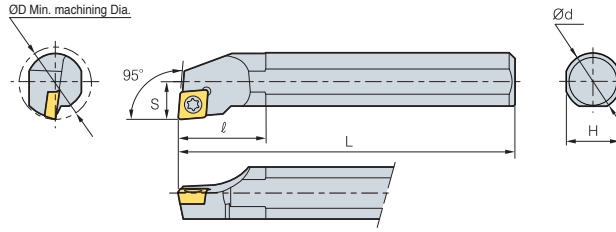


• R type insert 95°
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
S08K-SCLCR/L-06	●	●	10	8	7	125	5	14	CC□□0602□□	FTKA02555			TWO7
S10K-SCLCR/L-06	●		12	10	9	125	6	14		FTKA02565	-	-	TWO7P
S10M-SCLCR/L-06			12	10	9	150	6	14					
S12M-SCLCR/L-06	●	●	16	12	11	150	9	25					
S16R-SCLCR/L-06	●		20	16	15	200	11	32	CC□□09T3□□	FTGA03508	-	-	TW15P
S12M-SCLCR/L-09	●	●	16	12	11	150	9	25		FTGA03510	-	-	TW15P
S16R-SCLCR/L-09	●	●	20	16	15	200	11	32.5		FTGA0411F	-	-	TW15P
S20S-SCLCR/L-09	●	●	25	20	18	250	13	38		FTGA0411F	SC42S	SHXN0610F	HW40L TW15P
S25R-SCLCR/L-09	●	●	32	25	23	200	17	45	CC□□1204□□	FTKA02555	-	-	TW07P
S25R-SCLCR/L-12	●	●	32	25	23	200	17	45		FTKA02565	-	-	TW07P
S32S-SCLCR/L-12	●	●	40	32	30	250	22	50		FTGA0411F	-	-	TW15P
S40T-SCLCR/L-12	●	●	50	40	37	300	27	60		FTGA0411F	SC42S	SHXN0610F	HW40L TW15P
A08F-SCLCR/L-06			10	8	7.5	80	5	14	CC□□0602□□	FTKA02555	-	-	TW07P
A10H-SCLCR/L-06			12	10	9.5	100	6	14		FTKA02565	-	-	TW07P
A12K-SCLCR/L-06			16	12	11	125	9	25					
A12K-SCLCR/L-09			16	12	11	125	9	25					
A16M-SCLCR/L-09			20	16	15	150	11	32.5	CC□□09T3□□	FTGA03508	-	-	TW15P
A20Q-SCLCR/L-09	●		25	20	19	180	13	-		FTGA03510	-	-	TW15P
A25R-SCLCR/L-09			32	25	24	200	17	45		FTGA0411F	-	-	TW15P
A25R-SCLCR/L-12			32	25	24	200	17	45		FTGA0411F	SC42S	SHXN0610F	HW40L TW15P
A32S-SCLCR/L-12			40	32	31	250	32	50					



➔ Applicable inserts, see pages B55~B58, B80

● : Stock item

SCLPR/L



CP□□

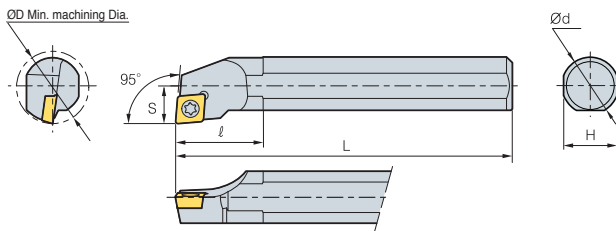

• R type insert 95°
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S10M-SCLPR/L-08	●		12	10	9	150	6	-	CP□□0802□□	FTNA0305	TW09P
S12M-SCLPR/L-08	●		16	12	11	150	8	15		FTNA0307	TW09P
S16N-SCLPR/L-09	●		20	16	15	160	10	15	CP□□0903□□	FTNA0408	TW15P
S16R-SCLPR/L-09	●		20	16	15	200	11	35			
S20N-SCLPR/L-09	●		25	20	18	160	12.5	20			
S20S-SCLPR/L-09	●		25	20	15	250	12.5	20			
A10H-SCLPR/L-08			12	10	9.5	100	9	-	CP□□0802□□	FTNA0305	TW09P
A12K-SCLPR/L-08			16	12	11	125	8	20		FTNA0307	TW09P
A16M-SCLPR/L-09			20	16	15	150	10	25	CP□□0903□□	FTNA0408	TW15P
A20Q-SCLPR/L-09			25	20	19	180	12.5	28			

➔ Applicable inserts, see pages B59



● : Stock item



SDQCR/L



DC□□

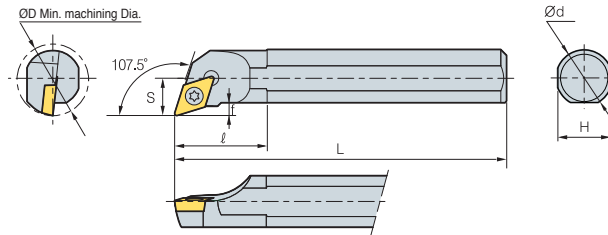

• R type insert **107.5°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	f	Insert	Screw	Wrench
	R	L										
S10M-SDQCR/L-07	●	●	13	10	9	150	7	20	2.5	DC□□0702□□	FTKA02555	TW07P
S12M-SDQCR/L-07	●	●	16	12	11	150	9	22	3.5		FTGA03510	TW07P
S16R-SDQCR/L-07	●	●	20	16	15	200	11	27	4	DC□□11T3□□	FTGA03508	TW15P
S16R-SDQCR/L-11	●	●	20	16	15	200	11	32	4		FTGA03510	TW15P
S20S-SDQCR/L-11	●	●	25	20	18	250	13	32	4.5	DC□□0702□□	FTKA02555	TW07P
S25R-SDQCR/L-11	●	●	32	25	23	200	17	32	7		FTKA02565	TW07P
A10H-SDQCR/L-07			13	10	9.5	100	7	20	2	DC□□11T3□□	FTGA03508	TW15P
A12K-SDQCR/L-07			16	12	11	125	9	22	3		FTGA03510	TW15P
A16M-SDQCR/L-11			20	16	15	150	11	27	3	DC□□0702□□	FTKA02555	TW07P
A20Q-SDQCR/L-11			25	20	19	180	13	32	3		FTKA02565	TW07P
A25R-SDQCR/L-11			32	25	24	200	17	32	4	FTGA03508	TW15P	
										FTGA03510	TW15P	



➔ Applicable inserts, see pages B60-B62, B81

● : Stock item

SDUCR/L



DC□□

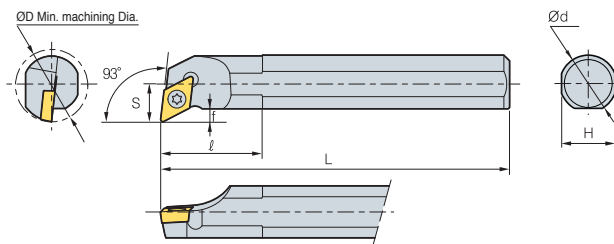

• R type insert **93°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	f	Insert	Screw	Wrench
	R	L										
S10M-SDUCR/L-07	●	●	13	10	9	150	7	-	2.5	DC□□0702□□	FTKA02555	TW07P
S12M-SDUCR/L-07	●	●	16	12	11	150	9	22	3.5		FTKA02565	TW07P
S16R-SDUCR/L-07	●	●	20	16	15	200	11	27	4	DC□□11T3□□	FTGA03508	TW15P
S16R-SDUCR/L-11	●	●	20	16	15	200	11	27	4		FTGA03510	TW15P
S20S-SDUCR/L-11	●	●	25	20	18	250	13	35	4.3	DC□□0702□□	FTKA02555	TW07P
S25R-SDUCR/L-11	●	●	32	25	23	200	17	46	6.8		FTKA02565	TW07P
S32S-SDUCR/L-11	●	●	40	32	30	250	22	50	8.4	DC□□11T3□□	FTGA03508	TW15P
A10H-SDUCR/L-07			13	10	9.5	100	7	-	2		FTGA03510	TW15P
A12K-SDUCR/L-07			16	12	11	125	9	22	3	DC□□0702□□	FTKA02555	TW07P
A16M-SDUCR/L-07			20	16	15	150	11	27	3		FTKA02565	TW07P
A20Q-SDUCR/L-11			25	20	19	180	13	35	3	DC□□11T3□□	FTGA03508	TW15P
A25R-SDUCR/L-11	●		32	25	24	200	17	46	4.5		FTGA03510	TW15P

➔ Applicable inserts, see pages B60-B62, B81


● : Stock item



SDZCR/L



DC□□

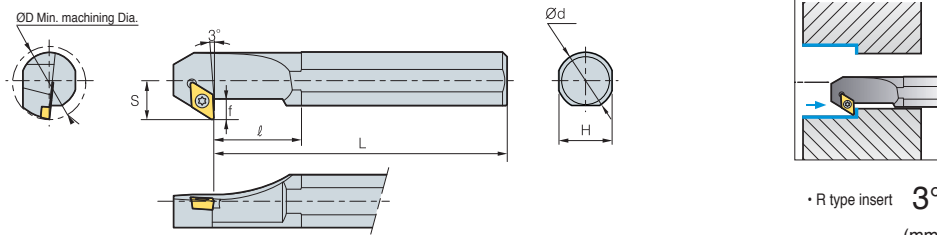

Designation	Stock		ØD	Ød	H	L	S	ℓ	f	Insert	Screw	Shim	ShimScrew	Wrench
	R	L												
S16R-SDZCR/L-07	●		20	16	15	200	11	29	4	DC□□0702□□	FTKA02565	-	-	TW07P
S20S-SDZCR/L-07	●		25	20	18	250	13	36.5	4.5					
S25R-SDZCR/L-11	●		32	25	23	200	17	30	6.9	DC□□11T3□□	FTGA03510	-	-	TW15P
S32S-SDZCR/L-11	●		40	32	30	250	22	39	8.4		FTGA03512	SD32S	SHXN0509F	TW15P, HW35L
S40T-SDZCR/L-11	●		50	40	37	300	27	47	9.4		FTGA03510	-	-	TW15P
A25R-SDZCR/L-11			32	25	24	200	17	30	4.5		FTGA03512	SD32S	SHXN0509F	TW15P, HW35L
A32S-SDZCR/L-11			40	32	31	250	22	39	6					


➔ Applicable inserts, see pages B60~B62, B81

● : Stock item

SSKCR/L



SC□□

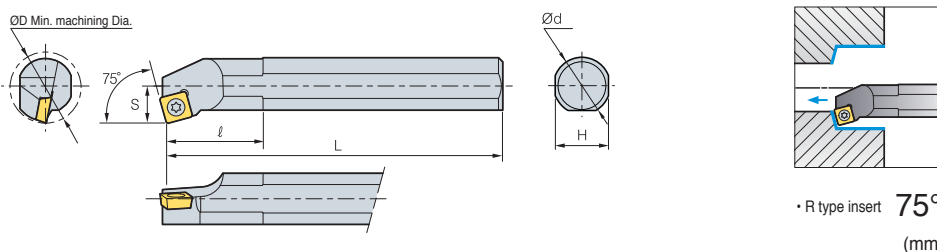


Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
S12M-SSKCR/L-09	●		16	20	11	150	9	26	SC□□09T3□□	FTGA03507	-	-	TW15P
S16R-SSKCR/L-09	●		20	16	15	200	11	40					
S20S-SSKCR/L-09	●		25	20	18	250	13	46	SC□□1204□□	FTGA0411F	SS42S	SHXN0610F	TW15P
S25R-SSKCR/L-12	●		32	25	23	200	17	36		SS42S	SHXN0610F	TW15P, HW40L	
S32S-SSKCR/L-12	●		40	32	30	250	22	43					
A12K-SSKCR/L-09			16	12	11	125	9	26	FTGA03507	-	-	TW15P	
A16M-SSKCR/L-09			20	16	15	150	11	32	SC□□09T3□□	FTGA03508	-	-	TW15P
A20Q-SSKCR/L-09			25	20	19	180	13	34					
A25R-SSKCR/L-12			32	25	24	200	17	36	SC□□1204□□	FTGA0411F	SS42S	SFXN0610F	TW15P
A32S-SSKCR/L-12			40	32	31	250	22	43	FTGA0411F	SS42S	SFXN0610F	TW15P, HW40L	


➔ Applicable inserts, see pages B63, B83

● : Stock item

SSKPR/L



SP□□

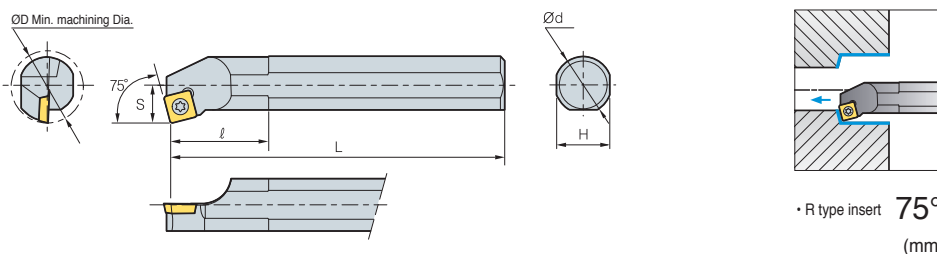

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S12M-SSKPR/L-09	●	●	16	12	11	150	8	18	SP□□0903□□	FTNA0307	TW09P
S16N-SSKPR/L-09			20	16	15	160	10	30			
S16R-SSKPR/L-09	●		20	16	15	200	10	32			
S20N-SSKPR/L-09			25	20	18	160	12.5	32			
S20S-SSKPR/L-09	●		25	20	18	250	12.5	35			
A12K-SSKPR/L-09			16	12	11	125	8	21	SP□□0903□□	FTNA0305	TW09P
A16M-SSKPR/L-09			20	16	15	150	10	30		FTNA0307	
A20Q-SSKPR/L-09			25	20	19	180	12.5	32		TW09P	

➔ Applicable inserts, see pages B65~B66

• Use left handed insert for right handed holder



● : Stock item



STFCR/L



TC□□

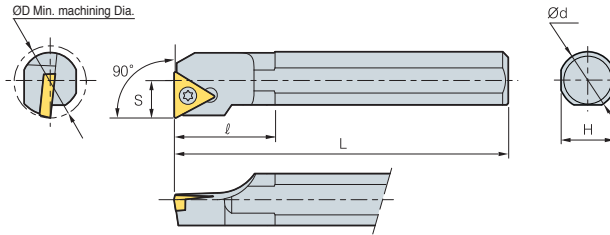

• R type insert 90° (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
S10M-STFCR/L-09	●	●	13	10	9	150	7	23	TC□□0902□□	FTKA02206	-	-	TW06P
S12M-STFCR/L-09	●		16	12	11	150	9	28					
S12M-STFCR/L-11	●	●	16	12	11	150	9	30	TC□□1102□□	FTKA02565	-	-	TW07P
S16R-STFCR/L-11	●	●	20	16	15	200	11	35					
S20S-STFCR/L-11	●	●	25	20	18	250	13	36	TC□□16T3□□	FTGA03510	-	-	TW15P
S20S-STFCR/L-16	●		25	20	18	250	13	36					
S25R-STFCR/L-16	●	●	32	25	23	200	17	49	TC□□16T3□□	FTGA03512	ST32S	SHXN0509F	TW15P, HW35L
S32S-STFCR/L-16	●		40	32	30	250	22	50					
S40T-STFCR/L-16	●		50	40	37	300	27	60	TC□□16T3□□	FTGA03512	ST32S	SHXN0509F	TW15P, HW35L
A10H-STFCR/L-09			13	10	9.5	100	7	23					
A12K-STFCR/L-09			16	12	11	125	9	23	TC□□0902□□	FTKA02206	-	-	TW06P
A12K-STFCR/L-11			16	12	11	125	9	30					
A16M-STFCR/L-11	●		20	16	15	150	11	30	TC□□1102□□	FTKA02565	-	-	TW07P
A20Q-STFCR/L-11			25	20	19	180	13	36					
A25R-STFCR/L-16			32	25	24	200	17	49	TC□□16T3□□	FTGA03510	-	-	TW15P
A32S-STFCR/L-16			40	32	31	250	22	50					



➔ Applicable inserts, see pages B67-B69, B84

● : Stock item

STFPR/L



TP□□

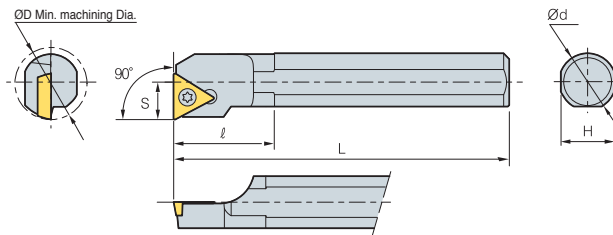

• R type insert 90° (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S10M-STFPR/L-11	●		12	10	9	150	6	-	TP□□1103□□	FTNA0305	TW09P
S12M-STFPR/L-11	●		16	12	11	150	8	10			
S16N-STFPR/L-11	●		20	16	15	160	10	12			
S16R-STFPR/L-11	●	●	20	16	15	200	10	12			
S20N-STFPR/L-16	●		25	20	18	160	12.5	32	TP□□1604□□	FTNA0408	TW15P
S20S-STFPR/L-16	●		25	20	18	250	12.5	14			
A10H-STFPR/L-11			12	10	9.5	100	6	-	TP□□1103□□	FTNA0305	TW09P
A12K-STFPR/L-11			16	12	11	125	8	10			
A16M-STFPR/L-11			20	16	15	150	10	23	TP□□1604□□	FTNA0408	TW15P
A20Q-STFPR/L-16			25	20	19	180	12.5	41			

➔ Applicable inserts, see pages B70-B72



• Use left handed insert for right handed holder

● : Stock item

STWPR/L



TP□□

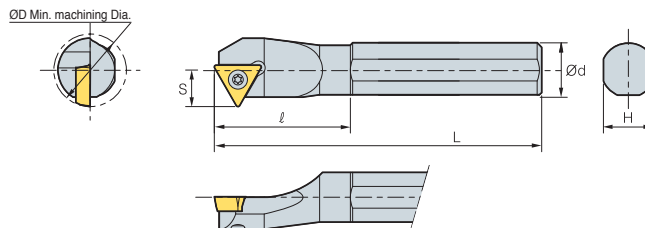

• R type insert 60° (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S10M-STWPR/L-11	●		12	10	9	150	6	23	TPGH1102□□	FTNA0305	TW09P
S12M-STWPR/L-11	●		16	12	11	150	8	30			
S16R-STWPR/L-11	●		20	16	15	180	10	35	TPGH1103□□ TPMT1103□□	FTNA0306	TW09P
S20R-STWPR/L-11	●		25	20	19	200	12.5	40			

➔ Applicable inserts, see pages B70-B72

● : Stock item





SVJCR/L



VC□□

ØD Min. machining Dia.

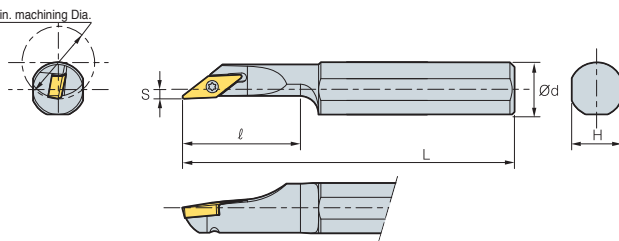

• R type insert **142°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S12M-SVJCR/L-08	●		16	12	11	150	2	26	VCMT0802□□	FTNA0204	TW06P
S16Q-SVJCR/L-08	●		20	16	15	180	2	36			

➤ Applicable inserts, see pages B75~B76



● : Stock item

SVQBR/L



VB□□

ØD Min. machining Dia.

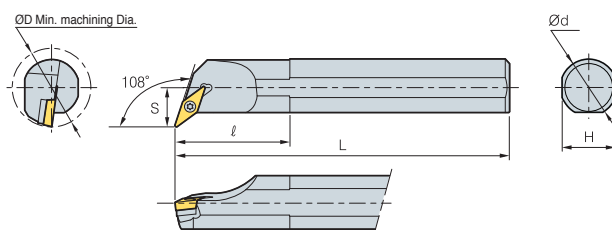

• R type insert **108°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
S32S-SVQBR/L-16	●	●	40	32	30	250	22	56	VB□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P HW35L
S40T-SVQBR/L-16	●		50	40	37	300	27	64					
A32S-SVQBR/L-16			40	32	31	250	22	56					

➤ Applicable inserts, see pages B73~B74, B85



● : Stock item

SVQCR/L



VC□□

ØD Min. machining Dia.

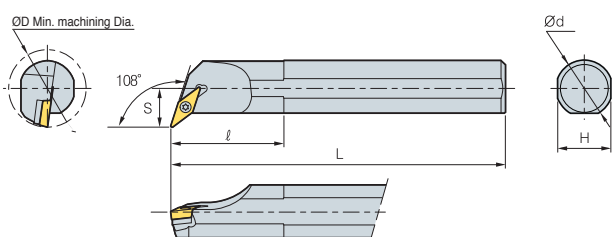

• R type insert **108°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
S16R-SVQCR/L-11	●		20	16	15	200	11	35	VC□□1103□□	FTKA02565			TW07P
S20S-SVQCR/L-11			25	20	18	250	13	38					
S25R-SVQCR/L-11			32	25	23	200	17	42	VC□□1303□□	FTKA0307			TW09P
S20S-SVQCR/L-13			25	20	18	250	13	42					
S25R-SVQCR/L-13			32	25	23	200	17	45	VC□□1604□□	FTGA03510			TW15P
S25R-SVQCR/L-16	●	●	32	25	23	200	17	50					
S32S-SVQCR/L-16	●		40	32	30	250	22	56					
S40T-SVQCR/L-16	●		50	40	37	300	27	64					

➤ Applicable inserts, see pages B75~B76, B86



● : Stock item



SVUBR/L



VB□□

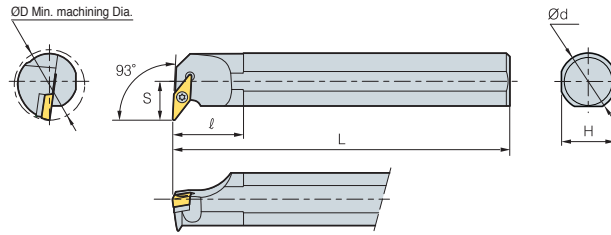

• R type insert **93°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
S32S-SVUBR/L-16	●	●	40	32	30	250	22	56	VB□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P HW35L
S40T-SVUBR/L-16	●		50	40	37	300	27	64					
A32S-SVUBR/L-16			40	32	31	250	22	56					



↻ Applicable inserts, see pages **B73~B74, B85**

● : Stock item

SVUCR/L



VC□□

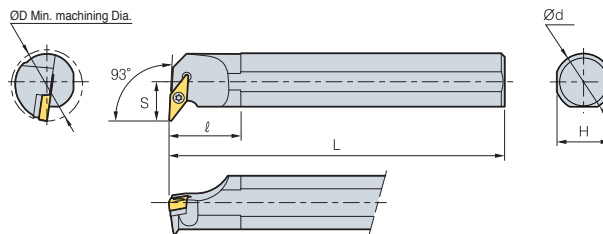

• R type insert **93°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Shim	ShimScrew	Wrench
	R	L											
S16R-SVUCR/L-11	●		22	16	15	200	13	30	VC□□1103□□	FTKA02565	-	-	TW07P
S20S-SVUCR/L-11			25	20	18	250	14	33					
S25T-SVUCR/L-11			32	25	23	300	17	38					
S20S-SVUCR/L-13	●		28	20	18	250	16	35	VC□□1303□□	FTKA0307	-	-	TW09P
S25R-SVUCR/L-13			32	25	23	200	17	40					
S25R-SVUCR/L-16	●	●	32	25	23	200	19	50	VC□□1604□□	FTGA03510	-	-	TW15P
S32S-SVUCR/L-16	●		40	32	30	250	22	56					
S40T-SVUCR/L-16	●	●	50	40	37	300	27	64					



↻ Applicable inserts, see pages **B75~B76, B86**

● : Stock item

SWLCR/L



WC□□

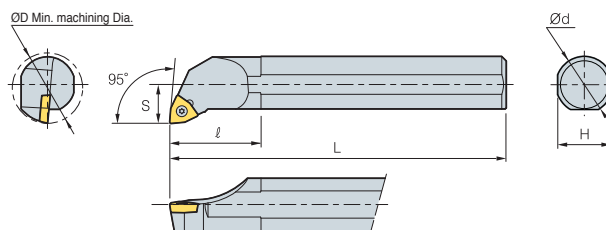


• R type insert **95°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S25R-SWLCR/L-08			32	25	23	200	17	46	WC□□0804□□	FTGA0411F	TW15P
S32S-SWLCR/L-08			40	32	30	250	22	51			
A25R-SWLCR/L-08			32	25	24	200	17	46			
A32S-SWLCR/L-08			40	32	31	250	22	51	WC□□0804□□	FTGA0411F	TW15P



↻ Applicable inserts, see pages **B78**

● : Stock item

SCLCR/L



CCET

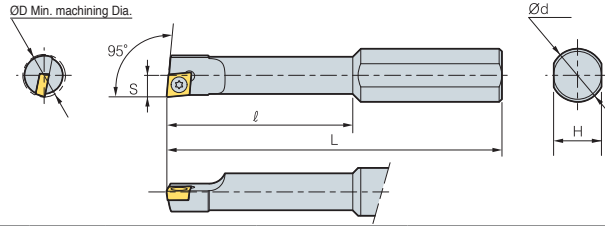

• R type insert **95°** (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S10H-SCLCR/L-0305			5	10	9	100	2.5	25	CCET 0301□□	FTNA01633	TW06P
S10H-SCLCR/L-0306			6	10	9	100	3.0	25			
S10J-SCLCR/L-0407			7	10	9	110	3.5	30	CCET 0401□□	FTNA0238	TW06P
S10J-SCLCR/L-0408			8	10	9	110	4.0	30			



➔ Applicable inserts, see pages B55

● : Stock item

STUBR/L



TB□□

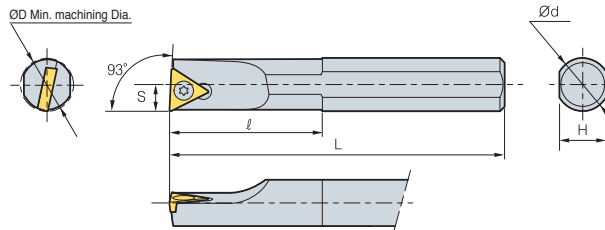

• R type insert **93°** (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S08K-STUBR/L-06			8	8	7	125	4	30	TB□□0601□□R/L	FTNA0204	TW06P
A08F-STUBR/L-06			8	8	7.5	80	4	30			

➔ Applicable inserts, see pages B67



• Use left handed insert for right handed holder

● : Stock item

STUPR/L



TP□□

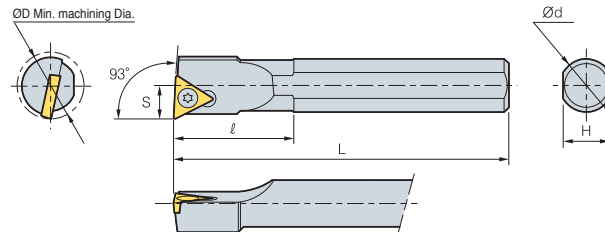

• R type insert **93°** (mm)


Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S08K-STUPR/L-08			10	8	7	125	4	18	TP□□0802□□R/L	FTNA02205	TW06P
A08F-STUPR/L-08			10	8	7.5	80	4	18			

➔ Applicable inserts, see pages B70~B72



• Use left handed insert for right handed holder

● : Stock item

SWUBR/L



WBGT

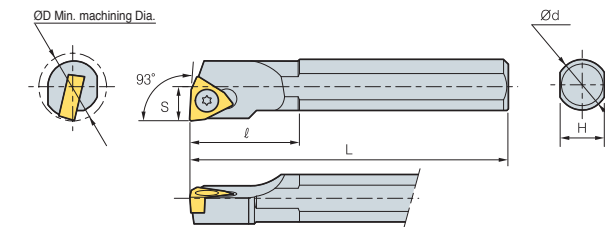

• R type insert **93°** (mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench
	R	L									
S05H-SWUBR/L-02			5.5	5	4.5	100	2.75	-	WBGT 0201□□R/L	FTNA0203	TW06P
S08K-SWUBR/L-02			8	8	7	125	4	30			
S08K-SWUBR/L-S3			10	8	7	125	5	18	WBGT S302□□R/L	FTNA02205	TW06P
A08F-SWUBR/L-02			8	8	7.5	80	4	30	WBGT 0201□□R/L	FTNA0203	TW06P
A08F-SWUBR/L-S3			10	8	7.5	80	5	16	WBGT S302□□R/L	FTNA02205	TW06P

➔ Applicable inserts, see pages B55

• Use left handed insert for right handed holder

● : Stock item




Carbide Shank Boring Bar

KORLOY Carbide Shank Boring Bar

- Excellent cutting performance even in internal machining with chattering
- Available for various workpieces such as steel, stainless steel, cast iron, etc.
- Improved tool life and surface roughness

Features

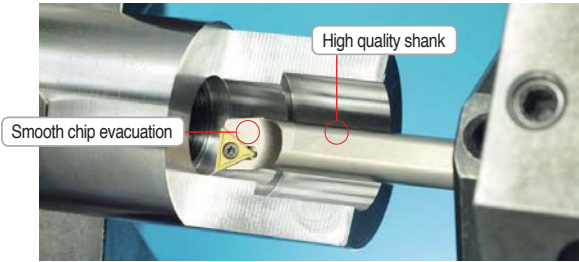


Higher strength and durability than steel shank, special surface treatment applied

Comparison of chipping

Specifications	Steel boring bar	Carbide boring bar				
SCM440 vc:200 m/min						
ap:0.4 mm						
fn:0.15 mm/rev						
Cutting depth:5D						
	Rmax	Rz	Ra	Rmax	Rz	Ra
	4.67	3.68	0.62	3.07	2.76	0.53

SCLCR/L

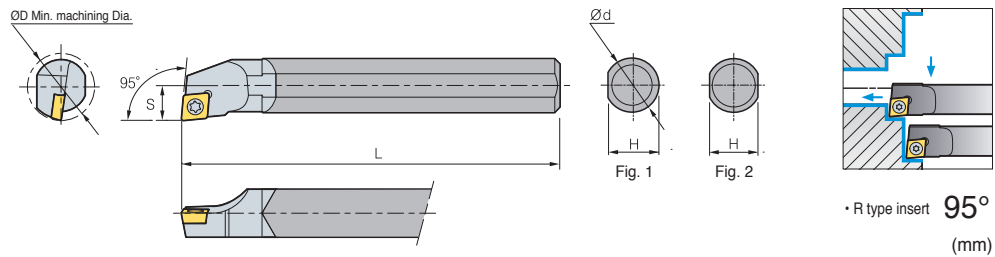

• R type insert 95° (mm)

Designation	Stock		ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.
	R	L									
C04G-SCLCR/L-03	●		5	4	3.8	90	2.5	CC□□T0301□□	FTNA01633	TW06P	1
C05H-SCLCR/L-03	●		6	5	4.4	100	3				
C06H-SCLCR/L-04	●		7	6	5.4	100	3.5	CC□□T0401□□	FTNA0238	TW06P	
C07K-SCLCR/L-04	●		8	7	6.4	125	4				
C08K-SCLCR/L-06	●		10	8	7	125	5	CC□□T0602□□	FTKA02555	TW07P	2
C10K-SCLCR/L-06	●		12	10	9	125	6				
C10M-SCLCR/L-06	●		12	10	9	150	6				
C12M-SCLCR/L-06	●		14	12	11	150	7				
C12Q-SCLCR/L-06	●		14	12	11	180	7	CC□□T09T3□□	FTGA03508	TW15P	
C12M-SCLCR/L-09	●		15	12	11	150	8				
C12Q-SCLCR/L-09	●		15	12	11	180	8				
C16R-SCLCR/L-09	●		20	16	15	200	10				
C16S-SCLCR/L-09	●		20	16	15	250	10	CC□□T1204□□	FTGA0411F	TW15P	
C20R-SCLCR/L-09	●		25	20	18	200	13				
C20S-SCLCR/L-09	●		25	20	18	250	13				
C25T-SCLCR/L-12	●		32	25	23	300	17				
E06H-SCLCR/L-04	●		7	6	5.4	100	3.5	CC□□T0401□□	FTNA0238	TW06P	1
E07K-SCLCR/L-04	●		8	7	6.4	125	4				
E08K-SCLCR/L-06	●		10	8	7	125	5	CC□□T0602□□	FTKA02555	TW07P	
E10K-SCLCR/L-06	●		12	10	9	125	6				
E10M-SCLCR/L-06	●		12	10	9	150	6				
E12M-SCLCR/L-06	●		14	12	11	150	7				
E12Q-SCLCR/L-06	●		14	12	11	180	7	CC□□T09T3□□	FTGA03508	TW15P	
E12M-SCLCR/L-09	●		15	12	11	150	8				
E12Q-SCLCR/L-09	●		15	12	11	180	8				
E16R-SCLCR/L-09	●		20	16	15	200	11				
E16S-SCLCR/L-09	●		20	16	15	250	10	CC□□T1204□□	FTGA0411F	TW15P	
E20R-SCLCR/L-09	●		25	20	18	200	13				
E20S-SCLCR/L-09	●		25	20	19	250	13				
E25T-SCLCR/L-12	●		32	25	23	300	17				

● Applicable inserts, see pages B55~B58

● : Stock item




B Carbide Shank Boring Bar

SCLPR/L



CP□□

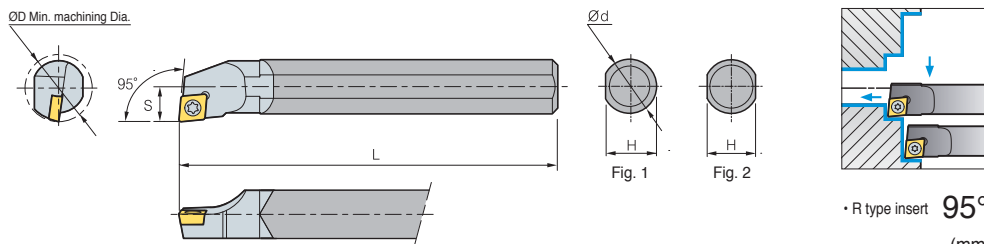


• R type insert 95°
(mm)

Designation	Stock		ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.
	R	L									
C10K-SCLPR/L-08	●		12	10	9	125	6	CP□□T0802□□	FTNA0305	TW09P	2
C10M-SCLPR/L-08	●		12	10	9	150	6		FTNA0306	TW09P	
C12M-SCLPR/L-08	●		15	12	11	150	7.5	CP□□T0903□□	FTNA0408	TW15P	
C12Q-SCLPR/L-08	●		15	12	11	180	7.5				
C12M-SCLPR/L-09	●		15	12	11	150	8				
C12Q-SCLPR/L-09	●		15	12	11	180	8				
C16R-SCLPR/L-09	●		20	16	15	200	10				
C16S-SCLPR/L-09	●		20	16	15	250	10				
C20R-SCLPR/L-09	●		25	20	18	200	13	CP□□T0802□□	FTNA0305	TW09P	
C20S-SCLPR/L-09	●		25	20	18	250	13				
E10K-SCLPR/L-08			12	10	9	125	6				
E10M-SCLPR/L-08			12	10	9	150	6				
E12M-SCLPR/L-08			15	12	11	150	7.5				
E12Q-SCLPR/L-08			15	12	11	180	7.5				
E12M-SCLPR/L-09			15	12	11	150	8	CP□□T0903□□	FTNA0407	TW09P	
E12Q-SCLPR/L-09			15	12	11	180	8				
E16R-SCLPR/L-09			20	16	15	200	10				
E16S-SCLPR/L-09			20	16	15	250	10				
E20R-SCLPR/L-09			25	20	18	200	13				
E20S-SCLPR/L-09	●		25	20	18	250	13				FTNA0408


➔ Applicable inserts, see pages B59

● : Stock item

SDQCR/L



DC□□

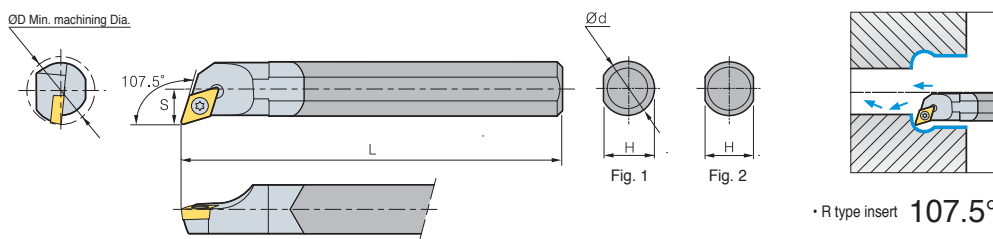

• R type insert 107.5°
(mm)


Designation	Stock		ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.
	R	L									
C08K-SDQCR/L-07	●		10	8	7	125	6	DC□□T0702□□	FTKA02555	TW07P	2
C10K-SDQCR/L-07	●		13	10	9	125	7		FTKA02565	TW07P	
C12M-SDQCR/L-07	●		16	12	11	150	9	DC□□T11T3□□	FTGA03508	TW15P	
C16R-SDQCR/L-07	●		20	16	15	200	11				
C16R-SDQCR/L-11	●		20	16	15	200	11				
C20R-SDQCR/L-11	●		25	20	18	200	13				
C20S-SDQCR/L-11	●		25	20	18	250	13				
E08K-SDQCR/L-07	●		10	8	7	125	6				DC□□T0702□□
E10K-SDQCR/L-07	●		13	10	9	125	7				
E12M-SDQCR/L-07			16	12	11	150	9				
E16R-SDQCR/L-07			20	16	15	200	11				
E16R-SDQCR/L-11	●		20	16	15	200	11				
E20R-SDQCR/L-11			25	20	18	200	13	FTGA03508	TW15P	2	
E20S-SDQCR/L-11			25	20	19	250	13				

➔ Applicable inserts, see pages B60~B62, B81


● : Stock item



SDUCR/L



DC□□

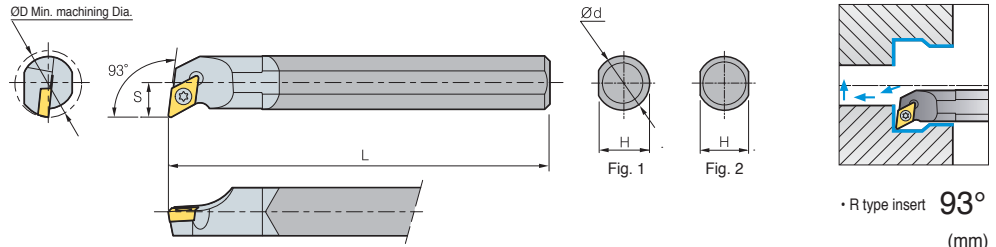

• R type insert **93°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.
	R	L									
C10K-SDUCR/L-07	●		13	10	9	125	7	DC□□T0702□□	FTKA02555	TW07P	2
C10M-SDUCR/L-07	●		13	10	9	150	7				
C12M-SDUCR/L-07	●		16	12	11	150	9				
C12Q-SDUCR/L-07	●		16	12	11	180	9				
C16R-SDUCR/L-07	●		20	16	15	200	11	DC□□T11T3□□	FTKA02565	TW07P	
C16S-SDUCR/L-07	●		20	16	15	250	11				
C16R-SDUCR/L-11	●		20	16	15	200	11				
C16S-SDUCR/L-11	●		20	16	15	250	11				
C20R-SDUCR/L-11	●		25	20	18	200	13	DC□□T11T3□□	FTGA03508	TW15P	
C20S-SDUCR/L-11	●		25	20	18	250	13				
C25T-SDUCR/L-11	●		32	25	23	300	17		FTGA03510	TW15P	
E10K-SDUCR/L-07	●		13	10	9	125	7	DC□□T0702□□	FTKA02555	TW07P	2
E10M-SDUCR/L-07	●		13	10	9	150	7				
E12M-SDUCR/L-07	●		16	12	11	150	9				
E12Q-SDUCR/L-07	●		16	12	11	180	9				
E16R-SDUCR/L-07	●		20	16	15	200	11	DC□□T11T3□□	FTKA02565	TW07P	
E16S-SDUCR/L-07	●		20	16	15	250	11				
E16R-SDUCR/L-11	●		20	16	15	200	11				
E16S-SDUCR/L-11	●		20	16	15	250	11				
E20R-SDUCR/L-11	●		25	20	18	200	13	DC□□T11T3□□	FTGA03508	TW15P	
E20S-SDUCR/L-11	●		25	20	18	250	13				
E25T-SDUCR/L-11	●		32	25	23	300	17		FTGA03510	TW15P	


➤ Applicable inserts, see pages B60~B62, B81

● : Stock item

STFCR/L



TC□□

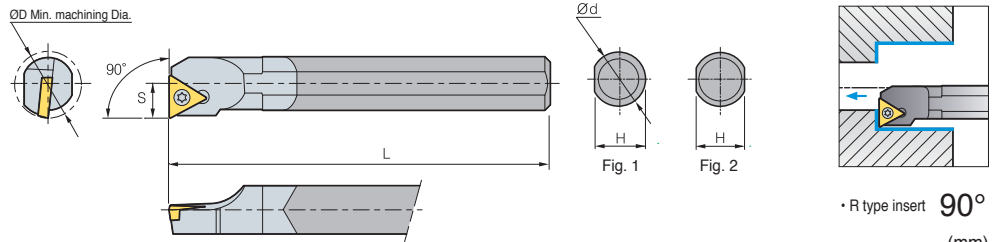

• R type insert **90°**
(mm)

Designation	Stock		ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.
	R	L									
C08K-STFCR/L-09	●		10	8	7	125	5	TC□□T0902□□	FTKA02206	TW06P	2
C10K-STFCR/L-09	●	●	12	10	9	125	6				
C10K-STFCR/L-11	●		12	10	9	125	6	TC□□T1102□□	FTKA02565	TW07P	
C12M-STFCR/L-11	●		15	12	11	150	8				
C16R-STFCR/L-11	●		20	16	15	200	10				
C20R-STFCR/L-11	●		25	20	18	200	13				
C20S-STFCR/L-11	●		25	20	18	250	13	TC□□T16T3□□	FTGA03510	TW15P	
C20R-STFCR/L-16	●		25	20	18	200	13				
C20S-STFCR/L-16	●		25	20	18	250	13		FTGA03510	TW15P	
E08K-STFCR/L-09	●		10	8	7	125	5	TC□□T0902□□	FTKA02206	TW06P	2
E10K-STFCR/L-09	●		12	10	9	125	6				
E10K-STFCR/L-11	●		12	10	9	125	6	TC□□T1102□□	FTKA02565	TW07P	
E12M-STFCR/L-11	●		15	12	11	150	8				
E16R-STFCR/L-11	●		20	16	15	200	11				
E20R-STFCR/L-11	●		25	20	18	200	13				
E20S-STFCR/L-11	●		25	20	18	250	13	TC□□T16T3□□	FTGA03510	TW15P	
E20R-STFCR/L-16	●		25	20	18	200	13				
E20S-STFCR/L-16	●		25	20	19	250	13		FTGA03510	TW15P	

➤ Applicable inserts, see pages B67~B69

● : Stock item




B Carbide Shank Boring Bar

STFPR/L



TP□□

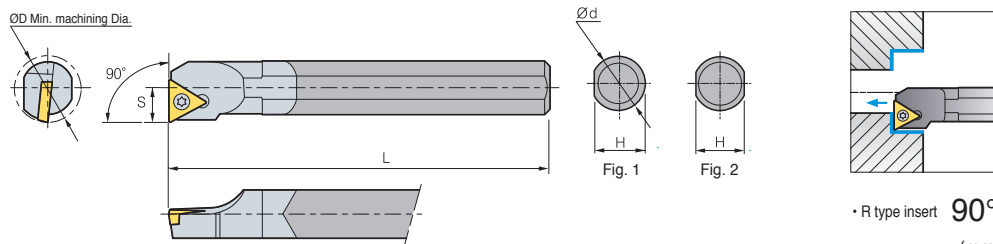

• R type insert 90°
(mm)

Designation	Stock		ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.		
	R	L											
C08K-STFPR/L-08	●		10	8	7	125	5	TP□□T0802□□	FTNA02205	TW06P	2		
C10K-STFPR/L-11	●		12	10	9	125	6	TP□□T1103□□	FTNA0305	TW09P			
C10M-STFPR/L-11	●		12	10	9	150	6		FTNA0307	TW09P			
C12M-STFPR/L-11	●		15	12	11	150	8						
C12Q-STFPR/L-11	●		15	12	11	180	8		FTNA0408	TW15P			
C16R-STFPR/L-11	●		20	16	15	200	10						
C16S-STFPR/L-11	●		20	16	15	250	10		TP□□T1604□□	FTNA0408		TW15P	
C20R-STFPR/L-11	●		25	20	18	200	13						
C20S-STFPR/L-11	●		25	20	18	250	13		TP□□T0802□□	FTNA02205		TW06P	
C20R-STFPR/L-16	●		25	20	18	200	13						
C20S-STFPR/L-16	●		25	20	18	250	13		TP□□T1103□□	FTNA0305	TW09P		
C25T-STFPR/L-16	●		32	25	23	300	17						
E08K-STFPR/L-08	●		10	8	7	125	5	TP□□T0802□□	FTNA02205	TW06P	2		
E10K-STFPR/L-11	●		12	10	9	125	6	TP□□T1103□□	FTNA0305	TW09P			
E10M-STFPR/L-11	●		12	10	9	150	6						
E12M-STFPR/L-11	●		15	12	11	150	8						
E12Q-STFPR/L-11	●		15	12	11	180	8						
E16R-STFPR/L-11	●		20	16	15	200	10						
E16S-STFPR/L-11			20	16	15	250	10						
E20R-STFPR/L-11			25	20	18	200	13						
E20S-STFPR/L-11	●		25	20	18	250	13						
E20R-STFPR/L-16			25	20	18	200	13					TP□□T1604□□	FTNA0408
E20S-STFPR/L-16			25	20	18	250	13						
E25T-STFPR/L-16			32	25	23	300	17						


➔ Applicable inserts, see pages B70~B72

● : Stock item

STUBR/L



TB□□

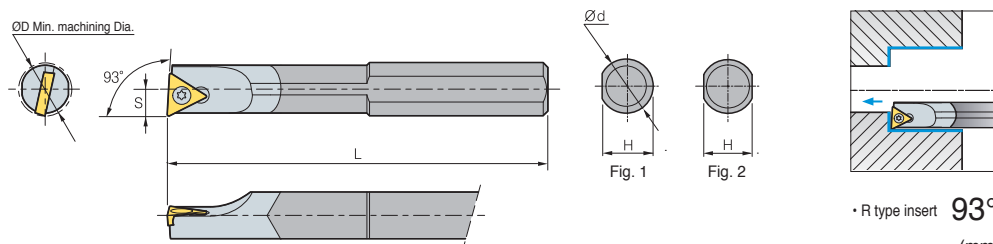

• R type insert 93°
(mm)

Designation	Stock		ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.
	R	L									
C08K-STUBR/L-06	●	●	10	8	7	125	5	TB□□T0601□□	FTNA0204	TW06P	2
C10K-STUBR/L-06	●		12	10	9	125	6				
E08K-STUBR/L-06	●		10	8	7	125	5	TB□□T0601□□	FTNA0204	TW06P	
E10K-STUBR/L-06	●		12	10	9	125	6				

➔ Applicable inserts, see pages B67


● : Stock item



STUPR/L



TP□□

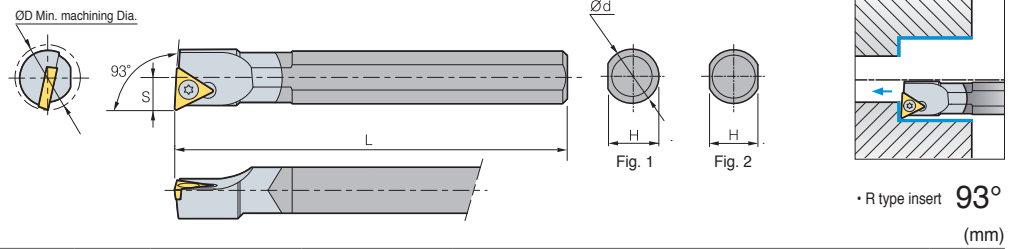


Designation	Stock		ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.
	R	L									
C08K-STUPR/L-08	●		10	8	7	125	5	TP□□T0802□□	FTNA02205	TW06P	2
C10K-STUPR/L-11	●		12	10	9	125	6		TP□□T1103□□	FTNA0305	
C10M-STUPR/L-11	●		12	10	9	150	6	FTNA0307		TW09P	
C12M-STUPR/L-11	●		15	12	11	150	8				
C12Q-STUPR/L-11	●		15	12	11	180	8				
C16R-STUPR/L-11	●		20	16	15	200	10				
C16S-STUPR/L-11	●		20	16	15	250	10				
C20R-STUPR/L-11	●		25	20	18	200	13				
C20S-STUPR/L-11	●		25	20	18	250	13				
C20R-STUPR/L-16	●		25	20	18	200	13	TP□□T1604□□	FTNA0408	TW15P	
C20S-STUPR/L-16	●		25	20	18	250	13				
C25T-STUPR/L-16	●		32	25	23	300	17				
E08K-STUPR/L-08	●		10	8	7	125	5	TP□□T0802□□	FTNA02205	TW06P	2
E10K-STUPR/L-11			12	10	9	125	6				
E10M-STUPR/L-11	●		12	10	9	150	6				
E12M-STUPR/L-11	●		15	12	11	150	8				
E12Q-STUPR/L-11			15	12	11	180	8				
E16R-STUPR/L-11	●		20	16	15	200	10				
E16S-STUPR/L-11			20	16	15	250	10				
E20R-STUPR/L-11			25	20	18	200	13				
E20S-STUPR/L-11			25	20	18	250	13				
E20R-STUPR/L-16			25	20	18	200	13	TP□□T1604□□	FTNA0408	TW15P	
E20S-STUPR/L-16			25	20	18	250	13				
E25T-STUPR/L-16			32	25	23	300	17				


➔ Applicable inserts, see pages B70~B72

● : Stock item

SWUBR/L



WB□T

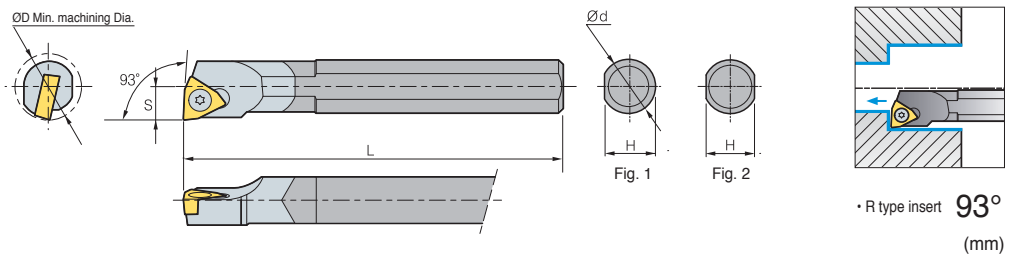

Designation	Stock		ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.
	R	L									
C05H-SWUBR/L-02	●		6	5	4.4	100	3	WB□T0201□□	FTNA0203	TW06P	1
C06H-SWUBR/L-02	●		7	6	5.4	100	3.5		WB□TS301□□	FTNA02033	
C08K-SWUBR/L-02	●		9	8	7	125	4.5	WB□T0201□□		FTNA02205	TW06P
C08K-SWUBR/L-S3	●		10	8	7	125	4.5		WB□TS301□□	FTNA0203	TW06P
E06H-SWUBR/L-02			7	6	5.4	100	3.5	WB□T0201□□		FTNA02033	TW06P
E08K-SWUBR/L-02	●		9	8	7	125	4.5		WB□TS301□□	FTNA02205	TW06P
E08K-SWUBR/L-S3			10	8	7	125	5				

➔ Applicable inserts, see pages B78

● : Stock item




※ See page B203 for applicable sleeves

B Technical Information for HSK Tooling System

2 sides restraint - side and taper part


HSK Tooling System [For Multi-task Machines]

- 2 sides restraint - side and taper part
- Toughness guaranteed for static and dynamic movements
- Precision guaranteed on shaft and repeat directions
- Suitable at high speeds
- Suitable for small work pieces
- Coolant Nozzle is easily adjustable

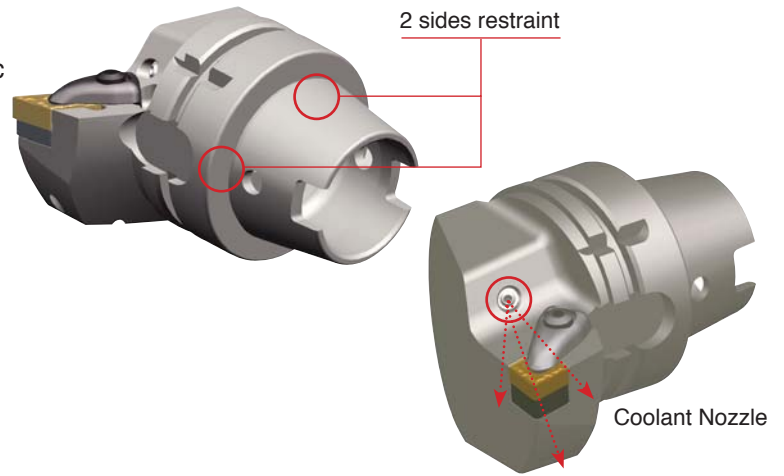

▶ HSK Tooling code system


C : 80° Diamond **D** : 55° Diamond **DX** : 65
S : 90° Square **T** : 60° Triangle **N** = 0° **H** : 100
V : 35° Diamond **W** : 80° Hexagon **B** = 5° **L** : 140

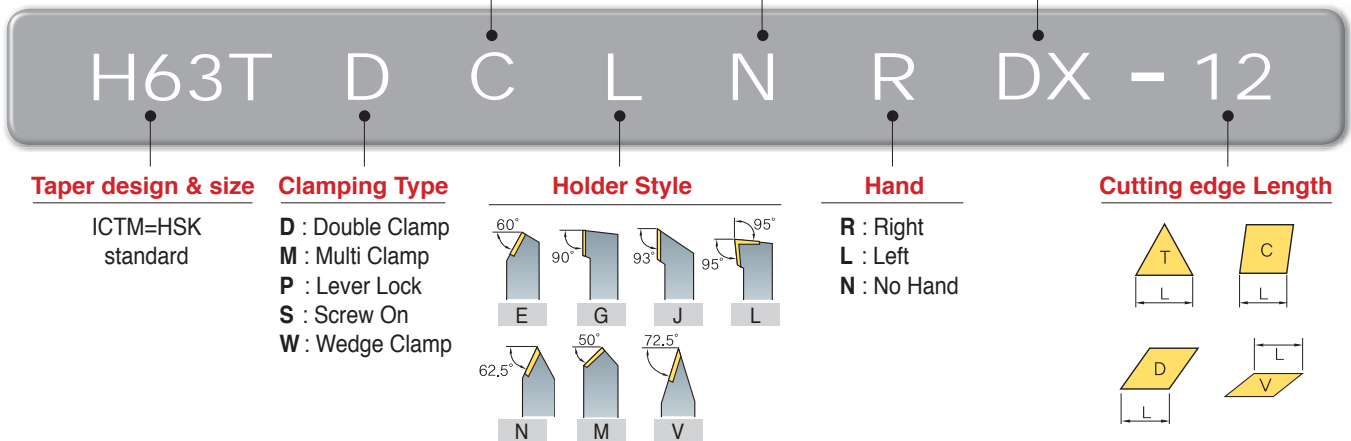

▶ ICTM (Interface Committee for Turning Mill)

▶ Interface for Multi-task machines turning tool, which is tooling system based on ICTM standard from 17 major Japanese companies cooperation and is compatible with conventional HSK-A type and common to Multi-task machines and machining centers

▶ Tolerance of Keyway has been improved : HSK-T63

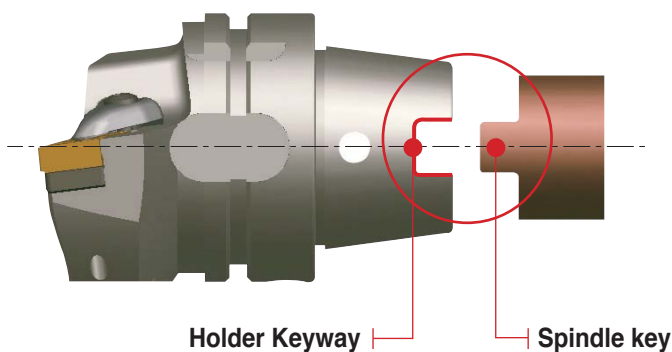

▶ Tolerance comparison(Example) (mm)


Remarks	Maximum Tolerance	Minimum Tolerance
ICTM STANDARD HSK-T63	0.075	0.035
ISO STANDARD HSK-A63		



3 Face Binding - Superior precision

KM Tooling System [For Multi-task Machines]


- 3 Face Binding / Superior precision
- Flexible Clamping System / Superior Rigidity
- Various Size & Style
- Appropriate for Turning & Milling
- Adjustable coolant direction with Coolant Nozzle

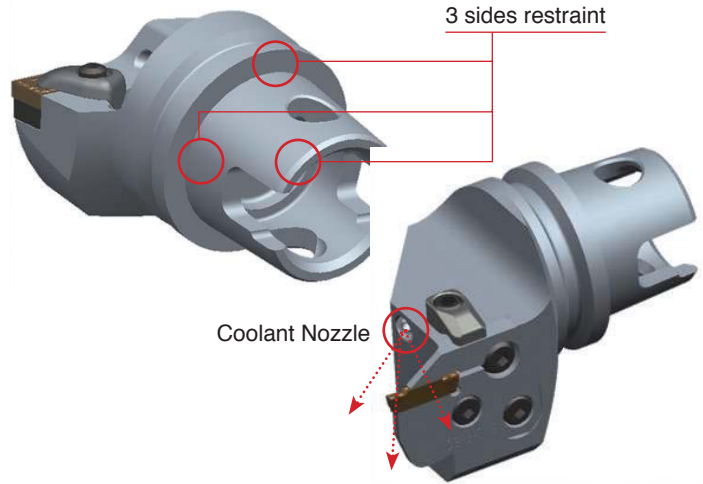


▶ **KM Tooling code system**

C : 80° Diamond **D** : 55° Diamond
S : 90° Square **T** : 60° Triangle **N** = 0°
V : 35° Diamond **W** : 80° Hexagon **B** = 5°

DX : 65
H : 100
L : 140

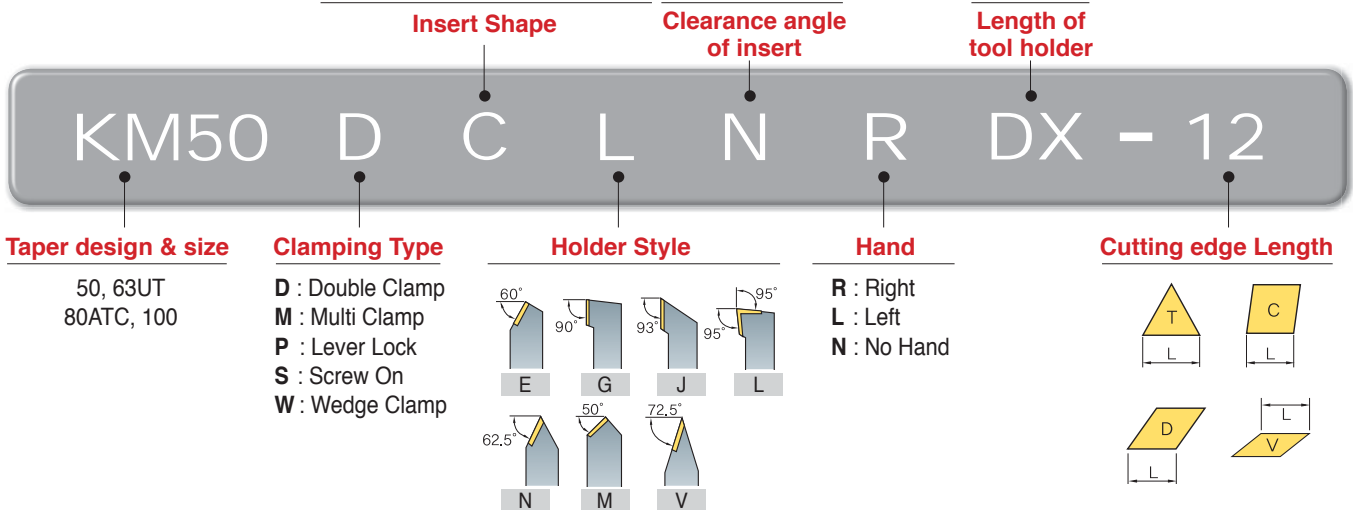

▶ **Multi-Tasking Machine**

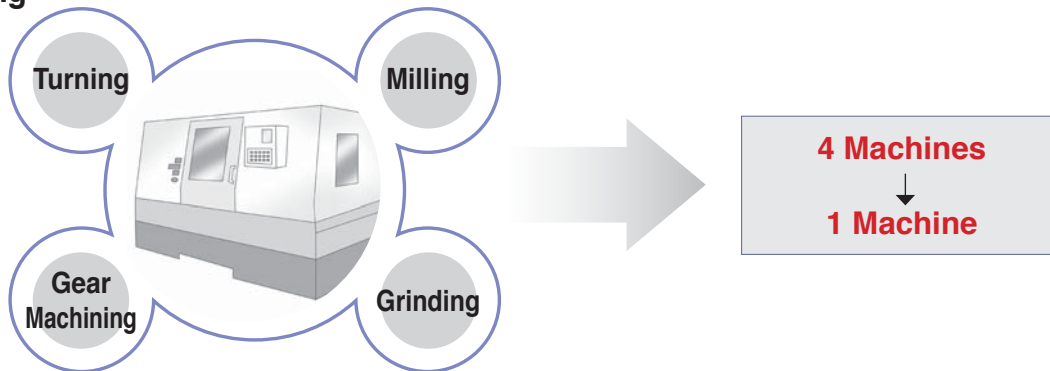

KM Tooling system is superior for wide application.

External Process
Internal Process
Grooving Process
Drill Process
Parting-off Process

KM50, KM63UT, KM80, KM100 Standard and Special type can be produced.



Index for HSK Tooling System

Cutting Shape								
Designation	H63T-DCLNR/L-DX12	H63T-DCMNN-H/L12	H63T-DDJNR/L-DX15	H63T-DDNNN-H/L15	H63T-PCLNR/L-DX12	H63T-PCMNN-H/L12	H63T-PDJNR/L-DX15	H63T-PDNNN-H/L15
Approach angle	95°	95°	93°	107.5°	95°	95°	93°	107.5°
Page	B159	B159	B159	B159	B160	B160	B160	B160
Turning	●	●	●	●	●	●	●	●
Copying			●	●			●	●
Facing	●	●	●	●	●	●	●	●
Back turning	●	●	●	●	●	●	●	●
Internal turning								

Cutting Shape							
Designation	H63T-PRDCR-DX12	H63T-PRDCN-H/L12	H63T-SVPBR/L-DX16	H63T-SVVBH-H/L16	H63T-A25K/A32L-DCLNR/L-12	H63T-MCHR/L	H63T-MCHR/L
Approach angle	-	-	117.5°	117.5°	95°	-	-
Page	B161	B161	B161	B161	B163	B162	B162
Turning	●	●	●	●	●	●	
Copying	●	●	●	●	●	●	
Facing	●	●	●	●	●	●	●
Back turning	●	●	●	●	●		
Internal turning					●		


Index for KM Tooling System

Cutting Shape						
Designation	KM50-DCLNR/L-C12 KM63UT-DCLNR/L-D12	KM50-DCMNN-C12 KM63UT-DCMNN-D12	KM50-DDJNR/L-C15(-3) KM63UT-DCLNR/L-D15(-3)	KM50-DDNNN-C15(-3) KM63UT-DDNNN-D15(-3)	KM50-A25K-DCLNR/L-12 KM50-A32K-DCLNR/L-12 KM63UT-A25K-DCLNR/L-12 KM63UT-A32L-DCLNR/L-12	KM50-PCLNR/L-C12 KM63UT-PCLNR/L-D12
Approach angle	95°	95°	93°	107.5°	95°	95°
Page	B165	B165	B165	B166	B168	B166
Turning	●	●	●	●	●	●
Copying			●	●		
Facing	●	●	●	●	●	●
Back turning	●	●	●	●	●	●
Internal turning					●	



Cutting Shape						
Designation	KM50-PCMNN-C12 KM63UT-PCMNN-D12	KM50-PDJNR/L-C15(-3) KM63UT-PCLNR/L-D15(-3)	KM50-PDNNN-C15(-3) KM63UT-PDNNN-D15(-3)	KM50-MCHR/L KM63UT-MCHR/L		
Approach angle	95°	93°	107.5°	-		
Page	B166	B167	B167	B167		
Turning	●	●	●	●		
Copying		●	●	●		
Facing	●	●	●			
Back turning	●	●	●	●		
Internal turning						



DCLNR/L



CN□□

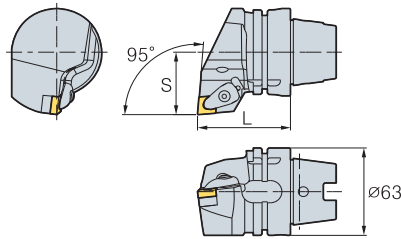


95°

• R type insert
(mm)



Designation	L	S	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench	Coolant Pipe
H63T-DCLNR/L-DX12	65	45	CN□□1204□□	CVH4	CHX0518	SC44V	FTKA0410	SPR0714	CN0605	-	HW30P	CP63T

➔ Applicable inserts, see pages B20 ~ B25

DCMNN



CN□□

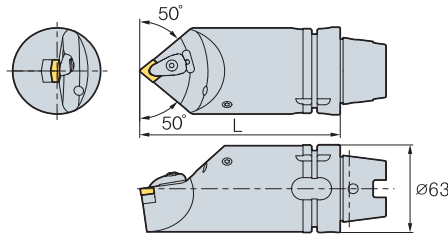

95°

(mm)



Designation	L	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench	Coolant Pipe
H63T-DCMNN-H12	100	CN□□1204□□	CVH4	CHX0518	SC44V	FTKA0410	SPR0714	CN0605	KHA0808	HW30P	CP63T
H63T-DCMNN-L12	140										

➔ Applicable inserts, see pages B20 ~ B25

DDJNR/L



DN□□



93°

• R type insert
(mm)



Designation	L	S	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench	Coolant Pipe
H63T-DDJNR/L-DX15	65	45	DN□□1506□□	CVH4	CHX0518	SD43V	FTKA0410	SPR0714	CN0605	-	HW30P	CP63T
H63T-DDJNR/L-DX15-3	65	45	DN□□1504□□			SD44V						

➔ Applicable inserts, see pages B26 ~ B31

DDNNN



DN□□

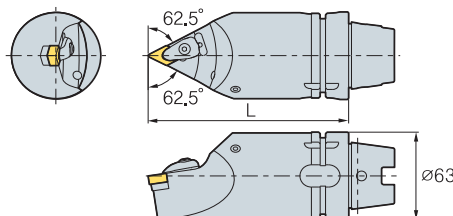


107.5°

(mm)



Designation	L	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench	Coolant Pipe
H63T-DDNNN-H15	100	DN□□1506□□	CVH4	CHX0518	SD43V	FTKA0410	SPR0714	CN0605	KHA0808	HW30P	CP63T
H63T-DDNNN-L15	140										
H63T-DDNNN-H15-3	100	DN□□1504□□	CVH4	CHX0518	SD44V	FTKA0410	SPR0714	CN0605	KHA0808	HW30P	CP63T
H63T-DDNNN-L15-3	140										

➔ Applicable inserts, see pages B26 ~ B31

PCLNR/L



CN□□

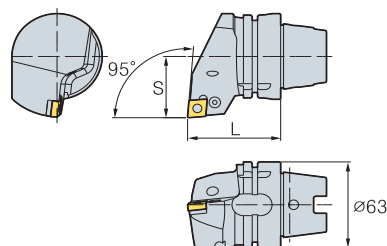


95°

• R type insert
(mm)



Designation	L	S	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench	Coolant Pipe
H63T-PCLNR/L-DX12	65	45	CN□□1204□□	LV4N	VHX0820N	SC42N	SP4N	LSPS4	CN0605	-	HW30L	CP63T

➔ Applicable inserts, see pages B20 ~ B25

PCMNN



CN□□

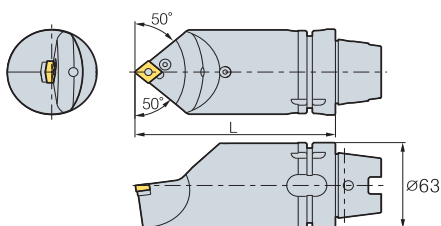

95°

(mm)



Designation	L	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench	Coolant Pipe
H63T-PCMNN-H12	100	CN□□1204□□	LV4N	VHX0820N	SC42N	SP4N		CN0605	KHA0808	HW30L	CP63T
H63T-PCMNN-L12	140										

➔ Applicable inserts, see pages B20 ~ B25

PDJNR/L



DN□□

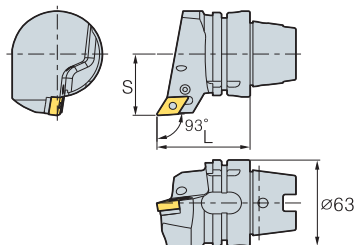

95°

• R type insert
(mm)



Designation	L	S	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench	Coolant Pipe
H63T-PDJNR/L-DX15	65	45	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	LSPS4	CN0605	-	HW30L	CP63T
H63T-PDJNR/L-DX15-3	65	45	DN□□1504□□			SD43N						

➔ Applicable inserts, see pages B30 ~ B33

PDNNN



DN□□

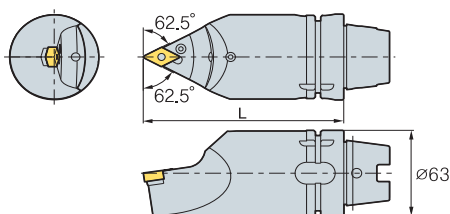

107.5°

(mm)

Designation	L	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench	Coolant Pipe
H63T-PDNNN-H15	100	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	LSPS4	CN0605	KHA0808	HW30L	CP63T
H63T-PDNNN-L15	140										
H63T-PDNNN-H15-3	100	DN□□1504□□	LV4BN	VHX0821N	SD43N	SP4N	LSPS4	CN0605	KHA0808	HW30L	CP63T
H63T-PDNNN-L15-3	140										



➔ Applicable inserts, see pages B26 ~ B31



PRGCR/L



RCMX1204M0

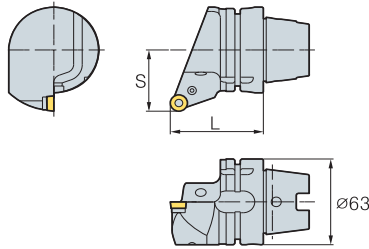

• R type insert
(mm)



Designation	L	S	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench	Coolant Pipe
H63T-PRGCR/L-DX12	65	45	RCMX1204M0	LR12	VHX0617	SR12	SP3	LSPS3	CN0605	-	HW25L	CP63T

➔ Applicable inserts, see pages B63

PRDCN



RCMX1204M0

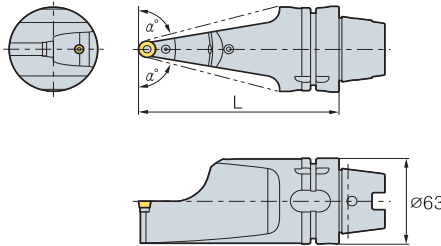

(mm)



Designation	L	α°	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench	Coolant Pipe
H63T-PRDCN-H12	100	69	RCMX1204M0	LR12	VHX0617	SR12	SP3	LSPS3	CN0605	-	HW25L	CP63T
H63T-PRDCN-L12	140	75										

➔ Applicable inserts, see pages B63

SVPBR/L



VB□T

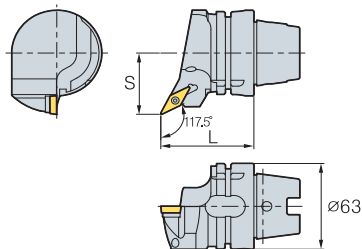

117.5°
• R type insert
(mm)



Designation	L	S	Insert	Screw	Shim Screw	Shim	Nozzle	Plug	Wrench	Wrench	Coolant Pipe
H63T-SVPBR/L-DX16	65	45	VB□T1604□□	FTGA03512	SHXN0509F	SV32S	CN0605	-	TW15P	HW32L	CP63T

➔ Applicable inserts, see pages B73 ~ B74, B85

SVVBN



VB□T

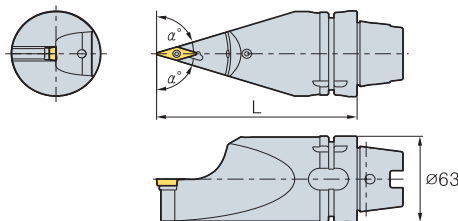

117.5°
(mm)




Designation	L	α°	Insert	Screw	Shim Screw	Shim	Nozzle	Plug	Wrench	Wrench	Coolant Pipe
H63T-SVVBN-H16	100	66.5	VB□T1604□□	FTGA03512	SHXN0509F	SV32S	CN0605	KHA0808	TW15P	HW32L	CP63T
H63T-SVVBN-L16	140	72.5									

➔ Applicable inserts, see pages B73 ~ B74, B85

MCHR/L



MGMN / MGMR/L
MGGN / MRMN



• R type insert



Designation	L	t	W	T-MAX	Insert	Cartridge	Clamp	Clamp Screw	Hinge Screw	Screw	Nozzle	Plug	Wrench	Coolant Pipe
H63T-MCHR/L	85	18	3	16	MGMN	MCER/L3-T16	CHX8N	DHA0818F	RHA0613	FHGA0618	CN0605	-	HW40L	CP63T
	85	18	4	16	MGMR/L	MCER/L4-T16								
	89	22	5	20	MGGN	MCER/L5-T20								
	89	22	6	20	MRMN	MCER/L6-T20								

(mm)

MCER/L (Cartridge)



MGMN / MGMR/L
MGGN / MRMN



• R type insert

Designation	L	L1	S1	T-MAX	Insert		Available tool holders	
					W	Designation		
MCER/L	3-T16	6.00	44.5	6.35	16	3	MGMN	H63T-MCHR/L
	4-T16	5.97	44.5	6.35	16	4	MGMR/L	
	5-T20	5.87	48.5	6.35	20	5	MGGN	
	6-T20	5.82	48.5	6.35	20	6	MGMN	




↻ Applicable inserts, see pages C24 ~ C25

(mm)

MCHR/L



MFMN300
MGMN400

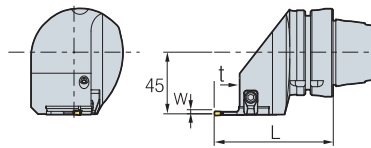

• R type insert

Designation	L	t	W	T-MAX	Insert	Cartridge	Clamp	Clamp Screw	Hinge Screw	Screw	Nozzle	Plug	Wrench	Coolant Pipe
H63T-MCHR/L	85	18	3	16	MFMN300	MCFR/L3-24/35-T16	CHX8N	DHA0818F	RHA0613	FHGA0618	CN0605	-	HW40L	
	85	18	3	16		MCFR/L3-29/40-T16								
	85	18	3	16		MCFR/L3-34/50-T16								
	85	18	3	16		MCFR/L3-44/70-T16								
	85	18	3	16	MCFR/L3-64/99-T16	MGMN400								
	85	18	3	16	MCFR/L4-44/60-T16									
	85	18	3	16	MCFR/L4-60/120-T16									
	85	18	3	16	MCFR/L4-112/200-T16									


(mm)



MCFR/L (Cartridge)



MFMN300
MGMN400

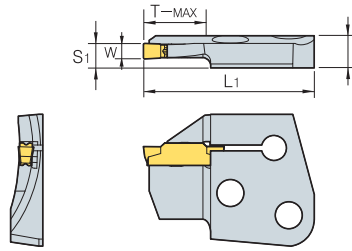


• R type insert

(mm)

Designation	T	L ₁	S ₁	T-MAX	Insert		Available tool holders
					W	Designation	
MCFR/L3- 24/35-T16	8.00	44.5	6.35	16	3	MFMN300	H63T-MCHR/L
29/40-T16	8.00	44.5	6.35	16	3		
34/50-T16	8.00	44.5	6.35	16	3		
44/70-T16	8.00	44.5	6.35	16	3		
64/99-T16	8.00	44.5	6.35	16	3		
MCFR/L4- 44/60-T16	7.97	44.5	6.35	16	4	MGMN400	
60/120-T16	7.97	44.5	6.35	16	4		
112/200-T16	7.97	44.5	6.35	16	4		





➔ Applicable inserts, see pages C24 ~ C25

DCLNR/L



CN□□

ØD Min. machining Dia.



95°





• R type insert

(mm)

Designation	ØD	Ød	L	L ₁	S	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench	Coolant Pipe
H63T-A25K-DCLNR/L-12	32	25	125	80	17	CN□□1204□□									
H63T-A32L-DCLNR/L-12	40	32	140	98	22										

➔ Applicable inserts, see pages B20 ~ B25


Blank Tool



(mm)

Designation	ØD	L	Fig.	Coolant Pipe
HSK-T63-BL62-102	62	102	1	
HSK-T63-BL62-142	62	142	2	
HSK-T63-BL100-67	100	67	1	
HSK-T63-BL120-70	120	70	2	

EV2525R/L-112

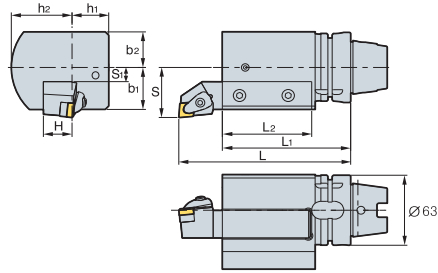


- **Holder information**
- Holder size: 25 x 25
- Before setting the holder, please cut the holder length to 115mm.

• R type insert (mm)

Designation	L	L ₁	L ₂	H	h ₁	h ₂	S	S ₁	b ₁	b ₂	Screw	Plug	Nozzle	Wrench	Coolant Pipe
EV2525R/L-112	150	112	77	25	32	53	45	12.75	37.75	32	KHA1231	KHA0808	CN0605	HW50L	CP63T

EV2525R/L-115

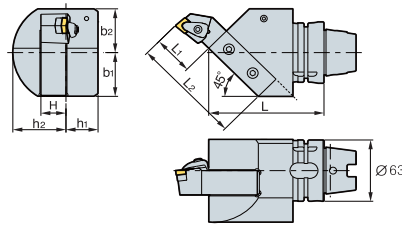


- **Holder information**
- Holder size: 25 x 25
- Before setting the holder, please cut the holder length to 110mm.

• R type insert (mm)

Designation	L	L ₁	L ₂	H	h ₁	h ₂	b ₁	b ₂	Screw	Plug	Nozzle	Wrench	Coolant Pipe
EV2525R/L-115	115	40	110	25	32	53	45	45	KHA1231	KHA0808	CN0605	HW50L	CP63T

EV2020R/L-105-3

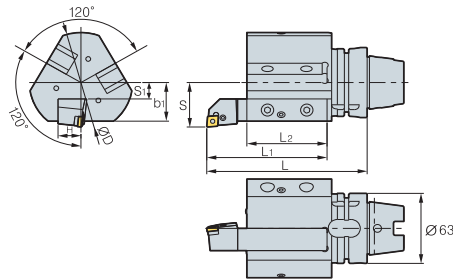


- **Holder information**
- Holder size: 25 x 25
- Before setting the holder, please cut the holder length to 105mm.

• R type insert (mm)

Designation	L	L ₁	L ₂	H	ØD	S	S ₁	B ₁	Screw	Plug	Nozzle	Wrench	Coolant Pipe
EV2020R/L-105-3	140	105	70	20	90	40	15	35	KHA1231	KHA0808	CN0605	HW50L	CP63T

B○○-○○

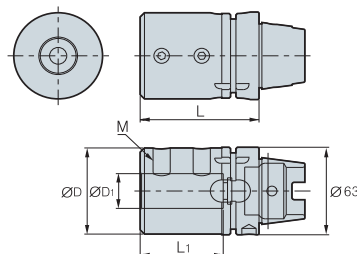

• R type insert (mm)



Designation	ØD	D ₁	L	L ₁	M	Screw	Wrench	Coolant Pipe
B08-65	28	8	65	40	M8	KHA1218	HW50L	CP63T
B10-70	35	10	70	45	M8			
B12-70	42	12	70	45	M8			
B16-75	48	16	75	50	M10			
B20-75	52	20	75	50	M10			
B25-83	62	25	83	58	M12			
B32-87	62	32	87	62	M12			
B40-97	65	40	97	72	M16			



DCLNR/L



CN□□



95°
• R type insert
(mm)



Designation	L	S	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench
KM50-DCLNR/L-C12	50	35	CN□□1204□□	CVH4	CHX0518	SC44V	FTKA0410	SPR0714	CN0605	-	HW30P
KM63UT-DCLNR/L-D12	60	43									

↪ Applicable inserts, see pages B20 ~ B25

DCMNN



CN□□



95°
(mm)



Designation	L	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench
KM50-DCMNN-C12	50	CN□□1204□□	CVH4	CHX0518	SC44V	FTKA0410	SPR0714	CN0605	KHA0808	HW30P
KM63UT-DCMNN-D12	60									

↪ Applicable inserts, see pages B20 ~ B25

DDJNR/L



DN□□



93°
• R type insert
(mm)



Designation	L	S	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench
KM50-DDJNR/L-C15	50	35	DN□□1506□□	CVH4	CHX0518	SD43V	FTKA0410	SPR0714	CN0605	-	HW30P
KM50-DDJNR/L-C15-3	50	35	DN□□1504□□	CVH4	CHX0518	SD44V	FTKA0410	SPR0714	CN0605	-	HW30P
KM63UT-DDJNR/L-D15	60	43	DN□□1506□□	CVH4	CHX0518	SD43V	FTKA0410	SPR0714	CN0605	-	HW30P
KM63UT-DDJNR/L-D15-3	60	43	DN□□1504□□	CVH4	CHX0518	SD44V	FTKA0410	SPR0714	CN0605	-	HW30P

↪ Applicable inserts, see pages B26 ~ B31

DDNNN



DN□□



117.5°

(mm)



Designation	L	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench
KM50-DDNNN-C15	50	DN□□1506□□	CVH4	CHX0518	SD43V	FTKA0410	SPR0714	CN0605	KHA0808	HW30P
KM50-DDNNN-C15-3	50	DN□□1504□□	CVH4	CHX0518	SD44V	FTKA0410	SPR0714	CN0605	KHA0808	HW30P
KM63UT-DDNNN-D15	60	DN□□1506□□	CVH4	CHX0518	SD43V	FTKA0410	SPR0714	CN0605	KHA0808	HW30P
KM63UT-DDNNN-D15-3	60	DN□□1504□□	CVH4	CHX0518	SD44V	FTKA0410	SPR0714	CN0605	KHA0808	HW30P

↻ Applicable inserts, see pages B26 ~ B31

PCLNR/L



CN□□

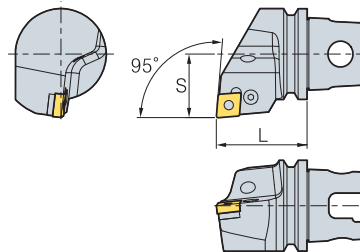

95°


• R type insert

(mm)



Designation	L	S	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench
KM50-PCLNR/L-C12	50	35	CN□□1204□□	LV4N	VHX0820N	SC42N	SP4N	LSPS4	CN0605	-	HW30L
KM63UT-PCLNR/L-D12	60	43									

↻ Applicable inserts, see pages B20 ~ B25

PCMNN



CN□□



95°

(mm)

Designation	L	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench
KM50-PCLNR/L-C12	50	CN□□1204□□	LV4N	VHX0820N	SC42N	SP4N	LSPS4	CN0605	KHA0808	HW30L
KM63UT-PCLNR/L-D12	60									



↻ Applicable inserts, see pages B20 ~ B25



PDJNR/L



DN□□



93°

• R type insert

(mm)



Designation	L	S	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench
KM50-PDJNR/L-C15	50	35	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	LSPS4	CN0605	-	HW30L
KM50-PDJNR/L-C15-3	50	35	DN□□1504□□	LV4BN	VHX0821N	SD43N	SP4N	LSPS4	CN0605	-	HW30L
KM63UT-PDJNR/L-D15	60	43	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	LSPS4	CN0605	-	HW30L
KM63UT-PDJNR/L-D15-3	60	43	DN□□1504□□	LV4BN	VHX0821N	SD43N	SP4N	LSPS4	CN0605	-	HW30L

➔ Applicable inserts, see pages B26 ~ B31

PDNNN



DN□□



107.5°

(mm)



Designation	L	Insert	Lever	Screw	Shim	Shim pin	Punching	Nozzle	Plug	Wrench
KM50-PDNNN-C15	50	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	LSPS4	CN0605	KHA0808	HW30L
KM50-PDNNN-C15-3	50	DN□□1504□□	LV4BN	VHX0821N	SD43N	SP4N	LSPS4	CN0605	KHA0808	HW30L
KM63UT-PDNNN-D15	60	DN□□1506□□	LV4BN	VHX0821N	SD42N	SP4N	LSPS4	CN0605	KHA0808	HW30L
KM63UT-PDNNN-D15-3	60	DN□□1504□□	LV4BN	VHX0821N	SD43N	SP4N	LSPS4	CN0605	KHA0808	HW30L

➔ Applicable inserts, see pages B26 ~ B31

MCHR/L



MGMN / MGMR/L
MGGN / MRMN



• R type insert

(mm)


Designation	S	L	t	W	T-MAX	Insert	Cartridge	Clamp	Clamp Screw	Hinge Screw	Screw	Nozzle	Plug	Wrench
KM50-MCHR/L	35	72.5	18	3	16	MGMN MGMR/L	MCER/L3-T16	CHX8N	DHA0818F	RHA0613	FHGA0618	CN0605	-	HW40L
	35	72.5	18	4	16		MCER/L4-T16							
	35	76.5	22	5	20		MCER/L5-T20							
	35	76.5	22	6	20		MCER/L6-T20							
KM63UT-MCHR/L	43	81.5	18	3	16	MGGN MRMN	MCER/L3-T16	CHX8N	DHA0818F	RHA0613	FHGA0618	CN0605	-	HW40L
	43	81.5	18	4	16		MCER/L4-T16							
	43	85.5	22	5	20		MCER/L5-T20							
	43	85.5	22	6	20		MCER/L6-T20							



MCER/L (Cartridge)



MGMN / MGMR/L
MGGN / MRMN



• R type insert

(mm)

Designation	T	L ₁	S ₁	T-MAX	Insert		Available tool holders	
					W	Designation		
MCER/L	3-T16	6.00	44.5	6.35	16	3	MGMN	H-63T-MCHR/L
	4-T16	5.97	44.5	6.35	16	4	MGMR/L	
	5-T20	5.87	48.5	6.35	20	5	MGGN	
	6-T20	5.82	48.5	6.35	20	6	MRMN	





↻ Applicable inserts, see pages C24 ~ C25

KM○○-DCLNR/L



CN□□

ØD Min. machining Dia.



95°

• R type insert

(mm)

Designation	ØD	Ød	L	L ₁	S	Insert	Clamp	Screw	Shim	Shim Screw	Spring	Nozzle	Plug	Wrench
KM50-A25K-DCLNR/L-12	32	25	125	80	17	CN□□1204□□								
KM50-A32L-DCLNR/L-12	40	32	140	98	22									
KM63UT-A25K-DCLNR/L-12	32	25	125	80	17									
KM63UT-A32L-DCLNR/L-12	40	32	140	98	22									

↻ Applicable inserts, see pages B20 ~ B25

Blank Tool




Fig. 1





Fig. 2

(mm)

Designation	ØD	L	Ød	Fig.
KM50-BL7562	45	62	50	1
KM50-BL10562	105	62	50	2
KM63UT-BL65200	65	200	50	1
KM63UT-BL115150	115	150	50	2




S T F C R 12 C A - 16

1 Method of Mounting Insert 2 Insert Shape 3 Holder Style 4 Relief Angle of Insert 5 Hand 6 Height of Cutting Edge 7 Cartridge Code 8 Type of Cartridge 9 Length of Cutting Edge


1 Method of Mounting Insert

S T F C R 12 C A - 16



Top Clamping

C



Hole clamping

P



Screw on

S

2 Insert Shape

S T F C R 12 C A - 16



C





S



T

5 Hand

S T F C R 12 C A - 16




R


L

3 Holder Style


S T F C R 12 C A - 16




L




S




F




R




K



G




W



T

6 Height of Cutting Edge

S T F C R 12 C A - 16



7 Cartridge Code

S T F C R 12 C A - 16

C (Cartridge)


8 Type of Cartridge

S T F C R 12 C A - 16


A (ISO5611)

4 Relief Angle of Insert


S T F C R 12 C A - 16



C




P













N

9 Length of Cutting Edge

S T F C R 12 C A - 16




B Index for Cartridge

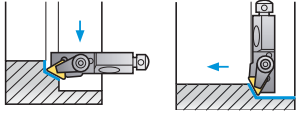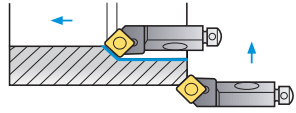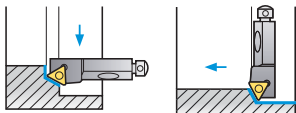

	Cutting Shape	Turning	Copying	Facing	Chamfering	Applicable inserts	Page	
Clamp on System	CSKPR/L 	10CA-09 12CA-12	●				SP□R 0903□□ 1203□□	B171
	CTTPR/L 	10CA-11 12CA-16	●				TP□R 1103□□ 1603□□	B172
	CTWPR/L 	10CA-11 12CA-16	●				TP□R 1103□□ 1603□□	B172
	CTFPR/L 	10CA-11 12CA-16	●		●		TP□R 1103□□ 1603□□	B171
	CTSPR/L 	10CA-11 12CA-16	●				TP□R 1103□□ 1603□□	B171
Screw on System	SSKCR/L 	10CA-09 12CA-12	●				SC□T 09T3□□ 1204□□	B173
	SSSCR/L 	10CA-09 12CA-12	●			●	SC□T 09T3□□ 1204□□	B173
	STFCR/L 	10CA-11 12CA-16	●		●		TC□T 1102□□ 16T3□□	B173
	STTCR/L 	10CA-11 12CA-16	●		●		TC□T 1102□□ 16T3□□	B174
	STWCR/L 	10CA-11 12CA-16	●				TC□T 1102□□ 16T3□□	B174



CSKPR/L



SP□R

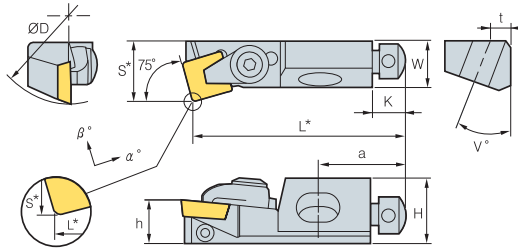

• R type insert
(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
CSKPR/L 10CA-09			40	15	11	50	14	10	8	6	0	20	5	20	SP□R 0903 □□ 1203 □□
12CA-12	●		50	20	15	55	20	12	8	6	0	20	6	20	



↻ Applicable inserts, see pages B64 ~ B66 • a base Insert : r = 0.8 D = ØD Min. machining Dia. ● : Stock item

Parts	Clamp	Axial Adjust Screw	Radial Adjust Screw	Mounting Screw	Washer	Wrench	Wrench
CSKPR/L 10CA-09	CA05R	AZ0508F	KHA0408	RHA0620	WA0602	TW 15P	HW20L
12CA-12	CA06R	AZ0508F	KHA0412	RHA0625	WA0602	TW 15P	HW20L

CTFPR/L



TP□R

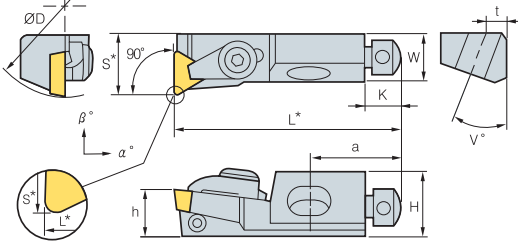

• R type insert
(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
CTFPR/L 10CA-11	●		40	15	11	50	14	10	8	6	0	20	5	20	TP□R 1103 □□ 1603 □□
12CA-16			50	20	15	55	20	12	8	6	0	20	6	20	



↻ Applicable inserts, see pages B70 ~ B72 • a base Insert : r = 0.4 (l=11) r = 0.8 (l=16) D = ØD Min. machining Dia. ● : Stock item

Parts	Clamp	Axial Adjust Screw	Radial Adjust Screw	Mounting Screw	Washer	Wrench	Wrench
CTFPR/L 10CA-09	CA05R	AZ0508F	KHA0408	RHA0620	WA0602	TW25L	HW20L
12CA-12	CA06R	AZ0508F	KHA0412	RHA0625	WA0602	TW30L	HW20L

CTSPR/L



TP□R

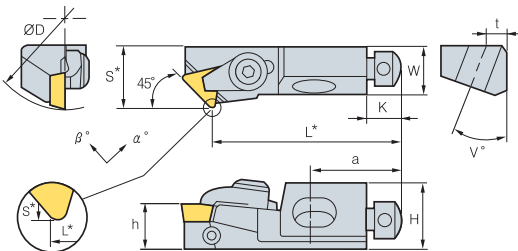

• R type insert
(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
CTSPR/L 10CA-11	●		40	15	11	44	14	10	8	4	0	20	5	20	TP□R 1103 □□ 1603 □□
12CA-16	●		50	20	15	47	20	12	8	5	0	20	6	20	

↻ Applicable inserts, see pages B70 ~ B72 • a base Insert : r = 0.4 (l=11) r = 0.8 (l=16) D = Min. machining Dia. ● : Stock item



Parts	Clamp	Axial Adjust Screw	Radial Adjust Screw	Mounting Screw	Washer	Wrench	Wrench
CTSPR/L 10CA-11	CA05R	AZ0508F	KHA0408	RHA0620	WA0602	TW25L	HW20L
12CA-16	CA06R	AZ0508F	KHA0412	RHA0625	WA0602	TW30L	HW20L

B Clamp on System

CTTPR/L



TP□R

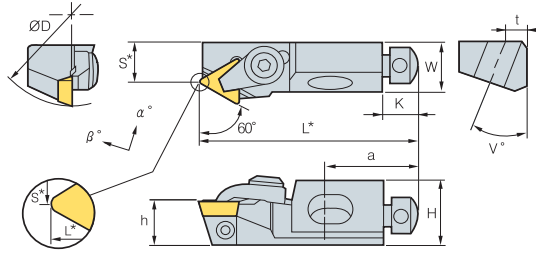

• R type insert

(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
CTTPR/L 10CA-11			40	15	11	50	9	10	8	5	0	20	5	20	TP□R 1103 □□ 1603 □□
			50	20	15	55	20	12	8	5	0	20	6	20	

➔ Applicable inserts, see pages B70 ~ B72

• a base Insert : r = 0.8 D = ØD Min. machining Dia.



● : Stock item

Parts	Clamp	Axial Adjust Screw	Radial AdjustScrew	MountingScrew	Washer	Wrench	Wrench
CTTPR/L 10CA-11	CA05R	AZ0508F	KHA0408	RHA0620	WA0602	TW25L	HW20L
CTTPR/L 12CA-16	CA06R	AZ0508F	KHA0412	RHA0625	WA0602	TW30L	HW20L

CTWPR/L



TP□R

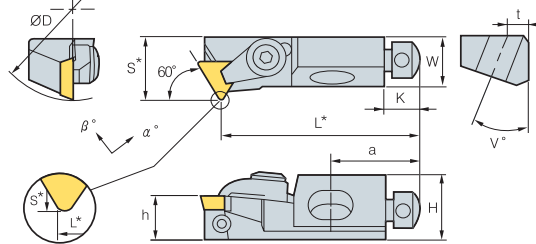

• R type insert

(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
CTWPR/L 10CA-11			40	15	11	44	14	10	8	5	0	20	5	20	TP□R 1103 □□ 1603 □□
			50	20	15	47	20	12	8	5	0	20	6	20	

➔ Applicable inserts, see pages B70 ~ B72

• a base Insert : r = 0.8 D = ØD Min. machining Dia.

● : Stock item



Parts	Clamp	Axial Adjust Screw	Radial AdjustScrew	MountingScrew	Washer	Wrench	Wrench
CTWPR/L 10CA-11	CA05R	AZ0508F	KHA0408	RHA0620	WA0602	TW25L	HW20L
CTWPR/L 12CA-16	CA06R	AZ0508F	KHA0412	RHA0625	WA0602	TW30L	HW20L



SSKCR/L



SC□□

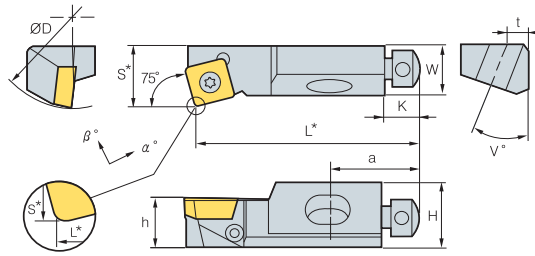

• R type insert
(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
SSKCR/L 10CA-09			40	15	11	50	14	10	8	0	-4	20	5	20	SC □□ 09T3 □□
12CA-12			50	20	15	55	20	12	8	0	-4	20	6	20	SC □□ 1204 □□



↻ Applicable inserts, see pages **B63, B83** · a base Insert : r = 0.8 D = ØD Min. machining Dia. ● : Stock item

Parts	Screw	Axial Adjust Screw	Radial AdjustScrew	MountingScrew	Washer	Wrench	Wrench
SSKCR/L 10CA-09	FTGA03508	AZ0508F	KHA0408	RHA0620	WA0602	TW 15P	HW20L
12CA-12	FTGA0411F	AZ0508F	KHA0412	RHA0625	WA0602	TW 15P	HW20L

SSSCR/L



SC□□

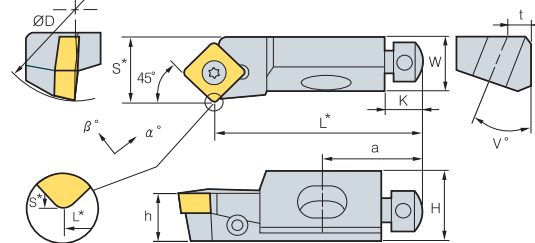


• R type insert
(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
SSSCR/L 10CA-09			40	15	11	44	14	10	8	-5	0	20	5	20	SC □□ 09T3 □□
12CA-12			50	20	15	47	20	12	8	-5	0	20	6	20	SC □□ 1204 □□



↻ Applicable inserts, see pages **B63, B83** · a base Insert : r = 0.8 D = ØD Min. machining Dia. ● : Stock item

Parts	Screw	Axial Adjust Screw	Radial AdjustScrew	MountingScrew	Washer	Wrench	Wrench
SSSCR/L 10CA-09	FTGA03508	AZ0508F	KHA0408	RHA0620	WA0602	TW 15P	HW20L
12CA-12	FTGA0411F	AZ0508F	KHA0412	RHA0625	WA0602	TW 15P	HW20L

STFCR/L



TC□□

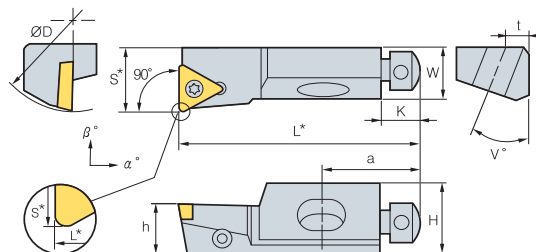


• R type insert
(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
STFCR/L 10CA-11			40	15	11	50	14	10	8	0	-3	20	5	20	TC □□ 1102 □□
12CA-16			50	20	15	55	20	12	8	0	-3	20	6	20	TC □□ 16T3 □□



↻ Applicable inserts, see pages **B67 ~ B69, B84** · a base Insert : r = 0.4 (l=11) r = 0.8 (l = 16) D = Min. machining Dia. ● : Stock item

Parts	Screw	Axial Adjust Screw	Radial AdjustScrew	MountingScrew	Washer	Wrench	Wrench
STFCR/L 10CA-11	FTKA02565	AZ0508F	KHA0408	RHA0620	WA0602	TW 15P	HW20L
12CA-16	FTKA03508	AZ0508F	KHA0412	RHA0625	WA0602	TW 15P	HW20L

STTCR/L



TC□□

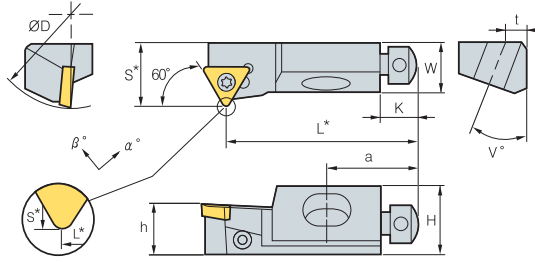

• R type insert

(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
STTCR/L 10CA-11			40	15	11	50	9	10	8	-5	0	20	5	20	TC □□ 1102 □□
12CA-16			50	20	15	47	20	12	8	-3	0	20	6	20	TC □□ 16T3 □□



➔ Applicable inserts, see pages B67 ~ B69, B84 · a base Insert : r = 0.4 (l=11) r = 0.8 (l=16) D = Min. machining Dia. ● : Stock item

Parts	Screw	Axial Adjust Screw	Radial AdjustScrew	MountingScrew	Washer	Wrench	Wrench
STTCR/L 10CA-11	FTKA02565	AZ0508F	KHA0408	RHA0620	WA0602	TW 07P	HW20L
12CA-16	FTKA03508	AZ0508F	KHA0412	RHA0625	WA0602	TW 15P	HW20L

STWCR/L



TC□□

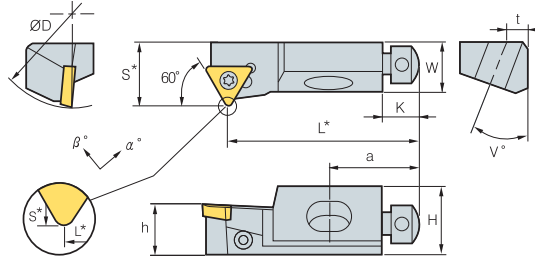

• R type insert

(mm)

Designation	Stock		ØD	H	W	L*	S*	h	K	α°	β°	a	t	v°	Insert
	R	L													
STWCR/L 10CA-11			40	15	11	44	14	10	8	0	-4	20	5	20	TC □□ 1102 □□
12CA-16			50	20	15	47	20	12	8	-5	0	20	6	20	TC □□ 16T3 □□

➔ Applicable inserts, see pages B67 ~ B69, B84 · a base Insert : r = 0.4 (l=11) r = 0.8 (l=16) D = Min. machining Dia. ● : Stock item

Parts	Screw	Axial Adjust Screw	Radial AdjustScrew	MountingScrew	Washer	Wrench	Wrench
STWCR/L 10CA-11	FTKA02565	AZ0508F	KHA0408	RHA0620	WA0602	TW 15P	HW20L
12CA-16	FTKA03508	AZ0508F	KHA0412	RHA0625	WA0602	TW 15P	HW20L




Economical small insert with powerful cutting performance


SAVE TURN

- Strongly recommended turning insert for machining smaller diameter than $\varnothing 100$
- Small but powerful and economical insert which performs the same like standard-sized inserts under the depth of cut of 3.0mm

▶ Features

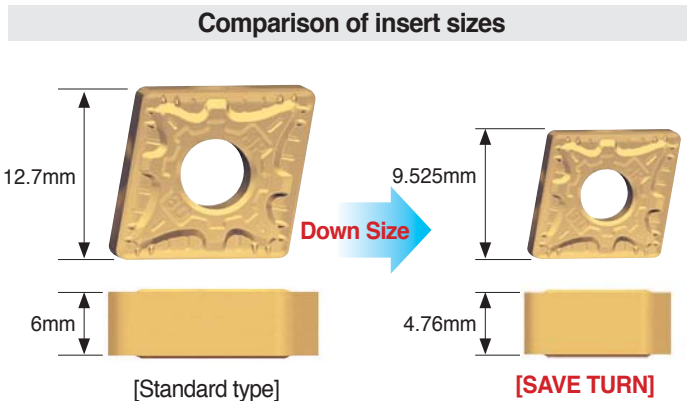



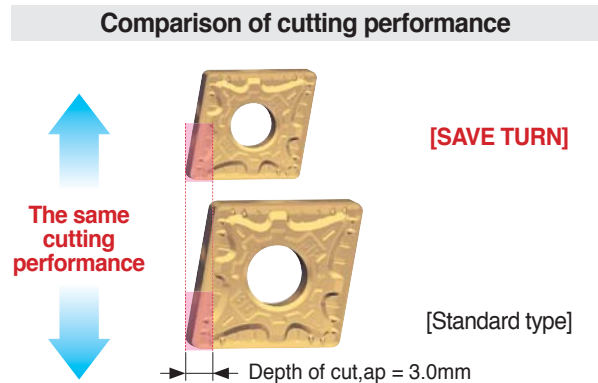

- ▶ Optimized size of the same performance like the standard type




- ▶ Performs the same like standard type inserts under the depth of cut of 3.0mm

▶ Features of chip breaker

Insert shape	Cutting edge	Features
 VQ		<ul style="list-style-type: none"> - For finishing steel - Efficient chip breaking and low cutting resistance - Various application available at low depth of cut - Recommended depth of cut : 0.5~2.5mm
 MP		<ul style="list-style-type: none"> - For medium cutting of steel - 4 dots for improved chip control in medium cutting to finishing - Stable chip evacuation at high depth of cut - Stable tool life due to lower cutting loads at high feed - Recommended depth of cut : 0.5~1.0mm

▶ Application area of chip breaker



VQ : Depth of cut, $a_p=0.5\sim 2.5\text{mm}$
 feed, $f_n=0.05\sim 0.30\text{mm/rev}$


MP : Depth of cut, $a_p=0.5\sim 4.0\text{mm}$
 feed, $f_n=0.15\sim 0.40\text{mm/rev}$

▶ Application example (NC3220)

Alloy steel (SCM440)

■ **Cutting conditions** $vc(\text{m/min}) = 250$, $fn(\text{mm/rev}) = 0.25$
 $ap(\text{mm}) = 2.0\sim 3.0$, continuous cutting, wet


■ **Cutting Result**

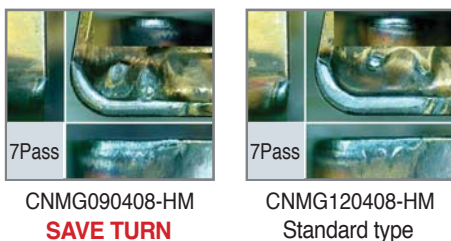

Alloy steel (SCM440)






■ **Cutting conditions** $vc(\text{m/min}) = 250$, $fn(\text{mm/rev}) = 0.25$
 $ap(\text{mm}) = 2.0\sim 3.0$, interrupted cutting, wet

■ **Cutting Result**

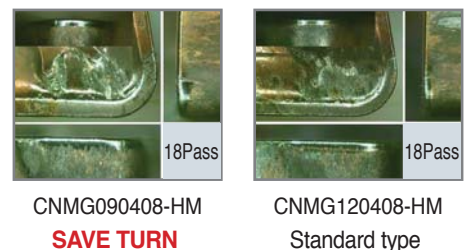

B Save Turn Insert

▶ Insert



Type	Picture	Designation	Coated			Dimensions (mm)				cutting conditions		Configuration	Available tool holders page
			NC3010	NC3220	NC5330	d	t	r	d _t	a _p (mm)	f _n (mm/rev)		
C Type		CNMG 090408-HM	●	●	●	9.525	4.76	0.8	3.18	0.60~3.50	0.12~0.40		B18 B21
		CNMG 090412-HM	●	●	●	9.525	4.76	1.2	3.18	0.70~3.50	0.15~0.45		
		CNMG 090404-MP				9.525	4.76	0.4	3.81	0.40~3.80	0.10~0.40		B18 B21
		CNMG 090408-MP				9.525	4.76	0.8	3.81	0.50~4.00	0.15~0.40		
		CNMG 090412-MP				9.525	4.76	1.2	3.81	0.80~4.20	0.15~0.50		
		CNMG 090408-VQ	●	●	●	9.525	4.76	0.8	3.18	0.30~2.00	0.10~0.35		B18 B21
		CNMG 090412-VQ	●	●	●	9.525	4.76	1.2	3.18	0.35~2.00	0.15~0.40		
D Type		DNMG 110508-HM	●	●	●	9.525	5.56	0.8	3.81	0.60~3.50	0.12~0.40		B18 B19 B21
		DNMG 110512-HM	●	●	●	9.525	5.56	1.2	3.81	0.70~3.50	0.15~0.45		
		DNMG 110504-MP				9.525	5.56	0.4	3.81	0.40~3.80	0.10~0.40		B18 B19 B21
		DNMG 110508-MP				9.525	5.56	0.8	3.81	0.50~4.00	0.15~0.40		
		DNMG 110512-MP				9.525	5.56	1.2	3.81	0.80~4.20	0.15~0.50		
		DNMG 110508-VQ	●	●	●	9.525	5.56	0.8	3.81	0.30~2.00	0.10~0.35		B18 B19 B21
		DNMG 110512-VQ	●	●	●	9.525	5.56	1.2	3.81	0.35~2.00	0.15~0.40		
S Type		SNMG 090408-HM	●	●	●	9.525	4.76	0.8	3.18	0.60~3.50	0.12~0.40		B19 B20 B22
		SNMG 090412-HM	●	●	●	9.525	4.76	1.2	3.18	0.70~3.50	0.15~0.45		
		SNMG 090404-MP				9.525	4.76	0.4	3.81	0.40~3.80	0.10~0.40		B19 B20 B22
		SNMG 090408-MP				9.525	4.76	0.8	3.81	0.50~4.00	0.15~0.40		
		SNMG 090412-MP				9.525	4.76	1.2	3.81	0.80~4.20	0.15~0.50		
		SNMG 090408-VQ	●	●	●	9.525	4.76	0.8	3.18	0.30~2.00	0.10~0.35		B19 B20 B22
		SNMG 090412-VQ	●	●	●	9.525	4.76	1.2	3.18	0.35~2.00	0.15~0.40		



PCLNR/L



CN□□

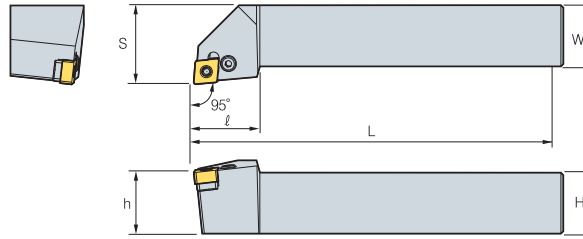

95°
• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shimpin punch
	R	L													
PCLNR/L 1616-H09-4N	●	●	16	16	100	20	16	20	CN□□0904□□	LV3N	VHX0617N	SC32N	SP3	HW25L	LSP3
2020-K09-4N	●	●	20	20	125	25	20	25							
2525-M09-4N	●	●	25	25	150	32	25	27							



➡ Applicable inserts, see pages B22

● : Stock item

PCBNR/L



CN□□

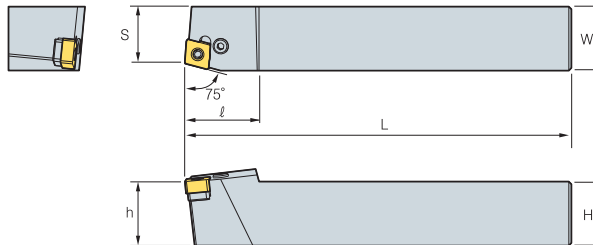

75°
• R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shimpin punch
	R	L													
PCBNR/L 2020-K09-4N	●	●	20	20	125	17	20	27	CN□□0904□□	LV3N	VHX0617N	SC32N	SP3	HW25L	LSP3
2525-M09-4N	●	●	25	25	150	22	25	29							



➡ Applicable inserts, see pages B22

● : Stock item

PDJNR/L



DN□□

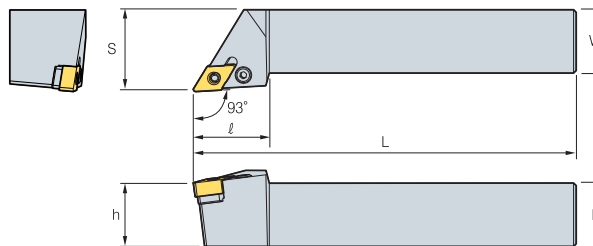

93°
• R type insert
(mm)


Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shimpin punch
	R	L													
PDJNR/L 2020-K11-5N	●	●	20	20	125	25	20	25	DN□□1105□□	LV3AN	VHX0617N	SD32N	SP3	HW25L	LSP3
2525-M11-5N	●	●	25	25	150	32	25	30							

➡ Applicable inserts, see pages B28



● : Stock item

B Save Turn Holder

PDNNR/L



DN□□

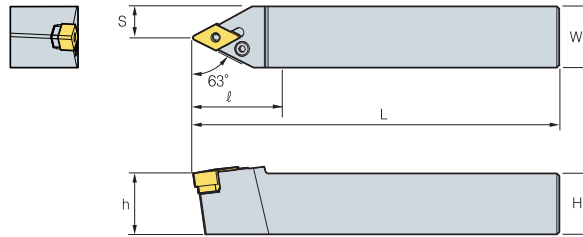

63°

• R type insert

(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shimpin punch
	R	L													
PDNNR/L 2020-K11-5N	●	●	20	20	125	25	20	30	DN□□1105□□	LV3AN	VHX0617N	SD32N	SP3	HW25L	LSPS3
2525-M11-5N	●	●	25	25	150	32	25	30							



➔ Applicable inserts, see pages B28

● : Stock item

PDQNR/L



DN□□

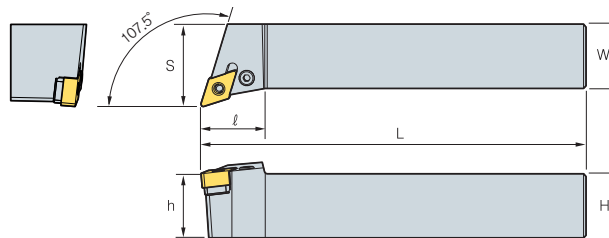

107.5°

• R type insert

(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shimpin punch
	R	L													
PDQNR/L 2020-K11-5N	●	●	20	20	125	25	20	30	DN□□1105□□	LV3AN	VHX0617N	SD32N	SP3	HW25L	LSPS3
2525-M11-5N	●	●	25	25	150	32	25	30							



➔ Applicable inserts, see pages B28

● : Stock item

PSBNR/L



SN□□

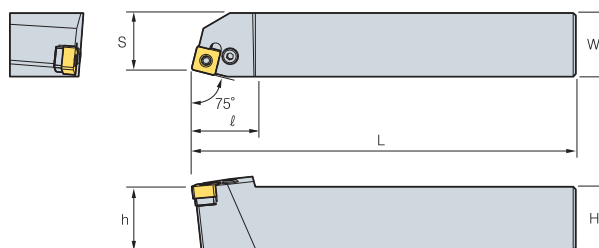

75°

• R type insert

(mm)


Designation	Stock		H	W	L	S	h	ℓ	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shimpin punch
	R	L													
PSBNR/L 2020-K09-4N	●	●	20	20	125	17	20	25	SN□□0904□□	LV3AN	VHX0617N	SS32N	SP3	HW25L	LSP3
2525-M09-4N	●	●	25	25	150	22	25	25							

➔ Applicable inserts, see pages B37



● : Stock item



PSDNN



SN□□

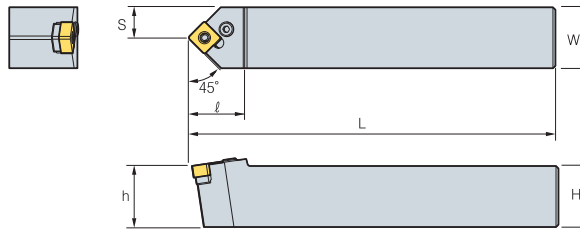

45°

• R type insert
(mm)

Designation	Stock	H	W	L	S	h	l	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shimpin punch
PSDNN 2020-K09-4N	●	20	20	125	17	20	25	SN□□0904□□						
2525-M09-4N	●	25	25	150	22	25	25							



➔ Applicable inserts, see pages B37

● : Stock item

PSKNR/L



SN□□

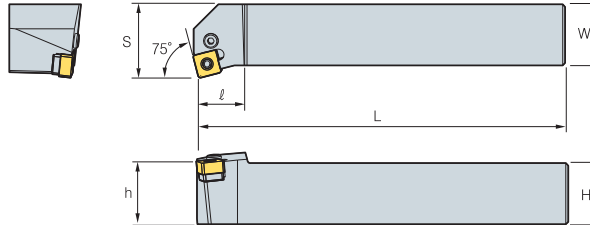

75°

• R type insert
(mm)

Designation	Stock		H	W	L	S	h	l	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shimpin punch
	R	L													
PSKNR/L 2020-K09-4N	●	●	20	20	125	17	20	25	SN□□0904□□						
2525-M09-4N	●	●	25	25	150	22	25	25							



➔ Applicable inserts, see pages B37

● : Stock item

PSSNR/L



SN□□

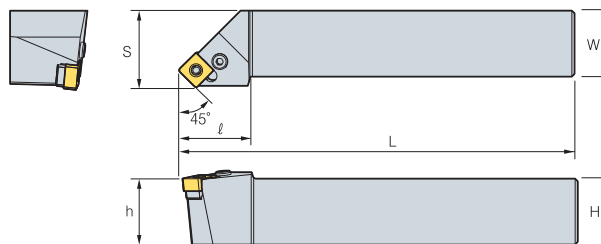

45°

• R type insert
(mm)


Designation	Stock		H	W	L	S	h	l	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shimpin punch
	R	L													
PSSNR/L 2020-K09-4N	●	●	20	20	125	17	20	25	SN□□0904□□						
2525-M09-4N	●	●	25	25	150	22	25	25							

➔ Applicable inserts, see pages B37


● : Stock item

B Save Turn Boring Bar

PCLNR/L



CN□□

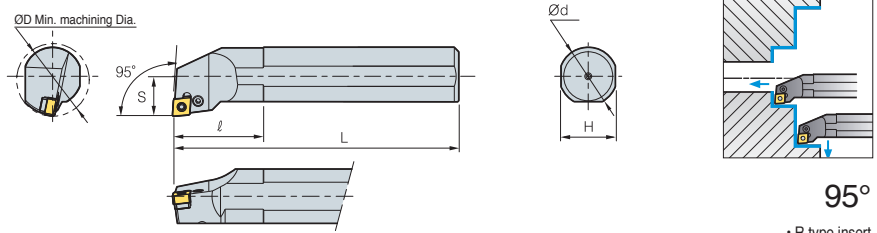

95°

• R type insert
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shim pin punch
	R	L													
S20Q-PCLNR/L-09-4N	●	●	25	20	18	180	13	50	CN□□0904□□	LV3B	VHX0512B	-	-	HW20L	-
S25R-PCLNR/L-09-4N	●	●	32	25	23	200	17	50		LV3B	VHX0512B	SC32N	SP3	HW20L	-
S32S-PCLNR/L-09-4N	●	●	40	32	30	250	22	50		LV3N	VHX0617N	SC32N	SP3	HW25L	-


➔ Applicable inserts, see pages B22

● : Stock item

PDUNR/L



DN□□

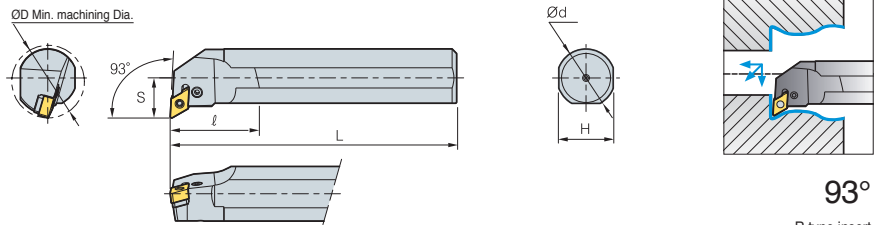

93°


• R type insert
(mm)

Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shim pin punch
	R	L													
S32S-PDUNR/L-11-5N			40	32	30	250	22	30	DN□□1105□□	LV3AN	VHX0617N	SD32N	SP3	HW25L	-
S40T-PDUNR/L-11-5N			50	40	38	300	27	50							


➔ Applicable inserts, see pages B28

● : Stock item

PDZNR/L



DN□□

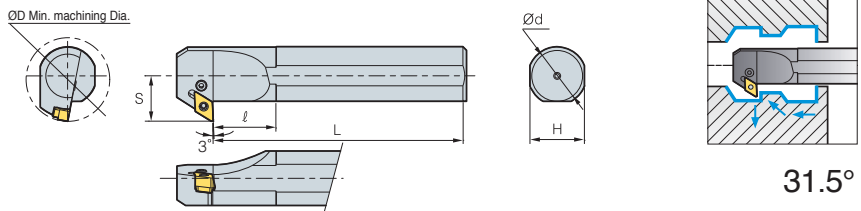

31.5°

• R type insert
(mm)


Designation	Stock		ØD	Ød	H	L	S	ℓ	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shim pin punch
	R	L													
S32S-PDZNR/L-11-5N	●	●	40	32	30	250	22	30	DN□□1105□□	LV3AN	VHX0617N	SD32N	SP3	HW25L	-
S40T-PDZNR/L-11-5N	●	●	50	40	38	300	27	50							

➔ Applicable inserts, see pages B28




● : Stock item



PSKNR/L



SN□□

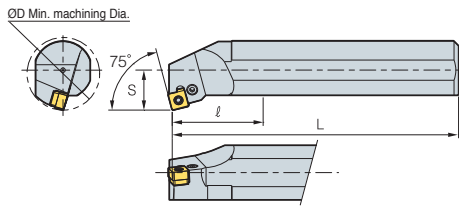

75°

• R type insert (mm)

Designation	Stock		ØD	Ød	H	L	S	l	Insert	Lever	Screw	Shim	Shim pin	Wrench	Shim pin punch
	R	L													
S25R-PSKNR/L-09-4N	●	●	32	25	23	200	17	32	SN□□0904□□	LV3B	VHX0512B	-	-	HW20L	-
S32S-PSKNR/L-09-4N	●	●	40	32	30	250	22	32		LV3N	VHX0617N	SS32N	SP3	HW25L	-

Applicable inserts, see pages B37

● : Stock item



B Technical Information for Auto Tools

Excellent for precision machining

Auto Tools


- High precision machining of small parts and complex forms, etc.
- High quality products through stable machining
- Exclusive insert for automatic lathes



▶ Type



▶ Application example

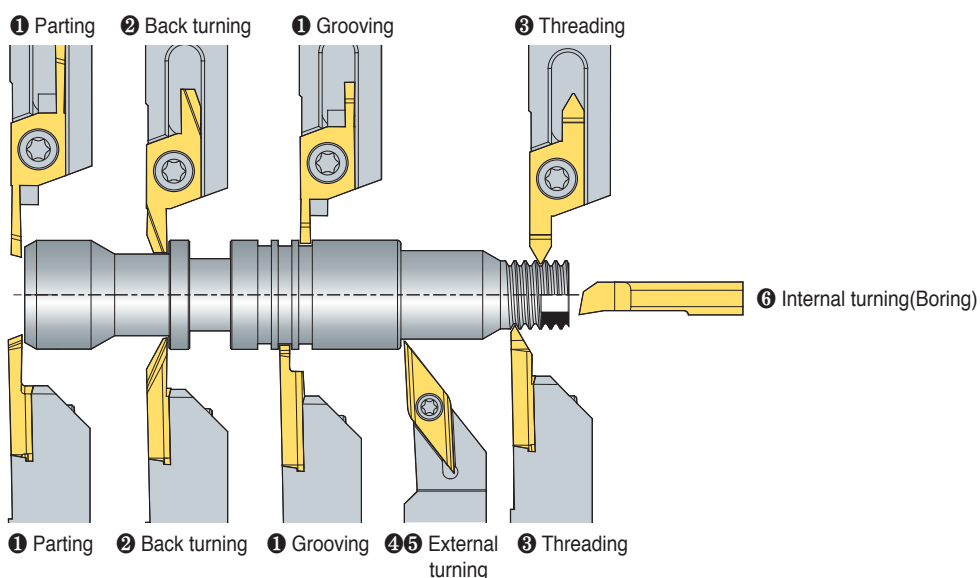

▶ Index

Specification	① Parting and Grooving						② Back turning			Specification	③ Threading	
Holder	SXGNR/L	SXGNR/L	MGEHR/L	SBHR/L	SBHR/L	MGEHR/L	SXGNR/L	SXGNR/L	SBHR/L	Holder	SXGNR/L	SBHR/L
Insert	SG	SC	MGMN	SBG	SBC	MGMN	SB	SGB	SBB	Insert	ST	SBT
Holder size	10~20mm	10~20mm	10~16mm	10~16mm	10~16mm	10~16mm	10~20mm	10~20mm	10~16mm	Holder size	10~20mm	10~16mm
Insert shape										Insert shape		
Cutting width	1~3mm	1~3mm	1.5~2.5mm	0.7~2.0mm	0.7~2.0mm	1.5~2.5mm	2~4mm	2~3mm	3.18mm	Screw ranges	Pitch ranges 0.5~1.5 / 1.5~3.0	Pitch ranges 0.2~1.5 / 1.0~2.0
ØDmax	Ø18	Ø18	Ø32	Ø16	Ø16	Ø32	Tmax 8	Tmax 8.5	Tmax 8.0	Insert	B185	B182
Page	B185	B185	B189	B182	B182	B189	B185	B185	B182			

Specification	④ External turning and Copy machining				⑤ External turning and Facing			Specification	⑥ Internal turning(Boring)				
Holder	SDJCR/L	SDNCN	SVJBR/L	SVJCR/L	SCACR/L	SCLCR/L	STACR/L	Holder	SCLCR/L	STUBR/L	STUPR/L	SWUBR/L	MSB
Insert	DC□□	DC□□	VB□□	VC□□	CC□□	CC□□	TC□□	Insert	CC□□	TB□□	TP□□	WB□□	-
Holder size	8~16mm	8~16mm	10~16mm	10~16mm	8~16mm	8~16mm	8~10mm	Shank diameter	Ø4~Ø10	Ø8	Ø8	Ø5~Ø8	Ø4~Ø6
Insert shape								Insert shape					
Feature	Offset "0"				Offset "0"			ØDmin	Ø5	Ø8	Ø10	Ø5.5	Ø3.2
Page	B177	B178	B178	B178	B177	B177	B178	Page	B150	B150	B150	B150	B192-B196




Auto Tools (ISO type)

- ▶ ISO inserts for automatic lathes
- ▶ Precise R shape with the use of minus tolerance of nose R
- ▶ Tolerance class precise enough in no need for adjusting tools with the use of accurate cutting edge height
- ▶ Sharp blade for excellent chip control and surface roughness with low cutting force
- ▶ High precision tools for electrical/ electronics instruments and medical instruments





▶ Code system (ISO type)

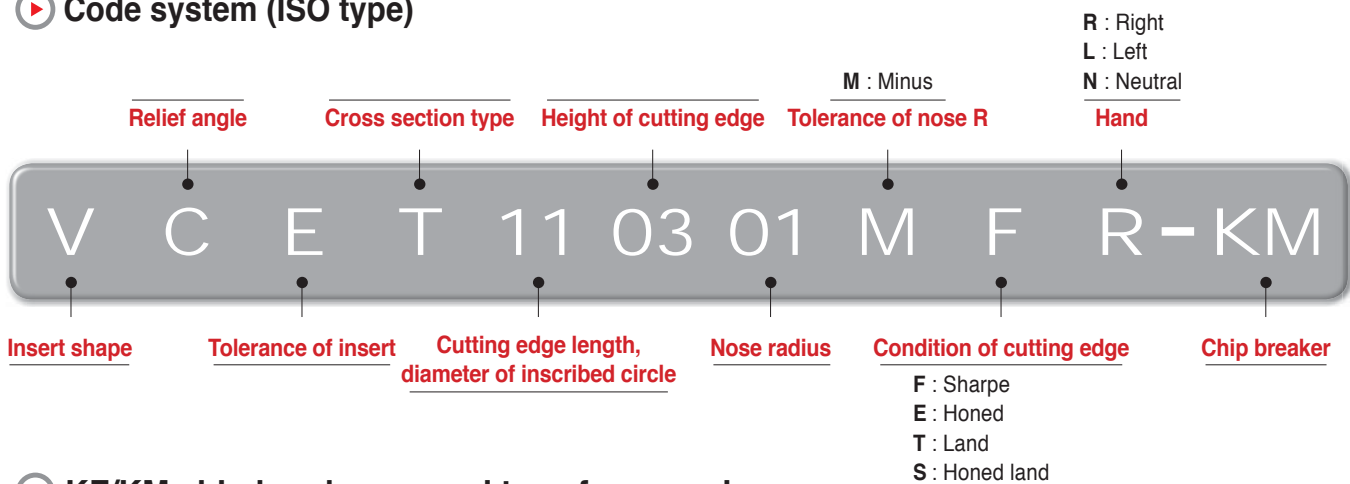

▶ KF/KM chip breaker, ground type for grooving


- Ground chip breaker with sharp cutting edge
- High precision insert of E-class tolerance with accurate nose radius

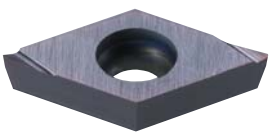KF
 <ul style="list-style-type: none"> - For finishing - Low cutting loads with sharp cutting edges - Longer tool life due to lower chip evacuation resistance at high speed - Excellent surface roughness

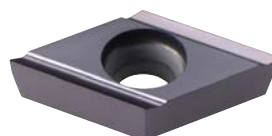
KM
 <ul style="list-style-type: none"> - For medium cutting to finishing - Better chip flow due to wide chip pockets - Longer tool life and better cutting action due to improved chip evacuation - Excellent surface roughness

▶ VP1 chip breaker


- Exclusive chip breaker for hard-to-cut materials such as titanium alloy, Inconel, stainless steel, etc.
- Minimized cutting heat by reducing contact area between chips and rake surface with the use of high positive blade

VP1	
<ul style="list-style-type: none"> • Sharp cutting edge <ul style="list-style-type: none"> - Excellent chip control - Low cutting resistance - High precision machining 	<ul style="list-style-type: none"> • High positive angle of rake surface <ul style="list-style-type: none"> - Chip breaking at low depth of cut - Stable chip control at high depth of cut - Wide cutting area available with the use of optimized chip breaker width according to depth of cuts

SCACR/L



CC□T

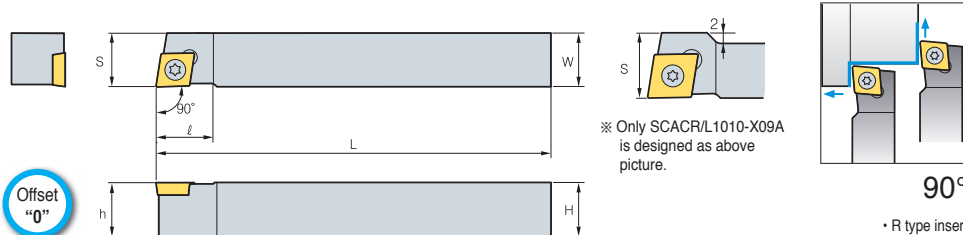


(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Screw	Wrench
	R	L									
SCACR/L 0808-X06A	●		8	8	120	8	8	10	CC□T 0602 □□	FTKA02565	TW 07P
			10	10	120	10	10	10			
	●		10	10	120	12	10	13			
	●		12	12	120	12	12	16			
SCACR/L 1616-X09A	●		16	16	120	16	16	16	CC□T 09T3 □□	FTKA0410	TW 15P


➔ Applicable inserts, see pages B55 ~ 58, B80

● : Stock item

SCLCR/L



CC□T

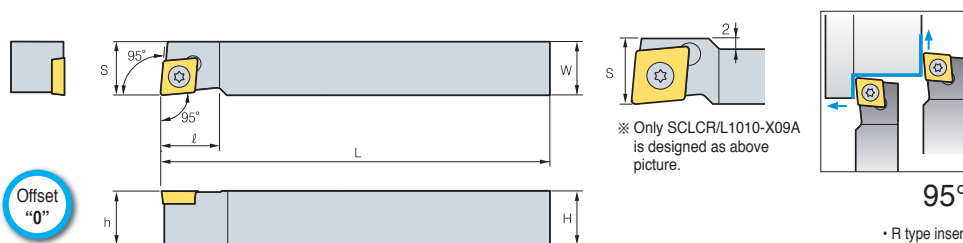


(mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Screw	Wrench
	R	L									
SCLCR/L 0808-X06A			8	8	120	8	8	10	CC□T 0602 □□	FTKA02565	TW 07P
	●		10	10	120	10	10	10			
			10	10	120	12	10	13			
	●		12	12	120	12	12	16			
SCLCR/L 1616-X09A			16	16	120	16	16	16	CC□T 09T3 □□	FTKA0410	TW 15P


➔ Applicable inserts, see pages B55 ~ 58, B80

● : Stock item

SDJCR/L



DC□T

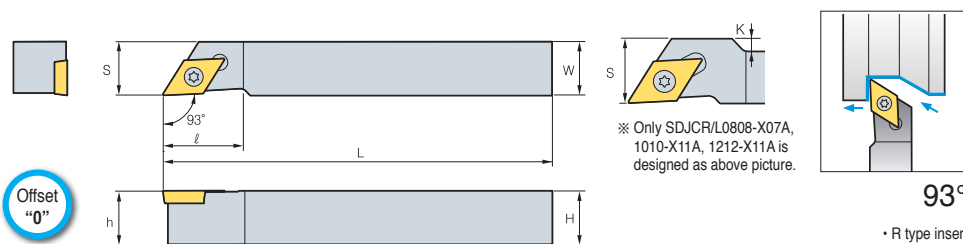

(mm)


Designation	Stock		H	W	L	S	h	K	ℓ	Insert	Screw	Wrench
	R	L										
SDJCR/L 0808-X07A			8	8	120	10	8	2	18	DC□T 0702 □□	FTKA02565	TW 07P
	●		10	10	120	10	10	-	15			
	●		10	10	120	14	10	4	18			
	●		12	12	120	14	12	2	18			
	●		16	16	120	16	16	-	22			
SDJCR/L 1212-X11A			12	12	120	14	12	2	18	DC□T 11T3 □□	FTKA0410	TW 15P

➔ Applicable inserts, see pages B61 ~ 62, B81



● : Stock item




SDNCN



DC□T

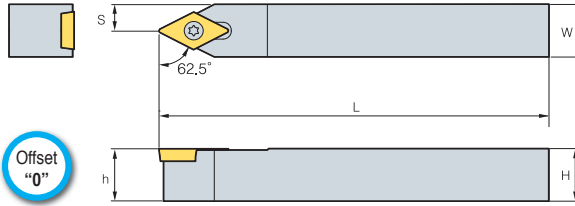

※ Only SDNCN1010-X11A is designed as above picture.




62.5°
(mm)

Designation	Stock	H	W	L	S	h	Insert	Screw	Wrench
SDNCN 0808-X07A		8	8	120	4	8	DC□T 0702 □□	FTKA02565	TW 07P
1010-X07A		10	10	120	5	10			
1010-X11A		10	10	120	7	10			
1212-X11A	●	12	12	120	6	12	DC□T 11T3 □□	FTKA0410	TW 15P
1616-X11A	●	16	16	120	8	16			



➤ Applicable inserts, see pages B61 ~ 62, B81

● : Stock item

STACR/L



TC□T

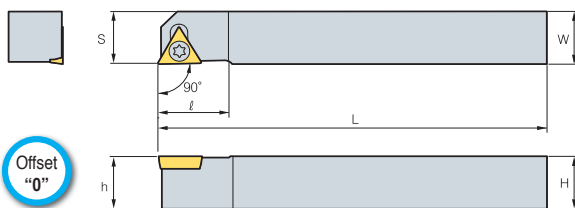


90°
• R type insert (mm)

Designation	Stock		H	W	L	S	h	K	ℓ	Insert	Screw	Wrench
	R	L										
STACR/L 0808-X08A			8	8	120	8	8	1	12	TC□T 0802 □□	FTNA 0206	TW 06P
1010-X08A			10	10	120	10	10	3	12			



➤ Applicable inserts, see pages B68

● : Stock item

SVJBR/L



VB□T

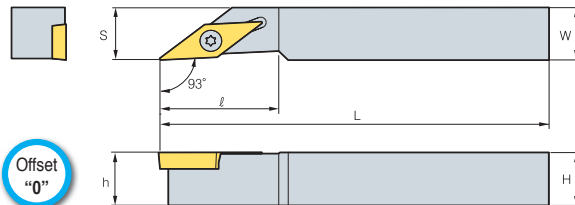


93°
• R type insert (mm)

Designation	Stock		H	W	L	S	h	ℓ	Insert	Screw	Wrench
	R	L									
SVJBR/L 1010-X11A			10	10	120	10	10	22	VB□T 1103 □□	FTKA 02565	TW 07P
1212-X11A	●		12	12	120	12	12	22			
1616-X11A			16	16	120	16	16	24			



➤ Applicable inserts, see pages B73 ~ B74, B85

● : Stock item

SVJCR/L



VC□T

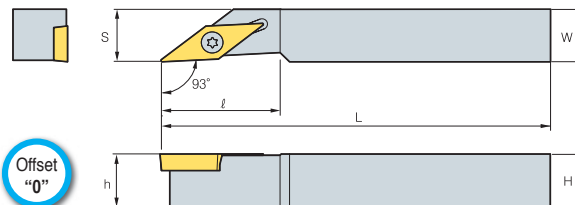

93°
• R type insert (mm)


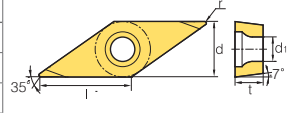

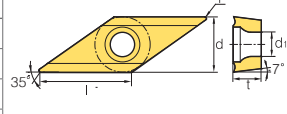

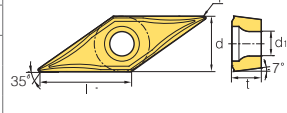

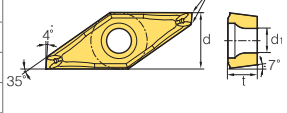

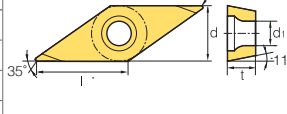

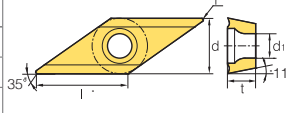

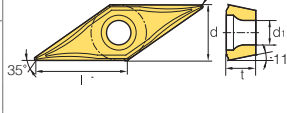
Designation	Stock		H	W	L	S	h	ℓ	Insert	Screw	Wrench
	R	L									
SVJCR/L 1010-X11A			10	10	120	10	10	22	VC□T 1103 □□	FTKA 02565	TW 07P
1212-X11A	●		12	12	120	12	12	22			
1616-X11A			16	16	120	16	16	24			

➤ Applicable inserts, see pages B75 ~ 76, B86

● : Stock item



▶ Insert

Picture	Designation	Cermet		Coated										Uncoated			Dimensions (mm)					Configuration			
		NC3220	NC3220	NC3220	NC3220	NC3010	NC3120	NC3220	NC3030	NC9020	NC5330	PC8110	PC5300	PC9030	NC6205	NC6210	NC315K	U2	H01	G10E	l		d	t	r
 Finishing (High precision)	1103005MFR-KF																			11.0	6.35	3.18	0.05	2.8	
	110301MFR-KF										●									11.0	6.35	3.18	0.1	2.8	
	110302MFR-KF											●								11.0	6.35	3.18	0.2	2.8	
	1103005MFL-KF																			11.0	6.35	3.18	0.05	2.8	
	110301MFL-KF																			11.0	6.35	3.18	0.1	2.8	
	110302MFL-KF																			11.0	6.35	3.18	0.2	2.8	
 Medium to finishing (High precision)	1103005MFR-KM																		11.0	6.35	3.18	0.05	2.8		
	110301MFR-KM										●								11.0	6.35	3.18	0.1	2.8		
	110302MFR-KM											●							11.0	6.35	3.18	0.2	2.8		
	1103005MFL-KM																		11.0	6.35	3.18	0.05	2.8		
	110301MFL-KM																		11.0	6.35	3.18	0.1	2.8		
	110302MFL-KM																		11.0	6.35	3.18	0.2	2.8		
 Finishing (High precision)	110301MFN-VP1																		11.0	6.35	3.18	0.1	2.8		
	110302MFN-VP1																		11.0	6.35	3.18	0.2	2.8		
	110304MFN-VP1																		11.0	6.35	3.18	0.4	2.8		
 Finishing (High precision)	120300MFR-VP1																		11.0	7.50	3.18	0.0	2.8		
	120301MFR-VP1																		11.0	7.50	3.18	0.1	2.8		
	120302MFR-VP1																		11.0	7.50	3.18	0.2	2.8		
	120300MFL-VP1																		11.0	7.50	3.18	0.0	2.8		
	120301MFL-VP1																		11.0	7.50	3.18	0.1	2.8		
	120302MFL-VP1																		11.0	7.50	3.18	0.2	2.8		
 Finishing (High precision)	0802005MFR-KF																		8.0	6.35	2.38	0.1	2.3		
	080201MFR-KF																		8.0	6.35	2.38	0.1	2.3		
	080202MFR-KF																		8.0	6.35	2.38	0.2	2.3		
	080201MFL-KF																		8.0	6.35	2.38	0.1	2.3		
	080201MFL-KF																		8.0	6.35	2.38	0.1	2.3		
	080202MFL-KF																		8.0	6.35	2.38	0.2	2.3		
 Medium to finishing (High precision)	0802005MFR-KM																		8.0	6.35	2.38	0.1	2.3		
	080201MFR-KM																		8.0	6.35	2.38	0.1	2.3		
	080202MFR-KM																		8.0	6.35	2.38	0.2	2.3		
	0802005MFL-KM																		8.0	6.35	2.38	0.1	2.3		
	080201MFL-KM																		8.0	6.35	2.38	0.1	2.3		
	080202MFL-KM																		8.0	6.35	2.38	0.2	2.3		
 Finishing (High precision)	110301MFN-VP1																		11.0	6.35	3.18	0.1	2.8		
	110302MFN-VP1																		11.0	6.35	3.18	0.2	2.8		
	110304MFN-VP1																		11.0	6.35	3.18	0.4	2.8		

● : Stock item

B Auto Tools (Blade Type)

Auto tools (Blade type) *New*

- ▶ Blade insert for automatic lathes
- ▶ For external machining of precise small parts
- ▶ 4 types - SSB(for back turning), SGB(for grooving), SBT(for threading), SBC(for parting off)
- ▶ Convenient use of one holder to all blade inserts
- ▶ Exclusive holder for close cutting action to the sub spindle



▶ Code system of Auto tools insert (Blade type)

Turning (Back turning)	SB	B	R	25	10	
	Small blade	Back turning	Hand R : Right L : Left	Length of insert	Nose radius	
Grooving	SB	G	R	25	20	
	Small blade	Grooving	Hand R : Right L : Left	Length of insert	Width of cutting edge	
Threading	SB	T	R	25	60 - N - 010	
	Small blade	Threading	Hand R : Right L : Left	Length of insert	Angle of thread Hand of thread R : Right L : Left N : None	
Parting	SB	C	R	25	20	16 - N
	Small blade	Parting off	Hand R : Right L : Left	Length of insert	Width of cutting edge	Max. machining diameter Hand of thread R : Right L : Left N : None

▶ Code system of Auto tools holder (Blade type)

SB	H	R	10	10	K25	X
Small blade	Holder	Hand R : Right L : Left	Height of shank	Width of shank	Length of insert	sub spindle

▶ Types of blade insert

Possible to apply various types of blade inserts to one holder



SSB : For back turning

- Approach angle : 59°
- Max. cutting depth : 4mm
- Nose R : 0.05, 0.1, 0.2mm



SGB : For grooving

- Width : 0.5~2.5mm
- Nose R : 0.05mm



SBT : For threading

- V profile : 60°
- Pitch : 0.2~1.0mm
- Nose R : 0.05mm



SBC : For parting off


- Cutting width : 0.7~2.0
- D Max. : 16mm
- Nose R : 0.05mm



SBHR/L



SBBR SBGR
SBTR SBCR

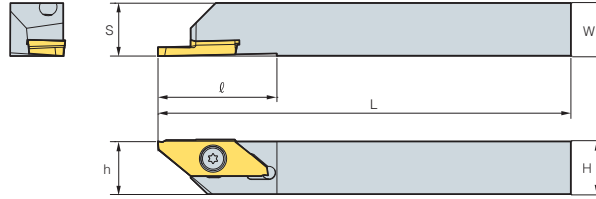


Designation	Stock		H	W	L	S	h	l	Insert	Screw	Wrench
	R	L									
SBHR/L	1010-K25	●	10	10	125	10	10	27	SB□R/L25	FTKA0409S	T9
	1212-K25	●	12	12	125	12	12	27			
	1616-K25	●	16	16	125	16	16	27			

● : Stock item

SBHR/L-X (sub spindle)



SBBR SBGR
SBTR SBCR

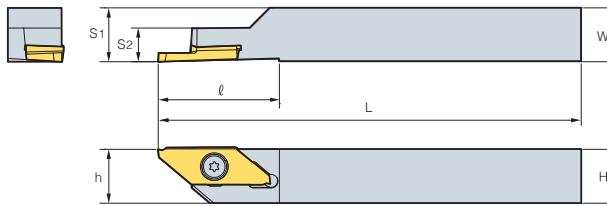

Designation	Stock		H	W	L	S ₁	S ₂	h	l	Insert	Screw	Wrench
	R	L										
SBHR/L	1010-K25-X	●	10	10	125	10	7.5	10	27	SB□R/L25	FTKA0407S	T9
	1212-K25-X	●	12	12	125	12	7.5	12	27			

● : Stock item

Insert










Application	Picture	Designation	Coated		Dimensions (mm)										Configuration	Feed direction		
			PC5300	PC8110	l	α	t	r	La	ar	f	D-MAX	Pitch					
													Min.	Max.				
Back turning		SBBR/L 25005	●	●	25	59	3.18	0.05	-	-	-	-	-	-	-	-		
		25010	●	●	25	59	3.18	0.10	-	-	-	-	-	-	-	-		
		25020	●	●	25	59	3.18	0.20	-	-	-	-	-	-	-	-		
Grooving		SBGR/L 2505	●	●	25	-	-	0.05	0.5	1.35	-	-	-	-	-	-		
		2510	●	●	25	-	-	0.05	1.0	2.75	-	-	-	-	-	-		
		2515	●	●	25	-	-	0.05	1.5	3.75	-	-	-	-	-	-		
		2520	●	●	25	-	-	0.05	2.0	3.75	-	-	-	-	-	-		
		2525	●	●	25	-	-	0.05	2.5	3.75	-	-	-	-	-	-		
Threading		SBTR/L 2560-N-005	●	●	25	-	-	0.05	-	-	1.59	-	0.2	2.0	-	-		
		2560-N-010	●	●	25	-	-	0.10	-	-	1.59	-	1.0	2.0	-	-		
		2560-R-005	●	●	25	-	-	0.05	-	-	0.6	-	0.2	1.5	-	-		
		2560-R-010	●	●	25	-	-	0.10	-	-	0.6	-	1.0	1.5	-	-		
		2560-L-005	●	●	25	-	-	0.05	-	-	0.6	-	0.2	1.5	-	-		
		2560-L-010	●	●	25	-	-	0.10	-	-	0.6	-	1.0	1.5	-	-		

● : Stock item



B Auto Tools (Blade Type)

▶ Insert

Application	Picture	Designation	Coated		Dimensions (mm)										Configuration	Feed direction
			PC5300	PC8110	l	α	t	r	La	ar	f	D-MAX	Pitch			
													Min.	Max.		
Parting off SBCR/L		SBCR/L 250708-N	●	●	25	0	-	0.05	0.70	4.3	-	8	-	-		
		251012-N	●	●	25	0	-	0.05	1.00	6.3	-	12	-	-		
		251512-N	●	●	25	0	-	0.05	1.50	6.3	-	12	-	-		
		252016-N	●	●	25	0	-	0.05	2.00	8.5	-	16	-	-		
		250708-R	●	●	25	15	-	0.05	0.70	4.3	-	8	-	-		
		251012-R	●	●	25	15	-	0.05	1.00	6.3	-	12	-	-		
		251512-R	●	●	25	15	-	0.05	1.50	6.3	-	12	-	-		
		252016-R	●	●	25	15	-	0.05	2.00	8.5	-	16	-	-		
		250708-L	●	●	25	15	-	0.05	0.70	4.3	-	8	-	-		
		251012-L	●	●	25	15	-	0.05	1.00	6.3	-	12	-	-		
		251512-L	●	●	25	15	-	0.05	1.50	6.3	-	12	-	-		
		252016-L	●	●	25	15	-	0.05	2.00	8.5	-	16	-	-		
		251012-T	●	●	25	0	-	0.05	1.00	6.3	-	12	-	-		
		251512-T	●	●	25	0	-	0.05	1.50	6.3	-	12	-	-		
		252016-T	●	●	25	0	-	0.05	2.00	8.5	-	16	-	-		

● : Stock item




Auto tools (For multi utility)


- ▶ Multifunctional insert for automatic lathes
- ▶ For external machining of precise small parts
- ▶ 5 types - SB(for back turning), SG(for grooving), ST(for threading), SC(for parting off), SGB(for grooving and back turning)
- ▶ Convenient use of one holder to all inserts
- ▶ Offset "0" to all ISO type holders

▶ Insert code system (Multi utility type)

B : Back turning **G** : Grooving
C : Parting off **T** : Threading
GB : Grooving and back turning

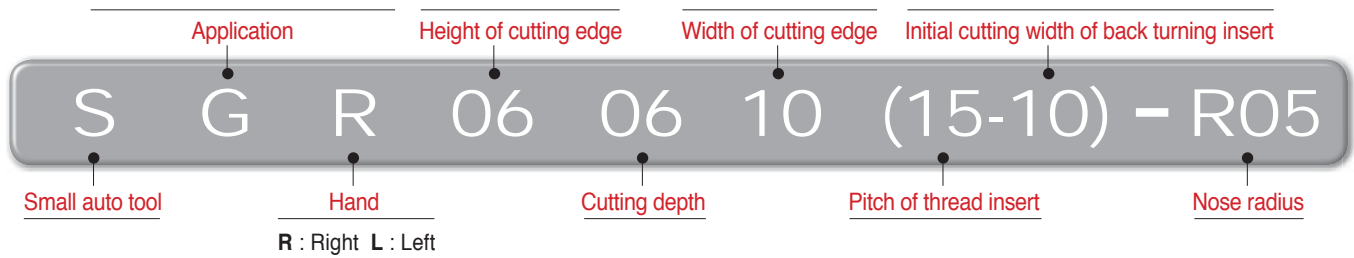


▶ Application example

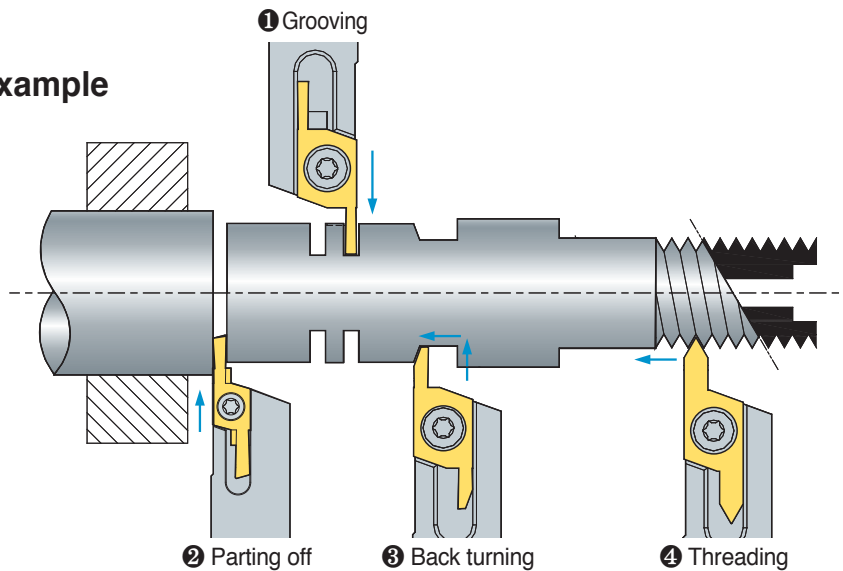

▶ Types of multifunctional insert

Possible to apply various types of blade inserts to one holder (Ex: All designations of 06 size inserts can be applied to one 06 size holder.)

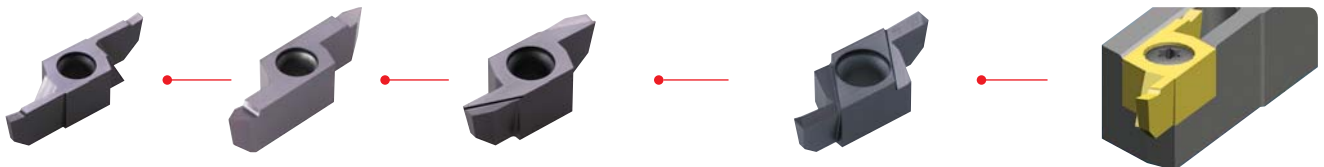

SG : Grooving

ST : Threading

SB : Back turning

SGB : Grooving and back turning


SC : Parting off

▶ Recommended cutting conditions


Workpiece	Turning		Grooving		Parting off		Back turning	
	Cutting speed, vc(m/min)	Feed, fn(mm/rev)	Cutting speed, vc(m/min)	Feed, fn(mm/rev)	Cutting speed, vc(m/min)	Feed, fn(mm/rev)	Cutting speed, vc(m/min)	Feed, fn(mm/rev)
Stainless steel	50 ~ 120	0.02 ~ 0.20	30 ~ 120	0.02 ~ 0.05	30 ~ 120	0.02 ~ 0.05	30 ~ 120	0.02 ~ 0.20
Carbon steel	50 ~ 150	0.01 ~ 0.25	50 ~ 150	0.02 ~ 0.08	50 ~ 150	0.01 ~ 0.08	50 ~ 150	0.01 ~ 0.25
Free cutting steel	30 ~ 150	0.02 ~ 0.25	30 ~ 150	0.02 ~ 0.08	30 ~ 150	0.01 ~ 0.08	30 ~ 150	0.01 ~ 0.25
Non ferrous metal	70 ~ 200	0.03 ~ 0.25	70 ~ 200	0.03 ~ 0.10	70 ~ 200	0.03 ~ 0.10	70 ~ 200	0.03 ~ 0.30

B Auto tools (For multi utility)

SXGNR/L



SBR, SGBR
SCR, STR, SGR

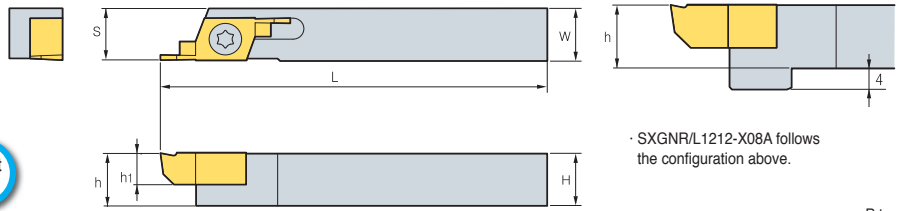

· SXGNR/L1212-X08A follows the configuration above.

· R type insert

(mm)

Designation	Stock		H	W	L	S	h	h ₁	Insert	Screw	Wrench
	R	L									
SXGNR/L 1010-X06A	●		10	10	125	10	10	6	S□R/L 06	FTNA 0408	TW 15P
	●		12	12	125	12	12	6			
	●		16	16	125	16	16	6			
	●		20	20	125	20	20	6			
SXGNR/L 1212-X08A	●		12	12	130	12	12	8	S□R/L 08	FTNA 0411	TW 15P
			16	16	130	16	16	8			
			20	20	130	20	20	8			
			20	20	130	20	20	8			

● : Stock item


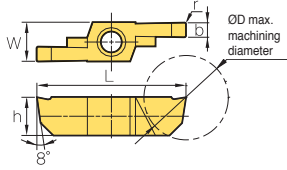







▶ Insert

Application	Picture	Designation	Coated		Dimensions (mm)								Configuration	Feed direction
			PC9030		b ₁	b	W	L	r	h	T-MAX	ØD		
			R	L										
Back turning		SBR/L 060520-10-R00			1	2	8	22	0	6	5.5	-		
		060520-10-R05			1	2	8	22	0.05	6	5.5	-		
		060520-10-R10			1	2	8	22	0.1	6	5.5	-		
		060630-20-R00			2	3	8	24	0	6	6.5	-		
		060630-20-R05			2	3	8	24	0.05	6	6.5	-		
		060630-20-R10			2	3	8	24	0.1	6	6.5	-		
		080630-20-R00			2	3	8	23	0	8	6.5	-		
		080630-20-R05			2	3	8	23	0.05	8	6.5	-		
		080630-20-R10			2	3	8	23	0.1	8	6.5	-		
		080840-20-R00			2	4	8	27	0	8	8.5	-		
080840-20-R05			2	4	8	27	0.05	8	8.5	-				
080840-20-R10			2	4	8	27	0.1	8	8.5	-				
Parting off		SCR/L 060610-R00			-	1	8	24	0	6	-	11		
		060610-R05	●		-	1	8	24	0.05	6	-	11		
		060610-R10	●		-	1	8	24	0.1	6	-	11		
		060615-R00			-	1.5	8	24	0	6	-	11		
		060615-R05	●		-	1.5	8	24	0.05	6	-	11		
		060615-R10	●		-	1.5	8	24	0.1	6	-	11		
		060620-R00			-	2	8	24	0	6	-	11		
		060620-R05	●		-	2	8	24	0.05	6	-	11		
		060620-R10	●		-	2	8	24	0.1	6	-	11		
		081015-R00			-	1.5	8	31	0	8	-	18		
		081015-R05			-	1.5	8	31	0.05	8	-	18		
		081015-R10			-	1.5	8	31	0.1	8	-	18		
		081020-R00			-	2	8	31	0	8	-	18		
		081020-R05			-	2	8	31	0.05	8	-	18		
		081020-R10	●		-	2	8	31	0.1	8	-	18		
		081025-R00			-	2.5	8	31	0	8	-	18		
		081025-R05	●		-	2.5	8	31	0.05	8	-	18		
		081025-R10	●		-	2.5	8	31	0.1	8	-	18		
081030-R00			-	3	8	31	0	8	-	18				
081030-R05	●		-	3	8	31	0.05	8	-	18				
081030-R10			-	3	8	31	0.1	8	-	18				

● : Stock item



Insert

Application	Picture	Designation	Coated		Dimensions (mm)								Configuration	Feed direction
			PC9030		b	W	L	r	h	T-MAX	ØD	Pitch		
			R	L										
Grooving		SGR/L	060610-R00		1	8	24	0	6	-	11	-		
		060610-R05	●	1	8	24	0.05	6	-	11	-			
		060610-R10	●	1	8	24	0.1	6	-	11	-			
		060615-R00		1.5	8	24	0	6	-	11	-			
		060615-R05	●	1.5	8	24	0.05	6	-	11	-			
		060615-R10	●	1.5	8	24	0.1	6	-	11	-			
		060620-R00		2	8	24	0	6	-	11	-			
		060620-R05	●	2	8	24	0.05	6	-	11	-			
		060620-R10	●	2	8	24	0.1	6	-	11	-			
		081015-R00		1.5	8	31	0	8	-	18	-			
		081015-R05		1.5	8	31	0.05	8	-	18	-			
		081015-R10		1.5	8	31	0.1	8	-	18	-			
		081020-R00		2	8	31	0	8	-	18	-			
		081020-R05	●	2	8	31	0.05	8	-	18	-			
		081020-R10		2	8	31	0.1	8	-	18	-			
		081025-R00		2.5	8	31	0	8	-	18	-			
		081025-R05		2.5	8	31	0.05	8	-	18	-			
		081025-R10		2.5	8	31	0.1	8	-	18	-			
081030-R00		3	8	31	0	8	-	18	-					
081030-R05		3	8	31	0.05	8	-	18	-					
081030-R10		3	8	31	0.1	8	-	18	-					
Grooving and back turning		SGBR/L	0604520-R00		2	8	22	0	6	4.5	-	-		
		0604520-R05		2	8	22	0.05	6	4.5	-	-			
		0604520-R10		2	8	22	0.1	6	4.5	-	-			
		0604525-R00		2.5	8	22	0	6	4.5	-	-			
		0604525-R05		2.5	8	22	0.05	6	4.5	-	-			
		0604525-R10		2.5	8	22	0.1	6	4.5	-	-			
		0605530-R00		3	8	24	0	6	5.5	-	-			
		0605530-R05		3	8	24	0.05	6	5.5	-	-			
		0605530-R10		3	8	24	0.1	6	5.5	-	-			
		0805525-R00		2.5	8	24	0	8	5.5	-	-			
		0805525-R05		2.5	8	24	0.05	8	5.5	-	-			
		0805525-R10		2.5	8	24	0.1	8	5.5	-	-			
		0806530-R00		3	8	26	0	8	6.5	-	-			
		0806530-R05		3	8	26	0.05	8	6.5	-	-			
0806530-R10		3	8	26	0.1	8	6.5	-	-					
Threading		STR/L	06073215		3.2	8	25	0.06	6	7	-	0.5-1.5		
		06073230		3.2	8	25	0.19	6	7	-	1.5-3.0			
		08103215		3.2	8	31	0.06	8	10.5	-	0.5-1.5			
		08103230		3.2	8	31	0.19	8	10.5	-	1.5-3.0			

● : Stock item

B Auto tools (KGT/MGT type)

Auto tools (KGT/MGT type)

- ▶ Grooving insert for automatic lathes
- ▶ Exclusive holder for automatic lathes
- ▶ Economic double sided insert
- ▶ Strong clamping system secures stable machining and precision.
- ▶ A wide selection of chip breakers according to various cutting conditions such as low/high feed, continuous/interrupted machining, etc.

▶ Insert code system (KGT/MGT type)

KG	M	N	300	-	04	-	T
System code	Tolerance	Hand	Width of cutting edge		Corner nose radius of insert		Chip breaker
KG SYSTEM (KORLOY Grooving) MG SYSTEM (Multi Grooving)	M : Pressed class G : Ground class	N : Neutral R : Right L : Light I : Internal	2.0~8.0mm		0.2mm 0.3mm 0.4mm		L / R / T / LP / RP

▶ Holder code system (KGT/MGT type)

KG	E	H	R/L	1212	-	3	D25A
System code	Application	Holder type	Hand	Shank size	Cutting width		Max. cutting diameter
KG SYSTEM (KORLOY Grooving) MG SYSTEM (Multi Grooving)	E : External machining I : Internal machining	H : Horizontal type V : Vertical type U : Undercut type	R : Right L : Light	Height 12mm, width 12mm (For internal machining : Min. machining diameter)	2.0~3.0mm		Ø15~Ø32mm

▶ Chip breaker line-up

KGMN-L



- Sharp cutting edge
- For low feed machining
- For small diameter parts

KGMN-R



- Reinforced cutting edge
- For high feed machining
- For interrupted cutting

KGMN-T



- Sharp cutting edge
- Stronger chip control
- For turning and grooving

MGM(G)N-M



- Easier chip control by narrowing chip width with the use of chip breaker on rake surface center
- Smooth chip flow by small dots in external machining
- Available for both external machining and grooving

MGMN-G



- Specially designed chip breaker allows narrower chips to promote better chip flow with the use of center dots
- Exclusive chip breaker for grooving





KGEHR/L-D00A

Grooving, turning, parting off



KGGN KGMN KGMR/L

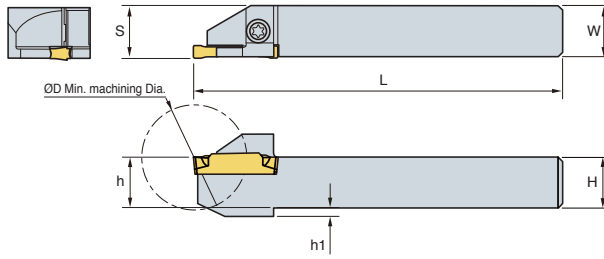

• R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	h ₁	ØD Max	Insert	Screw	Wrench
	R	L									
KGEHR/L	1010-2-D20A	●	10	10	125	10.2	2	20	KGMN200-□-□ KGMR/L200-□-□ KRMN200-C	ETNA0412	TW15L
	1212-2-D25A	●	12	12	125	12.2	2	25			
	1414-2-D25A	●	14	14	125	14.2	-	25			
	1616-2-D32A	●	16	16	125	16.2	-	32			
	1212-3-D25A	●	12	12	125	12.4	2	25	KGMN300-□-□ KGMR/L300-□-□ KRMN300-C KGGN□-□-□		
	1616-3-D32A	●	16	16	125	16.4	-	32			

● : Stock item

▶ KGT Insert

Application	Picture	Designation	Coated					Dimensions (mm)					Configuration
			NC3220	NC3225	NC5330	PC5300	PC9030	b	r	l	d	α°	
Grooving		KGMMN 200-02-L	●	●	●	●	●	2.0	0.2	20	1.7	-	
		300-02-L	●	●	●	●	●	3.0	0.2	20	2.3	-	
Grooving, Parting off		KGMMN 200-02-R	●	●	●	●	●	2.0	0.2	20	1.7	-	
		300-02-R	●	●	●	●	●	3.0	0.2	20	2.3	-	
Grooving-turning		KGMMN 200-02-T	●	●	●	●	●	2.0	0.2	20	1.7	-	
		300-02-T	●	●	●	●	●	3.0	0.2	20	2.3	-	
		300-04-T	●	●	●	●	●	3.0	0.4	20	2.3	-	
Parting off (left handed)		KGMR 200-6D-LP			●	●		2.0	0.2	20	-	6	
		200-15D-LP			●	●		2.0	0.2	20	-	15	
		300-6D-LP			●	●		3.0	0.2	20	-	6	
		300-15D-LP			●	●		3.0	0.2	20	-	15	
Parting off (right handed)		KGMR 200-6D-RP			●	●		2.0	0.2	20	-	6	
		200-15D-RP			●	●		2.0	0.2	20	-	15	
		300-6D-RP			●	●		3.0	0.2	20	-	6	
		300-15D-RP			●	●		3.0	0.2	20	-	15	

● : Stock item





B Auto tools (MGT type)

MGEHR/L



MGMN

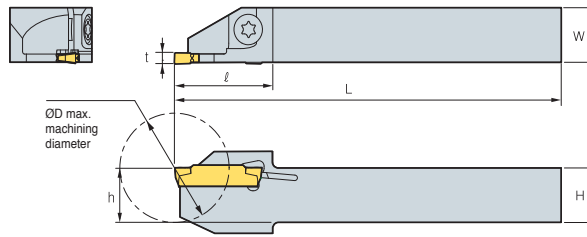



• R type insert
(mm)

Designation	Stock		ØD	H=h	W	L	ℓ	t	Insert	Screw	Wrench
	R	L									
MGEHR/L 1010-X15A	●		20	10	10	125	18	1.5	MGMN150-G	ETNA 0412	TW 15L
	●		25	12	12	125	19.5	1.5			
1010-X20A			20	10	10	125	18	2	MGMN200-M MGMN200-G	ETNA 0412	TW 15L
1212-X20A			25	12	12	125	19.5	2			
1616-X20A			32	16	16	125	25	2	MGMN250-M MGMN250-G	ETNA 0412	TW 15L
1010-X25A			20	10	10	125	20	2.5			
1212-X25A			25	12	12	125	20	2.5			
1616-X25A			32	16	16	125	25	2.5			

● : Stock item

▶ MGT Insert

Application	Picture	Designation	Cermet		Coated				Uncoated			Dimensions (mm)					Configuration	
			CN2000	CN20	NC3120	NC3220	NC5330	NC3030	PC5300	PC9030	H01	G10E	A30	b	r	l		d
Grooving / Parting off	MGMN 	MGMN 150-G			●	●	●	●	●				1.5	0.15	16	1.2	3.5	
		200-G			●	●	●	●	●				2	0.2	16	1.6	3.5	
		200-M			●	●	●	●	●	●			2	0.2	16	1.6	3.5	
		250-G				●	●	●	●	●			2.5	0.2	18.5	2	3.85	
		250-M			●	●	●	●	●	●			2.5	0.2	18.5	2	3.85	

● : Stock item




Auto tool (MSB tool)

- ▶ High hardness grade guarantees longer tool life.
- ▶ Various kinds of machining(Fitting, Valve, Medical parts, Automobile component, and Semiconductor equipment) are available.
- ▶ Various types of MSB tools (Boring, Grooving, Threading)

▶ Code System

B : Boring
BC : Copying
BB : Back Boring
BF : Chamfering
G : Square Grooving
GR : Round Grooving
GF : Face Grooving
T : Threading

Boring	No Code		
Copying	Width of Groove		
Threading	60°	55°	
	Pitch	tpi	
◇	F	0.25~1.0	72~24
	A	0.5~1.5	48~16
	AG	0.5~3.0	48~8

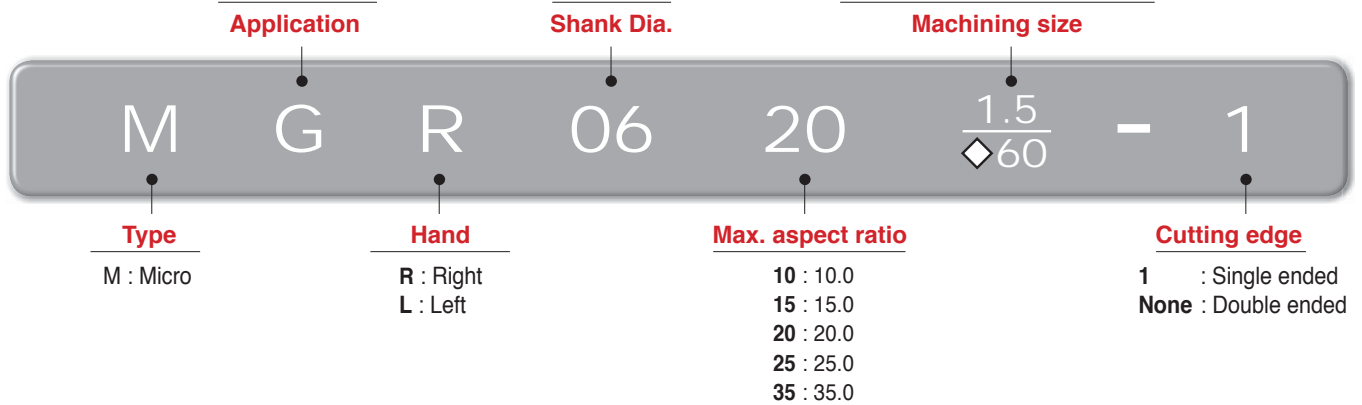

▶ MSB tool code system

Types		Application	Designation	
01	Boring	Boring	MBR/L○○☆☆	
02		Copying	MBCR/L○○☆☆	
03		Back Boring	MBBR/L○○☆☆	
04		Chamfering	MBFR/L○○☆☆	
05	Grooving	Square Grooving	MGR/L○○☆☆-□□	
06		Round Grooving	MGRR/L○○☆☆-□□	
07		Face Grooving	MGFR/L○○00-□□	
08	Threading	Partial	60°	MTR/L○○☆☆-◇60
			55°	MTR/L○○☆☆-◇55

▶ Details

Marks	○○	Shank Dia.		
	☆☆	Max. depth of boring		
	□□	Width of groove		
	◇	Pitch / tpi	F	72~24
			A	48~16
			AG	48~8



B Auto tool (MSB tool)









▶ Grades

Grades	Coating	Application and features
Z12M	Carbide	Ultra fine grain substrate ensures superior wear resistance and toughness. Application: Cast iron, Aluminum alloy and Non-ferrous metals machining
PC30M	TiN coating	TiN coated ultra fine grain substrate ensures long tool life. Application: Stainless steel, heat resisting alloy and hard-to-cut material machining

▶ Machining Types





▶ Types

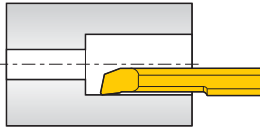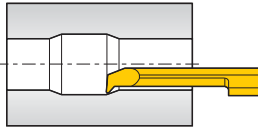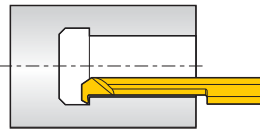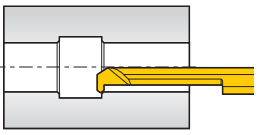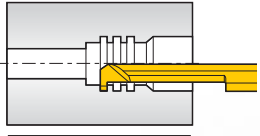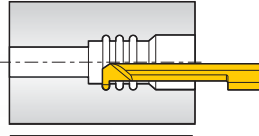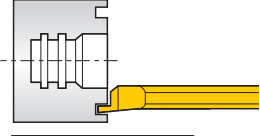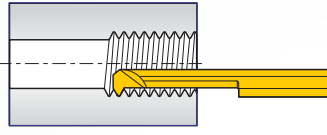Boring	 <p>Boring Min. dia. of machining : Ø3.2</p>	 <p>Copying Min. dia. of machining : Ø4.2</p>	 <p>Back Boring Min. dia. of machining : Ø3.2</p>	 <p>Chamfering Min. dia. of machining : Ø4.2</p>
Grooving	 <p>Square Grooving Min. dia. of machining : Ø3.2</p>	 <p>Round Grooving Min. dia. of machining : Ø3.2</p>	 <p>Face Grooving Min. dia. of machining : Ø6.0</p>	
Threading	 <p>Threading Min. dia. of machining : Ø3.3</p>			





Boring

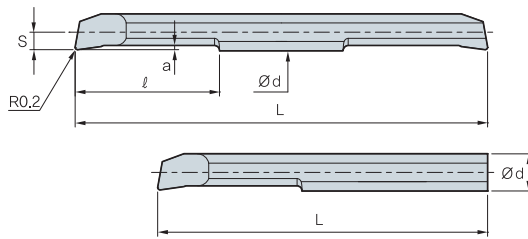

Twin Edge			Single Edge			Ød	Min.dia. of machining	ℓ	Overall length		Detailed cutting edge	
Designation	Coated	Uncoated	Designation	Coated	Uncoated				L		a	S
	PC30M	Z12M		PC30M	Z12M				Double ended	Single ended		
MBR	0310	●	MBR	0310-1		3.0	3.2	10	40	35	0.5	1.4
	0315	●		0315-1				15	50	45		
	0410	●		0410-1				10	40	35		
	0415	●		0415-1		4.0	4.2	15	50	45	0.6	1.9
	0420	●		0420-1				20	60	50		
	0610			0610-1		6.0	6.2	10	45	40	0.75	2.9
	0615	●		0615-1				15	55	45		
	0620	●		0620-1				20	65	50		
	0810			0810-1		8.0	8.2	10	50	45	0.8	3.9
	0820	●		0820-1				20	70	60		
	0830			0830-1				30	80	70		
	1015			1015-1		10.0	10.2	15	60	60	1.0	4.9
	1025	●		1025-1				25	80	70		
1035		1035-1		35	100			80				

● : Stock item

Copying



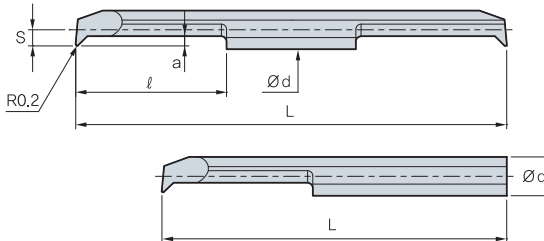


Twin Edge			Single Edge			Ød	Min.dia. of machining	ℓ	Overall length		Detailed cutting edge	
Designation	Coated	Uncoated	Designation	Coated	Uncoated				L		a	S
	PC30M	Z12M		PC30M	Z12M				Double ended	Single ended		
MBCR	0410		MBCR	0410-1		4.0	4.2	10	40	35	1.0	1.9
	0415	●		0415-1				15	50	45		
	0420	●		0420-1				20	60	50		
	0610			0610-1		6.0	6.2	10	45	40	1.3	2.9
	0615	●		0615-1				15	55	45		
	0620	●		0620-1				20	60	50		

● : Stock item






Back Boring

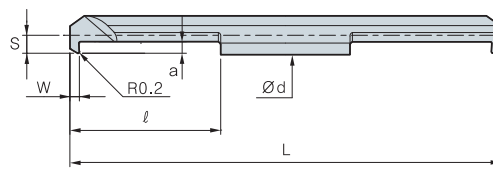

Double ended			Single Edge			Ød	Min.dia. of machining	ℓ	Overall length		Detailed cutting edge		
Designation	Coated	Uncoated	Designation	Coated	Uncoated				L		W	a	S
	PC30M	Z12M		PC30M	Z12M				Double ended	Single ended			
MBBR 0310 0315 0410 0415 0420 0610 0615 0620			MBBR 0310-1 0315-1 0410-1 0415-1 0420-1 0610-1 0615-1 0620-1			3.0	3.2	10	40	35	1.5	0.8	1.4
				15	50			45					
						4.0	4.2	10	40	35	2.0	1.3	1.9
				15	50			45					
						6.0	6.2	20	60	50	2.0	1.9	2.9
								10	45	40			
								15	55	45			
								20	65	50			

● : Stock item

Chamfering


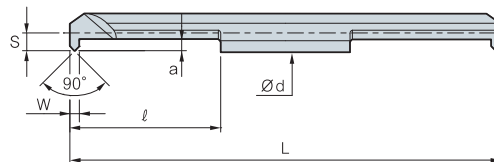


Twin Edge			Single Edge			Ød	Min.dia. of machining	ℓ	Overall length		Detailed cutting edge		
Designation	Coated	Uncoated	Designation	Coated	Uncoated				L		W	a	S
	PC30M	Z12M		PC30M	Z12M				Double ended	Single ended			
MBFR 0410 0415 0420 0610 0615 0620			MBFR 0410-1 0415-1 0420-1 0610-1 0615-1 0620-1			4.0	4.2	10	40	35	0.8	1.0	1.9
				15	50			45					
				20	60			50					
						6.0	6.2	10	45	40	1.4	1.2	2.9
								15	55	45			
								20	65	50			

● : Stock item





Square Grooving

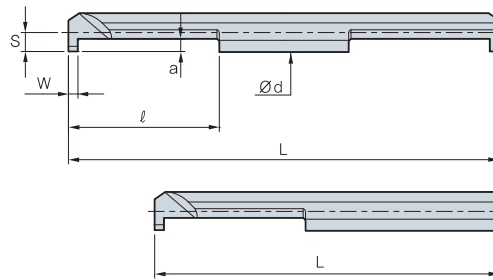

Twin Edge			Single Edge			Ød	Min.dia. of machining	ℓ	Overall length		Detailed cutting edge		
Designation	Coated	Uncoated	Designation	Coated	Uncoated				L		W	a	S
	PC30M	Z12M		PC30M	Z12M				Double ended	Single ended			
MGR 0310-1.0			MGR 0310-1.0-1			3.0	3.2	10	40	35	1.0	0.8	1.4
0315-1.0			0315-1.0-1					15	50	45			
0310-1.5			0310-1.5-1					10	40	35	1.5		
0315-1.5			0315-1.5-1					15	50	45			
0410-1.0			0410-1.0-1			4.0	4.2	10	40	35	1.0	1.4	1.9
0420-1.0			0420-1.0-1					20	60	50			
0410-1.5			0410-1.5-1					10	40	35	1.5		
0420-1.5			0420-1.5-1					20	60	50			
0410-2.0			0410-2.0-1					10	40	35	2.0		
0420-2.0			0420-2.0-1					20	60	50			
0610-1.0	●		0610-1.0-1			6.0	6.2	10	45	40	1.0	1.8	2.9
0620-1.0	●		0620-1.0-1					20	65	50			
0610-1.5			0610-1.5-1					10	45	40	1.5		
0620-1.5			0620-1.5-1					20	65	50			
0610-2.0			0610-2.0-1					10	45	40	2.0		
0620-2.0			0620-2.0-1					20	65	50			
0610-2.5			0610-2.5-1					10	45	40	2.5		
0620-2.5			0620-2.5-1					20	65	50			
0820-1.5			0820-1.5-1			8.0	8.2	20	70	60	1.5	2.5	3.9
0820-2.0			0820-2.0-1								2.0		
0820-2.5			0820-2.5-1								2.5	3.5	
0820-3.0			0820-3.0-1								3.0		
1025-1.5			1025-1.5-1			10.0	10.2	25	80	70	1.5	2.5	4.9
1025-2.0			1025-2.0-1								2.0		
1025-2.5			1025-2.5-1								2.5	3.5	
1025-3.0			1025-3.0-1								3.0		

● : Stock item



Round Grooving

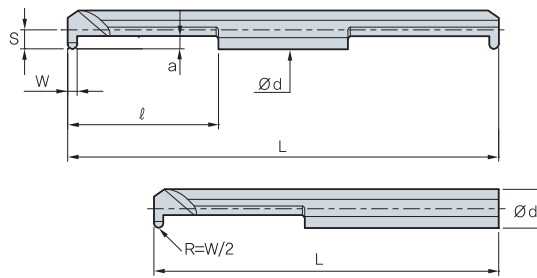

Twin Edge			Single Edge			Ød	Min. dia. of machining	l	Overall length		Detailed cutting edge		
Designation	Coated	Uncoated	Designation	Coated	Uncoated				L		W	a	S
	PC30M	Z12M		PC30M	Z12M				Double ended	Single ended			
MGRR	0310-0.8		MGRR	0310-0.8-1		3.0	3.2	10	40	35	0.8	0.8	1.4
	0315-0.8			0315-0.8-1				15	50	45			
	0410-1.0			0410-1.0-1		4.0	4.2	10	40	35	1.0	1.0	1.9
	0420-1.0			0420-1.0-1				20	60	50			
	0610-1.0			0610-1.0-1		6.0	6.2	10	45	40	1.0	2.0	2.9
	0620-1.0			0620-1.0-1				20	65	50			
	0610-1.5			0610-1.5-1				10	45	40			
	0620-1.5			0620-1.5-1				20	65	50			
	0610-2.0			0610-2.0-1		10.0	10.2	10	45	40	2.0	2.8	4.9
	0620-2.0			0620-2.0-1				20	65	50			
	0820-1.0			0820-1.0-1		8.0	8.2	20	70	60	1.0	2.3	3.9
	0820-1.5			0820-1.5-1							1.5		
	0820-2.0			0820-2.0-1							2.0		
	1025-1.0			1025-1.0-1		10.0	10.2	25	80	70	1.0	2.8	4.9
	1025-1.5			1025-1.5-1							1.5		
	1025-2.0			1025-2.0-1							2.0		

● : Stock item

Face Grooving

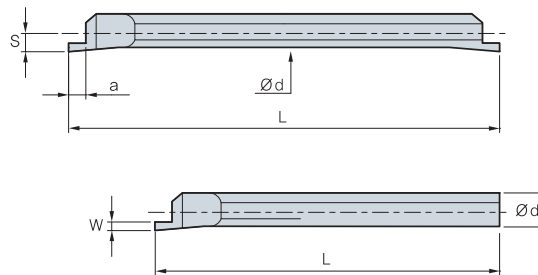


Twin Edge			Single Edge			Ød	Min. dia. of machining	Overall length		Detailed cutting edge		
Designation	Coated	Uncoated	Designation	Coated	Uncoated			L		W	a	S
	PC30M	Z12M		PC30M	Z12M			Double ended	Single ended			
MGFR	0400-1.0		MGFR	0400-1.0-1		4.0	6.0	50	45	1.0	1.5	1.8
	0400-1.5			0400-1.5-1						1.5	2.0	
	0600-1.0			0600-1.0-1		6.0	8.5	50	45	1.0	1.5	2.9
	0600-1.5			0600-1.5-1						1.5	2.0	
	0600-2.0	●		0600-2.0-1		8.0	10.4	70	60	2.0	2.5	3.9
	0800-1.0			0800-1.0-1						1.0	1.5	
	0800-1.5			0800-1.5-1						1.5	2.0	
	0800-2.0			0800-2.0-1		10.0	12.4	80	70	2.0	2.5	4.9
	1000-2.0			1000-2.0-1						2.5	3.0	
	1000-2.5			1000-2.5-1						3.0	3.5	
	1000-3.0			1000-3.0-1						3.5	4.0	
	1000-3.5			1000-3.5-1		10.0	12.4	80	70	4.0	4.5	4.9
	1000-4.0			1000-4.0-1						4.5	5.0	
	1000-4.5			1000-4.5-1								

● : Stock item



Threading

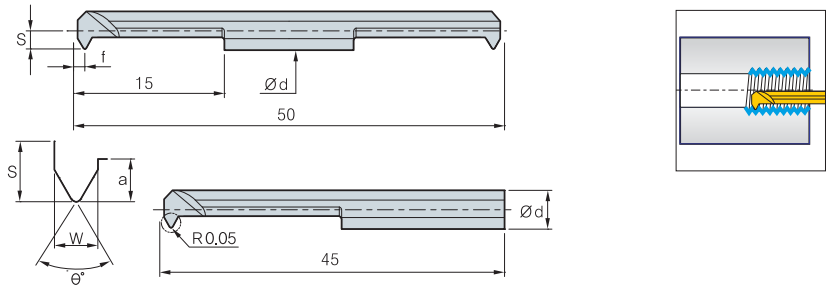


Twin Edge			Single Edge			Ød	Min.dia. of machining	Threading			Detailed cutting edge		
Designation	Coated PC30M	Uncoated Z12M	Designation	Coated PC30M	Uncoated Z12M			W	Pitch / tpi	θ°	S	a	f
MTR	0315-F60		MTR	0315-F60-1		3.0	3.3	1.2	0.5~1.0	60°	1.45	1.2	0.6
	0415-F60			0415-F60-1		4.0	4.3						
	0615-A60			0615-A60-1		6.0	6.2				2.0		
	0315-F55			0315-F55-1		3.0	3.3	1.2	48~24	55°	1.45	1.2	0.6
	0415-F55			0415-F55-1		4.0	4.3						
	0615-A55			0615-A55-1		6.0	6.2				2.0		

● : Stock item

SLEEVE

SL(SLEEVE)

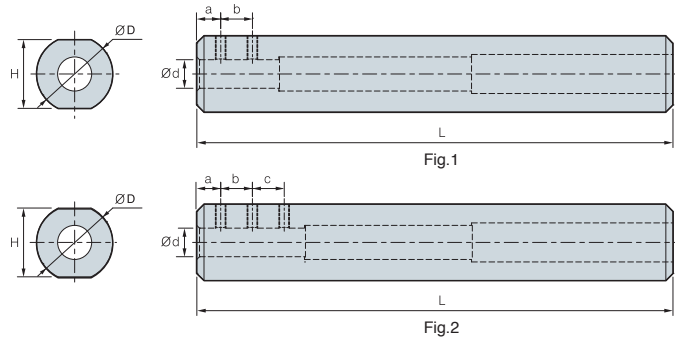

Designation	Stock	Ød	a	b	c	ØD	H	L	Screw	Wrench	Fig.
SL1603	●	3	5	-	-	16	14	100	M3	HW15L	1
SL1604	●	4	5	6	-	16	14	100	M4	HW20L	
SL1605	●	5	5	8	-	16	14	100	M4	HW20L	
SL1606	●	6	5	6	6	16	14	100	M4	HW20L	2
SL1607	●	7	5	6	8	16	14	100	M4	HW20L	
SL2008	●	8	5	10	10	20	18	100	M4	HW20L	2
SL2010	●	10	5	10	10	20	18	100	M5	HW20L	

(mm)

※ Fine tolerance and surface roughness

● : Stock item

C

Multi functional Tools

Korloy Multi-functional tool can machining grooving, part-off, facing and forming in various applications. It design ensures superior machinability and productivity.



Application Example

- C02 Application Example
- C04 Technical Information for Multi Functional Tools Series

KGT Series

- C07 Technical Information for KGT
- C12 Available Insert for KGT
- C14 KGT Holder
- C22 KGT Blade for Parting off

MGT Series

- C23 Technical Information for MGT
- C24 Available Insert for MGT
- C26 MGT Holder
- C31 MGT Holder (Face Grooving)
- C34 MGT Cartridge

MGT Aluminum Wheel Series

- C37 Technical Information for MGT Aluminum Wheel
- C38 Available Insert for MGT Aluminum Wheel
- C39 MGT Aluminum Wheel

Saw-man

- C41 Technical Information for Saw-man
- C42 Saw-man

TB-M/TB

- C44 Technical Information for TB-M/TB
- C45 Available Insert for TB-M/TB

Grooving / Parting off

- C45 TBH
- C46 IGH
- C46 DBH
- C47 GFT
- C47 GFIP
- C48 GH
- C48 GFIK
- C49 EH
- C49 PH

NEW Fine Tools

- C50 Technical Information for New Fine Tools
- C51 Available Insert for New Fine Tools
- C52 New Fine Tools

Multi Turn

- C53 Technical Information for Multi Turn
- C55 Multi Turn

Bearing Solutions

- C56 Technical Information for Bearing Solution
- C57 Bearing Solution
- C63 Special Order Form for Bearing Inserts

Special Order Form

- C64 MGT Special Order Form for MGT
- C65 Special Order Form for V-Pulley Insert

C Application Example

▶ For external machining


KGEUR/L	MGEUR/L	TBH	PH	GH	GFT	DBH	KGEHR/L	MGEHR/L
Width : 2.5 T-MAX : 3.0	Width : 3.0~8.0 T-MAX : 3.0~5.0	Width : 1.25~4.5 T-MAX : 1.5~5.0	Width : 3.0~5.0 ØD-MAX : 30~50	Width : 1.23~4.28 T-MAX : 1.5~4.0	Width : 1.1~8.0 T-MAX : 2.1~9.0	Width : 3.0~8.0 T-MAX : 14	Width : 2.0~8.0 T-MAX : 17~20	Width : 1.5~8.0 T-MAX : 10~28
KRMN MRMN	TB	POB	GO GS	GW BF	DC DB	KGMN KRMN KGGN KRGN	MGMN MRMN MRGN MGGN	

▶ For internal machining


NFTIH	GFIK	GFIP	IGH	KGIVR/L	MGIVR/L	KGIUR/L	MGIUR/L
Width : 0.75~4.02 T-MAX : 1.3~4.6	Width : 2.0~8.0 T-MAX : 2.0~8.0	Width : 1.1~8.0 T-MAX : 2.1~9.0	Width : 1.25~2.8 T-MAX : 1.5~2.3	Width : 2.0~4.0 T-MAX : 7.0~8.0	Width : 1.5~8.0 T-MAX : 4.0~10	Width : 3.0 T-MAX : 3.0	Width : 3.0~8.0 T-MAX : 3.5~6.5
NFTG NFTF NFTT	GR	GW BF	IG	KGMI KRMN	MGMN MRMN MRGN MGGN	KRMN	MRMN



▶ For face grooving

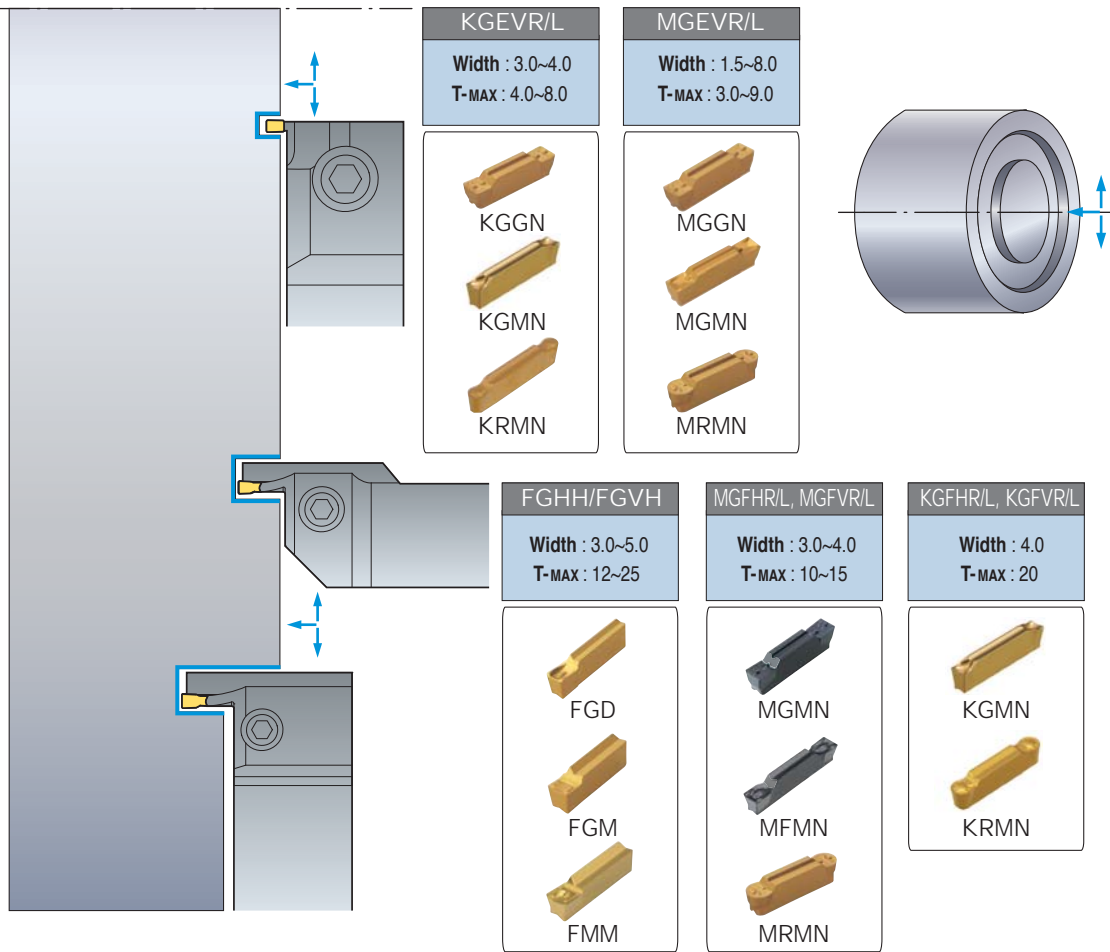



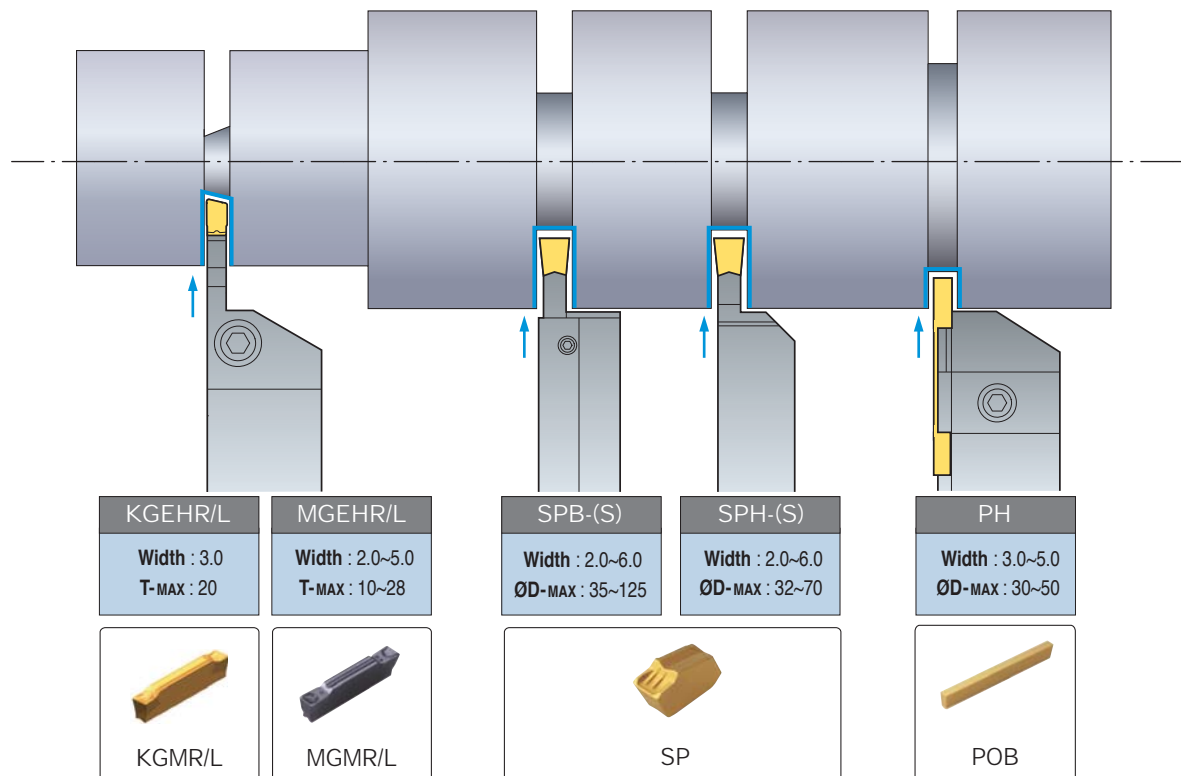




▶ For parting off



Face grooving tools






▶ For Shallow Grooving

- ▶ Economical tools utilizing a double ended cutting edge system
- ▶ Newly designed chip breakers that help ensure chip control for various face grooving applications
- ▶ Korloy face grooving tools provide various holder line-ups to give you more options and benefits

MFMN300	MGMN400	Horizontal MGFHR	Vertical MGFVR
			
Cutting Width 3mm	Cutting Width 4mm	Machining Dia. Ø24~200mm	Machining Dia. Ø24~60mm
KGMM300~600		Horizontal KGFHR	Vertical KGFVR
			
Cutting Width 3~6mm		Machining Dia. Ø34~220mm	Machining Dia. Ø44~200mm




▶ For Deep Grooving

- ▶ These tools are suitable for deep grooving with a single cutting edge (Tmax 25mm)
- ▶ A variety of chip breakers enable a machinist to apply a wide range of functions in machining
- ▶ A variety of holders ensures multiple application ranges

FGD	FGM	FMM	Horizontal FGHH	Vertical FGVH
				
Deep face grooving (G class)	Wide face grooving turning (G class)	Wide face grooving turning (M class)	Machining Dia. Ø25~140mm	Machining Dia. Ø25~140mm

▶ Selection System of Holder


▶ Follow these 3 simple directions to choose the right insert and holder for your application

	Insert and holder Choose an insert and holder that best applies to your application according to the cutting width and part of workpiece to be machined.		Holder Tmax Choose the holder with the shortest overhang that will still meet the cutting depth required		Machining Dia. Choose the largest size of shank depending on the initial grooving diameter required in the application
---	--	---	--	---	--

Notice : To minimize chattering, use the shortest holder according to Tmax.


▶ Optimization of Face Grooving

Roughing : When face grooving decreases the cutting speed 40% below a normal face turning operation

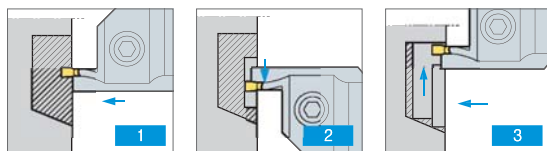

- Grooving at the initial diameter
- Face turning away from center
- Face turning to center


Finishing : When face grooving decreases the cutting speed 40% below a normal face turning operation

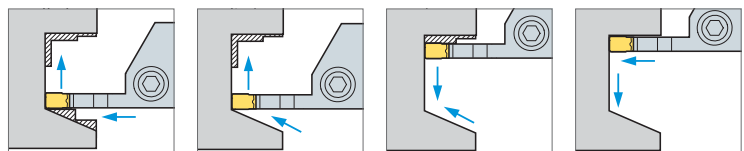


- Grooving at the initial diameter to the final cutting depth and face turning away from center
- Radius operation toward final dimension at the bottom
- Face turning to center
- Grooving for the right dimension you want

▶ Notice for Face Grooving

- ▶ Before machining, check and adjust the following holder position



- Check the cutting edge height at the center of the workpiece
- Machine towards the center and check for burrs




- For better surface roughness, set up the insert in order to perpendicular at center line

Turning and Grooving

▶ Selection of Insert

- ▶ Feed rate - Decide maximum feed rate after considering the insert's characteristics and machine capabilities. ($F_{max} = W \times 0.075$)
 - Max feed rate should not be larger than the corner radius of the insert
 - In grooving applications, chip evacuation problems can be remedied by using step feed methods at small intervals
- ▶ Depth of cut - The minimum depth of cut should be bigger than corner radius of insert
 - When deciding on the max depth of cut please consider the machine's cutting load
 - Depending on the shape of the insert, deflection of work piece and clearance angle can be changed




▶ Notice for turning

- ▶ KGT/MGT tools are designed to incur side cutting force from its clearance angle; this feature gives you advantage over a standard ISO insert.
- ▶ The standard MGT insert also provides a "wiper" effect to improve surface roughness


▶ Notice for Finishing (offset need final quality)

- ▶ After desired diameter is grooved, continuous turning operation might cause some deflection of the workpiece. In these cases follow the given formula, offsetting these factors enables the desired diameter that you want
- ▶ To eliminate the difference in the machined diameter by utilizing the clearance angle (which is commonly generated during the final turning operation) follow the directions above when machining
To obtain a good surface roughness without offsetting in an application follows the directions below
 - 1) Groove to the desired diameter
 - 2) Pull the tool backs a total distance of $\theta/2$
 - 3) Continue the external turning operation to desired diameter

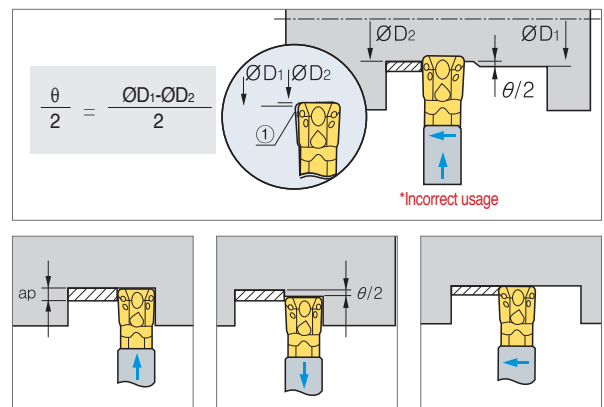


▶ Notice for MGT turning applications


- ▶ KGT/MGT tools are available for grooving and turning as a multifunctional tool. When using a M.G.T tool keep in mind that the tool imitates a standard ISO turning application. The application uses a positive clearance angle where a tool's cutting force and depth of cut are all applied in an application. This might create normal wear on the insert, after turning, a grooving process might not meet the desired diameter on the work piece. To off set this, adjust the tool 0.004 inches and return to the original position of the grooving application

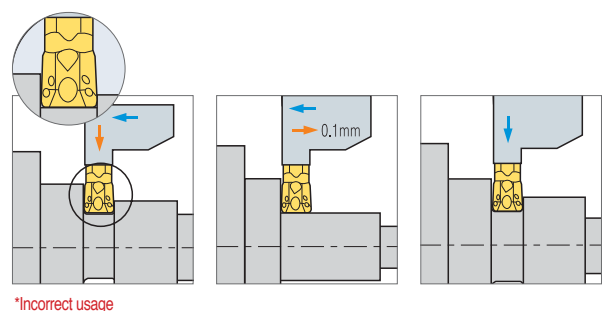

▶ Machining workpiece with a radius bigger than the insert's corner radius




Stabilize your tool pressure. KGT/MGT tools create a cutting load when machining a workpiece with a radius larger than the corner radius of insert (shown in the picture). The unequal cutting force might initially break the insert or holder

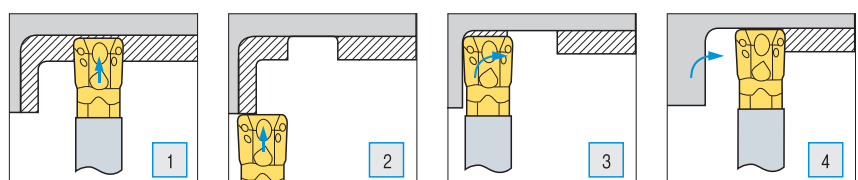

Parting off & Grooving

▶ Insert

Lead angle applications




- 4° - Pipe (Tubing and hollow bar)
- 6° - Pipe and solid bar
- 8° - Solid bar
- 15° - Small diameter Solid bar

Lead angle 0°(Neutral)



- Parting off on solid bar type
- Occurring the center stub when parting off
- Prevent to be deflected workpiece by cutting direction during parting off
- Available for use deep parting depth

Lead angle 4° ~ 8°



- Reduce the center stub when parting off on solid bar type
- Reduce the burr when parting off on tubing or hollow bar type

Lead angle 8°~15°



- Parting off on small diameter and hollow bar type
- Reduce the burr and center stub when parting off on small diameter solid bar type

※ Available Inserts : MGMR/L - □□ - PS/PT, KGMR/L - □□ - LP/RP
(Lead angle) (Lead angle)


▶ Selection of Insert

- ▶ To properly match the insert and cutting condition, the following factors should be considered
 - Width of insert
 - Chip breaker
 - Grade and nose R
- ▶ The relationship between the cutting width and cutting depth
 - Neutral type, inserts with a 0 degree lead angle are best when used an applications maximum depth of cut
 - In general alloy steel, the maximum depth of cut = $W \times 0.8$
- ▶ Insert with lead angle
 - To reduce burrs, we recommend using insert with a lead angle.
 - Insert that have larger lead angles reduce burrs but will also deereases tool life.
 - In the case where burrs are acceptable, we recommend using a neutral type insert




▶ Setting of Holders

- ▶ The cutting position should be exactly mounted on machined axis in order to create a perpendicular direction or 90 to minimize vibration

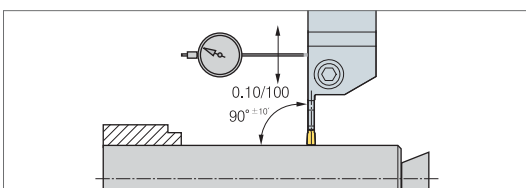

▶ Setting of Parting off

- ▶ The edge height of an insert should be set within ± 0.1 mm based on the center line
 - Parting off should be done as close to the chuck as possible to minimize vibration

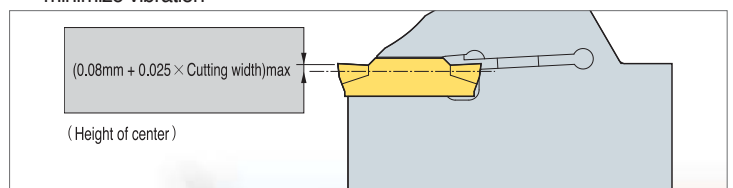

▶ Notice

- ▶ Keep a consistent cutting speed and feed
 - Use proper amounts of coolant for better performance
 - Properly clean the insert pocket before mounting insert

▶ Usage

- ▶ If insert is worn, immediately replace with a new insert. This is to prevent the damage on the workpiece
 - If the holder seat is worn or damaged replace with a new one immediately for stable clamping
 - Do not grind or regrind the holder seat

▶ Selection of Chip Breaker

Our chip breakers are designed to narrow chips during grooving operations. Narrow chips usually offer the following advantages

- ▶ Deereases friction between chips and the workpiece. This usually gives a better surface roughness finish
- ▶ With better chip flow, a machinist is able to increase feed rates due to a reduced cutting load




Multi-functional machining with strong clamping system and new technology


KGT Series

- Double-sided inserts of KGT series reduces machining cost.
- Strong clamping system ensures stable and accurate machining.
- New grade and new technology provide superior tool life.
- Various tooling solutions of the KGT series improve productivity.
- The foreside and clearance face of the KGT insert having cutting edges are optimal for grooving, parting-off, turning and facing with reducing processing time.
- Three-dimensional chip breaker ensures excellent chip control in various applications.
- The KGT inserts with various chip breakers are available for wide application range.
- Special cutting edges are available for quotation.


▶ Insert Code System

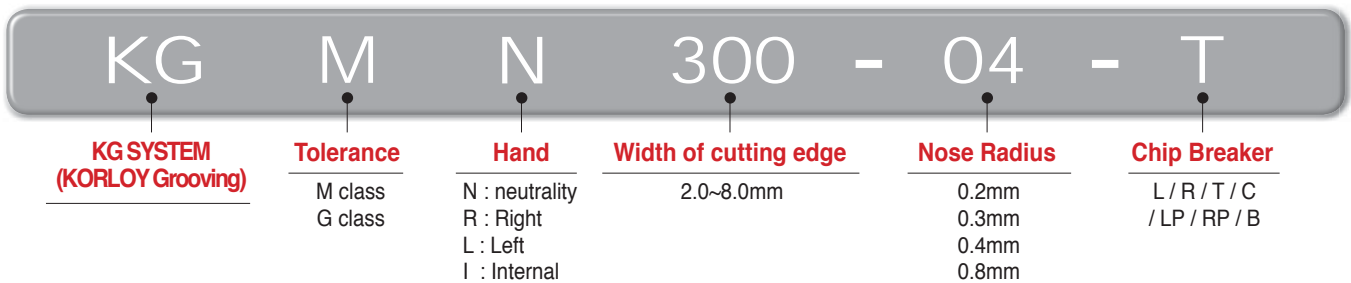



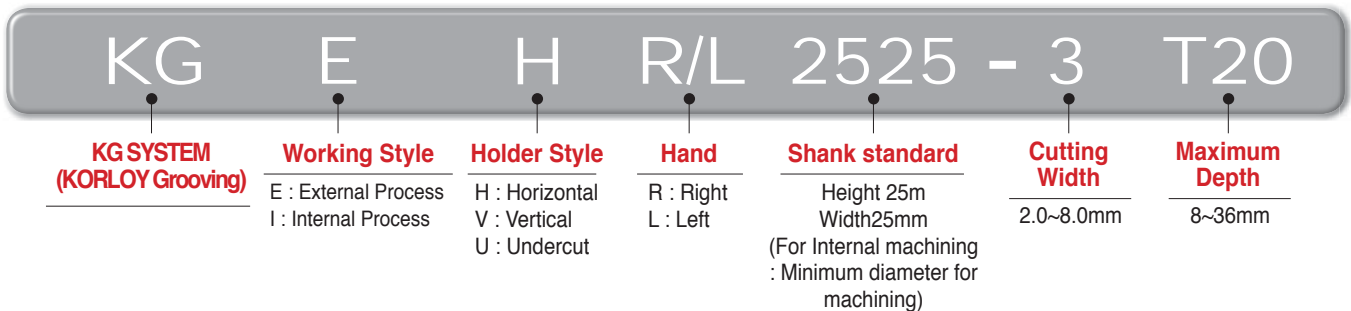



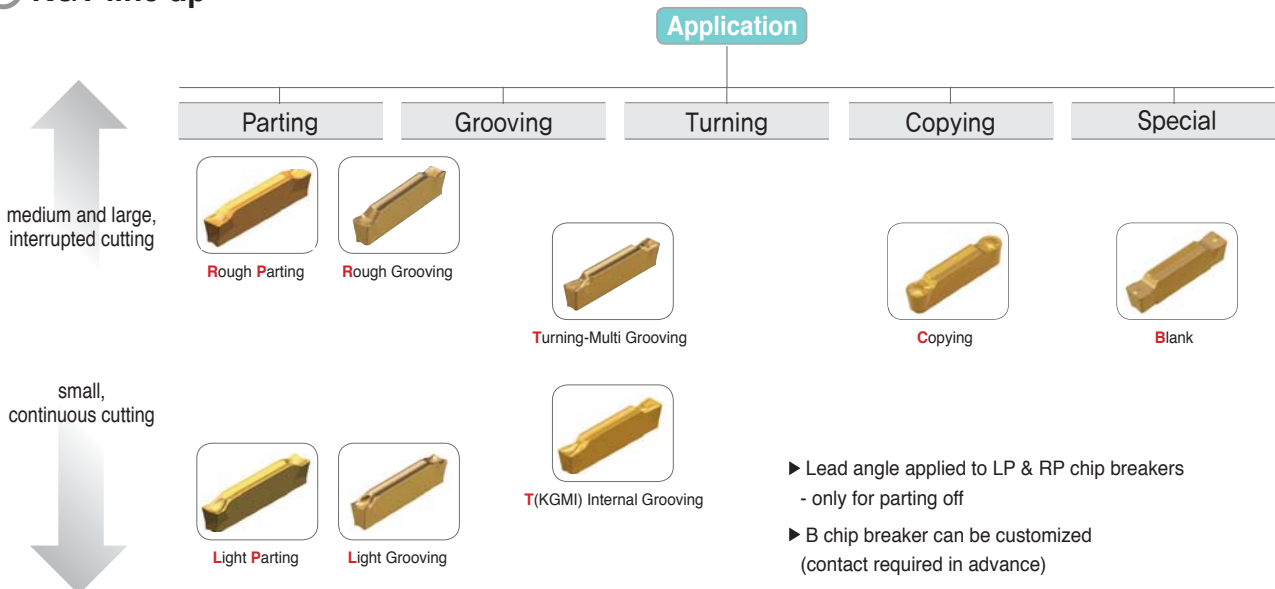

▶ Holder Code System



▶ KGT line up



Recommended Insert

Designation	Geometry	Picture	Designation									
			For external machining			For face grooving		For Internal machining		Copying	For relieving	Special machining
			Parting	Grooving	Turning	Grooving	Turning	Grooving	Turning	Copying	Relieving	Special
KGMN	L Light Grooving		○	⊙		○						
	R Rough Grooving		○	⊙		○						
	T Turning-Multi Grooving		○	⊙	⊙	⊙	⊙					
KGMI	T Internal Grooving							⊙	⊙			
KRMN	C Copying									⊙	⊙	
KGMR/L	LP Light Parting		⊙									
	RP Rough Parting		⊙									
KGGN	B Blank			○								⊙

⊙ First choice, ○ Second choice

Features

Front View




- Strong clamping → Higher machining reliability
- Self-centering → Higher accuracy
- Anti-chattering design → Fine surface finish




C/B guide



L For **L**ight Grooving




- Sharp cutting edge
- Low feed machining
- Small diameter component
- Low carbon steel
- Carbon steel
- Alloy steel
- Stainless




R For **R**ough Grooving




- Strong cutting edge
- High feed machining
- Interrupted cutting
- Carbon steel
- Alloy steel
- Stainless
- Cast iron




T For **T**urning and Multi Grooving




- Sharp cutting edge
- Improved chip control
- Turning & grooving machining
- Carbon steel
- Alloy steel
- Stainless
- Cast iron




C For **C**opying and Relief




- Improved chip control
- Copying
- Relief
- Carbon steel
- Alloy steel
- Stainless
- Cast iron




LP For **L**ight **P**arting




- Sharp cutting edge
- Low feed machining
- Small diameter component
- Right/left handed
- Low carbon steel
- Carbon steel
- Alloy steel
- Stainless



RP For **R**ough **P**arting





- Strong cutting edge
- High feed machining
- Interrupted cutting
- Right/left handed
- Carbon steel
- Alloy steel
- Cast iron




C Technical Information for KGT Series

B For Precision Grooving



- Ground insert
- Precise tolerance
- Various cutting edge length, Nose R
- Improved chip control

- Carbon steel
- Alloy steel
- Stainless
- Cast iron




A For Aluminium Grooving



- Sharp cutting edge
- Precise tolerance

- Aluminium alloy
- Copper alloy



▶ Grades for recommended application range

Workpiece	Grade	Order of recommended grade	Recommended cutting speed(m/min)					
			50	100	150	200	250	
P	Steel	PC5300 (1)		70	120			
		NC3225 (2)				130	220	
		NC5330 (3)				120	200	
	Alloy Steel	PC5300 (1)		60	105			
		NC3225 (2)				130	200	
		NC5330 (3)			90	180		
M	Stainless steel	PC5300 (1)		70	120			
		PC9030 (2)		70	115			
		NC5330 (3)		75	125			
K	Cast iron	PC5300 (1)		55	90			
		NC5330 (2)			95	160		
S	HRSA	PC5300 (1)	20	35				





▶ Cutting Performance

Multi-function machining

Turning + Grooving repetition

Optimized geometry for turning + grooving - High efficiency.

- **Workpiece** C45
- **Cutting condition**
 - vc = 170(m/min)
 - fn = 0.15(mm/rev)
 - ap = 2mm
 - W = 3mm
 - wet
- **Designation** KGMN300-04-T(PC5300)


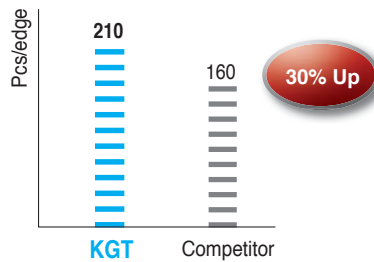


Grooving

Shoulder Grooving

Tough geometry for interrupted and deep grooving.

- **Workpiece** X5CrNi18-9
- **Cutting condition**
 - vc = 120(m/min)
 - fn = 0.12(mm/rev)
 - ap = 5mm
 - W = 4mm
 - wet
- **Designation** KGMN400-03-R(PC5300)


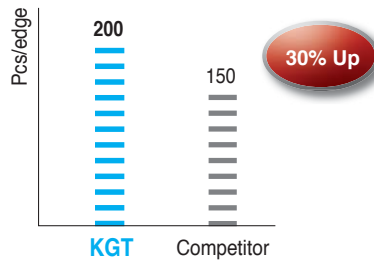


Shaft machining

Grooving(Roughing)&Turning(Finishing)

Excellent chip control for higher efficiency.

- **Workpiece** 42CrM04
- **Cutting condition**
 - vc = 150(m/min)
 - fn = 0.15(mm/rev)
 - ap = 5mm
 - W = 3mm x 3
 - wet
- **Designation** KGMN300-04-T(PC5300)


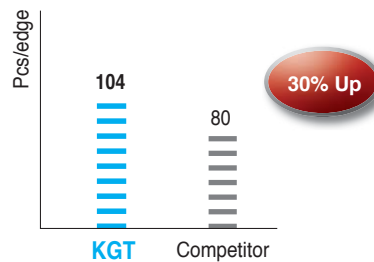


Parting off

Pipe Parting-off















Exclusive parting-off chip breaker for longer tool life. / Sharp geometry for less burr.

- **Workpiece** X5CrNi18-9
- **Cutting condition**
 - vc = 140(m/min)
 - fn = 0.15(mm/rev)
 - ap = 2mm
 - W = 3mm
 - wet
- **Designation** KGMR300-6D-LP(PC5300)

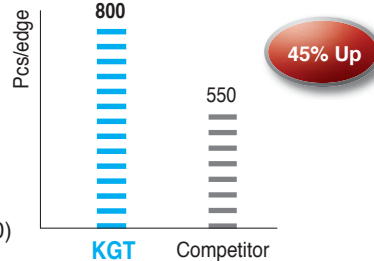

C Available Insert for KGT

Insert






Application	Picture	Designation	Coated					Dimensions (mm)					Picture	Page
			NC3220	NC3225	NC5330	PC5300	PC9030	b	r	l	d	α°		
Grooving		KGMLN 200-02-L	●	●	●	●	●	2.0	0.2	20	1.7	-		C14~19 C21
		300-02-L	●	●	●	●	●	3.0	0.2	20	2.3	-		
		400-02-L	●	●	●	●	●	4.0	0.2	20	3.3	-		
		500-03-L		●	●	●		5.0	0.3	25	4.1	-		
		600-03-L		●	●	●		6.0	0.3	25	5.1	-		
Grooving · Parting off		KGMLN 150-015-R						1.5	0.15	16	1.2	-		C14~19 C21
		200-02-R	●	●	●	●	●	2.0	0.2	20	1.7	-		
		300-02-R	●	●	●	●	●	3.0	0.2	20	2.3	-		
		400-03-R	●	●	●	●	●	4.0	0.3	20	3.3	-		
		500-03-R			●	●		5.0	0.3	25	4.1	-		
		600-03-R			●	●		6.0	0.3	25	5.1	-		
		800-04-R			●	●		8.0	0.4	30	6.1	-		
Grooving · Turning		KGMLN 150-015-T						1.5	0.15	16	1.2	-		C14~19 C21
		200-02-T	●	●	●	●	●	2.0	0.2	20	1.7	-		
		250-02-T						2.5	0.2	20	2.0	-		
		300-02-T	●	●	●	●	●	3.0	0.2	20	2.3	-		
		300-04-T	●	●	●	●	●	3.0	0.4	20	2.3	-		
		400-04-T	●	●	●	●	●	4.0	0.4	20	3.3	-		
		400-08-T	●	●	●	●	●	4.0	0.8	20	3.3	-		
		500-04-T	●	●	●	●	●	5.0	0.4	25	4.1	-		
		500-08-T	●	●	●	●	●	5.0	0.8	25	4.1	-		
		600-04-T	●	●	●	●	●	6.0	0.4	25	5.1	-		
		600-08-T	●	●	●	●	●	6.0	0.8	25	5.1	-		
800-08-T	●	●		●		8.0	0.8	30	6.1	-				
Grooving · Turning		KRMN 200-C		●	●	●		2.0	1.0	20	1.7	-		C14~20
		300-C		●	●	●		3.0	1.5	20	2.2	-		
		400-C		●	●	●		4.0	2.0	20	3.2	-		
		500-C		●	●	●		5.0	2.5	25	4.0	-		
		600-C		●	●	●		6.0	3.0	25	5.0	-		
		800-C		●	●	●		8.0	4.0	30	6.0	-		
Grooving · Internal		KGMI 200-02-T				●		2.0	0.2	20	1.7	-		C21
		300-04-T				●		3.0	0.4	20	2.3	-		
		400-04-T				●		4.0	0.4	20	3.3	-		
Parting off (Left handed)		KGMR 200-6D-LP			●	●		2.0	0.2	20	1.7	6		C14 C16
		200-8D-LP			●	●		2.0	0.2	20	1.7	6		
		200-15D-LP			●	●		2.0	0.2	20	1.7	15		
		300-6D-LP			●	●		3.0	0.2	20	2.3	6		
		300-15D-LP			●	●		3.0	0.2	20	2.3	15		
		400-4D-LP			●	●		4.0	0.2	20	3.3	4		
		400-15D-LP			●	●		4.0	0.2	20	3.3	15		
		500-4D-LP						5.0	0.2	25	4.1	4		
Parting off (Right handed)		KGMR 200-6D-RP			●	●		2.0	0.2	20	1.7	6		C14 C16
		200-8D-RP			●	●		2.0	0.2	20	1.7	6		
		200-15D-RP			●	●		2.0	0.2	20	1.7	15		
		300-6D-RP			●	●		3.0	0.2	20	2.3	6		
		300-15D-RP			●	●		3.0	0.2	20	2.3	15		
		400-4D-RP			●	●		4.0	0.2	20	3.3	4		
		400-15D-RP			●	●		4.0	0.2	20	3.3	15		
		500-4D-RP						5.0	0.2	25	4.1	4		

• Chip breaker 'B': User self-grind type.

● : Stock item



Insert

Application	Picture	Designation	Coated					Dimensions (mm)					Picture	Page
			NC3220	NC5330	PC5300	PC9030	H01	b	r	l	d	α°		
Parting off (Left handed)		KGML 200-6D-LP						2.0	0.2	20	1.7	6		C14 C16
		200-15D-LP						2.0	0.2	20	1.7	15		
		300-6D-LP						3.0	0.2	20	2.3	6		
		300-15D-LP						3.0	0.2	20	2.3	15		
		400-4D-LP						4.0	0.2	20	3.3	4		
		400-15D-LP						4.0	0.2	20	3.3	15		
Parting off (Right handed)		KGML 200-6D-RP						2.0	0.2	20	1.7	6		C14 C16
		200-15D-RP						2.0	0.2	20	1.7	15		
		300-6D-RP						3.0	0.2	20	2.3	6		
		300-15D-RP						3.0	0.2	20	2.3	15		
		400-4D-RP						4.0	0.2	20	3.3	4		
		400-15D-RP						4.0	0.2	20	3.3	15		
Grooving (Ground insert)		KGGN 265-015-B						2.65	0.15	20	2.3	-		C14 C16 C17
		300-020-B						3.0	0.20	20	2.3	-		
		300-040-B						3.0	0.40	20	2.3	-		
		315-015-B						3.15	0.15	20	2.3	-		
		400-040-B						4.0	0.40	20	3.3	-		
		400-080-B						4.0	0.80	20	3.3	-		
		415-015-B						4.15	0.15	20	3.3	-		
		478-055-B						4.78	0.55	20	3.3	-		
		500-080-B						5.0	0.80	25	4.1	-		
		515-015-B						5.15	0.15	25	4.1	-		
		600-080-B						6.0	0.80	25	5.1	-		
		600-120-B						6.0	1.20	25	5.1	-		
800-080-B						8.0	0.80	30	6.1	-				
800-120-B						8.0	1.20	30	6.1	-				
Grooving - Parting off		KGGN 200-02-R						2.0	0.2	20	1.7	-		C14~19
		300-02-R						3.0	0.2	20	2.3	-		
		400-03-R						4.0	0.3	20	3.3	-		
		500-03-R						5.0	0.3	25	4.1	-		
		600-03-R						6.0	0.3	25	5.1	-		
		800-04-R						8.0	0.4	30	6.1	-		
Aluminum Grooving		KGGN 200-02-A					●	2.0	0.2	20	1.7	-		C14~19
		300-02-A					●	3.0	0.2	20	2.3	-		
		400-04-A					●	4.0	0.4	20	3.3	-		
		500-04-A					●	5.0	0.4	25	4.1	-		
		600-04-A					●	6.0	0.4	25	5.1	-		
Aluminum Profiling		KRGN 300-A					●	3.0	1.5	20	2.3	-		C14~18
		400-A					●	4.0	2.0	20	3.3	-		
		500-A					●	5.0	2.5	25	4.1	-		
		600-A					●	6.0	3.0	25	5.1	-		
		800-A					●	8.0	4.0	30	6.1	-		

• Chip breaker 'B' : User self-grind type.

● : Stock item






KGEHR/L

For Grooving, Turning, Parting off, Relieving machining



KGGN
KGMR/L
KRGN

KGMN
KRMN

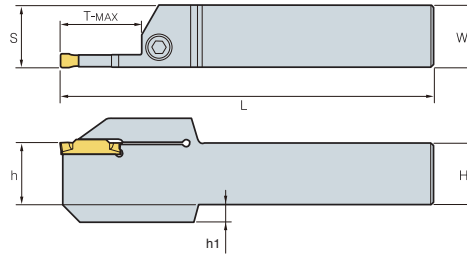

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	h1	T-MAX	Inserts	Screw	Wrench
	R	L									
KGEHR/L 1616-1.5-T14			16	16	100	16.2	-	14	KGMN150-□-□	MHA0512	HW40L
2020-1.5-T14			20	20	125	20.2	-	14			
2525-1.5-T14			25	25	150	25.2	-	14			
1212-2-T08			12	12	100	12.2	-	8	KGMN200-□-□ KGMR/L200-□-□ KRMN200-C KGGN200-□-□	MHA0512	HW40L
1616-2-T08	●	●	16	16	100	16.2	-	8			
2020-2-T08	●	●	20	20	125	20.2	-	8			
2525-2-T08	●	●	25	25	150	25.2	-	8			
1616-2-T12	●	●	16	16	100	16.2	-	12			
2020-2-T12	●	●	20	20	125	20.2	-	12			
2525-2-T12	●	●	25	25	150	25.2	-	12			
1616-2-T17	●	●	16	16	100	16.2	-	17			
2020-2-T17	●	●	20	20	125	20.2	-	17			
2525-2-T17	●	●	25	25	150	25.2	-	17			
1616-2.5-T17			16	16	100	16.3	-	17	KGMN250-□-□	MHA0512	HW40L
2020-2.5-T17			20	20	125	20.3	-	17			
2525-2.5-T17			25	25	150	25.3	-	17			
1616-3-T10	●	●	16	16	100	16.4	-	10	KGMN300-□-□ KGMR/L300-□-□ KRMN300-C KGGN300-□-□ KRGN300-□	MHA0512	HW40L
2020-3-T10	●	●	20	20	125	20.4	-	10			
2525-3-T10	●	●	25	25	150	25.4	-	10			
3232-3-T10			32	32	170	32.4	-	10			
1616-3-T13	●	●	16	16	100	16.4	-	13			
2020-3-T13	●	●	20	20	125	20.4	-	13			
2525-3-T13	●	●	25	25	150	25.4	-	13			
1616-3-T20	●	●	16	16	100	16.4	-	20			
2020-3-T20	●	●	20	20	125	20.4	-	20			
2525-3-T20	●	●	25	25	150	25.4	-	20			
3232-3-T20	●	●	32	32	170	32.4	-	20			
2525-3-T25	●	●	25	25	150	25.4	-	25	KGMN400-□-□ KGMR/L400-□-□ KRMN400-C KGGN400-□-□ KRGN400-□	BHA0616	HW50L
1616-4-T10	●	●	16	16	100	16.4	-	10			
2020-4-T10	●	●	20	20	125	20.4	-	10			
2525-4-T10	●	●	25	25	150	25.4	-	10			
3232-4-T10			32	32	150	32.4	-	10			
1616-4-T15	●	●	16	16	100	16.4	-	15			
2020-4-T15	●	●	20	20	125	20.4	-	15			
2525-4-T15	●	●	25	25	150	25.4	-	15			
1616-4-T20	●	●	16	16	100	16.4	-	20			
2020-4-T20	●	●	20	20	125	20.4	-	20			
2525-4-T20	●	●	25	25	150	25.4	-	20			
3232-4-T20	●	●	32	32	170	32.4	-	20			
1616-4-T25	●	●	16	16	100	16.4	-	25			
2020-4-T25	●	●	20	20	125	20.4	-	25			
2525-4-T25	●	●	25	25	150	25.4	-	25			

Applicable inserts C12-C13

● : Stock item






KGEHR/L

For Grooving, Turning, Parting off, Relieving machining



KGGN KGMN
KGMR/L KRMN
KRGV

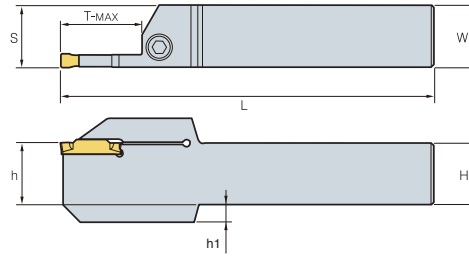

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	h1	T-MAX	Inserts	Screw	Wrench				
	R	L													
KGEHR/L	2020-5-T12	●	●	20	20	125	20.5	-	12	KGMN500-□-□ KRMN500-C KGGN500-□-□ KRGV500-□	BHA0616	HW50L			
	2525-5-T12	●	●	25	25	150	25.5	-	12						
	2020-5-T15			20	20	125	20.55	-	15						
	2525-5-T15			25	25	150	25.55	-	15						
	3232-5-T15			32	32	170	32.55	-	15						
	2020-5-T20	●	●	20	20	125	20.5	-	20						
	2525-5-T20	●	●	25	25	150	25.5	-	20						
	3232-5-T20	●		32	32	170	32.5	-	20						
	2525-5-T32	●	●	25	25	150	25.5	7	32				BHA0620	HW50L	
	2020-6-T12	●	●	20	20	125	20.5	-	12				KGMN600-□-□ KRMN600-C KGGN600-□-□ KRGV600-□	BHA0616	HW50L
	2525-6-T12	●	●	25	25	150	25.5	-	12						
	2525-6-T15			25	25	150	25.55	-	15						
	3232-6-T15			32	32	170	32.55	-	15						
	2020-6-T20	●	●	20	20	125	20.5	-	20						
	2525-6-T20	●	●	25	25	150	25.5	-	20						
	3232-6-T20	●		32	32	170	32.5	-	20						
	2525-6-T32	●		25	25	150	25.5	7	32	BHA0620	HW50L				
	2525-8-T16	●	●	25	25	150	26	-	16	KGMN800-□-□ KRMN800-C KGGN800-□-□ KRGV800-□	BHA0616	HW50L			
	3232-8-T16		●	32	32	170	33.05	-	16						
	2525-8-T25	●	●	25	25	150	26	-	25						
3232-8-T25	●		32	32	170	33	-	25							
2525-8-T36	●		25	25	150	26	7	36	BHA0620				HW50L		
3232-8-T36	●		32	32	170	33	-	36							

Applicable inserts C12-C13



● : Stock item

KGEHR/L-D00A (AUTO-TOOL)

For Grooving, Turning, Parting off machining



KGGN KGMN
KGMR/L KRMN
KRGN

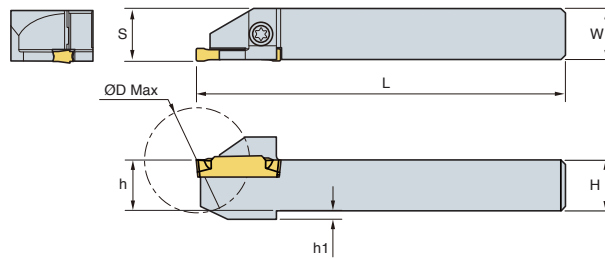

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	h1	ØD Max	Inserts	Screw	Wrench
	R	L									
KGEHR/L	1010-2-D20A	●		10	10	125	10.2	2	20	ETNA0412	TW15L
	1212-2-D25A	●		12	12	125	12.2	2	25		
	1414-2-D25A	●		14	14	125	14.2	-	25		
	1616-2-D32A	●		16	16	125	16.2	-	32		
	1212-3-D25A	●		12	12	125	12.4	2	25		
1616-3-D32A	●		16	16	125	16.4	-	32			

➔ Applicable inserts C12~C13



● : Stock item

KGEHR/L-T00

For Grooving, Turning, Face grooving machining



KGMN KRMN
KGGN KRGN

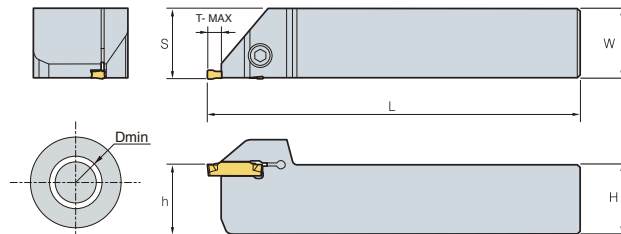

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	ØD Max	T-MAX	Inserts	Screw	Wrench
	R	L									
KGEHR/L	1616-3-T00			16	16	100	16.4	80	4.8	MHA0512	HW40L
	2020-3-T00			20	20	125	20.4	80	4.8		
	2525-3-T00	●	●	25	25	150	25.4	80	4.8		
	1616-4-T00	●		16	16	100	16.4	80	4.8	BHA0616	HW50L
	2020-4-T00	●		20	20	125	20.4	80	4.8		
	2525-4-T00	●	●	25	25	150	25.4	80	4.8		
	2020-6-T00	●		20	20	125	20.5	80	6.0	BHA0616	HW50L
	2525-6-T00	●		25	25	150	25.5	80	6.0		

➔ Applicable inserts C12~C13

● : Stock item



KGEVR/L-T00

For Grooving, Turning, Face grooving machining



KGMN
KGGN
KGRN

KRMN
KRCN

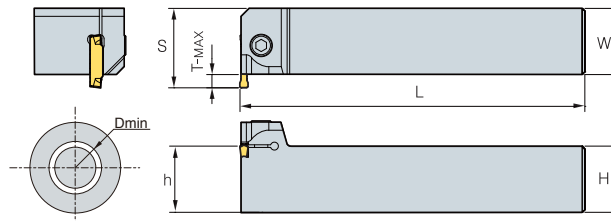


R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	ØD Max	T-MAX	Inserts	Screw	Wrench
	R	L									
KGEVR/L 2020-1.5 -T00			20	20	125	23.5	120	3	KGMN200-□-□ KRMN200-C KGGN200-□-□-□	MHA0512	HW40L
			25	25	150	28.5	120	3			
			32	32	170	35.5	120	3			
			20	20	125	23.5	120	3			
			25	25	150	28.5	120	3			
			32	32	170	35.5	120	3			
2020-2 -T00			20	20	125	24.5	80	4	KGMN250-□□	MHA0512	HW40L
			25	25	150	29.5	80	4			
			32	32	170	36.5	80	4			
2020-2.5 -T00			20	20	125	25	80	4.8	KGMN300-□-□ KRMN300-C KGGN300-□-□ KRCN300-□	MHA0512	HW40L
			25	25	150	30	80	4.8			
			32	32	170	37	80	4.8			
			20	20	125	25	80	4.8			
2020-3 -T00			25	25	150	30	80	4.8	KGMN400-□-□ KRMN400-C KGGN400-□-□ KRCN400-□	BHA0616	HW50L
			32	32	170	37	80	4.8			
			20	20	125	29.5	60	6			
2020-4 -T00			25	25	150	31.5	60	6	KGMN600-□-□ KRMN600-C KGGN600-□-□ KRCN600-□	BHA0616	HW50L
			32	32	170	38.5	60	6			
			20	20	125	26.5	60	6			
			25	25	150	31.5	80	6			
			32	32	170	38.5	60	6			
			25	25	150	33.5	50	8			
2020-5 -T00			32	32	170	38.5	50	8			


Applicable inserts C12-C13

● : Stock item


KGEUR/L



KRMN
KRGN

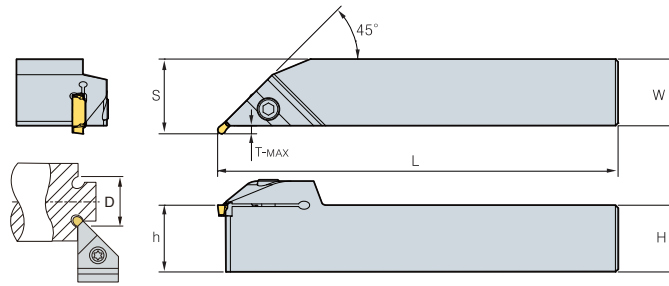

For Relieving machining



R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	ØD Max	T-MAX	Inserts	Screw	Wrench
	R	L									
KGEUR/L 1616-3	●		16	16	100	19	40	2.8	KRMN300-C KRGN300-□	MHA0512	HW40L
	●		20	20	125	23	40	2.8			
	●		25	25	150	28	40	2.8			
			32	32	170	35	40	2.8			
1616-4	●		16	16	100	19	40	2.8	KRMN400- KRGN400-□	BHA0616	HW50L
	●		20	20	125	23	40	2.8			
	●		25	25	150	28	40	2.8			
			32	32	170	35	40	2.8			
2020-5			20	20	125	23.5	50	3.3	KRMN500-C KRGN500-□	BHA0616	HW50L
			32	32	170	35.5	50	3.3			
2020-6			20	20	125	23.5	50	3.3	KRMN600-C KRGN600-□	BHA0616	HW50L
	●		25	25	150	28.5	50	3.3			
2525-8			25	25	150	28.5	65	3.3	KRMN800-C KRGN800-□	BHA0616	HW50L
			32	32	170	35.5	65	3.3			

➔ Applicable inserts C12-C13


● : Stock item

KGFVR/L




KGMN
KGGN

KRMN
KRGN

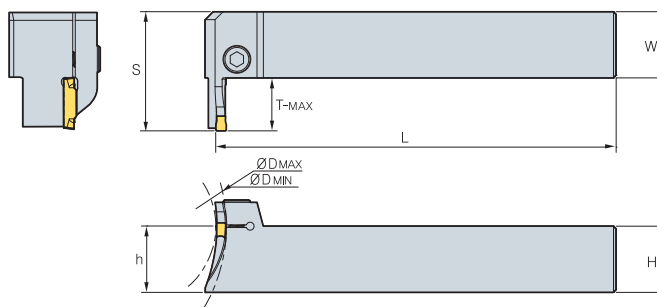

For Face grooving machining



R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	ØD		Inserts	Screw	Wrench
	R	L						Min	Max			
KGFVR/L 425-44/70-T20	●		25	25	150	45.5	20	44	70	KGMN400-□-□ KRMN400-C KGGN400-□-□ KRGN400-□	BHA0616	HW50L
	●		25	25	150	45.5	20	60	120			
	●		25	25	150	45.5	20	112	200			

➔ Applicable inserts C12-C13

● : Stock item





KGFHR/L

For Face grooving machining



KGMN KRMN
KGGN KRGN

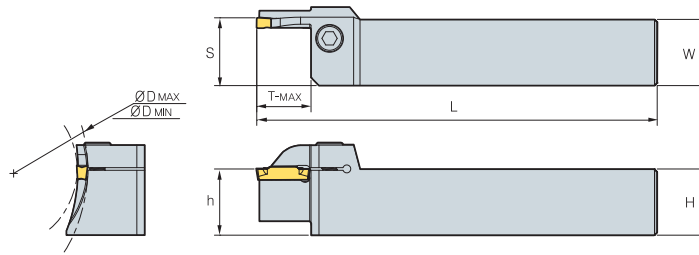

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	ØD		Inserts	Screw	Wrench
	R	L						Min	Max			
KGFHR/L 325-34/50-T10			25	25	150	25.5	10	34	50	KGMN300-□-□ KRMN300-C KGGN300-□-□ KRGN300-□	MHA0512	HW40L
	●		25	25	150	25.5	15	44	70			
			25	25	150	25.5	15	64	100			
425-40/60-T10			25	25	150	25.6	10	40	60	KGMN400-□-□ KRMN400-C KGGN400-□-□ KRGN400-□	BHA0616	HW50L
425-44/70-T20			25	25	150	25.6	20	44	70			
425-84/92-T20			25	25	150	25.6	20	84	92			
425-60/120-T20	●		25	25	150	25.6	20	60	120			
425-112/200-T20	●		25	25	150	25.6	20	112	200			
525-190/220-T10			25	25	150	25.6	10	190	200	KGMN500-□-□ KRMN500-C KGGN500-□-□ KRGN500-□	BHA0616	HW50L
625-170/190-T10			25	25	150	25.6	10	170	190			
625-190/220-T10			25	25	150	25.6	10	190	200			

↻ Applicable inserts C12-C13


● : Stock item

KGIUR/L

For Relieving machining



KRMN
KRGN

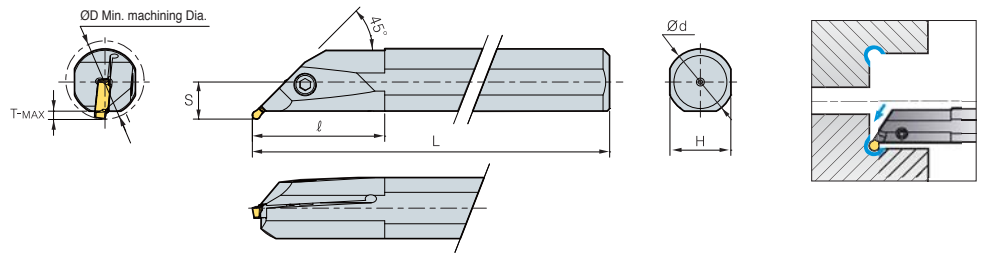

R type insert
(mm)

Designation	Stock		ØD	Ød	L	l	T-MAX	H	S	Inserts	Screw	Wrench
	R	L										
KGIUR/L 3520-3			35	20	150	45	3.5	18	13	KRMN300-C KRGN300-□	MHA0512	HW40L
4025-3	●		40	25	200	50	3.5	23	15.5			
5032-3			50	32	250	65	3.5	30	19			
3520-4			35	20	150	45	3.5	18	13	KRMN400-C KRGN400-□	MHA0512	HW40L
4025-4			40	25	200	50	3.5	23	15.5			
5032-4			50	32	250	65	3.5	30	19			
4025-5			40	25	200	50	3.5	23	15.5	KRMN500-C KRGN500-□	MHA0512	HW40L
5032-5			50	32	250	65	3.5	30	19			
4025-6			40	25	200	50	3.5	23	15.5	KRMN600-C KRGN600-□	MHA0512	HW40L
5032-6			50	32	250	65	3.5	30	19			
4025-8			40	25	200	50	3.5	23	18.5	KRMN800-C KRGN800-□	MHA0512	HW40L
5032-8			50	32	250	65	3.5	30	22			

➔ Applicable inserts C12~C13


● : Stock item

KGIVR/L

For Grooving, Turning, Profiling machining



KGMI
KGMN

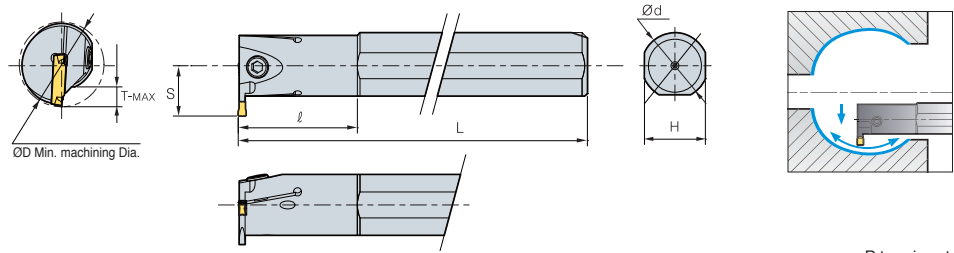

R type insert
(mm)

Designation	Stock		ØD	Ød	L	l	T-MAX	H	S	Inserts	Screw	Wrench
	R	L										
KGIVR/L 2016-1.5			20	16	125	35	4	15	12	KGMN150-□-□	MHB0410	HW20L
			25	20	150	45	6	18	15.5		MHB0410	HW20L
KGIVR/L 3225-1.5			32	25	200	45	7	23	19	KGM200-□-□	MHA0512	HW40L
KGIVR/L 2516-2			25	16	125	35	6.5	15	14		MHB0410	HW20L
KGIVR/L 2520-2			25	20	150	45	6.5	18	15.5		MHA0512	HW30L
KGIVR/L 3225-2			32	25	200	45	7	23	19	KGMN250-□-□	MHB0410	HW40L
KGIVR/L 2516-2.5			25	16	125	35	6.5	15	14		MHB0410	HW20L
KGIVR/L 2520-2.5			25	20	150	45	6.5	18	15.5	KGMN300-□-□	MHA0512	HW40L
KGIVR/L 3225-2.5			32	25	200	45	7	23	19		MHB0410	HW20L
KGIVR/L 2520-3			25	20	150	45	6.5	18	15.5	KGMN400-□-□	MHB0410	HW30L
KGIVR/L 3225-3			32	25	200	45	7	23	19		MHA0512	HW40L
KGIVR/L 4032-3			40	32	250	55	7.5	30	22.5		BHA0616	HW50L
KGIVR/L 2520-4			25	20	150	45	6.5	18	15.5	KGMN600-□-□	MHB0410	HW30L
KGIVR/L 3225-4			32	25	200	45	7	23	19		MHA0512	HW40L
KGIVR/L 4032-4			40	32	250	55	7.5	30	22.5		BHA0616	HW50L
KGIVR/L 3225-5			32	25	200	45	7.5	23	19.5	KGMN600-□-□	MHA0512	HW40L
KGIVR/L 4032-5			40	32	250	55	8.5	30	23.5		BHA0616	HW50L
KGIVR/L 3225-6			32	25	200	45	7.5	23	19.5	KGMN600-□-□	MHA0512	HW40L
KGIVR/L 4032-6			40	32	250	55	8.5	30	23.5		BHA0616	HW50L
KGIVR/L 4032-8			40	32	250	55	8.5	30	23.5	BHA0616	HW50L	
KGIVR/L 4540-8			45	40	300	70	8.5	37	26.5	BHA0616	HW50L	

➡ Applicable inserts C12-C13


• External insert : Min. machining Dia(ØD) is over 50mm.

● : Stock item

KGT Blade for Parting off

Features

- ▶ Parting application with the use of existing KGT inserts
- ▶ Economical machining with a double sided insert
- ▶ Specially designed slot for strong and stable clamping
- ▶ Easy change of insert with the use of exclusive wrench

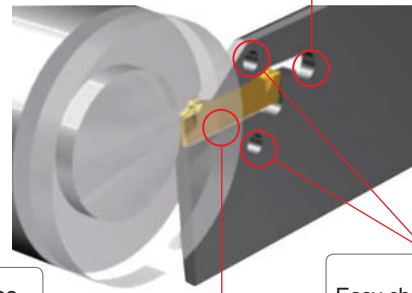


Specially designed slot
- Strong clamping and durability

Wide clamping area
- Better stability

Easy change of insert

Code system

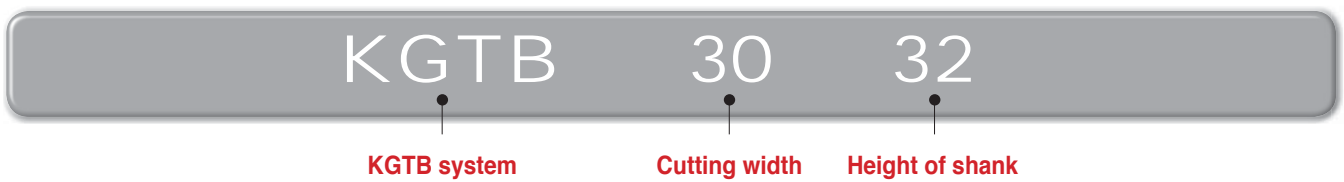


How to clamp insert



① Insert the pin of wrench into the hole of blade.



② Clamp the insert on its seat after turning the handle to 45°~160° for loosening the seat.

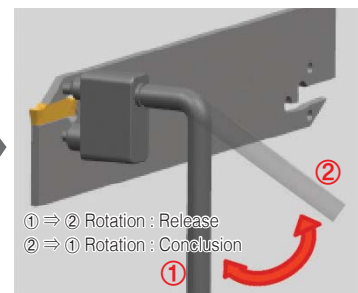

③ Finish clamp by removing the wrench after moving it back to its original state.

KGTB

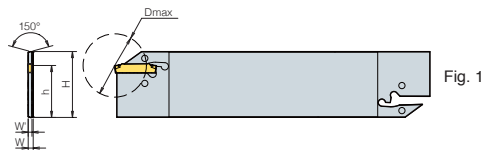


Fig. 1

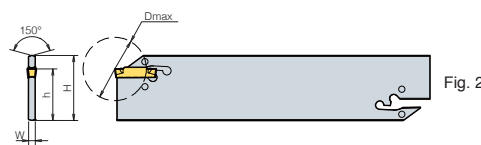


Fig. 2

① ⇒ ② Rotation : Release
② ⇒ ① Rotation : Conclusion

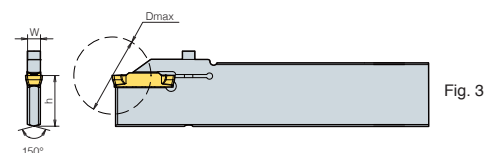


Fig. 3

(mm)

Designation	Stock	H	W	W'	L	h	Dmax	Inserts	Wrench	Fig.
KGTB 1532		32	2.4	1.0	150	25	26	KG□□150-□-□	EW1203 (Separately ordered)	1
2032	●	32	2.4	1.8	150	25	39	KG□□200-□-□		
3032	●	32	2.4	-	150	25	39	KG□□300-□-□		2
4032	●	32	3.2	-	150	25	39	KG□□400-□-□		
5032	●	32	4.0	-	150	25	49	KG□□500-□-□		
6032	●	32	5.2	-	150	25	49	KG□□600-□-□		
8032 ⁽¹⁾	●	32	6.2	-	150	25	59	KG□□800-□-□	HW30L	3


↻ Applicable inserts C14~C15

(1)Screw clamping ● : Stock item

Inserts are offered with two edges, for better economical machining

MGT Series

- Inserts are offered with two edges, for better economical machining
- Multi function operations - Reduce cycle time & increase productivity with the ability to groove, turn, face or copy in an application.
- Shorten time & save on tool cost - Korloy's MGT system allows a machinist to apply one tool against many applications, reducing the number of tools
- Flat Cutting Edge - MGT tools have a flat geometry on its cutting edge to ensure excellent surface finishes. Even in high Feed applications by using a wiper function, Korloy ensures excellent surface finishes in roughing operations.

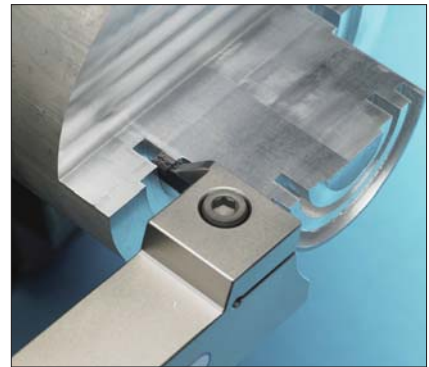

▶ Geometry of chip breaker

MGM(G)N-M  <ul style="list-style-type: none"> • Specially designed chip breaker allows a smoother chip flow versus conventional flat-top geometries through the use of a central chip breaker • Specially placed convex dots assists with chip control in external machining, for a smoother chip flow. • Chip breaker designed for turning & grooving applications 	MGMN-G  <ul style="list-style-type: none"> • Specially designed chip breaker allows narrower chips to promote better chip flow • Specifically designed for grooving applications 	MRMN-M  <ul style="list-style-type: none"> • Full radius geometry for applications that require profiling • Available for relief machining 	MFMN300  <ul style="list-style-type: none"> • Specially designed chip breaker allows narrower chips to promote better chip flow • Chip breaker specially designed for face-grooving
MRGN-A  <ul style="list-style-type: none"> • Specially designed high positive geometry, ideal for machining aluminum • The chip breaker's super buffed, high rake angle allows optimal chip flow of aluminum 	MGMR-PS  <ul style="list-style-type: none"> • Sharply designed cutting edge. • Recommended in machining low carbon steel and stainless steel • Specially designed chip breaker allows narrower chips to promote better chip flow. • Able to machine Feed rates and small diameter cutting 	MGMR-PT  <ul style="list-style-type: none"> • Stronger cutting edge with a negative land for tougher applications • Able to machine at Feed rates as high and bar stock • Chip breaker design helps narrows chips for better flow 	MGMN-A  <ul style="list-style-type: none"> • Smooth chip flow • Reduced build up on cutting edge
MGMN-L  <ul style="list-style-type: none"> • Sharp cutting edge • Low cutting resistance • For auto CNC machine • For small Dia. processing 	MGMN-R  <ul style="list-style-type: none"> • Strong cutting edge • For high Feed rate recessing 	MGMN-T  <ul style="list-style-type: none"> • For turning & grooving • Reduced chipwidth & smooth chip control by dot designed on the top corner 	

▶ Parting off (MGMN / MGMR / L)

Workpiece	Cutting Speed(vc=m/min)											Feed(fn=mm/rev)				
	CVD					PVD					Uncoated	Cutting width (mm)				
	NC3120	NC3030	NCM325	NC5330	NC500H	PC230	PC8110	PC5300	PC3500	PC6510		A30	2	3	4	5
SM□□C	80~180			80~180		80~180						0.02~0.15	0.03~0.2	0.08~0.3	0.10~0.4	0.12~0.5
SCM	70~150	70~150	70~150	70~150	70~150	70~150			70~150			0.02~0.15	0.03~0.2	0.08~0.3	0.10~0.4	0.12~0.5
GC/GCD				50~100						50~100	50~100	0.05~0.12	0.1~0.25	0.1~0.30	0.1~0.35	0.1~0.40
STS			50~120	50~120			50~120	60~140				0.02~0.1	0.03~0.15	0.08~0.25	0.1~0.35	0.12~0.40
Non-ferrous metal(Al, Copper)											200~450	0.05~0.1	0.05~0.2	0.05~0.25	0.05~0.30	0.05~0.35

▶ Facing (FGD / FGM / FMM / MFMN / MGMN)















Workpiece	Cutting Speed(vc=m/min)								Feed(fn=mm/rev)				
	CVD				PVD				Uncoated	Cutting width (mm)			
	NC6110	NC3030	NC5330	NC3120	PC3500	PC215K	PC8110 / PC5300	H01		3	4	5	
SM□□C			100~160	100~160							0.05~0.1	0.05~0.12	0.05~0.15
SCM		50~130	50~130	50~130	50~130				200~800		0.05~0.1	0.05~0.12	0.05~0.15
GC/GCD	120~150		120~150			120~150					0.05~0.1	0.05~0.12	0.05~0.15
STS			60~150				60~150				0.05~0.1	0.05~0.12	0.05~0.15
Non-ferrous metal(Al, Copper)											0.05~0.15	0.08~0.15	0.08~0.15

▶ Grooving, Turning (MGMN / MRMN)

Workpiece	Cutting Speed(vc=m/min)											Feed(fn=mm/rev)						
	CVD				PVD				Cermet		Uncoated		Cutting width (mm)					
	NC3010	NC3120	NC3030	NC5330	PC215K	PC5300	PC230	PC3500	CN20	CT10	A30	ST20E	0.5~1.0	1.0~2.0	2~3	3~4	4~5	6~8
SM□□C	80~200	80~200		80~200		80~180	80~200		80~120	80~120		80~120	0.03~0.08	0.04~0.09	0.05~0.1	0.05~0.12	0.05~0.15	0.05~0.2
SCM	80~180	80~180	80~180	80~180		80~160	80~180	80~180	80~120			80~120	0.03~0.07	0.04~0.08	0.05~0.08	0.05~0.1	0.05~0.12	0.05~0.15
GC/GCD				60~130		60~130							0.03~0.07	0.04~0.08	0.05~0.08	0.05~0.1	0.05~0.10	0.05~0.12
STS				60~100	60~100							60~100	0.03~0.08	0.04~0.09	0.05~0.10	0.05~0.12	0.05~0.12	0.05~0.15
Non-ferrous metal(Al, Copper)					150~300							150~400	0.05~0.12	0.05~0.15	0.05~0.15	0.08~0.15	0.08~0.15	0.10~0.20





















Insert

Application	Picture	Designation	Cemmet											Uncoated					Dimensions (mm)	Picture	Page				
			CN20	NC3010	NC3030	NC3120	NC3220	NC5330	NC6210	NC9025	PC215K	PC5300	PC8110	PC9030	H01	b	r	l				d	t		
Face Grooving	FGD 	FGD 300R-03		●														3.0	0.3	15.0	2.0	4.0		C32 C33	
		400R-04		●						●									4.0	0.4	15.0	3.0			4.5
		500R-04		●						●									5.0	0.4	15.0	4.0			5.0
	FGM 	FGM 300R-03																	3.0	0.3	15.0	2.0	4.0		C32 C33
		400R-04																	4.0	0.4	15.0	3.0	4.5		
		500R-04																	5.0	0.4	15.0	4.0	5.0		
	FMM 	FMM 300R-03			●														3.0	0.3	15.0	2.0	3.91		C32 C33
		400R-04			●														4.0	0.4	15.0	3.0	3.96		
		500R-04			●														5.0	0.4	15.0	4.0	4.42		
Face Grooving	MFMN 	MFMN 300						●										3.0	0.2	18.0	2.0	3.0		C31 C36	
Grooving · Turning	MGGN-M 	MGGN 300-02-M	●															3.0	0.2	21.0	2.35	4.8		C26 C28 C30 C36	
		300-04-M	●																3.0	0.4	21.0	2.35			4.8
		300-08-M																	3.0	0.8	21.0	2.35			4.8
		400-02-M	●																4.0	0.2	21.0	3.3			4.8
		400-04-M	●																4.0	0.4	21.0	3.3			4.8
		400-08-M																	4.0	0.8	21.0	3.3			4.8
		500-02-M																	5.0	0.2	26.0	4.1			5.8
		500-04-M	●																5.0	0.4	26.0	4.1			5.8
		500-08-M																	5.0	0.8	26.0	4.1			5.8
Grooving	MGMN-G 	MGMN 150-G		●	●													1.5	0.15	16.0	1.2	3.5		C26 C28 C30 C36	
		200-G		●	●	●													2.0	0.2	16.0	1.6			3.5
		250-G		●	●	●													2.5	0.2	18.5	2.0			3.85
		300-G		●	●	●	●		●										3.0	0.4	21.0	2.35			4.8
		400-G		●	●					●									4.0	0.4	21.0	3.3			4.8
		500-G																	5.0	0.8	26.0	4.1			5.8
Grooving · Turning	MGMN-M 	MGMN 200-M		●	●	●	●											2.0	0.2	16.0	1.2	3.5		C26 C28 C30 C36	
		250-M		●	●	●													2.5	0.2	18.5	2.0			3.85
		300-02-M						●											3.0	0.2	21.0	2.35			4.8
		300-M		●	●	●	●		●		●	●							3.0	0.4	21.0	2.35			4.8
		350-03-M																	3.5	0.3	21.0	2.9			4.8
		400-02-M																	4.0	0.2	21.0	3.3			4.8
		400-M		●	●	●	●	●		●	●								4.0	0.4	21.0	3.3			4.8
		500-04-M		●															5.0	0.4	26.0	4.1			5.8
		500-M		●	●	●	●	●											5.0	0.8	26.0	4.1			5.8
600-M		●	●	●	●	●											6.0	0.8	26.0	5.0	5.8				
800-M		●				●											8.0	0.8	31.0	6.0	6.5				

● : Stock item



Insert



Application	Picture	Designation	Coated							Uncoated		Dimensions (mm)						Picture	Page		
			NC3030	NC3120	NC3220	PC8110	PC9030	PC3525	PC5300	PC6510	PC230	NC5330	H01	G10E	b	r	l			d	t
Grooving		MGMN 200-02-L											2.0	0.2	16	1.60	3.5	-		C26	
		300-02-L						●					3.0	0.2	21	2.35	4.8	-		C28	
		400-02-L						●					4.0	0.2	21	3.3	4.8	-		C30	
		200-04-L											2.0	0.4	20	1.7	3.5	-		C31	
		300-04-L											3.0	0.4	20	2.3	4.0	-			
		400-04-L											4.0	0.4	20	3.3	4.0	-			
		500-04-L							●					5.0	0.4	26	4.1	5.8		-	
Grooving · Parting off		MGMN 200-02-R											2.0	0.2	16	1.60	3.5	-		C26	
		300-02-R	●					●					3.0	0.2	21	2.35	4.8	-		C28	
		400-02-R	●					●					4.0	0.2	21	3.3	4.8	-		C30	
		200-04-R											2.0	0.4	20	1.7	3.5	-		C31	
		300-04-R											3.0	0.4	20	2.3	4.0	-			
		400-04-R											4.0	0.4	20	3.3	4.0	-			
		500-04-R	●						●					5.0	0.4	26	4.1	5.8		-	
Grooving · Turning		MGMN 200-T											2.0	0.2	16	1.60	3.5	-		C26	
		300-T	●					●					3.0	0.4	21	2.35	4.8	-		C28	
		400-T	●					●					4.0	0.4	21	3.3	4.8	-		C30	
		500-T	●					●					5.0	0.8	26	4.1	5.8	-		C31	
Grooving		MGGN 300-02-A											3.0	0.2	21	2.35	4.8	-		C26	
		300-04-A											3.0	0.4	21	2.35	4.8	-		C28	
		300-08-A											3.0	0.8	21	2.35	4.8	-		C30	
		400-02-A											4.0	0.2	21	3.3	4.8	-		C36	
		400-04-A											4.0	0.4	21	3.3	4.8	-			
		400-08-A											4.0	0.8	21	3.3	4.8	-			
		500-02-A											5.0	0.2	26	4.1	5.8	-			
		500-04-A											5.0	0.4	26	4.1	5.8	-			
500-08-A											5.0	0.8	26	4.1	5.8	-					
Parting off		MGMR/L 300-6D-PS											3.0	0.2	21	2.35	4.8	6		C26	
		300-8D-PS											3.0	0.2	21	2.35	4.8	8		C28	
		300-15D-PS											3.0	0.2	21	2.35	4.8	15			
		400-4D-PS											4.0	0.3	21	3.3	4.8	4			
		500-4D-PS											5.0	0.3	26	4.1	5.8	4			
Parting off		MGMR/L 200-6D-PT											2.0	0.2	16	1.6	3.6	6		C26	
		300-6D-PT									●		3.0	0.2	21	2.35	4.8	6		C28	
		300-8D-PT			●								3.0	0.2	21	2.35	4.8	8			
		300-15D-PT											3.0	0.2	21	2.35	4.8	15			
		400-4D-PT											4.0	0.3	21	3.3	4.8	4			
500-4D-PT											5.0	0.3	26	4.1	5.8	4					
Aluminum		MRGN 400-A									●		4.0	2.0	21.0	3.3	4.8	-		C26	
		500-A											5.0	2.5	26.0	4.1	5.8	-		C27	
																				C29	
		MRGN 600-A										●		6.0	3.0	26.0	5.0	5.8	-		C26
		800-A									●		8.0	4.0	31.0	6.0	6.5	-	C27		
																			C29		
																		C30			
Relieving Profiling		MRMN 200-M	●	●	●								2.0	1.0	16.0	1.50	3.5	-		C26	
		300-M	●	●	●	●	●			●			3.0	1.5	21.0	2.35	4.8	-		~30	
		400-M	●	●	●					●	●		4.0	2.0	21.0	3.3	4.8	-		C36	
		500-M	●	●						●			5.0	2.5	26.0	4.1	5.8	-			
		600-M	●	●							●		6.0	3.0	26.0	5.0	5.8	-			
		800-M	●	●							●		8.0	4.0	31.0	6.0	6.5	-			

● : Stock item



MGEHR/L

For Grooving, Turning, Parting off, Relieving, Profiling machining

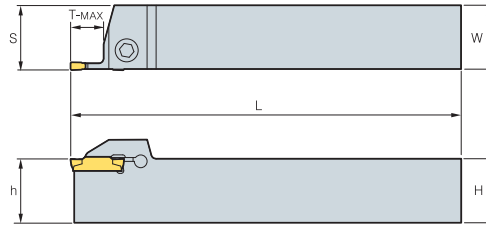

MGMN
MGGN
MRGN

MGMR
MRMN

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	Inserts	Screw	Wrench
	R	L								
MGEHR/L 1616-1.5	●	●	16	16	100	16.2	14	MGMN150-G	LTX0514	TW20L
2020-1.5	●	●	20	20	125	20.2	14			
2525-1.5	●	●	25	25	150	25.2	14			
1212-2	●		12	12	100	14.25	14	MGMN200-G MGMN200-M MGMR200-□□-□□	MHA0512	HW40L
1616-2	●	●	16	16	100	16.25	14			
2020-2	●	●	20	20	125	20.25	14			
2525-2	●	●	25	25	150	25.25	14			
1616-2.5		●	16	16	100	16.30	16	MGMN250-G MGMN250-M	MHA0512	HW40L
2020-2.5	●	●	20	20	125	20.30	16			
2525-2.5	●	●	25	25	150	25.30	16			
1616-3	●	●	16	16	100	16.35	18	MGMN300-M/T MGGN300-□□-M MRMN300-M MGMR300-□□-□□ MGMN300-□□-L/R	BHA0616	HW50L
2020-3	●	●	20	20	125	20.4	18			
2020-3-T10	●		20	20	125	20.4	10			
2525-3	●	●	25	25	150	25.4	18			
2525-3-T10	●	●	25	25	150	25.4	10			
3232-3	●	●	32	32	170	32.4	18			
3232-3-T10			32	32	170	32.4	10			
2020-4	●	●	20	20	125	20.4	18			
2020-4-T10	●		20	20	125	20.4	10			
2525-4	●	●	25	25	150	25.4	18			
2525-4-T10	●	●	25	25	150	25.4	10			
3232-4	●	●	32	32	170	32.4	18	MGMN400-M/T MGGN400-□□-M MRMN400-M MGMR400-□□-□□ MGMN400-□□-L/R	BHA0616	HW50L
3232-4-T10			32	32	170	32.4	10			
2020-5	●	●	20	20	150	20.5	23			
2020-5-T15			20	20	150	20.5	15			
2525-5	●	●	25	25	150	25.5	23	MGMN500-M/T MGGN500-□□-M MRMN500-M MGMR500-□□-□□ MGMN500-□□-L/R	BHA0616	HW50L
2525-5-T15			25	25	150	25.5	15			
3232-5	●	●	32	32	170	32.5	23			
3232-5-T15			32	32	170	32.5	15			
2020-6	●	●	20	20	125	20.6	23	MGMN600-M MGGN600-□□-M MRMN600-M	BHA0616	HW50L
2020-6-T15			20	20	125	20.6	15			
2525-6	●	●	25	25	150	25.6	23			
2525-6-T15			25	25	150	25.6	15			
3232-6	●	●	32	32	170	32.6	23			
3232-6-T15			32	32	170	32.6	15	MRMN800-M MGMN800-M	BHA0616	HW50L
2525-8	●	●	25	25	150	26.1	28			
2525-8-T15	●		25	25	150	26.1	15			
3232-8	●	●	32	32	170	33.1	28			
3232-8-T15			32	32	170	33.1	16	MRGN600-A	BHA0616	HW50L
2525-6A	●		25	25	150	25.6	23			
2525-6A-T15			25	25	150	25.6	15			
3232-6A			32	32	170	32.6	23			
3232-6A-T15			32	32	170	32.6	15			
2525-8A	●	●	25	25	150	26.1	28			
2525-8A-T15		●	25	25	150	26.1	16			
3232-8A			32	32	170	33.1	28	MRGN800-A	BHA0616	HW50L
3232-8A-T15			32	32	170	33.1	15			

Applicable inserts C24~C25

● : Stock item





MGEUR/L



For Relieving, Profiling machining

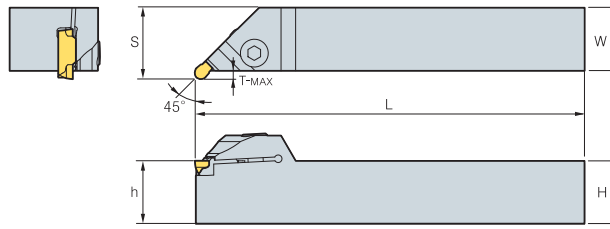


MRMN
MRGN



R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	Inserts	Screw 	Wrench 
	R	L								
MGEUR/L 2020-3	●		20	20	125	23	3	MRMN300-M	BHA0616	HW50L
2525-3	●		25	25	150	28	3			
3232-3			32	32	170	35	3			
2020-4			20	20	125	23	3	MRMN400-M		
2525-4	●		25	25	150	28	3			
3232-4			32	32	170	35	3			
2020-5			20	20	125	24	4	MRMN500-M		
2525-5	●	●	25	25	150	29	4			
3232-5			32	32	170	36	4			
2020-6			20	20	125	24	4	MRMN600-M		
2525-6	●		25	25	150	29	4			
3232-6		●	32	32	170	36	4			
2525-8			25	25	150	30	5	MRMN800-M		
3232-8			32	32	170	37	5			
2525-6A			25	25	150	29	4	MRGN600-A		
3232-6A			32	32	170	36	4			
2525-8A			25	25	150	30	5	MRGN800-A		
3232-8A			32	32	170	37	5			



 Applicable inserts C24~C25

● : Stock item



MGEVR/L

For Grooving, Turning, Profiling machining

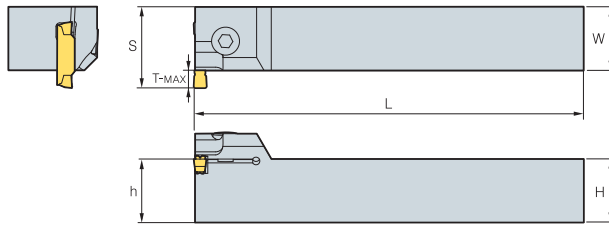

MGMN MGGN
MRMN MRGN

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	Min. machining Dia. (ØD)	Inserts	Screw	Wrench
	R	L									
MGEVR/L 2020-1.5	●		20	20	125	23	3	85	MGMN150-G	LTX0514	TW20L
			25	25	150	28	3	85			
			32	32	170	35	3	85			
2020-2	●		20	20	125	23.5	3.5	65	MGMN200-M MGMN200-G		
			25	25	150	28.5	3.5	65			
			32	32	170	35.5	3.5	65			
2020-2.5			20	20	125	24	4	65	MGMN250-M MGMN250-G		
			25	25	150	29	4	65			
			32	32	170	36	4	65			
2020-3	●	●	20	20	125	25.5	5	75	MGMN300-M/T MGGN300-□□-M MRMN300-M MGMN300-□□-L/R		
	●	●	25	25	150	30.5	5	75			
			32	32	170	37.5	5	75			
2020-4	●		20	20	125	25.5	5	70	MGMN400-M/T MGGN400-□□-M MRMN400-M MGMN400-□□-L/R	BHA0616	HW50L
	●		25	25	150	30.5	5	70			
			32	32	170	37.5	5	70			
2020-5			20	20	125	27	7	75	MGMN500-M/T MGGN500-□□-M MRMN500-M MGMN500-□□-L/R		
			25	25	150	32	7	75			
			32	32	170	39	7	75			
2020-6			20	20	125	27	7	70	MGMN600-M MGGN600□□-M MRMN600-M		
			25	25	150	32	7	70			
			32	32	170	39	7	70			
2525-8			25	25	150	34	9	50	MRMN800-M MGMN800-M		
			32	32	170	41	9	50			
2525-6A			25	25	150	32	7	70	MRGN600-A		
			32	32	170	39	7	70			
2525-8A			25	25	150	34	9	45	MRGN800-A		
			32	32	170	41	9	45			

↻ Applicable inserts C24~C25


● : Stock item

MGIUR/L

For Relieving, Profiling machining



MRMN
MRGN

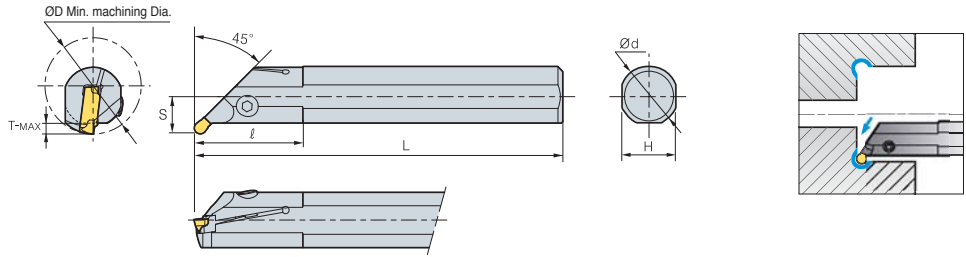

R type insert
(mm)



Designation	Stock		ØD	Ød	L	ℓ	T-MAX	H	S	Inserts	Screw	Wrench
	R	L										
MGIUR/L 3520-3			35	20	150	45	3.5	18	13	MRMN300-M	MHA0512	HW40L
4025-3	●		40	25	200	45	3.5	23	15.5			
5032-3			50	32	250	65	3.5	30	19			
3520-4			35	20	150	45	3.5	18	13	MRMN400-M	MHA0512	HW40L
4025-4	●		40	25	200	45	3.5	23	15.5			
5032-4	●		50	32	250	65	3.5	30	19			
4025-5			40	25	200	45	3.5	23	15.5	MRMN500-M	BHA0616 BHA0620	
5032-5	●		50	32	250	65	3.5	30	19			
4025-6			40	25	200	45	3.5	23	19	MRMN600-M	BHA0616 BHA0620	
5032-6	●		50	32	250	65	3.5	30	19			
4025-8			40	25	200	45	6.5	23	15.5	MRMN800-M	BHA0616 BHA0620	HW50L
5032-8	●		50	32	250	65	6.5	30	19			
4025-6A			40	25	200	45	3.5	23	15.5	MRGN600-A	BHA0616 BHA0620	
5032-6A			50	32	250	65	3.5	30	19			
4025-8A			40	25	200	45	5.0	23	18.5	MRGN800-A	BHA0616 BHA0620	
5032-8A			50	32	250	65	6.5	30	22			

➔ Applicable inserts C24~C25

● : Stock item

MGIVR/L

For Grooving, Turning, Profiling machining

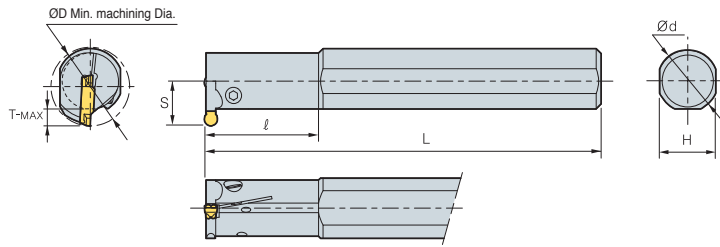

MGMN MRMN
MGGN MRGN

R type insert
(mm)

Designation	Stock		ØD	Ød	L	l	T-MAX	H	S	Inserts	Screw	Wrench
	R	L										
MGIVR/L 2016-1.5			20	16	125	35	3.5	15	11.3	MGMN150-G	MHB0310	HW25L
			25	20	150	45	3.5	18	13.1		MHA0512	HW40L
2925-1.5			29	25	200	45	3.5	23	16.2	MGMN200-G MGMN200-M MRMN200-M	MHB0310	HW25L
2016-2	●	●	20	16	125	35	4.5	15	12.4		MHA0512	HW40L
2520-2	●	●	25	20	150	45	4.5	18	14.0		MHB0310	HW25L
2925-2	●	●	29	25	200	45	4.5	23	17.2	MHA0512	HW40L	
2016-2.5	●		20	16	125	35	4.5	15	12.5	MGMN250-G MGMN250-M	MHB0310	HW25L
2520-2.5			25	20	150	45	4.5	18	15.1		MHA0512	HW40L
2925-2.5			29	25	200	45	4.5	23	18.2			
2520-3	●	●	25	20	150	45	5	18	15.6	MGMN300-M/G/T MGGN300-□□-M MRMN300-M MGMN300-□□-L/R	MHA0512	HW40L
3125-3	●	●	31	25	200	45	6	23	18.9			
3732-3	●	●	37	32	250	65	6	30	21.5			
2520-4	●		25	20	150	45	6	18	15.6			
3125-4	●		31	25	200	45	6	23	18.9	MGMN400-M/G/T MGGN400-□□-M MRMN400-M MGMN400-□□-L/R	MHA0512	HW40L
3732-4	●		37	32	250	65	6	30	21.5			
3125-5	●		31	25	200	45	8	23	19.4			
3732-5	●		37	32	250	65	8	30	21.5	MGMN500-M/G/T MGGN500-□□-M MRMN500-M MGMN500-□□-L/R	BHA0616	HW50L
3125-6	●	●	31	25	200	45	8	23	19.4		BHA0620	
3732-6	●		37	32	250	65	8	30	21.5	MGMN600-MG MGGN600-□□-M MRMN600-M	BHA0616	HW50L
3732-8	●		37	32	250	65	10	30	23.4		BHA0620	
4540-8	●		45	40	300	70	10	37	27.2	MRMN800-M MGMN800-M	BHA0620	HW50L
3125-6A			31	25	200	45	8	23	19.4	MRGN600-A	BHA0616	HW50L
3732-6A			37	32	250	65	8	30	21.5		BHA0620	
3732-8A			37	32	250	65	10	30	23.4	MRGN800-A	BHA0616	HW50L
4540-8A			45	40	300	70	10	37	27.2		BHA0620	

Applicable inserts C24-C25

● : Stock item





MGFHR/L

For Face Grooving machining



MFMN
MGMN

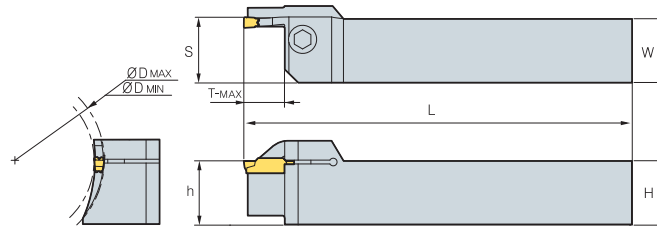

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	ØD		Inserts	Screw	Wrench	
	R	L						Min	Max				
MGFHR/L	325-24/35-T10	●		25	25	150	25.6	10	24	35	MFMN300	BHA0616	HW50L
	325-29/40-T10	●		25	25	150	25.6	10	29	40			
	325-34/50-T10	●		25	25	150	25.6	10	34	50			
	325-44/70-T10	●		25	25	150	25.6	10	44	70			
	325-64/99-T10	●		25	25	150	25.6	10	64	99			
	425-62/120-T15			25	25	150	25.6	15	62	120			
425-112/200-T15	●		25	25	150	25.6	15	112	200	MGMN400-M/T MGMN400-□□-L/R			

➔ Applicable inserts C24~C25



● : Stock item

MGFVR/L

For Face Grooving machining



MFMN
MGMN

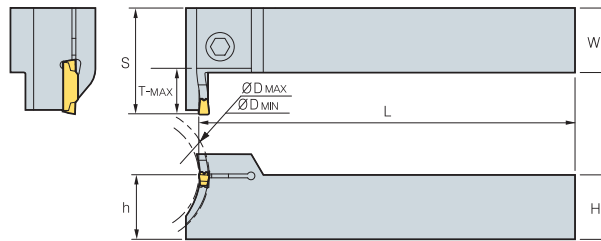

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	ØD		Inserts	Screw	Wrench	
	R	L						Min	Max				
MGFVR/L	325-24/35-T10	●		25	25	150	36	10	24	35	MFMN300	MHA0512	HW40L
	325-29/40-T10	●		25	25	150	36	10	29	40			
	325-34/50-T10	●		25	25	150	36	10	34	50			
	325-44/70-T10	●		25	25	150	36	10	44	70			
	325-64/99-T10	●		25	25	150	36	10	64	99			
	425-44/60-T15	●		25	25	150	41	15	44	60			
	425-60/120-T15	●		25	25	150	41	15	60	120			
	425-112/200-T15	●		25	25	150	41	15	112	200	MGMN400-M/T MGMN400-□□-L/R	BHA0616	HW50L


➔ Applicable inserts C24~C25

● : Stock item



C MGT Holder (Face Grooving)

FGHH

For Face Grooving, Turning machining



• FGHH

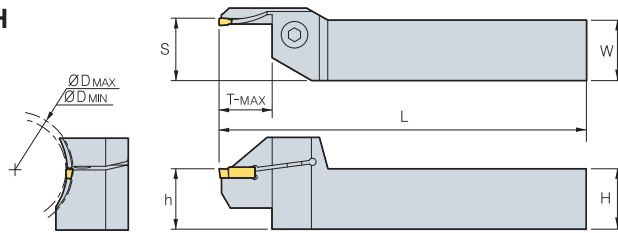

FGD FGM FMM

R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	ØD		Inserts	Screw	Wrench	
	R	L						Min	Max				
FGHH	320R -25/30	●		20	20	125	20.6	12	25	30	FMM300R-03		
	30/35	●		20	20	125	20.6	12	30	35			
	35/48	●		20	20	125	20.6	12	35	48			
	48/60			20	20	125	20.6	22	48	60			FGD300R-03 FGM300R-03
	60/75			20	20	125	20.6	22	60	75			
	75/100			20	20	125	20.6	22	75	100			
	100/140			20	20	125	20.6	22	100	140			
325R -25/30	30/35	●		25	25	150	25.6	12	30	35	FMM300R-03		
	35/48	●		25	25	150	25.6	12	35	48			
	48/60	●		25	25	150	25.6	22	48	60			
	60/75	●		25	25	150	25.6	22	60	75			FGD300R-03 FGM300R-03
	75/100	●		25	25	150	25.6	22	75	100			
	100/140	●		25	25	150	25.6	22	100	140			
	420R -25/30	●		20	20	125	20.6	12	25	30			
30/35	●		20	20	125	20.6	12	30	35				
35/48	●		20	20	125	20.6	12	35	48				
48/60			20	20	125	20.6	25	48	60	FGD400R-04 FGM400R-04			
60/75			20	20	125	20.6	25	60	75				
75/100			20	20	125	20.6	25	75	100				
100/140			20	20	125	20.6	25	100	140				
425R -25/30	30/35	●		25	25	150	25.6	12	30	35	FMM400R-04	BHA0616	
	35/48	●		25	25	150	25.6	12	35	48			
	48/60	●		25	25	150	25.6	25	48	60			
	60/75	●		25	25	150	25.6	25	60	75			FGD400R-04 FGM400R-04
	75/100	●		25	25	150	25.6	25	75	100			
	100/140	●		25	25	150	25.6	25	100	140			
	520R -25/30	30/35	●		20	20	125	20.6	12	30			
35/40				20	20	125	20.6	20	35	40			
40/48				20	20	125	20.6	20	40	48			
48/60				20	20	125	20.6	25	48	60	FGD500R-04 FGM500R-04		
60/75				20	20	125	20.6	25	60	75			
75/100				20	20	125	20.6	25	75	100			
100/140				20	20	125	20.6	25	100	140			
525R -25/30	30/35			25	25	150	25.6	12	30	35	FMM500R-04		
	35/40	●		25	25	150	25.6	20	35	40			
	40/48			25	25	150	25.6	20	40	48			
	48/60	●		25	25	150	25.6	25	48	60			FGD500R-04 FGM500R-04
	60/75	●		25	25	150	25.6	25	60	75			
	75/100			25	25	150	25.6	25	75	100			
	100/140	●		25	25	150	25.6	25	100	140			

➔ Applicable inserts C24-C25

● : Stock item



C


Multi functional Tools

FGVH




FGD FGM FMM

• FGVH

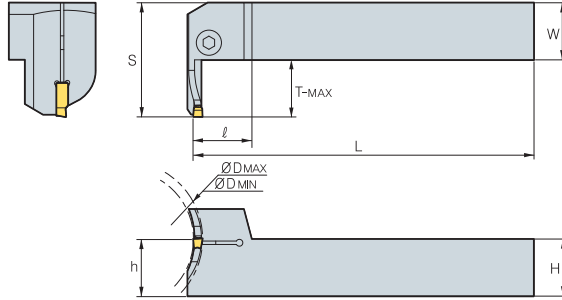

For Face Grooving, Turning machining



R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	ØD		Inserts	Screw	Wrench
	R	L						Min	Max			
FGVH 320R -25/30	•		20	20	125	20.6	12	25	30	FMM300R-03		
	•		20	20	125	20.6	12	30	35			
	•		20	20	125	20.6	12	35	48			
			20	20	125	20.6	22	48	60			
			20	20	125	20.6	22	60	75			
			20	20	125	20.6	22	75	100			
			20	20	125	20.6	22	100	140			
325R -25/30	•		25	25	150	25.6	12	25	30	FMM300R-03		
	•		25	25	150	25.6	12	30	35			
	•		25	25	150	25.6	12	35	48			
	•		25	25	150	25.6	22	48	60			
	•		25	25	150	25.6	22	60	75			
	•		25	25	150	25.6	22	75	100			
	•		25	25	150	25.6	22	100	140			
420R -25/30	•		20	20	125	20.6	12	25	30	FMM400R-04		
	•		20	20	125	20.6	12	30	35			
	•		20	20	125	20.6	12	35	48			
			20	20	125	20.6	25	48	60			
			20	20	125	20.6	25	60	75			
			20	20	125	20.6	25	75	100			
			20	20	125	20.6	25	100	140			
425R -25/30	•		25	25	150	25.6	12	25	30	FMM400R-04	BHA0616	HW50L
			25	25	150	25.6	12	30	35			
			25	25	150	25.6	12	35	48			
	•		25	25	150	25.6	25	48	60			
	•		25	25	150	25.6	25	60	75			
	•		25	25	150	25.6	25	75	100			
	•		25	25	150	25.6	25	100	140			
520R -25/30			20	20	125	20.6	12	25	30	FMM500R-04		
			20	20	125	20.6	12	30	35			
			20	20	125	20.6	20	35	40			
			20	20	125	20.6	20	40	48			
			20	20	125	20.6	25	48	60			
			20	20	125	20.6	25	60	75			
			20	20	125	20.6	25	75	100			
525R -25/30			25	25	150	25.6	12	25	30	FMM500R-04		
			25	25	150	25.6	12	30	35			
	•		25	25	150	25.6	20	35	40			
			25	25	150	25.6	20	40	48			
	•		25	25	150	25.6	25	48	60			
	•		25	25	150	25.6	25	60	75			
	•		25	25	150	25.6	25	75	100			
525R -25/30	•		25	25	150	25.6	25	100	140	FGD500R-04 FGM500R-04		
	•		25	25	150	25.6	25	100	140			

↻ Applicable inserts C24~C25

• : Stock item




MGT Cartridge

System Figure


- ▶ Compatible and Economical due to divided cartridge & exclusive holder system from existing single body system
- ▶ Interchangeable cartridge
 - Various assembly depends on working style
 - Reduce cutting tool costs by over 30%
 - Setting with upper clamp & side screw
- ▶ Strong & Stable setting force
 - Simultaneous assembly of insert & cartridge
 - Easy assembly & tool exchange
- ▶ Stable assembly system
 - Simple & Superior setting force

Stable Assembly thanks to double screw & clamp

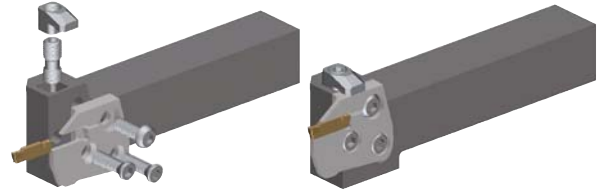


Simple & Strong Setting


Holder Code System

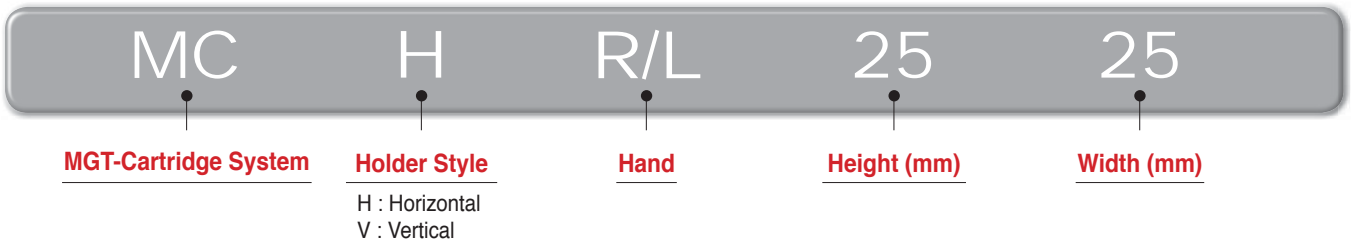

Holder

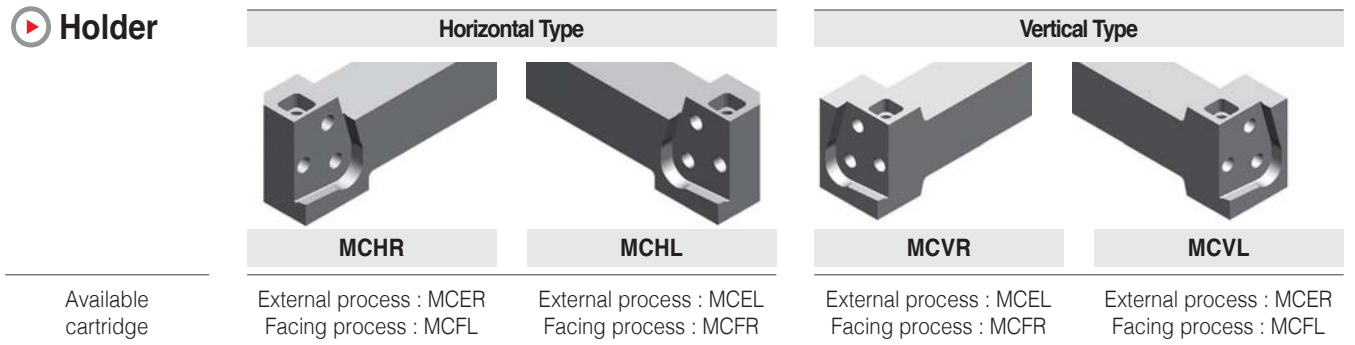

Cartridge Code System

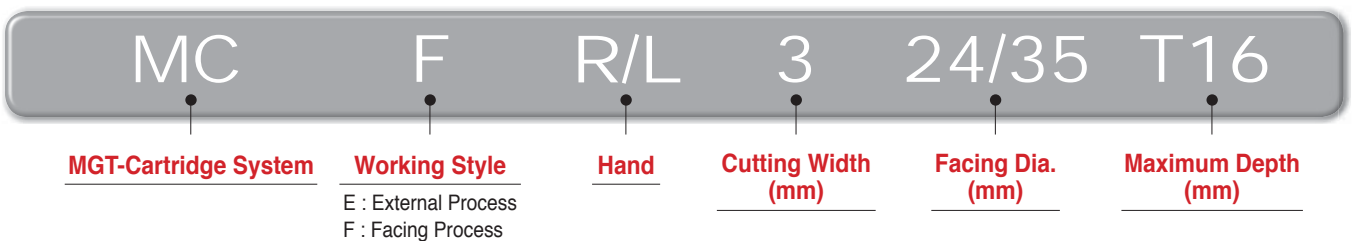

Cartridge





MCHR/L

(Holder)



MCER/L
MCFR/L

For Grooving, Turning, Parting off, Relieving, Profiling machining

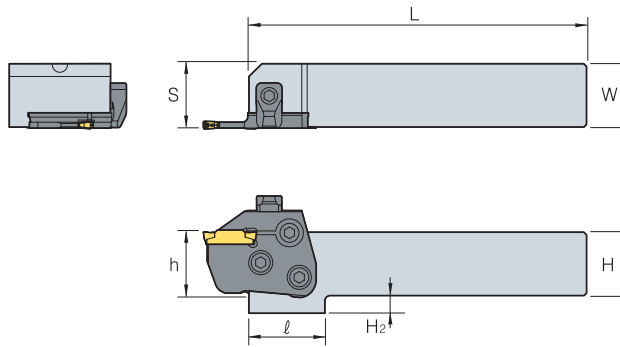

R type insert

(mm)

Designation	Stock		H=(h)	W	L	S	l	H ₂	Cartridge	Clamp	Clamp Screw	Hinge Screw	Clamping Screw	Wrench
	R	L												
MCHR/L	2020	●	20	20	133	20.7	30	12	MCER/L MCFR/L					
	2525	●	25	25	133	25.7	30	7						
	3232	●	32	32	153	32.7	-	-						

➔ Applicable inserts C36

● : Stock item



MCVR/L

(Holder)



MCER/L
MCFR/L

For Face Grooving, Turning machining

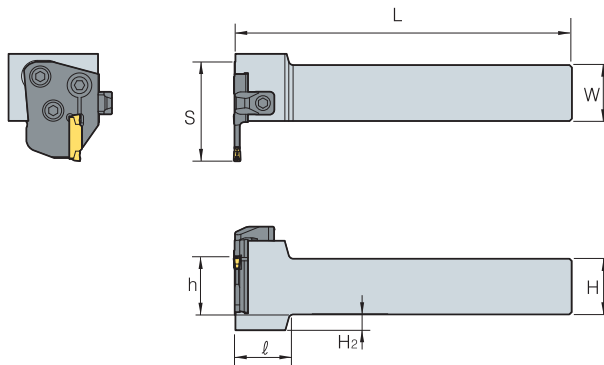

R type insert

(mm)

Designation	Stock		H=(h)	W	L	S	l	H ₂	Cartridge	Clamp	Clamp Screw	Hinge Screw	Clamping Screw	Wrench
	R	L												
MCVR/L	2020	●	20	20	150	38	30	12	MCER/L MCFR/L					
	2525	●	25	25	150	43	30	7						
	3232	●	32	32	170	50	-	-						

➔ Applicable inserts C36




● : Stock item

MCER/L (Cartridge)

For Grooving, Turning, Parting off, Relieving, Profiling machining



MGMN MGMR
MGGN MRMN



R type insert
(mm)

Designation	Stock		T	L1	S1	T-MAX	Inserts		Holder	
	R	L					Width	Designation		
MCER/L	3-T16	●	●	6.00	44.5	6.35	16	3	MGMN	MCVR/L MCHR/L
	4-T16	●	●	5.97	44.5	6.35	16	4	MGMR/L	
	5-T20	●	●	5.87	48.5	6.35	20	5	MGGN	
	6-T20			5.82	48.5	6.35	20	6	MRMN	

↻ Applicable inserts C24, C25




● : Stock item

MCFR/L (Cartridge)

For Face Grooving, Turning machining



MFNM
MGMN



R type insert
(mm)

Designation	Stock		T	L1	S1	T-MAX	Inserts		Holder	
	R	L					Width	Designation		
MCFR/L	3-24/35-T16			8.00	44.5	6.35	16	3	MFNM300	MCVR/L MCHR/L
	3-29/40-T16			8.00	44.5	6.35	16	3		
	3-34/50-T16			8.00	44.5	6.35	16	3		
	3-44/70-T16			8.00	44.5	6.35	16	3		
	3-64/99-T16			8.00	44.5	6.35	16	3		
	4-44/60-T16			7.97	44.5	6.35	16	4	MGMN400	
	4-60/120-T16			7.97	44.5	6.35	16	4		
	4-112/200-T16			7.97	44.5	6.35	16	4		

↻ Applicable inserts C24, C25

● : Stock item





MGT - Machining Al Wheels

- Features**
- ▶ Optimally designed inserts for aluminum wheel machining
 - ▶ Longer tool life when matched with the best grade for application
 - ▶ Unique clamping mechanism places a strong clamp over the insert
 - ▶ A variety of insert types for multi application functions




Various insert types


MRGN type : Full "Round" geometry

MRGN-A(For general)	MRGN-A5(For copying)	MRGN-AM(Medium finishing)	MRGN-AP(PCD)	MVGN-A(For fine finishing)
				
High rake angle, Sharp cutting edge	Reinforced clamping force	For ductile cast iron	Improved chip control	High rake and relief angle

New clamping system

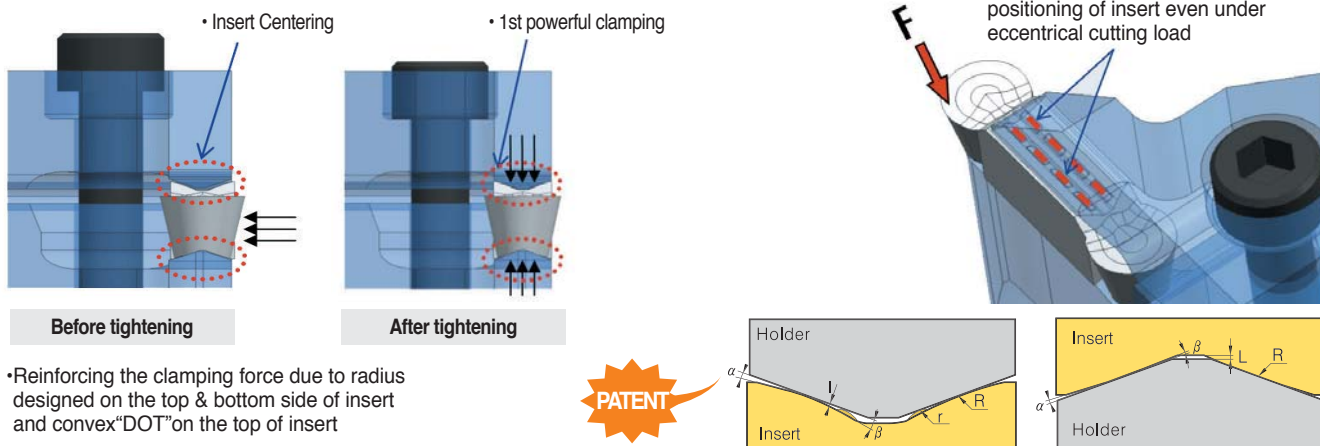

Application of Al Wheels

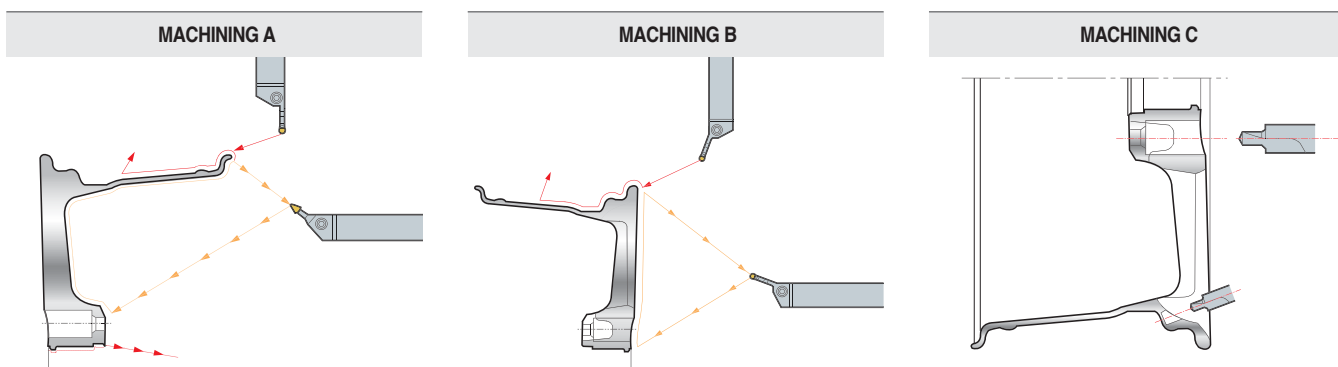





Recommended cutting condition

Workpiece		Hardness Brinell (HB)	kc (MPa)	vc (m/min)	fn (mm/rev)
Aluminum alloy (Forged)	Unhardened	50 ~ 70	500 ~ 600	1,000 ~ 2,500	0.1 ~ 0.6
	Hardened	90 ~ 110	700 ~ 900	300 ~ 1,000	0.1 ~ 0.5
Aluminum alloy (Cast)	Unhardened	70 ~ 80	700 ~ 800	300 ~ 1,000	0.1 ~ 0.5
	Hardened	80 ~ 110	800 ~ 950	200 ~ 600	0.1 ~ 0.4
Copper alloy		90 ~ 110	700 ~ 900	300 ~ 800	0.1 ~ 0.5
Magnesium alloy		70 ~ 80	700 ~ 800	300 ~ 1,000	0.1 ~ 0.5



C Available Insert for MGT Aluminum Wheel

Inserts

Application	Picture	Designation	Coated	Uncoated	Dimensions (mm)					Configuration	Page		
			DP150	G10E	b	r	l	d	t				
For Aluminum Wheel		MVGN	8N-A-R1.2		●	-	1.2	30.0	6.0	6.9		C40	
			8N-A-R1.6			-	1.6	30.0	6.0	6.9			
		MRGN	6N-A		●	6.0	3.0	26.0	5.0	5.9		C39 C40	
			6N-AM			6.0	3.0	26.0	5.0	5.9			
			6N-AP			6.0	3.0	26.0	5.0	5.9			
			6N-A5		●	6.0	3.0	26.0	5.0	5.9			
			8N-A			8.0	4.0	30.0	6.0	6.5			
			8N-AM			8.0	4.0	30.0	6.0	6.5			
			8N-AP			8.0	4.0	30.0	6.0	6.5			
			8N-A5		●	8.0	4.0	30.0	6.0	6.5			



● : Stock item



MGEHR/L



MRGN

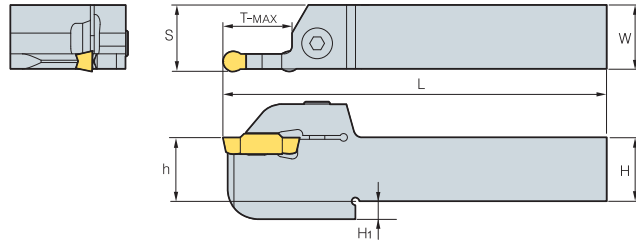

R type insert (mm)

Designation	Stock		H=(h)	H ₁	W	L	S	T-MAX	Inserts	Screw	Wrench
	R	L									
MGEHR/L 25N-6A	●		25	7	25	150	25.55	23.5	MRGN6N-A MRGN6N-AP MRGN6N-AM	BHA0620	HW50L
32N-6A			32	8	32	150	32.55	27			
25N-6A5	●		25	7	25	150	25.55	23.5	MRGN6N-A5		
32N-6A5			32	8	32	150	32.55	27			
25N-8A	●		25	7	25	150	25.55	23.5	MRGN8N-A MRGN8N-AP MRGN8N-AM		
32N-8A			32	8	32	150	32.55	27			
25N-8A5			25	7	25	150	25.55	23.5	MRGN8N-A5		
32N-8A5			32	8	32	150	32.55	27			



➔ Applicable inserts C38

● : Stock item

MGEHR/L-15



MRGN

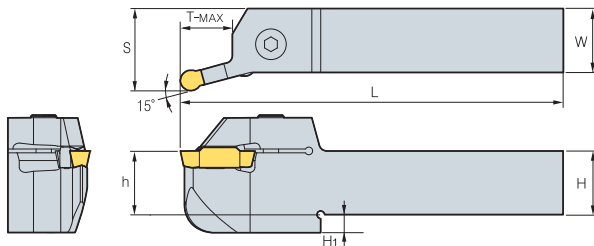

R type insert (mm)

Designation	Stock		H=(h)	H ₁	W	L	S	T-MAX	Inserts	Screw	Wrench
	R	L									
MGEHR/L 25N-6A-15	●		25	7	25	150	32.2	20	MRGN6N-A MRGN6N-AP MRGN6N-AM	BHA0620	HW50L
32N-6A-15			32	8	32	150	39.2	25			
25N-6A5-15	●		25	7	25	150	32.2	20	MRGN6N-A5		
32N-6A5-15			32	8	32	150	39.2	25			
25N-8A-15			25	7	25	150	32.2	20	MRGN8N-A MRGN8N-AP MRGN8N-AM		
32N-8A-15			32	8	32	150	39.2	25			
25N-8A5-15			25	7	25	150	32.2	20	MRGN8N-A5		
32N-8A5-15			32	8	32	150	39.2	25			



➔ Applicable inserts C38

● : Stock item

MGIUR/L-MR



MRGN

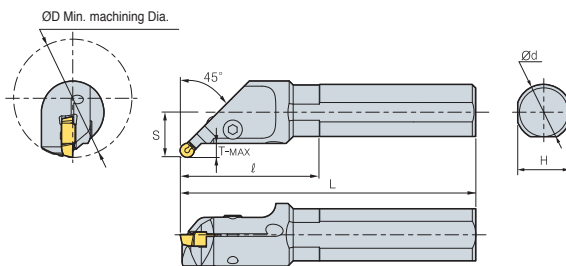

R type insert (mm)

Designation	Stock		ØD	Ød	L	ℓ	T-MAX	H	S	Inserts	Screw	Wrench
	R	L										
MGIUR/L 6832-8A-MR	●		68	32	170	65	7	30	26	MRGN8N-A/AM/AP MRGN8N-A5	BHA0620	HW50L
6832-8A5-MR	●		68	32	170	65	7	30	26			

➔ Applicable inserts C38



● : Stock item



MGIXR/L-MR



MRGN

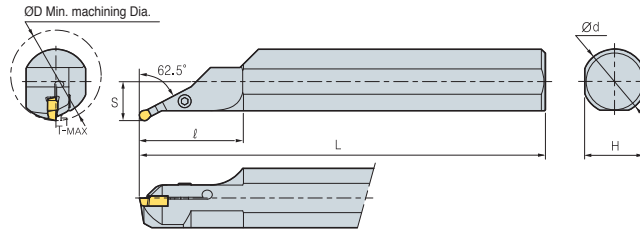


R type insert
(mm)

Designation	Stock		ØD	Ød	L	ℓ	T-MAX	H	S	Inserts	Screw	Wrench
	R	L										
MGIXR/L 7050-8A-MR	●		70	50	350	80	5.5	46	30.2	MRGN8N-A/AM/AP MRGN8N-A5	BHA0620	HW50L
			70	50	350	80	5.5	46	30.2			



➔ Applicable inserts C38

● : Stock item

MGEXR/L



MVGN

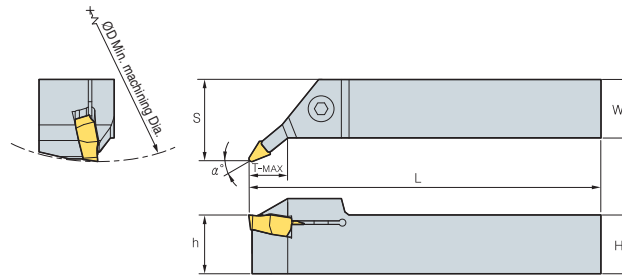


R type insert
(mm)

Designation	Stock		H=(h)	W	L	S	T-MAX	α°	Inserts	Screw	Wrench
	R	L									
MGEXR/L 25N-8A-5V	●		25	25	150	29	23.5	5	MVGN8N-A-R1.2 MVGN8N-A-R1.6	BHA0620	HW50L
			25	25	150	35	27	22.5			



➔ Applicable inserts C38

● : Stock item

MGIUR/L-MV



MVGN

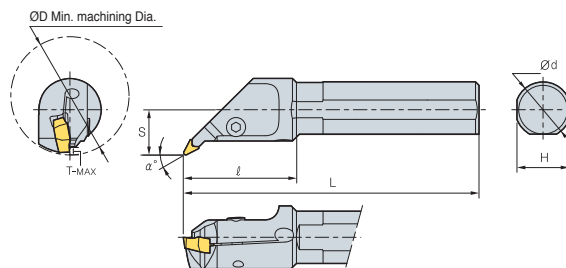

R type insert
(mm)

Designation	Stock		ØD	Ød	L	ℓ	T-MAX	H	S	α°	Inserts	Screw	Wrench
	R	L											
MGIUR/L 6832-8A-MV			68	32	170	65	4.5	30	26	27.5	MVGN8N-A-R1.2 MVGN8N-A-R1.6	BHA0620	HW50L

➔ Applicable inserts C38


● : Stock item

For deep hole grooving/parting off

Saw-man

Features of parting insert

- ▶ Possible to machine a wide range of workpieces such as steel, cast iron, stainless steel, etc.
- ▶ Extended tool life due to low resistance rake angle
- ▶ Minimized burr due to minimal Nose R
- ▶ Various lead angle available
- ▶ Narrow chip curl due to dots on rake surface of insert

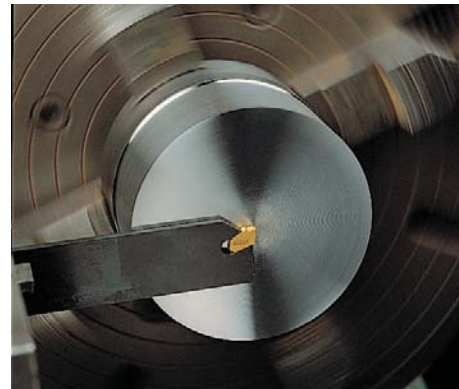

Workpiece	Cutting Speed(vc=m/min)										Feed(fn=mm/rev)					
	CVD					PVD					Uncoated	Cutting width (mm)				
	NC3120	NC3030	NCM325	NC5330	NC500H	PC230	PC8110	PC5300	PC3500	PC6510		A30	2	3	4	5
SM□□C	80~180			80~180		80~180						0.02~0.15	0.03~0.2	0.08~0.3	0.10~0.4	0.12~0.5
SCM	70~150	70~150	70~150	70~150	70~150	70~150			70~150			0.02~0.15	0.03~0.2	0.08~0.3	0.10~0.4	0.12~0.5
GC/GCD				50~100						50~100	50~100	0.05~0.12	0.1~0.25	0.1~0.30	0.1~0.35	0.1~0.40
STS			50~120	50~120				50~120	60~140			0.02~0.1	0.03~0.15	0.08~0.25	0.1~0.35	0.12~0.40
Non-ferrous metal (AL, Copper)											200~450	0.05~0.1	0.05~0.2	0.05~0.25	0.05~0.30	0.05~0.35

Inserts

Application	Picture	Designation	Coated											Un-coated A30	Dimensions (mm)			Configuration		
			NC3120	NC3220	NC3030	NCM325	NC5330	NC9020	PC3500	NC500H	PC8110	PC5300	PC9030		PC6510	W	l		r	
																			W	l
Parting tools		SP 160														1.6	7.8	0.16	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>R type</p> </div> <div style="text-align: center;"> <p>Standard</p> </div> </div> <div style="margin-top: 10px;"> <p>L type</p> <p style="text-align: center;">W = ±0.1</p> </div>	
		SP 180														1.8	9.3	0.16		
		SP 200		●	●	●	●					●	●	●		2.2	9.3	0.2		
		SP 200R		●	●									●		2.2	9.3	0.2		
		SP 200L												●		2.2	9.3	0.2		
		SP 300		●	●	●	●	●	●				●	●	●	●	3.1	11.3		0.2
		SP 300R		●	●	●							●			3.1	11.3	0.2		
		SP 300L			●											3.1	11.3	0.2		
		SP 400		●	●	●	●	●					●	●	●	●	4.1	11.3		0.25
		SP 400R		●	●								●			4.1	11.3	0.25		
		SP 400L			●											4.1	11.3	0.25		
		SP 500		●	●	●	●					●	●	●	●	5.1	11.4	0.3		
		SP 500R														5.1	11.4	0.3		
		SP 500L														5.1	11.4	0.3		
		SP 600		●	●		●							●	●	6.4	11.4	0.35		
		SP 600R														6.4	11.4	0.35		
SP 600L														6.4	11.4	0.35				


● : Stock item

SMBB

(Block)



SPB□□□(-S)
KGTB□□32

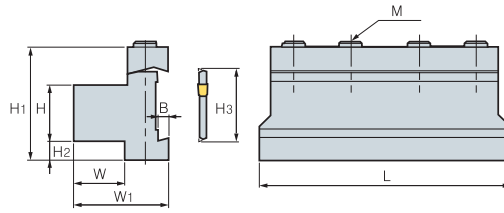

(mm)

Designation		Stock	H	W	H3	L	H1	H2	W1	B	M	Blades	Wrench
SMBB	1626		16	12	26	86	43	13	30	5.3	3-M6	SPB□26(-S) SPB□32(-S) KGTB□□32	HW50L
	2026	●	20	19	26	86	43	9	38	5.3	3-M6		
	2032	●	20	19	32	100	50	13	38	5.3	4-M6		
	2526	●	25	23	26	86	43	4	42	5.3	4-M6		
	2532	●	25	23	32	110	50	8	42	5.3	4-M6		
	3232	●	32	30	32	110	54	5	48	5.3	4-M6		

➔ Applicable inserts C41

● : Stock item

SPB/SPB-S

(Blades)



SP




Fig. 1







Fig. 2



(mm)

Designation	Stock	H	W	L	h	Inserts	Wrench		Fig.		
											
SPB	226	●	26	1.6	110	21	SP200, 200R/L	SW50L	-	1	
	326	●	26	2.4	110	21					SP300, 300R/L
	426	●	26	3.2	110	21					SP400, 400R/L
	526	●	26	4.0	110	21					SP500, 500R/L
	626		26	5.2	110	21					SP600, 600R/L
	232	●	32	1.6	150	25					SP200, 200R/L
	332	●	32	2.4	150	25					SP300, 300R/L
	432	●	32	3.2	150	25					SP400, 400R/L
	532	●	32	4.0	150	25					SP500, 500R/L
	632	●	32	5.2	150	25					SP600, 600R/L
SPB	226-S	●	26	1.6	110	21	SP200, 200R/L	-	SW15S	2	
	326-S	●	26	2.4	110	21					SP300, 300R/L
	426-S	●	26	3.2	110	21					SP400, 400R/L
	526-S		26	4.0	110	21					SP500, 500R/L
	626-S		26	5.2	110	21					SP600, 600R/L
	232-S	●	32	1.6	150	25					SP200, 200R/L
	332-S	●	32	2.4	150	25					SP300, 300R/L
	432-S	●	32	3.2	150	25					SP400, 400R/L
	532-S	●	32	4.0	150	25					SP500, 500R/L
	632-S	●	32	5.2	150	25					SP600, 600R/L


➔ Applicable inserts C41

● : Stock item



SPH/SPH-S

(Holder)



SP


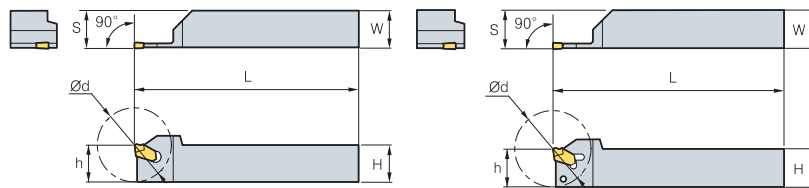


Fig. 1

Fig. 2



R type insert
(mm)

Designation	Stock		H=(h)	W	L	Ød	S	Inserts	Wrench		Fig.	
	R	L										
SPH	316R/L		16	16	100	32	16.3	SP300, 300R/L	SW50L	-	1	
	320R/L	●	●	20	20	120	40	20.3				SP300, 300R/L
	420R/L			20	20	120	50	20.4				SP400, 400R/L
	520R/L			20	20	120	60	20.5				SP500, 500R/L
	325R/L	●		25	25	150	50	25.3				SP300, 300R/L
	425R/L	●	●	25	25	150	60	25.4				SP400, 400R/L
	525R/L	●		25	25	150	70	25.5				SP500, 500R/L
SPH	316R/L-S	●		16	16	100	32	16.3	SP300, 300R/L	-	SW15S	2
	320R/L-S	●		20	20	120	40	20.3	SP300, 300R/L			
	420R/L-S			20	20	120	50	20.4	SP400, 400R/L			
	520R/L-S			20	20	120	60	20.5	SP500, 500R/L			
	325R/L-S	●		25	25	150	50	25.3	SP300, 300R/L			
	425R/L-S			25	25	150	60	25.4	SP400, 400R/L			
	525R/L-S	●		25	25	150	70	25.5	SP500, 500R/L			

Applicable inserts C41


● : Stock item

C Technical Information for TB-M/TB

Economical 3-corner insert for high precision grooving


TB-M/TB

- Economical 3-corner insert for grooving
- Various cutting edge size ranging from 1.25~4.5mm
- High accuracy ground insert ensures high precision machining
- Stable chip control optimized for automated grooving process

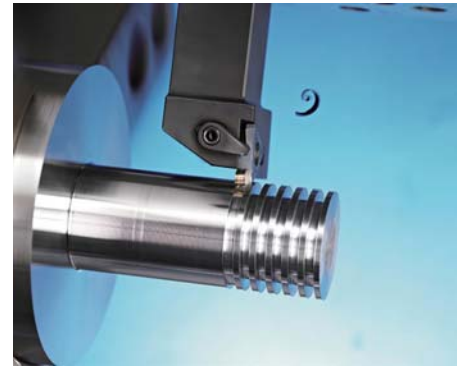

▶ Features of TB-M chip breaker





- Smooth chip evacuation due to narrow chip curls
- Excellent chip control for turning and chamfering
- Stable chip flow at high feed

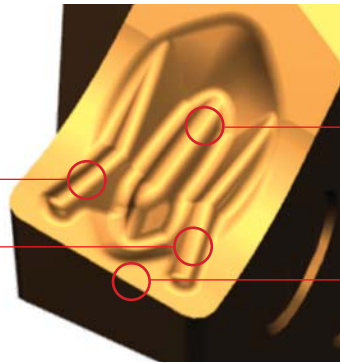

- Stable chip curl control at high feed

- Sharp cutting edge for better cutting action
- Excellent chipping resistance due to stronger cutting edges
- Improved surface roughness of workpieces

Chip breaker types per size





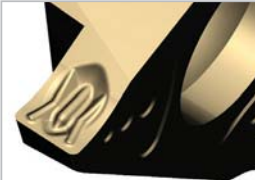
TB4150R-M ~ TB4185R-M	TB4200R-M ~ TB4228R-M	TB4300R-M ~ TB4350R-M	TB4400R-M ~ TB4450R-M
			
Cutting edge width b 1.5 ~ 1.85mm	Cutting edge width b 2.0 ~ 2.8mm	Cutting edge width b 3.0 ~ 3.5mm	Cutting edge width b 4.0 ~ 4.5mm

▶ Recommended cutting conditions



ISO	Grade	Cutting speed, vc (m/min)		Feed, fn (mm/rev)	
		CN2000	PC5300	CN2000	PC5300
P	SMOOC	150(100~220)	130(80~180)	0.05~0.20	0.05~0.20
	SCM	150(100~200)	130(80~180)	0.05~0.20	0.05~0.20
M	STS	-	80(40~150)	-	0.05~0.12
K	GC, GCD	-	130(80~180)	-	0.05~0.15

Inserts



Application	Picture	Designation	Cermert		Coated						Up-coated	Dimensions (mm)					Configuration		
			CN2000	CN20	NC3010	NC3120	NC3220	PC8110	PC5300	ST20E		b	g	W	r	d			
Narrow grooving		TB	3125R/L									1.25	1.5	4.76	0.2	9.525	 <p>Feature of TB-M</p> <ul style="list-style-type: none"> • Suitable for automated line with Chip breaker • Superior surface 		
			3145R/L										1.45	1.5	4.76	0.2		9.525	
			3175R/L											1.75	2.5	4.76		0.2	9.525
			3185R/L											1.85	2.5	4.76		0.2	9.525
			3200R/L											2.00	2.5	4.76		0.2	9.525
			3230R/L											2.30	3.5	4.76		0.3	9.525
			3280R/L											2.80	3.5	4.76		0.3	9.525
			3330R/L											3.30	3.5	4.76		0.3	9.525
			3430R/L											4.30	3.5	4.76		0.4	9.525
			4125R/L			•	•							1.25	2.0	4.76		0.2	12.7
			4145R/L			•	•							1.45	2.0	4.76		0.2	12.7
			4150R/L			•	•							1.50	3.5	4.76		0.2	12.7
			4175R/L			•	•							1.75	3.5	4.76		0.2	12.7
			4185R/L			•	•							1.85	3.5	4.76		0.2	12.7
			4200R/L			•	•							2.00	3.5	4.76		0.2	12.7
			4215R/L											2.15	3.5	4.76		0.2	12.7
			4230R/L			•	•							2.30	3.5	4.76		0.2	12.7
			4250R/L			•	•							2.50	4.0	4.76		0.3	12.7
			4265R/L											2.65	4.0	4.76		0.3	12.7
			4280R/L				•							2.80	4.0	4.76		0.3	12.7
			4300R/L			•	•							3.00	4.0	4.76		0.3	12.7
			4330R/L			•	•							3.30	4.0	4.76		0.3	12.7
			4350R/L											3.50	5.0	4.76		0.3	12.7
			4400R/L											4.00	5.0	4.76		0.4	12.7
			4430R/L			•								4.30	5.0	4.76		0.4	12.7
4450R/L											4.50	5.0	4.76	0.4	12.7				
		TB	4150R-M							•		1.50	3.5	4.76	0.2	12.7	 		
			4175R-M								•		1.75	3.5	4.76	0.2		12.7	
			4185R-M										1.85	3.5	4.76	0.2		12.7	
			4200R-M									•		2.00	3.5	4.76		0.2	12.7
			4215R-M									•		2.15	3.5	4.76		0.2	12.7
			4230R-M									•		2.30	3.5	4.76		0.2	12.7
			4250R-M									•		2.50	4.0	4.76		0.3	12.7
			4265R-M									•		2.65	4.0	4.76		0.3	12.7
			4280R-M									•		2.80	4.0	4.76		0.3	12.7
			4300R-M									•		3.00	4.0	4.76		0.3	12.7
			4330R-M											3.30	4.0	4.76		0.3	12.7
			4350R-M									•		3.50	5.0	4.76		0.3	12.7
			4400R-M											4.00	5.0	4.76		0.4	12.7
			4430R-M											4.30	5.0	4.76		0.4	12.7
			4450R-M											4.50	5.0	4.76		0.4	12.7

• : Stock item

TBH For Narrow grooving



TB

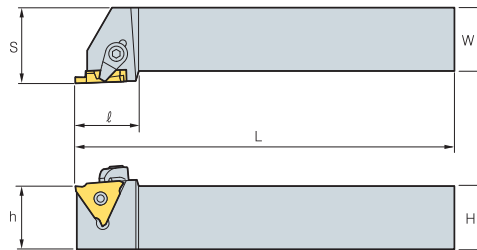

R type insert (mm)

Designation	Stock		H=(h)	W	L	l	S	Inserts	Clamp	Clamp Screw	Wrench
	R	L									
TBH			20	20	125	25.5	25	TB3125-3230			
			20	20	125	25.5	25	TB3280-3330			
			20	20	125	25.5	25	TB3430			
	•		25	25	150	25.5	30	TB3125-3230			
			25	25	150	25.5	30	TB3280-3330			
			25	25	150	25.5	30	TB3430			
	•		20	20	125	25.5	25	TB4125-4230			
	•		20	20	125	25.5	25	TB4250-4330			
	•		20	20	125	25.5	25	TB4350-4450			
	•		25	25	150	25.5	30	TB4125-4230			
	•		25	25	150	25.5	30	TB4250-4330			
	•		25	25	150	25.5	30	TB4350-4450			

➔ Applicable inserts C45





• : Stock item



IGH For Internal grooving



IG

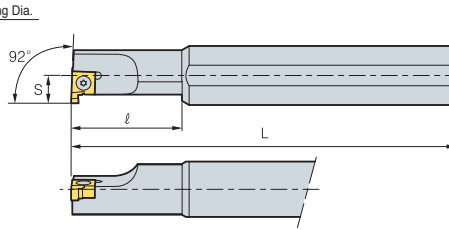

R type insert
(mm)

Designation	Stock		ØD	Ød	H	L	l	S	Inserts	Screw	Wrench
	R	L									
IGH	214R/L	●	14	16	15	150	25	6.6	IG125~280	FTKA02565	TW07P
	216R/L	●	16	16	15	150	30	7.6			
	220R/L	●	20	20	18	200	40	9.6			

➔ Applicable inserts C46

● : Stock item

Inserts



Application	Picture	Designation	Coated			Uncoated			Dimensions (mm)					Configuration
			NC3010	NC3120	NC3225	H01	G10E	A30	b	g	t	d	d ₁	
Internal grooving		IG	125					●	1.25	1.5	3.18	6.35	2.8	
			145					●	1.45	1.5	3.18	6.35	2.8	
			175					●	1.75	1.5	3.18	6.35	2.8	
			200					●	2.0	2.3	3.18	6.35	2.8	
			230					●	2.3	2.3	3.18	6.35	2.8	
			280					●	2.8	2.3	3.18	6.35	2.8	

● : Stock item

DBH For Deep and Wide grooving



DB DC

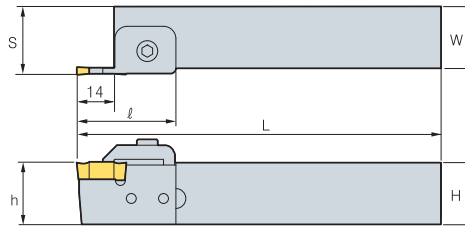

R type insert
(mm)

Designation	Stock		H=(h)	W	L	l	S		Inserts		Clamp	Clamp Screw	Screw	Locator	Wrench
	R	L					*	**	*	**					
DBH	320R/L		20	20	150	40	22.3	22.8	DB300	DB400				LD34	HW30L HW40L
		325R/L							DC300	DC400					
	520R/L		20	20	150	40	23.8	24.3	DB500	DB600				LD56	HW30L HW40L
		525R/L							DC500						
	720R/L		20	20	150	40	25.8	26.3	DB700	DB800				LD78	HW30L HW40L
		725R/L													

➔ Applicable inserts C46

● : Stock item

Inserts

Application	Picture	Designation	Cermet	Coated			Uncoated		Dimensions (mm)				Configuration	
			CN20	NC3010	NC3120	NC3225	H01	G10E	b	l	t	r		
Grooving		DB	300	●					3.0	20	7.5	0.2		
			400	●					4.0	20	7.5	0.2		
			500	●						5.0	20	7.5		0.2
			600							6.0	20	7.5		0.2
			700							7.0	20	7.5		0.2
			800							8.0	20	7.5		0.2
Grooving		DC	300	●					3.0	20	7.5	0.2		
			400	●					4.0	20	7.5	0.25		
			500							5.0	20	7.5		0.3



● : Stock item



GFT For External grooving



GW BF

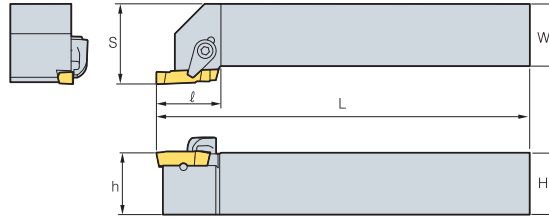

R type insert
(mm)

Designation	Stock		H=(h)	W	L	ℓ	S	Inserts	Clamp	Screw	Pin	Wrench
	R	L										
GFT 320R/L	●		20	20	125	23.5	25	GW110~300R/L,BF3	CS5R1	DHA0514	PN0310	HW25L
325R/L	●	●	25	25	150	23.5	32	GW315~500R/L,BF5	CS6R1	DHA0617	PN0310	HW30L
525R/L	●		25	25	150	25.5	32	GW600~800R/L,BF8	CS8R1	DHA0820	PN0314	HW40L
825R/L	●		25	25	150	28.5	32					



↻ Applicable inserts C47 • Use right-hand insert for left-hand holder

● : Stock item

GFIP For Internal grooving



BF GW

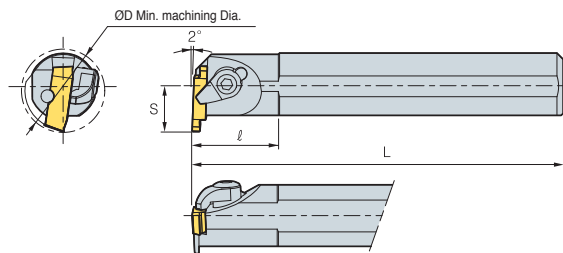

R type insert
(mm)

Designation	Stock		ØD	Ød	H	L	ℓ	S	Inserts	Clamp	C-ring	Screw	Pin	Wrench
	R	L												
GFIP 316R/L	●	●	20	16	15	150	17	11	GW110~300R/L,BF3	CH5R2	CR04	CHX0513	PN0310	HW25L
320R/L	●		26	20	18	150	22	13						
325R/L	●		32	25	23	200	22	17						
340R/L	●		50	40	37	300	32	27	GW315~500R/L,BF5	CH6R2	CR05	CHX0616	PN0310	HW30L
525R/L	●		32	25	23	200	22	17						
540R/L	●		50	40	37	300	32	27	GW600~800R/L,BF8	CS8R1	-	DHA0820	PN0314	HW40L
840R/L	●		50	40	37	300	32	27						

↻ Applicable inserts C47 • Use right-hand insert for left-hand holder

● : Stock item

Inserts

Application	Picture	Designation	Uncoated		Dimensions (mm)						Configuration	
			A30		b	g	W	l	t	r		
Blank		BF	-3	●				3.1	16.4	5.26	-	
			-5					5.1	22.4	6.26	-	
			-8					8.1	27.4	7.26	-	
Grooving		GW	110R/L	●	●	1.1	2.1	3.1	16	5.0	0.2	
			130R/L	●	●	1.3	2.3	3.1	16	5.0	0.2	
			160R/L	●	●	1.6	2.6	3.1	16	5.0	0.2	
			185R/L	●	●	1.85	2.9	3.1	16	5.0	0.2	
			215R/L	●	●	2.15	3.2	3.1	16	5.0	0.2	
			265R/L	●	●	2.65	3.7	3.1	16	5.0	0.2	
			300R/L	●	●	3.0	4.0	3.1	16	5.0	0.2	
			315R/L	●	●	3.15	4.2	5.1	22	6.0	0.3	
			415R/L	●	●	4.15	5.2	5.1	22	6.0	0.3	
			500R/L	●	●	5.0	6.0	5.1	22	6.0	0.3	
			600R/L			6.0	7.0	8.1	27	7.0	0.3	
			800R/L			8.0	9.0	8.1	27	7.0	0.3	



● : Stock item

C Grooving Tools

GH For O-ring grooving Snap-ring grooving



GO GS

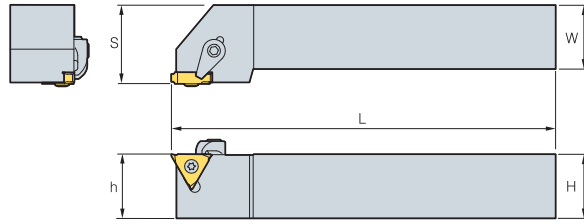

R type insert (mm)

Designation	Stock		H=(h)	W	L	S	Inserts	Clamp	Clamp Screw	Screw	Wrench
	R	L									
GH	2020R/L-3	●	20	20	125	22	GS125~280	CS6R1	DHA0617	PTMA03508	TW09P-HW30L
	2525R/L-3	●	25	25	150	27	GO250				
	2020R/L-4	●	20	20	125	21	GS330 / 430				
	2525R/L-4	●	25	25	150	26	GO320 / 410				

🔗 Applicable inserts C48 ● : Stock item

▶ Inserts



Application	Picture	Designation	Coated			Uncoated			Dimensions (mm)					Configuration	
			NC3010	NC3120	NC3225	H01	ST20E	A30	b	g	W	r	d		
Grooving (Narrow · O-ring · Snap-ring)		GO 250							2.5	1.5	3.3	0.35	9.525		
		320							3.2	2.0	3.8	0.35	9.525		
		410							4.1	2.5	4.5	0.65	9.525		
		GS 125					●			1.23	1.5	2.5	0.2	9.525	
		145					●			1.43	1.5	2.5	0.2	9.525	
		175					●			1.73	2.0	2.5	0.2	9.525	
		185					●			1.83	2.0	2.5	0.2	9.525	
		200					●			2.03	2.5	2.5	0.2	9.525	
		230					●			2.28	3.5	2.8	0.2	9.525	
		280					●			2.78	3.5	3.3	0.3	9.525	
330					●			3.28	4.0	3.8	0.3	9.525			
430					●			4.28	4.0	4.5	0.4	9.525			

● : Stock item

GFIK For Relieving



GR

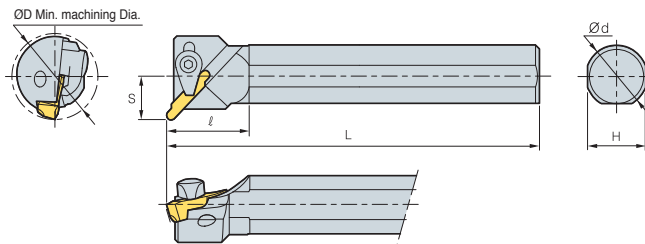

R type insert (mm)

Designation	Stock		ØD	Ød	H	L	l	S	Inserts	Clamp	C-ring	Screw	Pin	Wrench
	R	L												
GFIK	316R/L		22	16	15	150	21.5	11	GR3□□	CH5R2	CR04	CHX0513	PN0310	HW25L
	325R/L		32	25	23	200	21.5	17		CH5R2	CR04	CHX0513	PN0310	HW25L
	340R/L		50	40	37	300	35.4	27		CS5R1	-	DHA0514	PN0310	HW25L
	525R/L		32	25	23	200	27.5	17	GR5□□	CS6R1	-	DHA0617	PN0314	HW30L
	540R/L		50	40	37	300	39.5	27		CS6R1	-	DHA0617	PN0314	HW30L
	840R/L		50	40	37	300	41.8	27		GR8□□	CS8R1	-	DHA0820	PN0314

🔗 Applicable inserts C48 ● : Stock item

▶ Inserts

Application	Picture	Designation	Coated			Uncoated			Dimensions (mm)						Configuration	
			NC3010	NC3120	NC3225	H01	ST20E	A30	b	g	W	l	t	r		
Relieving		GR 310R								2.0	2.0	3.1	15.9	5.0	1.0	
		315R								3.0	2.9	3.1	15.9	5.0	1.5	
		520R								4.0	4.0	5.1	21.9	6.0	2.0	
		525R								5.0	5.0	5.1	21.8	6.0	2.5	
		830R								6.0	6.0	8.1	26.8	7.0	3.0	
		840R								8.0	8.0	8.1	26.7	7.0	4.0	



● : Stock item



EH Regrinding type insert



ESB

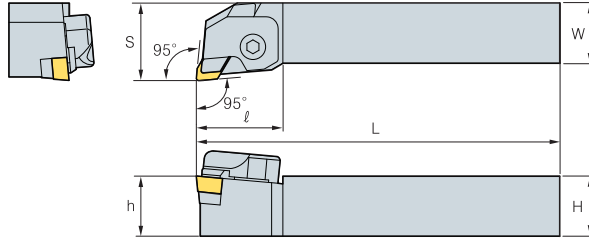

R type insert
(mm)

Designation	Stock		H=(h)	W	L	ℓ	S	Inserts	Clamp	Clamp Screw	Chip Breaker	Shim	Shim Screw	Wrench
	R	L												
EH 620R			20	20	125	36	27	ESB34	CTH6R2	BHA0616	CB20	SES33C	SHX0310	HW50L HW20L
EH 625R			25	25	150	36	32							

➔ Applicable inserts C49

● : Stock item

Inserts



Application	Picture	Designation	Uncoated		Dimensions (mm)			Configuration	
			ST10P	ST20E	W	l	t		
General Machining		ESB 34			9.525	30.0	6.35		

● : Stock item

PH For Parting off Deep grooving



POB

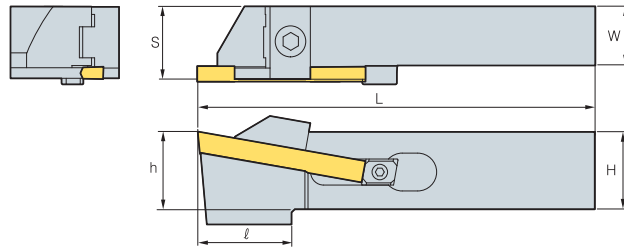

R type insert
(mm)

Designation	Stock		H	W	L	ℓ	S	h	Max (Ø)	Inserts	Clamp	Clamp Screw	Stopper	Stopper Screw	Wrench
	R	L													
PH 320R/L	●		19	19	150	34	22.25	19	30	POB300	CGH6R1	BHA0616	STP5	KHD0510	HW25L-HW50L
PH 325R/L	●		25	19	150	34	22.25	25	40						
PH 420R/L	●		19	19	150	34	23.5	19	30	POB400	CGH6R2	BHA0616	STP5	KHD0510	HW25L-HW50L
PH 425R/L	●		25	19	150	34	23.5	25	40						
PH 520R/L	●		19	19	150	34	24.4	19	50	POB500	CTH 6R3	BHA0616	STP5	KHD0510	HW25L-HW50L
PH 525R/L	●		25	19	150	34	24.4	25	50						

➔ Applicable inserts C49

● : Stock item

Inserts

Application	Picture	Designation	Uncoated		Dimensions (mm)			Configuration
			ST10P	ST20E	W	l	t	
Grooving - Parting off		POB 300		●	3.0	55	6.0	
		POB 400		●	4.0	55	7.0	
		POB 500		●	5.0	55	8.0	

● : Stock item



C Technical Information for New Fine Tools


Six kinds of inserts can be used in one holder for various operations

New Fine Tools

- Strong clamping system and specially designed insert are suitable for small diameter machining.
- Six kinds of inserts can be clamped in one holder for various operations
- Guaranteed long tool life due to good toughness substrate with new TiAlN
- High accuracy ground insert ensures high precision machining



▶ **Application range** Internal grooving, Profiling, Threading and Boring at $\varnothing 8\text{mm} \sim \varnothing 16\text{mm}$

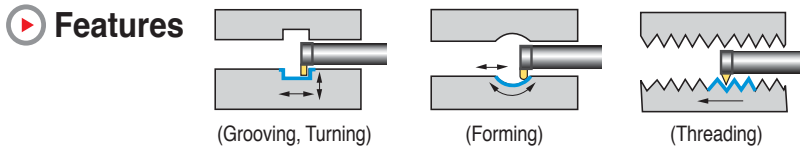

▶ **Application examples**

NFTIH 08 3 12 - S

Minimum Diameter
Overhang (l/ØD)
Shank Dia.
Shank Type

S : Steel, C : Carbide

▶ **Recommended cutting condition**

Workpiece	Grade	Cutting Condition				
		Min. machining Dia.				
	PC130		Ø8	Ø11	Ø14	Ø16
Carbon steel	◎	vc(m/min)	30~80	30~100	30~100	30~100
		fn(m/rev)	0.01~0.04	0.01~0.05	0.02~0.05	0.02~0.06
Alloy steel	◎	vc(m/min)	30~80	30~100	30~100	30~100
		fn(m/rev)	0.01~0.02	0.01~0.04	0.02~0.04	0.02~0.05
Cast iron	○	vc(m/min)	30~80	30~100	30~100	30~100
		fn(m/rev)	0.01~0.05	0.01~0.05	0.02~0.05	0.02~0.05
Non-ferrous alloy	○	vc(m/min)	70~150	100~150	100~150	100~150
		fn(m/rev)	0.02~0.06	0.02~0.06	0.02~0.06	0.02~0.06

Note - In case of chattering, reduce the cutting speed and feed
 - To find the optimal cutting conditions, advise to gradually increase from the lowest cutting condition of the above recommendation
 - In case of the unilateral grooving depth over 1mm, work to the step feed rate

▶ **Clamping system**

Screw + Insert (R Type, L Type) + Holder (Shank (Cemented carbide or Steel), Overhang (3D, 4D, 5D))



• Available R/L type insert with one holder



Stable clamping according to the tripod structure

No-Spin-System design for strong clamping




Inserts


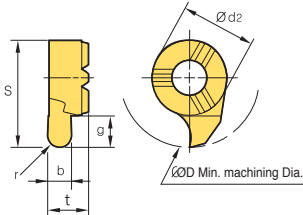
Application	Picture	Designation	Coated		Dimensions (mm)									Configuration
			PC130	R L	ØD	b	r	S	g	Ød ₂	t	Pitch	f	
Grooving		NFTG 08075R/L	●		8	0.75	-	7.75	1.3	5.9	3.85	-	-	
		08085R/L	●		8	0.85	-	7.75	1.3	5.9	3.85	-	-	
		08095R/L	●		8	0.95	-	7.75	1.3	5.9	3.85	-	-	
		08121R/L	●		8	1.21	-	7.75	1.3	5.9	3.85	-	-	
		08141R/L	●		8	1.41	-	7.75	1.3	5.9	3.85	-	-	
		08152R/L	●		8	1.52	-	7.75	1.3	5.9	3.85	-	-	
		08171R/L	●		8	1.71	-	7.75	1.3	5.9	3.85	-	-	
		08202R/L	●		8	2.02	-	7.75	1.3	5.9	3.85	-	-	
		11075R/L	●		11	0.75	-	10.7	1.8	8.0	4.9	-	-	
		11085R/L	●		11	0.85	-	10.7	1.8	8.0	4.9	-	-	
		11095R/L	●		11	0.95	-	10.7	1.8	8.0	4.9	-	-	
		11121R/L	●		11	1.21	-	10.7	2.6	8.0	4.9	-	-	
		11141R/L	●		11	1.41	-	10.7	2.6	8.0	4.9	-	-	
		11152 R/L	●		11	1.52	-	10.7	2.6	8.0	4.9	-	-	
		11171R/L	●		11	1.71	-	10.7	2.6	8.0	4.9	-	-	
		11202R/L	●		11	2.02	-	10.7	2.6	8.0	4.9	-	-	
		11202R-02/L	●		11	2.02	0.2	10.7	2.6	8.0	4.9	-	-	
		11252R/L	●		11	2.52	-	10.7	2.6	8.0	4.9	-	-	
		11302R/L	●		11	3.02	-	10.7	2.6	8.0	4.9	-	-	
		14075R/L	●		14	0.75	-	13.5	1.8	9.0	5.85	-	-	
		14085R/L	●		14	0.85	-	13.5	1.8	9.0	5.85	-	-	
		14095R/L	●		14	0.95	-	13.5	1.8	9.0	5.85	-	-	
		14121R/L	●		14	1.21	-	13.5	4.3	9.0	5.85	-	-	
		14141R/L	●		14	1.41	-	13.5	4.3	9.0	5.85	-	-	
		14152R/L	●		14	1.52	-	13.5	4.3	9.0	5.85	-	-	
		14171R/L	●		14	1.71	-	13.5	4.3	9.0	5.85	-	-	
		14202R/L	●		14	2.02	-	13.5	4.3	9.0	5.85	-	-	
		14252R/L	●		14	2.52	-	13.5	4.3	9.0	5.85	-	-	
		14302R/L	●		14	3.02	-	13.5	4.3	9.0	5.85	-	-	
		16075R/L			16	0.75	-	15.7	1.8	11	5.8	-	-	
		16085R/L			16	0.85	-	15.7	1.8	11	5.8	-	-	
		16095R/L	●		16	0.95	-	15.7	1.8	11	5.8	-	-	
		16121R/L	●		16	1.21	-	15.7	4.6	11	5.8	-	-	
		16141R/L	●		16	1.41	-	15.7	4.6	11	5.8	-	-	
16171R/L	●		16	1.71	-	15.7	4.6	11	5.8	-	-			
16202R/L	●		16	2.02	-	15.7	4.6	11	5.8	-	-			
16252R/L	●		16	2.52	-	15.7	4.6	11	5.8	-	-			
16302R/L	●		16	3.02	-	15.7	4.6	11	5.8	-	-			
16352R/L	●		16	3.52	-	15.7	4.6	11	5.8	-	-			
16402R/L	●		16	4.02	-	15.7	4.6	11	5.8	-	-			
Threading		NFTT 0805MR/L	●		8	-	-	7.75	-	6	3.85	0.5	1.0	
		0810MR/L	●		8	-	-	7.75	-	6	3.85	1.0	1.0	
		0815MR/L	●		8	-	-	7.75	-	6	3.85	1.5	1.2	
		1110MR/L	●		11	-	-	10.7	-	8	4.9	1.0	1.2	
		1115MR/L	●		11	-	-	10.7	-	8	4.9	1.5	1.2	
		1120MR/L	●		11	-	-	10.7	-	8	4.9	2.0	1.2	
		1125MR/L	●		11	-	-	10.7	-	8	4.9	2.5	1.2	
		1410MR/L	●		14	-	-	13.5	-	9	5.85	1.0	1.2	
		1415MR/L	●		14	-	-	13.5	-	9	5.85	1.5	1.2	
		1420MR/L			14	-	-	13.5	-	9	5.85	2.0	1.2	
		1425MR/L	●		14	-	-	13.5	-	9	5.85	2.5	1.2	
		1610MR/L			16	-	-	15.7	-	11	5.8	1.0	1.2	
		1615MR/L			16	-	-	15.7	-	11	5.8	1.5	1.2	
		1620MR/L			16	-	-	15.7	-	11	5.8	2.0	1.2	
		1625MR/L			16	-	-	15.7	-	11	5.8	2.5	1.2	
		1630MR/L			16	-	-	15.7	-	11	5.8	3.0	1.5	
1635MR/L			16	-	-	15.7	-	11	5.8	3.5	1.6			
1640MR/L			16	-	-	15.7	-	11	5.8	4.0	1.8			



● : Stock item



Inserts


Application	Picture	Designation	Coated		Dimensions (mm)							Configuration
			PC130	R	L	ØD	b	r	S	g	Ød ₂	
Profiling		NFTF 08082R/L	●		8	0.82	0.41	7.75	1.3	5.9	3.85	
		08122R/L	●		8	1.22	0.61	7.75	1.3	5.9	3.85	
		08182R/L	●		8	1.82	0.91	7.75	1.3	5.9	3.85	
		11082R/L	●		11	0.82	0.41	10.7	2.6	8	4.9	
		11122R/L	●		11	1.22	0.61	10.7	2.6	8	4.9	
		11182R/L	●		11	1.82	0.91	10.7	2.6	8	4.9	
		11202R/L	●		11	2.02	1.01	10.7	2.6	8	4.9	
		11302R/L	●		11	3.02	1.51	10.7	2.6	8	4.9	
		14122R/L	●		14	1.22	0.61	13.5	4.3	9	5.85	
		14182R/L	●		14	1.82	0.91	13.5	4.3	9	5.85	
		14202R/L	●		14	2.02	1.01	13.5	4.3	9	5.85	
		14222R/L	●		14	2.22	1.11	13.5	4.3	9	5.85	
		14302R/L	●		14	3.02	1.51	13.5	4.3	9	5.85	
		16182R/L	●		16	1.82	0.91	15.7	4.6	11	5.8	
		16222R/L	●		16	2.22	1.11	15.7	4.6	11	5.8	
		16302R/L	●		16	3.02	1.51	15.7	4.6	11	5.8	
16402R/L	●		16	4.02	2.01	15.7	4.6	11	5.8			

● : Stock item

NFTIH



NFTF
NFTT
NFTG

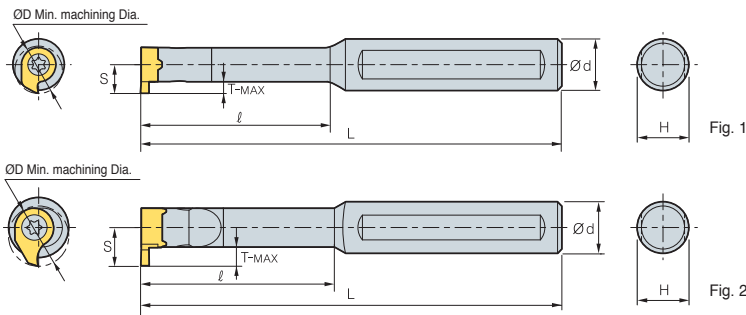

• For NFTIH14~.
R type insert

(mm)

Designation	Stock	ØD	Ød	L	Ø	T-MAX	H	S	Inserts		Screw	Wrench	Fig.
									NFTG : Grooving	NFTT : Threading			
NFTIH 08206C	●	8	6	65	-	1.0	4	4.8			PTKA02508	TW08P	1
08212C	●	8	12	70	16	1.0	10	4.8					
08312C	●	8	12	80	24	1.0	10	4.8	NFTG08□□□R/L				
08312S	●	8	12	80	24	1.0	10	4.8	NFTT08□□□R/L				
08412C	●	8	12	90	32	1.0	10	4.8	NFTF08□□□R/L				
08512C	●	8	12	100	40	1.0	10	4.8					
11208C	●	11	8	80	-	2.3	7	6.7			PTKA03510	TW15P	2
11212C	●	11	12	75	22	2.3	11	6.7					
11312C	●	11	12	95	33	2.3	11	6.7	NFTG11□□□R/L				
11312S	●	11	12	95	33	2.3	11	6.7	NFTT11□□□R/L				
11412C	●	11	12	110	44	2.3	11	6.7	NFTF11□□□R/L				
11512C	●	11	12	120	55	2.3	11	6.7					
14012C	●	14	12	75	20	4.0	11	9.0			PTKA0412	TW15P	2
14016C	●	14	16	75	20	4.0	15	9.0					
14112C	●	14	12	100	34	4.0	11	9.0					
14116C	●	14	16	100	34	4.0	15	9.0	NFTG14□□□R/L				
14212C	●	14	12	110	45	4.0	11	9.0	NFTT14□□□R/L				
14216C	●	14	16	110	45	4.0	15	9.0	NFTF14□□□R/L				
14312C	●	14	12	130	64	4.0	11	9.0			PTKA0512	TW20P	2
14316C	●	14	16	130	64	4.0	15	9.0					
16312C	●	16	12	130	48	4.3	11	10.2					
16312S	●	16	12	130	48	4.3	11	10.2					
16412C	●	16	12	130	64	4.3	11	10.2	NFTG16□□□R/L				
16512C	●	16	12	150	80	4.3	11	10.2	NFTT16□□□R/L				
16316C	●	16	16	130	48	4.3	15	10.2	NFTF16□□□R/L				
16416C	●	16	16	130	64	4.3	15	10.2					
16516C	●	16	16	150	80	4.3	15	10.2					

Applicable inserts C51, C52

● : Stock item




Multi Turn




▶ Holder code system



▶ Insert code system


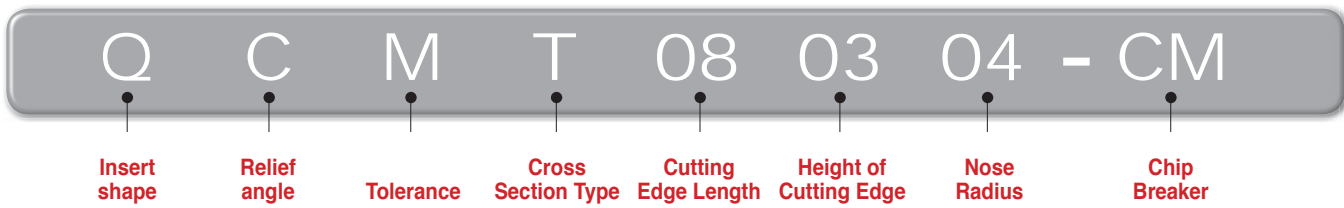


▶ Tool design by FEM analysis

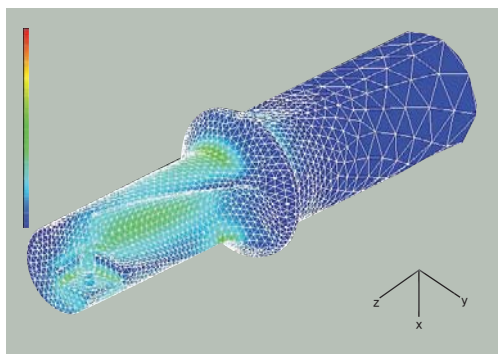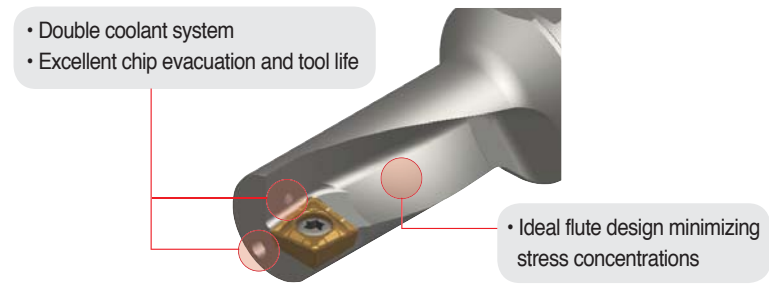

• Minimized stress during cutting, prevented damage from vibration and longer tool life
Optimized design


▶ Creative stepping cutting edge

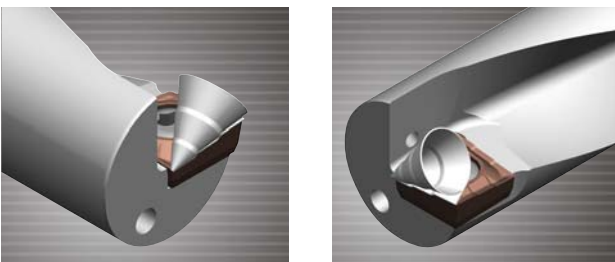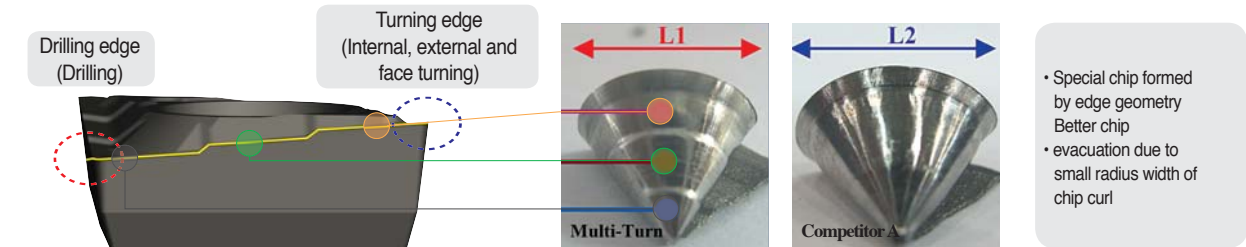


Comparison	Multi turn	Competitor A	Competitor B
Feed $f_n(\text{mm/rev}) = 0.08$			
Feed $f_n(\text{mm/rev}) = 0.10$			
Chip width (rate)	80%	100%	120%

▶ User's guide

External / Internal turning

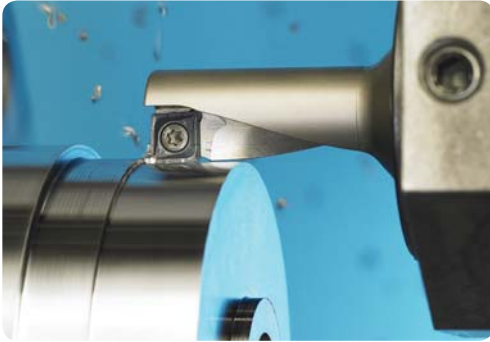


● Application range

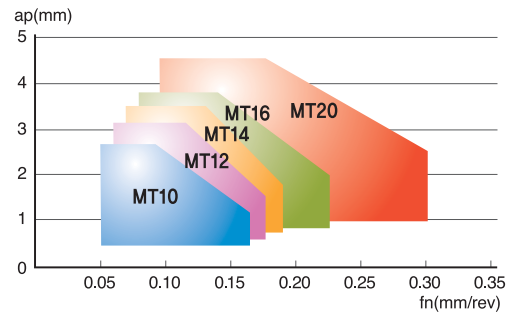

Facing




● Application ranges of facing

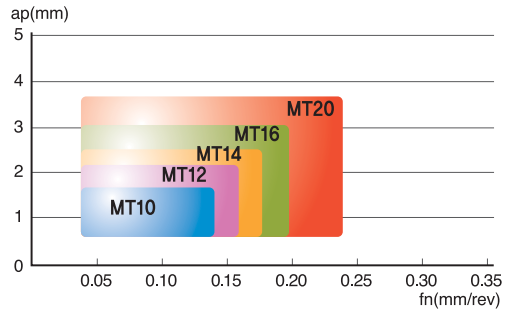

Drilling




● Drilling feed range by designation

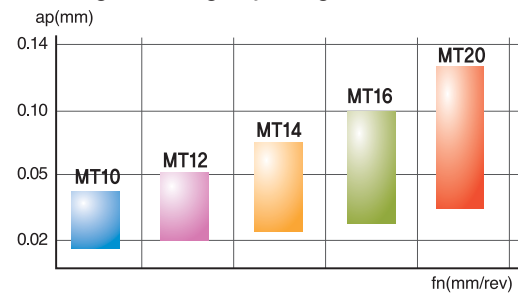



Offset (Diameter compensation)

Disignation	Machined diameter(mm)	ØDmin(mm)	ØDmax(mm)
MT10R/L-2.25D	10	9.85	10.35
MT12R/L-2.25D	12	11.85	12.35
MT14R/L-2.25D	14	13.85	14.35
MT16R/L-2.25D	16	15.85	16.35
MT20R/L-2.25D	20	19.85	20.35
MT25R/L-2.25D	25	24.85	25.35
MT32R/L-2.25D	32	31.85	32.35

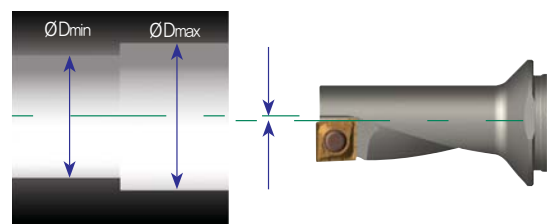

Drill diameter is adjustable by the offset compensation

MT (Multi-Turn)

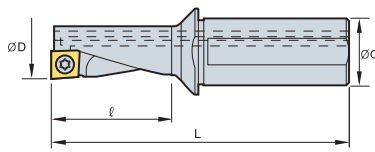

(mm)

Designation	Stock		ØD	Ød	ℓ	L	Inserts	Screw	Wrench
	R	L							
MT10R/L-2.25D	●		10	12	22.5	69.5	QC□T050204	FTNA0204S	TW06P
MT12R/L-2.25D	●	●	12	16	27.0	78.0	QC□T060204	FTNA02205S	TW06P
MT14R/L-2.25D	●		14	16	31.5	83.5	QC□T070304	FTKA02555	TW07P
MT16R/L-2.25D	●		16	20	36.0	94.0	QC□T080304	FTNA0306	TW09P
MT20R/L-2.25D	●	●	20	25	45.0	111.0	QC□T10T304	FTNA03508	TW15P
MT25R/L-2.25D	●		25	32	56.5	130.0	QC□T130408	FTNC04509	TW20S
MT32R/L-2.25D	●		32	40	72.0	160.0	QC□T170508	FTNC04511	TW20S

➔ Applicable inserts C55

● : Stock item


▶ Inserts

Picture	Designation	Material					Dimensions (mm)					Configuration
		Cermet PC5300	Coated NC3120 NC3220		Uncoated NC6210 H01		l	d	t	r	Ød ₁	
	QCMT	050204-CM	●		●		5.0	5.4	2.10	0.4	2.3	
		060204-CM	●		●		6.0	6.4	2.38	0.4	2.5	
		070304-CM	●		●	●	7.0	7.4	3.18	0.4	2.8	
		080304-CM	●		●	●	8.0	8.4	3.18	0.4	3.4	
		10T304-CM	●		●	●	10.0	10.4	3.97	0.4	4.0	
		130408-CM	●		●	●	12.7	13.5	4.76	0.8	5.5	
		170508-CM	●		●	●	16.7	17.5	5.56	0.8	5.5	
	QCGT	050204-CA					5.0	5.4	2.10	0.3	2.3	
		060204-CA				●	6.0	6.4	2.38	0.4	2.5	
		070304-CA				●	7.0	7.4	3.18	0.4	2.8	
		080304-CA				●	8.0	8.4	3.18	0.4	3.4	
		10T304-CA				●	10.0	10.4	3.97	0.4	4.0	
		130408-CA				●	12.7	13.5	4.76	0.8	5.5	
		170508-CA				●	16.7	17.5	5.56	0.8	5.5	

● : Stock item

Bearing Solution


▶ Holder Code System

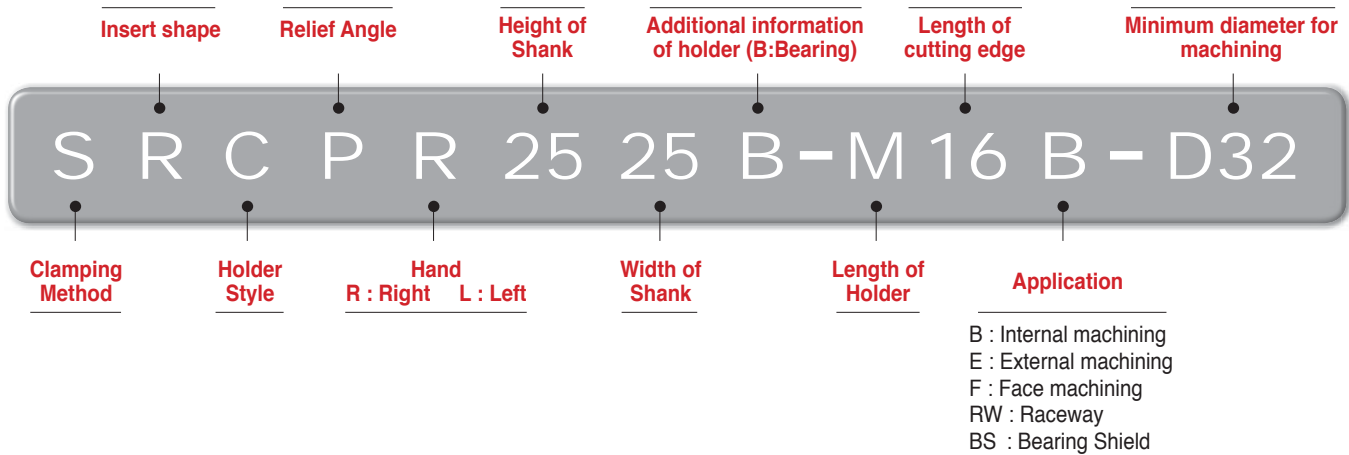



▶ Insert Code System for race way and bearing shield machining



CMSN...F Type



MC12□□ MC12□□-BR
MC15□□

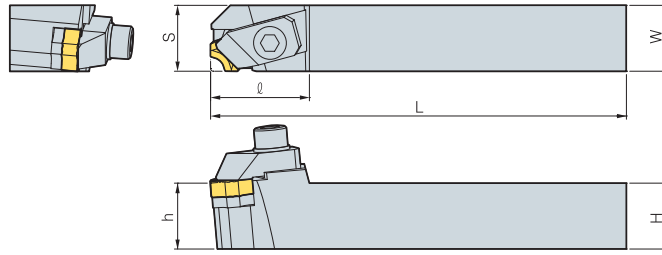


R type insert
(mm)



Designation	Stock		H	W	L	S	h	l	Inserts	Clamp	Clamp Screw	Shim	Shim Screw	Wrench
	R	L												
CMSNR/L	2020B-L12F		20	20	140	21	20	33	MC12□□	CH6R/L1B	BHA0620	SX42CB	SS0308	HW50L
	2023B-L12F		20	23	140	24	20	33	MC12□□-BR					
	2525B-L15F		25	25	140	26	25	35	MC15□□					

● : Stock item

CMSN...B Type



MC12□□ MC12□□-BR

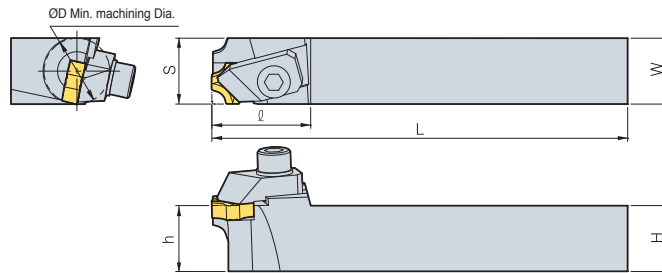

R type insert
(mm)

Designation	Stock		ØD	H	W	L	S	h	l	Inserts	Clamp	Clamp Screw	Shim	Shim Screw	Wrench
	R	L													
CMSNR/L	2020B-L12B-D28		28	20	20	140	21	20	33	MC12□□ MC12□□-BR	CH6R/L1B	BHA0620	SX42CB	SS0308	HW50L
	2525B-L12B-D28		28	25	25	140	26	25	33						
	1620B-L12B-D20		20	16	20	140	18	16	32						
	2023B-L12B-D28		28	20	23	140	24	20	33						

● : Stock item

▶ Inserts

Application	Picture	Designation	Cermet		Dimensions (mm)					Configuration
			CN20	CN2000	R	θ°	B	d	t	
R-Chamfering		MC0906			0.6	12	1.8	9.525	3.18	
		MC0910			1.0	12	2.4	9.525	3.18	
		MC1206			0.6	18	1.8	12.7	4.76	
		MC1210			1.0	18	2.4	12.7	4.76	
		MC1212			1.2	18	2.2	12.7	4.76	
		MC1215			1.5	18	3.0	12.7	4.76	
		MC1220			2.0	18	3.8	12.7	4.76	
		MC1225			2.5	18	2.8	12.7	4.76	
		MC1525			2.5	18	4.0	15.875	5.56	
		MC1530			3.0	18	4.7	15.875	5.56	
	MC1540			4.0	20	4.7	15.875	5.56		
		MC1206-BR			0.6	18	1.8	12.7	4.76	
		MC1210-BR			1.0	18	2.4	12.7	4.76	
		MC1212-BR			1.2	18	2.2	12.7	4.76	
		MC1215-BR			1.5	18	3.0	12.7	4.76	
		MC1220-BR			2.0	18	3.2	12.7	4.76	
MC1230-BR				3.0	18	3.7	12.7	4.76		
MC1235-BR			3.5	18	3.9	12.7	4.76			

● : Stock item


▶ Special order-form

Designation	CN20	CN2000	R	θ°	B	d	t	Configuration
MC...								

SRGP...E Type



RPGT1203M0
RPGT1604M0
RPGT2004M0



R type insert
(mm)



Designation	Stock		H	W	L	S	h	ℓ	Inserts	Screw	Shim	Shim Screw	Wrench
	R	L											
SRGPR/L 2020B-L12E			20	20	140	25	20	20	RPGT1203M0	FTKA0410	SR1203S	SHXN0609F	TW15P
2020B-L16E			20	20	140	25	20	20	RPGT1604M0	FTNA0513	SR16T3S	SHXN0712F	TW20P
2525B-L20E			25	25	140	32	25	30	RPGT2004M0	FTNA0513	SR20T3S	SHXN0712F	TW20P

● : Stock item

SRGP...F Type



RPGT1203M0
RPGT1604M0
RPGT2004M0

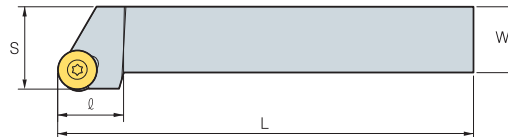

R type insert
(mm)

Designation	Stock		H	W	L	S	h	ℓ	Inserts	Screw	Shim	Shim Screw	Wrench
	R	L											
SRGPR/L 2020B-L12F			20	20	140	25	20	20	RPGT1203M0	FTKA0410	SR1203S	SHXN0609F	TW15P
2020B-L16F			20	20	140	25	20	20	RPGT1604M0	FTNA0513	SR16T3S	SHXN0712F	TW20P
2525B-L20F			25	25	140	32	25	30	RPGT2004M0	FTNA0513	SR20T3S	SHXN0712F	TW20P



● : Stock item

SRCP...B Type



RPGT0802M0
RPGT1203M0
RPGT1604M0

∅D Min. machining Dia.

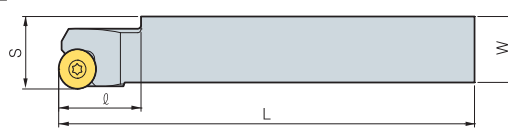

R type insert
(mm)

Designation	Stock		∅D	H	W	L	S	h	ℓ	Inserts	Screw	Wrench
	R	L										
SRCPR/L 2020B-L08B-D12			12	20	20	140	21.5	15.5	25	RPGT0802M0	FTKA0305	TW09P
1919B-L12B-D15			15	19	19	140	21	16	25	RPGT1203M0	FTNA0408	TW15P
2020B-L12B-D20			20	20	20	140	22	15.5	25	RPGT1203M0	FTNA0408	TW15P
2525B-L16B-D32			32	25	25	140	27	20	30	RPGT1604M0	FTKA0510	TW20P




● : Stock item



CSKP...B Type



SPGR120440L

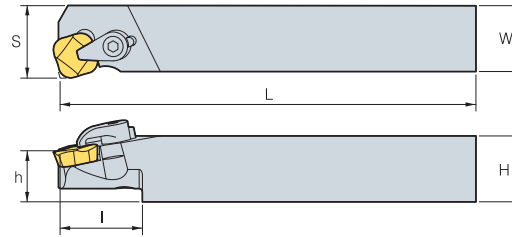


R type insert
(mm)




Designation	Stock		ØD	H	W	L	S	h	ℓ	Inserts	Clamp	Clamp Screw	Wrench
	R	L											
CSKPR/L 2022B-L12B-D30			30	20	22	140	27	20	37	SPGR120440R/L	CH5R1	CHX0510	HW30L

● : Stock item

SSKP...B Type



SPGH090330L

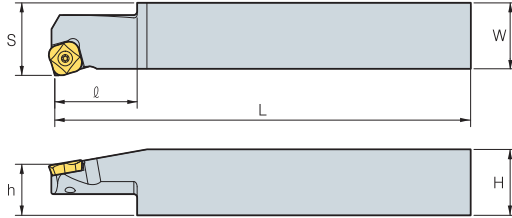

R type insert
(mm)

Designation	Stock		ØD	H	W	L	S	h	ℓ	Inserts	Screw	Wrench
	R	L										
SSKPR/L 2020B-L09B-D12			12	20	20	140	21.7	19	20	SPGH090330R/L	FTNA0307	TW09P
2020B-L09B-D13			13	20	20	140	21.7	19	20			
2020B-L09B-D20			20	20	20	140	21.7	19	20			

➔ Applicable inserts C59

● : Stock item


▶ Inserts

Application	Picture	Designation	Cermet		Dimensions (mm)				Configuration
			CN20	CN2000	r	d	d ₁	t	
Internal turning		RPGT0802M0			-	8	3.4	2.38	
		RPGT1203M0	●		-	12	4.4	3.18	
		RPGT1604M0			-	16	5.5	4.76	
		RPGT2004M0			-	20	5.5	4.76	
		SPGR120440L			4.0	12.7	-	4.76	
		SPGH090330L	●		3.0	9.525	3.4	3.18	




● : Stock item



CKFN...RW Type



KORIC




R type insert
(mm)




Designation	Stock		H	W	L	S	h	Inserts	Clamp	Clamp Screw	Shim	Shim Screw	Wrench
	R	L											
CKFNR/L	2020B-L22RW		20	20	140	12.5	20	KORIC2204R/L	CH6N1B	BHA0620	ST42CB	SS0408	HW50L
	2022B-L27RW		20	22	140	13	20	KORIC2704R/L	CH8R/L1B	BHA0820	ST52CB	SS0408	HW60L
	2025B-L33RW		20	25	140	16	20	KORIC3306R/L	CH8R/L1B	BHA0820	ST62CB	SS0408	HW60L
	2533B-L44RW		25	33	140	21	25	KORIC4408R/L	CH8R/L1B	BHA0820	ST82CB	SS0408	HW60L

● : Stock item

CKGN...RW Type



KORIC



R type insert
(mm)




Designation	Stock	ØD	H	W	L	S	h	Inserts	Clamp	Clamp Screw	Shim	Shim Screw	Wrench	
														CKGNR
	2022B-L27RW-D29		29	20	22	140	34	20	KORIC2704R/L	CH6R/L7B	BHA0620	ST52CB	SS0408	HW50L
	2025B-L33RW-D38		38	20	25	140	33	20	KORIC3306R/L	CH6R/L5B	BHA0620	ST62CB	SS0408	HW50L
	2528B-L38RW-D50		50	25	28	140	46	25	KORIC3806R/L	CH8R/L2B	BHA0820	ST72CB	SS0408	HW60L
	2528B-L44RW-D52		52	25	28	140	50	25	KORIC4408R/L	CH8R/L2B	BHA0820	ST82CB	SS0408	HW60L

● : Stock item

CSGN...RW Type



SNGN




R type insert
(mm)

Designation	Stock		ØD	H	W	L	S	h	Inserts	Clamp	Clamp Screw	Wrench
	R	L										
CSGNR/L	2020B-L09RW-D17		17	20	20	140	22	20	SNGN0903WR/L	CH5R1	CHX0510	HW30L
	2020B-L09RW-D22		22	20	20	140	22	20	SNGN0903WR/L	CH5R1	CHX0510	HW30L


● : Stock item



CSBN...BS Type




SNGN

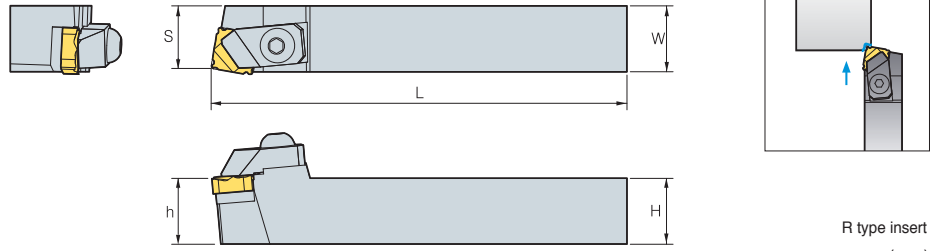


Designation	Stock		H	W	L	S	h	Inserts	Clamp	Clamp Screw	Shim	Shim Screw	Wrench
	R	L											
CSBNR/L 2023B-L12BS			20	23	140	21	20	SNGN1204SR/L	CH6N1B	BHA0620	SS42CB	SS0308	HW50L
			25	25	140	23	25	SNGN1504SR/L	CH6N1B	BHA0620	SS52CB	SS0408	HW50L

● : Stock item

CSKN...BS Type




SNGN

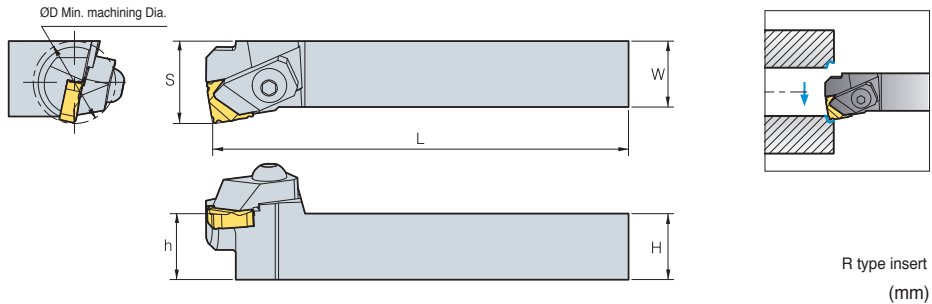


Designation	Stock		ØD	H	W	L	S	h	Inserts	Clamp	Clamp Screw	Shim	Shim Screw	Wrench
	R	L												
CSKNR/L 1622B-L09BS-D14			14	16	22	140	16	16	SNGN0903SR/L	CH6R/L2B	BHA0620	-	-	HW50L
			26	20	22	140	27	20	SNGN1204SR/L	CH6R/L1B	BHA0620	SS42CB	SS0308	HW50L
			35	25	25	140	31	25	SNGN1504SR/L	CH6R/L3B	BHA0620	SS52CB	SS0408	HW50L

● : Stock item

CTGN...BS Type




TNGN

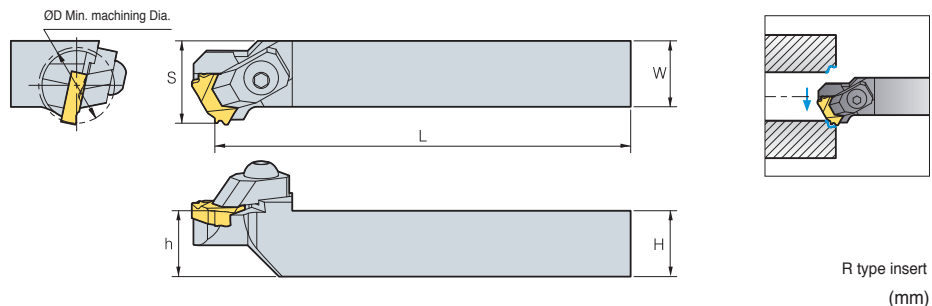



Designation	Stock		ØD	H	W	L	S	h	Inserts	Clamp	Clamp Screw	Shim	Shim Screw	Wrench
	R	L												
CTGNR/L 2021B-K22BS-D25			25	20	21	140	30	20	TNGN2204SR/L	CH6R/L7B	BHA0620	ST42CB	SS0408	HW50L

● : Stock item

SPB-S Type



SP

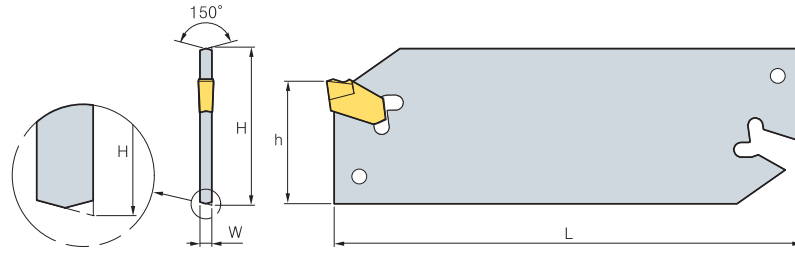

(mm)

Designation	Stock	H	W	L	h	Inserts	Wrench
SPB 1626-S		26	1.3	110	21	SP160	SW15S
1826-S		26	1.5	110	21	SP180	
226-S	●	26	1.6	110	21	SP200, SP200R/L	
326-S	●	26	2.4	110	21	SP300, SP300R/L	
426-S	●	26	3.2	110	21	SP400, SP400R/L	
526-S		26	4.0	110	21	SP500, SP500R/L	
626-S		26	5.2	110	21	SP600, SP600R/L	
1632-S		32	1.3	150	25	SP160	
1832-S		32	1.5	150	25	SP180	
232-S	●	32	1.6	150	25	SP200, SP200R/L	
332-S	●	32	2.4	150	25	SP300, SP300R/L	
432-S	●	32	3.2	150	25	SP400, SP400R/L	
532-S	●	32	4.0	150	25	SP500, SP500R/L	
632-S	●	32	5.2	150	25	SP600, SP600R/L	

● : Stock item

Inserts


Application	Picture	Designation	Coated										Un-coated	Dimensions (mm)			Configuration	
			NC3120	NC3220	NC3030	NCM325	NC5330	NC9020	PC3500	NC500H	PC8110	PC5300	PC9030	PC6510	A30	W		l
Parting tools		SP 160													1.6	7.8	0.16	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>R type</p> </div> <div style="text-align: center;"> <p>Standard</p> </div> </div> <div style="margin-top: 20px;"> <p>L type</p> <p>W = ±0.1</p> </div>
		180													1.8	9.3	0.16	
		200		●	●	●	●				●	●	●		2.2	9.3	0.2	
		200R		●	●								●		2.2	9.3	0.2	
		200L											●		2.2	9.3	0.2	
		300		●	●	●	●	●			●	●	●	●	3.1	11.3	0.2	
		300R		●	●	●					●				3.1	11.3	0.2	
		300L			●										3.1	11.3	0.2	
		400		●	●	●	●	●			●	●	●	●	4.1	11.3	0.25	
		400R		●	●	●					●				4.1	11.3	0.25	
		400L			●										4.1	11.3	0.25	
		500		●	●	●	●				●	●	●	●	5.1	11.4	0.3	
		500R									●				5.1	11.4	0.3	
		500L												●	5.1	11.4	0.3	
		600		●	●		●					●		●	6.4	11.4	0.35	
600R												●	6.4	11.4	0.35			
600L												●	6.4	11.4	0.35			

● : Stock item




Machining Race-way

▶ KORIC... R/L Type

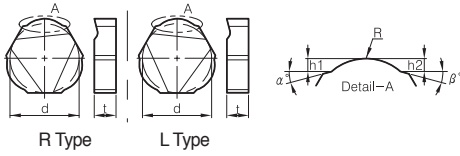

		d	t	R	h ₁	h ₂	α°	β°
KORIC	2204R/L	12.7	4.76					
	2704R/L	15.875	4.76					
	3306R/L	19.05	6.0					
	3806R/L	22.225	6.0					
	4408R/L	25.4	8.0					


▶ SNGN... WR/L Type

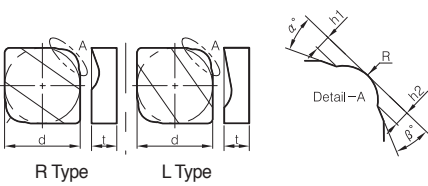

		d	t	R	h ₁	h ₂	α°	β°
SNGN	0903WR/L	9.525	3.18					
	1504WR/L	15.875	4.76					
	1905WR/L	19.05	5.56					


Machining for Bearing shield

▶ SNGN...SR/L Type




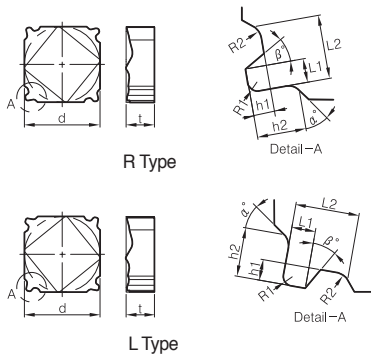

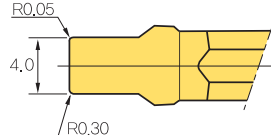
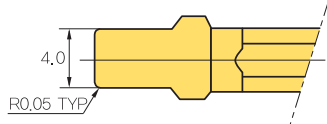
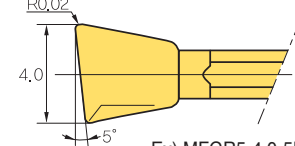
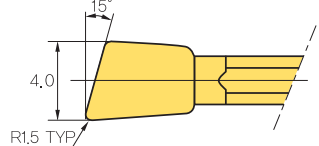
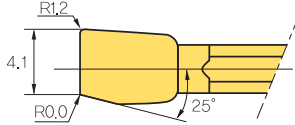


		d	t	L ₁	L ₂	h ₁	h ₂	R ₁	R ₂	α°	β°
SNGN	0903SR/L	9.525	3.18								
	1204SR/L	12.7	4.76								
	1504SR/L	15.875	4.76								

▶ TNGN...SR/L Type

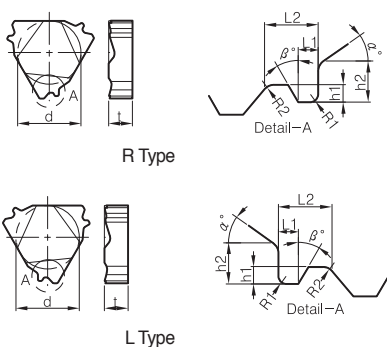

		d	t	L ₁	L ₂	h ₁	h ₂	R ₁	R ₂	α°	β°
TNGN	02204SR/L	12.7	4.76								

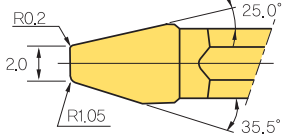Code system	Configuration
<p>M F G N 4 - 0.5R - 30D</p> <p>① ② ③ ④ ⑤ ⑥ ⑦</p> <p>① Multi ② Forming ③ Grinding ④ Feed Direction ⑤ Clamp part : 4mm ⑥ Nose Radius : 0.5 ⑦ Degree : 30°</p>	 <p>Ex) MFGN4-0.5R-30D</p>
<p>MFGN4 - 0.5R - L 50 D - R 30D</p> <p>① ② ③ ④ ⑤ ⑥</p> <p>① Refer to No. 1 ② Nose Radius : 0.5 ③ Left ④ Degree : 50° ⑤ Right ⑥ Degree > 30°</p>	 <p>Ex) MFGN4-0.5R-L50D-R30D</p>
<p>MFGN4 - 2.0 - R 020 250 - L 105 335</p> <p>① ② ③ ④ ⑤ ⑥ ⑦ ⑧</p> <p>① Refer to No. 1 ② Width of cutting edge : 2.0mm ③ Right ④ Nose Radius : 0.20 ⑤ Degree : 25.0° ⑥ Left ⑦ Nose Radius : 1.05 ⑧ Degree : 35.5°</p>	 <p>Ex) MFGN4-2.0-R020250-L105335</p>
<p>MFGN5 - 4.0R F</p> <p>① ② ③</p> <p>① Refer to No. 1 ② Radius : 4.0 ③ Front(Concave)</p>	 <p>Ex) MFGN5-4.0RF</p>
<p>MFGN5 - 4.0R B</p> <p>① ② ③</p> <p>① Refer to No. 1 ② Radius : 4.0 ③ Back(Concave)</p>	 <p>Ex) MFGN5-4.0RB</p>
<p>MFGN5 - 4.0 - R 005 - L 030</p> <p>① ② ③ ④ ⑤ ⑥</p> <p>① Refer to No. 1 ② Width of cutting edge : 4.0mm ③ Right ④ Nose Radius : 0.05 ⑤ Left ⑥ Nose Radius : 0.30</p>	 <p>Ex) MFGN5-4.0-R005-L030</p>
<p>MFGN5 - 4.0 - 0.05 R</p> <p>① ② ③</p> <p>① Refer to No. 1 ② Width of cutting edge: 4.0mm ③ Nose Radius : 0.05</p>	 <p>Ex) MFGN5-4.0-0.05R</p>
<p>MFG R 5 - 4.0 - 5D - R 002 - L 115</p> <p>① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨</p> <p>① Refer to No. 1 ② Right ③ Clamp part: 5mm ④ Width of cutting edge : 4.0mm ⑤ Lead angle : 5° ⑥ Right ⑦ Nose Radius : 0.02 ⑧ Left ⑨ Nose Radius : 1.15</p>	 <p>Ex) MFGR5-4.0-5D-R002-L115</p>
<p>MFG L 5 - 4.0 - 15D - 1.5R</p> <p>① ② ③ ④ ⑤ ⑥</p> <p>① Refer to No. 1 ② Left ③ Clamp part: 5mm ④ Width of cutting edge : 4.0mm ⑤ Lead angle : 15° ⑥ Right Nose Radius : 1.5</p>	 <p>Ex) MFG L5-4.0-15D-1.5R</p>
<p>MFG R 5 - 4.10 - 25D - R012 - L000</p> <p>① ② ③ ④ ⑤ ⑥ ⑦</p> <p>① Refer to No. 1 ② Right ③ Clamp part: 5mm ④ Width of cutting edge : 4.1mm ⑤ Degree : 25° ⑥ Right Nose Radius : 1.2 ⑦ Left Nose Radius : 0.0</p>	 <p>Ex) MFG R5-4.10-25D-R012-L000</p>



Code system

KP 27 064 - R0.425 N3

KORLOY PULLEY

ØD

W

R1

No. of flutes

Ex)

I.C

T

R

Z

Ø 12.7


6.4

0.425

3

► Special types are available for quotation


Insert for machining of pulley

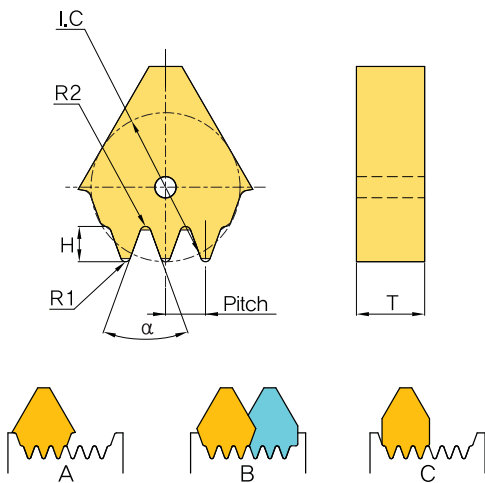


Standard designation

Specifications


**KP27064-R0.35-N3
(DF356-3B)**




**KP27064-R0.43-N3
(DF356-3SR)**




**KP27064-R0.35-N4
(DF356-4B)**




**KP27064-R0.35-N4-A
(DF356-4X)**




**KP27064-R0.375-N5
(DF356-5B)**



UF320




VF13M522

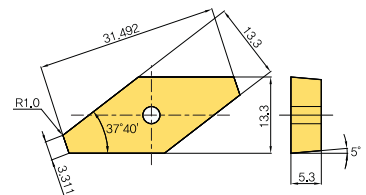

► For reference : KS specifications and cods for V-pulley for vehicles(PK)

Diameter

Code system

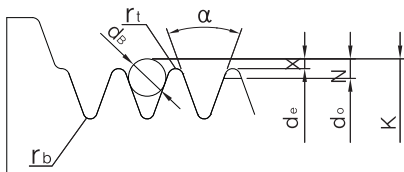

P 6 PK96.3

Pulley

No. of groove

Cross section of groove

Effective diameter(mm)

- d_e : Effective diameter
- d_o : Outer diameter
- K : Diameter of ball or rod
- d_a : Diameter of ball for inspection or rod

Cross section		PH	PJ	PK	PL	PM
Pitch of groove		1.6±0.03	2.34±0.03	3.56±0.05	4.7±0.05	9.4±0.08
Groove angle	±0.5°	40°	40°	40°	40°	40°
r_t	Min.	0.15	0.2	0.25	0.4	0.75
r_o	Max.	0.3	0.4	0.5	0.4	0.75
d_b	±0.01	1	1.5	2.5	3.3	6.4
Application		electrical, electronics instrument	Machine with light duty, Compressor, Pump	Vehicles	Small agricultural machine	Large agricultural machine

D

THREADING

Korloy threading tools are available for machining of various shapes of thread at various pitches with high quality.



Threading Code System

- D02 Threading Holder Code System
- D02 Threading Insert Code System

Threading

- D03 Technical Information for Threading
- D09 Threading Insert with Chip Breaker

Thread Inserts

- D10 Partial Profile 60°
- D11 Partial Profile 55°
- D12 ISO Metric
- D16 American UN
- D18 With Worth
- D22 British Standard Pipe Thread
- D22 National Pipe Thread
- D23 National Pipe Thread-Dry seal
- D23 Round DIN 405
- D24 Trapez DIN 103

Thread Inserts

- D24 American ACME
- D25 Stub ACME
- D26 UNJ (Unified Constant Thread)
- D28 American Buttress (ABUT)
- D28 British Buttress (BBUT)
- D29 Metric Buttress (SAGE) / API
- D30 API Buttress Casing (BUT)
- D30 API Round Casing & Tubing (APIRD)
- D30 Extreme Line Casing (EL)

Thread Holders

- D31 External Holder
- D32 Internal Holder
- D33 Vertical Type Holder

Thread Milling

- D34 Technical Information for Thread Milling
- D44 Thread Milling Inserts
- D49 Thread Milling Holder


Solid Threading Endmills

- D50 Technical Information for Solid Threading Endmills
- D51 Solid Threading Endmills



THREADING

Threading Holder Code System

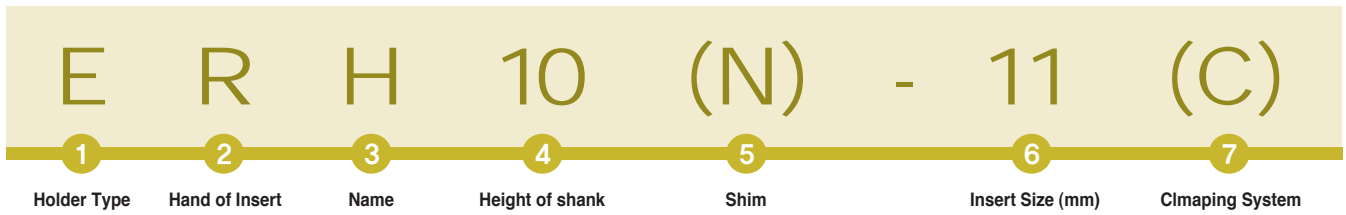

1 Holder Type
E R H 10 (N) - 11 (C)

E : For External I : For Internal


2 Hand of Insert
E R H 10 (N) - 11 (C)


R : Right handed L : Left handed

3 Name
E R H 10 (N) - 11 (C)

H : Holder

4 Height of shank
E R H 10 (N) - 11 (C)

 - External
8, 10, 12, 16, 20, 25, 32, 40, 50

 - Internal
10, 12, 13, 16, 20, 25, 32, 49, 50, 60


• Refer to the specification for shank diameter information

5 Shim
E R H 10 (N) - 11 (C)

No code : Shim required
 N : No shim required

6 Insert Size (mm)
E R H 10 (N) - 11 (C)


11 : d=6.35
 16 : d=9.525
 22 : d=12.7
 27 : d=15.875



7 Clamping System
E R H 10 (N) - 11 (C)

No code : Screw on system
 C : Clamp on system

Threading Insert Code System

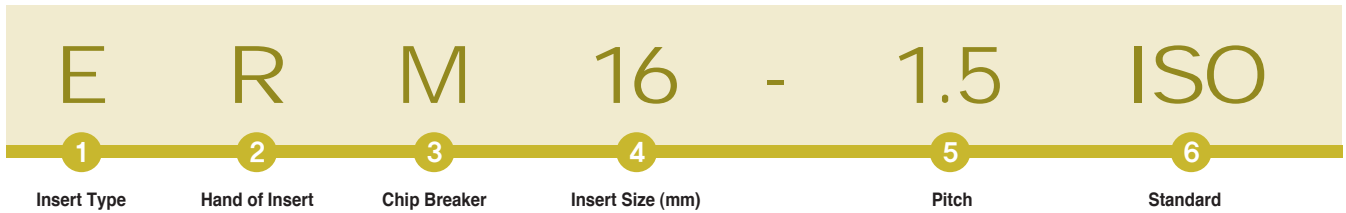

1 Insert Type
E R M 16 - 1.5 ISO

E : External thread I : Internal thread

2 Hand of Insert
E R M 16 - 1.5 ISO


R : Right handed L : Left handed



3 Chip Breaker
E R M 16 - 1.5 ISO

M : With Chip Breaker

4 Insert Size (mm)
E R M 16 - 1.5 ISO

11 : d=6.35
 16 : d=9.525
 22 : d=12.7
 27 : d=15.875



Insert Shape
 <ER/IR>  <ERM/IRM>

5 Pitch
E R M 16 - 1.5 ISO

Full profile		Partial profile	
mm	tpi	mm	tpi
0.35-6.0	72-3	A 0.5-1.5	48-16
		AG 0.5-3.0	48-8
		G 1.75-3.0	14-8
		N 3.5-5.0	7-5
		Q 5.5-6.0	4.5-4

6 Standard
E R M 16 - 1.5 ISO

Partial profile 60°
 Partial Profile 55°
 ISO Metric (Full Profile)
 American UN (Full Profile) UN, UNC, UNF, UNEF
 Whitworth (Full Profile) BSW, BSF, BSP
 British Standard Pipe thread (Full Profile) BSPT
 National Pipe Thread (Full Profile) NPT
 National Pipe Threads-Dryseal (Full Profile) NPTF
 Round DIN 405
 Trapez DIN 103
 American ACME
 Stub ACME
 UNJ
 American Buttress
 British Buttress
 Metric Buttress-Sagengewinde
 API
 API Buttress Casing
 API Round Casing & Tubing
 EL-Extreme Line



▶ Special Features

External Thread

A thread on the external surface of a cylinder screw or cone

Depth of Thread


The distance between the crest and root measured from normal to the axis

Pitch

The distance between the corresponding points on adjacent thread forms measured parallel to the axis. This distance can be defined in millimeters or by the tpi (threads per inch), which is the reciprocal of the pitch

Nominal Diameter

The diameter of which the diameter limits are derived by the application of deviation allowances and tolerances

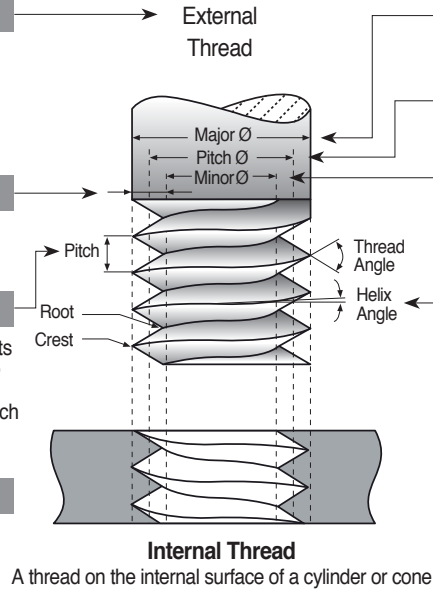

Major Diameter

The largest diameter of a screw thread

Pitch Diameter

On a straight thread, the diameter of an imaginary cylinder, the surface of which cuts the thread forms where the width of the thread and groove are equal

Minor Diameter

The smallest diameter of a screw thread

Helix Angle

For a straight thread, where the lead of the thread and the pitch diameter circle circumference form a right angled triangle, the helix angle is the angle opposite of the lead


Straight Thread

A thread formed on a cylinder

Taper Thread


A thread formed on a cone

Left handed thread

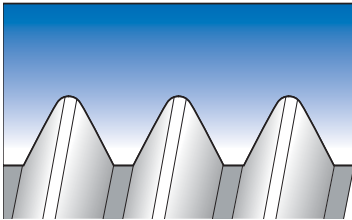


A thread which, when viewed axially, winds in a counter clockwise and receding direction. All left handed threads are designated LH

Right handed thread



A thread which, when viewed axially, winds in a clockwise and receding direction
Threads are always right handed unless they are specified

The Helix Angle (β)

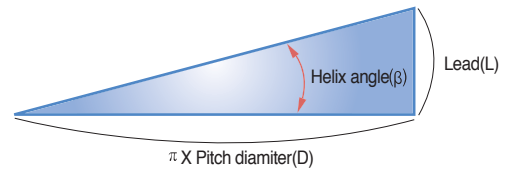


For a straight thread, where the lead of the thread and the pitch diameter circle circumference form a right angled triangle, the helix angle is the angle opposite of the lead


▶ Machining a Multi-start Thread

▶ A thread in which the lead is an integral multiple, greater than one, of the pitch. A multi-start thread permits a more rapid advance without a coarser (larger) thread form


First Start Machined



Second Start Machined




Third Start Machined (Final, 3 Starts Thread)

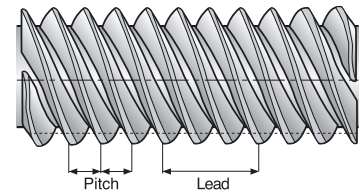


▶ Insert Profile Style

Partial Profile




The V partial profile insert cuts without topping the outer diameter of the thread. The same insert can be used for a range of different thread pitches which have a common thread angle

Full Profile




The full profile insert will form a complete thread profile including the crest. For every thread pitch and standard, a separate insert is required

Full Profile for Fine Pitches



The full profile for Fine Pitches will form a complete thread
The topping of the outer diameter is generated by second tooth


Semi Full




The Semi profile insert will form a complete thread including crest radius but without topping the outer diameter
Mainly used for trapezoidal profiles

▶ Thread Turning Method

Thread	Inserts & Tool holder	Rotation	Feed Direction	Helix Method	Drawing No.
Right Hand External	EX RH	Counter clockwise	Towards chuck	Regular	1
	EX LH	Clockwise	From chuck	Reversed	2
Right Hand Internal	IN LH	Counter clockwise	Towards chuck	Regular	3
	IN LH	Clockwise	From chuck	Reversed	4
Left Hand External	EX LH	Clockwise	Towards chuck	Regular	5
	EX RH	Counter clockwise	From chuck	Reversed	6
Left Hand Internal	IN LH	Clockwise	Towards chuck	Regular	7
	IN RH	Counter clockwise	From chuck	Reversed	8

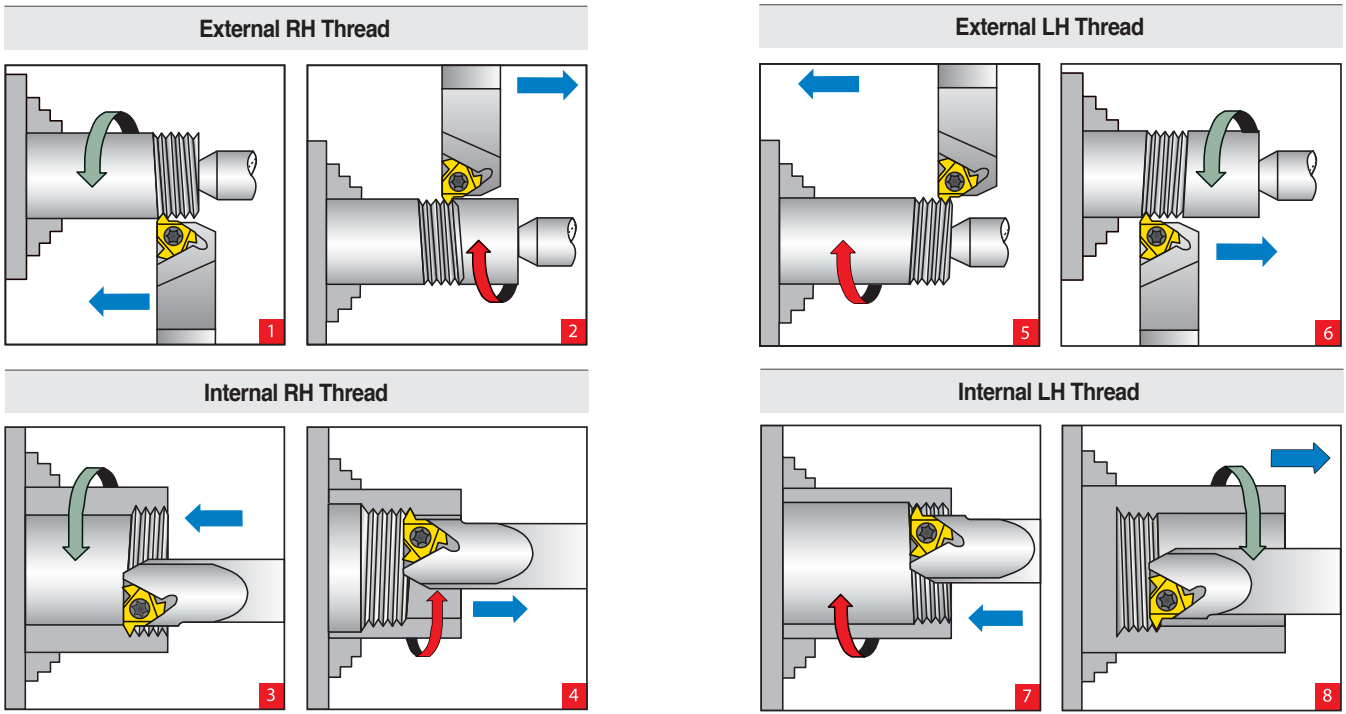

▶ Calculating the Helix Angle (β)




The helix angle is calculated by the following formula :




$$\beta = \tan^{-1} \frac{P \times N}{\pi \times D}$$

β - Helix angle(°)
 P - Pitch(mm)
 N - No. of starts
 D - Pitch diameter(mm)
 Lead = P x N

The helix angle can also be found from the diagram below

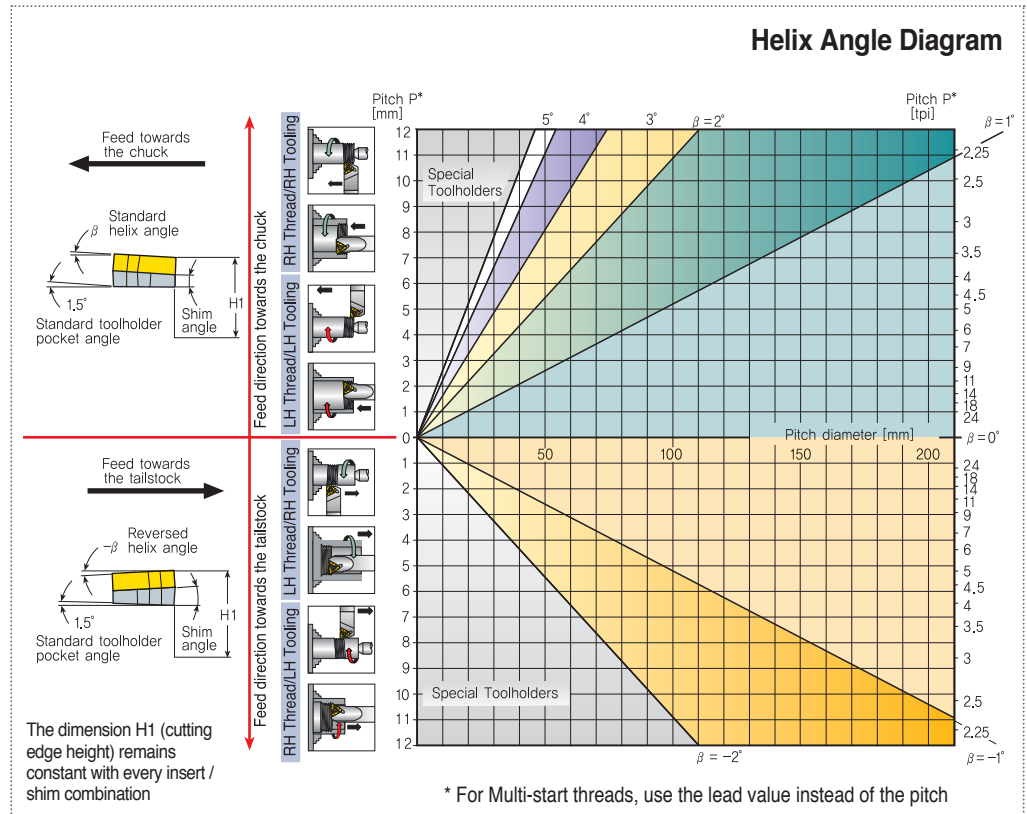

▶ Thread Infeed Method

Radial Infeed	Flank Infeed (modified)	Alternate Flank Infeed
 <p>Radial infeed is the simplest and quickest method. The feed is perpendicular to the turning axis, and both flanks of the insert perform the cutting operation. Radial infeed is recommended in 3 cases</p> <ul style="list-style-type: none"> • when the pitch is smaller than 16 tpi • for material with short chips • for work with hardened material 	 <p>Flank infeed is recommended in the following cases</p> <ul style="list-style-type: none"> • When the thread pitch is greater than 16 tpi. Using the radial method, the effective cutting edge length is too large, resulting in chatter. For TRAPEZ and ACME. The radial method results in three cutting edges, making chip flow very difficult 	 <p>Use of the alternate flank method is recommended especially in large pitches and for materials with long chills</p> <ul style="list-style-type: none"> • This method divides the load equally on both flanks, resulting in equal wear along the cutting edges. Alternate flank infeed requires more complicated programming, and is not available on all lathes




▶ Shim

Standard Shim	Insert Size		Helix angle 1.5°	d		12.7		15.875	
	ATE	ATI		L		22		27	
	Holder			ER(L)H	IR(L)H	ER(L)H	IR(L)H	ER(L)H	IR(L)H
	Ordering Code			ATE16	ATI16	ATE22	ATI22	ATE27	ATI27
※ Standard shim has lead angle 1.5°									

▶ Application grade

Grade	Features	Available insert type
PC5300	<ul style="list-style-type: none"> • PVD Universal Grade For chip breaker type only Stable machining on a wide application due to fine-grained carbide substrate with balanced heat resistance and toughness Excellent wear resistance and oxidation resistance due to AlTiN coating film Outstanding performance on high speed machining 	ERM/IRM (Insert with Chip breaker)
PC3030T	<ul style="list-style-type: none"> • General Grade A tough sub-micron substrate with TiAlN coating provides good fracture toughness and excellent wear resistance Outstanding performance on STS and hard to cut materials 	ER/IR (Ground insert)

▶ Recommended Cutting Speed as per workpiece(vc)

ISO	Work piece	Recommended Cutting Speed (vc)
P	Carbon steel, Alloy steel, Cast Steel	
M	Stainless steel, Heat resistant steel, Titanium alloy steel	
K	Carbon Iron, Aluminum, Cast Steel, Copper	


D Technical Information for Threading

▶ Recommended Cutting Speed as per workpiece(vc)

Material		Hardness Brinell (HB)	ISO vc(m/min) PC3030T
P	Carbon steel	Low carbon (C=0.1-0.25 %)	125
		Medium carbon (C=0.25-0.55 %)	150
		High carbon (C=0.55-0.85 %)	170
	Low alloy steel (alloying elements ≤ 5%)	Non hardened	180
		Hardened	275
		Hardened	350
	High alloy steel (alloying elements > 5%)	Annealed	200
		Hardened	325
Cast steel	Low alloy (alloying elements <5%)	200	
	High alloy (alloying elements >5%)	225	
M	Stainless steel Ferritic	Non hardened	200
		Hardened	330
	Stainless steel Austenitic	Austenitic	180
		Super austenitic	200
	Stainless steel Cast ferritic	Non hardened	200
		Hardened	330
	Stainless steel Cast austenitic	Austenitic	200
		Hardened	330
	High temperature alloy	Annealed (Iron based)	200
		Aged (Iron based)	280
		Annealed (Nickel or Cobalt based)	250
		Aged (Nickel or Cobalt based)	350
Titanium alloy	99.5% pure Titanium	400Rm	
	Titanium alloy	1050Rm	
K	Extra hard steel	Hardened & tempered	55HRC
	Malleable cast iron	Ferritic (short chips)	130
		Pearlitic (long chips)	230
	Gray cast iron	Low tensile strength	180
		High tensile strength	260
	Nodular SG iron	Ferritic	160
		Pearlitic	260
	Aluminum alloy Wrought	Non aging	60
		Aged	100
	Aluminum alloy	Cast	75
Cast & aged		90	
Cast Si 13-22%		130	
Copper and copper alloy	Brass	90	
	Bronze and non leaded copper	100	

▶ Calculation of N [RPM]

$$n = \frac{vc \times 1000}{\pi \times D} \quad vc = \frac{\pi \times D \times n}{1000}$$

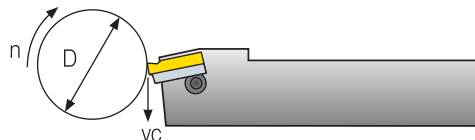

n - Revolution Per Minute [min⁻¹]
vc - Cutting Speed [m/min]
D - Workpiece Diameter [mm]


▶ Number of Passes

Pitch	mm	0.50	0.75	1.00	1.25	1.50	1.75	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	8.00
	tpi	48	32	24	20	16	14	12	10	8	7	6	5.5	5	4.5	4	3
No. of passes		4~6	4~7	4~8	5~9	6~10	7~12	7~12	8~14	9~16	10~18	11~18	11~19	12~20	12~20	12~20	15~24

※ One cutting depth is calculated by total cutting depth divided into machining times
ex) ER16-1.5ISO, hmin 0.92 : If 10times machining, one cutting depth is 0.092(0.92/10)




Step by step Thread Turning




Application Thread : External Right Hand ISO Metric M40 x 2.5
Material : 4140 (25 HRC)

1 Choose the Thread Turning Method



Feed direction towards the chuck was chosen
Therefore an external right hand insert and an external right hand holder will be used


2 Choose the Insert Size



Chosen insert : **ER16 - 2.5 ISO**

Insert Size	Pitch	Ordering Code	Shim	Tool holder
d	mm	RH (RH)	RH (RH)	
9.525	2.5	ER16-2.5ISO	ATE16	ERH□□-16


3 Choose the Tool holder



Chosen tool holder : **ERH 25 - 16**

Insert Size	Ordering code	Dimensions(mm)				
d	RH (RH)	H=h	W	S	L	l
9.525	ERH25-16	25	25	25	153.6	30

4 Determine the Helix Angle

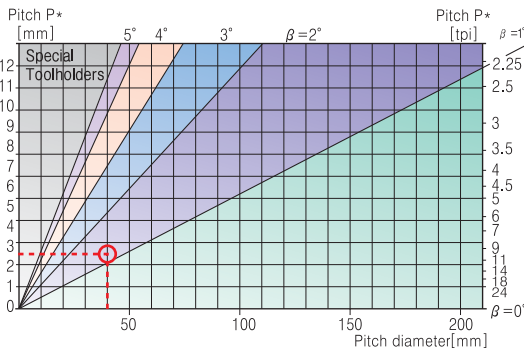

From the table, using a pitch of 2.5 mm (10 tpi) and a workpiece diameter of 40mm (1.57"), we find the helix angle to be 1.5°

5 Choose the Correct Shim

Shim Chosen : **ATE16**

Resultant Helix Angle		1.5°
Insert Size	d	9.525
	L	16
Ordering Code		ATE16

6 Choose the Carbide Grade and Cutting Speed

Carbide grade chosen : PC3030T / Cutting speed : 140m/min

Material	HB	vc(m/min)	
		PC3030T	
P Low alloy steel (alloying elements ≤ 5%)	Non hardened	180	85~145
	Hardened	275	75~140
	Hardened	350	70~135

7 Determine the Number of Passes

Carbide grade chosen : PC3030T
Cutting speed : 140m/min

Pitch	mm	1.50	1.75	2.00	2.50	3.00	3.50	4.00
	tpi	16	14	12	10	8	7	6
No. of passes		6 ~ 10	7 ~ 12	7 ~ 12	8 ~ 14	9 ~ 16	10 ~ 18	11 ~ 18

8 Summary

Thread type	ISO M40 x 2.5 External Right Hand
1. Feed Direction	Towards the chuck
2. Insert and Grade	ER16-2.5 ISO, PC3030T
3. Tool holder	ERH25-16
4. Helix Angle	1.5°
5. Shim	ATE16
6. Cutting Speed	140 m/min
7. Number of Passes	10

D Technical Information for Threading

▶ Cutting Condition depending on

Workpiece	Material Type		Coolant	Coolant Type		
	Material Dimension			Holders	Holder Cross Section Area	
	Diameter and Length Chipflow Character				Holder Overhang	
	Material Hardness				Through Coolant Option	
Thread Application	External or Internal		Shank Type: Carbide, Alloy,	Shank Type: Carbide, Alloy,		
	Profile Shape			Insert	Carbide Implant Grade	
	Surface Finish				Profile Shape: Pitch and Depth	
Machine	Machine Stability		Nose Radius			
	Max. RPM		Chipbreaker Style			
	Clamping System Stability					

▶ Trouble Shooting

Problem	Possible Cause	Solution
 Increased flank wear	Cutting speed too high Depth of cut too low/too many passes Unsuitable carbide grade Insufficient cooling	→ Reduce cutting speed/ use coated insert → Increase the depth of cut per pass → Use a coated carbide grade → Increase coolant flow rate
 Uneven cutting edge wear	Incorrect helix angle Wrong infeed method	→ Choose the correct shim → Use the Alternating Flank Infeed method
 Extreme plastic deformation	Depth of cut too large Insufficient cooling Cutting speed too high Unsuitable carbide grade Nose radius too small	→ Decrease depth of cut/ increase number of passes → Increase coolant flow rate → Reduce cutting speed → Use a tougher carbide → Use an insert with a larger radius, if possible
 Cutting edge breakage	Depth of cut too large Extreme plastic deformation Insufficient cooling Unsuitable carbide grade Instability	→ Decrease depth of cut/ increase number of passes. → Use a tougher carbide → Increase flow rate and/ or correct flow direction → Use a tougher carbide → Check stability of the system
 Built-up edge	Incorrect cutting speed Unsuitable carbide grade	→ Change the cutting speed → Use a coated carbide
 Thread profile is too shallow	The tool is not at the workpiece axis height Insert is not machining the thread crest Worn insert	→ Change tool height → Measure the workpiece diameter → Change the cutting edge sooner
 Poor surface quality	Too low cutting speed Wrong shim Flank infeed method is not appropriate	→ Increase cutting speed → Choose correct shim → Use the alternate flank or radial infeed method

Threading insert with chip breaker

- Features**
- ▶ Economical insert
 - ▶ Good toughness and high accuracy as ground type inserts
 - ▶ Exclusive insert design improves chip control.
 - ▶ New grade for general application of various kinds of workpieces

Type	Ground insert		Insert with a chip breaker			
C/B Code	None		None		U	
Designation	ER16-1.5ISO		ERM16-1.5ISO		ERM16-1.5ISO-U	
Machining	External	Internal	External	Internal	External	Internal
Insert Shape						
Chip Shape						
Class	P, M, K, N, S		P, M, K		P, M, K	
Application	G-Class		M-Class		M-Class	
Features	<ul style="list-style-type: none"> • Groove-shaped chip breaker with superior chip evacuation lowers cutting load. • Enables high precision machining. • Applicable for machining of various shapes of threads. • Applicable for machining of various workpieces. 		<ul style="list-style-type: none"> • Unique 3 dimensional chip breaker improves machinability with good chip control. • Excellent cutting edge treatment technology ensures high precision sharp cutting edge. 		<ul style="list-style-type: none"> • Groove-shaped chip breaker with superior chip evacuation lowers cutting load. • Reduces machining pass by 10~30%. • Excellent cutting edge treatment achieves high precision sharp cutting edge. 	

Machining Example

Korloy		ERM16-1.5ISO [PC3030T]	IRM16-2.0ISO [PC3030T]
Competitor tools		ERM16-1.5ISO [K-Maker]	IRM16-2.0ISO [S-Maker]
Workpiece	Material	SCM440	STS304
	Figure		
Cutting condition	Cutting speed (m/min)	63	120
	Pass	8	9
	Machining	Radial infeed	Radial infeed
	Pitch	1.5	2.0
Coolant		Wet	Wet
Result	<p>Increased tool life with good chip breaking</p>	<p>Prevention outbreak damage of insert due to smooth chip control</p>	

Partial profile 60°

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch		Dimensions (mm)					Picture
					(mm)	(tpi)	d	L	r	x	f	
External	ER 11-A60	●	EL 11-A60	●	0.5~1.5	48~16	6.35	11	0.05	0.8	0.9	
	16-A60	●	16-A60	●	0.5~1.5	48~16	9.525	16	0.05	0.8	0.9	
	16-G60	●	16-G60	●	1.75~3.0	14~8	9.525	16	0.27	1.2	1.7	
	16-AG60	●	16-AG60	●	0.5~3.0	48~8	9.525	16	0.08	1.2	1.7	
	22-N60	●	22-N60	●	3.5~5.0	7~5	12.7	22	0.53	1.7	2.5	
	27-Q60	●	27-Q60	●	5.5~6.0	4.5~4	15.875	27	0.64	2.1	3.1	
Internal	IR 11-A60	●	IL 11-A60	●	0.5~1.5	48~16	6.35	11	0.05	0.8	0.9	
	16-A60	●	16-A60	●	0.5~1.5	48~16	9.525	16	0.05	0.8	0.9	
	16-G60	●	16-G60	●	1.75~3.0	14~8	9.525	16	0.16	1.2	1.7	
	16-AG60	●	16-AG60	●	0.5~3.0	48~8	9.525	16	0.05	1.2	1.7	
	22-N60	●	22-N60	●	3.5~5.0	7~5	12.7	22	0.30	1.7	2.5	
	27-Q60	●	27-Q60	●	5.5~6.0	4.5~4	15.875	27	0.30	1.8	2.7	

Applicable holders, D31, D32

● : Stock item

Partial profile 60° (M Chip Breaker)

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch		Dimensions (mm)					Picture
						(mm)	(tpi)	d	L	r	x	f	
External	ERM 16-A60	●				0.5~1.5	48~16	9.525	16	0.05	0.8	0.9	
	16-G60	●				1.75~3.0	14~8	9.525	16	0.27	1.2	1.7	
	16-AG60	●				0.5~3.0	48~8	9.525	16	0.08	1.2	1.7	
	22-N60	●				3.5~5.0	7~5	12.7	22	0.53	1.7	2.5	
Internal	IRM 11-A60	●				0.5~1.5	48~16	6.35	11	0.08	0.8	0.9	
	16-A60	●				0.5~1.5	48~16	9.525	16	0.08	0.8	0.9	
	16-G60	●				1.75~3.0	14~8	9.525	16	0.12	1.2	1.7	
	16-AG60	●				0.5~3.0	48~8	9.525	16	0.08	1.2	1.7	
	22-N60	●				3.5~5.0	7~5	12.7	22	0.30	1.7	2.5	

Applicable holders, D31, D32

● : Stock item

Partial profile 60° (U Chip Breaker) *New*

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch		Dimensions (mm)					Picture
						(mm)	(tpi)	d	L	r	x	f	
External	ERM 16-AG60-U					0.5~3.0	48~8	9.525	16	0.08	1.2	1.7	
Internal	IRM 16-AG60-U					0.5~3.0	48~8	9.525	16	0.08	1.2	1.7	

Applicable holders, D31, D32

● : Stock item

Partial profile 55°

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch		Dimensions (mm)					Picture
					(mm)	(tpi)	d	L	r	x	f	
External	ER 11-A55		EL 11-A55		0.5~1.5	48~16	6.35	11	0.05	0.8	0.9	
	16-A55	●	16-A55		0.5~1.5	48~16	9.525	16	0.05	0.8	0.9	
	16-G55	●	16-G55		1.75~3.0	14~8	9.525	16	0.21	1.2	1.7	
	16-AG55	●	16-AG55	●	0.5~3.0	48~8	9.525	16	0.07	1.2	1.7	
	22-N55	●	22-N55		3.5~5.0	7~5	12.7	22	0.43	1.7	2.5	
	27-Q55		27-Q55		5.5~6.0	4.5~4	15.875	27	0.60	2.0	2.9	
Internal	IR 11-A55	●	IL 11-A55		0.5~1.5	48~16	6.35	11	0.05	0.8	0.9	
	16-A55	●	16-A55		0.5~1.5	48~16	9.525	16	0.05	0.8	0.9	
	16-G55	●	16-G55		1.75~3.0	14~8	9.525	16	0.21	1.2	1.7	
	16-AG55	●	16-AG55		0.5~3.0	48~8	9.525	16	0.07	1.2	1.7	
	22-N55	●	22-N55		3.5~5.0	7~5	12.7	22	0.43	1.7	2.5	
	27-Q55		27-Q55		5.5~6.0	4.5~4	15.875	27	0.60	2.0	2.9	

Applicable holders D31, D32

● : Stock item

Partial profile 55° (M Chip Breaker)

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch		Dimensions (mm)					Picture
						(mm)	(tpi)	d	L	r	x	f	
External	ERM 16-A55	●				0.5~1.5	48~16	9.525	16	0.08	0.8	0.9	
	16-G55	●				1.75~3.0	14~8	9.525	16	0.21	1.2	1.7	
	16-AG55	●				0.5~3.0	48~8	9.525	16	0.07	1.2	1.7	
	22-N55	●				3.5~5.0	7~5	12.7	22	0.43	1.7	2.5	
Internal	IRM 11-A55	●				0.5~1.5	48~16	6.35	11	0.08	0.8	0.9	
	16-A55	●				0.5~1.5	48~16	9.525	16	0.05	0.8	0.9	
	16-G55					1.75~3.0	14~8	9.525	16	0.08	1.2	1.7	
	16-AG55	●				0.5~3.0	48~8	9.525	16	0.08	1.2	1.7	
	22-N55	●				3.5~5.0	7~5	12.7	22	0.43	1.7	2.5	

Applicable holders D31, D32

● : Stock item

Partial profile 55° (U Chip Breaker) *New*

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch		Dimensions (mm)					Picture
						(mm)	(tpi)	d	L	r	x	f	
External	ERM 16-AG55-U					0.5~3.0	48~8	9.525	16	0.07	1.2	1.7	
Internal	IRM 16-AG55-U					0.5~3.0	48~8	9.525	16	0.08	1.2	1.7	

Applicable holders D31, D32

● : Stock item

ISO Metric

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (mm)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-0.35ISO		EL 11-0.35ISO		0.35	6.35	11	0.21	0.8	0.4	
	11-0.4ISO		11-0.4ISO		0.4	6.35	11	0.25	0.7	0.4	
	11-0.45ISO		11-0.45ISO		0.45	6.35	11	0.28	0.7	0.4	
	11-0.5ISO		11-0.5ISO		0.5	6.35	11	0.31	0.6	0.4	
	11-0.6ISO		11-0.6ISO		0.6	6.35	11	0.37	0.6	0.6	
	11-0.7ISO		11-0.7ISO		0.7	6.35	11	0.43	0.6	0.6	
	11-0.75ISO		11-0.75ISO		0.75	6.35	11	0.46	0.6	0.6	
	11-0.8ISO		11-0.8ISO		0.8	6.35	11	0.49	0.6	0.6	
	11-1.0ISO		11-1.0ISO		1.0	6.35	11	0.61	0.7	0.7	
	11-1.25ISO		11-1.25ISO		1.25	6.35	11	0.77	0.8	0.9	
	11-1.5ISO	●	11-1.5ISO		1.5	6.35	11	0.92	0.8	1.0	
	11-1.75ISO		11-1.75ISO		1.75	6.35	11	1.07	0.8	1.1	
	16-0.35ISO		16-0.35ISO		0.35	9.525	16	0.21	0.8	0.4	
	16-0.4ISO		16-0.4ISO		0.4	9.525	16	0.25	0.7	0.4	
	16-0.45ISO	●	16-0.45ISO		0.45	9.525	16	0.28	0.7	0.4	
	16-0.5ISO	●	16-0.5ISO	●	0.5	9.525	16	0.31	0.6	0.4	
	16-0.6ISO	●	16-0.6ISO		0.6	9.525	16	0.37	0.6	0.6	
	16-0.7ISO	●	16-0.7ISO		0.7	9.525	16	0.43	0.6	0.6	
	16-0.75ISO	●	16-0.75ISO		0.75	9.525	16	0.46	0.6	0.6	
	16-0.8ISO	●	16-0.8ISO		0.8	9.525	16	0.49	0.6	0.6	
	16-1.0ISO	●	16-1.0ISO	●	1.0	9.525	16	0.61	0.7	0.7	
	16-1.25ISO	●	16-1.25ISO		1.25	9.525	16	0.77	0.8	0.9	
	16-1.5ISO	●	16-1.5ISO	●	1.5	9.525	16	0.92	0.8	1.0	
	16-1.75ISO	●	16-1.75ISO		1.75	9.525	16	1.07	0.9	1.2	
	16-2.0ISO	●	16-2.0ISO	●	2.0	9.525	16	1.23	1.0	1.3	
	16-2.5ISO	●	16-2.5ISO		2.5	9.525	16	1.53	1.1	1.5	
	16-3.0ISO	●	16-3.0ISO		3.0	9.525	16	1.84	1.2	1.6	
	22-3.5ISO	●	22-3.5ISO		3.5	12.7	22	2.15	1.6	2.3	
	22-4.0ISO	●	22-4.0ISO	●	4.0	12.7	22	2.45	1.6	2.3	
	22-4.5ISO	●	22-4.5ISO		4.5	12.7	22	2.78	1.7	2.4	
	22-5.0ISO	●	22-5.0ISO		5.0	12.7	22	3.07	1.7	2.5	
	27-5.5ISO		27-5.5ISO		5.5	15.875	27	3.37	1.9	2.7	
27-6.0ISO		27-6.0ISO		6.0	15.875	27	3.68	2.0	2.9		

Applicable holders D31

● : Stock item

ISO Metric (M Chip Breaker)

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
						(mm)	d	L	hmin	X	f	
External	ERM 16-1.0ISO	●				1.0	9.525	16	0.61	0.7	0.7	
	16-1.25ISO					1.25	9.525	16	0.77	0.8	0.9	
	16-1.5ISO	●				1.5	9.525	16	0.93	0.8	1.0	
	16-1.75ISO	●				1.75	9.525	16	1.09	0.9	1.2	
	16-2.0ISO	●				2.0	9.525	16	1.25	1.0	1.3	
	16-2.5ISO	●				2.5	9.525	16	1.55	1.1	1.5	
	16-3.0ISO	●				3.0	9.525	16	1.87	1.2	1.6	

➡ Applicable holders D31

● : Stock item

ISO Metric (U Chip Breaker) *New*

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
						(mm)	d	L	hmin	X	f	
External	ERM 16-1.5ISO-U					1.5	9.525	16	0.93	0.8	1.0	
	16-2.0ISO-U					2.0	9.525	16	1.25	1.0	1.3	

➡ Applicable holders D31

● : Stock item



ISO Metric

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (mm)	Dimensions (mm)					Picture	
						d	L	hmin	X	f		
Internal	IR	11-0.35ISO	IL	11-0.35ISO	0.35	6.35	11	0.20	0.8	0.3		
		11-0.4ISO		11-0.4ISO	0.4	6.35	11	0.23	0.8	0.4		
		11-0.45ISO		11-0.45ISO	0.45	6.35	11	0.26	0.8	0.4		
		11-0.5ISO	●	11-0.5ISO		0.5	6.35	11	0.29	0.6		0.4
		11-0.6ISO		11-0.6ISO		0.6	6.35	11	0.35	0.6		0.6
		11-0.7ISO		11-0.7ISO		0.7	6.35	11	0.40	0.6		0.6
		11-0.75ISO	●	11-0.75ISO		0.75	6.35	11	0.43	0.6		0.6
		11-0.8ISO		11-0.8ISO		0.8	6.35	11	0.46	0.6		0.6
		11-1.0ISO	●	11-1.0ISO		1.0	6.35	11	0.58	0.6		0.7
		11-1.25ISO	●	11-1.25ISO		1.25	6.35	11	0.72	0.8		0.9
		11-1.5ISO	●	11-1.5ISO	●	1.5	6.35	11	0.87	0.8		1.0
		11-1.75ISO		11-1.75ISO		1.75	6.35	11	1.01	0.9		1.1
		11-2.0ISO	●	11-2.0ISO	●	2.0	6.35	11	1.15	0.9		1.1
		11-2.5ISO	●	11-2.5ISO		2.5	6.35	11	1.44	0.8		1.1
		16-0.35ISO		16-0.35ISO		0.35	9.525	16	0.20	0.8		0.3
		16-0.4ISO		16-0.4ISO		0.4	9.525	16	0.23	0.8		0.4
		16-0.45ISO		16-0.45ISO		0.45	9.525	16	0.26	0.8		0.4
		16-0.5ISO	●	16-0.5ISO		0.5	9.525	16	0.29	0.6		0.4
		16-0.6ISO		16-0.6ISO		0.6	9.525	16	0.35	0.6		0.6
		16-0.7ISO		16-0.7ISO		0.7	9.525	16	0.40	0.6		0.6
		16-0.75ISO	●	16-0.75ISO		0.75	9.525	16	0.43	0.6		0.6
		16-0.8ISO		16-0.8ISO		0.8	9.525	16	0.46	0.6		0.6
		16-1.0ISO	●	16-1.0ISO		1.0	9.525	16	0.58	0.6		0.7
		16-1.25ISO	●	16-1.25ISO		1.25	9.525	16	0.72	0.8		0.9
		16-1.5ISO	●	16-1.5ISO		1.5	9.525	16	0.87	0.8		1.0
		16-1.75ISO	●	16-1.75ISO		1.75	9.525	16	1.01	0.9		1.2
		16-2.0ISO	●	16-2.0ISO	●	2.0	9.525	16	1.15	1.0		1.3
		16-2.5ISO	●	16-2.5ISO		2.5	9.525	16	1.44	1.1		1.5
		16-3.0ISO	●	16-3.0ISO	●	3.0	9.525	16	1.73	1.1		1.5
		22-3.5ISO	●	22-3.5ISO		3.5	12.7	22	2.02	1.6		2.3
		22-4.0ISO	●	22-4.0ISO		4.0	12.7	22	2.31	1.6		2.3
		22-4.5ISO	●	22-4.5ISO		4.5	12.7	22	2.60	1.6		2.4
		22-5.0ISO	●	22-5.0ISO		5.0	12.7	22	2.89	1.6		2.3
	27-5.5ISO		27-5.5ISO		5.5	15.875	27	3.17	1.6	2.3		
	27-6.0ISO	●	27-6.0ISO		6.0	15.875	27	3.46	1.8	2.5		

➔ Applicable holders D32

● : Stock item

ISO Metric (M Chip Breaker)

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture	
						(mm)	d	L	hmin	X	f		
Internal	IRM	11-1.5ISO	●			1.5	6.35	11	0.85	0.8	1.0		
		16-1.0ISO	●			1.0	9.525	16	0.58	0.6	0.7		
		16-1.25ISO					1.25	9.525	16	0.72	0.8		0.9
		16-1.5ISO	●				1.5	9.525	16	0.85	0.8		1.0
		16-1.75ISO					1.75	9.525	16	1.01	0.9		1.2
		16-2.0ISO	●				2.0	9.525	16	1.12	1.0		1.3
		16-2.5ISO	●				2.5	9.525	16	1.44	1.1		1.5
		16-3.0ISO	●				3.0	9.525	16	1.69	1.1		1.5

Applicable holders D32

● : Stock item

ISO Metric (U Chip Breaker) *New*

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
						(mm)	d	L	hmin	X	f	
Internal	IRM	16-1.5ISO-U				1.5	9.525	16	0.85	0.8	1.0	
		16-2.0ISO-U				2.0	9.525	16	1.12	1.0	1.3	

Applicable holders D32

● : Stock item



American UN (UN, UNC, UNF, UNEF, UNS)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-72UN		EL 11-72UN		72	6.35	11	0.22	0.8	0.4	
	11-64UN		11-64UN		64	6.35	11	0.24	0.8	0.4	
	11-56UN		11-56UN		56	6.35	11	0.28	0.7	0.4	
	11-48UN		11-48UN		48	6.35	11	0.32	0.6	0.6	
	11-44UN		11-44UN		44	6.35	11	0.35	0.6	0.6	
	11-40UN		11-40UN		40z	6.35	11	0.39	0.6	0.6	
	11-36UN		11-36UN		36	6.35	11	0.43	0.6	0.6	
	11-32UN		11-32UN		32	6.35	11	0.49	0.6	0.6	
	11-28UN		11-28UN		28	6.35	11	0.56	0.6	0.7	
	11-27UN		11-27UN		27	6.35	11	0.58	0.7	0.8	
	11-24UN		11-24UN		24	6.35	11	0.65	0.7	0.8	
	11-20UN		11-20UN		20	6.35	11	0.78	0.8	0.9	
	11-18UN		11-18UN		18	6.35	11	0.87	0.8	1.0	
	11-16UN		11-16UN		16	6.35	11	0.97	0.9	1.1	
	11-14UN		11-14UN		14	6.35	11	1.11	0.9	1.1	
	16-72UN		16-72UN		72	9.525	16	0.22	0.8	0.4	
	16-64UN		16-64UN		64	9.525	16	0.24	0.8	0.4	
	16-56UN		16-56UN		56	9.525	16	0.28	0.7	0.4	
	16-48UN		16-48UN		48	9.525	16	0.32	0.6	0.6	
	16-44UN		16-44UN		44	9.525	16	0.35	0.6	0.6	
	16-40UN		16-40UN		40	9.525	16	0.39	0.6	0.6	
	16-36UN		16-36UN		36	9.525	16	0.43	0.6	0.6	
	16-32UN	●	16-32UN		32	9.525	16	0.49	0.6	0.6	
	16-28UN		16-28UN		28	9.525	16	0.56	0.6	0.7	
	16-27UN		16-27UN		27	9.525	16	0.58	0.7	0.8	
	16-24UN	●	16-24UN		24	9.525	16	0.65	0.7	0.8	
	16-20UN	●	16-20UN		20	9.525	16	0.78	0.8	0.9	
	16-18UN	●	16-18UN		18	9.525	16	0.87	0.8	1.0	
	16-16UN	●	16-16UN		16	9.525	16	0.97	0.9	1.1	
	16-14UN	●	16-14UN		14	9.525	16	1.11	1.0	1.2	
	16-13UN		16-13UN		13	9.525	16	1.20	1.0	1.3	
	16-12UN	●	16-12UN		12	9.525	16	1.30	1.1	1.4	
	16-11.5UN		16-11.5UN		11.5	9.525	16	1.35	1.1	1.5	
	16-11UN	●	16-11UN		11	9.525	16	1.42	1.1	1.5	
	16-10UN	●	16-10UN		10	9.525	16	1.56	1.1	1.5	
	16-9UN	●	16-9UN		9	9.525	16	1.73	1.2	1.7	
	16-8UN	●	16-8UN		8	9.525	16	1.95	1.2	1.6	
	22-7UN		22-7UN		7	12.7	22	2.22	1.6	2.3	
	22-6UN		22-6UN		6	12.7	22	2.60	1.6	2.3	
	22-5UN		22-5UN		5	12.7	22	3.12	1.7	2.5	
27-4.5UN		27-4.5UN		4.5	15.875	27	3.46	1.9	2.7		
27-4UN		27-4UN		4	15.875	27	3.89	2.1	3.0		

➔ Applicable holders D31

● : Stock item




American UN (UN, UNC, UNF, UNEF, UNS)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture			
						d	L	hmin	X	f				
Internal	IR		IL		72	6.35	11	0.20	0.8	0.3				
						64	6.35	11	0.23	0.8		0.4		
						56	6.35	11	0.26	0.7		0.4		
						48	6.35	11	0.31	0.6		0.6		
						44	6.35	11	0.33	0.6		0.6		
						40	6.35	11	0.37	0.6		0.6		
						36	6.35	11	0.41	0.6		0.6		
						32	6.35	11	0.46	0.6		0.6		
						28	6.35	11	0.52	0.6		0.7		
						27	6.35	11	0.54	0.7		0.8		
						24	6.35	11	0.61	0.7		0.8		
						20	6.35	11	0.73	0.8		0.9		
					●	18	6.35	11	0.81	0.8		1.0		
						16	6.35	11	0.92	0.9		1.1		
						14	6.35	11	1.05	0.9		1.1		
						12	6.35	11	1.22	0.8		1.1		
					●	11	6.35	11	1.33	0.8		1.1		
				16				72	9.525	16		0.20	0.8	0.3
								64	9.525	16		0.23	0.8	0.4
								56	9.525	16		0.26	0.7	0.4
						48	9.525	16	0.31	0.6		0.6		
						44	9.525	16	0.33	0.6		0.6		
						40	9.525	16	0.37	0.6		0.6		
						36	9.525	16	0.41	0.6		0.6		
						32	9.525	16	0.51	0.6		0.6		
						28	9.525	16	0.52	0.6		0.7		
						27	9.525	16	0.54	0.7		0.8		
						24	9.525	16	0.61	0.7		0.8		
			●		20	9.525	16	0.73	0.8	0.9				
			●		18	9.525	16	0.81	0.8	1.0				
			●		16	9.525	16	0.92	0.9	1.1				
			●		14	9.525	16	1.05	0.9	1.2				
					13	9.525	16	1.13	1.0	1.3				
			●		12	9.525	16	1.22	1.1	1.4				
					11.5	9.525	16	1.28	1.1	1.5				
			●		11	9.525	16	1.33	1.1	1.5				
			●		10	9.525	16	1.47	1.1	1.5				
				9	9.525	16	1.63	1.2	1.7					
			●	8	9.525	16	1.83	1.2	1.5					
		22				7	12.7	22	2.09	1.6		2.3		
						6	12.7	22	2.44	1.6		2.3		
						5	12.7	22	2.93	1.7		2.3		
					4.5	15.875	27	3.26	1.9	2.4				
	27				4	15.875	27	3.67	2.1	2.7				

➔ Applicable holders D32

● : Stock item

Whitworth (BSW, BSF, BSP, BSB)

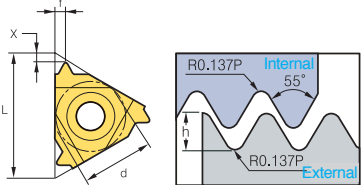Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-72W		EL 11-72W		72	6.35	11	0.23	0.7	0.4	
	11-60W		11-60W		60	6.35	11	0.27	0.7	0.4	
	11-56W		11-56W		56	6.35	11	0.29	0.7	0.4	
	11-48W		11-48W		48	6.35	11	0.34	0.6	0.6	
	11-40W		11-40W		40	6.35	11	0.41	0.6	0.6	
	11-36W		11-36W		36	6.35	11	0.45	0.6	0.6	
	11-32W		11-32W		32	6.35	11	0.51	0.6	0.6	
	11-28W		11-28W		28	6.35	11	0.58	0.6	0.7	
	11-26W		11-26W		26	6.35	11	0.63	0.7	0.8	
	11-24W		11-24W		24	6.35	11	0.68	0.7	0.8	
	11-22W		11-22W		22	6.35	11	0.74	0.8	0.9	
	11-20W		11-20W		20	6.35	11	0.81	0.8	0.9	
	11-19W		11-19W		19	6.35	11	0.86	0.8	1.0	
	11-18W		11-18W		18	6.35	11	0.90	0.8	1.0	
	11-16W		11-16W		16	6.35	11	1.02	0.9	1.1	
	11-14W		11-14W		14	6.35	11	1.16	1.0	1.2	
	16-72W		16-72W		72	9.525	16	0.23	0.7	0.4	
	16-60W		16-60W		60	9.525	16	0.27	0.7	0.4	
	16-56W		16-56W		56	9.525	16	0.29	0.7	0.4	
	16-48W		16-48W		48	9.525	16	0.34	0.6	0.6	
	16-40W		16-40W		40	9.525	16	0.41	0.6	0.6	
	16-36W		16-36W		36	9.525	16	0.45	0.6	0.6	
	16-32W		16-32W		32	9.525	16	0.51	0.6	0.6	
	16-30W		16-30W		30	9.525	16	0.55	0.6	0.7	
	16-28W	●	16-28W		28	9.525	16	0.58	0.6	0.7	
	16-26W		16-26W		26	9.525	16	0.63	0.7	0.8	
	16-24W		16-24W		24	9.525	16	0.68	0.7	0.8	
	16-22W		16-22W		22	9.525	16	0.74	0.8	0.9	
	16-20W		16-20W		20	9.525	16	0.81	0.8	0.9	
	16-19W	●	16-19W		19	9.525	16	0.86	0.8	1.0	
	16-18W	●	16-18W		18	9.525	16	0.90	0.8	1.0	
	16-16W	●	16-16W		16	9.525	16	1.02	0.9	1.1	
	16-14W	●	16-14W		14	9.525	16	1.16	1.0	1.2	
	16-12W	●	16-12W		12	9.525	16	1.36	1.1	1.4	
	16-11W	●	16-11W		11	9.525	16	1.48	1.1	1.5	
	16-10W	●	16-10W		10	9.525	16	1.63	1.1	1.5	
	16-9W		16-9W		9	9.525	16	1.81	1.2	1.7	
	16-8W	●	16-8W		8	9.525	16	2.03	1.2	1.5	
	22-7W		22-7W		7	12.7	22	3.32	1.6	2.3	
	22-6W		22-6W		6	12.7	22	2.71	1.6	2.3	
	22-5W		22-5W		5	12.7	22	3.25	1.7	2.4	
	27-4.5W		27-4.5W		4.5	15.875	27	3.61	1.8	2.6	
27-4W		27-4W		4	15.875	27	4.07	2.0	2.9		

➔ Applicable holders D31

● : Stock item



Whitworth (M Chip Breaker) *New*

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
						(tpi)	d	L	hmin	X	f	
External	ERM 16-14W	●				14	9.525	16	1.16	1.0	1.2	
	16-11W	●				11	9.525	16	1.48	1.1	1.5	
	16-19W	●					19	9.525	16	0.86	0.8	

➡ Applicable holders D31

● : Stock item


Whitworth (U Chip Breaker) *New*

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
						(tpi)	d	L	hmin	X	f	
External	ERM 16-14W-U					14	9.525	16	1.16	1.0	1.2	
	16-11W-U					11	9.525	16	1.48	1.1	1.5	

➡ Applicable holders D31

● : Stock item

Whitworth (BSW, BSF, BSP, BSB)

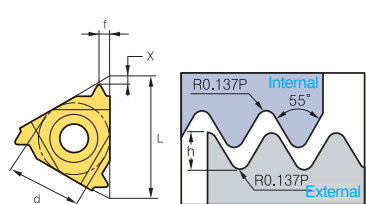Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture		
						d	L	hmin	X	f			
Internal	IR		IL		72	6.35	11	0.23	0.7	0.4			
		11-72W			11-72W		60	6.35	11	0.27		0.7	0.4
		11-60W			11-60W		56	6.35	11	0.29		0.7	0.4
		11-56W			11-56W		48	6.35	11	0.34		0.6	0.6
		11-48W			11-48W		40	6.35	11	0.41		0.6	0.6
		11-40W			11-40W		36	6.35	11	0.45		0.6	0.6
		11-36W			11-36W		32	6.35	11	0.51		0.6	0.6
		11-32W			11-32W		28	6.35	11	0.58		0.6	0.7
		11-28W			11-28W		26	6.35	11	0.63		0.7	0.8
		11-26W			11-26W		24	6.35	11	0.68		0.7	0.8
		11-24W			11-24W		22	6.35	11	0.74		0.8	0.9
		11-22W			11-22W		20	6.35	11	0.81		0.8	0.9
		11-20W			11-20W		19	6.35	11	0.86		0.8	1.0
		11-19W		●	11-19W		18	6.35	11	0.90		0.8	1.0
	11-18W		11-18W		16	6.35	11	1.02	0.9	1.1			
	11-16W		11-16W		14	6.35	11	1.16	0.9	1.1			
	11-14W	●	11-14W		12	6.35	11	1.32	0.9	1.2			
	11-12W		11-12W		72	9.525	16	0.23	0.7	0.4			
	16-72W		16-72W		60	9.525	16	0.27	0.7	0.4			
	16-60W		16-60W		56	9.525	16	0.29	0.7	0.4			
	16-56W		16-56W		48	9.525	16	0.34	0.6	0.6			
	16-48W		16-48W		40	9.525	16	0.41	0.6	0.6			
	16-40W		16-40W		36	9.525	16	0.45	0.6	0.6			
	16-36W		16-36W		32	9.525	16	0.51	0.6	0.6			
	16-32W		16-32W		30	9.525	16	0.55	0.6	0.7			
	16-30W		16-30W		28	9.525	16	0.58	0.6	0.7			
	16-28W		16-28W		26	9.525	16	0.63	0.7	0.8			
	16-26W		16-26W		24	9.525	16	0.68	0.7	0.8			
	16-24W		16-24W		22	9.525	16	0.74	0.8	0.9			
	16-22W		16-22W		20	9.525	16	0.81	0.8	0.9			
	16-20W		16-20W		19	9.525	16	0.86	0.8	1.0			
	16-19W		16-19W		18	9.525	16	0.90	0.8	1.0			
	16-18W		16-18W		16	9.525	16	1.02	0.9	1.1			
	16-16W		16-16W		14	9.525	16	1.16	1.0	1.2			
	16-14W	●	16-14W		12	9.525	16	1.36	1.1	1.4			
	16-12W	●	16-12W		11	9.525	16	1.48	1.1	1.5			
	16-11W	●	16-11W		10	9.525	16	1.63	1.1	1.5			
	16-10W	●	16-10W		9	9.525	16	1.81	1.2	1.7			
	16-9W	●	16-9W		8	9.525	16	2.03	1.2	1.5			
	16-8W	●	16-8W		7	12.7	22	3.32	1.6	2.3			
	22-7W		22-7W		6	12.7	22	2.71	1.6	2.3			
	22-6W		22-6W		5	12.7	22	3.25	1.7	2.4			
22-5W		22-5W		4.5	15.875	27	3.61	1.8	2.6				
27-4.5W		27-4.5W		4	15.875	27	4.07	2.0	2.9				
27-4W		27-4W											

➔ Applicable holders D32

● : Stock item

Whitworth (M Chip Breaker) *New*

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
						(tpi)	d	L	hmin	X	f	
Internal	IRM 16-14W					14	9.525	16	1.16	1.0	1.2	
	16-11W	●				11	9.525	16	1.48	1.1	1.5	

↻ Applicable holders D32

● : Stock item

Whitworth (U Chip Breaker) *New*

Type	Designation (Right)	PC3030T	PC5300	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
						(tpi)	d	L	hmin	X	f	
Internal	IRM 16-14W-U					14	9.525	16	1.16	1.0	1.2	
	16-11W-U					11	9.525	16	1.48	1.1	1.5	

↻ Applicable holders D32

● : Stock item



British Standard Pipe Thread (BSPT)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-28BSPT		EL 11-28BSPT		28	6.35	11	0.58	0.6	0.6	
	11-19BSPT		11-19BSPT		19	6.35	11	0.86	0.8	0.9	
	11-14BSPT		11-14BSPT		14	6.35	11	1.16	0.9	1.0	
	16-28BSPT		16-28BSPT		28	9.525	16	0.58	0.6	0.6	
	16-19BSPT		16-19BSPT		19	9.525	16	0.86	0.8	0.9	
	16-14BSPT		16-14BSPT		14	9.525	16	1.16	1.0	1.2	
	16-11BSPT	●	16-11BSPT		11	9.525	16	1.48	1.1	1.5	
Internal	IR 11-28BSPT		IL 11-28BSPT		28	6.35	11	0.58	0.6	0.6	
	11-19BSPT		11-19BSPT		19	6.35	11	0.86	0.8	0.9	
	11-14BSPT		11-14BSPT		14	6.35	11	1.16	0.9	1.0	
	16-28BSPT		16-28BSPT		28	9.525	16	0.58	0.6	0.6	
	16-19BSPT	●	16-19BSPT		19	9.525	16	0.86	0.8	0.9	
	16-14BSPT	●	16-14BSPT		14	9.525	16	1.16	1.0	1.2	
	16-11BSPT		16-11BSPT		11	9.525	16	1.48	1.1	1.5	

➔ Applicable holders D31, D32

● : Stock item

National Pipe Thread (NPT)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-27NPT		EL 11-27NPT		27	6.35	11	0.66	0.7	0.8	
	11-18NPT		11-18NPT		18	6.35	11	1.01	0.8	1.0	
	11-14NPT		11-14NPT		14	6.35	11	1.33	0.8	1.0	
	16-27NPT		16-27NPT		27	9.525	16	0.66	0.7	0.8	
	16-18NPT	●	16-18NPT		18	9.525	16	1.01	0.8	1.0	
	16-14NPT	●	16-14NPT		14	9.525	16	1.33	0.9	1.2	
	16-11.5NPT	●	16-11.5NPT		11.5	9.525	16	1.64	1.1	1.5	
16-8NPT	●	16-8NPT		8	9.525	16	2.42	1.3	1.8		
Internal	IR 11-27NPT		IL 11-27NPT		27	6.35	11	0.66	0.7	0.8	
	11-18NPT	●	11-18NPT		18	6.35	11	1.01	0.8	1.0	
	11-14NPT	●	11-14NPT		14	6.35	11	1.33	0.8	1.0	
	16-27NPT		16-27NPT		27	9.525	16	0.66	0.7	0.8	
	16-18NPT		16-18NPT		18	9.525	16	1.01	0.8	1.0	
	16-14NPT	●	16-14NPT		14	9.525	16	1.33	0.9	1.2	
	16-11.5NPT	●	16-11.5NPT		11.5	9.525	16	1.64	1.1	1.5	
16-8NPT	●	16-8NPT		8	9.525	16	2.42	1.3	1.8		

➔ Applicable holders D31, D32

● : Stock item



National Pipe Threads-Dryseal (NPTF)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-27NPTF		EL 11-27NPT		27	6.35	11	0.64	0.7	0.8	
	11-18NPTF		11-18NPT		18	6.35	11	1.00	0.8	1.0	
	11-14NPTF		11-14NPT		14	6.35	11	1.35	0.8	1.0	
	16-27NPTF		16-27NPT		27	9.525	16	0.64	0.7	0.8	
	16-18NPTF ●		16-18NPT		18	9.525	16	1.00	0.8	1.0	
	16-14NPTF		16-14NPT		14	9.525	16	1.35	0.9	1.2	
	16-11.5NPTF		16-11.5NPT		11.5	9.525	16	1.63	1.1	1.5	
	16-8NPTF		16-8NPT		8	9.525	16	2.38	1.3	1.8	
Internal	IR 11-27NPTF		IL 11-27NPT		27	6.35	11	0.64	0.7	0.8	
	11-18NPTF		11-18NPT		18	6.35	11	1.00	0.8	1.0	
	11-14NPTF		11-14NPT		14	6.35	11	1.35	0.8	1.0	
	16-27NPTF		16-27NPT		27	9.525	16	0.64	0.7	0.8	
	16-18NPTF		16-18NPT		18	9.525	16	1.00	0.8	1.0	
	16-14NPTF		16-14NPT		14	9.525	16	1.35	0.9	1.2	
	16-11.5NPTF		16-11.5NPT		11.5	9.525	16	1.63	1.1	1.5	
	16-8NPTF		16-8NPT		8	9.525	16	2.38	1.3	1.8	

➔ Applicable holders D31, D32

● : Stock item

Round DIN 405

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 16-10RD		EL 16-10RD		10	9.525	16	1.27	1.1	1.2	
	16-8RD		16-8RD		8	9.525	16	1.59	1.4	1.3	
	16-6RD		16-6RD		6	9.525	16	2.12	1.5	1.7	
	22-6RD		22-6RD		6	12.7	22	2.12	1.5	1.7	
	22-4RD		22-4RD		4	12.7	22	3.18	2.2	2.3	
	27-4RD		27-4RD		4	15.875	27	3.18	2.2	2.3	
Internal	IR 16-10RD		IL 16-10RD		10	9.525	16	1.27	1.1	1.2	
	16-8RD		16-8RD		8	9.525	16	1.59	1.4	1.4	
	16-6RD		16-6RD		6	9.525	16	2.12	1.4	1.5	
	22-6RD		22-6RD		6	12.7	22	2.12	1.5	1.7	
	22-4RD		22-4RD		4	12.7	22	3.18	2.2	2.3	
	27-4RD		27-4RD		4	15.875	27	3.18	2.2	2.3	

➔ Applicable holders D31, D32

● : Stock item

Trapez DIN 103 (TR)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (mm)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-1.5TR		EL 11-1.5TR		1.5	6.35	11	0.90	0.8	0.9	
	16-1.5TR		16-1.5TR		1.5	9.525	16	0.90	1.0	1.1	
	16-2.0TR	●	16-2.0TR	●	2.0	9.525	16	1.25	1.1	1.3	
	16-3.0TR	●	16-3.0TR	●	3.0	9.525	16	1.75	1.3	1.5	
	22-4.0TR	●	22-4.0TR	●	4.0	12.7	22	2.25	1.7	1.9	
	22-5.0TR	●	22-5.0TR	●	5.0	12.7	22	2.75	2.1	2.5	
	27-6.0TR	●	27-6.0TR	●	6.0	15.875	27	3.50	2.3	2.7	
Internal	IR 11-1.5TR		IL 11-1.5TR		1.5	6.35	11	0.90	0.8	0.9	
	16-1.5TR		16-1.5TR		1.5	9.525	16	0.90	1.0	1.1	
	16-2.0TR		16-2.0TR		2.0	9.525	16	1.25	1.1	1.3	
	16-2.5TR		16-2.5TR		2.5	9.525	16	1.53	1.2	1.4	
	16-3.0TR	●	16-3.0TR	●	3.0	9.525	16	1.75	1.3	1.5	
	22-4.0TR	●	22-4.0TR	●	4.0	12.7	22	2.25	1.7	1.9	
	22-5.0TR	●	22-5.0TR	●	5.0	12.7	22	2.75	2.1	2.5	
27-6.0TR	●	27-6.0TR	●	6.0	15.875	27	3.50	2.3	2.7		

➔ Applicable holders D31, D32

● : Stock item

American ACME (ACME)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-16ACME		EL 11-16ACME		16	6.35	11	0.92	1.0	1.1	
	16-16ACME		16-16ACME		16	9.525	16	0.92	1.0	1.1	
	16-14ACME		16-14ACME		14	9.525	16	1.03	1.0	1.2	
	16-12ACME		16-12ACME		12	9.525	16	1.19	1.1	1.2	
	16-10ACME		16-10ACME		10	9.525	16	1.52	1.3	1.4	
	16-8ACME		16-8ACME		8	9.525	16	1.84	1.4	1.5	
	16-6ACME		16-6ACME		6	9.525	16	2.37	1.7	1.9	
	22-6ACME	●	22-6ACME		6	12.7	22	2.37	1.8	2.1	
	22-5ACME		22-5ACME		5	12.7	22	2.79	2.0	2.3	
	27-4ACME		27-4ACME		4	15.875	27	3.43	2.4	2.7	
Internal	IR 11-16ACME		IL 11-16ACME		16	6.35	11	0.92	0.9	0.9	
	16-16ACME		16-16ACME		16	9.525	16	0.92	1.0	1.1	
	16-14ACME		16-14ACME		14	9.525	16	1.03	1.1	1.2	
	16-12ACME		16-12ACME		12	9.525	16	1.19	1.2	1.3	
	16-10ACME		16-10ACME		10	9.525	16	1.52	1.2	1.3	
	16-8ACME		16-8ACME		8	9.525	16	1.84	1.4	1.5	
	16-6ACME		16-6ACME		6	9.525	16	2.37	1.7	1.9	
	22-6ACME		22-6ACME		6	12.7	22	2.37	1.8	2.1	
	22-5ACME		22-5ACME		5	12.7	22	2.79	2.0	2.3	
	27-4ACME	●	27-4ACME		4	15.875	27	3.43	2.3	2.6	

➔ Applicable holders D31, D32

● : Stock item



Stub ACME (STACME)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
					(mm)	d	L	hmin	X	f	
External	ER 11-16STACME		EL 11-16STACME		16	6.35	11	0.60	1.0	1.0	
	16-16STACME		16-16STACME		16	9.525	16	0.60	1.0	1.0	
	16-14STACME		16-14STACME		14	9.525	16	0.67	1.1	1.1	
	16-12STACME		16-12STACME		12	9.525	16	0.76	1.2	1.2	
	16-10STACME		16-10STACME		10	9.525	16	1.02	1.2	1.3	
	16-8STACME		16-8STACME		8	9.525	16	1.21	1.4	1.5	
	16-6STACME		16-6STACME		6	9.525	16	1.52	1.7	1.8	
	22-6STACME		22-6STACME		6	12.7	22	1.52	1.7	1.8	
	22-5STACME		22-5STACME		5	12.7	22	1.78	2.1	2.3	
	27-4STACME		27-4STACME		4	15.875	27	2.16	2.3	2.4	
	27-3STACME		27-3STACME		3	15.875	27	2.79	2.9	2.9	
	Internal	IR 11-16STACME		IL 11-16STACME		16	6.35	11	0.60	1.0	
16-16STACME			16-16STACME		16	9.525	16	0.60	1.0	1.0	
16-14STACME			16-14STACME		14	9.525	16	0.67	1.1	1.1	
16-12STACME			16-12STACME		12	9.525	16	0.76	1.1	1.2	
16-10STACME			16-10STACME		10	9.525	16	1.02	1.2	1.3	
16-8STACME			16-8STACME		8	9.525	16	1.21	1.4	1.5	
16-6STACME			16-6STACME		6	9.525	16	1.52	1.7	1.8	
22-6STACME			22-6STACME		6	12.7	22	1.52	1.7	1.8	
22-5STACME			22-5STACME		5	12.7	22	1.78	2.1	2.3	
27-4STACME			27-4STACME		4	15.875	27	2.16	2.3	2.4	
27-3STACME			27-3STACME		3	15.875	27	2.79	2.9	2.9	

➔ Applicable holders D31, D32

● : Stock item

UNJ (Unified Constant Thread)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-48UNJ		EL 11-48UNJ		48	6.35	11	0.31	0.6	0.5	
	11-44UNJ		11-44UNJ		44	6.35	11	0.33	0.6	0.6	
	11-40UNJ		11-40UNJ		40	6.35	11	0.37	0.6	0.6	
	11-36UNJ		11-36UNJ		36	6.35	11	0.41	0.6	0.6	
	11-32UNJ		11-32UNJ		32	6.35	11	0.46	0.6	0.7	
	11-28UNJ		11-28UNJ		28	6.35	11	0.52	0.7	0.7	
	11-24UNJ		11-24UNJ		24	6.35	11	0.61	0.7	0.8	
	11-20UNJ		11-20UNJ		20	6.35	11	0.73	0.8	0.9	
	11-18UNJ		11-18UNJ		18	6.35	11	0.81	0.8	1.0	
	11-16UNJ		11-16UNJ		16	6.35	11	0.92	0.9	1.1	
	11-14UNJ		11-14UNJ		14	6.35	11	1.05	1.0	1.2	
	16-48UNJ		16-48UNJ		48	9.525	16	0.31	0.6	0.5	
	16-44UNJ		16-44UNJ		44	9.525	16	0.33	0.6	0.6	
	16-40UNJ		16-40UNJ		40	9.525	16	0.37	0.6	0.6	
	16-36UNJ		16-36UNJ		36	9.525	16	0.41	0.6	0.6	
	16-32UNJ		16-32UNJ		32	9.525	16	0.46	0.6	0.7	
	16-28UNJ		16-28UNJ		28	9.525	16	0.52	0.7	0.7	
	16-24UNJ		16-24UNJ		24	9.525	16	0.61	0.7	0.8	
	16-20UNJ		16-20UNJ		20	9.525	16	0.73	0.8	0.9	
	16-18UNJ		16-18UNJ		18	9.525	16	0.81	0.8	1.0	
	16-16UNJ		16-16UNJ		16	9.525	16	0.92	0.9	1.1	
	16-14UNJ		16-14UNJ		14	9.525	16	1.05	1.0	1.2	
	16-13UNJ		16-13UNJ		13	9.525	16	1.13	1.0	1.3	
	16-12UNJ		16-12UNJ		12	9.525	16	1.22	1.1	1.3	
	16-11UNJ		16-11UNJ		11	9.525	16	1.33	1.2	1.5	
	16-10UNJ		16-10UNJ		10	9.525	16	1.47	1.2	1.5	
	16-9UNJ		16-9UNJ		9	9.525	16	1.63	1.3	1.7	
	16-8UNJ		16-8UNJ		8	9.525	16	1.83	1.2	1.6	
	22-7UNJ		22-7UNJ		7	12.7	22	2.09	1.7	2.3	
	22-6UNJ		22-6UNJ		6	12.7	22	2.44	1.7	2.3	
	22-5UNJ		22-5UNJ		5	12.7	22	2.93	1.8	2.5	
	27-4.5UNJ		27-4.5UNJ		4.5	15.875	27	3.26	2.0	2.7	
	27-4UNJ		27-4UNJ		4	15.875	27	3.67	2.2	3.0	

Applicable holders D31

● : Stock item

UNJ (Unified Constant Thread)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
Internal	IR 11-48UNJ		IL 11-48UNJ		48	6.35	11	0.28	0.6	0.5	
	11-44UNJ		11-44UNJ		44	6.35	11	0.30	0.6	0.6	
	11-40UNJ		11-40UNJ		40	6.35	11	0.33	0.6	0.6	
	11-36UNJ		11-36UNJ		36	6.35	11	0.37	0.6	0.6	
	11-32UNJ		11-32UNJ		32	6.35	11	0.42	0.6	0.7	
	11-28UNJ		11-28UNJ		28	6.35	11	0.47	0.7	0.7	
	11-24UNJ		11-24UNJ		24	6.35	11	0.55	0.7	0.8	
	11-20UNJ		11-20UNJ		20	6.35	11	0.66	0.8	0.9	
	11-18UNJ		11-18UNJ		18	6.35	11	0.74	0.8	1.0	
	11-16UNJ		11-16UNJ		16	6.35	11	0.83	0.9	1.1	
	11-14UNJ		11-14UNJ		14	9.525	11	0.95	1.0	1.2	
	16-48UNJ		16-48UNJ		48	9.525	16	0.28	0.6	0.5	
	16-44UNJ		16-44UNJ		44	9.525	16	0.30	0.6	0.6	
	16-40UNJ		16-40UNJ		40	9.525	16	0.33	0.6	0.6	
	16-36UNJ		16-36UNJ		36	9.525	16	0.37	0.6	0.6	
	16-32UNJ		16-32UNJ		32	9.525	16	0.42	0.6	0.7	
	16-28UNJ		16-28UNJ		28	9.525	16	0.47	0.7	0.7	
	16-24UNJ		16-24UNJ		24	9.525	16	0.55	0.7	0.8	
	16-20UNJ		16-20UNJ		20	9.525	16	0.66	0.8	0.9	
	16-18UNJ		16-18UNJ		18	9.555	16	0.74	0.8	1.0	
	16-16UNJ		16-16UNJ		16	9.525	16	0.83	0.9	1.1	
	16-14UNJ		16-14UNJ		14	9.525	16	0.95	1.0	1.2	
	16-13UNJ		16-13UNJ		13	9.525	16	1.02	1.0	1.3	
	16-12UNJ		16-12UNJ		12	9.525	16	1.11	1.1	1.3	
	16-11UNJ		16-11UNJ		11	9.525	16	1.21	1.2	1.5	
	16-10UNJ		16-10UNJ		10	9.525	16	1.33	1.2	1.5	
	16-9UNJ		16-9UNJ		9	9.525	16	1.48	1.3	1.7	
	16-8UNJ		16-8UNJ		8	9.525	16	1.66	1.2	1.6	
	22-7UNJ		22-7UNJ		7	12.7	22	1.90	1.7	2.3	
	22-6UNJ		22-6UNJ		6	12.7	22	2.21	1.7	2.3	
	22-5UNJ		22-5UNJ		5	12.7	22	2.66	1.8	2.5	
	27-4.5UNJ		27-4.5UNJ		4.5	15.875	27	2.95	2.0	2.7	
27-4UNJ		27-4UNJ		4	15.875	27	3.32	2.2	3.0		

Applicable holders D32

: Stock item

American Buttress (ABUT)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 11-20ABUT		EL 11-20ABUT		20	6.35	11	0.84	1.0	1.4	
	11-16ABUT		11-16ABUT		16	6.35	11	1.05	1.3	1.9	
	16-20ABUT		16-20ABUT		20	9.525	16	0.84	1.0	1.4	
	16-16ABUT		16-16ABUT		16	9.525	16	1.05	1.3	1.9	
	16-12ABUT		16-12ABUT		12	9.525	16	1.40	1.4	2.0	
	16-10ABUT		16-10ABUT		10	9.525	16	1.68	1.5	2.3	
	22-8ABUT		22-8ABUT		8	12.7	22	2.10	2.0	3.2	
22-6ABUT		22-6ABUT		6	12.7	22	2.80	2.2	3.5		
Internal	IR 11-20ABUT		IL 11-20ABUT		20	6.35	11	0.84	1.0	1.4	
	11-16ABUT		11-16ABUT		16	6.35	11	1.05	1.3	1.9	
	16-20ABUT		16-20ABUT		20	9.525	16	0.84	1.0	1.4	
	16-16ABUT		16-16ABUT		16	9.525	16	1.05	1.3	1.9	
	16-12ABUT		16-12ABUT		12	9.525	16	1.40	1.4	2.0	
	16-10ABUT		16-10ABUT		10	9.525	16	1.68	1.5	2.3	
	22-8ABUT		22-8ABUT		8	12.7	22	2.10	2.0	3.2	
22-6ABUT		22-6ABUT		6	12.7	22	2.80	2.2	3.5		

↻ Applicable holders D31, D32

● : Stock item

British Buttress (BBUT)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 16-16BBUT		EL 16-16BBUT		16	9.525	16	0.80	1.1	1.6	
	16-12BBUT		16-12BBUT		12	9.525	16	1.07	1.4	2.1	
	16-10BBUT		16-10BBUT		10	9.525	16	1.28	1.4	2.2	
	16-8BBUT		16-8BBUT		8	9.525	16	1.61	1.6	2.5	
	22-8BBUT		22-8BBUT		8	12.7	22	1.61	1.6	2.5	
Internal	IR 16-16BBUT		IL 16-16BBUT		16	9.525	16	0.80	1.1	1.6	
	16-12BBUT		16-12BBUT		12	9.525	16	1.07	1.4	2.1	
	16-10BBUT		16-10BBUT		10	9.525	16	1.28	1.4	2.2	
	16-8BBUT		16-8BBUT		8	9.525	16	1.61	1.6	2.5	
	22-8BBUT		22-8BBUT		8	12.7	22	1.61	1.6	2.5	

↻ Applicable holders D31, D32

● : Stock item

Metric Buttress (SAGE)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
					(mm)	d	L	hmin	X	f	
External	ER 16-2.0SAGE		EL 16-2.0SAGE		2.0	9.525	16	1.74	1.47	2.08	
	22-2.0SAGE		22-2.0SAGE		2.0	12.7	22	1.74	1.47	2.08	
	22-3.0SAGE	●	22-3.0SAGE		3.0	12.7	22	2.60	1.79	2.60	
	27-4.0SAGE		27-4.0SAGE		4.0	15.875	27	3.55	1.93	3.20	
Internal	IR 16-2.0SAGE		IL 16-2.0SAGE		2.0	9.525	16	1.50	1.52	2.2	
	22-3.0SAGE		22-3.0SAGE		3.0	12.7	22	2.25	1.66	2.9	
	27-4.0SAGE		27-4.0SAGE		4.0	5/8	27	3.09	2.12	3.2	

➔ Applicable holders D31, D32

● : Stock item

API

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch	Dimensions (mm)					Picture
					(tpi)	d	L	hmin	X	f	
External	ER 22-4API382		EL 22-4API382		4	12.7	22	3.09	2.1	2.8	
	22-4API383		22-4API383		4	12.7	22	3.08	2.1	2.8	
	22-4API502		22-4API502		4	12.7	22	3.75	2.0	2.9	
	22-4API503		22-4API503		4	12.7	22	3.74	2.0	2.9	
	22-5API403		22-5API403		5	12.7	22	2.99	1.8	2.6	
	22-6API551		22-6API551		6	12.7	22	1.41	2.6	2.0	
	27-4API382		27-4API382		4	15.875	27	3.09	2.1	2.8	
	27-4API383		27-4API383		4	15.875	27	3.08	2.1	2.8	
	27-4API502		27-4API502		4	15.875	27	3.75	2.1	3.1	
	27-4API503		27-4API503		4	15.875	27	3.74	2.1	3.1	
	27-5API403		27-5API403		5	15.875	27	2.99	1.9	2.7	
Internal	IR 22-4API382		IL 22-4API382		4	12.7	22	3.09	2.1	2.8	
	22-4API383		22-4API383		4	12.7	22	3.08	2.1	2.8	
	22-4API502		22-4API502		4	12.7	22	3.75	2.1	3.1	
	22-4API503		22-4API503		4	12.7	22	3.74	2.0	2.9	
	22-5API403	●	22-5API403		5	12.7	22	2.99	1.8	2.6	
	22-6API551		22-6API551		6	12.7	22	1.41	2.6	2.0	
	27-4API382		27-4API382		4	15.875	27	3.09	2.1	2.8	
	27-4API383		27-4API383		4	15.875	27	3.08	2.1	2.8	
	27-4API502		27-4API502		4	15.875	27	3.75	2.1	3.1	
	27-4API503		27-4API503		4	15.875	27	3.74	2.1	3.1	
	27-5API403		27-5API403		5	15.875	27	2.99	1.9	2.7	

➔ Applicable holders D31, D32

● : Stock item

API Buttress Casing (BUT)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (mm)	Dimensions (mm)					Picture	
						IPF	d	L	hmin	X		f
External	ER 22-5BUT75		EL 22-5BUT75		5	0.75	12.7	22	1.55	3.1	1.9	
	22-5BUT1		22-5BUT1		5	1	12.7	22	1.55	3.1	1.9	
Internal	IR 22-5BUT75		IL 22-5BUT75		5	0.75	12.7	22	1.55	2.8	1.9	
	22-5BUT1		22-5BUT1		5	1	12.7	22	1.55	2.8	1.9	

↻ Applicable holders D31, D32

● : Stock item

API Round Casing & Tubing (APIRD)

Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (tpi)	Dimensions (mm)					Picture
						d	L	hmin	X	f	
External	ER 16-10APIRD	●	EL 16-10APIRD		10	9.525	16	1.41	1.2	1.4	
	16-8APIRD	●	16-8APIRD		8	9.525	16	1.81	1.3	1.5	
Internal	IR 16-10APIRD	●	IL 16-10APIRD		10	9.525	16	1.41	1.2	1.4	
	16-8APIRD	●	16-8APIRD		8	9.525	16	1.81	1.3	1.5	

↻ Applicable holders D31, D32

● : Stock item

Extreme Line Casing (EL)



Type	Designation (Right)	PC3030T	Designation (Left)	PC3030T	Pitch (mm)	Dimensions (mm)					Picture	
						IPF	d	L	hmin	X		f
External	ER 22-6EL15		EL 22-6EL15		6	1.5	12.7	22	1.21	1.9	1.9	
	22-5EL125		22-5EL125		5	1.25	12.7	22	1.71	2.3	2.4	
Internal	IR 22-6EL15		IL 22-6EL15		6	1.5	12.7	22	1.39	1.8	1.9	
	22-5EL125		22-5EL125		5	1.25	12.7	22	1.91	2.2	2.4	

↻ Applicable holders D31, D32

● : Stock item



ER(L)H (Screw on system)

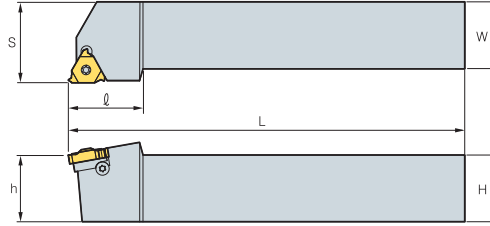

Righthand drawing

(mm)

Designation	Stock		Inscribed circle	H	W	L	S	H	ℓ	Insert Screw	Shim Screw	Screw RH	Screw LH	Wrench
	R	L												
ER(L)H 08N-11			6.35	8	8	136.4	11	8	17.5					
10N-11			6.35	10	10	70.0	11	10	17.5	ST11N	-	-	-	TW08P
12N-11	●		6.35	12	12	80.0	12	12	17.5					
12N-16			9.525	12	12	83.2	16	12	22	ST16N	-	-	-	TW10P
09-16			9.525	9.52	9.52	63.6	16	9.52	20.5					
12-16	●		9.525	12	12	83.2	16	12	22					
16-16	●	●	9.525	16	16	100.0	16	16	20.5	ST16	STA16	ATE16	ATI22	TW10P
20-16	●	●	9.525	20	20	128.6	20	20	30					
25-16	●	●	9.525	25	25	153.6	25	25	30					
32-16	●		9.525	32	32	173.6	32	32	30					
25-22	●	●	12.7	25	25	155.7	25	25	36					
32-22	●		12.7	32	32	175.7	32	32	36	ST22	STA22	ATE22	ATI22	TW20P
40-22			12.7	40	40	205.7	40	40	36					
25-27	●	●	15.875	25	25	151.6	32	25	35					
32-27	●		15.875	32	32	176.6	32	32	40	ST27	STA27	ATE27	ATI27	TW25L
40-27	●		15.875	40	40	206.6	40	40	40					
50-27			15.875	50	50	256.6	50	50	40					



➔ Applicable holders D10~D13, D16, D18, D19, D22, D23~D26

• Helix angle is 1.5° for all holders.

• No shim needed for N type holder

● : Stock item

ER(L)H-C (Clamp on system)

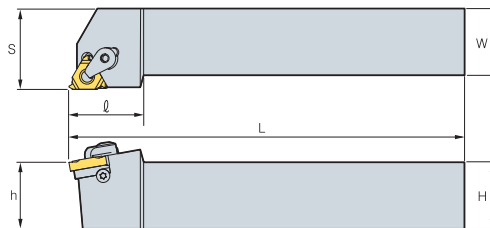

Righthand drawing

(mm)


Designation	Stock		Inscribed circle	H	W	L	S	H	ℓ	Insert Screw	Shim Screw	Screw RH	Screw LH	Wrench
	R	L												
ER(L)H-C 20-16C	●		9.525	20	20	128.6	20	20	30					TW10P
25-16C	●	●	9.525	25	25	153.6	25	25	30	STA16	CTH16	ATE16	ATI16	TW15P
32-16C	●		9.525	32	32	173.6	32	32	30					
25-22C	●		12.7	25	25	155.7	25	25	36					
32-22C	●		12.7	32	32	175.7	32	32	36	STA22	CTH22	ATE22	ATI22	TW20P
40-22C	●		12.7	40	40	205.7	40	40	36					
25-27C	●		15.875	25	25	151.6	25	25	35					
32-27C			15.875	32	32	176.6	32	32	40	STA27	CTH27	ATE27	ATI27	TW25L
40-27C			15.875	40	40	206.6	40	40	40					
50-27C			15.875	50	50	256.6	50	50	40					

➔ Applicable holders D10~D13, D16, D18, D19, D22, D23~D26

• Helix angle is 1.5° for all holders.

● : Stock item

IR(L)H (Screw on system)

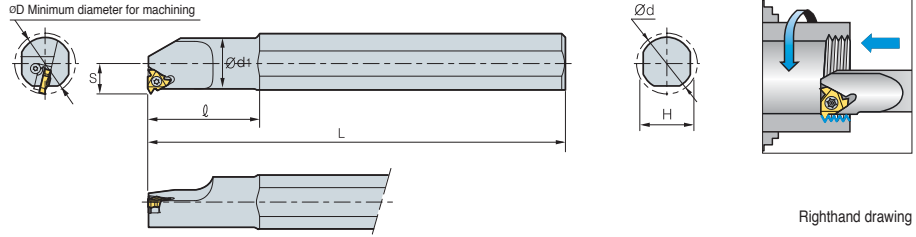

Righthand drawing

(mm)


Designation	Stock		Inscribed circle	ØD	Ød	Ød1	H	L	S	ℓ	Insert Screw	Shim Screw	Screw RH	Screw LH	Wrench	
	R	L														
IR(L)H	10DN-11	●	●	6.35	13	10	10.0	9.5	100	7.3	-	-	-	-	-	-
	10N-11	●		6.35	13	20	10.0	18.0	180	7.3	25	ST11N	-	-	-	TW08P
	13N-11	●		6.35	16	20	13.0	18.0	180	8.9	32	-	-	-	-	-
	13N-16	●	●	9.525	17	20	12.7	18.0	180	10.3	32	-	-	-	-	-
	16N-16	●		9.525	20	20	16.0	18.0	180	11.5	40	ST16N	-	-	-	TW10P
	16DN-16	●	●	9.525	20	16	16.0	15.2	150	11.3	32	-	-	-	-	-
	20-16	●	●	9.525	24	20	20.0	18.0	180	13.4	40	-	-	-	-	-
	25-16	●		9.525	29	32	25.0	29.0	250	16.3	60	-	-	-	-	-
	25D-16	●		9.525	29	25	24.5	22.6	200	16.1	45	ST16	STA16	ATI16	ATE16	TW10P
	32-16	●		9.525	36	32	32.0	29.0	250	19.6	60	-	-	-	-	-
	40-16	●		9.525	44	40	40.0	36.0	300	23.8	60	-	-	-	-	-
	20N-22	●		12.7	27	20	20.0	18.0	180	15.6	50	ST22N	-	-	-	TW20P
	25-22	●	●	12.7	32	32	25.0	29.0	250	17.4	60	-	-	-	-	-
	25D-22	●		12.7	32	25	24.6	22.6	200	17.2	45	ST22	STA22	ATI22	ATE22	TW20P
	32-22	●		12.7	39	32	32.0	29.0	250	21.5	60	-	-	-	-	-
	40-22	●		12.7	47	40	40.0	36.0	300	25.8	60	-	-	-	-	-
	32-27	●		15.875	40	32	32.0	29.0	250	22.4	60	-	-	-	-	-
40-27	●		15.875	48	40	40.0	36.0	300	26.4	60	-	-	-	-	-	
50-27	●		15.875	58	50	50.0	45.0	350	31.4	75	ST27	STA27	ATI27	ATE27	TW25L	
60-27	●		15.875	69	60	60.0	54.0	400	36.4	75	-	-	-	-	-	

⇒ Applicable holders D10, D11, D14, D15, D17, D 20~D25, D27~D30

• Helix angle is 1.5° for all holders. • No shim needed for N type holder

● : Stock item

IR(L)H-C (Clamp on system)

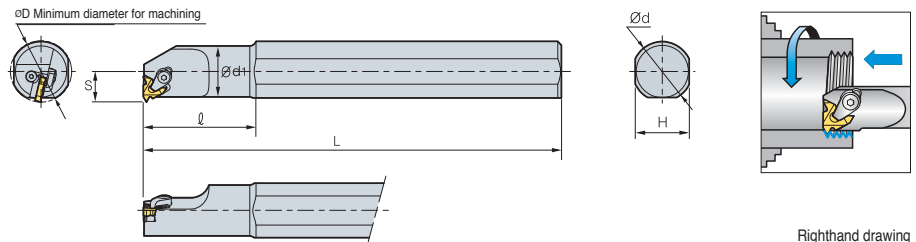

Righthand drawing

(mm)

Designation	Stock		Inscribed circle	ØD	Ød	Ød1	H	L	S	ℓ	Insert Screw	Shim Screw	Screw RH	Screw LH	Wrench	
	R	L														
IR(L)H	20-16C	●		9.525	24	20	20.0	18.0	13.4	50	-	-	-	-	-	
	25-16C	●		9.525	29	32	25.0	28.0	250	16.3	60	-	-	-	-	
	25D-16C	●		9.525	29	25	24.6	22.6	200	16.1	45	STA16	CTH16	ATI16	ATE16	TW10P TW15P
	32-16C	●		9.525	36	32	32.0	29.0	250	19.6	60	-	-	-	-	-
	40-16C	●		9.525	44	40	40.0	36.0	300	23.8	60	-	-	-	-	-
	25-22C	●		12.7	32	32	25.0	29.0	250	17.4	60	-	-	-	-	-
	25D-22C	●		12.7	32	25	24.6	22.6	200	17.2	45	STA22	CTH22	ATI22	ATE22	TW20P
	32-22C	●		12.7	39	32	32.0	29.0	250	21.5	60	-	-	-	-	-
	40-22C	●		12.7	47	40	40.0	36.0	300	25.8	60	-	-	-	-	-
	32-27C			15.875	40	32	32.0	29.0	250	22.4	60	-	-	-	-	-
	40-27C			15.875	48	40	40.0	36.0	300	26.4	60	-	-	-	-	-
	50-27C			15.875	58	50	50.0	45.0	350	31.4	75	STA27	CTH27	ATI27	ATE27	TW25L
	60-27C			15.875	69	60	60.5	54.0	400	36.4	75	-	-	-	-	-

⇒ Applicable holders D10, D11, D14, D15, D17, D 20~D25, D27~D30

• Helix angle is 1.5° for all holders.


● : Stock item



VTH



VETR

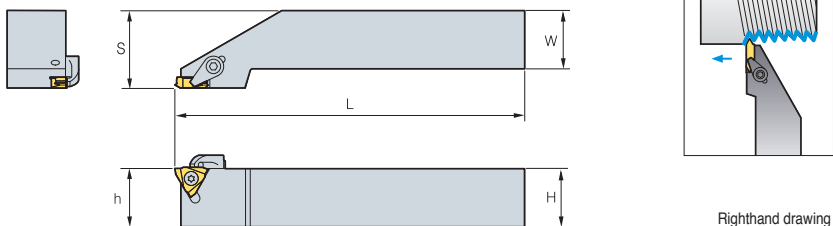

Righthand drawing
(mm)

Designation	Stock	H=(h)	W	L	S	Inserts	Clamp	Clamp Screw	Screw	Wrench
VTH 2020R	●	20	20	125	26.4	VETR				
2525R	●	25	25	150	33.4					
3225R		32	25	170	33.4					

● : Stock item


▶ Vertical Type Thread Insert

Picture	Designation	Coated	Cermet	Uncoated	Dimensions			Picture
		PC130	CN20	ST10P	Pitch (mm)	θ	f	
	VETR 080				0.8	60°	1.4	 d:9.525 t:4.76
	100			●	1.0	60°	1.4	
	125				1.25	60°	1.4	
	150			●	1.5	60°	1.2	
	175				1.75	60°	1.2	
	200			●	2.0	60°	1.2	
	250			●	2.5	60°	1.4	
	300			●	3.0	60°	1.6	
	150F			●	0.8~1.5	60°	1.4	
	300F	●		●	1.5~3.0	60°	1.6	

● : Stock item


D Technical Information for Thread Milling

Thread Milling Holders code system

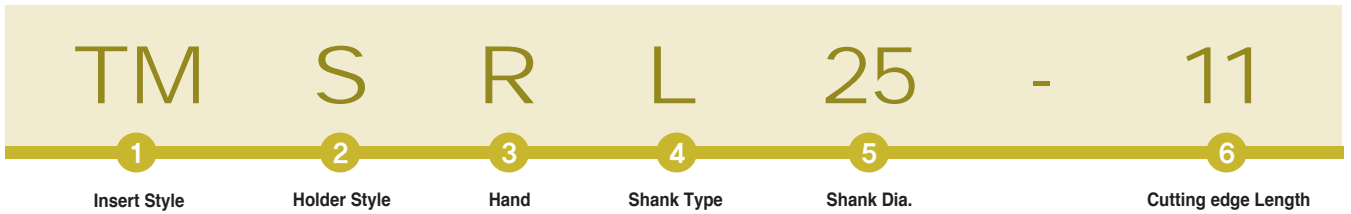

<p>1 Insert Style</p> <p>TM S R L 25 - 11</p> <p>Thread Milling Holder</p>	<p>3 Hand</p> <p>TM S R L 25 - 11</p> <p>R : Right Hand L : Left Hand</p>	<p>5 Shank Dia.</p> <p>TM S R L 25 - 11</p> <p>25 : 25.0</p>
<p>2 Holders Style</p> <p>TM S R L 25 - 11</p> <p>S : Shank Type</p>	<p>4 Shank Type</p> <p>TM S R L 25 - 11</p> <p>None : Standard L : Long Type T : Taper Type</p>	<p>6 Cutting edge Length</p> <p>TM S R L 25 - 11</p> <p>10 : 10.4 22 : 22 11 : 11 27 : 27 16 : 16 38 : 38.5</p>

Thread Milling Inserts code system

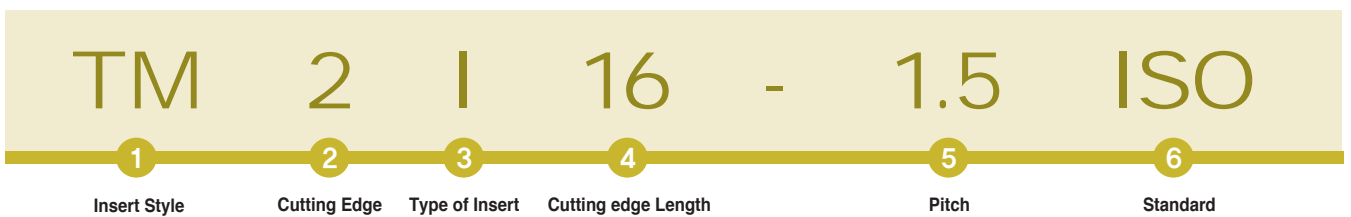


<p>1 Insert Style</p> <p>TM 2 I 16 - 1.5 ISO</p> <p>Thread Milling Holder</p>	<p>4 Cutting edge Length</p> <p>TM 2 I 16 - 1.5 ISO</p> <p>10 : 10.4 11 : 11 16 : 16 22 : 22 27 : 27 38 : 38.5</p>	<p>6 Standard</p> <p>TM 2 I 16 - 1.5 ISO</p> <p>ISO Metric American UN(UNC, UNF, UNEF) UNJ Whit Worth (BSW, BSF, BSP, BSB) National Pipe Thread (NPT) National Pipe Thread (NPTF) British Standard Pipe Thread (BSPT)</p>
<p>2 Cutting Edge</p> <p>TM 2 I 16 - 1.5 ISO</p> <p>None : 1 cutting edge 2 : 2 cutting edge</p>	<p>5 Pitch</p> <p>TM 2 I 16 - 1.5 ISO</p> <p>mm : 0.5 ~ 6.0 tpi : 48 ~ 6</p>	
<p>3 Type of Insert</p> <p>TM 2 I 16 - 1.5 ISO</p> <p>I : Internal E : External EI : External & Internal</p>		



Thread Milling


▶ The right Tool for the Job

Small diameter type

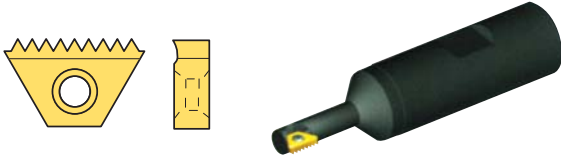

Tool holder : TMSR **Insert :** TM L=10.4mm
For small bore diameters down to 9.5mm

Standard Type

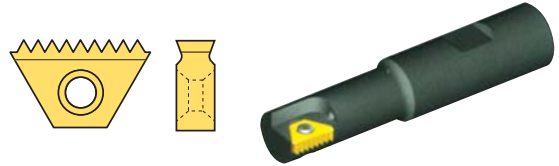


Tool holder : TMSR **Insert :** TM2
For standard length threads

Long Type



Tool holder : TMSR **Insert :** TM2
For long or remote threads


Tapered Type

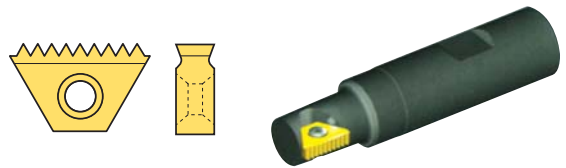


Tool holder : TMSR **Insert :** TM2(BSPT, NPT, NPTF)
For standard length threads

▶ Thread milling methods


External threading




Right handed Thread
Conventional Milling



Left handed Thread
Down Milling




Right handed Thread
Down Milling




Left handed Thread
Conventional Milling


Internal threading




Right handed Thread
Down Milling



Left handed Thread
Conventional Milling




Right handed Thread
Conventional Milling



Left handed Thread
Down Milling

D Technical Information for Thread Milling

▶ Tooling recommendation* for given INTERNAL thread specification

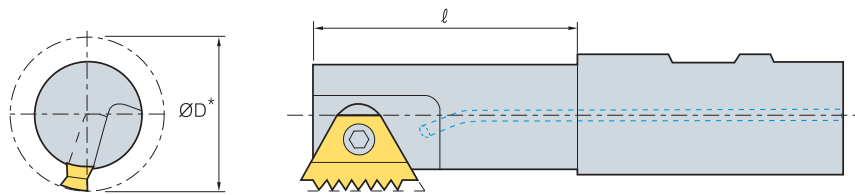

ISO


Pitch (mm)	Nominal Dia. (mm)	Holder	Insert	ℓ-Tool holder overhang	D-Tool cutting dia.*	Min.Thread Depth (Profile depth)
0.75	11	TMSR 12-10	TM2I 10-0.75ISO	12.0	9.0	0.43
1.0	12-14	TMSR 12-10	TM2I 10-1.0ISO	12.0	9.0	0.58
	15-18	TMSR 12-11	TM2I 11-1.0ISO	12.0	11.5	
	20	TMSR 16-16	TM2I 16-1.0ISO	22.0	17.0	
	22	TMSR 20-22	TM2I 22-1.0ISO	29.0	19.0	
	24	TMSR 20-16	TM2I 16-1.0ISO	43.0	20.0	
1.25	25-28	TMSRL 25-16	TM2I 16-1.0ISO	25.0	22.0	0.72
	14	TMSR 12-10	TM2I 10-1.25ISO	12.0	9.0	
1.5	14-15	TMSR 12-10	TM2I 10-1.5ISO	12.0	9.0	0.87
	16-20	TMSR 12-11	TM2I 11-1.5ISO	12.0	11.5	
	22	TMSR 16-16	TM2I 16-1.5ISO	22.0	17.0	
	24	TMSR 20-22	TM2I 22-1.5ISO	29.0	19.0	
	25-26	TMSR 20-16	TM2I 16-1.5ISO	43.0	20.0	
	27-30	TMSRL 25-16	TM2I 16-1.5ISO	25.0	22.0	
	35-42	TMSR 25-27	TM2I 27-1.5ISO	52.0	30.0	
2.0	45	TMSR 32-27	TM2I 27-1.5ISO	58.0	37.0	1.15
	22	TMSRT 16-16	TM2I 16-2.0ISO	22.0	15.5	
	24	TMSR 16-16	TM2I 16-2.0ISO	22.0	17.0	
	25	TMSR 20-22	TM2I 22-2.0ISO	29.0	19.0	
	27	TMSR 20-16	TM2I 16-2.0ISO	43.0	20.0	
	28-32	TMSRL 25-16	TM2I 16-2.0ISO	25.0	22.0	
3.0	39-42	TMSR 25-27	TM2I 27-2.0ISO	52.0	30.0	1.73
	45-48	TMSR 32-27	TM2I 27-2.0ISO	58.0	37.0	
	42-48	TMSR 25-27	TM2I 27-3.0ISO	52.0	30.0	
4.0	50-52	TMSR 32-27	TM2I 27-3.0ISO	58.0	37.0	2.31
	45-52	TMSR 25-27	TM2I 27-4.0ISO	52.0	30.0	
	55	TMSR 32-38	TM2I 38-4.0ISO	55.0	35.0	
	56-58	TMSR 32-27	TM2I 27-4.0ISO	58.0	37.0	
5.0	60-65	TMSR 40-38	TM2I 38-4.0ISO	65.0	46.0	2.89
	48-52	TMSR 32-38	TM2I 38-5.0ISO	55.0	35.0	
5.5	56	TMSR 32-38	TM2I 38-5.5ISO	55.0	35.0	3.17
	60	TMSR 40-38	TM2I 38-5.5ISO	65.0	46.0	
6.0	64-68	TMSR 40-38	TM2I 38-6.0ISO	65.0	46.0	3.46

• The recommended holder is the largest for the given thread specification

* Holder with smaller or equal cutting diameters (D2) can also be used



🔍 Tooling recommendation* for given INTERNAL thread specification

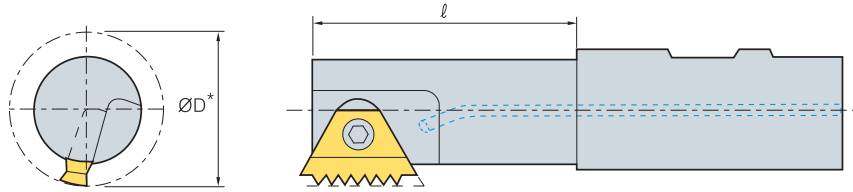


UN

Pitch (tpi)	Nominal Dia. (inch)	Holder	Insert	ℓ-Tool holder overhang	D-Tool cutting dia.*	Min.Thread Depth (Profile depth)
32	7/16-1/2	TMSR 12-10	TMI 10-32UN	12.0	9.0	0.46
	9/16-11/16	TMSR 12-11	TM2I 11-32UN	12.0	11.5	
	3/4-13/16	TMSR 16-16	TM2I 16-32UN	22.0	17.0	
	7/8-15/16	TMSR 20-16	TM2I 16-32UN	43.0	20.0	
	1	TMSR 25-16	TM2I 16-32UN	25.0	22.0	
28	7/16-1/2	TMSR 12-10	TMI 10-28UN	12.0	9.0	0.52
	9/16-3/4	TMSR 12-11	TM2I 11-28UN	12.0	11.5	
	13/16-7/8	TMSR 16-16	TM2I 16-28UN	22.0	17.0	
	15/16	TMSR 20-16	TM2I 16-28UN	43.0	20.0	
	1-1 1/8	TMSRL 25-16	TM2I 16-28UN	25.0	22.0	
24	9/16-11/16	TMSR 12-11	TM2I 11-24UN	12.0	11.5	0.61
20	1/2-9/16	TMSR 12-10	TMI 10-20UN	12.0	9.0	0.73
	5/8-13/16	TMSR 12-11	TM2I 11-20UN	12.0	11.5	
	7/8	TMSR 16-16	TM2I 16-20UN	22.0	17.0	
	15/16-1	TMSR 20-16	TM2I 16-20UN	43.0	20.0	
	1 1/16-1 1/8	TMSRL 25-16	TM2I 16-20UN	25.0	22.0	
	1 3/8-1 5/8	TMSR 25-27	TM2I 27-20UN	52.0	30.0	
	1 11/16-1 13/16	TMSR 32-27	TM2I 27-20UN	28.0	37.0	
18	5/8	TMSR 12-11	TM2I 11-18UN	12.0	11.5	0.81
	1 1/16-1 3/16	TMSRL 25-16	TM2I 16-18UN	25.0	22.0	
	1 7/16-1 5/8	TMSR 25-27	TM2I 27-18UN	52.0	30.0	
	1 11/16	TMSR 32-27	TM2I 27-18UN	58.0	37.0	
16	11/16-13/16	TMSR 12-11	TM2I 11-16UN	12.0	11.5	0.92
	7/8-15/16	TMSR 16-16	TM2I 16-16UN	22.0	17.0	
	1	TMSR 20-16	TM2I 16-16UN	43.0	20.0	
	1 1/16-1 3/16	TMSRL 25-16	TM2I 16-16UN	25.0	22.0	
	1 7/16-1 5/8	TMSR 25-27	TM2I 27-16UN	52.0	30.0	
	1 11/16-1 7/8	TMSR 32-27	TM2I 27-16UN	58.0	37.0	
14	7/8	TMSR 12-11	TM2I 11-14UN	12.0	11.5	1.05
12	7/8	TMSRT 16-16	TM2I 16-12UN	22.0	15.5	1.22
	15/16	TMSR 16-16	TM2I 16-12UN	22.0	17.0	
	1	TMSR 20-22	TM2I 22-12UN	29.0	19.0	
	1 1/16	TMSR 20-16	TM2I 16-12UN	43.0	20.0	
	1 1/8-1 1/4	TMSRL 25-16	TM2I 16-12UN	25.0	22.0	
	1 1/2-1 11/16	TMSR 25-27	TM2I 27-12UN	52.0	30.0	
	1 3/4-1 15/16	TMSR 32-27	TM2I 27-12UN	58.0	37.0	
8	1 11/16-1 15/16	TMSR 25-27	TM2I 27-8UN	52.0	30.0	1.83
	2-1 1/8	TMSR 32-27	TM2I 27-8UN	58.0	37.0	
6	2-2 1/8	TMSR 25-27	TM2I 27-6UN	52.0	30.0	2.44
	2 1/4	TMSR 32-27	TM2I 27-6UN	58.0	37.0	
	2 3/8-2 1/2	TMSR 40-38	TM2I 38-6UN	65.0	46.0	
4.5	2-2 1/4	TMSR 32-38	TM2I 38-4.5UN	55.0	35.0	3.26
4	2 1/2	TMSR 40-38	TM2I 38-4UN	65.0	46.0	3.67

• The recommended holder is the largest for the given thread specification
 * Holder with smaller or equal cutting diameters (D2) can also be used

D Technical Information for Thread Milling

🔍 Tooling recommendation* for given INTERNAL thread specification

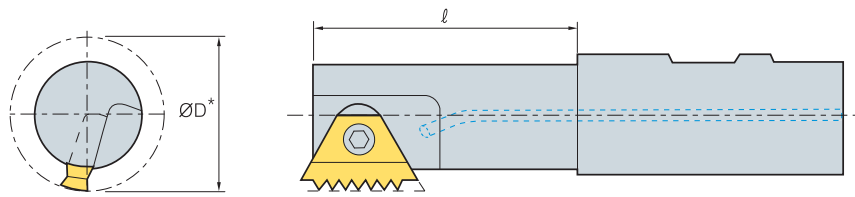

UNJ

Pitch (tpi)	Nominal Dia. (inch)	Holder	Insert	ℓ-Tool holder overhang	D-Tool cutting dia.*	Min.Thread Depth (Profile depth)
24	9/16-11/16	TMSR 12-11	TM2I 11-24UNJ	12.0	11.5	0.55
20	1/2	TMSR 12-10	TMI 10-20UNJ	12.0	9.0	0.66
	3/4-13/16	TMSR 12-11	TM2I 11-20UNJ	12.0	11.5	
	7/8	TMSR 16-16	TM2I 16-20UNJ	22.0	17.0	
	15/16-1	TMSR 20-16	TM2I 16-20UNJ	43.0	20.0	
18	5/8	TMSR 12-11	TM2I 11-18UNJ	12.0	11.5	0.74
	1 1/16-1 3/16	TMSRL 25-16	TM2I 16-18UNJ	25.0	22.0	
16	11/16-13/16	TMSR 12-11	TM2I 11-16UNJ	12.0	11.5	0.83
	7/8-15/16	TMSR 16-16	TM2I 16-16UNJ	22.0	17.0	
	1	TMSR 20-16	TM2I 16-16UNJ	43.0	20.0	
	1 1/16-1 3/16	TMSRL 25-16	TM2I 16-16UNJ	25.0	22.0	
	1 7/16-1 5/8	TMSR 25-27	TM2I 27-16UNJ	52.0	30.0	
14	1 11/16-1 7/8	TMSR 32-27	TM2I 27-16UNJ	58.0	37.0	0.95
	7/8	TMSR 12-11	TM2I 11-14UNJ	12.0	11.5	
12	7/8	TMSRT 16-16	TM2I 16-12UNJ	22.0	15.5	1.11
	15/16-1	TMSR 16-16	TM2I 16-12UNJ	22.0	17.0	
	1 1/16	TMSR 20-16	TM2I 16-12UNJ	43.0	20.0	
	1 1/8-1 1/4	TMSRL 25-16	TM2I 16-12UNJ	25.0	22.0	
	1 1/2-1 11/16	TMSR 25-27	TM2I 27-12UNJ	52.0	30.0	
	1 3/4-1 15/16	TMSR 32-27	TM2I 27-12UNJ	58.0	37.0	


W

Pitch (tpi)	Nominal Dia. (inch)	Holder	Insert	ℓ-Tool holder overhang	D-Tool cutting dia.*	Min.Thread Depth (Profile depth)
26	1/2-9/16	TMSR 12-10	TMEI 10-26W	12.0	9.0	0.63
	5/8-3/4	TMSR 12-11	TM2EI 11-26 W	12.0	11.5	
	13/16-7/8	TMSR 16-16	TM2EI 16-26W	22.0	17.0	
	15/16-1	TMSR 20-16	TM2EI 16-26W	43.0	20.0	
	1 1/16-1 1/8	TMSRL 25-16	TM2EI 16-26W	25.0	22.0	
20	9/16	TMSR 12-10	TM2EI 10-20W	12.0	9.0	0.81
	5/8-13/16	TMSR 12-11	TM2EI 11-20W	12.0	11.5	
	7/8-15/16	TMSR 16-16	TM2EI 16-20W	22.0	17.0	
	1	TMSR 20-16	TM2EI 16-20W	43.0	20.0	
	1 1/16-1 3/16	TMSRL 25-16	TM2EI 16-20W	25.0	22.0	
16	13/16	TMSR 16-16	TM2EI 16-16W	22.0	15.5	1.02
	7/8-15/16	TMSR 16-16	TM2EI 16-16W	22.0	17.0	
	1-1 1/16	TMSR 20-16	TM2EI 16-16W	43.0	20.0	
	1 1/8-1 1/4	TMSRL 25-16	TM2EI 16-16W	25.0	22.0	
	1.4-1 5/8	TMSR 25-27	TM2EI 27-16W	52.0	30.0	
	1 3/4-1.9	TMSR 32-27	TM2EI 27-16W	28.0	37.0	
12	1 1/2-1 3/4	TMSR 25-27	TM2EI 27-12W	52.0	30.0	1.36
	1 7/8	TMSR 32-27	TM2EI 27-12W	58.0	37.0	
8	1 7/8-1.9	TMSR 25-27	TM2EI 27-8W	52.0	30.0	2.03
	2.1-2 1/8	TMSR 32-27	TM2EI 27-8W	58.0	37.0	
7	2	TMSR 25-27	TM2EI 27-7W	52.0	30.0	2.32
6	2.1-2 1/8	TMSR 25-27	TM2EI 27-6W	52.0	30.0	2.71
	2 1/4	TMSR 32-38	TM2EI 38-6W	55.0	35.0	
	2 3/8-2.6	TMSR 32-27	TM2EI 27-6W	58.0	37.0	
	2 5/8-2 3/4	TMSR 40-38	TM2EI 38-6W	65.0	46.0	
5	3	TMSR 40-38	TM2EI 38-5W	65.0	46.0	3.25
4.5	3 1/2	TMSR 40-38	TM2EI 38-4.5W	65.0	46.0	3.61

* The recommended holder is the largest for the given thread specification
 * Holder with smaller or equal cutting diameters (D2) can also be used



▶ Tooling recommendation* for given INTERNAL thread specification

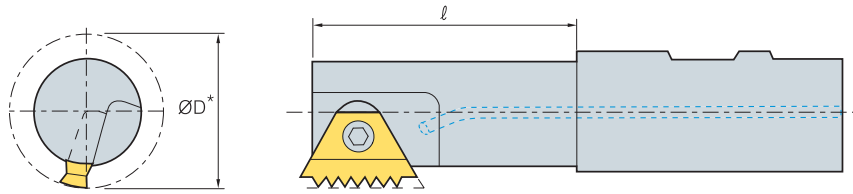

BSPT

Pitch (tpi)	Nominal Dia. (inch)	Holder	Insert	ℓ-Tool holder overhang	D-Tool cutting dia.*	Min.Thread Depth (Profile depth)
19	3/8	TMSR 21-11	TM2EI 11-19 BSPT	20.0	11.5	0.86
14	1/2-3/4	TMSRT 16-11	TM2EI 16-14 BSPT	22.0	15.5	1.16
11	1-1 1/4	TMSRT 20-16	TM2EI 16-11 BSPT	23.0	19.0	1.48
	1 1/2	TMSR 25-27	TM2EI 27-11 BSPT	52.0	30.0	
	2-6	TMSRT 32-27	TM2EI 27-11 BSPT	58.0	37.0	

NPT

Pitch (tpi)	Nominal Dia. (inch)	Holder	Insert	ℓ-Tool holder overhang	D-Tool cutting dia.*	Min.Thread Depth (Profile depth)
14	1/2	TMSRT 16-16	TM2EI 16-14 NPT	22.0	15.5	1.33
	3/4	TMSRT 20-16	TM2EI 16-14 NPT	23.0	19.0	
11.5	1	TMSRT 20-16	TM2EI 16-11.5 NPT	23.0	19.0	1.64
	1 1/4	TMSR 25-27	TM2EI 27-11.5 NPT	52.0	30.0	
	1 1/2-2	TMSRT 32-27	TM2EI 27-11.5 NPT	58.0	37.0	
8	2 1/2	TMSRT 32-27	TM2EI 27-8 NPT	58.0	37.0	2.42
	3-24	TMSR 40-38	TM2EI 38-8 NPT	65.0	46.0	

NPTF

Pitch (tpi)	Nominal Dia. (inch)	Holder	Insert	ℓ-Tool holder overhang	D-Tool cutting dia.*	Min.Thread Depth (Profile depth)
14	1/2	TMSRT 16-16	TM2EI 16-14 NPTF	22.0	15.5	1.35
	3/4	TMSRT 20-16	TM2EI 16-14 NPTF	23.0	19.0	
11.5	1	TMSRT 20-16	TM2EI 16-11.5 NPTF	23.0	19.0	1.63
	1 1/2	TMSR 25-27	TM2EI 27-11.5 NPTF	52.0	30.0	
	2	TMSRT 32-27	TM2EI 27-11.5 NPTF	58.0	37.0	
8	2 1/2	TMSRT 32-27	TM2EI 27-8 NPTF	58.0	37.0	2.38
	3	TMSR 40-38	TM2EI 38-8 NPTF	65.0	46.0	

- The recommended holder is the largest for the given thread specification
- * Holder with smaller or equal cutting diameters (D2) can also be used



▶ Minimum Bore Diameters for Thread milling

Pitch		0.5	0.6	0.7	0.75 0.80	0.9	1.0	1.25	1.5	1.75	2.0	–	2.5	3.0	3.5	4.0	4.5	5.0	5.5	–	6.0	–	
	tpi	48	44	36	32	28	26 24	20 19	18 16	14	13 12	11.5 11	10	9 8	7	6	–	5	–	4.5	–	4	
Holder Designation	diameter	Minimum diameter for machining																					
TMSR 12-10	9.0	9.5	9.7	9.9	10.0	10.4	10.7	11.4	12.0														
TMSR 20-10	9.0	9.5	9.7	9.9	10.0	10.4	10.7	11.4	12.0														
TMSR 12-11	11.5	12.0	12.2	12.4	12.5	12.9	13.2	13.9	14.5	15.1													
TMSR 20-11	11.5	12.0	12.2	12.4	12.5	12.9	13.2	13.9	14.5	15.1													
TMSRL 25-11	11.5	12.0	12.2	12.4	12.5	12.9	13.2	13.9	14.5	15.1													
TMSRT 16-16	15.5	16.0	16.2	16.4	16.5	16.9	17.2	17.9	18.5	19.0	19.5	20.0											
TMSR 16-16	17.0	17.6	17.8	18.0	18.2	18.7	19.0	19.6	20.0	20.5	21.0	21.5											
TMSR 16-22	17.0	17.6	17.8	18.0	18.2	18.7	19.0	19.6	20.0	20.5	21.0	21.5											
TMSR 20-22	19.0	19.7	20.0	20.2	20.4	20.8	21.0	21.6	22.0	22.5	23.0	23.5											
TMSRT 20-16	19.0	19.7	20.0	20.2	20.4	20.8	21.0	21.6	22.0	22.5	23.0	23.5											
TMSR 20-16	20.0	20.7	21.0	21.2	21.4	21.8	22.0	22.6	23.0	23.5	24.0	24.5											
TMSRW 25-22	22.0	22.7	23.0	23.2	23.4	23.8	24.0	24.6	25.0	25.5	26.0	26.5											
TMSRL 25-22	22.0	22.7	23.0	23.2	23.4	23.8	24.0	24.6	25.0	25.5	26.0	26.5											
TMSRL 25-16	22.0	22.7	23.0	23.2	23.4	23.8	24.0	24.6	25.0	25.5	26.0	26.5											
TMSR 25-27	30.0	30.7	31.0	31.2	31.4	31.8	32.0	32.8	33.5	34.1	34.6	35.6	36.6	39.0	42.0	45.0	48.0						
TMSRL 25-27	30.0	30.7	31.0	31.2	31.4	31.8	32.0	32.8	33.5	34.1	34.6	35.6	36.6	39.0	42.0	45.0	48.0						
TMSR 32-38	35.0								38.5	39.1	39.6	40.6	42.0	44.0	47.0	50.0	53.4	42.5	50.0	44.6	57.5	56.6	
TMSR 32-27	37.0	38.0	38.2	38.4	38.6	39.1	39.5	40.4	41.0	41.5	42.0	43.0	44.0	46.5	49.0	52.0	55.5						
TMSRL 32-27	37.0	38.0	38.2	38.4	38.6	39.1	39.5	40.4	41.0	41.5	42.0	43.0	44.0	46.5	49.0	52.0	55.5						
TMSRT 32-27	37.0	38.0	38.2	38.4	38.6	39.1	39.5	40.0	41.0	41.5	42.0	43.0	44.0	46.5	49.0	52.0	55.5						
TMSR 40-38	46.0								49.5	50.1	50.6	51.6	53.0	55.0	55.2	55.6	55.0	52.5	54.0	54.5	57.5	56.6	
TMSRL 40-38	46.0								49.5	50.1	50.6	51.6	53.0	55.0	55.2	55.6	55.0	52.5	54.0	54.5	57.5	56.6	

In order to perform a thread milling operation, a milling machine with three-axis control capability of helical interpolation is required. Helical interpolation is a CNC function producing tool movement along a helical path. This helical motion combines circular movement in one plane with a simultaneous linear motion in a plane perpendicular to the first. For example, the path from point A to point B (Fig.A) on the envelope of the cylinder combines a circular movement in the xy plane with a linear displacement in the z direction. On most CNC systems this function can be executed in two different ways:

- GO2 : Helical interpolation in a clockwise direction
- GO3 : Helical interpolation in a counter-clockwise direction




Fig. A




Fig. B


▶ The thread milling operation (Fig. B) consists of circular rotation of the tool around its own axis together with an orbiting motion along the bore or workpiece circumference. During one such orbit, the tool will shift vertically one pitch length. These movements combined with the insert geometry create the required thread form. There are three acceptable ways of approaching the workpiece with the tool to initiate production of the thread:

1. Tangential Arc Approach
2. Radial Approach
3. Tangential Line Approach


▶ Tangential Arc Approach

▶ With this method, the tool enters and exits the workpiece smoothly. No marks are left on the workpiece and there is no vibration, even with harder materials. Although it requires slightly more complex programming than the radial approach (see below), this is the method recommended for machining the highest quality threads

Internal Thread



External Thread

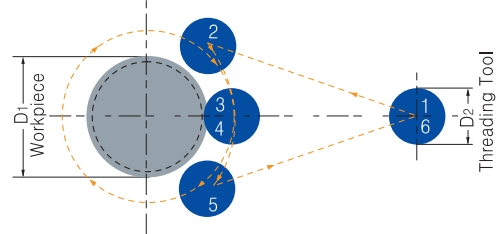


- 1-2 : rapid approach
- 2-3 : tool entry along tangential arc, with simultaneous feed along z-axis
- 3-4 : helical movement during one full orbit (360°)
- 4-5 : tool exit along tangential arc, with continuing feed along z-axis
- 5-6 : rapid return

▶ Radial Approach


▶ This is the simplest method. There are two characteristics worth noting about the radial approach:
 A. a small vertical mark may be left at the entry (and exit) point. This is of no significance to the thread itself
 B. when using this method with very hard materials, there may be a tendency of the tool to vibrate as it approaches the full cutting depth

▶ Note: Radial feed during entry to the full profile depth should only be 1/3 of the subsequent circular feed!

Internal Thread



External Thread

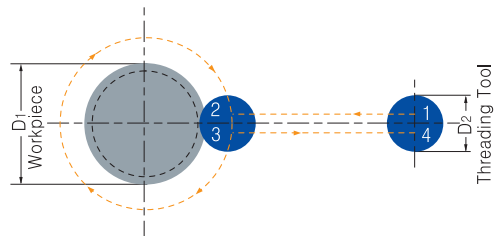


- 1-2 : radial entry
- 2-3 : helical movement during one full orbit (360°)
- 3-4 : radial exit

▶ Tangential Line Approach

▶ This method is very simple, and has all of the advantages of the tangential arc method. However, it is applicable only with external threads


External Thread

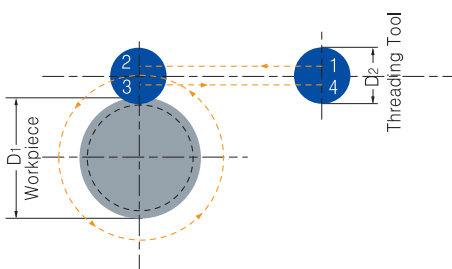

- 1-2 : radial entry with simultaneous feed along z axis
- 2-3 : helical movement during one full orbit (360°)
- 3-4 : radial exit

Preparing for the Thread Milling Operation

▶ Calculation of Rotational Velocity and Feed at the Cutting Edge



$$n = \frac{vc \times 1000}{\pi \times D2}$$


$$vc = \frac{n \times \pi \times D2}{1000}$$

$$F1 = n \times z \times fn$$

- n** - Rotational Velocity [R.P.M]
- vc** - Cutting Speed [m/min]
- D2** - Tool holder Cutting Dia. [mm]
- F1** - Real Feed rate at the Cutting edges [mm/min]
- z** - No. of Cutting Edges
- fn** - Feed per Root per Rotation [mm/rev]

▶ Calculation of Feed Rates at the Tool Center Line

- ▶ On most CNC machines, the feed rate required for programming is that of the center-line of the tool. When dealing with linear tool movement, the feed rate at the cutting edge and the center line are identical, but with circular tool movement this is not the case. The equations define the relationship between feed rates at the cutting edge and at the tool center line.

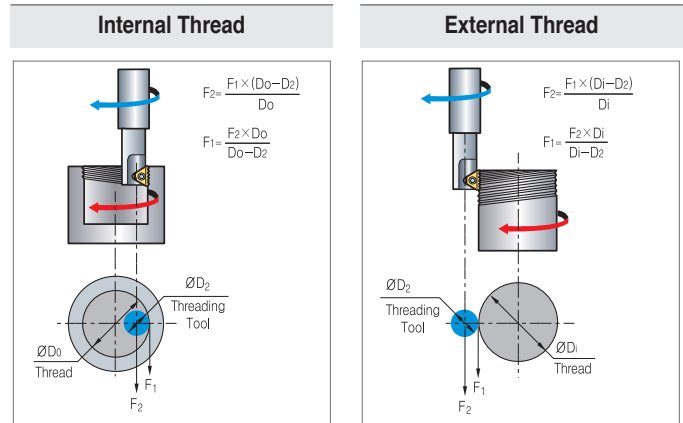

▶ Grades and Applications

Grade	Application
PC9570T	First Choice for steel and cast iron A tough sub-micron substrate with TiCN coating Provides good fracture toughness and excellent wear resistance
PC9070T	General grade Enhance wear Resistance with new-coating technology Multi layer film Superior performance for stainless steel and HSS

▶ Trouble shooting

Problem	Possible	Solution
Increased insert flank wear	Cutting speed too high Chip is too thin Insufficient coolant	Reduce cutting speed/use coated insert Increase feed rate Increase coolant flow rate
Chipping of cutting edge	Chip is too thick Vibration	Reduce feed rate / Use the tangential arc method Increase RPM Check stability
Material Built-up on the cutting edge	Incorrect cutting speed Unsuitable carbide grade	Change cutting speed Use a coated carbide grade
Chatter / Vibration	Feed rate is too high Profile is too deep Thread length is too long	Reduce the feed. Execute two passes, each with increased cutting depth/ Execute two passes, each cutting only half the thread length Execute two passes, each cutting only half the thread length
Insufficient thread accuracy	Tool deflection	Reduce feed rate / Execute a "zero" cut

Recommended cutting condition


	Workpiece	Hardness Brinell HB	vc(m/min)		Feed fz(mm/t)		
			Grade		Indexable Insert	Solid Endmill	
			PC9570T	PC9070M			
P	Unalloyed steel	Low carbon(C+0.1-0.25%)	125	100 ~ 210	80 ~ 250	0.05 ~ 0.3	0.03 ~ 0.15
		Medium carbon(C=0.25-0.55%)	150	100 ~ 180	80 ~ 230	0.05 ~ 0.25	0.03 ~ 0.1
		High carbon (C=0.55-0.85%)	170	100 ~ 170	80 ~ 200	0.05 ~ 0.2	0.03 ~ 0.08
	Low alloy steel (alloying elements≤5%)	Non hardened	180	90 ~ 160	60 ~ 180	0.05 ~ 0.25	0.03 ~ 0.1
		Hardened	275	80 ~ 150	60 ~ 170	0.05 ~ 0.2	0.03 ~ 0.07
		Hardened	350	70 ~ 140	60 ~ 160	0.05 ~ 0.15	0.01 ~ 0.03
	High alloy steel	Annealed	200	60 ~ 130	40 ~ 100	0.05 ~ 0.2	0.03 ~ 0.05
		Hardened	325	70 ~ 110	30 ~ 80	0.05 ~ 0.1	0.01 ~ 0.03
Cast steel	Low alloy (alloying elements<5%)	200	100 ~ 170	80 ~ 250	0.05 ~ 0.15	0.03 ~ 0.1	
	High alloy(alloying elements>5%)	225	70 ~ 120	60 ~ 170	0.05 ~ 0.1	0.01 ~ 0.03	
M	Stainless steel Ferritic	Non hardened	200	100 ~ 170	60 ~ 150	0.05 ~ 0.15	0.04 ~ 0.1
		Hardened	330	100 ~ 170	60 ~ 120	0.05 ~ 0.1	0.01 ~ 0.05
	Stainless steel Austenitic	Austenitic	180	70 ~ 140	60 ~ 140	0.05 ~ 0.15	0.04 ~ 0.1
		Super austenitic	200	70 ~ 140	60 ~ 130	0.05 ~ 0.1	0.04 ~ 0.1
	Stainless steel Cast ferritic	Non hardened	200	70 ~ 140	60 ~ 160	0.05 ~ 0.15	0.04 ~ 0.1
		Hardened	330	70 ~ 140	60 ~ 110	0.05 ~ 0.1	0.03 ~ 0.05
	Stainless steel Cast austenitic	Austenitic	200	70 ~ 120	60 ~ 150	0.05 ~ 0.15	0.04 ~ 0.1
		Hardened	330	70 ~ 120	60 ~ 100	0.05 ~ 0.1	0.03 ~ 0.05
	High eimperature alloys	Annealed (Iron based)	200	20 ~ 45	30 ~ 60	0.05 ~ 0.1	0.04 ~ 0.1
		Aged (Iron based)	280	20 ~ 30	20 ~ 50	0.02 ~ 0.05	0.01 ~ 0.03
		Annealed(Nickel or Cobalt based)	250	15 ~ 20	15 ~ 35	0.02 ~ 0.05	0.01 ~ 0.03
		Aged (Nickel or Cobalt based)	350	10 ~ 15	15 ~ 30	0.02 ~ 0.05	0.01 ~ 0.03
Titanium alloys	Pure 99.5 Ti	400Rm	70 ~ 140	40 ~ 80	0.02 ~ 0.05	0.03 ~ 0.05	
	□ +□ alloys	1050Rm	20 ~ 50	20 ~ 50	0.02 ~ 0.05	0.03 ~ 0.05	
K	Extra hard steel	Hardened & tempered	55HRC	20 ~ 45	15 ~ 45	0.01 ~ 0.03	0.005 ~ 0.01
	Malleable cast iron	Ferritic (short chips)	130	60 ~ 130	70 ~ 160	0.02 ~ 0.08	0.01 ~ 0.03
		Pearlitic (long chips)	230	60 ~ 120	60 ~ 150	0.02 ~ 0.05	0.03 ~ 0.05
	Grey cast iron	Low tensile strength	180	60 ~ 130	70 ~ 160	0.05 ~ 0.15	0.05 ~ 0.1
		High tensile strength	260	60 ~ 100	40 ~ 120	0.05 ~ 0.1	0.03 ~ 0.05
	Nodular SG iron	Ferritic	160	60 ~ 125	40 ~ 110	0.05 ~ 0.15	0.05 ~ 0.1
		Pearlitic	260	50 ~ 90	40 ~ 100	0.05 ~ 0.1	0.03 ~ 0.05
	Aluminum alloys Wrought	Non aging	60	100 ~ 250	200 ~ 300	0.1 ~ 0.4	0.1 ~ 0.25
		Aged	100	100 ~ 180	150 ~ 250	0.1 ~ 0.3	0.1 ~ 0.2
	Aluminum alloys	Cast	75	150 ~ 400	100 ~ 200	0.1 ~ 0.3	0.1 ~ 0.2
Cast & aged		90	150 ~ 280	120 ~ 220	0.05 ~ 0.25	0.1 ~ 0.15	
Cast Si 13-22%		130	80 ~ 150	200 ~ 300	0.1 ~ 0.3	0.1 ~ 0.2	
Copper and copper alloys	Brass	90	120 ~ 210	200 ~ 300	0.1 ~ 0.3	0.1 ~ 0.25	
	Bronze and mom leaded copper	100	120 ~ 210	150 ~ 250	0.05 ~ 0.25	0.1 ~ 0.2	

Recommendation

- ▶ At tool entry, set the Feed f [mm/tooth] to 70% lower than the threading Feed



Example

- ▶ Threading Feed: 0.3[mm/t]
- ▶ Tool entry Feed: 0.09[mm/t]

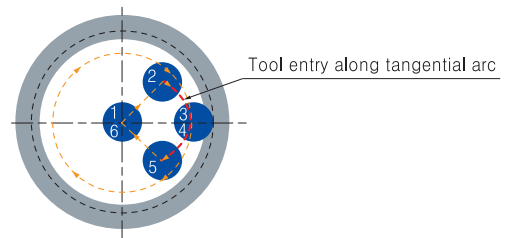

D Thread Milling Inserts

ISO Metric



Defined by : R262 (DIN 13)
Tolerance class : 6g/6H

(mm)

External / Internal

Insert Size		Pitch (mm)	Designation				L1	Tooth	Tool holder		
d	L		External	PC9570T	Internal	PC9570T					
6.0	10.4	0.5	-		TMI	10-0.5ISO	●	10.0	20	TMSR - 10	
		0.75	-			10-0.75ISO		9.75	13		
		1.0	-			10-1.0ISO	●	9.0	9		
		1.25	-			10-1.25ISO		8.75	7		
		1.5	-			10-1.5ISO		9.0	6		
6.35	11	0.5	-		TM2I	11-0.5ISO		10.0	20	TMSR - 11	
		0.75	TM2E	11-0.75ISO			●	10.5	14		
		1.0		11-1.0ISO			●	10.0	10		
		1.25		11-1.25ISO				10.0	8		
		1.25	-					8.75	7		
		1.5		11-1.5ISO				9.0	6		
		1.5	-				●	10.5	7		
9.525	16	0.5	-		TM2I	16-0.5ISO		15.0	30	TMSR - 16	
		0.75	TM2E	16-0.75ISO				15.0	20		
		0.8	-					14.4	18		
		1.0		16-1.0ISO				14.0	14		
		1.0	-					15.0	15		
		1.25		16-1.25ISO				15.0	12		
		1.5		16-1.5ISO			●	15.0	10		
		1.75		16-1.75ISO				14.0	8		
		2.0		16-2.0ISO			●	14.0	7		
9.525B	22	1.0	TM2E	22-1.0ISO		TM2I	22-1.0ISO		22.0	22	TMSR - 22
		1.25		22-1.25ISO				21.25	17		
		1.5		22-1.5ISO			●	21.0	14		
		1.75		22-1.75ISO				21.0	12		
		2.0		22-2.0ISO	●		●	22.0	11		
15.875	27	1.0	TM2E	27-1.0ISO		TM2I	27-1.0ISO		26.0	26	TMSR - 27
		1.25		27-1.25ISO				25.0	20		
		1.5		27-1.5ISO			●	25.5	17		
		1.75		27-1.75ISO				24.5	14		
		2.0		27-2.0ISO			●	24.0	12		
		2.5		27-2.5ISO				25.0	10		
		3.0		27-3.0ISO			●	24.0	8		
		3.5		27-3.5ISO				24.5	7		
		4.0		27-4.0ISO			●	24.0	6		
4.5		27-4.5ISO				22.5	5				
19.05B	38.5	1.5	TM2E	38-1.5ISO		TM2I	38-1.5ISO		36.0	24	TMSR - 38
		2.0		38-2.0ISO				36.0	18		
		3.0		38-3.0ISO				36.0	12		
		4.0		38-4.0ISO				32.0	8		
		4.5		38-4.5ISO				31.5	7		
		5.0		38-5.0ISO				30.0	6		
		5.5		38-5.5ISO				33.0	6		
6.0		38-6.0ISO				30.0	5				

➤ Applicable holders D49

All inserts except TMI10 code have 2 cutting edges




● : Stock item



D

Threading

American UN



Defined by : ANSI B1.1.74
Tolerance class : Class 2A/2B

(mm)

External / Internal

Insert Size		Pitch (tpi)	Designation				L1	Tooth	Tool holder		
d	L		External	PC9570T	Internal	PC9570T					
6.0	10.4	32	-		TM1	10-32UN		9.53	12	TMSR - 10	
		28	-			10-28UN		9.07	10		
		24	-			10-24UN		9.53	9		
		20	-			10-20UN		8.89	7		
		18	-			10-18UN		8.47	6		
		16	-			10-16UN		7.94	5		
6.35	11	48	-		TM21	11-48UN		10.05	19	TMSR - 11	
		40	-			11-40UN		10.16	16		
		32	-			11-32UN		10.32	13		
		28	TM2E	11-28UN			11-28UN		9.98		11
		27		11-27UN			11-27UN		10.35		11
		24		11-24UN			11-24UN		9.53		9
		20		11-20UN			11-20UN		10.16		8
		18		11-18UN			11-18UN		9.88		7
		16		11-16UN			11-16UN		9.53		6
		14		11-14UN			11-14UN		9.07		5
9.525	16	40	-		TM21	16-40UN		14.61	40	TMSR - 16	
		32	-			16-32UN		15.08	32		
		28	TM2E	16-28UN			16-28UN		14.51		28
		27		16-27UN			16-27UN		14.11		27
		24		16-24UN			16-24UN		14.82		24
		20		16-20UN			16-20UN		13.97		20
		18		16-18UN			16-18UN		14.11		18
		16		16-16UN			16-16UN		14.29		16
		14		16-14UN			16-14UN		14.51		14
		13		16-13UN			16-13UN		13.68		13
		12		16-12UN			16-12UN	●	14.82		12
		11.5		16-11.5UN			16-11.5UN		13.25		11.5
9.525B	22	24	TM2E	22-24UN		TM21	22-24UN		21.16	20	TMSR - 22
		20		22-20UN			22-20UN		21.59	17	
		18		22-18UN			22-18UN		21.17	15	
		16		22-16UN			22-16UN		20.64	13	
		14		22-14UN			22-14UN		21.77	12	
		13		22-13UN			22-13UN		21.49	11	
		12		22-12UN			22-12UN		21.17	10	
15.875	27	24	TM2E	27-24UN		TM21	27-24UN		25.40	24	TMSR - 27
		20		27-20UN			27-20UN		25.40	20	
		18		27-18UN			27-18UN		25.40	18	
		16		27-16UN			27-16UN		25.40	16	
		14		27-14UN			27-14UN		25.40	14	
		13		27-13UN			27-13UN		25.40	13	
		12		27-12UN			27-12UN		25.40	12	
		11.5		27-11.5UN			27-11.5UN		24.30	11	
		11		27-11UN			27-11UN		25.40	11	
		10		27-10UN			-		22.86	9	
		10		-			27-10UN		25.40	10	
		9		27-9UN			27-9UN		22.58	8	
		8		27-8UN			27-8UN		22.23	7	
		7		27-7UN			-		21.77	6	
		7		-			27-7UN		25.40	7	
		6		27-6UN			-		21.17	5	
6		-			27-6UN		25.40	6			
19.05	38.5	6	TM2E	38-6UN		TM21	38-6UN		38.87	8	TMSR - 38
		5		38-5UN			38-5UN		30.48	6	
		4.5		38-4.5UN			38-4.5UN		33.87	6	
		4		38-4UN			38-4UN		31.75	5	

➔ Applicable holders **D49**



All inserts except TM110 code have 2 cutting edges

● : Stock item



D Thread Milling Inserts

UNJ (Unified Constant Thread)



Defined by : MIL-S-8879C
Tolerance class : 3A/3B

External / Internal

(mm)

Insert Size		Pitch (tpi)	Designation				L1	Tooth	Tool holder		
d	L		External	PC9070T	Internal	PC9070T					
6.0	10.4	24	-		TMI	10-24UNJ		9.53	9	TMSR - 10	
		20	-			10-20UNJ		8.89	7		
		18	-			10-18UNJ		8.47	6		
		16	-			10-16UNJ		9.53	8		
6.35	11	24	TM2E	11-24UNJ		TM2I	11-24UNJ		9.53	9	TMSR - 11
		20		11-20UNJ			11-20UNJ		10.16	8	
		18		-			11-18UNJ		9.88	7	
		16		11-16UNJ			11-16UNJ		9.53	6	
		14		11-14UNJ			11-14UNJ		9.07	5	
9.525	16	24	TM2E	16-24UNJ		TM2I	16-24UNJ		14.82	14	TMSR - 16
		20		16-20UNJ			16-20UNJ		13.97	11	
		18		16-18UNJ			16-18UNJ		14.11	10	
		16		16-16UNJ			16-16UNJ		14.29	9	
		14		16-14UNJ			16-14UNJ		14.51	8	
		13		16-13UNJ			-		13.68	7	
		12		16-12UNJ			16-12UNJ		14.82	7	
15.875	27	16	TM2E	27-16UNJ		TM2I	27-16UNJ		25.40	16	TMSR - 27
		12		27-12UNJ			27-12UNJ		25.40	12	
		11		27-11UNJ			27-11UNJ		25.40	11	




➔ Applicable holders D49

All inserts except TMI10 code have 2 cutting edges

● : Stock item



Whithworth (BSW, BSF, BSP, BSB)



External / Internal

BSW Defined by : B.S.84:1956, DIN 259, ISO228/1:1982
 BSP Defind by : B.S.2779:1956

Tolerance class : BSW-Medium class A, BSP-Medium class

(mm)

Insert Size		Pitch (tpi)	Designation		L1	Tooth	Tool holder
d	L		External + Internal	PC9070T			
6.0	10.4	28	TMEI 10-28W		9.07	10	TMSR - 10
		26	10-26W		8.79	9	
		24	10-24W		9.53	9	
		20	10-20W		8.89	7	
		19	10-19W		9.36	7	
6.35	11	28	TM2EI 11-28W		9.98	11	TMSR - 11
		26	11-26W		9.77	10	
		24	11-24W		9.53	9	
		20	11-20W		10.16	8	
		19	11-19W		9.36	7	
		14	11-14W		9.07	5	
9.525	16	26	TM2EI 16-26W		14.65	15	TMSR - 16
		24	16-24W		14.82	14	
		20	16-20W		13.97	11	
		19	16-19W		14.71	11	
		18	16-18W		14.11	10	
		16	16-16W		14.29	9	
		14	16-14W		14.51	8	
		12	16-12W		14.82	7	
9.525B	22	24	TM2EI 22-24W		21.17	20	TMSR - 22
		20	22-20W		21.59	17	
		19	22-19W		21.39	16	
		18	22-18W		21.17	15	
		16	22-16W		20.64	13	
		14	22-14W		21.77	12	
		12	22-12W		21.17	10	
		11	22-11W		20.78	9	
15.875	27	16	TM2EI 27-16W		25.4	16	TMSR - 27
		14	27-14W		25.4	14	
		12	27-12W		23.28	11	
		11	27-11W		23.09	10	
		10	27-10W		25.40	10	
		9	27-9W		22.58	8	
		8	27-8W		22.23	7	
		7	27-7W		21.77	6	
19.05B	38.5	11	TM2EI 38-11W		34.64	15	TMSR - 38
		6	38-6W		33.87	8	
		5	38-5W		30.48	6	
		4.5	38-4.5W		33.87	6	
		-	38-15W		-	-	

➔ Applicable holders **D49**

All inserts except TMI10 code have 2 cutting edges



● : Stock item

D Thread Milling Inserts

NPT



External / Internal



Defined by : USAS B2.1:1968
Tolerance class : Standard NPT

(mm)

Insert Size		Pitch (tpi)	Designation		L1	Tooth	Tool holder		
d	L		External + Internal	PC9070T			RH	LH	
9.525	16	18	TM2E	16-18NPT *		14.11	10	TMSRT - 16	TMSLT - 16
		14	TM2EI	16-14NPT		14.51	8		
		11.5		16-11.5NPT		13.25	6		
9.525B	22	14	TM2EI	22-14NPT		21.77	12	TMSRT - 22	TMSLT - 22
15.875	27	11.5	TM2EI	27-11.5NPT	●	24.30	11	TMSR - 27	TMSL - 27
		8		27-8NPT	●	22.23	7		
19.05B	38.5	11.5	TM2EI	38-11.5NPT		35.34	16	TMSR - 38	TMSL - 38
		8		38-8NPT		31.75	10		

➔ Applicable holders D49




* TM2E16-18NPT is for external threading

● : Stock item

NPTF



External / Internal



Defined by : ANSI 1.20.3-1976
Tolerance class : Standard NPTF

(mm)

Insert Size		Pitch (tpi)	Designation		L1	Tooth	Tool holder		
d	L		External + Internal	PC9070T			RH	LH	
9.525	16	14	TM2EI	16-14NPTF	●	14.51	8	TMSRT - 16	TMSLT - 16
		11.5		16-11.5NPTF		13.25	6		
9.525B	22	14	TM2EI	22-14NPTF		21.77	12	TMSRT - 22	TMSLT - 22
		11.5		22-11.5NPTF		19.88	9		
15.875	27	11.5	TM2EI	27-11.5NPTF		24.30	11	TMSR - 27	TMSL - 27
		8		27-8NPTF		22.23	7		
19.05B	38.5	11.5	TM2EI	38-11.5NPTF		35.34	16	TMSR - 38	TMSL - 38
		8		38-8NPTF		31.75	10		



➔ Applicable holders D49

● : Stock item

BSPT



External / Internal



Defined by : B.S 21:1985
Tolerance class : Standard BSPT

(mm)

Insert Size		Pitch (tpi)	Designation		L1	Tooth	Tool holder		
d	L		External + Internal	PC9070T			RH	LH	
6.35	11	19	TM2EI	11-19BSPT		9.36	7	TMSR - 10	TMSL - 10
9.525	16	14	TM2EI	16-14BSPT		14.51	8	TMSRT - 16	TMSLT - 16
		11		16-11BSPT		13.85	6		
15.875	27	11	TM2EI	27-11BSPT		23.09	10	TMSR - 27	TMSL - 27

➔ Applicable holders D49


● : Stock item



D

Threading

Standard Type

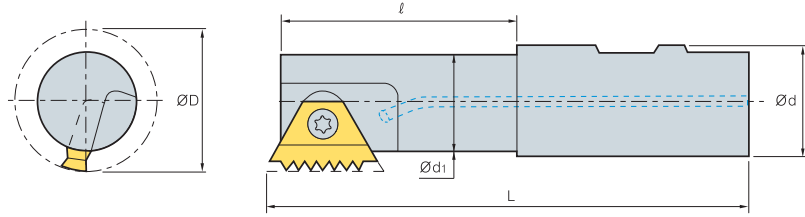


(mm)

Insert Size	Designation	Stock	ØD	Ød	Ød1	ℓ	L	Screw	Wrench
d									
6.0	TMSR 12-10		9.0	12	6.8	12.0	69.0	STM10	TW07P
	TMSR 20-10		9.0	20	6.8	17.0	84.0		
6.35	TMSR 12-11	●	11.5	12	8.9	12.0	70.0	STM11	TW08P
	TMSR 20-11	●	11.5	20	8.9	20.0	85.0		
9.525	TMSR 16-16		17.0	16	13.6	22.0	90.0	STM1622	TW10P
	TMSR 20-16	●	20.0	20	16.6	43.0	95.0		
9.525B	TMSR 16-22		17.0	16	13.5	29.0	79.5	STM1622	TW10P
	TMSR 20-22		19.0	20	15.5	29.0	81.5		
	TMSR 25-22		19.0	25	15.5	30.0	92.3		
	TMSRW 25-22	●	22.0	25	18.5	30.0	90.8		
15.875	TMSR 25-27		30.0	25	24.0	52.0	110.0	STM27	TW25L
	TMSL 25-27		30.0	25	24.0	52.0	110.0		
	TMSR 32-27		37.0	32	31.0	58.0	120.0		
19.05	TMSR 32-38		35.0	32	27.0	53.0	115.0	STM38	TW30L
	TMSR 40-38		46.0	40	38.0	63.0	135.0		

➡ Applicable inserts D44 ~ D48

● : Stock item

Long Type

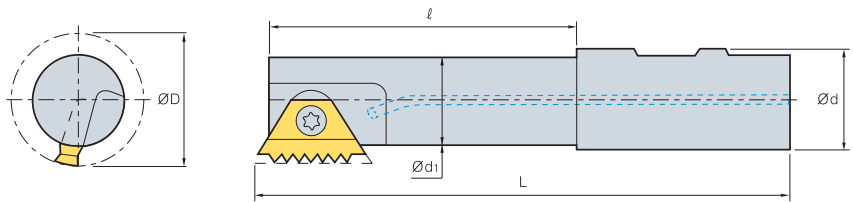


(mm)

Insert Size	Designation	Stock	ØD	Ød	Ød1	ℓ	L	Screw	Wrench
d									
6.35	TMSRL 25-11		11.5	25	8.9	17.0	125.0	STM11	TW08P
9.525B	TMSRL 25-16	●	22.0	25	18.6	25.0	125.0	STM1622	TW10P
9.525B	TMSRL 20-22	●	19.0	20	15.5	44.0	96.5	STM1622	TW10P
	TMSRL 25-22		22.0	25	18.6	63.5	125.0		
15.875	TMSRL 25-27		30.0	25	24.0	92.0	150.0	STM27	TW25L
	TMSRL 32-27		37.0	32	31.0	98.0	160.0		
19.05B	TMSRL 40-38		46.0	40	38.0	93.0	168.0	STM38	TW30L

➡ Applicable inserts D44 ~ D48

● : Stock item

Tapered Type

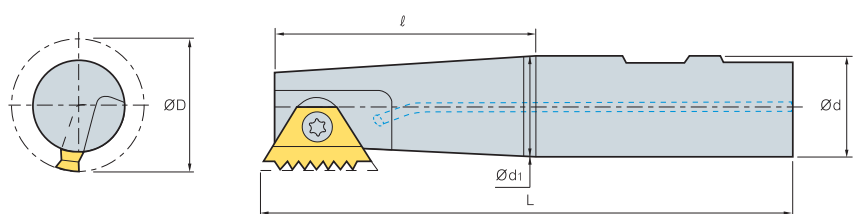

(mm)

Insert Size	Designation	Stock	ØD	Ød	Ød1	ℓ	L	Screw	Wrench
d									
9.525	TMSRT 16-16		15.5	16	12.5	22.0	90.0	STM1622	TW10P
	TMSRT 20-16		19.0	20	15.0	23.0	85.0	STMT16	TW10P
9.525B	TMSRT 16-22		17.0	16	13.5	29.0	79.5	STM1622	TW10P
	TMSRT 20-22		19.0	20	15.5	29.0	81.5		
15.875	TMSRT 32-27		37.0	32	31.0	58.0	120.0	STM27	TW25L

➡ Applicable inserts D44 ~ D48

Solid Threading Endmills code system

STM D 3T 03 012 L034 - I 0.35 ISO

1 2 3 4 5 6 7 8 9
 Type Flute style No. of Flutes Shank Dia. Cutting Dia. Cutting edge Length Type of Tool Pitch Standard

<p>1 Type STM D 3T 03 012 L034 - I 0.35 ISO</p> <p>Solid Threading Endmill</p>	<p>4 Shank Dia. STM D 3T 03 012 L034 - I 0.35 ISO</p> <p>03 : 3.0</p>	<p>8 Pitch STM D 3T 03 012 L034 - I 0.35 ISO</p> <p>mm : 0.35 ~ 3.0 tpi : 72 ~ 12</p>
<p>2 Flute style STM D 3T 03 012 L034 - I 0.35 ISO</p> <p>HC : Heli Cool HCR : Heli Radial Cooling HCC : Heli Cool Chamfering HCD : Heli Cool C/F & Drilling D : Deep Threading</p>	<p>5 Cutting Dia. STM D 3T 03 012 L034 - I 0.35 ISO</p> <p>012 : 1.20</p>	<p>9 Standard STM D 3T 03 012 L034 - I 0.35 ISO</p> <p>ISO Metric American UN Cutting edge Length UNJ Whit Worth (BSW, BSF, BSP, BSB) National Pipe Thread (NPT) National Pipe Thread (NPTF) British Standard Pipe Thread (BSPT)</p>
<p>3 No. of Flutes STM D 3T 03 012 L034 - I 0.35 ISO</p> <p>3T : 3 Flutes 2L : 4 Flutes, Left Flutes</p>	<p>6 Cutting edge Length STM D 3T 03 012 L034 - I 0.35 ISO</p> <p>L034 : 3.4</p>	
<p>7 Type of Tool STM D 3T 03 012 L034 - I 0.35 ISO</p> <p>I : Internal</p>		

TM-INFO User Guide

CNC Program Composition
 TM-INFO composes CNC program for Thread Milling process in a short time


- ▶ Multilingual
- ▶ Window operation




<p>1 Select thread type</p>	<p>2 Select thread standard</p>	<p>3 Select thread type</p>	<p>4 Input thread parameter</p>
<p>5 Select working way</p>	<p>6 Select tool</p>	<p>7 Confirm the working data & controller</p>	<p>download Pls. visit our web-site to download. http://www.korloy.com</p>

ISO Metric

Helical Flutes with Thru-Hole Coolant



Defined by : R262 (DIN 13)
Tolerance class : 6H

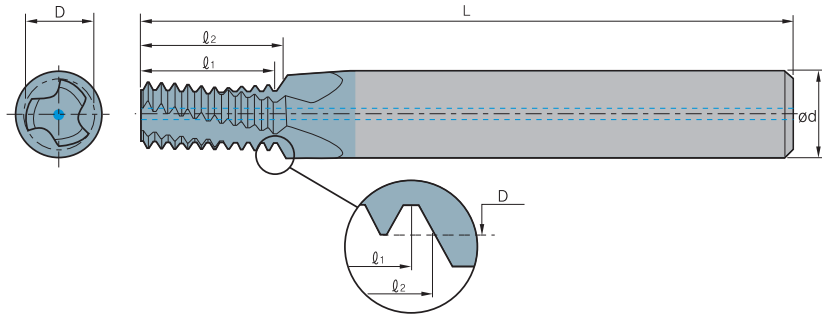

($\ell_2 \leq 1.5 \times$ Thread Diameter)

Thread		Pitch (mm)	Designation		Dimensions (mm)					No. of Flute	Tooth	*Bore Dia. mm	
M Coarse	M Fine		Internal	PC9070M	Ød	D	L	ℓ ₁	ℓ ₂				
M3×0.5	M3.5~M16×0.5	0.5	STMHC	04024L04-10.50ISO		4	2.40	45	4.5	4.7	3	9	2.5
M4×0.7		0.7		04031L06-10.70ISO		4	3.15	45	6.3	6.6	3	9	3.3
M5×0.8		0.8		04039L07-10.80ISO		4	3.90	45	7.2	7.6	3	9	4.2
M6×1.0	M8~M40×1.0	1.0		06048L09-11.00ISO		6	4.80	57	9.0	9.5	3	9	5.0
M8×1.25		1.25		08065L13-11.25ISO		8	6.50	61	12.5	13.1	3	10	6.8
M10×1.5	M12~M48×1.5	1.5		10082L15-11.50ISO		10	8.20	73	15.0	15.7	3	10	8.5
M12×1.75		1.75		10099L18-11.75ISO		10	9.90	73	17.5	18.4	4	10	10.2
M14×2.0	M17~M80×2.0	2.0		12116L21-12.00ISO		12	11.60	73	20.0	21.0	4	10	12.0
M16×2.0	M17~M80×2.0	2.0		14136L25-12.00ISO		14	13.60	92	24.0	25.0	4	12	14.0

($\ell_2 \geq 2 \times$ Thread Diameter)

Thread		Pitch (mm)	Designation		Dimensions (mm)					No. of Flute	Tooth	*Bore Dia. mm	
M Coarse	M Fine		Internal	PC9070M	Ød	D	L	ℓ ₁	ℓ ₂				
M3×0.5	M3.5~M16×0.5	0.5	STMHC	04024L06-10.50ISO		4	2.40	45	6.0	6.2	3	12	2.5
	M4×0.5	0.5		04032L08-10.50ISO		4	3.20	45	8.0	8.2	3	16	3.5
	M5×0.5	0.5		06042L10-10.50ISO		6	4.20	57	10.0	10.2	3	20	4.5
M4×0.7		0.7	04031L08-10.70ISO		4	3.15	45	8.4	8.7	3	12	3.3	
	M6×0.75	0.75	06050L12-10.75ISO		6	5.00	57	12.0	12.4	3	16	5.3	
M5×0.8		0.8	04039L10-10.80ISO		4	3.90	45	10.4	10.8	3	13	4.2	
M6×1.0	M8~M40×1.0	1.0	06048L12-11.00ISO	●	6	4.80	57	12.0	12.5	3	12	5.0	
	M8×1.0	1.0	08067L16-11.00ISO		8	6.70	61	16.0	16.5	3	16	7.0	
	M10×1.0	1.0	10087L20-11.00ISO		10	8.70	73	20.0	20.5	3	20	9.0	
	M12×1.0	1.0	12107L24-11.00ISO	●	12	10.70	73	24.0	24.5	4	24	11.0	
M8×1.25		1.25	08065L16-11.25ISO	●	8	6.50	61	16.2	16.9	3	13	6.8	
	M10×1.25	1.25	10085L20-11.25ISO	●	10	8.50	73	20.0	20.6	3	16	8.8	
M10×1.5	M12~M48×1.5	1.5	10082L20-11.50ISO	●	10	8.20	73	19.5	20.2	3	13	8.5	
	M12×1.5	1.5	10099L24-11.50ISO	●	10	9.90	73	24.0	24.7	4	16	10.5	
	M14×1.5	1.5	12119L29-11.50ISO		12	11.90	80	28.5	29.2	4	19	12.5	
	M16×1.5	1.5	14139L32-11.50ISO		14	13.90	92	31.5	32.2	4	21	14.5	
M12×1.75		1.75	10099L25-11.75ISO		10	9.90	73	24.5	25.4	4	14	10.2	
M14×2.0	M17~M80×2.0	2.0	12116L29-12.00ISO		12	11.60	80	28.0	29.0	4	14	12.0	
M16×2.0	M17~M80×2.0	2.0	14136L33-12.00ISO		14	13.60	92	32.0	33.0	4	16	14.0	
M18×2.5		2.5	16148L36-12.50ISO		16	14.80	92	35.0	36.2	4	14	15.5	
M 20×2.5		2.5	18171L41-12.50ISO		18	17.10	102	40.0	41.2	4	16	17.5	
M 24×3.0		3.0	20199L49-13.00ISO		20	19.90	102	48.0	49.5	4	16	21.0	


* Bore Diameter applies to smallest thread Dia

Maximum thread length = $\ell_2 - \frac{\text{Pitch}}{4}$


● : Stock item

American UN

Helical Flutes with Thru-Hole Coolant



Defined by : ANSI B1.1.74
Tolerance class : 2B

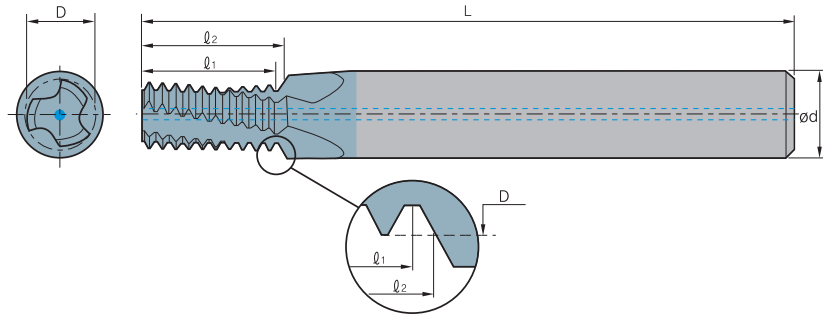

($\phi_2 \leq 1.5 \times \text{Thread Diameter}$)

Thread			Pitch (tpi)	Designation		Dimensions (mm)					No. of Flute	Tooth	Bore Dia. mm
UNC	UNF	UNEF		Internal	PC9070M	ϕd	D	L	ϕ_1	ϕ_2			
No.10~24	5/16", 3/8"x24	9/16"~11/16"x24	24	STMHC	04035L07-I24UNC	4	3.58	45	7.4	7.9	3	7	3.8
No.10~24	5/16", 3/8"x24	9/16"~11/16"x24	24		06041L08-I24UNC	6	4.15	57	8.5	9.0	3	8	4.5
1/4"x20	7/16", 1/2"x20	3/4"~1"x20	20		06048L09-I20UNC	6	4.88	57	8.9	9.5	3	7	5.2
5/16"x18	9/16", 5/8"x18	11/16"~1 11/16"x18	18		08061L11-I18UNC	8	6.15	61	11.3	12.0	3	8	6.5
3/8"x16	3/4"x16		16		08076L15-I16UNC	8	7.65	61	14.3	15.1	3	9	8.0
7/16"x14	7/8"x14		14		10090L17-I14UNC	10	9.00	73	16.3	17.2	3	9	9.3
1/2"x13			13		12104L20-I13UNC	12	10.35	73	19.5	20.5	4	10	10.8
9/16"x12	1"~1 1/2"x12		12		12118L22-I12UNC	12	11.80	73	21.2	22.2	4	10	12.3

($\phi_2 \leq 2 \times \text{Thread Diameter}$)

Thread			Pitch (tpi)	Designation		Dimensions (mm)					No. of Flute	Tooth	Bore Dia. mm
UNC	UNF	UNEF		Internal	PC9070M	ϕd	D	L	ϕ_1	ϕ_2			
	No.10~32	No. 12~3/8"x32	32	STMHC	04038L09-I32UNF	4	3.80	45	9.5	9.9	3	12	4.0
		No. 12~3/8"x32	32		06044L11-I32UNEF	6	4.40	57	11.1	11.5	3	14	4.7
	No.12, 1/4"x28	7/16", 1/2"x28	28		06043L11-I28UNF	6	4.30	57	10.9	11.3	3	12	4.6
	1/4"x28	7/16", 1/2"x28	28		06052L13-I28UNF	6	5.15	57	12.7	13.1	3	14	5.5
		7/16", 1/2"x28	28		10099L22-I28UNEF	10	9.90	73	21.8	22.2	3	24	10.2
No.10~24	5/16", 3/8"x24	9/16"~11/16"x24	24		04035L10-I24UNC	4	3.58	45	9.5	10.0	3	9	3.8
No.12~24	5/16", 3/8"x24	9/16"~11/16"x24	24		06041L11-I24UNC	6	4.15	57	10.6	11.1	3	10	4.5
	5/16", 3/8"x24	9/16"~11/16"x24	24		08066L16-I24UNF	8	6.68	61	15.9	16.4	3	15	6.8
	3/8"x24	9/16"~11/16"x24	24		10082L19-I24UNF	10	8.20	73	19.0	19.6	3	18	8.5
		9/16"~11/16"x24	24		14129L29-I24UNEF	14	12.90	92	28.6	29.1	4	27	13.2
1/4"x20	7/16", 1/2"x20	3/4"~1"x20	20		06048L13-I20UNC	6	4.88	57	12.7	13.3	3	10	5.2
	7/16", 1/2"x20	3/4"~1"x20	20		10096L22-I20UNF	10	9.60	73	21.6	22.2	3	17	9.8
	1/2"x20	3/4"~1"x20	20		12111L26-I20UNF	12	11.10	80	25.4	26.0	3	20	11.5
		3/4"~1"x20	20		18174L38-I20UNEF	18	17.40	102	38.1	38.7	4	30	17.8
5/16"x18	9/16", 5/8"x18	11/16"~1 11/16"x18	18		08061L16-I18UNC	8	6.15	61	15.5	16.2	3	11	6.5
	9/16", 5/8"x18	11/16"~1 11/16"x18	18		14125L28-I18UNF	14	12.50	92	28.2	28.9	4	20	12.8
	5/8"x18	11/16"~1 11/16"x18	18		16141L31-I18UNF	16	14.10	92	31.0	31.7	4	22	14.5
3/8"x16	3/4"x16		16		08076L19-I16UNC	8	7.65	61	19.0	19.8	3	12	8.0
	3/4"x16		16		18170L38-I16UNF	18	17.00	102	38.1	38.8	4	24	17.5
7/16"x14	7/8"x14		14		10090L22-I14UNC	10	9.00	73	21.8	22.7	3	12	9.3
	7/8"x14		14		20199L44-I14UNF	20	19.90	102	43.5	44.4	4	24	20.5
1/2"x13			13		12104L26-I13UNC	12	10.35	80	25.4	26.4	4	13	10.8
9/16"x12	1"~1 1/2"x12		12		12118L28-I12UNC	12	11.80	80	27.5	28.6	4	13	12.3
	1"~1 1/2"x12		12		20199L51-I12UNF	20	19.90	102	50.8	51.9	4	24	23.5
5/8"x11			11		14131L33-I11UNC	14	13.10	92	32.3	33.5	4	14	13.5
3/4"x10			10		16159L39-I10UNC	16	15.90	92	38.1	39.4	4	15	16.5
7/8"x9			9		20190L46-I9UNC	20	19.00	102	45.2	46.6	4	16	19.5
1"x8			8		20199L52-I8UNC	20	19.90	102	50.8	52.4	4	16	22.0

* Bore Diameter applies to smallest thread Dia

Maximum thread length = $\phi_2 - \frac{\text{Pitch}}{4}$


● : Stock item




Whitworth

Helical Flutes with Thru-Hole Coolant

External / Internal



Defined by : B.S.84 : 1956,
DIN 259, ISO228/1 : 1982
Tolerance class : Medium class A

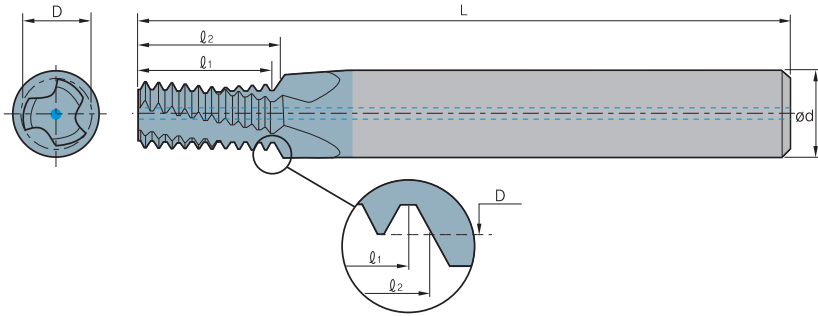


($l_2 \leq 2 \times \text{Thread Diameter}$)

Thread		Pitch (tpi)	Designation		Dimensions (mm)					No. of Flute	Tooth	*Bore Dia. mm
BSW	BSF		External / Internal	PC9070M	ød	D	L	l ₁	l ₂			
	1/4"×26	26	STMHC	06050L13-EI26BSF	6	5.00	57	12.7	13.2	3	13	5.3
	5/16"×22	22		08063L16-EI22BSF	8	6.35	61	16.2	16.7	3	14	6.7
1/4"×20	3/8"×20	20		06044L13-EI20BSW	6	4.45	57	12.7	13.3	3	10	5.0
	3/8"×20	20		08076L19-EI20BSF	8	7.65	61	19.0	19.7	3	15	8.2
5/16"×18	7/16"×18	18		06058L16-EI18BSW	6	5.85	57	15.5	16.2	3	11	6.5
	7/16"×18	18		10092L23-EI18BSF	10	9.20	73	22.6	23.3	3	16	9.7
3/8"×16	1/2", 9/16"×16	16		08072L19-EI16BSW	8	7.20	61	19.0	19.8	3	12	7.9
	1/2", 9/16"×16	16		12105L26-EI16BSF	12	10.50	80	25.4	26.2	4	16	11.1
7/16"×14	9/16"×16	16		14122L29-EI16BSF	14	12.15	92	28.6	29.4	4	18	12.6
	5/8", 11/16"×14	14		10085L22-EI14BSW	10	8.50	73	21.8	22.7	3	12	9.2
	5/8", 11/16"×14	14		14134L31-EI14BSF	14	13.40	92	30.8	31.7	4	17	14.0
	11/16"×14	14		16150L35-EI14BSF	16	15.00	92	34.5	35.4	4	19	15.6
1/2"×12	3/4"×12	12		10096L26-EI12BSW	10	9.65	73	25.4	26.5	3	12	10.5
9/16"×12	3/4"×12	12		12113L28-EI12BSW	12	11.25	80	27.5	28.6	4	13	12.1
	3/4"×12	12		18162L39-EI12BSF	18	16.20	102	38.1	39.2	4	18	16.8
5/8"×11	7/8"×11	11		14126L33-EI11BSW	14	12.60	92	32.3	33.5	4	14	13.4
11/16"×11		11		16142L35-EI11BSW	16	14.20	92	34.6	35.8	4	15	15.0


BSPT

Helical Flutes with Thru-Hole Coolant

External / Internal



Defined by : B.S.21 : 1985
Tolerance class : Standard BSPT

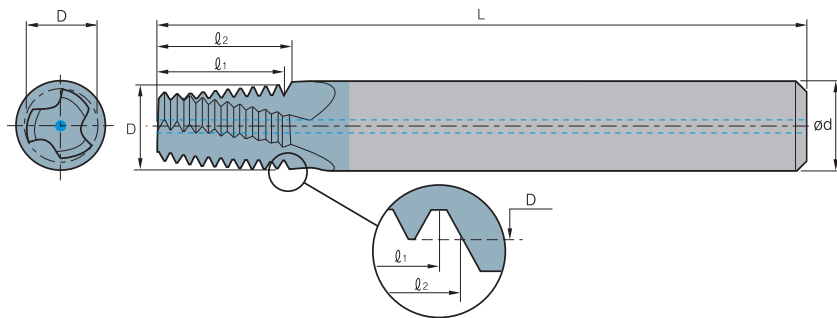

Thread		Pitch (tpi)	Designation		Dimensions (mm)					No. of Flute	Tooth	*Bore Dia. mm
Standard			Internal	PC9070M	ød	D	L	l ₁	l ₂			
1/16"×28	28	STMHC	06059L10-EI28BSPT	6	5.90	57	10.0	10.2	3	11	6.7	
1/8"×28	28		08076L10-EI28BSPT	8	7.65	61	10.0	10.2	3	11	8.7	
1/4"×19	19		10099L15-EI19BSPT	10	9.90	73	14.7	15.4	3	11	11.8	
3/8"×19	19		12111L15-EI19BSPT	12	11.15	73	14.7	15.4	4	11	15.2	
1/2", 3/4"×14	14		16142L22-EI14BSPT	16	14.25	92	21.8	22.7	4	12	19.0	
1", 1 1/2", 2", 2 1/2"×11	11		20196L28-EI11BSPT	20	19.60	102	27.7	28.9	4	12	30.7	

* Bore Diameter applies to smallest thread Dia

Maximum thread length = $l_2 - \frac{\text{Pitch}}{4}$


● : Stock item

D Solid Threading Endmills


NPT

Helical Flutes with Thru-Hole Coolant

External / Internal



Defined by : USAS B2.1:1968
Tolerance class : Standard NPT

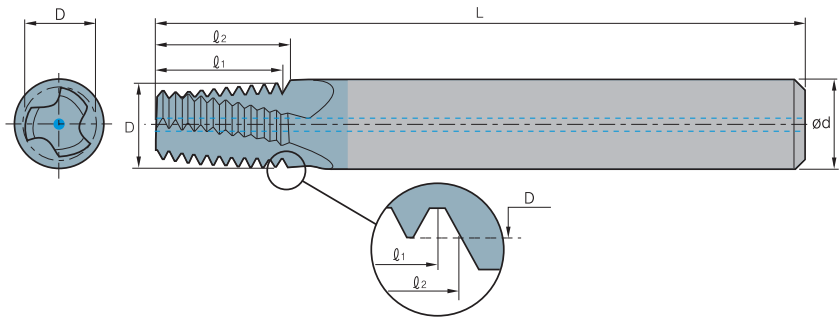


Thread Standard	Pitch (tpi)	Designation		Dimensions (mm)					No. of Flute z	Tooth zt	*Bore Dia. mm	
		Internal	PC9070M	Ød	D	L	l ₁	l ₂				
1/16"×27	27	STMHC	06059L09-EI27NPT		6	5.90	57	9.4	9.9	3	10	6.3
1/8"×27	27		08076L09-EI27NPT		8	7.65	61	9.4	9.9	3	10	8.5
1/4"×18	18		10099L14-EI18NPT		10	9.90	73	14.1	14.8	3	10	11.1
3/8"×18	18		12111L14-EI18NPT		12	11.15	73	14.1	14.8	4	10	14.5
1/2", 3/4"×14	14		16142L19-EI14NPT		16	14.25	92	18.1	19.0	4	10	17.7, 23.0
1", 1 1/4", 1 1/2", 2"×11.5	11.5		20196L23-EI11.5NPT		20	19.60	102	22.1	23.2	4	10	29.0, 37.7, 44.0, 56.0
2 1/2"×8 ; 3"×8	8		20196L33-EI8NPT		20	19.60	102	31.7	33.3	4	10	66.5, 82.1


NPTF

Helical Flutes with Thru-Hole Coolant

External / Internal



Defined by : ANSI 1.20.3-1976
Tolerance class : Standard NPTF

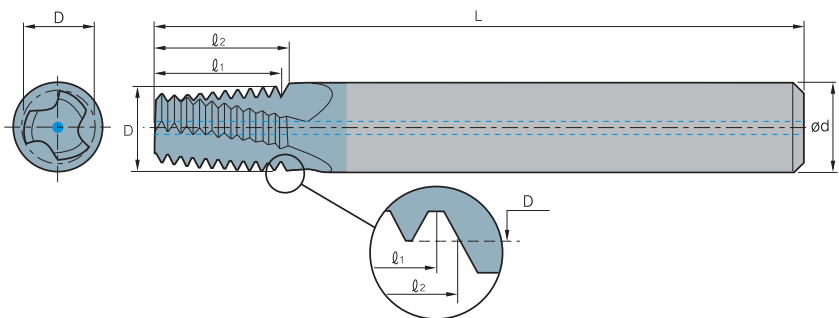

Thread Standard	Pitch (tpi)	Designation		Dimensions (mm)					No. of Flute z	Tooth zt	*Bore Dia. mm	
		Internal	PC9070M	Ød	D	L	l ₁	l ₂				
1/16"×27	27	STMHC	06059L09-EI27NPTF	●	6	5.90	57	9.4	9.9	3	10	6.3
1/8"×27	27		08076L09-EI27NPTF		8	7.65	61	9.4	9.9	3	10	8.5
1/4"×18	18		10099L14-EI18NPTF		10	9.90	73	14.1	14.8	3	10	11.1
3/8"×18	18		12111L14-EI18NPTF		12	11.15	73	14.1	14.8	4	10	14.5
1/2", 3/4"×14	14		16142L19-EI14NPTF		16	14.25	92	18.1	19.0	4	10	17.7, 23.4
1", 1 1/4", 1 1/2", 2"×11.5	11.5		20196L23-EI11.5NPTF		20	19.60	102	22.1	23.2	4	10	29.0, 37.7, 43.7, 55.6
2 1/2"×8 ; 3"×8	8		20196L33-EI8NPTF		20	19.60	102	31.7	33.3	4	10	66.3, 82.1

* Bore Diameter applies to smallest thread Dia

$$\text{Maximum thread length} = l_2 - \frac{\text{Pitch}}{4}$$


● : Stock item




ISO Metric

Helical Flutes with Radial Cooling

Internal



Defined by : R262 (DIN 13)
Tolerance class : 6H

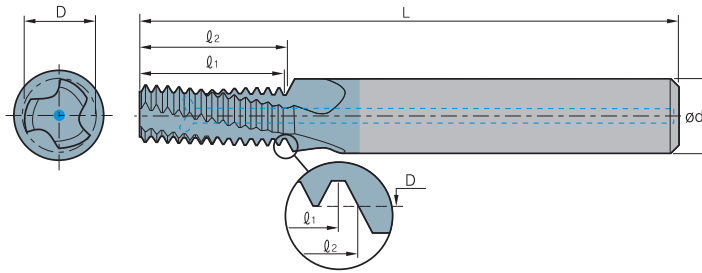


($l_2 \leq 2 \times \text{Thread Diameter}$)

Thread		Pitch (mm)	Designation		Dimensions (mm)					No. of Flute	Tooth	*Bore Dia. mm
M Coarse	M Fine		Internal	PC9070M	ød	D	L	l ₁	l ₂			
M6x1.0	M8~M40x1.0	1.0	STMHCR	06048L12-11.00ISO	6	4.8	57	12.0	12.5	3	12	5.0
	M10x1.0	1.0		10087L20-11.00ISO	10	8.7	73	20.0	20.5	3	20	9.0
	M12x1.0	1.0		12107L24-11.00ISO	12	10.7	73	24.0	24.5	4	24	11.0
M8x1.25		1.25		08065L16-11.25ISO	8	6.5	64	16.3	16.9	3	13	6.8
M10x1.5	M12~M48x1.5	1.5		10082L20-11.50ISO	10	8.2	73	19.5	20.3	3	13	8.5
	M12x1.5	1.5		10099L24-11.50ISO	10	9.9	73	24.0	24.8	4	16	10.5
	M14x1.5	1.5		12119L29-11.50ISO	12	11.9	84	28.5	29.3	4	19	12.5
M12x1.75	M16x1.5	1.5		14139L32-11.50ISO	14	13.9	84	31.5	32.3	4	21	14.5
		1.75		10099L25-11.75ISO	10	9.9	73	24.5	25.4	4	14	10.2


ISO Metric

Helical Flutes with Thru-Hole Coolant - Thru & Chamfer

Internal



Defined by : R262 (DIN 13)
Tolerance class : 6H

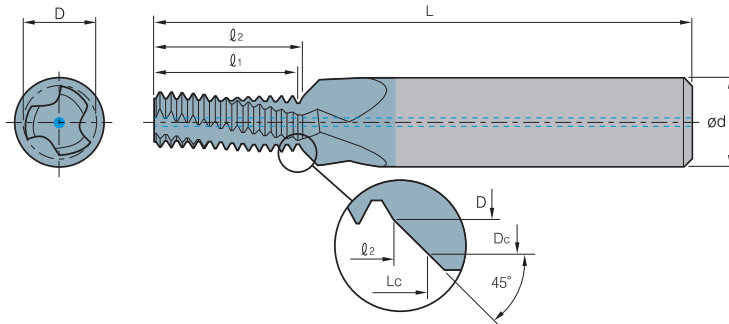

($l_2 \leq 2 \times \text{Thread Diameter}$)

Thread		Pitch (mm)	Designation		Dimensions (mm)							No. of Flute	Tooth	*Bore Dia. mm
M Coarse	M Fine		Internal	PC9070M	ød	D	D _c	L	l ₁	l ₂	L _c			
M6x1.0	M8~M40x1.0	1.0	STMHCC	08048L12-11.00ISO	8	4.8	6.3	61	12.0	12.5	13.3	3	12	5.0
	M10x1.0	1.0		12087L20-11.00ISO	12	8.7	10.3	73	20.0	20.5	21.3	3	20	9.0
	M12x1.0	1.0		14107L24-11.00ISO	14	10.7	12.3	80	24.0	24.5	25.3	4	24	11.0
M8x1.25		1.25		10065L16-11.25ISO	10	6.5	8.3	73	16.3	16.9	17.8	3	13	6.8
M10x1.5	M12~M48x1.5	1.5		12082L20-11.50ISO	12	8.2	10.3	80	19.5	20.3	21.3	3	13	8.5
	M12x1.5	1.5		14099L24-11.50ISO	14	9.9	12.3	80	24.0	24.8	26.0	4	16	10.5
	M14x1.5	1.5		16119L29-11.50ISO	16	11.9	14.3	92	28.5	29.3	30.5	4	19	12.5
M12x1.75	M16x1.5	1.5		18139L32-11.50ISO	18	13.9	16.3	92	31.5	32.3	33.5	4	21	14.5
		1.75		14099L25-11.75ISO	14	9.9	12.3	80	24.5	25.4	26.6	4	14	10.2

* Bore Diameter applies to smallest thread Dia


$$\text{Maximum thread length} = l_2 - \frac{\text{Pitch}}{4}$$

• : Stock item


ISO Metric

Drill, Chamfer & Thread with Thru-Hole Coolant

Internal



Defined by : R262 (DIN 13)
Tolerance class : 6H

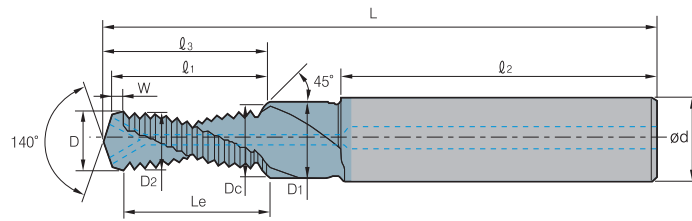

Thread	Pitch (mm)	Designation		Dimensions (mm)											No. of Flute	Tooth
		Internal	PC9070M	L	l ₃	l ₁	l ₂	W	Le	D	Ød	D ₁	D _c	D ₂		
M6×1.0	1.0	STMHCD-	IM6×1.0ISO-2D	62.0	14.5	13.7	36	1.0	12.7	5.0	8	6.6	6.3	4.85	2	11
M8×1.25	1.25		IM8×1.25ISO-2D	74.0	18.2	17.1	40	1.3	15.8	6.8	10	9.0	8.3	6.45	2	11
M10×1.5	1.5		IM10×1.5ISO-2D	79.0	23.4	22.1	45	1.5	20.6	8.5	12	11.0	10.3	8.08	2	12
M12×1.75	1.75		IM12×1.75ISO-2D	89.0	27.1	25.5	45	1.5	24.0	10.3	14	13.5	12.3	9.74	2	12

Thread	Pitch (mm)	Designation		Dimensions (mm)											No. of Flute	Tooth
		Internal	PC9070M	L	l ₃	l ₁	l ₂	W	Le	D	Ød	D ₁	D _c	D ₂		
M6×1.0	1.0	STMHCD-	IM6×1.0ISO-2.5D	62.0	16.5	15.7	36	1.0	14.7	5.0	8	6.6	6.3	4.85	2	13
M8×1.25	1.25		IM8×1.25ISO-2.5D	74.0	23.2	22.1	40	1.3	20.8	6.8	10	9.0	8.3	6.45	2	15
M10×1.5	1.5		IM10×1.5ISO-2.5D	79.0	27.9	26.6	45	1.5	25.1	8.5	12	11.0	10.3	8.08	2	15


Maximum thread length = $l_2 - \frac{\text{Pitch}}{4}$

● : Stock item


ISO Metric

Deep Threading

Internal



Defined by : R262 (DIN 13)
Tolerance class : 6H

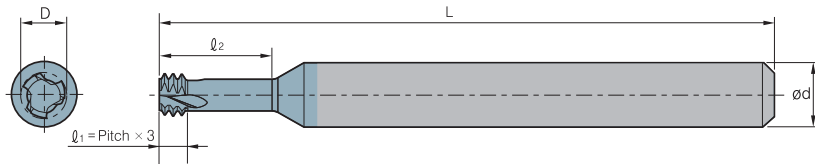

($l_2 \leq 2 \times \text{Thread Diameter}$)

Thread		Pitch (mm)	Designation		Dimensions (mm)				No. of Flute	Tooth	*Bore Dia. mm	
M Coarse	M Fine		Internal	PC9070M	ød	D	L	l ₂				
M1.6x0.35		0.35	STMD3T	03012L034-I0.35ISO		3	1.20	30	3.4	3	3	1.25
M2x0.4		0.4		06015L042-I0.4ISO		6	1.55	57	4.2	3	3	1.6
M2.2x0.45		0.45		06016L046-I0.45ISO		6	1.65	57	4.6	3	3	1.75
M2.5x0.45		0.45		06019L052-I0.45ISO		6	1.95	57	5.2	3	3	2.05
M3x0.5	M3.5~M16x0.5	0.5		06024L062-I0.5ISO		6	2.40	57	6.2	3	3	2.5
M3.5x0.6		0.6		06027L073-I0.6ISO		6	2.75	57	7.3	3	3	2.9
M4x0.7		0.7		06031L083-I0.7ISO		6	3.15	57	8.3	3	3	3.3
M5x0.8		0.8		06040L104-I0.8ISO		6	4.05	57	10.4	3	3	4.2
M6x1.0	M8~M40x1.0	1.0		06048L125-I1.0ISO		6	4.80	57	12.5	3	3	5.0
M8x1.25		1.25		08065L166-I1.25ISO		8	6.50	63	16.6	3	3	6.8
M10x1.5	M12~M48x1.50	1.5		10082L208-I1.50ISO		10	8.20	73	20.8	3	3	8.5
M12x1.75		1.75		10099L250-I1.75ISO		10	9.90	73	25.0	3	3	10.3

3d ($l_2 \leq 3 \times \text{Thread Diameter}$)

Thread		Pitch (mm)	Designation		Dimensions (mm)				No. of Flute	Tooth	*Bore Dia. mm	
M Coarse	M Fine		Internal	PC9070M	ød	D	L	l ₂				
M1.6x0.35		0.35	STMD3T	03012L050-I0.35ISO		3	1.20	30	5.0	3	3	1.25
M2x0.4		0.4		06015L062-I0.4ISO		6	1.55	57	6.2	3	3	1.6
M2.5x0.45		0.45		06019L077-I0.45ISO		6	1.95	57	7.0	3	3	2.05
M3x0.5	M3.5~M16x0.5	0.5		06024L092-I0.5ISO		6	2.40	57	9.2	3	3	2.5
M4x0.7		0.7		06031L123-I0.7ISO		6	3.15	57	12.3	3	3	3.3
M5x0.8		0.8		06040L154-I0.8ISO		6	4.05	57	15.4	3	3	4.2
M6x1.0	M8~M40x1.0	1.0		06048L185-I1.0ISO		6	4.80	57	18.5	3	3	5.0
M8x1.25		1.25		08065L246-I1.25ISO		8	6.50	63	24.6	3	3	6.8

* Bore Diameter applies to smallest thread Dia


Maximum thread length = $l_2 - \frac{\text{Pitch}}{4}$

● : Stock item


American UN

Deep Threading

Internal



Defined by : ANSI B1.1.74
Tolerance class : 2B

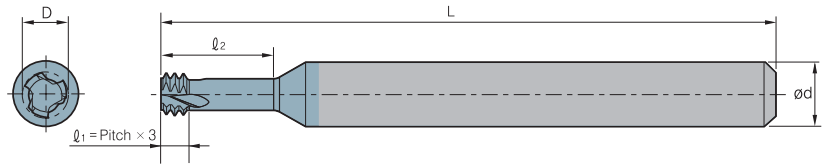

($\varnothing_2 \leq 2 \times \text{Thread Diameter}$)

Thread		Pitch (tpi)	Designation		Dimensions (mm)				No. of Flute	Tooth	*Bore Dia. mm
UNC	UNF		Internal	PC9070M	$\varnothing d$	D	L	\varnothing_2			
	No.1~72	72	STMD3T 06014L039-I72UN		6	1.45	57	3.9	3	3	1.6
No.1~64	No.2~64	64	06014L042-I64UN		6	1.40	57	4.2	3	3	1.5
No.2~56	No.3~56	56	06016L050-I56UN		6	1.65	57	5.0	3	3	1.8
No.3~48	No.4~48	48	06019L060-I48UN		6	1.90	57	6.0	3	3	2.1
No.4, No.5~40	No.6~40	40	06021L060-I40UN		6	2.10	57	6.0	3	3	2.3
No.5~40	No.6~40	40	06024L072-I40UN		6	2.45	57	7.2	3	3	2.6
	No.8~36	36	06033L087-I36UN		6	3.30	57	8.7	3	3	3.5
No.6, No.8~32	No.10~32	32	06025L074-I32UN		6	2.55	57	7.4	3	3	2.8
No.8~32	No.10~32	32	06032L100-I32UN		6	3.20	57	10.0	3	3	3.5
	1/4" x 28	28	06052L132-I28UN		6	5.25	57	13.2	3	3	5.5
No.10~24	5/16" x 24	24	06035L102-I24UN		6	3.58	57	10.2	3	3	3.9
	5/16" x 24	24	08066L165-I24UN		8	6.68	63	16.5	3	3	6.9
1/4" x 20	7/16" x 20	20	06048L134-I20UN		6	4.88	57	13.4	3	3	5.2
	7/16" x 20	20	010095L230-I20UN		10	9.55	73	23.0	3	3	9.9
3/8" x 16		16	08067L191-I16UN		8	6.70	63	19.1	3	3	8.0
7/16" x 14		14	10090L233-I14UN		10	9.00	73	23.3	3	3	9.4

($\varnothing_2 \leq 3 \times \text{Thread Diameter}$)

Thread		Pitch (tpi)	Designation		Dimensions (mm)				No. of Flute	Tooth	*Bore Dia. mm
UNC	UNF		Internal	PC9070M	$\varnothing d$	D	L	\varnothing_2			
	No.1~72	72	STMD3T 06014L057-I72UN		6	1.45	57	5.75	3	3	1.6
No.4, No.5~40	No.6~40	40	06021L090-I40UN		6	2.10	57	9.0	3	3	2.3
No.5~40	No.6~40	40	06024L100-I40UN		6	2.45	57	10.0	3	3	2.6
No.6, No.8~32	No.10~32	32	06025L110-I32UN		6	2.55	57	11.0	3	3	2.8
No.8~32	No.10~32	32	06032L130-I32UN		6	3.20	57	13.0	3	3	3.4
	1/4" 28	28	06052L196-I28UN		6	5.25	57	19.6	3	3	5.5
	5/16" x 24	24	08066L245-I24UN		8	6.68	63	24.5	3	3	6.9
1/4" x 20	7/16" x 20	20	06048L198-I20UN		6	4.88	57	19.8	3	3	5.1

* Bore Diameter applies to smallest thread Dia


Maximum thread length = $\varnothing_2 - \frac{\text{Pitch}}{4}$

● : Stock item


ISO Metric

Deep Threading for Hard Materials (~HRC62)

Internal



Defined by : R262 (DIN 13)
Tolerance class : 6H

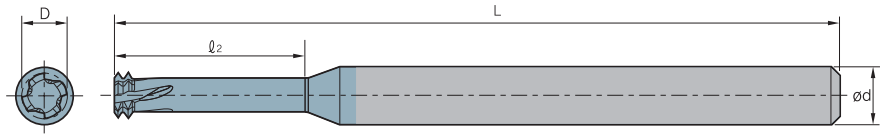

($l_2 \leq 2 \times \text{Thread Diameter}$)

Thread		Pitch (mm)	Designation		Dimensions (mm)				No. of Flute	Tooth	*Bore Dia. mm
M Coarse	M Fine		Internal	PC9070M	Ød	D	L	l ₂			
M2×0.4		0.4	STMD2L	06015L042-10.4ISO	6	1.55	76	4.60	4	2	1.6
M2.2×0.45		0.45		06016L046-10.45ISO	6	1.65	76	5.05	4	2	1.8
M2.5×0.45		0.45		06019L052-10.45ISO	6	1.95	76	5.65	4	2	2.05
M3×0.5	M3.5~M16×0.5	0.5		06024L062-10.5ISO	6	2.40	76	6.75	4	2	2.55
M3.5×0.6		0.6		06027L073-10.6ISO	6	2.75	76	7.90	4	2	2.95
M4×0.7		0.7		06031L083-10.7ISO	6	3.15	76	9.05	4	2	3.35
M5×0.8		0.8		06040L104-10.8ISO	6	4.05	76	11.20	4	2	4.3
M6×1.0	M8~M40×1.0	1.0		06048L125-11.0ISO	6	4.80	76	13.50	4	2	5.1
M8×1.25		1.25		08065L166-11.25ISO	8	6.50	80	17.85	4	2	6.8
M10×1.5	M12~M48×1.50	1.5		08079L208-11.50ISO	8	7.90	80	22.30	4	2	8.6
M12×1.75		1.75		10099L250-11.75ISO	10	9.90	101	26.75	4	2	10.4

($l_2 \leq 3 \times \text{Thread Diameter}$)

Thread		Pitch (mm)	Designation		Dimensions (mm)				No. of Flute	Tooth	*Bore Dia. mm
M Coarse	M Fine		Internal	PC9070M	Ød	D	L	l ₂			
M2×0.4		0.4	STMD2L	06015L062-10.4ISO	6	1.55	76	6.60	4	2	1.6
M2.2×0.45		0.45		06019L077-10.45ISO	6	1.95	76	8.15	4	2	2.05
M3×0.5	M3.5~M16×0.5	0.5		06024L092-10.5ISO	6	2.40	76	9.75	4	2	2.55
M4×0.7		0.7		06031L123-10.7ISO	6	3.15	76	13.05	4	2	3.35
M5×0.8		0.8		06040L154-10.8ISO	6	4.05	76	16.20	4	2	4.3
M6×1.0	M8~M40×1.0	1.0		06048L185-11.0ISO	6	4.80	76	19.50	4	2	5.1
M8×1.25		1.25		08065L246-11.25ISO	8	6.50	80	25.85	4	2	6.8

* Bore Diameter applies to smallest thread Dia


Maximum thread length = $l_2 - \frac{\text{Pitch}}{4}$

● : Stock item


American UN

Deep Threading for Hard Materials(~HRC62)

Internal



Defined by : ANSI B1.1.74
Tolerance class : 2B

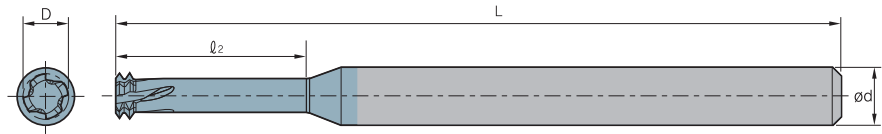

($\varnothing_2 \leq 2 \times \text{Thread Diameter}$)

Thread		Pitch (tpi)	Designation		Dimensions (mm)				No. of Flute	Tooth	*Bore Dia. mm	
UNC	UNF		Internal	PC9070M	$\varnothing d$	D	L	\varnothing_2				
No.2~56	No.3~56	56	STMD2L	06016L050-I56UN		6	1.65	76	5.45	4	2	1.80
No.3~48	No.4~48	48		06019L060-I48UN		6	1.90	76	6.53	4	2	2.10
No.4~40 ; No.5~40	No.6~40	40		06021L060-I40UN		6	2.10	76	6.64	4	2	2.35
No.5~40	No.6~40	40		06024L072-I40UN		6	2.45	76	7.84	4	2	2.65
	No.8~36	36		06033L087-I36UN		6	3.30	76	9.41	4	2	3.55
No.6~32 ; No.8~32	No.10~32	32		06025L074-I32UN		6	2.55	76	8.20	4	2	2.85
No.8~32	No.10~32	32		06032L100-I32UN		6	3.20	76	10.79	4	2	3.50
	1/4"x28	28		06052L132-I28UN		6	5.25	76	14.11	4	2	5.55
No.10~24	5/16"x24	24		06035L102-I24UN		6	3.58	76	11.26	4	2	3.90
	5/16"x24	24		08066L165-I24UN		8	6.68	76	17.56	4	2	7.00
1/4"x20	7/16"x20	20		06048L134-I20UN		6	4.88	76	14.67	4	2	5.20
	7/16"x20	20		10095L230-I20UN		10	9.55	101	24.27	4	2	9.90
3/8"x16		16		08076L197-I16UN		8	7.65	80	21.29	4	2	8.00
7/16"x14		14		10090L233-I14UN		10	9.00	101	25.11	4	2	9.50
1/2"x13		13		10099L256-I13UN		10	9.90	101	27.55	4	2	10.90


($\varnothing_2 \leq 3 \times \text{Thread Diameter}$)

Thread		Pitch (tpi)	Designation		Dimensions (mm)				No. of Flute	Tooth	*Bore Dia. mm	
UNC	UNF		Internal	PC9070M	$\varnothing d$	D	L	\varnothing_2				
No.4~40, No.5~40	No.6~40	40	STMD2L	06021L090-I40UN		6	2.10	76	9.64	4	2	2.35
No.5~40	No.6~40	40		06024L100-I40UN		6	2.45	76	10.64	4	2	2.65
No.6~32, No.8~32	No.10~32	32		06025L110-I32UN		6	2.55	76	11.79	4	2	2.85
No.8~32	No.10~32	32		06032L130-I32UN		6	3.20	76	13.79	4	2	3.50
	1/4"x28	28		06052L196-I28UN		6	5.25	76	20.51	4	2	5.55
	5/16"x24	24		08066L245-I24UN		8	6.68	80	25.56	4	2	7.00
1/4"~20	7/16"x20	20		06048L198-I20UN		6	4.88	76	21.07	4	2	5.20
7/16"x14		14		10090L335-I14UN		10	9.00	101	35.31	4	2	9.50

* Bore Diameter applies to smallest thread Dia

$$\text{Maximum thread length} = \varnothing_2 - \frac{\text{Pitch}}{4}$$

● : Stock item

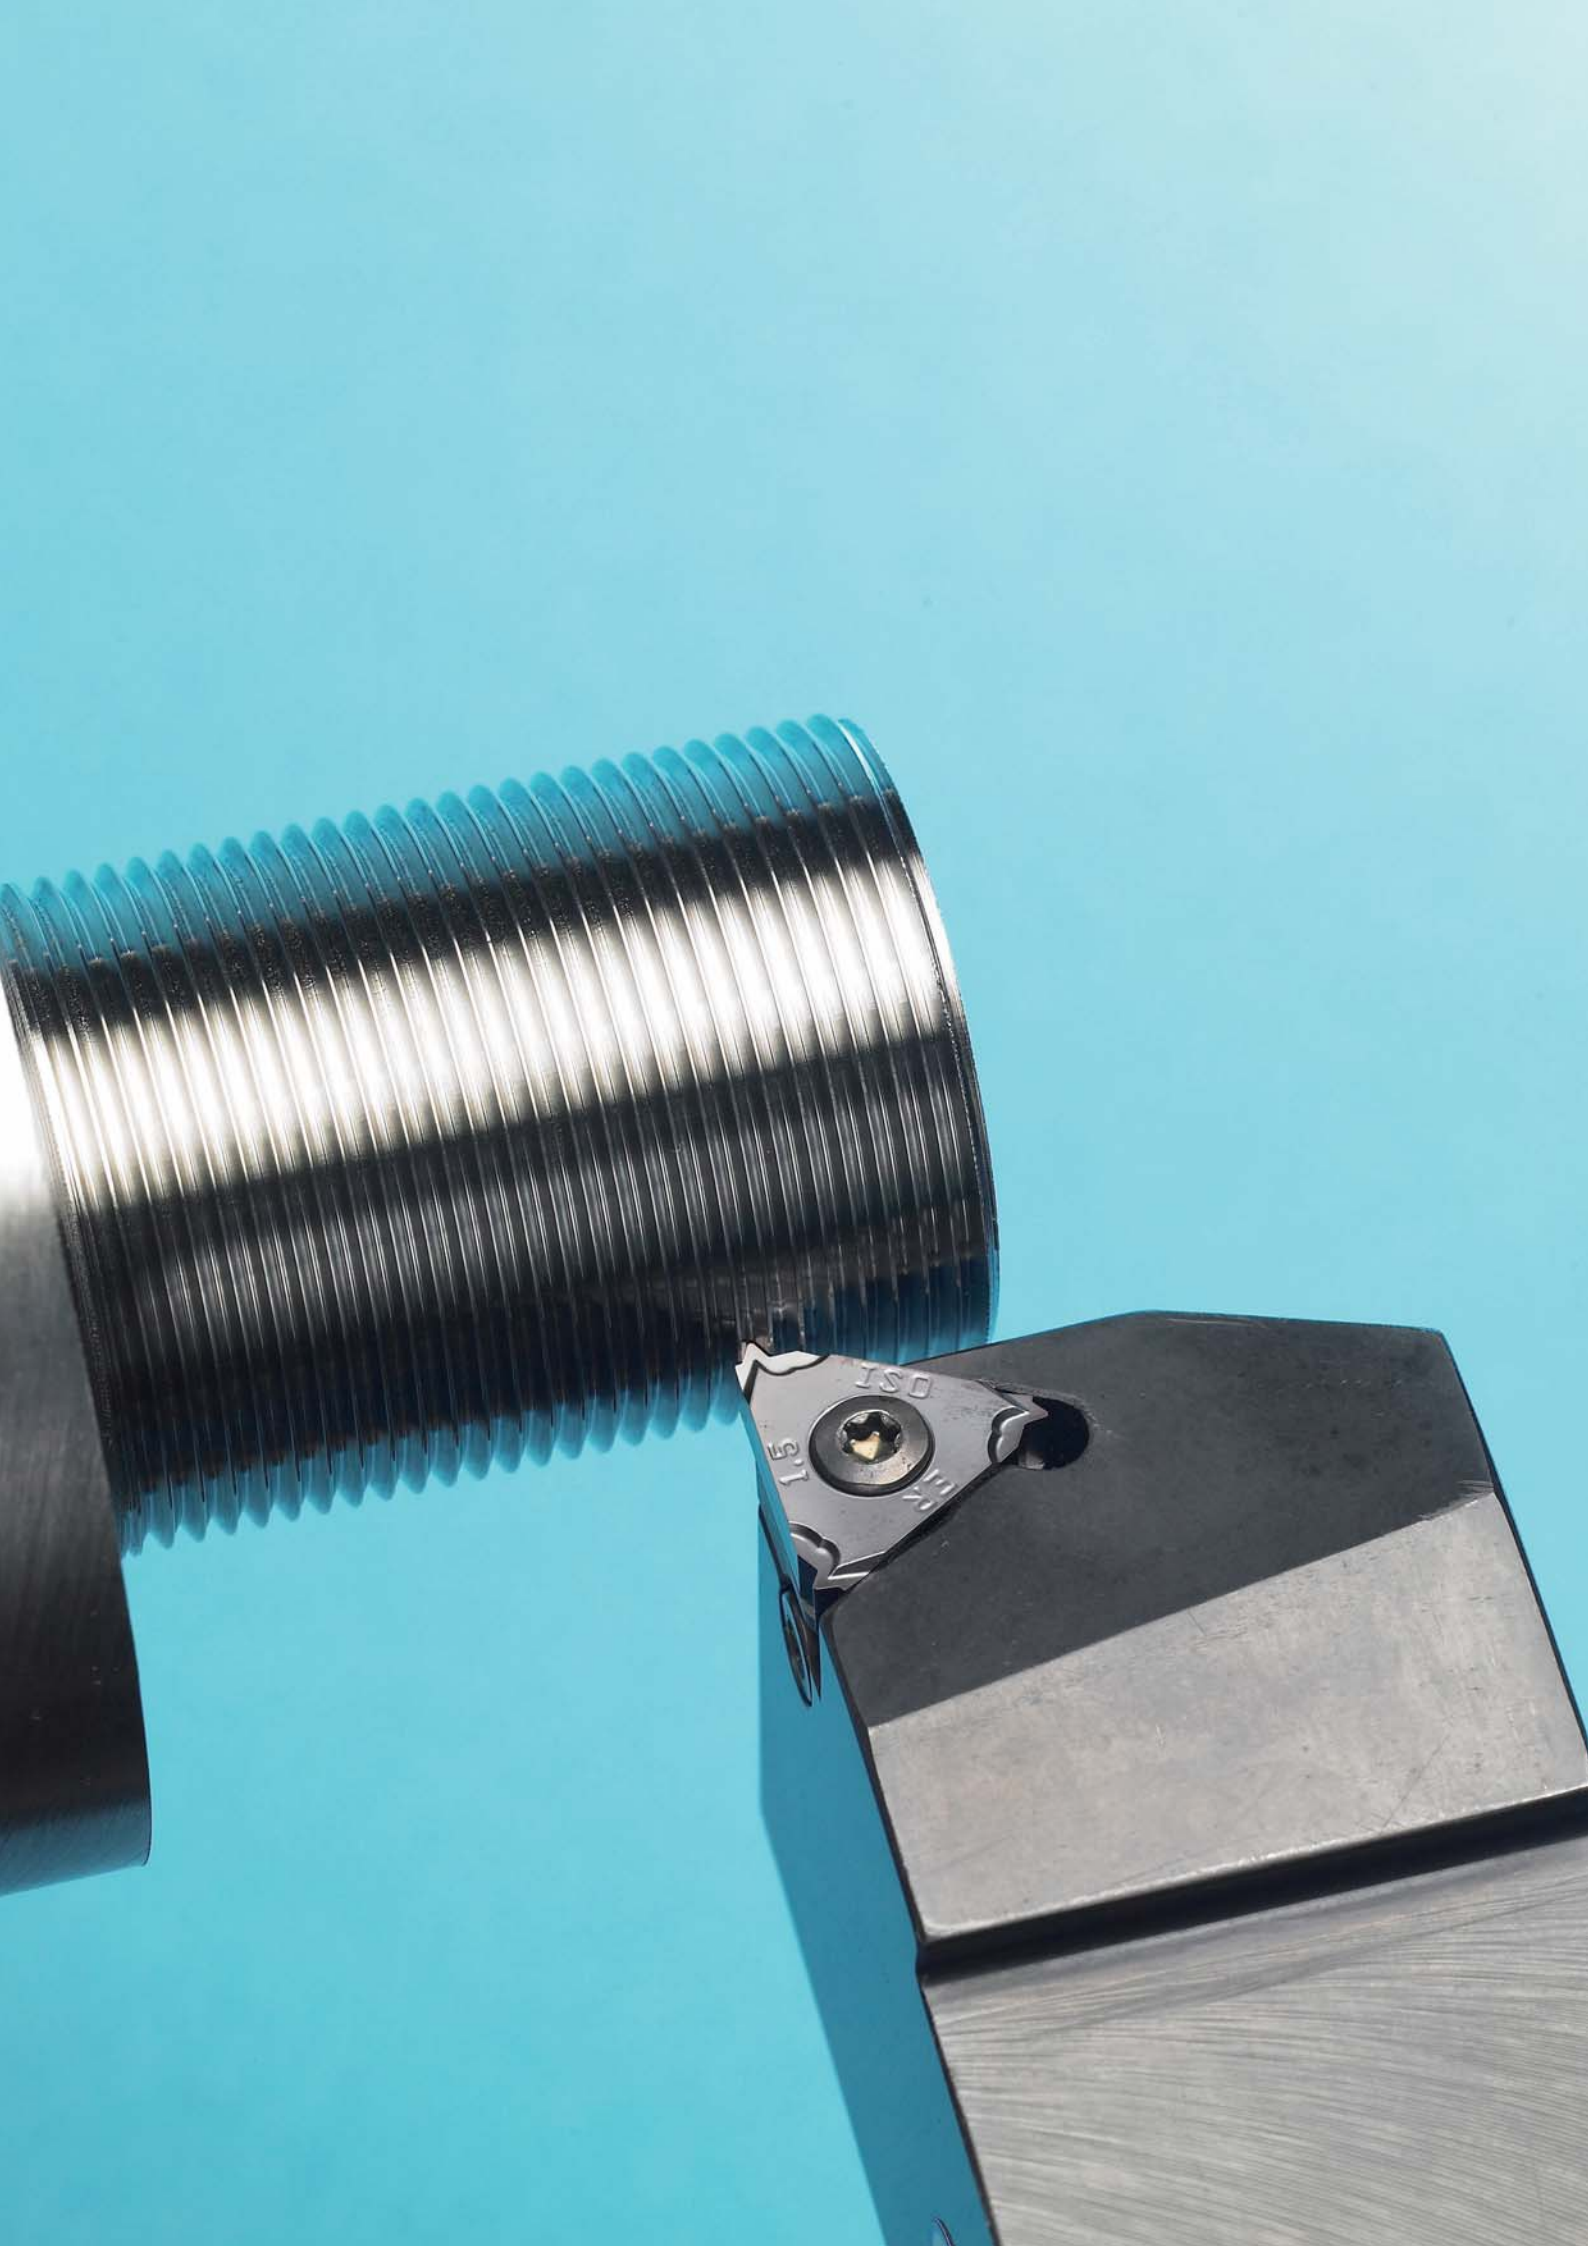

Milling Insert

- E02 Milling Insert Code System (ISO)
- E04 Milling Inserts
- E24 KORLOY Cutters
- E30 KORLOY Shanks
- E33 KORLOY Modular Adaptors

Face Milling Cutters

- E34 Mill-max / Mill-max Plus (E35,E41)
- E44 Turbo Mill
- E47 Double Mill
- E49 Technical Information for Power Buster
- E52 Power Buster
- E54 Technical Information for Rich Mill
- E66 Rich Mill
- E102 Technical Information for Aero Mill / Aero Mill Plus / Aero Mill Mini
- E105 Aero Mill
- E106 Aero Mill Plus
- E108 Aero Mill Mini
- E110 PCD Face Cutter

Cutters for Molds

- E111 Technical Information for Alpha Mill
- E116 Alpha Mill
- E143 Technical Information for BT / HSK Tooling System
- E144 BT Tooling System (Single edge)
- E147 HSK Tooling System (Single edge)
- E150 BT Tooling System (Multi edge)
- E154 HSK Tooling System (Multi edge)
- E158 BT Tooling System (Modular)
- E159 HSK Tooling System (Modular)
- E160 Technical Information for Future Mill / FMR P-Positive
- E175 Future Mill
- E199 FMR P-Positive
- E208 Technical Information for HRMDouble
- E213 HRMDouble
- E223 HRM
- E228 Tank Mill
- E229 Technical Information for Laser Mill / GBE / BRE
- E238 Laser Mill



Cutters for Molds

- E242 BFE
- E243 GBE
- E246 BRE
- E247 Technical Information for HAVE
- E249 HAVE (Single edge / Multi edge)
- E251 O-Ring Cutter
- E253 Chamfer Tool
- E261 T-Cutter

Milling Cutters for Aluminum

- E262 Technical Information for Pro-A Mill / Pro-X Mill / Pro-L Mill
- E269 Pro-A Mill
- E272 Pro-X Mill
- E277 Pro-L Mill
- E280 HSK Tooling System (Single edge)
- E281 Modular Adaptor

Side Milling Cutters

- E283 Technical Information for Side Milling Cutters
- E285 Side Milling Cutter
- E289 Side Cutter
- E294 Wind Mill

Milling Cutter for Cast iron at high feed

- E298 Technical Information for High feed Cutter
- E300 Technical Information for Storm Mill
- E301 Technical Information for Shave Mill
- E303 Technical Information for Shave Mill Ultra
- E304 Technical Information for Cube Mill
- E305 Technical Information for Couple Mill
- E307 High feed Cutter
- E315 Shave Mill
- E316 Shave Mill Ultra

Detail Information of Milling Cutter and Arbor

- E318 Actual Designations of Milling Cutter and Arbor

Gear Tools

- E321 Technical Information for Gear Cutter Tools
- E322 Gear Cutter Table
- E323 Gear Cutter
- E331 Gear Cutter Order Form
- E332 Indexable HOB
- E333 Indexable HOB Order Form
- E334 Special Boring Tool Order Form




MILLING

Milling tools that provide the best quality for customers' need and improve productivity.



E Milling Insert Code System(ISO)

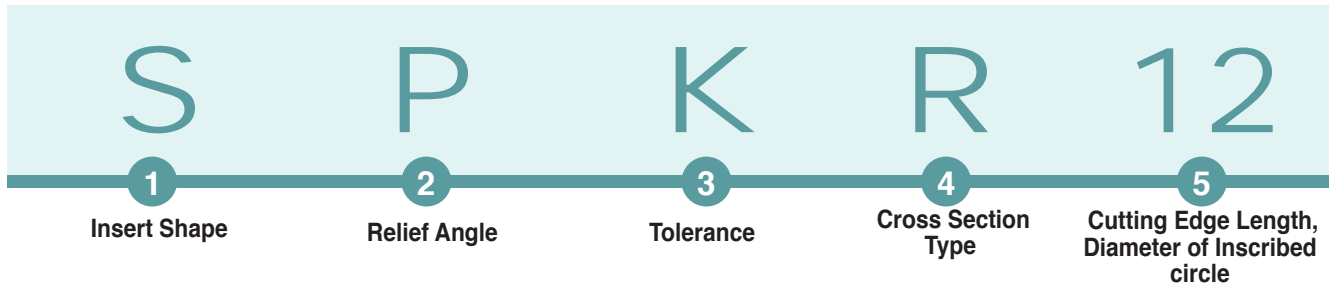

1 Insert Shape

S P K R 12 03 08 S R - MX

2 Relief Angle

S P K R 12 03 08 S R - MX

3 Tolerance

S P K R 12 03 08 S R - MX

d : Incribed Circle
t : Thickness
m : refer to figure

■ Tolerance on C, E, H, M, O, P, R, S, T, W Insert Shape (exceptional case) (mm)

Class	d	m	t	Tolerance on d		Tolerance on m	
				J, K, L, M, N	U	M, N	U
A	±0.025	±0.005	±0.025	6.35	±0.05 ±0.08	±0.08	±0.13
C	±0.025	±0.013	±0.025	9.525	±0.05 ±0.08	±0.08	±0.13
H	±0.013	±0.013	±0.025	12.7	±0.08 ±0.13	±0.13	±0.20
E	±0.025	±0.025	±0.025	15.875	±0.10 ±0.18	±0.15	±0.27
G	±0.025	±0.025	±0.13	19.05	±0.10 ±0.18	±0.15	±0.27
J	±0.05 ~ ±0.15	±0.005	±0.025	25.4	±0.13 ±0.25	±0.18	±0.38
K	±0.05 ~ ±0.15	±0.013	±0.025	Tolerance on D Insert Shape (exceptional case)			
L	±0.05 ~ ±0.15	±0.025	±0.025	d	Tolerance on d	Tolerance on m	
M	±0.05 ~ ±0.15	±0.08 ~ ±0.20	±0.13	6.35	±0.05	±0.11	
U	±0.08 ~ ±0.25	±0.13 ~ ±0.38	±0.13	9.525	±0.05	±0.11	
				12.7	±0.08	±0.15	
				15.875	±0.10	±0.18	
				19.05	±0.10	±0.18	

4 Cross Section Type

S P K R 12 03 08 S R - MX

5 Cutting Edge Length, Diameter of Incribed circle

S P K R 12 03 08 S R - MX

■ Metric system ※ Decimal integer constant

■ Inch system

· Use 1/32" unit for a insert having smaller I.C under 1/4"
· Use 1/8" unit for a insert having larger I.C over 1/4"

※ In case of rectangular and rhombic insert indicate cutting edge length instead of incribed circle.

■ Cross over chart for "Metric" and "Inch" system

	06	09	11	16	22	27	33	44
△	06	09	11	16	22	27	33	44
○ □	03	05	06	09	12	15	19	25
55°	04	06	07	11	15	19	23	31
80°	03	05	06	09	12	16	19	25
Inscribed circle	5/32"	7/32"	1/4"	3/8"	1/2"	5/8"	3/4"	1"
Inch system	5	7	2(8)	3	4	5	6	8



03

ED
08

S

R - MX

6

Height of Cutting Edge

7

Nose Radius (Nose R)

8

Edge Preparation

9


Hand

10

Chip Breaker for Milling

6 Height of Cutting Edge

S P K R 12 03 ED 08 S R - MX




Symbol		Height of cutting edge(t)	
Metric	Inch	mm	Inch
01	1(2)	1.59	1/16
T0	1.125	1.79	9/128
T1	1.2	1.98	5/64
02	1.5(3)	2.38	3/32
T2	1.75	2.78	7/64
03	2	3.18	1/8
T3	2.5	3.97	5/32
04	3	4.76	3/16
05	3.5	5.56	7/32
06	4	6.35	1/4
07	5	7.94	5/16
09	6	9.52	3/8
11	7	11.11	7/16
12	8(16)	12.70	1/2

() Symbol for small size insert


8 Edge Preparation

S P K R 12 03 ED 08 S R - MX

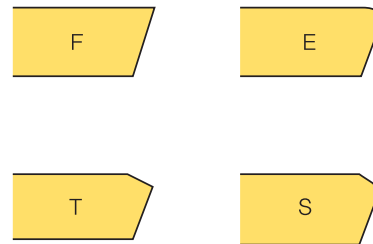

9 Hand

S P K R 12 03 ED 08 S R - MX

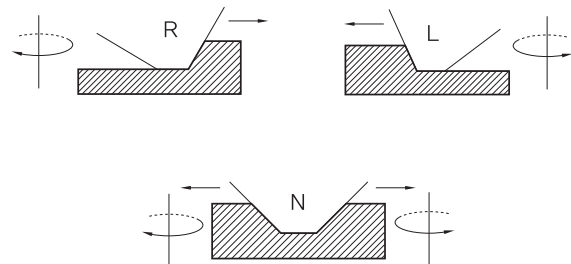


7 Nose Radius (Nose R)

S P K R 12 03 ED 08 S R - MX




r		Symbol		r		Symbol	
mm	Inch	mm	Inch	mm	Inch	mm	Inch
00	0	0.0		12	3	1.2	3/64
02		0.2		15		1.5	
04	1	0.4	1/64	16	4	1.6	4/64
05		0.5		24	6	2.4	6/64
08	2	0.8	2/64	32	8	3.2	8/64
10		1.0		40		4.0	



Parallel Land	Relief Angle
kr	α°
A - 45°	A - 3° F - 25°
D - 60°	B - 5° G - 30°
E - 75°	C - 7° N - 0°
F - 85°	D - 15° P - 11°
P - 90°	E - 20°
Z - Special	

10 Chip Breaker for Milling


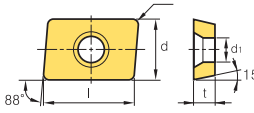

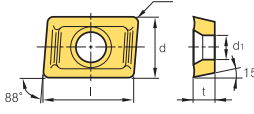

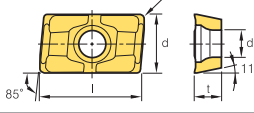

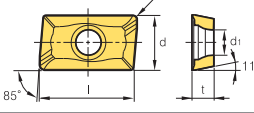

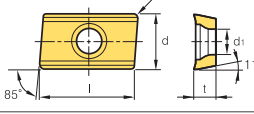

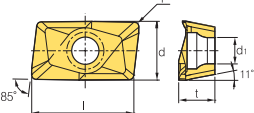

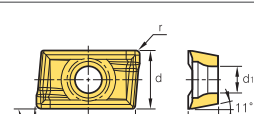

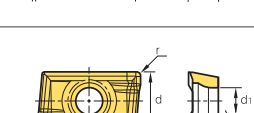

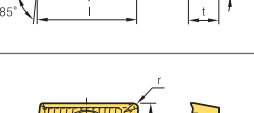

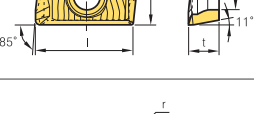

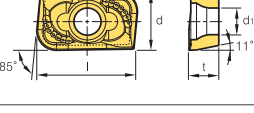
S P K R 12 03 ED 08 S R - MX

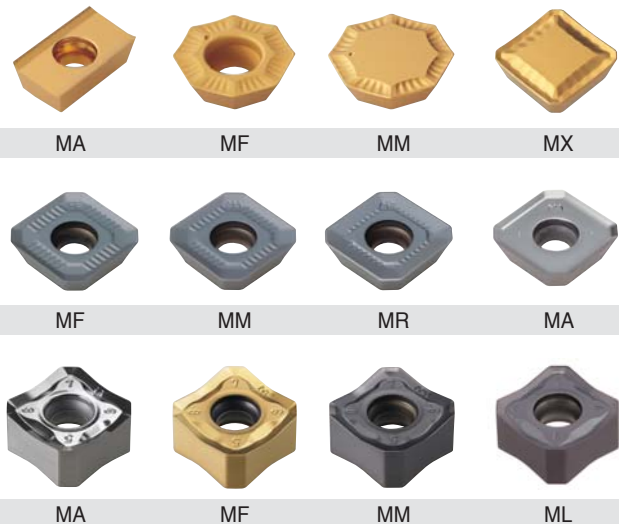

E Milling Inserts

Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	Machining types					
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermets		Coated							Uncoated			Dimensions (mm)					Geometries	Available tools
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	H01	l	d	t		
	150308R													15.0	9.525	3.18	0.8	4.5		-
	150308SR													15.0	9.525	3.18	0.8	4.5		
	150308TR	●												15.0	9.525	3.18	0.8	4.5		
	150308R			●										15.0	9.525	3.18	0.8	4.5		E228
	150308SR				●									15.0	9.525	3.18	0.8	4.5		
	150308TR	●												15.0	9.525	3.18	0.8	4.5		
	1604PDSR-X22				●									16.4	9.525	4.76	0.8	4.4		E120 E132
	1604PDTR-X22													16.4	9.525	4.76	0.8	4.4		
	1604PDSR			●	●									16.4	9.525	4.76	0.8	4.4		E120 E132
	1604PDFR-MA											●		16.4	9.525	4.76	0.2	4.4		E120 E132
	1604PDFR-MA2											●		16.5	9.56	5.76	0.8	4.5		E120 E132
	160416FR-MA2													16.5	9.56	5.76	1.6	4.5		
	160432FR-MA2													16.5	9.56	5.76	3.2	4.5		
	1604PDFR-MA3											●	●	16.4	9.525	5.0	0.8	4.4		E120 E132
	160420FR-MA3													16.0	9.525	5.0	2.0	4.4		
	1604PDSR-MF			●										16.4	9.525	5.0	0.8	4.4		E120 E132 E139
	1604PDSR-MM			●	●	●	●	●	●	●				16.4	9.525	5.2	0.8	4.4		E120 E132 E139
	160432R-MM1			●										16.4	9.525	4.76	3.2	4.4		E120 E132
	1604PDSR-X22			●										16.4	9.525	4.76	0.8	4.4		E120 E132
	1604PDTR-X22													16.4	9.525	4.76	0.8	4.4		

●: Stock item



Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	●	Machining types
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	
	Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	
	Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	
	Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●		













● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermets		Coated							Uncoated			Dimensions (mm)					Geometries	Available tools
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC8510	PC5300	PC5400	A30	G10E	H01	l	d	t		
APLT	070304R									●				7.5	6.35	3.18	0.4	2.8		E216
APMT-MA	0602PDFR-MA												●	6	4.24	2.6	0.4	2.0		E116-E119
	060208PDFR-MA												●	6	4.24	2.6	0.8	2.0		
	0903PDFR-MA												●	9.4	6.21	3.6	0.4	2.8		
	090308PDFR-MA												●	9.4	6.21	3.6	0.8	2.8		
	11T3PDFR-MA												●	11.2	6.467	3.6	0.5	2.9		
	11T308PDFR-MA												●	11.2	6.467	3.6	0.8	2.9		
	160404PDFR-MA													●	16.4	9.41	5.76	0.4		4.5
	1604PDFR-MA													●	16.4	9.41	5.76	0.8		4.5
	180604PDFR-MA													●	17.4	10.98	6.35	0.4		4.5
	1806PDFR-MA													●	17.4	10.98	6.35	0.8		4.5
	180612PDFR-MA													●	17.4	10.98	6.35	1.2		4.5
	180616PDFR-MA													●	17.4	10.98	6.35	1.6		4.5
	180620PDFR-MA													●	17.4	10.98	6.35	2.0		4.5
	180624PDFR-MA													●	17.4	10.98	6.35	2.4		4.5
180630R-MA													●	17.4	10.98	6.35	3.0	4.5		
APMT-MF	11T3PDSR-MF			●	●	●	●			●	●			11.2	6.467	3.6	0.5	2.85		E116-E142
	1604PDSR-MF			●	●	●	●			●	●			16.4	9.41	5.76	0.8	4.5		
	1806PDSR-MF				●		●			●	●			17.4	10.98	6.35	0.8	4.5		
	180612PDSR-MF									●	●			17.4	10.98	6.35	1.2	4.5		
																				E145-E146
APMT-ML	0903PDER-ML												●	9.4	6.21	3.6	0.4	2.8		E117-E119
	090308PDER-ML												●	9.4	6.21	3.6	0.8	2.8		
	11T3PDER-ML												●	11.2	6.467	3.6	0.5	2.9		
	11T308PDER-ML												●	11.2	6.467	3.6	0.8	2.9		
	160404PDER-ML												●	16.4	9.41	5.76	0.4	4.5		
	1604PDER-ML												●	16.4	9.41	5.76	0.8	4.5		
	180604PDER-ML												●	17.4	10.98	6.35	0.4	4.5		
	1806PDER-ML												●	17.4	10.98	6.35	0.8	4.5		
	180612PDER-ML												●	17.4	10.98	6.35	1.2	4.5		
	180616PDER-ML												●	17.4	10.98	6.35	1.6	4.5		
	180620PDER-ML												●	17.4	10.98	6.35	2.0	4.5		
	180624PDER-ML												●	17.4	10.98	6.35	2.4	4.5		
	180630R-ML												●	17.4	10.98	6.35	3.0	4.5		
	APMT-MM	060202PDSR-MM			●	●	●	●			●	●			6	4.24	2.6	0.2		2.0
0602PDSR-MM				●	●	●	●	●	●	●	●			6	4.24	2.6	0.4	2.0		
060208PDSR-MM				●	●	●	●			●	●			6	4.24	2.6	0.8	2.0		
060212R-MM				●	●					●	●			6	4.24	2.6	1.2	2.0		
060216R-MM					●					●	●			6	4.24	2.6	1.6	2.0		
0903PDSR-MM				●	●	●	●			●	●			9.4	6.21	3.6	0.4	2.8		
090306PDSR-MM				●	●	●	●			●	●			9.4	6.21	3.6	0.6	2.8		
090308PDSR-MM				●	●	●	●			●	●			9.4	6.21	3.6	0.8	2.8		
090312R-MM						●				●	●			9.4	6.21	3.6	1.2	2.8		
090316R-MM				●	●					●	●			9.4	6.21	3.6	1.6	2.8		
090320R-MM					●					●	●			9.2	6.21	3.6	2.0	2.8		
090331R-MM										●	●			9.2	6.21	3.6	3.1	2.8		
090332R-MM										●	●			9.2	6.21	3.6	3.2	2.8		

●: Stock item

E Milling Inserts

Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	Machining types	
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●












Inserts	Designation	Cermets		Coated							Uncoated	PCD		Dimensions (mm)						Geometries	Available tools					
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510		PC5300	PC5400	H01	DP150	DP200	l	d	t			r	d ₁	C		
APMT-MM 	11T3PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	11.2	6.467	3.6	0.5	2.85	-		E116~E142 E144~E157			
	11T308PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	11.2	6.467	3.6	0.8	2.85	-					
	11T312PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	11.2	6.467	3.6	1.2	2.85	-					
	11T316R-MM			●	●						●	●	●	●	●	11.0	6.467	3.6	1.6	2.85	-					
	11T318R-MM										●	●	●	●	●	11.0	6.467	3.6	1.8	2.85	-					
	11T324R-MM			●	●		●				●	●	●	●	●	11.0	6.467	3.6	2.4	2.85	-					
	APMT-MM	1604PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	16.4	9.41	5.76	0.8	4.5	-		E106~E108		
		160410PDSR-MM			●	●		●				●	●	●	●	●	16.4	9.41	5.76	1.0	4.5	-				
		160416PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	16.4	9.41	5.76	1.6	4.5	-				
		160424R-MM				●	●		●			●	●	●	●	●	16	9.41	5.76	2.4	4.5	-				
		160430R-MM										●	●	●	●	●	16	9.41	5.76	3.0	4.5	-				
		160432R-MM			●	●	●		●			●	●	●	●	●	16	9.41	5.76	3.2	4.5	-				
		160450R-MM										●	●	●	●	●	16	9.41	5.76	5.0	4.5	-				
		160464R-MM										●	●	●	●	●	16	9.41	5.76	6.4	4.5	-				
		APMT-MM	1806PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	17.4	10.98	6.35	0.8	4.5	-			E106~E108
			180612PDSR-MM			●	●	●		●			●	●	●	●	●	17.4	10.98	6.35	1.2	4.5	-			
			180616PDSR-MM				●			●			●	●	●	●	●	17.4	10.98	6.35	1.6	4.5	-			
			180620PDSR-MM										●	●	●	●	●	17.4	10.98	6.35	2.0	4.5	-			
180624PDSR-MM				●	●						●	●	●	●	●	17.4	10.98	6.35	2.4	4.5	-					
180630R-MM											●	●	●	●	●	16.7	10.98	6.35	3.0	4.5	-					
180632R-MM					●	●		●			●	●	●	●	●	16.7	10.98	6.35	3.2	4.5	-					
180640R-MM								●			●	●	●	●	●	16.7	10.98	6.35	4.0	4.5	-					
180648R-MM											●	●	●	●	●	16.7	10.98	6.35	4.8	4.5	-					
180650R-MM											●	●	●	●	●	16.7	10.98	6.35	5.0	4.5	-					
180660R-MM											●	●	●	●	●	16.7	10.98	6.35	6.0	4.5	-					
180664R-MM											●	●	●	●	●	16.7	10.98	6.35	6.4	4.5	-					
BAMPR-XAF 	BAMPR-XAF												●		25.5	10.5	7	-	-	-		E106~E108				
BAMPR-XAW 	BAMPR-XAW												●		25.5	10	7	-	-	-						
BAMPR-XAWR 	BAMPR-XAWR														25.5	10	7	-	-	-		E107 E108				
CDEW-NAF 	1204R-NAF 1204L-NAF												●		12.7	9.525	4.76	-	4.4	-						
strengthened Edge CDEW-NAW 	1204R-NAW 1204L-NAW												●		12.7	9.525	4.76	-	4.4	-		E105				
strengthened Edge Wiper Insert													●		12.7	9.525	4.76	-	4.4	-						

●: Stock item



Workpiece	Steel	P									Machining types					
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting























Inserts	Designation	Cermet		Coated						Uncoated			Dimensions (mm)							Geometries	Available tools
		CN2000	CN80	PC2005	PC2010	PC2015	PC210F	PC3500	PC3600	PC9530	PC5300	G10E	H01	DP200	l	d	t	r	d ₁		
	1204R-XAW												●	12.7	9.525	4.76	-	4.4	-		
	1204L-XAW													12.7	9.525	4.76	-	4.4	-		
	1204R-XAF												●	12.7	9.525	4.76	-	4.4	-		
	1204L-XAF													12.7	9.525	4.76	-	4.4	-		
	1204R-XCF												●	12.7	9.525	4.76	-	4.4	-		
	1204L-XCF													12.7	9.525	4.76	-	4.4	-		
	1005-C0.5													10	10	5.4	-	4.7	0.5		
	1305-C0.5													12.7	10	5.4	-	4.7	0.5		
	1606-C0.5													16	12	6.4	-	5.9	0.5		
	120408-MM								●					12.9	12.7	4.76	0.8	5.5	-		
	060204-MM								●					6.4	6.35	2.38	0.4	2.75	2.75		
	080308-MM								●					8.1	7.938	3.40	0.8	3.18	3.18		
	09T308-MM								●					9.7	9.525	3.97	0.8	4.4	4.4		
	090408FN													9.0	15.875	4.76	0.8	-	-		
	090408SN													9.0	15.875	4.76	0.8	-	-		
	090408TN													9.0	15.875	4.76	0.8	-	-		
	110412FN													11.0	19.05	4.76	1.2	-	-		
	110412TN													11.0	19.05	4.76	1.2	-	-		
	090408FN													9.0	15.875	4.76	0.8	-	-		
	090408SN													9.0	15.875	4.76	0.8	-	-		
	090408EN													9.0	15.875	4.76	0.8	-	-		
	110412FN													11.0	19.05	4.76	1.2	-	-		
	090408-WC													9.0	15.875	4.76	0.8	-	-		
	110412-WC													11.0	19.05	4.76	1.2	-	-		
	080								●					7.0	8	2.4	4	-	-		
	100								●					8.5	10	2.6	5	-	-		
	120								●					10.0	12	3	6	-	-		
	160								●					12.0	16	4	8	-	-		
	200								●					15.0	20	5	10	-	-		
	250								●					18.5	25	6	12.5	-	-		
	300								●					22.5	30	7	15	-	-		
	320								●					23.5	32	7	16	-	-		
	080-KF								●					7.0	8	2.4	4	-	-		
	100-KF								●					8.5	10	2.6	5	-	-		
	120-KF								●					10.0	12	3	6	-	-		
	130-KF								●					20.5	13	3	6.5	-	-		
	160-KF								●					12.0	16	4	8	-	-		
	170-KF								●					12.5	17	4	8.5	-	-		
	200-KF								●					15.0	20	5	10	-	-		
	210-KF								●					15.5	21	5	10.5	-	-		
	250-KF								●					18.5	25	6	12.5	-	-		
	300-KF								●					22.5	30	7	15	-	-		
320-KF								●					23.5	32	7	16	-	-			

●: Stock item



Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	●	Machining types				
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting










Inserts	Designation	Cermets		Coated							Uncoated			Dimensions (mm)					Geometries	Available tools	
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30	G10E	H01	l	d	t			r
	1907-C1.5-WC													19.05	14.3	7	-	5.8		E316 E317	
	1907-R3.0-WC													19.05	14.3	7	-	5.8		E316 E317	
	324-R0.8 324-C1.0													15.9	9.525	6.35	0.8	4.4		-	
	150608-MF 150608-ML													15.88	15.23	6.35	0.8	-		-	
	1506QNN-MF 1506QNN-ML													15.88	15.23	6.35	0.8	-		-	
	1506ANN-MF 1506ANN-ML													15.88	15.23	6.35	0.8	-		-	
	LNMX 100605PNR-MF 100608PNR-MF LNEX 100605PNR-MF 100608PNR-MF				●				●	●				10.0	6.5	6.5	0.5	3.5		E70 E71 E74 E75 E78-82	
	LNMX 151004PNR-MF 151008PNR-MF 151016PNR-MF LNEX 151004PNR-MF 151008PNR-MF 151016PNR-MF				●				●	●				15.0	10.0	10.0	0.4	4.5		E70 E71 E74 E75 E78-82	
	LNMX 100605PNR-MM 100608PNR-MM 100605PNL-MM LNEX 100605PNR-MM 100608PNR-MM 100605PNL-MM				●	●			●	●				10.0	6.5	6.5	0.5	3.5		E70-E84	
	LNMX 151004PNR-MM 151008PNR-MM 151016PNR-MM 151008PNL-MM LNEX 151004PNR-MM 151008PNR-MM 151016PNR-MM 151008PNL-MM				●	●	●	●	●	●				15.0	10.0	10.0	0.4	4.5		E70-E84	
	LNEX 100605PNR-MA 151004PNR-MA 151008PNR-MA													●	10.0	6.5	6.5	0.5	3.5		E70-E75 E78-E82

●: Stock item



E Milling Inserts

























Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	Machining types
	Stainless steel	M										
Cast iron	K											● Continuous cutting ● General cutting ● Interrupted cutting
Non-ferrous metal	N											
Heat resistant alloy, Titanium alloy	S											
Hardened steel	H											

Inserts	Designation	Cermets		Coated						Uncoated			Dimensions (mm)					Geometries	Available tools	
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30	G10E	H01	l	d			t
 LXET-MA	250404PEFR-32-MA													25	10.775	4.76	0.4	4.5		E277~ E279
	2504PEFR-32-MA													25	10.775	4.76	0.8	4.5		
	250412PEFR-32-MA													25	10.775	4.76	1.2	4.5		
	250416PEFR-32-MA													25	10.775	4.76	1.6	4.5		
	250404PEFR-40-MA													25	10.618	4.76	0.4	4.5		
	2504PEFR-40-MA													25	10.618	4.76	0.8	4.5		
	250412PEFR-40-MA													25	10.618	4.76	1.2	4.5		
	250416PEFR-40-MA													25	10.618	4.76	1.6	4.5		
	340504PEFR-50-MA													34	13.765	5.56	0.4	5.56		
	3405PEFR-50-MA													34	13.765	5.56	0.8	5.56		
	340512PEFR-50-MA													34	13.765	5.56	1.2	5.56		
	340516PEFR-50-MA													34	13.765	5.56	1.6	5.56		
	340504PEFR-63-MA													34	13.803	5.56	0.4	5.56		
	3405PEFR-63-MA													34	13.803	5.56	0.8	5.56		
	340512PEFR-63-MA													34	13.803	5.56	1.2	5.56		
	340516PEFR-63-MA													34	13.803	5.56	1.6	5.56		
 LXET-ML	250404PEER-32-ML													25	10.775	4.76	0.4	4.5		E277~ E279
	2504PEER-32-ML													25	10.775	4.76	0.8	4.5		
	250412PEER-32-ML													25	10.775	4.76	1.2	4.5		
	250416PEER-32-ML													25	10.775	4.76	1.6	4.5		
	250404PEER-40-ML													25	10.618	4.76	0.4	4.5		
	2504PEER-40-ML													25	10.618	4.76	0.8	4.5		
	250412PEER-40-ML													25	10.618	4.76	1.2	4.5		
	250416PEER-40-ML													25	10.618	4.76	1.6	4.5		
	340504PEER-50-ML													34	13.765	5.56	0.4	5.56		
	3405PEER-50-ML													34	13.765	5.56	0.8	5.56		
	340512PEER-50-ML													34	13.765	5.56	1.2	5.56		
	340516PEER-50-ML													34	13.765	5.56	1.6	5.56		
	340504PEER-63-ML													34	13.803	5.56	0.4	5.56		
	340508PEER-63-ML													34	13.803	5.56	0.8	5.56		
	340512PEER-63-ML													34	13.803	5.56	1.2	5.56		
	340516PEER-63-ML													34	13.803	5.56	1.6	5.56		
MPMT	090308													9.5	9.525	3.18	0.8	4.5		-
	120408													12.7	12.7	4.76	0.8	5.5		
OFCN	0704SN			●	●	●	●							7.4	18	4.86	0.5	-		E48
	0704FN													7.4	18	4.86	0.5	-		
	070408SN			●										7.4	18	4.86	0.8	-		
	070408FN													7.4	18	4.86	0.8	-		
	070408TN													7.4	18	4.86	0.8	-		
OFCW	05T3SN													5.2	12.7	3.85	0.5	4.4		E48
	05T3FN													5.2	12.7	3.85	0.5	4.4		
	05T308FN													5.2	12.7	3.85	0.8	4.4		
OFKR-MA	0704FN-MA													7.4	18	4.76	0.5	-		E48
	0704EN-MA													7.4	18	4.76	0.5	-		
OFKR-MF	0704SN-MF			●	●									7.4	18	4.76	0.5	-		E48
	070408SN-MF			●										7.4	18	4.76	0.8	-		

● : Stock item



















Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	●	Machining types			
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Inserts	Designation	Cermets		Coated							Uncoated			Dimensions (mm)								Geometries	Available tools		
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	H01	l	d	t	r	d ₁	a			W	g
	0704SN-MM	●	●	●	●	●	●	●	●	●	●	●	●	7.4	18	4.76	0.5	-	-	-	-	-	-		E48
	070408SN-MM	●												7.4	18	4.76	0.8	-	-	-	-	-			
	05T3FN-MA											●		5.2	12.7	3.97	0.5	4.4	-	-	-	-		E47 E48	
	05T3EN-MA											●		5.2	12.7	3.97	0.5	4.4	-	-	-	-			
	0704FN-MA											●		7.4	18	4.76	0.5	5.8	-	-	-	-			
	0704EN-MA											●		7.4	18	4.76	0.5	5.8	-	-	-	-			
	05T3SN-MF			●	●							●		5.2	12.7	3.97	0.5	4.4	-	-	-	-		E47	
	05T308SN-MF											●		5.2	12.7	3.97	0.8	5.8	-	-	-	-			
	05T3SN-MM			●	●	●						●		5.2	12.7	3.97	0.5	4.4	-	-	-	-		E47 E48	
	05T308SN-MM											●		5.2	12.7	3.97	0.8	4.4	-	-	-	-			
	0704SN-MM			●										7.4	18	4.76	0.5	5.5	-	-	-	-			
	060608-MF					●						●	●	6.6	16.0	6.0	0.8	5.6	-	-	-	-		E100 E101	
	080608-MF											●	●	8.4	20.2	6.0	0.8	5.6	-	-	-	-			
	0606ANN-MF					●						●	●	6.6	16.0	6.0	0.8	5.6	1.03	-	-	-			
	0806ANN-MF											●	●	8.4	20.2	6.0	0.8	5.6	1.53	-	-	-			
	060608-ML											●	●	6.6	16.0	6.0	0.8	5.6	-	-	-	-		E100 E101	
	080608-ML											●	●	8.4	20.2	6.0	0.8	5.6	-	-	-	-			
	060608-MM					●						●	●	6.6	16.0	6.0	0.8	5.6	-	-	-	-		E100 E101	
	080608-MM					●						●	●	8.4	20.2	6.0	0.8	5.6	-	-	-	-			
	0606ANN-MM											●	●	6.6	16.0	6.0	0.8	5.6	1.03	-	-	-			
	0806ANN-MM											●	●	8.4	20.2	6.0	0.8	5.6	1.53	-	-	-			
	060608-MA											●		6.6	16.0	6.0	0.8	5.6	-	-	-	-		E100 E101	
	080608-MA											●		8.4	20.2	6.0	0.8	5.6	-	-	-	-			
	060608-W					●						●	●	6.5	16.0	6.0	0.8	5.6	-	-	-	-		E100 E101	
	080608-W					●						●	●	8.2	20.2	6.0	0.8	5.6	-	-	-	-			
	060608-MF					●	●					●	●	6.6	16.0	6.0	0.8	5.6	-	-	-	-		E100 E101	
	080608-MF											●	●	8.4	20.2	6.0	0.8	5.6	-	-	-	-			
	0606ANN-MF											●	●	6.6	16.0	6.0	0.8	5.6	1.03	-	-	-			
	0806ANN-MF					●						●	●	8.4	20.2	6.0	0.8	5.6	1.53	-	-	-			
	060608-MM					●	●					●	●	6.6	16.0	6.0	0.8	5.6	-	-	-	-		E100 E101	
	080608-MM					●	●					●	●	8.4	20.2	6.0	0.8	5.6	-	-	-	-			
	0606ANN-MM					●						●	●	6.6	16.0	6.0	0.8	5.6	1.03	-	-	-			
	0806ANN-MM					●						●	●	8.4	20.2	6.0	0.8	5.6	1.53	-	-	-			
	265					●								10	7	3.0	0.3	3.5	-	2.65	2.8	-		E252	
	325					●								10	7	3.0	0.3	3.5	-	3.25	2.8	-			
	405					●								15	12	4.5	0.5	4.5	-	4.05	4.5	-			
	470					●								15	12	4.5	0.5	4.5	-	4.70	4.5	-			

●: Stock item

E Milling Inserts





















Workpiece	Steel	P	●	●	●	●	●	●	●	●	Machining types	
	Stainless steel	M	●	●	●	●	●	●	●	●	●	● Continuous cutting
Cast iron	K	●	●	●	●	●	●	●	●	●	●	● General cutting
Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	● Interrupted cutting
Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	

Inserts	Designation	Cermets		Coated							Uncoated			Dimensions (mm)				Geometries	Available tools					
		CN2000	CN30	NCM325	NCM335	PC3500	PC210F	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	H01	l	d			t	r	d ₁	a	Cutter width
 PNEJ	1223N					●									-	12.7	2.3	-	5.0	-	4.0		E291	
	1225N					●									-	12.7	2.5	-	5.0	-	4.5		E292	
	1230N														-	12.7	3.0	-	5.0	-	5.0			
	1235N						●								-	12.7	3.5	-	5.0	-	6.0			
	1240N						●								-	12.7	4.0	-	5.0	-	7.0			
	1245N			●		●									-	12.7	4.5	-	5.0	-	8.0			
	1250N														-	12.7	5.0	-	5.0	-	9.0			
	1255N						●								-	12.7	5.5	-	5.0	-	10.0			
	1260N														-	12.7	6.0	-	5.0	-	11.0			
	1265N					●	●								-	12.7	6.5	-	5.0	-	12.0			
	1270N														-	12.7	7.0	-	5.0	-	13.0			
	1275N					●									-	12.7	7.5	-	5.0	-	14.0			
	1285N														-	12.7	8.5	-	5.0	-	16.0			
 PNEJ-C	1223N-C03														-	12.7	2.3	-	5.0	-	4.0	 * C03 : Chamfer 0.3mm C05 : Chamfer 0.5mm	E291	
	1230N-C03														-	12.7	3.0	-	5.0	-	5.0		E292	
	1235N-C03														-	12.7	3.5	-	5.0	-	6.0			
	1240N-C05														-	12.7	4.0	-	5.0	-	7.0			
	1245N-C05														-	12.7	4.5	-	5.0	-	8.0			
	1250N-C05														-	12.7	5.0	-	5.0	-	9.0			
	1255N-C05														-	12.7	5.5	-	5.0	-	10.0			
	1260N-C05														-	12.7	6.0	-	5.0	-	11.0			
	1265N-C05														-	12.7	6.5	-	5.0	-	12.0			
	1270N-C05														-	12.7	7.0	-	5.0	-	13.0			
1275N-C05														-	12.7	7.5	-	5.0	-	14.0				
 RC	16							●							15.8	16	3.5	8	-	-		E243		
	20							●							17.8	20	4	10	-	-				
	25							●							22.0	25	5	12.5	-	-				
	30							●							26.8	30	6	15	-	-				
	32							●							27.8	32	6	16	-	-				
 RDCT-MA	10T3M0-MA												●	-	10	3.97	-	3.85	-	-		E187		
	1204M0-MA													-	12	4.76	-	4.5	-	-		E188		
 RDHW	0501M0F														-	5	1.59	-	2.3	-	-		E191	
	0501M0E														-	5	1.59	-	2.3	-	-		E192	
	0501M0S														-	5	1.59	-	2.3	-	-		E197	
	06T1M0F														-	6	1.98	-	2.5	-	-			
	06T1M0E									●					-	6	1.98	-	2.5	-	-			
	06T1M0S														-	6	1.98	-	2.5	-	-			
	0702M0F														-	7	2.38	-	2.8	-	-			
	0702M0E										●				-	7	2.38	-	2.8	-	-			
	0702M0S														-	7	2.38	-	2.8	-	-			
	0803M0F														-	8	3.18	-	3.4	-	-			
	0803M0E										●				-	8	3.18	-	3.4	-	-			
0803M0S														-	8	3.18	-	3.4	-	-				
 RDHW	1605M0F														-	16	5.56	-	5.5	-	-		E189	
	1605M0E														-	16	5.56	-	5.5	-	-		E190	
	1605M0S														-	16	5.56	-	5.5	-	-		E195	
	2006M0F														-	20	6.35	-	5.5	-	-		E196	
	2006M0E														-	20	6.35	-	5.5	-	-		E198	
	2006M0S														-	20	6.35	-	5.5	-	-			
 RDKT-MF	10T3M0-MF								●	●		●			-	10	3.97	-	3.85	-	-		E187	
	1204M0-MF								●	●		●			-	12	4.76	-	4.5	-	-		E188	
	1605M0-MF									●	●		●		-	16	5.56	-	5.5	-	-		E193	
 RDKT-ML	1605M0-ML														-	16	5.56	-	5.5	-	-		E189	
																								E195
																								E198

● : Stock item



Workpiece	Steel	P											Machining types				
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K																●
Non-ferrous metal	N																●
Heat resistant alloy, Titanium alloy	S																●
Hardened steel	H																●

Inserts	Designation	Cermert		Coated							Uncoated			Dimensions (mm)						Geometries	Available tools					
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	PC130	A30	G10E	H01	l	d	t			r	d ₁	a		
	10T3M0-MM			●	●	●	●	●	●	●	●	●	●				-	10	3.97	-	3.85	-		E187~		
	1204M0-MM			●	●	●	●	●	●	●	●	●	●				-	12	4.76	-	4.5	-		E190		
	1605M0-MM					●	●	●	●	●	●	●	●				-	16	5.56	-	5.5	-		E193~		
	2006M0-MM					●	●	●	●	●	●	●	●				-	20	6.35	-	5.5	-		E198		
	0501M0E					●											-	5	1.59	-	2.3	-		E191		
	06T1M0E					●											-	6	1.98	-	2.5	-		E192		
	0702M0E					●											-	7	2.38	-	2.8	-		E197		
	0803M0E					●											-	8	3.18	-	3.4	-				
	170400-MM																-	17.8	4.76	-	-	-		E48		
	10T3M0-MA													●			-	10	3.97	-	4.0	-		E199~		
	1204M0-MA													●			-	12	4.76	-	4.5	-		E207		
	1606M0-MA													●			-	16	6.35	-	5.5	-				
	2007M0-MA													●			-	20	7.00	-	7.0	-				
	0803M0E-ML																-	8	3.18	-	3.4	-		E199~		
	103TM0E-ML																-	10	3.97	-	4.0	-		E207		
	1204M0E-ML																-	12	4.76	-	4.5	-				
	1606M0E-ML																-	16	6.35	-	5.5	-				
	2007M0E-ML																-	20	7.00	-	7.0	-				
	0803M0E-MF																-	8	3.18	-	3.4	-		E199~		
	103TM0E-MF																-	10	3.97	-	4.0	-		E207		
	1204M0E-MF																-	12	4.76	-	4.5	-				
1606M0E-MF																-	16	6.35	-	5.5	-					
	2007M0E-MF																-	20	7.00	-	7.0	-				
	0803M0S-MM																-	8	3.18	-	3.4	-		E199~		
	103TM0S-MM																-	10	3.97	-	4.0	-		E207		
	1204M0S-MM																-	12	4.76	-	4.5	-				
1606M0S-MM																-	16	6.35	-	5.5	-					
	2007M0S-MM																-	20	7.00	-	7.0	-				
	0803M0E1																-	8	3.18	-	3.4	-		E199~		
	103TM0E1																-	10	3.97	-	4.0	-		E207		
	1204M0S1																-	12	4.76	-	4.5	-				
1204M0S2																-	12	4.76	-	4.5	-					
	1606M0S1																-	16	6.35	-	5.5	-		E309~		
	2007M0S1																	-	20	7.00	-	7.0		-	E310	
	42R																-	12.7	3.18	-	-	3.5			E309~	
	42L																-	12.7	3.18	-	-	3.5				
	53R																-	15.875	4.76	-	-	5.0				
	53L																-	15.875	4.76	-	-	5.0				
	42M																●	-	12.7	3.18	-	-		1.5		E34
	42M-G																●	-	12.7	3.18	-	-		1.5		
	42MT	●	●														●	-	12.7	3.18	-	-		1.5		
	42MT-RH			●													●	-	12.7	3.18	-	-		1.5		
	42MT-S20																●	-	12.7	3.18	-	-		1.5		
	53M																●	-	15.875	4.76	-	-		1.5		
	53M-G																●	-	15.875	4.76	-	-		1.5		
	53MT	●	●	●	●	●											●	-	15.875	4.76	-	-		1.5		
	53MT-RH			●	●	●											●	-	15.875	4.76	-	-		1.5		
	53MT-S20																●	-	15.875	4.76	-	-		1.5		
1203AEEN																●	-	12.7	3.18	-	-	1.5				
1203AEEN-RH																●	-	12.7	3.18	-	-	1.43				
1203AESN																●	-	12.7	3.18	-	-	1.5				
1203AESN-RH																●	-	12.7	3.18	-	-	1.43				
1504AEEN																●	-	15.875	4.76	-	-	1.5				
1504AEEN-RH																●	-	15.875	4.76	-	-	1.43				
1504AESN																●	-	15.875	4.76	-	-	1.5				
1504AESN-RH																●	-	15.875	4.76	-	-	1.43				

● : Stock item






















- ▶ Cutting edge geometry
- G : Light Side, Sharpe Edge
 - S20 : STS
 - RH : Strengthened Edge
- ▶ Sub-cutting edge geometry
- M : AEFN
 - MT : AETN



E Milling Inserts

Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	Machining types	
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●
	Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●
	Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●
	Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	



















● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermet		Coated							Uncoated		Dimensions (mm)								Geometries	Available tools		
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	PD2000	A30	H01	l	d	t	r	d ₁			a	b
	09M402R-MA											●	●	-	9.525	3.923	0.2	4.0	1.2	-				E181 ~E186
	09M404R-MA													-	9.525	3.923	0.4	4.0	1.2	-				
	09M405R-MA													-	9.525	3.923	0.5	4.0	1.2	-				
	130504R-MA													●	-	13.5	5.56	0.4	5.56	2.2	-			
	09M405R-MF													-	9.525	4	0.5	4	1.2	-				E181 ~E186
	130508R-MF													-	13.5	5.56	0.8	5.56	2.2	-				
	09M405R-MM													-	9.525	4	0.5	4	1.2	-				E181 ~E186
	130508R-MM													-	13.5	5.56	0.8	5.56	2.2	-				
	42MT-CM		●											-	12.7	3.18	-	-	1.5	-				E34 E44
	1203AESN-MU					●								-	12.7	3.18	-	-	2.08	-				E34 E35 E44 E45
	1504AESN-MU					●								-	15.875	4.76	-	-	2.10	-				
	1203AESN-SU					●	●			●	●			-	12.7	3.18	-	-	2.08	-				E34 E35 E44 E45
	1504AESN-SU					●				●	●			-	15.875	4.76	-	-	2.10	-				
	1203AESN-MX													-	12.7	3.18	-	-	1.46	-				E34 E35 E44 E45
	1203AETN-MX													-	12.7	3.18	-	-	1.46	-				
	1203AEN-MX			●										-	12.7	3.18	-	-	1.46	-				
	1504AESN-MX					●								-	15.875	4.76	-	-	1.45	-				
	1504AETN-MX													-	15.875	4.76	-	-	1.45	-				
SDMT-MM	090308-MM					●					●			-	9.525	3.18	0.8	4.4	-	-				E214 E228
	09M405R-MA												●	-	9.525	4.0	0.5	4.0	1.2	-				E181 ~E186
	130508R-MA												●	-	13.5	5.56	0.8	5.56	2.2	-				
	09M403R-MF													-	9.525	4.0	0.3	4.0	1.2	-				E181 ~E186
	09M403L-MF													-	9.525	4.0	0.3	4.0	1.2	-				
	09M404R-MF													-	9.525	4.0	0.4	4.0	1.2	-				
	09M404L-MF													-	9.525	4.0	0.4	4.0	1.2	-				
	09M405R-MF					●	●			●	●	●		-	9.525	4.0	0.5	4.0	1.2	-				
	09M405L-MF													-	9.525	4.0	0.5	4.0	1.2	-				
	130508R-MF					●	●			●	●	●		-	13.5	5.56	0.8	5.56	2.2	-				E181 ~E186
	09M405R-MM					●	●			●	●	●		-	9.525	4.0	0.5	4.0	1.2	-				
	09M405L-MM													-	9.525	4.0	0.5	4.0	1.2	-				
	130508R-MM					●	●			●	●	●		-	13.5	5.56	0.8	5.56	2.2	-				
	130508L-MM					●	●			●	●	●		-	13.5	5.56	0.8	5.56	2.2	-				
130538-MM													-	13.5	5.56	3.8	5.56	2.2	-					

● : Stock item



Workpiece	Steel	P											Machining types				
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K																
Non-ferrous metal	N																
Heat resistant alloy, Titanium alloy	S																
Hardened steel	H																


















Inserts	Designation	Cermets		Coated						Uncoated			Dimensions (mm)						Geometries	Available tools			
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC130	A30	G10E	H01	l	d	t			r	d ₁	a
SECA 	1204AFSN			●	●											-	12.7	4.76	-	5.56	2.66		-
	1204AFTN		●			●		●								-	12.7	4.76	-	5.56	2.66		
	1204AFFN															-	12.7	4.76	-	5.56	2.66		
	1204AFEN															-	12.7	4.76	-	5.56	2.66		
	1504AFSN															-	15.875	4.76	-	5.5	2.8		
	1504AFTN															-	15.875	4.76	-	5.5	2.8		
	1504AFFN															-	15.875	4.76	-	5.5	2.8		
SECN 	1203AFFN												●	●	-	12.7	3.18	-	-	2.36	 <p>► Shape of Edge · S20 : STS · RH : Strengthened Edge, STS</p>	E36 E37	
	1203AFTN		●	●									●		-	12.7	3.18	-	-	2.36			
	1203AFEN														-	12.7	3.18	-	-	2.36			
	1203AFSN				●	●									-	12.7	3.18	-	-	2.36			
	1203AFEN-RH													●	●	-	12.7	3.18	-	-			2.36
	1203AFSN-RH															-	12.7	3.18	-	-			2.36
	1203AFTN-S20														●	-	12.7	3.18	-	-			2.36
	1504AFFN														●	-	15.875	4.76	-	-			2.4
	1504AFTN			●			●							●		-	15.875	4.76	-	-			2.4
	1504AFEN															-	15.875	4.76	-	-			2.4
	1504AFSN				●	●										-	15.875	4.76	-	-			2.4
	1504AFEN-RH															-	15.875	4.76	-	-			2.4
	1504AFSN-RH														●	-	15.875	4.76	-	-			2.4
	1504AFTN-S20															-	15.875	4.76	-	-			2.4
SEET-MA 	0903AGFN-MA													●	-	9.525	3.18	-	3.4	2.11		E175 ~E180	
	14M4AGFN-MA													●	-	14.0	4.0	-	4.4	2.64			
SEET-MF 	0903AGSN-MF			●											-	9.525	3.18	-	3.4	2.11		E175 ~E180	
	14M4AGSN-MF			●	●										-	14.0	4.0	-	4.4	2.64			
SEET-MM 	0903AGSN-MM			●											-	9.525	3.18	-	3.4	2.11		E175 ~E180	
	14M4AGSN-MM			●	●	●									-	14.0	4.0	-	4.4	2.64			
SEEW 	0903AGTN														-	9.525	3.18	-	3.4	2.11		E175 ~E180	
	14M4AGTN		●												-	14.0	4.0	-	4.4	2.64			
SEEW-W 	14M4AGFN-W														-	14.0	4.0	-	4.4	8.5		E175 E176 E178 E179 E180	
	14M4AGSN-W														-	14.0	4.0	-	4.4	8.5			
	14M4AGTN-W														-	14.0	4.0	-	4.4	8.5			
SEKN-SU 	1203AFSN-SU														-	12.7	3.18	-	1.98	-		E36 E37	
	1504AFSN-SU														-	15.875	4.76	-	2.04	-			
SEKR-MF1 	1203AFSN-MF1														-	12.7	3.18	-	2.3	-		E36 E37	

●: Stock item

E Milling Inserts

Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	●	Machining types		
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●























- Continuous cutting
- General cutting
- Interrupted cutting

Inserts	Designation	Cermets		Coated							Uncoated		Dimensions (mm)						Dimensions	Available tools		
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	PC130	G10E	H01	l	d	t			d ₁	a
SEKR-MX 	1203AFSN-MX	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	3.18	-	2.3	-		E36
	1204AFSN-MX	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	4.76	-	2.3	-		E37
	1504AFSN-MX	●	●	●	●	●	●	●	●	●	●	●	●	●	-	15.875	4.76	-	2.4	-		
SEKR-X35 	1203AFSN-X35	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	3.18	-	2.361	-		E36
	1203AFFN-X35	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	3.18	-	2.361	-		
	1204AFFN-X35	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	4.76	-	2.361	-		
SEMN 	1204AZ	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	4.76	-	2.0	-		E36
SEXT-MF 	0903AGSN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	9.525	3.18	3.4	2.11	-		E175 ~E180
	14M4AGSN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	14.0	4.0	4.4	2.64	-		
SEXT-MM 	0903AGSN-MM	●	●	●	●	●	●	●	●	●	●	●	●	●	-	9.525	3.18	3.4	2.11	-		E175 ~E180
	14M4AGSN-MM	●	●	●	●	●	●	●	●	●	●	●	●	●	-	14.0	4.0	4.4	2.64	-		
SEXT-MR 	0903AGSN-MR	●	●	●	●	●	●	●	●	●	●	●	●	●	-	9.525	3.18	3.4	2.11	-		E175 ~E180
	14M4AGSN-MR	●	●	●	●	●	●	●	●	●	●	●	●	●	-	14.0	4.0	4.4	2.64	-		
SFCN 	1203EFR	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	3.18	-	2.5	-		E38
SNC(M)F-MF 	SNCF 1206ANN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	6.6	-	2	-		E95
	1507ANN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	15.875	7.35	-	2.1	-		E96
	SNMF 1206ANN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	6.6	-	2	-		
	1507ANN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	15.875	7.35	-	2.1	-		
	SNCF 1206ENN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	6.6	-	1.8	-		E97
	1507ENN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	15.875	7.35	-	1.8	-		E98
SNMF 1206ENN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	12.7	6.6	-	1.8	-			
1507ENN-MF	●	●	●	●	●	●	●	●	●	●	●	●	●	-	15.875	7.35	-	1.8	-			

●: Stock item



Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	Machining types	
	Stainless steel	M											● Continuous cutting
Cast iron	K											● Interrupted cutting	
Non-ferrous metal	N												
Heat resistant alloy, Titanium alloy	S												
Hardened steel	H												























Inserts	Designation	Cermet		Coated						Uncoated			Dimensions (mm)						Dimensions	Available tools			
		CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	H01	l	d	t			r	d ₁	a
SNC(M)F-MF 	SNCF 1206QNN-MF					●									-	12.7	6.6	0.8	-	1	-		E99
	SNMF 1206QNN-MF					●									-	12.7	6.6	0.8	-	1	-		
SNC(M)F-MM 	SNCF 1206ANN-MM					●									-	12.7	6.6	-	-	2	-		E95 E96
	1507ANN-MM					●		●							-	15.875	7.35	-	-	2.1	-		
	SNMF 1206ANN-MM					●									-	12.7	6.6	-	-	2	-		
	1507ANN-MM					●									-	15.875	7.35	-	-	2.1	-		
SNC(M)F-MM 	SNCF 1206ENN-MM					●		●							-	12.7	6.6	-	-	1.8	-		E97 E98
	1507ENN-MM							●							-	15.875	7.35	-	-	1.8	-		
	SNMF 1206ENN-MM					●									-	12.7	6.6	-	-	1.8	-		
	1507ENN-MM					●									-	15.875	7.35	-	-	1.8	-		
SNC(M)F-MM 	SNCF 1206QNN-MM					●		●	●						-	12.7	6.6	0.8	-	1	-		E99
	SNMF 1206QNN-MM					●									-	12.7	6.6	0.8	-	1	-		
SNCN 	1204ENN			●								●	●		-	12.7	4.76	-	-	1.4	1.0		E39 E307 E308
	1504ENN											●			-	15.875	4.76	-	-	1.4	1.0		
SNEF 	435														-	12.7	4.76	2.0	-	-	-		E313
	535														-	15.875	4.76	2.0	-	-	-		
SNEU-MF 	120420-MF														-	12.7	4.76	2.0	5.7	(2.3)	-		E315
SNEU-MF 	1204ANN-MF														-	12.7	4.76	-	5.7	(2.0)	-		E315
SNEU-TBW 	1204-TBW														-	12.7	4.76	-	5.7	(2.1)	-		E315
SNEU-WMF 	1204R-WMF														-	12.7	4.76	-	5.7	-	-		E315
SNEX 	101010														-	10	10	1.0	4.6	-	-		E282
	1010ZNN														-	10	10	(1.0)	4.6	-	-		

●: Stock item

E Milling Inserts

Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	●	Machining types				
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●














● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermet		Coated						Uncoated			PCD			Dimensions (mm)						Geometries	Available tools	
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	G10E	H01	DP200	l	d	t	r	d ₁	a			b
 SNEX-CU1	101010-CU1														-	10	10	1.0	4.6	-	-			 E304
	1010ZNN-CU1														-	10	10	(1.0)	4.6	-	-			
	121212-CU1														-	12.7	12.7	1.2	5.6	-	-			
	1212ZNN-CU1														-	12.7	12.7	(1.2)	5.6	-	-			
 SNEX-MA	1206ANN-MA														-	12.7	6.35	-	4.5	2.36	-			 E85 ~E94
	1206ENN-MA					●							●		-	12.7	6.35	-	5.2	1.82	-			
	1206QNN-MA														-	12.7	6.35	-	5.2	1.39	-			
	120612-MA													●	-	12.7	6.35	1.2	5.2	-	-			
 SNEX-ML	1206ANN-ML														-	12.7	6.35	-	4.5	-	-			 E85 ~E94
	1206ENN-ML														-	12.7	6.35	-	4.5	2.36	-			
	1206QNN-ML														-	12.7	6.35	-	4.5	1.82	-			
	120612-ML														-	12.7	6.35	1.2	4.5	1.39	-			
	1507ANN-ML														-	15.875	7.94	-	5.6	3.16	-			
	1507ENN-ML														-	15.875	7.94	-	5.6	2.66	-			
 SNEW	09T3ADFR													●	9.525	9.525	3.97	-	4.4	-	-			 E109
 SNEW-NAF XAW: Wiper Insert	09T3ADTR-NAF													●	9.525	9.525	3.97	-	4.4	-	-			 E109
	09T3ADTR-NAW													●	9.525	9.525	3.97	-	4.4	-	-			
 SNEW-XAF NAW: Wiper Insert	09T3ADTR-XAF													●	9.525	9.525	3.97	-	4.4	-	-			 E109
	09T3ADTR-XAW													●	9.525	9.525	3.97	-	4.4	-	-			
 SNHT-WX	1102308R/L-WX														-	11	2.30	-	4	-	-			 E296 E297
	110308R/L-WX														-	11	3.00	-	4	-	-			
	120308R/L-WX														-	12.7	3.25	-	5	-	-			
	1203508R/L-WX														-	12.7	3.50	-	5	-	-			
	120408R/L-WX														-	12.7	4.00	-	5	-	-			
	1204508R/L-WX														-	12.7	4.54	-	5	-	-			
	120508R/L-WX														-	12.7	5.00	-	5	-	-			
	1205408R/L-WX														-	12.7	5.47	-	5	-	-			
	120608R/L-WX														-	12.7	6.00	-	5	-	-			
	1206508R/L-WX														-	12.7	6.50	-	5	-	-			
	120708R/L-WX														-	12.7	7.00	-	5	-	-			
1207508R/L-WX														-	12.7	7.5	-	5	-	-				
 SNKN	1204ENN														-	12.7	4.76	-	-	1.4	1.0			 E39 E307 E308
	1504ENN			●											-	15.875	4.76	-	-	1.4	1.0			
 SNM(E)X-MF	SNMX 1206ANN-MF					●	●			●	●	●			-	12.7	6.35	-	4.5	2.36	-			 E85 E86 E90
	1507ANN-MF					●	●			●	●	●			-	15.875	7.94	-	5.6	3.15	-			
	SNEX 1206ANN-MF					●	●			●	●	●			-	12.7	6.35	-	4.5	2.36	-			
	1507ANN-MF					●	●			●	●	●			-	15.875	7.94	-	5.6	3.15	-			
 SNM(E)X-MF	SNMX 1206ENN-MF					●				●	●	●			-	12.7	6.35	-	4.5	1.82	-			 E85 ~E88
	1507ENN-MF					●				●	●	●			-	15.875	7.94	-	5.6	2.66	-			
	SNEX 1206ENN-MF					●				●	●	●			-	12.7	6.35	-	4.5	1.82	-			
	1507ENN-MF					●				●	●	●			-	15.875	7.94	-	5.6	2.66	-			
 SNM(E)X-MF	SNMX 1206QNN-MF					●				●	●	●			-	12.7	6.35	-	5.2	2.36	-			 E93 E94
	120612-MF					●				●	●	●			-	12.7	6.35	1.2	5.2	-	-			
	SNEX 1206QNN-MF					●				●	●	●			-	12.7	6.35	-	5.2	2.36	-			
	120612-MF					●				●	●	●			-	12.7	6.35	1.2	5.2	-	-			

●: Stock item



Workpiece	Steel	P											Machining types								
	Stainless steel	M																			
	Cast iron	K																			
	Non-ferrous metal	N																			
	Heat resistant alloy, Titanium	S																			
Hardened steel	H																				
			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	● Continuous cutting ● General cutting ● Interrupted cutting
			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		

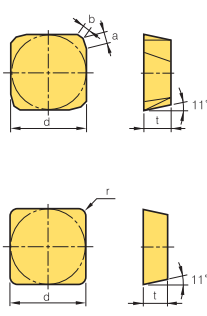
















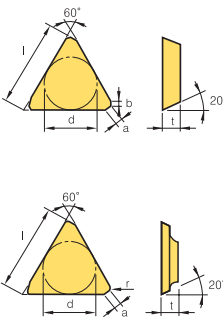


Inserts	Designation	Cermet		Coated							Uncoated			Dimensions (mm)					Geometries	Available tools					
		CN2000	CN30	NCM325	NCM335	NC5330	PC3500	PC3600	PC9530	PC6510	PC5300	PC5400	PC130	A30	G10E	H01	l	d			t	r	d ₁	a	b
	SNMX 1206ANN-MM			●	●	●	●	●	●	●	●				-	12.7	6.35	-	4.5	2.36	-				E85
	1507ANN-MM						●	●	●	●	●				-	15.875	7.94	-	5.6	3.15	-				~E88
	SNEX 1206ANN-MM			●			●	●	●	●	●				-	12.7	6.35	-	4.5	2.36	-				
	1507ANN-MM						●			●	●	●			-	15.875	7.94	-	5.6	3.15	-				
	SNMX 1206ENN-MM						●	●	●	●	●				-	12.7	6.35	-	5.2	1.82	-				E89
	1507ENN-MM						●	●	●	●	●				-	15.875	7.94	-	5.6	2.66	-				~E92
	SNEX 1206ENN-MM						●	●	●	●	●				-	12.7	6.35	-	5.2	1.82	-				
	1507ENN-MM						●			●	●	●			-	15.875	7.94	-	5.6	2.66	-				
	SNMX 1206QNN-MM						●		●	●	●				-	12.7	6.35	-	4.5	2.36	-				E93
	120612-MM						●		●						-	12.7	6.35	1.2	4.5	-	-				E94
	SNEX 1206QNN-MM						●		●	●	●				-	12.7	6.35	-	4.5	2.36	-				
	120612-MM								●						-	12.7	6.35	1.2	4.5	-	-				
	1206ANN-W						●			●	●				-	12.7	6.35	-	4.5	7.6	-			E85 E86	
	1203EDR		●	●	●							●	●	●	-	12.7	3.18	-	-	1.4	1.0				E40
	1203EDR-RH											●	●	●	-	12.7	3.18	-	-	1.4	1.0				E41
	1203EDL												●	●	●	-	12.7	3.18	-	-	1.4	1.0			
	1203EDR-G												●		●	-	12.7	3.18	-	-	1.4	1.0			
	1203EDR-RN	●													-	12.7	3.18	-	-	1.4	1.0				
	1203EDER-RH														-	12.7	3.18	-	-	1.63	0.8				
	1203EDSR-RH								●			●			-	12.7	3.18	-	-	1.63	0.8				
	1203EDTR-RH											●			-	12.7	3.18	-	-	1.63	0.8				
	1203EDR-S20											●			-	12.7	3.18	-	-	1.4	1.0				
	1204EDR														-	12.7	4.76	-	-	1.4	1.0				
	150412T														-	15.875	4.76	1.2	-	-	-				
	1504EDR		●	●									●	●	-	15.875	4.76	-	-	1.4	1.0				
	1504EDR-RH														-	15.875	4.76	-	-	1.4	1.0				
	1504EDSR								●						-	15.875	4.76	-	-	1.4	1.0				
	1504EDL												●		-	15.875	4.76	-	-	1.4	1.0				
	1504EDR-G													●	-	15.875	4.76	-	-	1.4	1.0				
1504EDR-RN	●													-	15.875	4.76	-	-	1.4	1.0					
1504EDER-RH														-	15.875	4.76	-	-	1.64	0.8					
1504EDSR-RH														-	15.875	4.76	-	-	1.64	0.8					
1504EDTR-RH								●						-	15.875	4.76	-	-	1.64	0.8					
1504EDR-S20											●			-	15.875	4.76	-	-	1.4	1.0					
	120416-WC													-	12.7	4.76	1.6	-	-	-				E314	
	150412-WC													-	15.875	4.76	1.2	-	-	-					
	150416-WC													-	15.875	4.76	1.6	-	-	-					
	150420-WC												●		-	15.875	4.76	2.0	-	-	-				
	190424-WC														-	19.05	4.76	2.4	-	-	-				
	1203EDR-1													-	12.7	3.18	-	-	10.2	-				E40	
	1203EDL-1													-	12.7	3.18	-	-	10.2	-				E41	
	1504EDR-1													-	15.875	4.76	-	-	10.2	-					
	1504EDL-1													-	15.875	4.76	-	-	10.2	-					

● : Stock item

E Milling Inserts

Workpiece	Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	Machining types			
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Cast iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Non-ferrous metal	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Heat resistant alloy, Titanium alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened steel	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting






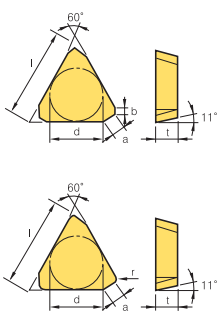





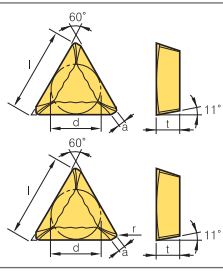
Inserts	Designation	Cermet		Coated								Uncoated			Dimensions (mm)						Geometries	Available tools				
		CN2000	CN80	NCM325	NCM335	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	PC130	A30	G10E	H01	l	d	t			r	d ₁	a	b
SPFN 	200-N																8.8	2.2	-	0.2	-	-	-			E293
	300-N																9.8	3.0	-	0.2	-	-	-			
	400-N																9.8	4.0	-	0.25	-	-	-			
SPKN-MU 	1203EDSR-MU									●							-	12.7	3.18	-	-	0.86	1.87		E40 E41	
	1504EDSR-MU									●							-	15.875	4.76	-	-	0.84	1.92			
SPKN-SU 	1203EDSR-SU									●	●			●	●		-	12.7	3.18	-	-	1.66	0.92		E40 E41	
	1203EDSL-SU									●				●			-	12.7	3.18	-	-	1.66	0.92			
	1504EDSR-SU									●	●			●	●		-	15.875	4.76	-	-	1.62	0.93			
	1504EDSL-SU									●				●			-	15.875	4.76	-	-	1.62	0.93			
SPKR-MX 	1203EDSR-MX			●	●	●											-	12.7	3.18	-	-	1.4	-		E40 E41	
	1203EDSL-MX			●													-	12.7	3.18	-	-	1.4	-			
	1504EDR-MX			●													-	15.875	4.76	-	-	1.45	-			
	1504EDSR-MX			●		●											-	15.875	4.76	-	-	1.45	-			
SPMN 	120308													●			-	12.7	3.18	0.8	-	-	-		E256	
SPMT 	060304			●													-	6.35	3.18	0.4	2.8	-	-		E228 E245 E246	
SPMT-KC 	110408-KC									●				●	●		-	11.5	4.8	0.8	4.5	-	-		E256	
SPMT-MM 	120408-MM									●	●			●			-	12.7	4.76	0.8	5.6	-	-		E153 E228 E245 E246	
	120508-MMN									●				●			-	12.7	5.56	0.8	5.6	-	-			
TEC(E)N 	TECN 22R													●			11.0	6.35	3.18	-	-	1.0	0.5		E46	
	22TR	●												●	●		11.0	6.35	3.18	0.8	-	0.5	-			
	32R														●		16.5	9.525	3.18	-	-	1.0	0.5			
	32R-G																16.5	9.525	3.18	-	-	1.0	0.5			
	32TR	●	●											●	●		16.5	9.525	3.18	0.8	-	0.5	-			
	32TR-S20														●		16.5	9.525	3.18	0.8	-	0.5	-			
	43R-G																22.0	12.7	4.76	-	-	2.0	0.5			
	43TR-Z																22.0	12.7	4.76	0.8	-	1.5	-			
43TR														●		22.0	12.7	4.76	0.8	-	1.5	-				
TEEN 32TR																16.5	9.525	3.18	0.8	-	0.5	-				
TEEN 	43R-Z																22.0	12.7	4.76	-	-	2.0	0.5		E46	
	43TR-Z																22.0	12.7	4.76	0.8	-	1.5	-			
	43TR-ZH																22.0	12.7	4.76	0.8	-	1.5	-			
	43R													●			22.0	12.7	4.76	-	-	2.0	0.5			
	43R-G														●		22.0	12.7	4.76	-	-	2.0	0.5			
	43TR	●	●	●	●									●			22.0	12.7	4.76	0.8	-	1.5	-			
43TR-S20																22.0	12.7	4.76	0.8	-	1.5	-				

▶ hape of Edge
 · G : Light side, Sharp edge
 · S20 : STS
 · ZH : Hole added

● : Stock item





















Workpiece	Steel	P											Machining types					
	Stainless steel	M															● Continuous cutting	⊖ General cutting
Cast iron	K																	
Non-ferrous metal	N																	
Heat resistant alloy, Titanium alloy	S																	
Hardened steel	H																	

Inserts	Designation	Cermet		Coated							Uncoated			Dimensions (mm)						Geometries	Available tools				
		CN2000	CN30	NCM325	NCM335	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	PC130	A30	G10E	H01	l	d			t	r	d ₁	a
TFCN 	2203PFR																22.0	12.7	3.18	-	-	2.42	0.71		E42
	2203PFL																22.0	12.7	3.18	-	-	2.42	0.71		
TNMX 	2710AZNR-NM			●	●	●			●	●							27	15.875	10	0.8	5.6	2.63	-		E52
	2710AZNL-NM																27	15.875	10	0.8	5.6	2.63	-		E53
TPCN 	1103PPN		●											●	●		11.0	6.35	3.18	-	-	0.7	0.7		E43
	1103PPTN																11.0	6.35	3.18	-	-	0.7	0.7		
	1603PDR			●													16.5	9.525	3.18	-	-	1.2	0.7		
	1603PPN		●	●						●					●		16.5	9.525	3.18	-	-	1.2	1.2		
	1603PPR		●	●										●	●		16.5	9.525	3.18	-	-	1.2	1.0		
	1603PPR-RH																16.5	9.525	3.18	-	-	1.2	1.0		
	1603PPR-G														●		16.5	9.525	3.18	-	-	1.2	1.0		
	1603PPSR				●												16.5	9.525	3.18	-	-	1.2	1.0		
	1603PPTN																16.5	9.525	3.18	-	-	1.2	1.2		
	1603PPTR																16.5	9.525	3.18	-	-	1.2	1.0		
	1603PPR-RH																16.5	9.525	3.18	-	-	1.2	1.0		
	1603PDER-RH						●				●						16.5	9.525	3.18	0.8	-	1.5	-		
	1603PDSR-RH																16.5	9.525	3.18	0.8	-	1.5	-		
	1603PDR-S20																16.5	9.525	3.18	-	-	1.2	0.7		
	1603PDR-RN																16.5	9.525	3.18	-	-	1.5	1.1		
	2204PDR		●	●											●	●		22.0	12.7	4.76	-	-	1.4		0.7
	2204PDR-RH																22.0	12.7	4.76	-	-	1.4	0.7		
	2204PDR-RN		●														22.0	12.7	4.76	-	-	1.42	0.52		
	2204PDR-G														●		22.0	12.7	4.76	-	-	1.4	0.7		
	2204PDL														●		22.0	12.7	4.76	-	-	1.4	0.7		
2204PDSR				●												22.0	12.7	4.76	-	-	1.4	0.7			
2204PDTR																22.0	12.7	4.76	-	-	1.4	0.7			
2204PPN																22.0	12.7	4.76	-	-	1.2	1.2			
2204PPTN																22.0	12.7	4.76	-	-	1.2	1.2			
2204PDR-RH																22.0	12.7	4.76	0.8	-	1.8	-			
2204PDER-RH																22.0	12.7	4.76	0.8	-	1.8	-			
2204PDSR-RH						●				●						22.0	12.7	4.76	0.8	-	1.8	-			
2204PDR-S20																22.0	12.7	4.76	-	-	1.4	0.7			
2204PDSR-MU																22.0	12.7	4.76	0.8	-	1.96	-			
TPKN-MU 																									E43
1603PDSL-SU																16.5	9.525	3.18	1.0	-	1.70	-			
TPKN-SU 	1603PDSR-SU															16.5	9.525	3.18	1.0	-	1.70	-		E43	
	2204PDSL-SU															22.0	12.7	4.76	1.0	-	1.91	-			
	2204PDSR-SU															22.0	12.7	4.76	1.0	-	1.91	-			
TPKR-MX 	1603PDSN-MX															16.5	9.525	3.18	-	-	1.2	1.2		E43	
	1603PDSR-MX															16.5	9.525	3.18	-	-	1.2	0.7			
	1603PPR-MX			●												16.5	9.525	3.18	-	-	1.2	1.0			
	1603PPSN-MX			●												16.5	9.525	3.18	-	-	1.2	1.2			
	1603PPSR-MX				●											16.5	9.525	3.18	-	-	1.2	1.0			
	2204PDR-MX															22.0	12.7	4.76	1.0	-	1.4	-			
	2204PDSR-MX															22.0	12.7	4.76	1.0	-	1.4	-			
2204PPR-MX															22.0	12.7	4.76	1.0	-	1.4	-				

●: Stock item * TPC(K)N □□□□P-N → For FC-HC
□□□□P-R → For Cutter(face)

Workpiece	Steel	P	●	●	●	●	●	●	●	●	Machining types					
	Stainless steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	K										●	●	●	●	●	●
Non-ferrous metal	N															
Heat resistant alloy, Titanium alloy	S										●	●	●	●	●	●
Hardened steel	H										●	●	●	●	●	●

● Continuous cutting
 ● General cutting
 ● Interrupted cutting

Inserts	Designation	Cermets		Coated						Uncoated			Dimensions (mm)								Geometries	Available tools	
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30	G10E	HD1	l	l ₂	l ₁	d	t			r
 XNKT-ML	060405PNER-ML					●				●	●			5.7	-	-	6.5	4.0	0.5	3.4	1.8		E66 ~E69
	080508PNER-ML					●				●	●			8.2	-	-	10.0	5.5	0.8	4.5	2.9		
 XNKT-MM	060405PNSR-MM					●				●	●			5.7	-	-	6.5	4.0	0.5	3.4	1.8		E66 ~E69
	080508PNSR-MM					●				●	●			8.2	-	-	10.0	5.5	0.8	4.5	2.9		
	080812PNSR-MM													8.2	-	-	10.0	5.5	1.2	4.5	2.9		
	080516PNSR-MM													8.2	-	-	10.0	5.5	1.6	4.5	2.9		
	080520PNSR-MM													8.2	-	-	10.0	5.5	2.0	4.5	2.9		
 XPMT-MM	0802ER-MM					●					●			8.5	-	-	5.9	2.38	0.8	-			E249 E250
	1003ER-MM					●					●			10.5	-	-	7.25	3.18	0.8	-			
	13T3ER-MM						●					●		13.1	-	-	9	3.97	0.8	-			
	1604ER-MM						●					●		16.5	-	-	11.5	4.76	0.8	-			
	1805ER-MM						●					●		18	-	-	12.4	5.56	0.8	-			
	2006ER-MM						●					●		20.5	-	-	14.1	6.35	0.8	-			
	2507ER-MM						●					●		25.5	-	-	17.6	7.94	0.8	-			
 ZDMT-R-MM	080310R-MM					●					●			8.4	-	-	6.73	3.2	10	2.8	-		E246
	110312.5R-MM					●					●			10.6	-	-	8.5	3.65	12.5	2.8	-		
	130416R-MM						●					●		13.2	-	-	10.5	4.76	16	4.4	-		
 ZPET-MM Internal	080M-MM													16	-	-	8.0	3.5	8	2.9	-		E244 E245
	090M-MM													17.7	-	-	7.2	4.3	9	3.4	-		
	100M-MM					●					●			19	-	-	10.4	4.5	10	3.4	-		
	110M-MM													22.2	-	-	11	4.8	11	4.5	-		
	125M-MM					●					●			24	-	-	12.9	5.3	12.5	4.5	-		
	130M-MM													25.7	-	-	13	5.3	13	4.5	-		
	140M-MM													27.2	-	-	14	6.3	14	5.6	-		
	150M-MM					●					●			28	-	-	15.4	7	15	5.6	-		
	160M-MM					●					●			28.5	-	-	16.4	7	16	5.6	-		
	200M-MM					●								38	-	-	20.7	8	20	6.6	-		
	250M-MM													48	-	-	25.9	9.5	25	8.6	-		
 ZPET-MM External	080S-MM													15	-	-	6.6	3.1	8	2.9	-		
	090S-MM													15.5	-	-	7.4	3.7	9	3.4	-		
	100S-MM					●					●			15.5	-	-	8.4	3.8	10	3.4	-		
	110S-MM													18.1	-	-	9	4.4	11	4.5	-		
	125S-MM					●					●			20.5	-	-	10.7	4.5	12.5	4.5	-		
	130S-MM													22.2	-	-	11	4.4	13	4.5	-		
	140S-MM													24.1	-	-	11	5.7	14	5.6	-		
	150S-MM					●					●			25	-	-	12.4	6.5	15	5.6	-		
	160S-MM					●					●			26	-	-	13.4	6.5	16	5.6	-		
	200S-MM					●								32	-	-	16.7	7	20	6.6	-		
250S-MM													40	-	-	20.7	8.5	25	8.6	-			
 ZPMT-MM	1504PPSR-MM					●		●		●				15.9	-	-	12.7	4.76	-	5.6	-		E153 E228
	1505PPSR-MMN													15.9	-	-	12.7	5.76	-	5.6	-		
 ZPMT-R-MM	160520R-MM					●					●			16.1	-	-	12.7	5.56	20	5.6	-		E246
	160525R-MM					●					●			16.9	-	-	12.7	5.56	25	5.6	-		
	160531.5R-MM					●					●			17.6	-	-	12.7	5.56	31.5	5.6	-		
 ZPMT-R-MR	160525R-MR													17.6	-	-	12.7	5.56	25	5.6	-		E246
























●: Stock item
















Type	Cutter	Designation	Shape	A.A	Diameter range	Features	Application					Page
							Facing	Shouldering	Slotting	Copying	Ramping, Helical	
Cutters for face milling	Mill-max	ADN(M) 4000/5000+		45°	Ø80~Ø315	Excellent cutting edge strength and chip flow	●					E34 E35
		AE(M) 4000/5000		45°	Ø80~Ø315	Low cutting load and good machinability	●					E36 E37
		EF(M) 4000	Al 	75°	Ø80~Ø315	High rake angle to prevents welding	●					E38
		EN(M) 4000		75°	Ø80~Ø315	Economical because double sided inserts applied	●					E39
		EPN(M) 4000/5000+		75°	Ø80~Ø315	Double posi rake angle and low cutting force	●					E40 E41
		PF(M) 4000	Al 	90°	Ø80~Ø315	High rake angle and good machinability	●	●	●			E42
		PPN(M) 4000		90°	Ø80~Ø315	Double posi rake angle and low cutting force	●	●	●			E43
	Turbo Mill	ADS 4000/5000		45°	Ø50~Ø63	Anti-vibration	●					E44 E45
		PES 2000/3000/ 4000		90°	Ø20~Ø63	High rake angle, Cutting efficiency	●	●	●			E46
	Double Mill	AFO(M)4000		45°	Ø80~Ø125	High rake angle low cutting force Economical (8 corners available)	●					E47 E48
		AFO(M)5000			Ø80~Ø315							
	Power Buster	PBAC(M)5000		45°	Ø80~Ø315	Double sided Insert High depth High Feed Roughing	●					E52
		PBZC(M)5000		80°	Ø80~Ø315		●					E53

Al Cutter for Aluminum













Type	Cutter	Designation	Shape	A.A	Diameter range	Features	Application					Page
							Facing	Shouldering	Slotting	Copying	Ramping, Helical	
Cutters for face milling	Aero Mill	APD(M) A Type, B Type	 	90°	Ø80~Ø315	Aluminum cutter body suitable for high speed machining, Both cemented carbides and PCD inserts are available, G2.5 balance possible	●					E105 E106
	Aero Mill Plus	APD(M)-PB 	  	90°	Ø80~Ø315	Prevent overload to the spindle bearings through weight reduction of the Al alloy body and enable high-speed processing.	●					E107 E108
	Aero Mill Mini	MAPDS 		90°	Ø40~Ø63	Available with small Machining center-Carbide, PCD insert	●					E109
		MAPD 		90°	Ø32~Ø40	Application-Balancing class G2.5	●					E109
	Rich Mill	RM8AC(M)4000  RMH8AC(M)4000		45°	Ø50~Ø400	8 corners available Double sided insert for steel, cast iron, stainless steel, aluminum	●					E85 E86 E87 E88
					Ø80~Ø400		●					
		RM8EC(M)4000  RMH8EC(M)4000		75°	Ø50~Ø400	8 corners available Double sided insert for steel, cast iron	●					E89 E90 E91 E92
					Ø80~Ø400		●					
		RM8QC(M)4000  RMH8QC(M)4000		88°	Ø63~Ø200	8 corners available Reduced cutting interruption at cast Iron	●					E93 E94
		RMT8A(M) 4000/5000		45°	Ø80~Ø315	Easy insert change and good machinability due to latch clamping system	●					E95 E96
		RMT8E(M) 4000/5000		75°	Ø80~Ø315		8 corners available	●				E97 E98
		RMT8Q(M)		88°	Ø80~Ø315	Excellent surface finish	●					E99
	RM16AC(M) 6000/8000		45°	Ø63~Ø400	16 corners available. Wiper inserts can be applied for good surface finish Strong insert and powerful clamping	●					E100 E101	
Cutters for molds	Rich Mill	RM3PC(M)3000 		90°	Ø40~Ø80	Perfect perpendicularity Strong clamping	●	●	●			E66 E67
		RM3PC(M)4000 			Ø40~Ø125							














 Cutter for Aluminum

Type	Cutter	Designation	Shape	A.A	Diameter range	Features	Application					Page
							Facing	Shouldering	Slotting	Copying	Ramping, Helical	
Cutters for molds	Rich Mill	RM4PC(M)3000		90°	Ø40~Ø100	4corners available. High rake angle insert reduces cutting force. Excellent insert rigidity.	●	●	●	●	●	E70 E71
		Ø50~Ø160										
		RM4ZCM3000 <i>New</i>		90°	Ø40~Ø52	In vertical machining, the maximum cutting depth for RM4Z3000: 9.00mm, RM4Z4000: 14.0mm	●	●	●	●	●	E83
		Ø63~Ø100										
	Alpha Mill	AMC(M) 1000S/1500S/2000S		90°	Ø32~Ø100	3 dimensional shape and high rake angle lowers cutting load and ensures better chip evacuation.	●	●	●	●	●	E116 ~E118
		AMC(M) 3000S/3000S-K /4000S		90°	Ø40~Ø200							
		AMC(M) 1000SE 2000SE 3000SE		75°	Ø40~Ø100	Wide size range of inserts enlarges application range.	●					E122 E123
		AMC(M) 2000M 3000M 4000M		90°	Ø50~Ø125	Various types of Alpha Mills available for high depth of cut and high feed machining.	●	●	●	●	●	E124 E125 E126
	Future Mill	FMAC(M)3000		45°	Ø50~Ø125	Accurate inserts and cutter, Excellent chip flow	●					E175 E176
		Ø50~Ø200										
		FMAC(M)3000A		45°	Ø63~Ø125	Excellent in high speed cutting and tapping center, low power machine due to light aluminum body	●					E177 E178
		Ø63~Ø315										
	FMPC(M)3000		90°	Ø50~Ø100	4 corners available various inserts can be applied to machine for different types of workpiece	●	●	●			E181 E182	
	Ø63~Ø125											
	FMPC(M)3000A		90°	Ø63~Ø100	Excellent in high speed cutting and tapping center, low power machine due to light aluminum body	●	●	●			E183 E184	
	Ø63~Ø315											
	FMRC(M)3000		-	Ø40~Ø100	4~8 corners available	●					E187 E188	
	Ø50~Ø125											
	FMRC(M)4000		-	Ø50~Ø125	Double contact faces between insert & seat part of cutter for stable clamping	●					E189 E190	
	Ø63~Ø160											
FMRC(M)5000		-	Ø50~Ø125	Excellent rotating-free machining	●					E189 E190		
Ø63~Ø160												
































Type	Cutter	Designation	Shape	A.A	Diameter range	Features	Application					Page	
							Facing	Shouldering	Slotting	Copying	Ramping, Helical		
Cutters for molds	Future Mill P-positive	FMRC(M) 3000 4000 5000 6000		-	Ø40~Ø250	Stable clamping system enables stable machining and productivity. Varied product line-up ensures wide application range. Optimal shape and grade with high hardness for hard-to-cut material machining.	●				●	E199 ~E202	
		HRM	HRMC(M)13		15°	Ø50~Ø80	Powerful clamping by double clamping system 3 corners available high feed cutting with low cutting load	●	●	●	●	●	E223
			HRMC(M)15			Ø63~Ø160							
	HRMD	HRMDC(M)09		14°	Ø40~Ø100	Double side insert with 6 corner High feed cutting with strong simple screw-on clamp	●	●	●	●	●	E213 ~E215	
		HRMDC(M)13			Ø50~Ø125								
		HRMDC(M)16			Ø80~Ø315								
	BT/HSK Tooling System	BT30/40/50		90°	Ø10~Ø50	BT/HSK one solid type has been accepted to increase the precision Inner coolant system can also make it possible to evacuate the chip effectively High feed and high depth	●	●	●	●	●	E144 ~E146	
							HSK63	E147 ~E149					
		BT30/40/50		90°	Ø16~Ø100		●	●	●			E150 ~E152	
							HSK63/100	E154 ~E157					
		BT30/40/50-MAT		90°	Ø12~Ø40	Alpha Mill, Rich Mill, FMR, Laser Mill, HRM(D), Pro-A, Pro-X Modular head M06~M16 applicable	●	●	●	●	●	E158	
							HSK63/100-MAT	E159					
BT50 HAT4000			90°	Ø50~Ø80	Head only replacement possible and higher efficiency by self assembly head	●	●	●			E153		
Cutters for aluminum	Pro-A Mill	PAC(M) 2000/4000		90°	Ø40~Ø100	Buffed insert controls chip flow without built-up edge	●	●	●	●	●	E269	
	Pro-X Mill	PAXC(M)5000		90°	Ø40~Ø125	Powerful clamping Excellent body rigidity for rectangular and curve machining	●	●	●	●	●	E272 E273	
		PAXC(M)6000			Ø50~Ø125								
	Pro-L Mill	PALC(M)		90°	Ø63	High helix and high depth of cut High perpendicularity Low cutting load	●	●	●	●	●	E277	

 AI Cutter for Aluminum




Type	Cutter	Designation	Shape	A.A	Diameter range	Features	Application					Page
							Facing	Shouldering	Slotting	Copying	Ramping, Helical	
High feed cutter for cast iron	High feed cutter	ANH 4000/5000		45°	Ø100~Ø450	Excellent cutting strength Good chip flow	●					E307 E308
		CDH 4000/5000		65°	Ø100~Ø450	Double positive rake angle Minimized cutting load	●					E309 E310
		DEH 5000		60°	Ø100~Ø450	For aluminum & aluminum alloy. Hexagonal insert available.	●					E311
		DPH 5000		60°	Ø100~Ø450	Hexagonal insert available Economical cutter	●					E312
		PNH 4000/5000		90°	Ø125~Ø450	Wiper insert available Double negative rake angle Excellent surface finish	●					E313
		PPH 4000		90°	Ø125~Ø450	Square insert and wiper insert available Excellent surface finish	●					E314
	Shave Mill	SVM(M)4000		90°	Ø80~Ø315	Exclusive adjusting device of cutting edge adjusts run-out easily.	●					E315
	Shave Mill Ultra	SVUM6000		90°	Ø80~Ø315	Good rigidity and economical due to Screw on Simple type	●					E316
		SVUM6000-B		90°	Ø80~Ø315	Easy to handle the run-out due to Korloy exclusive high toughness cutting edge special parts	●					E317
	Indexable side cutter	Tangential type	Full-side cutter	TAFCP		-	Ø100~Ø315	Various cutting depth can be possible because of adjustable length control. Medium to Roughing based on strengthened edge		●	●	
TAFCB					-	Ø100~Ø315	●		●	●		E285
Half-side cutter		TAHCP		-	Ø100~Ø315				●	●		E286
		TAHCB		-	Ø100~Ø315	●	●		●		E286	





















Type	Cutter	Designation	Shape	A.A	Diameter range	Features	Application					Page
							Facing	Shouldering	Slotting	Copying	Ramping, Helical	
Indexable side cutter	Radial type Full-side cutter	RAFCP		-	Ø100~Ø315	Wide range of machining width with only one side cutter due to adjustable cutting edge height		●	●			E287
		RAFCB		-	Ø100~Ø315		●	●	●		E287	
	Half-side cutter	RAHCP		-	Ø100~Ø315	Suitable for medium and finishing in narrow width side cutting due to good chip evacuation by 3-dimensional chip breaker		●	●			E288
		RAHCB		-	Ø100~Ø315		●	●	●		E288	
Side cutter	Full-side cutter	FC		-	Ø80~Ø315	Good chip evacuation with low cutting load Effective cutting		●	●			E289
	Half-side cutter	HC		-	Ø80~Ø315	Good chip evacuation with low cutting load Effective cutting		●	●			E290
	-	SPP(M)		-	Ø80~Ø200	Economical by using pentagonal insert Suitable for narrow & deep grooving			●			E291
		SPB(M)		-	Ø80~Ø200	Economical by using pentagonal insert Suitable for narrow & deep grooving			●			E292
		SPS		-	Ø50~Ø200	For narrow and deep width grooving			●			E293
	Full-side cutter	RM4PFCB		-	Ø80~Ø160	4 corner usage with double-sided insert can be economical			●			E72 E73
		RM4PFCP		-	Ø80~Ø160				●			E76 E77
	Half-side cutter	RM4PHCB		-	Ø80~Ø160	4 corner usage with double-sided insert can be economical			●			E74 E75
		RM4PHCP		-	Ø80~Ø160				●			E78 E79
	Wind Mill	WFSB(M) 		-	Ø80~Ø250	The nose R shape of insert ensures long tool life. Wide applications with various widths and corner R sizes.	●	●	●			E296
		WFSP(M) 		-	Ø80~Ø250				●	●		

Type	Cutter	Designation	Shape	A.A	Diameter range	Features	Application					Page	
							Facing	Shouldering	Slotting	Copying	Ramping, Helical		
Cutters for face milling	Turbo Mill	ADS 4000/5000		45°	Ø50~Ø63	Uneven insert spacing prevents chattering	●					E44 E45	
		PES 2000/3000/4000		90°	Ø20~Ø63	Good machinability due to the high rake angle	●	●	●			E46	
Cutters for molds	Rich Mill	RM3PS3000 <i>New</i>		90°	Ø20~Ø40	Perfect perpendicularity Strong clamping	●	●	●	●	●	E68 E69	
		RM3PS4000 <i>New</i>			Ø32~Ø63								
		RM4PS3000		90°	Ø14~Ø50	4 corners available High rake angle insert reduces cutting force Excellent insert rigidity	●	●	●	●	●	●	E80 E81
		RM4PS4000			Ø32~Ø63								
		RM4ZS3000 <i>New</i>		90°	Ø25~Ø40	In vertical machining, the maximum cutting width : 9.0mm	●	●	●		●	E84	
	Alpha Mill	AMS 1000S/1500S 2000S/3000S 3000S-K/4000S		90°	Ø10~Ø63	The combination of a 3 dimensional curve design & high rake angle helps chip-evacuation effectively with a low cutting force Inner coolant system The various range of inserts can provide the widened choice High depth and high feed can be available during operation	●	●	●	●	●	E127 ~E134	
		AMS 1000SE/2000SE 3000SE		75°	Ø25~Ø63		●					E135 E136	
		AMS 1000M/1500M 2000M/4000M		90°	Ø16~Ø50		●	●	●	●	●	E137 E138	
		AMS 1000MH/1500MH 2000MH/3000MH		90°	Ø14~Ø40		●	●	●	●	●	E139	
	Future Mill	FMAS3000		45°	Ø25~Ø63	For precision machining Excellent chip evacuation	●					E179 E180	
		FMAS4000			Ø50~Ø63								
		FMPS3000		90°	Ø25~Ø63	4 corners available Strong cutting edge with low cutting load	●					E185 E186	
FMPS4000		Ø40~Ø63											
FMRS 1000/1500/2000 2500/3000/4000 5000/6000			-	Ø8~Ø63	2 touch clamping system, convenient insert change	●	●	●	●	●	E191 ~196		







Type	Cutter	Designation	Shape	A.A	Diameter range	Features	Application					Page
							Facing	Shouldering	Slotting	Copying	Ramping, Helical	
Cutters for molds	Future Mill P-positive	FMRS <i>New</i> 2500/3000 4000/5000 6000		-	Ø17~Ø50	P-positive relief angle ensures high rigidity and high machinability in die steel and high-resistant alloy machining. Flat clearance face of insert prevents interference and revolution while machining. Optimal grades and chip breakers for various workpieces	●	●	●	●	●	E203 ~E206
	HRM	HRMS 08/10/13/15		15°	Ø20~Ø63	Powerful clamping by double clamping system 3 corners available High feed cutting with low cutting load	●	●	●	●	●	E224 E225 E226
	HRMD	HRMDS 06 <i>New</i> 09/13		14°	Ø16~Ø63	6 corners available, High feed, multi-function, Only one screw can show comfortable application	●	●	●	●	●	E216 ~E220
	Tank Mill	THE		90°	Ø25~Ø50	Right-hand helix angle employed for good chip evacuation. Special surface treatment prevents body breaking and improves rigidity. Strong cutting edge	●	●				E228
	Laser Mill	LBE□□ LRE□□		-	Ø8~Ø32	Indexable ball endmill for precise mold. Rigid holder with simple design finishing MQL is available	●	●	●	●		E239 ~E242
		LBE□□-C LRE□□-C		-	Ø8~Ø32	Indexable ball endmill for precise mold. Rigid holder with simple design finishing MQL is available Carbide shank	●	●	●			E239 E241
	Mach Mill	BFE		-	Ø16~Ø32	Upgraded cutting performance with S type curve design V clamping application	●	●	●	●		E243
		GBE		-	Ø16~Ø50	Helical design of edge can reduce the force during operation. Safe application to prevent rotation guarantee the increased tool life	●	●	●	●		E244
		BRE		-	Ø20~Ø63	Flute type chip-pocket can make chip-evacuation Customized edge design can prevent the breakage of holder's body	●	●	●	●		E246
	HAVE	Multi Edge <i>New</i>		90°	Ø16~Ø50	Tools for Z axis feed plunge machining to cut faster and more effectively in vertical machining Machining with whole diameter	●	●	●		●	E249
		Single Edge <i>New</i>										
	O-Ring Cutter	ORC <i>New</i>		90°	Ø11~Ø46	For grooving the seat of an O-Ring in a plastic mold Superior surface roughness and cutting performance compared to HSS and brazed tool	-	-	-	-	-	E252

Type	Cutter	Designation	Shape	A.A	Diameter range	Features	Application					Page	
							Facing	Shouldering	Slotting	Copying	Ramping, Helical		
Cutters for molds	Chamfer tool			75°	Ø25~Ø30	For Back & Front high quality chamfering and various Chamfering angle machining	●					E256	
				60°	Ø25~Ø35								
				45°	Ø7~Ø39								
				30°	Ø25~Ø42								
		CE		30°	Ø5~Ø35	Various chamfer Degrees available Effective long chamfer cutting available	●	●	●				E257
				45°	Ø5~Ø48								
				60°	Ø5~Ø57								
		CCT 		30°	Ø3~Ø16	Centering, Countersinking, Chamfering							E260
				45°									
				60°									
		CET 		30°	Ø4~Ø16	Countersinking, Chamfering, Shouldering	●	●	●				E259
				45°									
60°													
T-Cutter	TFE		90°	Ø21~Ø50	For slotting	●	●	●	●	●	E261		
Cutters for aluminum	Pro-A Mill	PAS 4000	 	90°	Ø12~Ø42 Ø32~Ø40	Polished face increases chip flow and reduces built-up edge	●	●	●	●	●	E278	
	Pro-X Mill	PAXS 5000/6000	 	90°	Ø20~Ø40 Ø25~Ø40	Square shoulder and conter machining	●	●	●	●	●	E279	
	Pro-L Mill	PALS-HR 	 	90°	Ø32~Ø63	High helix and high depth of cut High perpendicularity Low cutting load	●	●	●	●	●	E270	
		PALS-HM 	 		Ø63								E274 E275
	Thread milling	-	TM		-	Ø32~Ø50	For internal and external threading	●					D49



<p>FMRM type  E197, 198, 207</p>			<p>Steel Shank type  E281</p>
<p>LBE-MHD type  E241</p>			<p>Carbide Shank type  E282</p>
<p>PAM type  E271</p>			<p>BT Arbors type  E144</p>
<p>PAXM type  E276</p>			<p>HSK Arbors type  E159</p>
<p>AMM type  E140, 141, 142</p>			
<p>RM4PM type  E82</p>			
<p>RM4ZM type  E84</p>			
<p>HRMM type  E227</p>			
<p>HRMDM type  E221, 222</p>			
<p>GBEM type  E245</p>			

ADN(M)4000

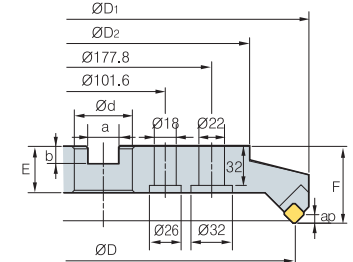


(mm)

Designation	Stock		Symbol	ØD	ØD1	ØD2	Ød	a	b	E	F	ap	kg	Fig.	
	R	L													
ADN 4080R/L	● (●)	(●)		4	80	105	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	6	1.9	1
(ADNM) 4100R/L	● (●)			5	100	125	67	31.75(32)	12.7(14.4)	8(8)	32(28)	50	6	2.5	2
4125R/L	● (●)			6	125	149	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	6	4.3	2
4160R/L	● (●)			8	160	183	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	6	6.4	2
4200R/L	●			10	200	223	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	6	8.7	3
4250R/L	●			12	250	273	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	6	14.0	3
4315R/L	●			14	315	338	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	6	21.0	4

() Metric Size, ● Stock item

Available Inserts



Designation	Cermet		Coated						Uncoated			page		
	CN2000	CN30	NCM325	NCM335	PC130	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400		A30	G10E
SDCN 42M													●	
42M-G														●
42MT	●	●	●	●								●		
42MT-RH														
42MT-S20								●						
1203AEEN														
1203AEEN-RH														
1203AESN														
1203AESN-RH														
SDKN 1203AESN-MU								●						
1203AESN-SU								●	●		●	●		
SDKR 1203AESN-MX														
1203AETN-MX														
1203AEN-MX				●										


Available Arbors

Designation	General Arbor	NC Arbors	
		ADN	ADNM
ADN(M) 4080R/L	NT*□□ (MU)-FMA25.4-25	BT**□□-FMA25.4 -□□	FMC27
4100R/L	NT*□□ (MU)-FMA31.75 -□□	BT**□□-FMA31.75 -□□	FMC32
4125R/L	NT*□□ (MU)-FMA38.1 -□□	BT**□□-FMA38.1 -□□	FMB40
4160R/L	NT*□□ (MU)-FMA50.8 -□□	BT**□□-FMA50.8 -□□	FMB40
4200R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□-FMA47.625 -□□	FMB60
4250R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□-FMA47.625 -□□	FMB60
4315R/L	KCP-8*** (Center Ring plug)		

*□□-NT Number **□□-BT Number ***Over Milling 5

Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3600 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

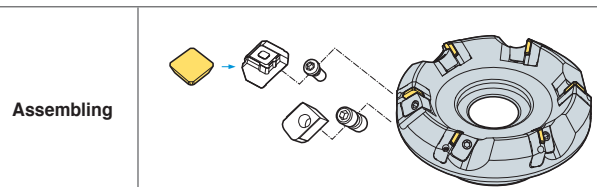

Parts





Specification	Locator	Wedge	Wedge Screw	Locator Screw	Wrench
Ø80~Ø315	LADN4R/L	WEPN4R/L	DHA0821F	LTX0514	HW40

Available Inserts E13, E14

Available Arbors and bolt E318 ~ E320



ADN(M)5000+




• AR : 15°
• RR : -4°

(mm)

Designation	Stock		ØD	ØD1	ØD2	Ød	a	b	E	F	ap	kg	Fig	
	R	L												
ADN 5080R/L*	●		4	80	107	65	25.4(27)	9.5(12.4)	6(7)	25(22)	63	8	2.4	1
(ADNM) 5100R/L*	●		5	100	126	75	31.75(32)	12.7(14.4)	8(8)	32(28)	63	8	3.0	2
5125R/L*	●		6	125	150	100	38.1(40)	15.9(16.4)	10(9)	38(30)	63	8	4.7	2
5160R/L*	●		8	160	185	120	50.8(40)	19.0(16.4)	11(9)	38(30)	63	8	6.5	2
5200R/L*	●		10	200	225	140	47.625(60)	25.4(25.7)	14(14)	38(38)	63	8	8.7	3
5250R/L*	●		12	250	275	220	47.625(60)	25.4(25.7)	14(14)	38(38)	63	8	15.5	3
5315R/L*	●		14	315	340	280	47.625(60)	25.4(25.7)	14(14)	38(38)	63	8	23.7	4

() Metric Size, ● Stock item

Available Inserts



Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC130	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SDCN 53M															
53M-G															
53MT	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
53MT-RH															
53MT-S20															
1504AEEN															
1504AEEN-RH															
1504AESN															
1504AESN-RH															
SDKN 1504AESN-MU															
1504AESN-SU															
SDKR 1504AESN-MX															
1504AETN-MX															
1504AEN-MX															

Available Arbors


Designation	General Arbor	NC Arbors	
		ADN	ADNM
ADN(M) 5080R/L	NT*□□ (MU)-FMA25.4-25	BT**□□-FMA25.4-□□	FMC27
5100R/L	NT*□□ (MU)-FMA31.75-□□	BT**□□-FMA31.75-□□	FMC32
5125R/L	NT*□□ (MU)-FMA38.1-□□	BT**□□-FMA38.1-□□	FMB40
5160R/L	NT*□□ (MU)-FMA50.8-□□	BT**□□-FMA50.8-□□	FMB40
5200R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□-FMA47.625-□□	FMB60
5250R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□-FMA47.625-□□	FMB60
5315R/L	KCP-8*** (Center Ring plug)		

*□□-NT Number **□□-BT Number ***Over Milling 5

Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3600 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Assembling







Parts

Specification	Locator	Wedge	Wedge Screw	Locator Screw	Wrench
Ø80~Ø315	LADN5R/L	WHP5R/L	WHX0817	LTX0514	HW40

Available Inserts E13, E14

Available Arbors and bolt E318 ~ E320

AE(M)4000




(mm)

Designation	Stock		Z	ØD	ØD1	ØD2	Ød	a	b	E	F	ap	kg	Fig.
	R	L												
AE 4080R/L			4	80	103	60	25.4(27)	9.5(12.4)	6(7)	25(22)	50	5.5	1.7	1
(AEM) 4100R/L	●		5	100	122	80	31.75(32)	12.7(14.4)	8(8)	32(28)	50	5.5	2.9	2
4125R/L	● (●)		6	125	146	100	38.1(40)	15.9(16.4)	10(9)	38(30)	63	5.5	4.4	2
4160R/L	●		8	160	181	120	50.8(40)	19.0(16.4)	11(9)	38(30)	63	5.5	6.1	2
4200R/L	(●)		10	200	220	130	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	5.5	8.9	3
4250R/L	(●)		12	250	270	180	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	5.5	15.7	3
4315R/L	(●)		15	315	335	240	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	5.5	25.1	4

() Metric Size, ● Stock item

Available Inserts

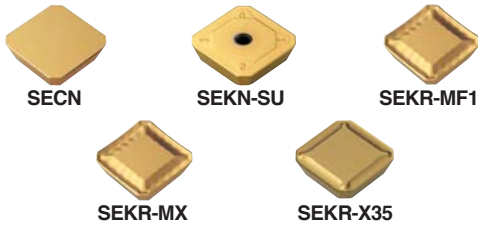

Designation	Cermet		Coated						Uncoated			page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC130		A30	G10E
SECN 1203AFFN														
1203AFTN	●	●										●	●	●
1203AFEN														
1203AFSN			●	●										
1203AFEN-RH									●	●				
1203AFSN-RH														
1203AFTN-S20														
SEKN 1203AFSN-SU					●	●								
SEKR 1203AFSN-MF1														
1203AFSN-MX	●	●	●					●		●				
1203AFSN-X35														
1203AFFN-X35														

Available Arbors


Designation	General Arbor	NC Arbors	
		ADN	ADNM
AE(M) 4080R/L	NT*□□ (M/U)-FMA25.4-25	BT**□□ -FMA25.4 -□□	FMC27
4100R/L	NT*□□ (M/U)-FMA31.75 -□□	BT**□□ -FMA31.75 -□□	FMC32
4125R/L	NT*□□ (M/U)-FMA38.1 -□□	BT**□□ -FMA38.1 -□□	FMB40
4160R/L	NT*□□ (M/U)-FMA50.8 -□□	BT**□□ -FMA50.8 -□□	FMB40
4200R/L	NT*□□ (M/U)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4250R/L	NT*□□ (M/U)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4315R/L	KCP-8*** (Center Ring plug)		

*□□ -NT Number **□□ -BT Number ***Over Milling 5

Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3600 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Assembling



Parts

Specification	Locator	Wedge	Wedge Screw	Locator Screw	Wrench
Ø80~Ø315	LAE4R/L	WAE4R/L	DHA0821F	LTX0512	HW40

Available Inserts E15, E16

Available Arbors and bolt E318 ~ E320



AE(M)5000





Fig. 1




Fig. 2




Fig. 3




Fig. 4



AA
45°

• AR : 20°
• RR : -3°

(mm)

Designation	Stock		ØD	ØD1	ØD2	Ød	a	b	E	F	ap	kg	Fig.	
	R	L												
AE			4	80	103	60	25.4(27)	9.5(12.4)	6(7)	25(22)	50	7.5	1.7	1
(AEM)			5	100	122	80	31.75(32)	12.7(14.4)	8(8)	32(28)	50	7.5	2.9	2
	●		6	125	146	100	38.1(40)	15.9(16.4)	10(9)	38(30)	63	7.5	4.4	2
	●		8	160	181	120	50.8(40)	19.0(16.4)	11(9)	38(30)	63	7.5	6.1	2
	●		10	200	220	130	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	7.5	8.9	3
			12	250	270	180	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	7.5	15.7	3
			15	315	335	240	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	7.5	25.1	4

() Metric Size, ● Stock item

▶ Available Inserts



SECN



SEKN-SU



SEKR-MX

Designation	Cermet		Coated							Uncoated		page	
	CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC130	A30		G10E
SECN 1504AFFN													
1504AFTN	●												
1504AFEN													
1504AFSN			●	●									
1504AFEN-RH													
1504AFSN-RH													
1504AFTN-S20													
SEKN 1504AFSN-SU					●	●							
1504AFSN-MX			●	●		●							

▶ Available Arbors


Designation	General Arbor	NC Arbors	
		AE	AEM
AE(M) 5080R/L	NT*□□(MU)-FMA25.4-25	BT**□□-FMA25.4-□□	FMC27
5100R/L	NT*□□(MU)-FMA31.75-□□	BT**□□-FMA31.75-□□	FMC32
5125R/L	NT*□□(MU)-FMA38.1-□□	BT**□□-FMA38.1-□□	FMB40
5160R/L	NT*□□(MU)-FMA50.8-□□	BT**□□-FMA50.8-□□	FMB40
5200R/L	NT*□□(MU)-FMA47.625-25, KCP-8***	BT**□□-FMA47.625-□□	FMB60
5250R/L	NT*□□(MU)-FMA47.625-25, KCP-8***	BT**□□-FMA47.625-□□	FMB60
5315R/L	KCP-8*** (Center Ring plug)		

*□□-NT Number **□□-BT Number ***Over Milling 5

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320 161 ~ 270 80 ~ 140	0.05 ~ 0.20 0.05 ~ 0.20 0.05 ~ 0.20	NCM325 PC3600 A30
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230 50 ~ 90	0.05 ~ 0.30 0.05 ~ 0.30	PC6510 G10E

Assembling





▶ Parts

Specification					
Ø80~Ø315	LAE5R/L	WAE5R/L	DHA0821F	LTX0512	HW40

▶ Available Inserts E15

▶ Available Arbors and bolt E318 ~ E320

EF(M)4000

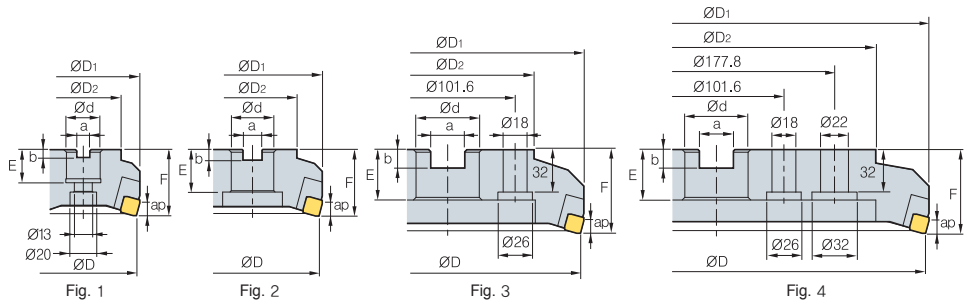


(mm)

Designation	Stock		⊙	ØD	ØD ₁	ØD ₂	Ød	a	b	E	F	ap	kg	Fig.	
	R	L													
EF	4080R/L	●		4	80	89	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	8.0	1.5	1
(EFM)	4100R/L	●		5	100	108	70	31.75(32)	12.7(14.4)	8(8)	32(28)	50	8.0	2.1	2
	4125R/L	●		6	125	133	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	8.0	3.8	2
	4160R/L			8	160	168	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	8.0	5.5	2
	4200R/L			10	200	208	130	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	8.0	8.2	3
	4250R/L			12	250	257	180	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	8.0	13.4	3
	4315R/L			16	315	322	240	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	8.0	21.2	4

() Metric Size, ● Stock item

▶ Available Inserts



SFCN

Designation	Cermet		Coated					Uncoated			page			
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300		PC5400	A30	G10E
SFCN 1203EFR												●	●	E16

▶ Available Arbors


Designation	General Arbor	NC Arbors	
		EF	EFM
EF (M) 4080R/L	NT*□□ (MU)-FMA25.4-25 -□□	BT**□□ -FMA25.4 -□□	FMC27
4100R/L	NT*□□ (MU)-FMA31.75 -□□	BT**□□ -FMA31.75 -□□	FMC32
4125R/L	NT*□□ (MU)-FMA38.1 -□□	BT**□□ -FMA38.1 -□□	FMB40
4160R/L	NT*□□ (MU)-FMA50.8 -□□	BT**□□ -FMA50.8 -□□	FMB40
4200R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4250R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4315R/L	KCP-8*** (Center Ring plug)		

*□□ -NT Number **□□ -BT Number ***Over Milling 5

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
K	75 ~ 125	0.05 ~ 0.30	H01

Assembling



▶ Parts

Specification	Locator	Wedge	Wedge Screw	Locator Screw	Wrench
Ø80~Ø315	LEF4R/L LEF4R1*/L1*	WEFR/L	DHA0821F	LTX0512	HW40


* : Ø80~Ø125

▶ Available Inserts E16

▶ Available Arbors and bolt E318 ~ E320



EN(M)4000

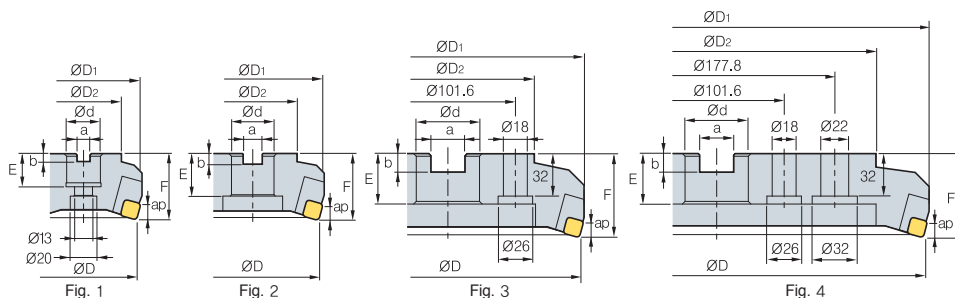

(mm)

Designation	Stock		⊘	ØD	ØD1	ØD2	Ød	a	b	E	F	ap	kg	Fig
	R	L												
EN 4080R/L	●		5	80	87	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	8.5	1.4	1
(ENM) 4100R/L	●		6	100	107	67	31.75(32)	12.7(14.4)	8(8)	32(28)	50	8.5	2.1	2
4125R/L	●		8	125	132	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	8.5	3.8	2
4160R/L			10	160	167	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	8.5	5.7	2
4200R/L			12	200	207	130	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	8.5	8.4	3
4250R/L			16	250	257	180	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	8.5	13.8	3
4315R/L			20	315	322	240	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	8.5	21.6	4

() Metric Size, ● Stock item

▶ Available Inserts



SNCN



SNKN

Designation	Cermet		Coated						Uncoated		page				
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300		PC5400	A30	G10E	H01
SFCN 1204ENN															E16
SNKN 1204ENN			●												E18

▶ Available Arbors


Designation	General Arbor	NC Arbors	
		EN	ENM
EN(M) 4080R/L	NT*□□ (M/U)-FMA25.4-25 -□□	BT**□□ -FMA25.4 -□□	FMC27
4100R/L	NT*□□ (M/U)-FMA31.75 -□□	BT**□□ -FMA31.75 -□□	FMC32
4125R/L	NT*□□ (M/U)-FMA38.1 -□□	BT**□□ -FMA38.1 -□□	FMB40
4160R/L	NT*□□ (M/U)-FMA50.8 -□□	BT**□□ -FMA50.8 -□□	FMB40
4200R/L	NT*□□ (M/U)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4250R/L	NT*□□ (M/U)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4315R/L	KCP-8*** (Center Ring plug)		

*□□ -NT Number **□□ -BT Number ***Over Milling 5

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3600 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Assembling



▶ Parts

Specification					
Ø80~Ø315	Locator LEN4R/L	Wedge WENR/L WENR1*/L1*	Wedge Screw DHA0830 DHA0825*	Locator Screw LTX0512	Wrench HW40


▶ Available Inserts E16, E18

▶ Available Arbors and bolt E318 ~ E320

* : Ø80~Ø100



EPN(M)4000

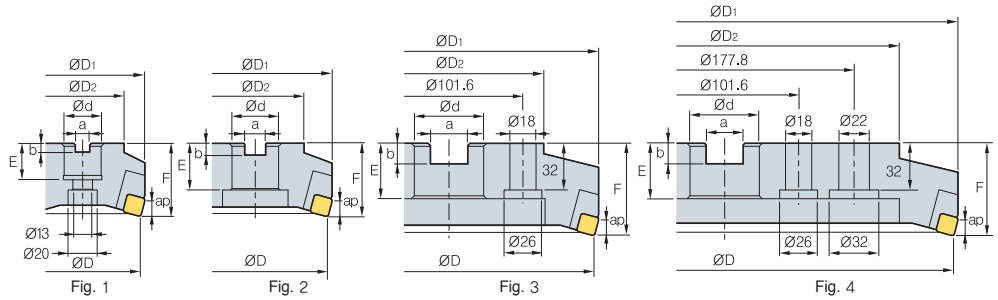


(mm)

Designation	Stock		⊙	ØD	ØD ₁	ØD ₂	Ød	a	b	E	F	ap	kg	Fig
	R	L												
EPN 4080R/L	● (●)			80	86	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	9	1.4	1
(EPNM) 4100R/L	● (●)			100	107	67	31.75(32)	12.7(14.4)	8(8)	32(28)	50	9	2.1	2
4125R/L	● (●)			125	132	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	9	3.8	2
4160R/L	● (●)	●		160	166	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	9	5.7	2
4200R/L	●			200	206	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	9	8.2	3
4250R/L	● (●)			250	256	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	9	13.5	3
4315R/L	●			315	321	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	9	21.1	4

() Metric Size, ● Stock item

Available Inserts

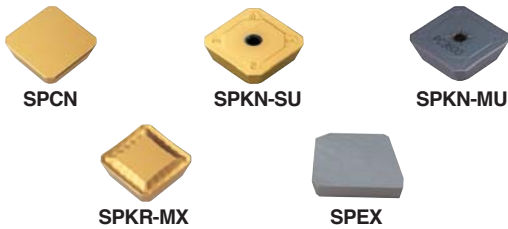

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	PC130		A30	G10E
SPCN 1203EDR	●	●	●	●								●	●	●	●
1203EDL													●	●	●
1203EDR-G															●
1203EDER-RH									●	●					
1203EDSR-RH					●				●						
1203EDTR-RH															
1203EDR-S20								●							
SPKN 1203EDSR-MU						●				●					
1203EDSR-SU						●	●			●	●				
1203EDSL-SU						●									
SPKR 1203EDSR-MX			●	●	●										
1203EDSL-MX			●												
SPEX 1203EDR/L-1															

Available Arbors


Designation	General Arbor	NC Arbors	
		EPN	EPNM
EPN(M) 4080R/L	NT*□□ (MU)-FMA25.4-25	BT**□□ -FMA25.4 -□□	FMC27
4100R/L	NT*□□ (MU)-FMA31.75 -□□	BT**□□ -FMA31.75 -□□	FMC32
4125R/L	NT*□□ (MU)-FMA38.1 -□□	BT**□□ -FMA38.1 -□□	FMB40
4160R/L	NT*□□ (MU)-FMA50.8 -□□	BT**□□ -FMA50.8 -□□	FMB40
4200R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4250R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4315R/L	KCP-8*** (Center Ring plug)		

*□□ -NT Number **□□ -BT Number ***Over Milling 5

Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3600 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Assembling

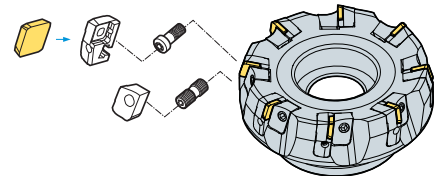

Parts

Specification	Locator	Wedge	Wedge Screw	Locator Screw	Wrench
Ø80~Ø315	LEPN4R/L LEPN4R1*/L1*	WEPN4R/L	DHA0821F DHA0817F*	LTX0514	HW40


*: Ø80~Ø100

Available Inserts E19, E20

Available Arbors and bolt E318 ~ E320



EPN(M)5000+

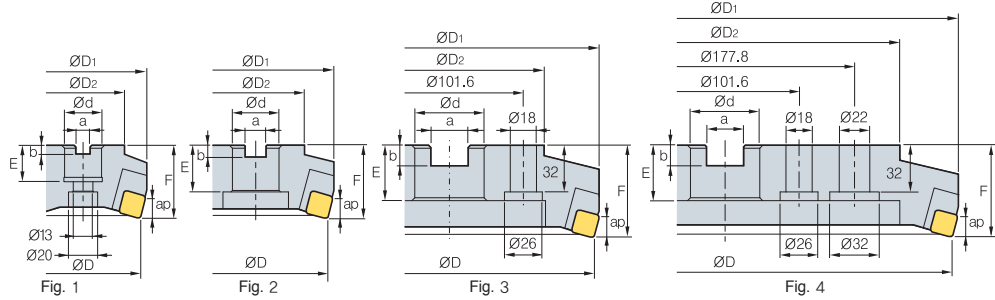


(mm)

Designation	Stock		⊙	ØD	ØD1	ØD2	Ød	a	b	E	F	ap	kg	Fig.
	R	L												
EPN 5080R/L+	●			80	91	60	25.4(27)	9.5(12.4)	6(7)	25(22)	63	12	1.7	1
(EPNM) 5100R/L+	●			100	110	70	31.75(32)	12.7(14.4)	8(8)	32(28)	63	12	2.5	2
5125R/L+	●			125	134	90	38.1(40)	15.9(16.4)	10(9)	38(30)	63	12	3.8	2
5160R/L+	●			160	169	110	50.8(40)	19.0(16.4)	11(9)	38(30)	63	12	5.5	2
5200R/L+	●			200	209	150	47.625(60)	25.4(25.7)	14(14)	38(38)	63	12	8.0	3
5250R/L+	●			250	259	230	47.625(60)	25.4(25.7)	14(14)	38(38)	63	12	14.8	3
5315R/L+	●			315	324	270	47.625(60)	25.4(25.7)	14(14)	38(38)	63	12	22.4	4

() Metric Size, ● Stock item

Available Inserts

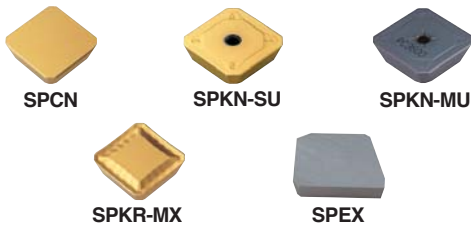

Designation	Cermet		Coated							Uncoated		page			
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400		PC130	A30	G10E
SPCN 150412T															
1504EDR	●	●											●	●	●
1504EDSR			●												
1504EDL								●						●	
1504EDR-G															●
1504EDER-RH									●	●					
1504EDSR-RH									●						
1504EDTR-RH				●											
1504EDR-S20								●							
SPKN 1504EDSR-MU					●										
1504EDSR-SU					●	●			●	●					
1504EDSL-SU					●										
SPKR 1504EDR-MX		●													
1504EDSR-MX			●	●											
SPEX 1504EDR/L-1															

Available Arbors


Designation	General Arbor	NC Arbors	
		EPN	EPNM
EPN(M) 5080R/L	NT*□□ (MU)-FMA25.4-25	BT**□□-FMA25.4-□□	FMC27
5100R/L	NT*□□ (MU)-FMA31.75-□□	BT**□□-FMA31.75-□□	FMC32
5125R/L	NT*□□ (MU)-FMA38.1-□□	BT**□□-FMA38.1-□□	FMB40
5160R/L	NT*□□ (MU)-FMA50.8-□□	BT**□□-FMA50.8-□□	FMB40
5200R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□-FMA47.625-□□	FMB60
5250R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□-FMA47.625-□□	FMB60
5315R/L	KCP-8*** (Center Ring plug)		

*□□-NT Number **□□-BT Number ***Over Milling 5

Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3600 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Assembling

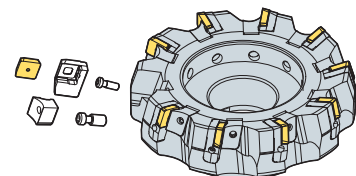

Parts

Specification	Locator	Wedge	Wedge Screw	Locator Screw	Wrench
Ø80~315	LEPN5R/L LEPN5R1*/L1*	WHPS5R/L	WHX0817 WHX0813*	LTX0514	HW40


Available Inserts E19, E20

Available Arbors and bolt E318 ~ E320

*: Ø80



PF(M)4000

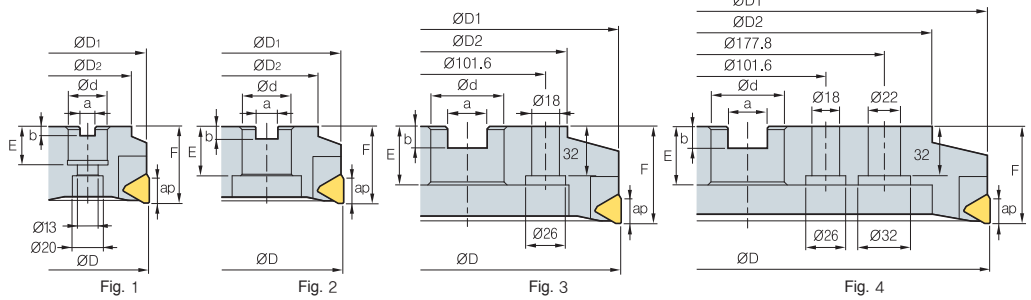

• AR : 15°
• RR : 14°

(mm)

Designation	Stock		⊗	ØD	ØD1	ØD2	Ød	a	b	E	F	ap	kg	Fig.	
	R	L													
PF	4080R/L	●		4	80	79	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	16	1.2	1
(PFM)	4100R/L	●		4	100	97	67	31.75(32)	12.7(14.4)	8(8)	32(28)	50	16	1.8	2
	4125R/L	●		7	125	122	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	16	3.1	2
	4160R/L			9	160	158	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	16	5.6	2
	4200R/L			11	200	197	130	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	16	8.8	3
	4250R/L			15	250	247	180	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	16	16	3
	4315R/L			19	315	311	240	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	16	22	4

() Metric Size, ● Stock item

▶ Available Inserts



Designation	Cermet		Coated						Uncoated			page		
	CN2000	CN30	NCM325	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
TFCN	2203PFR												●	E21
	2203PFL													

▶ Available Arbors


Designation	General Arbor	NC Arbors	
		PF	PFM
PF(M)	4080R/L NT*□□ (MU)-FMA25.4-25	BT**□□ -FMA25.4-□□	FMC27
	4100R/L NT*□□ (MU)-FMA31.75-□□	BT**□□ -FMA31.75-□□	FMC32
	4125R/L NT*□□ (MU)-FMA38.1-□□	BT**□□ -FMA38.1-□□	FMB40
	4160R/L NT*□□ (MU)-FMA50.8-□□	BT**□□ -FMA50.8-□□	FMB40
	4200R/L NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625-□□	FMB60
	4250R/L NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625-□□	FMB60
	4315R/L KCP-8*** (Center Ring plug)		

*□□-NT Number **□□-BT Number ***Over Milling 5

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3600 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Assembling



▶ Parts

Specification	Locator	Wedge	Wedge Screw	Locator Screw	Wrench
Ø80 ~ Ø315	LPF4R/L LPF4R1**/L1**	WPFR/L	DHA0821F DHA0817F*	LTX0512	HW40


*: Ø80 ~ Ø100 / **: Ø80 ~ Ø125

▶ Available Inserts E21

▶ Available Arbors and bolt E318 ~ E320



PPN(M)4000

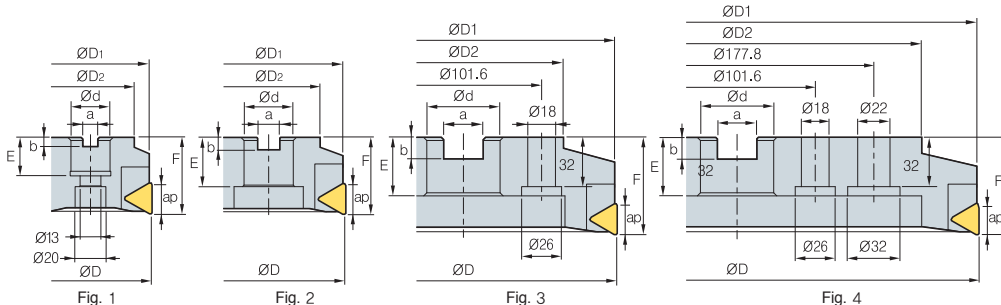


• AR : 7°
• RR : 0°

Designation	Stock		ØD	ØD1	ØD2	Ød	a	b	E	F	ap	kg	Fig	
	R	L												
PPN	4080R/L	● (●)	5	80	79	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	18	1.3	1
(PPNM)	4100R/L	● (●)	6	100	99	67	31.75(32)	12.7(14.4)	8(8)	32(28)	50	18	1.9	2
	4125R/L	● (●)	8	125	124	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	18	3.5	2
	4160R/L	● (●)	10	160	158	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	18	5.6	2
	4200R/L	● (●)	12	200	198	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	18	8.1	3
	4250R/L	●	16	250	248	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	18	13.3	3
	4315R/L	●	20	315	313	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	18	21.4	4

() Metric Size, ● Stock item

▶ Available Inserts



Designation	Cermet		Coated							Uncoated		page			
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400		PC130	A30	G10E
TPCN 2204PDR	●	●													
2204PDR-G															●
2204PDL															●
2204PDSR				●											
2204PDTR															
2204PDR-RH															
2204PDER-RH									●	●					
2204PDSR-RH					●				●	●					
2204PDR-S20															
TPKN 2204PDSR-MU					●										
2204PDSR-SU					●	●				●	●				
2204PDSL-SU					●										
TPKR 2204PDR-MX		●													
2204PDSR-MX		●	●												
2204PPR-MX															

▶ Available Arbors


Designation	General Arbor	NC Arbors	
		PPN	PPNM
PPN(M) 4080R/L	NT*□□ (MU)-FMA25.4-25	BT**□□ -FMA25.4 -□□	FMC27
4100R/L	NT*□□ (MU)-FMA31.75 -□□	BT**□□ -FMA31.75 -□□	FMC32
4125R/L	NT*□□ (MU)-FMA38.1 -□□	BT**□□ -FMA38.1 -□□	FMB40
4160R/L	NT*□□ (MU)-FMA50.8 -□□	BT**□□ -FMA50.8 -□□	FMB40
4200R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4250R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
4315R/L	KCP-8*** (Center Ring plug)		

*□□—NT Number **□□—BT Number ***Over Milling 5

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3600 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Assembling

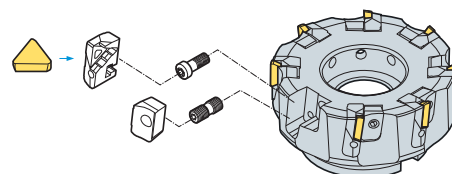

▶ Parts

Specification					
Ø80 ~ Ø315	LPPN4R/L LPPN4R1*/L1*	WPPN4R/L	DHA0821F DHA0817F*	LTX0514	HW40


▶ Available Inserts E21

▶ Available Arbors and bolt E318 ~ E320

*: Ø80 ~ Ø100



ADS4000

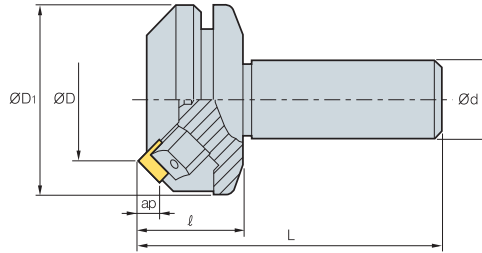


(mm)

Designation	Stock		ØD	ØD ₁	Ød	l	L	ap		
ADS	4050R	●	3	50	75	32	40	120	6.5	1.8
	4050RS42		3	50	75	42	40	120	6.5	2.2
	4063R	●	4	63	87	32	40	120	6.5	2.3
	4063RS42		4	63	87	42	40	120	6.5	2.7

● Stock item

Available Inserts




Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3600 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Designation	Cermet		Coated						Uncoated			page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC130	PC5300	PC5400		A30	G10E
SDCN 42M	42M											●		
	42M-G													●
	42MT	●	●	●				●				●		
	42MT-RH													
	42MT-S20							●						
	1203AEEN													
	1203AEEN-RH													
	1203AESN													
SDKN	1203AESN-MU					●								
	1203AESN-SU					●	●		●	●				
SDKR	1203AESN-MX													
	1203AETN-MX													
	1203AEN-MX			●										

Assembling




Parts

Specification					
Ø50~Ø63	LASS4R/L	WASR/L	WTX0817	LTX0512	TW25

Available Inserts E13, E14



ADS5000

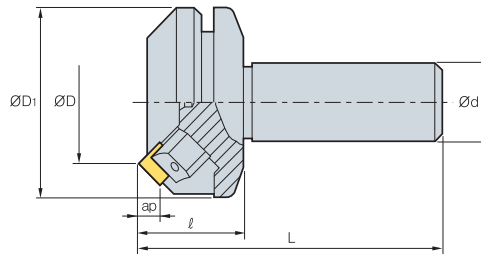

AA
45°

• AR : 15°
• RR : -3°

(mm)


Designation	Stock		ØD	ØD1	Ød	l	L	ap	
ADS 5050R	●	3	50	75	32	40	120	8.5	1.9
5050R-S42		3	50	75	42	40	120	8.5	2.3
5063R	●	4	63	87	32	40	120	8.5	2.4
5063R-S42		4	63	87	42	40	120	8.5	2.8

● Stock item


▶ Available Inserts




SDCN



SDKN-MU



SDKN-SU




SDKR-MX

Designation	Cermet		Coated							Uncoated		page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC130	PC9530	PC6510	PC5300	PC5400		A30	G10E
SDCN 53M												●		
53M-G														●
53MT	●	●	●	●			●					●		
53MT-RH					●									
53MT-S20								●						
1504AEEN									●	●				
1504AEEN-RH									●	●				
1504AESN									●					
1504AESN-RH									●					
SDKN 1504AESN-MU						●								
1504AESN-SU						●			●	●				
SDKR 1504AESN-MX				●										
1504AETN-MX														
1504AEN-MX				●										

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320 161 ~ 270 80 ~ 140	0.05 ~ 0.20 0.05 ~ 0.20 0.05 ~ 0.20	NCM325 PC3600 A30
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230 50 ~ 90	0.05 ~ 0.30 0.05 ~ 0.30	PC6510 G10E

Assembling



▶ Parts

Specification					
Ø50~Ø63	LASS5R/L	WASR/L	WTX0817	LTX0512	TW25

▶ Available Inserts E13, E14

PES2000 / 3000 / 4000



2000/3000 type

4000 type

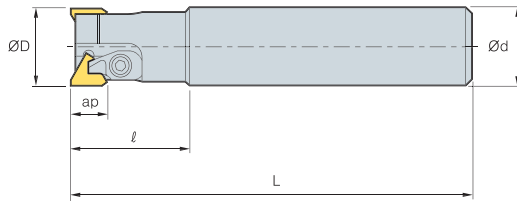


Fig. 1

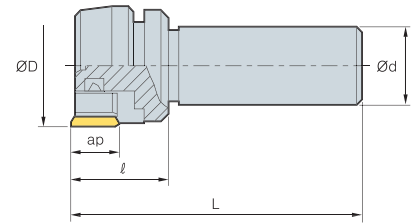


Fig. 2



AA
90°
• AR : 10°~15°
• RR : 2°~3°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap		Fig
PES 2020R	●	2	20	20	30	110	8	0.3	1
PES 2025R	●	2	25	25	35	120	8	0.5	1
PES 3030R		2	30	32	45	160	13	0.9	1
PES 3032R	●	2	32	32	45	160	13	1.0	1
PES 3033R		2	33	32	45	160	13	1.1	1
PES 3035R		2	35	32	45	160	13	1.2	1
PES 3036R		2	36	32	45	160	13	1.3	1
PES 3040R	●	2	40	32	45	160	13	1.4	1
PES 4050R	●	3	50	32	40	120	16.5	1.2	2
PES 4050R-S42		3	50	42	40	120	16.5	1.5	2
PES 4063R	●	4	63	32	40	120	16.5	1.5	2
PES 4063R-S42		4	63	42	40	120	16.5	1.8	2

● Stock item

Available Inserts



TECN




TEEN

Designation	Cermet		Coated						Uncoated			page			
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC130		A30	G10E	H01
2000 type												●			E20
3000 type													●		E20
													●		E20
													●		E20
4000 type													●		E20
													●		E20
													●		E20
													●		E20
													●		E20

Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3500 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Assembling

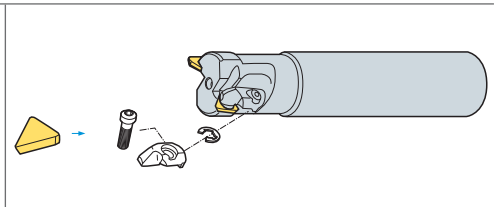


Parts

Specification								
Ø20~Ø25	Locator	Wedge	Wedge Screw	Locator Screw	Wrench	Wrench	Clamp	Ring
Ø30~Ø40	-	-	-	CHX0407	HW25L	-	CH4R1	ER03
Ø50~Ø63	LPTS4R/L	WPTSR	DHA0815	CHX0510	HW30L	-	CH5R1	ER04
						HW40		

Available Inserts E20




AFO(M)4000

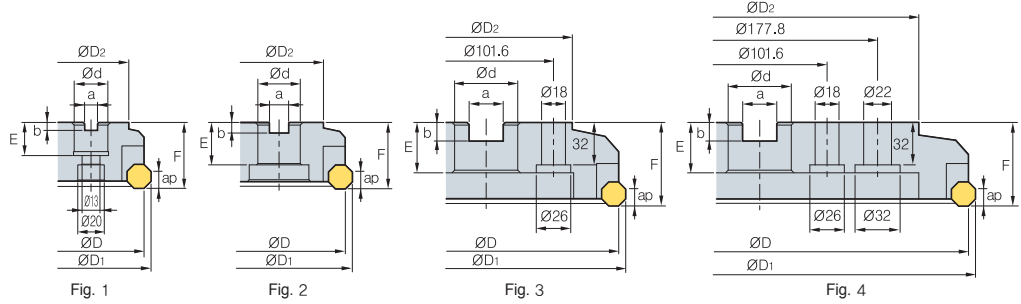

Designation	Stock		⊗	ØD	ØD ₁	ØD ₂	Ød	a	b	E	F	ap	kg	Fig	
	R	L													
AFO	4080R/L	(●)		5	80	88	60	25.4(27)	9.5(12.4)	6(7)	25(22)	50	6.5	1.4	1
(AFOM)	4100R/L	(●)		6	100	108	80	31.75(32)	12.7(14.4)	8(8)	32(28)	50	6.5	2.0	1
	4125R/L	(●)		8	125	133	100	38.1(40)	15.9(16.4)	10(9)	38(30)	63	6.5	3.1	1

() Metric Size, ● Stock item

Available Inserts



Designation	Cermet		Coated					Uncoated		page					
	CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510		PC5300	PC5400	A30	G10E	H01
OFCW	05T3SN														E10
	05T3FN														
	05T308FN														
OFKT	05T3SN-MF		●	●				●							E10
	05T308SN-MF														
	05T3SN-MM		●	●	●		●								
	05T308SN-MM														
	05T3FN-MA												●		
	05T3EN-MA														

Available Arbors


Designation	General Arbor	NC Arbors	
		AFO	AFOM
AFO(M) 4080R/L	NT*□□ (M/U)-FMA25.4-25	BT**□□ -FMA25.4 -□□	FMC27
4100R/L	NT*□□ (M/U)-FMA31.75 -□□	BT**□□ -FMA31.75 -□□	FMC32
4125R/L	NT*□□ (M/U)-FMA38.1 -□□	BT**□□ -FMA38.1 -□□	FMB40

*□□-NT Number **□□-BT Number ***Over Milling 5

Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320 161 ~ 270 80 ~ 140	0.05 ~ 0.20 0.05 ~ 0.20 0.05 ~ 0.20	NCM325 PC3500 A30
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230 50 ~ 90	0.05 ~ 0.30 0.05 ~ 0.30	PC6510 G10E

Assembling

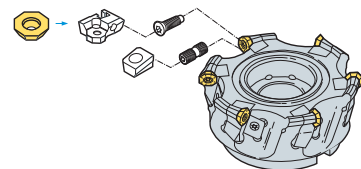


Parts

Specification					
Ø80~Ø125	LAF04R/L	WAFO4R/L	DHA0815	FTKA0408	TW15S

Available Inserts E10

Available Arbors and bolt E318 ~ E320

AFO(M)5000

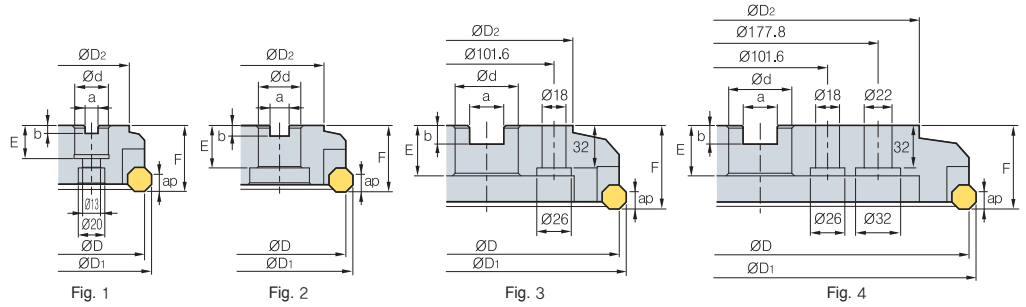


• AR : 15°
• RR : 5°

(mm)

Designation	Stock		⊙	ØD	ØD ₁	ØD ₂	Ød	a	b	E	F	ap	kg	Fig.	
	R	L													
AFO	5080R/L	● (●)		5	80	91	60	25.4(27)	9.5(12.4)	6(7)	25(22)	50	9.5	1.4	1
(AFOM)	5100R/L	● (●)		6	100	111	80	31.75(32)	12.7(14.4)	8(8)	32(28)	50	9.5	2.0	2
	5125R/L	● (●)		8	125	136	100	38.1(40)	15.9(16.4)	10(9)	38(30)	63	9.5	3.1	2
	5160R/L	● (●)		10	160	171	120	50.8(40)	19.0(16.4)	11(9)	38(30)	63	9.5	5.2	2
	5200R/L	● (●)		12	200	211	130	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	9.5	7.5	3
	5250R/L	(●)		16	250	261	180	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	9.5	16.1	3
	5315R/L			20	315	326	240	47.625(60)	25.4(25.7)	13.5(14)	38(38)	63	9.5	22.8	4

() Metric Size, ● Stock item

Available Inserts

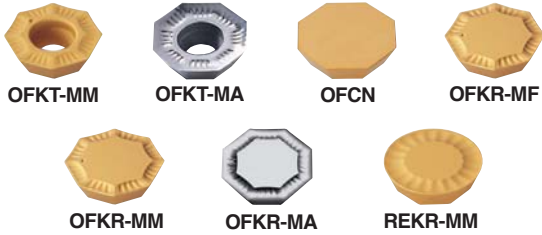

Designation	Cermet		Coated						Uncoated			page			
	CN2000	CN30	NCM825	NCM835	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400		A30	G10E	H01
OFKN	0704SN		●	●	●	●									E10
	0704FN														
	070408SN			●											
	070408FN														E10
OFKR	0704SN-MM		●	●	●	●	●	●							
	070408SN-MM		●												
	070408SN-MM														E11
	0704FN-MA												●		
	0704EN-MA														E11
OFKT	0704SN-MM		●												
	0704FN-MA												●		
	0704EN-MA														E13
REKR	170400-MM														

Available Arbors


Designation	General Arbor	NC Arbors	
		AFO	AFOM
AFO(M) 5080R/L	NT*□□ (MU)-FMA25.4-25	BT**□□ -FMA25.4 -□□	FMC27
5100R/L	NT*□□ (MU)-FMA31.75 -□□	BT**□□ -FMA31.75 -□□	FMC32
5125R/L	NT*□□ (MU)-FMA38.1 -□□	BT**□□ -FMA38.1 -□□	FMB40
5160R/L	NT*□□ (MU)-FMA50.8 -□□	BT**□□ -FMA50.8 -□□	FMB40
5200R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
5250R/L	NT*□□ (MU)-FMA47.625-25, KCP-8***	BT**□□ -FMA47.625 -□□	FMB60
5315R/L	KCP-8*** (Center Ring plug)		

*□□-NT Number **□□-BT Number ***Over Milling 5

Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190 ~ 320	0.05 ~ 0.20	NCM325 PC3500 A30
	161 ~ 270	0.05 ~ 0.20	
	80 ~ 140	0.05 ~ 0.20	
M	90 ~ 150	0.05 ~ 0.20	PC9530
K	140 ~ 230	0.05 ~ 0.30	PC6510 G10E
	50 ~ 90	0.05 ~ 0.30	

Assembling

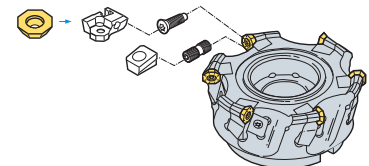

Parts

Specification	Locator	Wedge	Wedge Screw	Locator Screw	Wrench
Ø80 ~ Ø315	LAF05R/L LAF05R*/L-1*	WEFR/L	DHA0821F	LTX0512	HW40

* : Ø80~Ø100

Available Inserts E10, E11, E13 Available Arbors and bolt E318 ~ E320




New serrated edge design increases productivity by reducing insert cutting load

Power Buster

- New tooling utilizing a specially designed serrated edge to increase productivity by reducing the cutting load.
- Double-sided 6 corner insert geometry ensures high rigidity, long tool life and cost efficiency
- The serrated edge divide the chips into smaller pieces. This feature provides excellent chip control, reduces interference of the cutter and ensures good durability of the cutter body.
- AA (approach angle) : 45° and 80° available (same insert used)
- Application : High depth of cut and feed rate(Steel, Cast iron)

▶ Code system


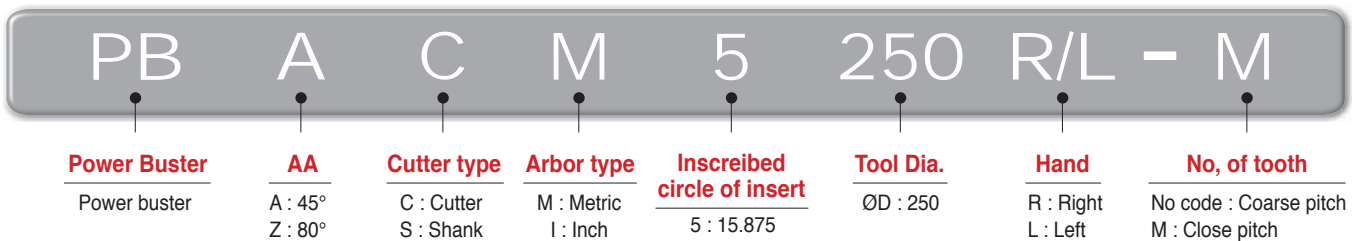


▶ Features of Insert

1 Major cutting edge(serrated edge)


- Low cutting forces
- Ideal for chip control, divides chips into small pieces for proper chip evacuation.
- Double sided 6 corner insert
- Ideal edge design for Steel and Cast iron rough milling

Comparison of chip control and cutting force

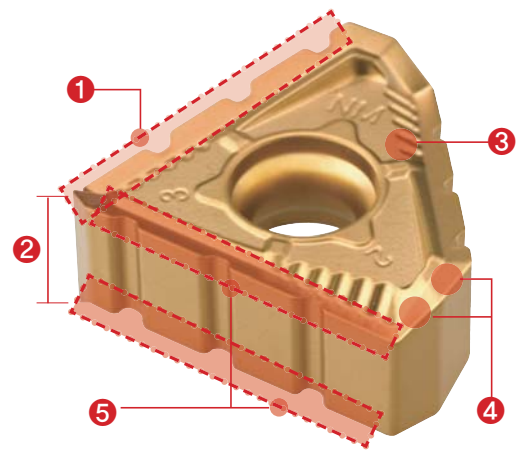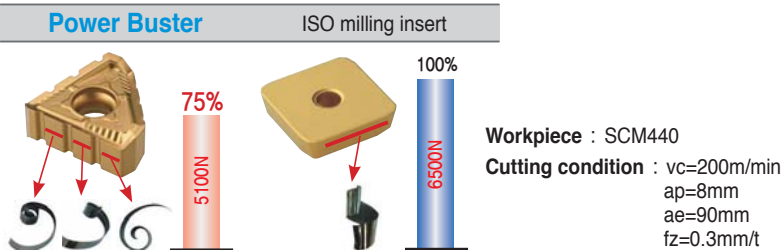


2 Thicker insert

- Thick insert guarantees high rigidity
- Balanced insert design for stable mounting




3 NM Chip breaker

- High rake angle for low cutting force
- Good chip flow at various feed and depth of cut
- Inserts are protected with seats for a precise mounting
- Low friction and good heat evacuation at high depth cut




4 Minor cutting edge

- High rake angle to avoid interference with chip
- Calculated minor cutting edge angel for both AA 45° & 80° cutter

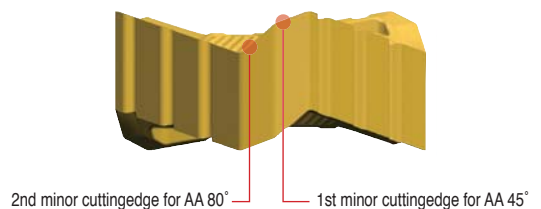

5 Mirror system

- Cutting edge on the both side of insert covers all overlapped cutting area

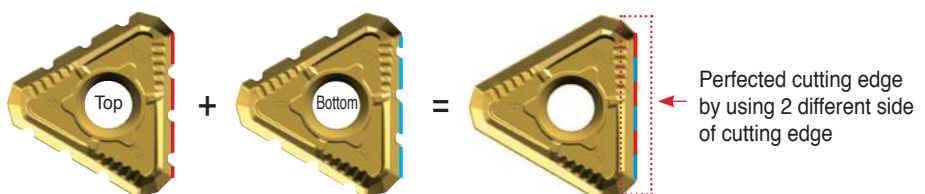

E Technical Information for Power Buster



► Features of Cutter

1 Screw on clamping system

- Simple and strong screw on clamping system


2 Better rigidity & Stable Assembly system

- The shim protects the cutter from insert damage
- High accuracy shim ensures tighter clamping

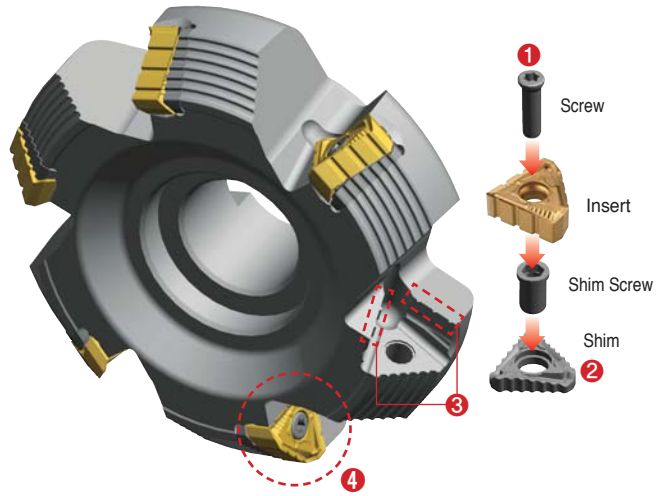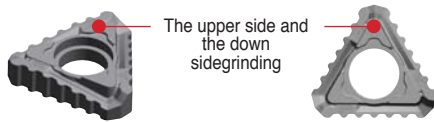


3 Foolproof System

- Insert serrations match pocket design to prevent improper seating and alignment

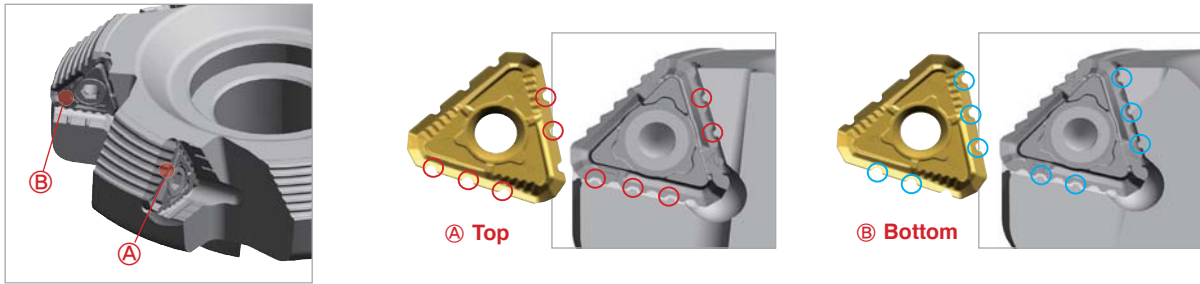


4 Multi-application system


- Same insert for multi use (45° and 10°)

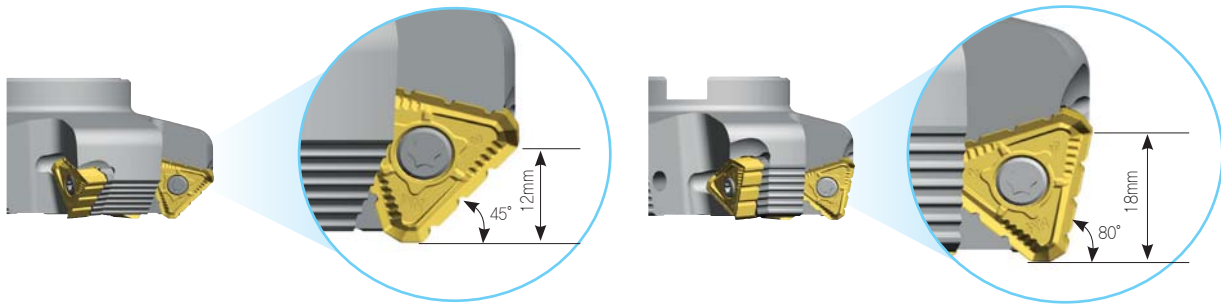

The serrations are effective with a depth of cut larger than 1mm

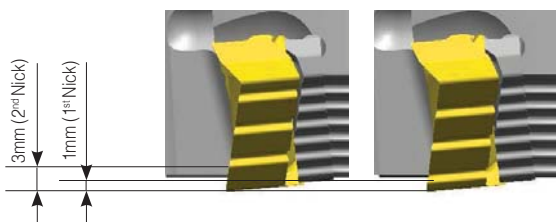


The serrations are effective with a depth of cut larger than 3mm

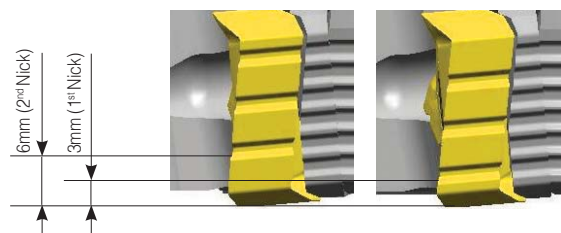

▶ Recommended cutting condition


ISO	Workpiece	Material	NC5330	NCM335	PC5300	
			fz(mm/t)			
			0.1-0.2-0.3	0.1-0.2-0.3	0.1-0.2-0.3	
			vc(m/min)			
P	Carbon steel	-	SUM22, C=0.1~25	400	335	280
		-	C=0.30~55	365	305	255
		-	C=0.55~80	340	285	240
	Low alloy steel (Alloy constituent < 5%)	-	SCM415(H), SCM420, SCM440	280	235	195
		Hardened		165	140	115
High alloy steel (Alloy constituent > 5%)	annealed	SKD61	210	180	150	
	Hardened	SKH51, SKH55	175	145	120	
K	Gray cast iron	Low tensile	FC200, FC250	125	-	145
		High tensile	FC300, FC350	105	-	120
		Ferritic	FCD400, FCD500	80	-	95
		Pearlitic	FCD600, FCD700	75	-	85

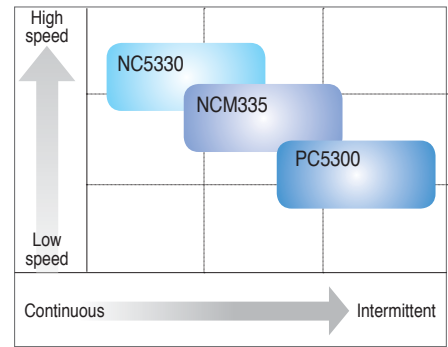

▶ Power Buster Test

■ Cylinder block for ship engine (Cast iron)


Cutting width (ae) = 160mm×2
Cutting depth (ap) = 10mm×2

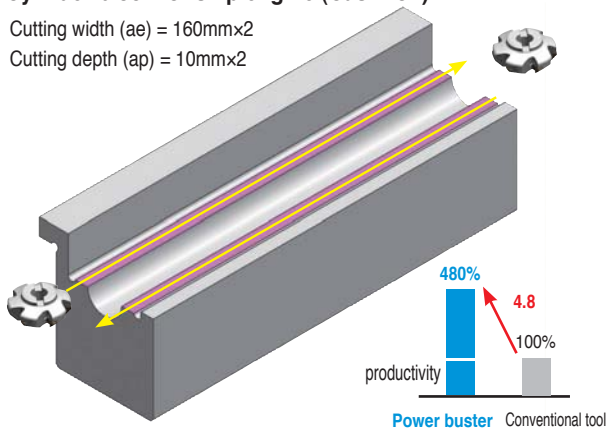

Item	Power Buster	Conventional tool
Diameter(ØD)	200mm	200mm
	12 tooth	12 tooth
Grade	NC5330	PVD coating for Cast iron
vc	170m/min	130m/min
fz	0.24mm/t	0.16mm/t
ap	10mm x 2 passes	4mm x 5 passes
min	28.2min/ea	137.5min/ea
4.8 times productivity increased		<ul style="list-style-type: none"> • One-sided 4 corner insert(Without nick) • AA 45° cutter

■ Heavy machinery part (Alloy steel)

Cutting width (ae) = 160mm×2
Cutting depth (ap) = 10mm×2

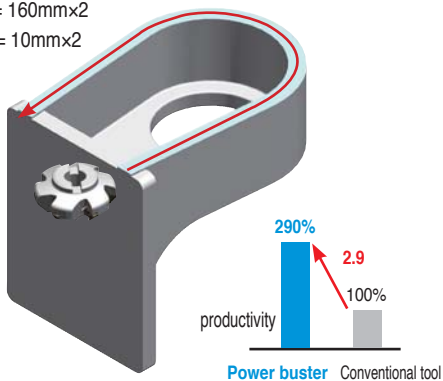

Item	Power Buster	Conventional tool
Diameter(ØD)	125mm	100mm
	8 tooth	8 tooth
Grade	NCM335	PVD coating for Cast iron
vc	180m/min	150m/min
fz	0.15mm/t	0.10mm/t
ap	5mm x 2 passes	2.5mm x 4 passes
min	5min/ea	14.7min/ea
2.9 times productivity increased		<ul style="list-style-type: none"> • Double-sided 8 corner insert(Without nick) • AA 45° cutter

PBAC(M)5000




Fig. 1




Fig. 2




Fig. 3




Fig. 4



AA
45°

• AR : -5°
• RR : -11°

(mm)

	Designation	Stock		Z	ØD	Ød	Ød1	Ød2	a	b	E	F	ap	Fig.
		R	L											
Coarse pitch	PBAC 5080R/L			4	80	25.4(27)	14	20	9.5(12.4)	6(7)	25(22)	50	12	1
	(PBACM) 5100R/L			4	100	31.75(32)	-	45	12.7(14.4)	8(8)	32(28)	50	12	2
	5125R/L			6	125	38.1(40)	-	56	15.9(16.4)	10(9)	38(32)	63	12	2
	5160R/L			8	160	50.8(40)	-	100	19(16.4)	11(9)	38(32)	63	12	2
	5200R/L			10	200	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	12	3
	5250R/L			12	250	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	12	3
	5315R/L			14	315	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	12	4
Close pitch	PBAC 5080R/L-M			6	80	25.4(27)	14	20	9.5(12.4)	6(7)	25(22)	50	12	1
	(PBACM) 5100R/L-M			6	100	31.75(32)	-	45	12.7(14.4)	8(8)	32(28)	50	12	2
	5125R/L-M	● (●)		8	125	38.1(40)	-	56	15.9(16.4)	10(9)	38(32)	63	12	2
	5160R/L-M	● (●)		10	160	50.8(40)	-	100	19(16.4)	11(9)	38(32)	63	12	2
	5200R/L-M	● (●)		12	200	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	12	3
	5250R/L-M			14	250	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	12	3
	5315R/L-M			16	315	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	12	4

() Metric Size, ● Stock item

Available Inserts



TNMX-NM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN80	NC5330	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
TNMX 2710AZNR-NM			●	●	●			●		●				
2710AZNL-NM														E21

Available Arbors

Designation	Available Arbors	
	PBAC	PBACM
PBAC 5080HR-□	BT□□-FMA25.4-□□	BT□□-FMC27-□□
(PBACM) 5100HR-□	BT□□-FMA31.75-□□	BT□□-FMC32-□□
5125HR-□	BT□□-FMA38.1-□□	BT□□-FMB40-□□
5160R-□	BT□□-FMA50.8-□□	BT□□-FMC40-□□
5200R-□		
5250R-□	BT□□-FMA47.625-□□	BT□□-FMB60-□□
5315R-□		

Parts

Specification				
Ø80~Ø315	Screw FTGA0518	Shim ST53AZR	Shim Screw SHXN0712F	Wrench TW20-100

Available Inserts E21

Available Arbors and bolt E318 ~ E320



PBZC(M)5000




Fig. 1




Fig. 2




Fig. 3




Fig. 4



AA
80°

- AR : -5°
- RR : -12°

	Designation	Stock		Z	ØD	Ød	Ød1	Ød2	a	b	E	F	ap	Fig.
		R	L											
Coarse pitch	PBZC (PBZCM) 5080R/L			4	80	25.4(27)	14	20	9.5(12.4)	6(7)	25(22)	50	18	1
	5100R/L			4	100	31.75(32)	-	45	12.7(14.4)	8(8)	32(28)	50	18	2
	5125R/L			6	125	38.1(40)	-	56	15.9(16.4)	10(9)	38(32)	63	18	2
	5160R/L			8	160	50.8(40)	-	100	19(16.4)	11(9)	38(32)	63	18	2
	5200R/L			10	200	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	18	3
	5250R/L			12	250	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	18	3
	5315R/L			14	315	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	18	4
Close pitch	PBZC (PBZCM) 5080R/L-M			6	80	25.4(27)	14	20	9.5(12.4)	6(7)	25(22)	50	18	1
	5100R/L-M			6	100	31.75(32)	-	45	12.7(14.4)	8(8)	32(28)	50	18	2
	5125R/L-M	● (●)		8	125	38.1(40)	-	56	15.9(16.4)	10(9)	38(32)	63	18	2
	5160R/L-M	● (●)		10	160	50.8(40)	-	100	19(16.4)	11(9)	38(32)	63	18	2
	5200R/L-M	● (●)		12	200	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	18	3
	5250R/L-M			14	250	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	18	3
	5315R/L-M			16	315	47.625(60)	-	-	25.4(25.7)	14(14)	38(38)	63	18	4

() Metric Size, ● Stock item

Available Inserts



TNMX-NM

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NC5330	NCM335	PC3500	PC3600	PC3545	PC9530	PC8510	PC5300	PC5400	A30		G10E	H01
TNMX 2710AZNR-NM 2710AZNL-NM			●	●	●			●		●					E21

Available Arbors

Designation	Available Arbors	
	PBAC	PBACM
PBZC (PBZCM) 5080HR-□	BT□□ -FMA25.4-□□	BT□□ -FMC27-□□
5100HR-□	BT□□ -FMA31.75-□□	BT□□ -FMC32-□□
5125HR-□	BT□□ -FMA38.1-□□	BT□□ -FMB40-□□
5160R-□	BT□□ -FMA50.8-□□	BT□□ -FMC40-□□
5200R-□		
5250R-□	BT□□ -FMA47.625-□□	BT□□ -FMB60-□□
5315R-□		

Parts

Specification				
Ø80-Ø315	Screw FTGA0518	Shim ST53AZR	Shim Screw SHXN0712F	Wrench TW20-100

Available Inserts E21

Available Arbors and bolt E318 ~ E320

E Technical Information for Rich Mill

Rich Mill series is one of innovations that provides more available cutting edges by double sided insert and longer tool life for our customers

Rich Mill Series

- Rich Mill series is one of the innovations that provides more available cutting edges with double sided inserts and longer tool life for our customers
- The unique geometry and special cutting edge guarantees low cutting loads and long tool life
- Rich Mill series has a wide application range from steel and stainless steel to cast iron and aluminum
- Applying negative inserts makes it even stronger and provides longer tool life
- Rich Mill series has both screw on clamping system and latch clamping system

Rich Mill Clamping bolt




Socket bolt
(Ø50~Ø125 - Hexagonal socket bolt)



Mounting bolt
(Ø160~Ø250 - Mounting bolt for general face milling)

Rich Mill Series

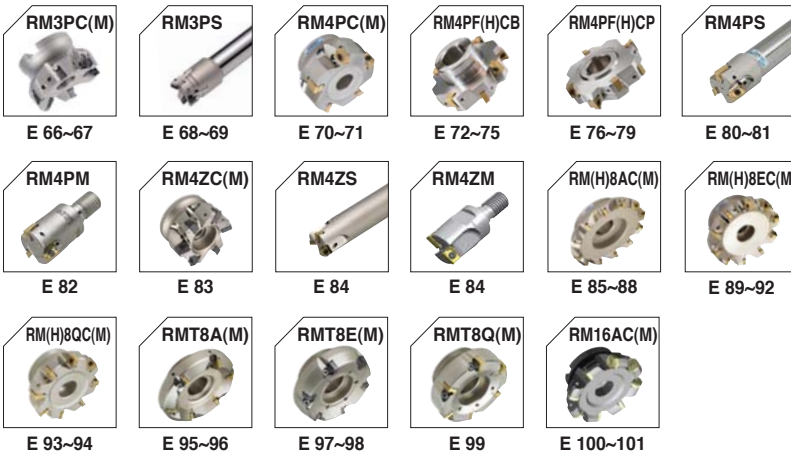

Code system


RM16	A	C	M	4	100	H	R - M	
Number of edges	Approach angle	Tool type	Arbors type	Inscribed circle of insert	Tool Dia.	Coolant type	Hand	Pitch type
RM3 : Number of edges-3 RM4 : Number of edges-4 RM8 : Number of edges-8 RMH8 : Number of edges-8 (Shim) RMT8 : Number of edges-8 (Latch Clamp) RM16 : Number of edges-16	A : 45° D : 30° E : 15° F : 5° P : 0° Q : 2° Z : Plunging	C : Cutter S : Shank	M : Metric A : Inch	3 : 9.525 4 : 12.7 5 : 15.875	Ø100	H : Thru-Hole No code : None	R : Right L : Left	M : Close H : Extra Close




Rich Mill RM3

- ▶ **Features**
 - ▶ **High Quality** - True 90° shouldering operation
 - ▶ **High Productivity** - Strong thick insert and 3-face clamping ensure stable operation even tough condition.
 - ▶ **High Economics** - Long tool life due to optimized manufacturing process


Features of insert

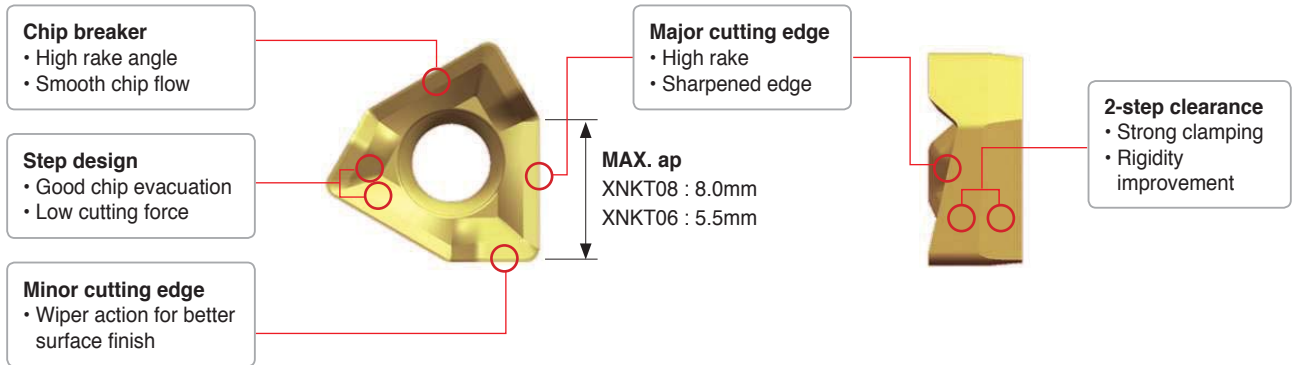

Features of cutter

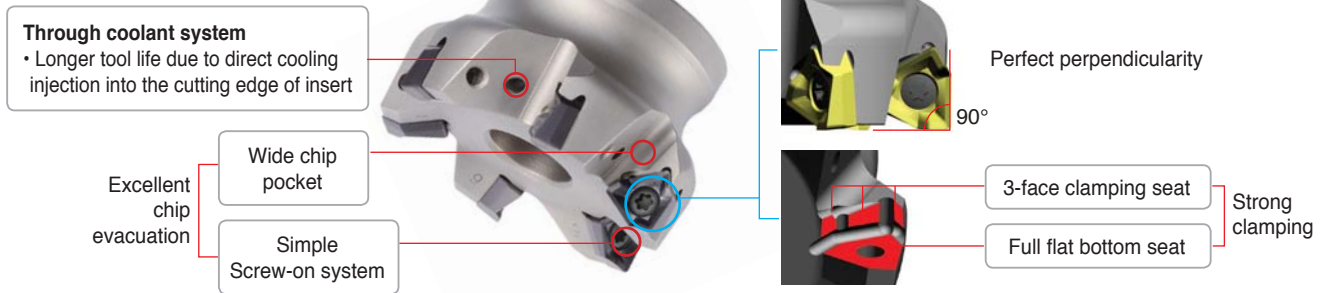

- ▶ **Through coolant system**
 - ▶ Exclusive through coolant bolt required.
 - ▶ Effective coolant distribution directly to cutting edge
 - ▶ Coolant supporting arbor required.

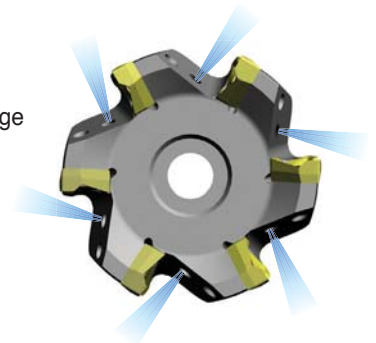

Features of chip breakers

Chip breaker	Insert	Cutting edge	Applications	Features
MA			Aluminum	Superior cutting quality for aluminum due to sharp cutting edge and buffed surface
ML			Light	Superior cutting quality for light and light cutting, difficult-to-cut material machining through the low cutting load of chip breaker
MM			General	Suitable for various cutting due to special shape design for general cutting

▶ Application guideline for grade

Workpiece		P		M	K	N
		Carbon steel	Alloy steel	Stainless steel	Cast iron	Aluminum
Chip breaker	First choice	MM	MM	ML	ML	MA
	Second choice	ML	ML	-	MM	-
Grade	High speed machining	PC3600	PC3600	PC5300	PC6510	H01
	General machining	PC5400	PC5300	PC5400	PC5300	
	Interrupted machining	PC5400	PC5400	PC5400	PC5400	

▶ Recommended cutting condition

■ RM3 3000 type

Workpiece	Grade	Cutting conditions				Available inserts	Cutting conditions			
		vc (m/min)	fz (mm/t)	max ap(mm)	vc (m/min)		fz (mm/t)	max ap(mm)	Available inserts	
P steel	PC3600	160~270	0.25~0.05	5.5	XNKT060405 PNSR-MM	160~270	0.2~0.05	5.5	XNKT060405 PNER-ML	
	PC5300	150~240	0.25~0.05	5.5		150~240	0.25~0.05	5.5		
	PC5400	130~210	0.25~0.05	5.5		130~210	0.25~0.05	5.5		
M Stainless steel	PC5300	90~150	0.2~0.05	5.5		90~150	0.1~0.05	5.5		
	PC5400	70~120	0.2~0.05	5.5		70~120	0.1~0.05	5.5		
K Cast iron	PC6510	140~230	0.3~0.08	5.5		140~230	0.25~0.08	5.5		
	PC5300	120~200	0.3~0.08	5.5		120~200	0.25~0.08	5.5		

• Maximum cutting condition : vc = 350m/min, fz = 0.5mm/t according to cutting environment

■ RM3 4000 type

Workpiece	Grade	Cutting conditions				Available inserts	Cutting conditions				
		vc (m/min)	fz (mm/t)	max ap(mm)	vc (m/min)		fz (mm/t)	max ap(mm)	Available inserts		
P steel	PC3600	160~270	0.3~0.05	8.0	XNKT080508 PNSR-MM	160~270	0.25~0.05	8.0	XNKT080508 PNER-ML		
	PC5300	150~240	0.3~0.05	8.0		150~240	0.25~0.05	8.0			
	PC5400	130~210	0.3~0.05	8.0		130~210	0.25~0.05	8.0			
M Stainless steel	PC5300	90~150	0.25~0.05	8.0		90~150	0.2~0.05	8.0			
	PC5400	70~120	0.25~0.05	8.0		70~120	0.2~0.05	8.0			
K Cast iron	PC6510	140~230	0.35~0.08	8.0		140~230	0.3~0.08	8.0			
	PC5300	120~200	0.35~0.08	8.0		120~200	0.3~0.08	8.0			
N Aluminum	H01	400~1200	0.4~0.1	8.0		XNCT080508PNFR-MA					


• Maximum cutting condition : vc = 350m/min, fz = 0.7mm/t according to cutting environment



Rich Mill RM4


Economical 4 cutting edges by using double-sided insert

- ▶ RM4, as a multi functional milling tool, offers economical 4 cutting edges by using an innovative double-sided insert
- ▶ Special designed chip breaker consists of high rake angle and strong cutting edge to decrease the cutting load
- ▶ RM4 is multi functional tool that can cover facing, side cutting, shouldering, slotting, ramping & helical cutting
- ▶ Optimal matching of the special cutting edge geometry with variety of new grades provides consistence & long tool life of insert



Features

- ▶ 4 cutting edges can be used by using double-sided insert
- ▶ High rake angle chip breaker and cutting edge can make smooth cutting with low cutting load
- ▶ Strong negative insert
- ▶ High efficiency, economical, multi functional tool



- Through coolant system Longer tool life due to direct cooling injection into the cutting edge of insert
- Wide chip pocket for better chip evacuation
- Simple screw on system

Inserts

- ▶ Double-sided insert using 4cutting edges
- ▶ High rake angle chip breaker, cutting edge
- ▶ Flexibility of product
- ▶ High efficiency, economical, multi functional tool
- ▶ Negative insert has strong cutting edge

Chip breaker

- High rake angle chip breaker
- Improving chip control

Major cutting edge

- High rake angle chip breaker
- Better surface roughness




Step design

- Improving chip control
- Reducing cutting load

Concave design

- 4 cutting edges
- Minimize interference



Minor cutting edge

- Special design of cutting edge to improve surface roughness

Clearance face

- Strong negative face
- Strong cutting edge

Uses



Chip breaker


Insert	Cutting edge	Features
Aluminum, Light machining MA		With sharp edge application the better productivity has been accomplished, especially for Aluminum or low force cut
Light cutting MF		Due to low cutting load, it is good for light cutting and difficult-to-cut material.
General cutting MM		It is suitable design for general milling.

Setting configuration

Insert	Setting angle of insert	Features
		High rake chip breaker & positive setting angle for low cutting load - Improving machinability
		Multi applications for facing, shouldering, slotting, ramping, helical cutting, etc

Through coolant system


- ▶ By using on exclusive coolant bolt(hexagonal socket bolt) powerful cooling & better chip evacuation can be acquired. To get optimal chip control, the direction of coolant injection has been designed to reach to each cutting edge directly. (through coolant arbor is required.)

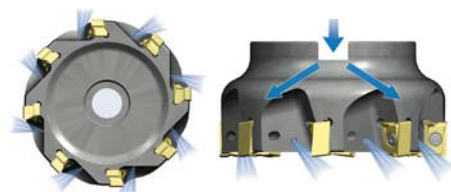

Through coolant system for decreasing cutting heat and good chip evacuation

Rich Mill RM4

▶ Ramping and Helical cutting

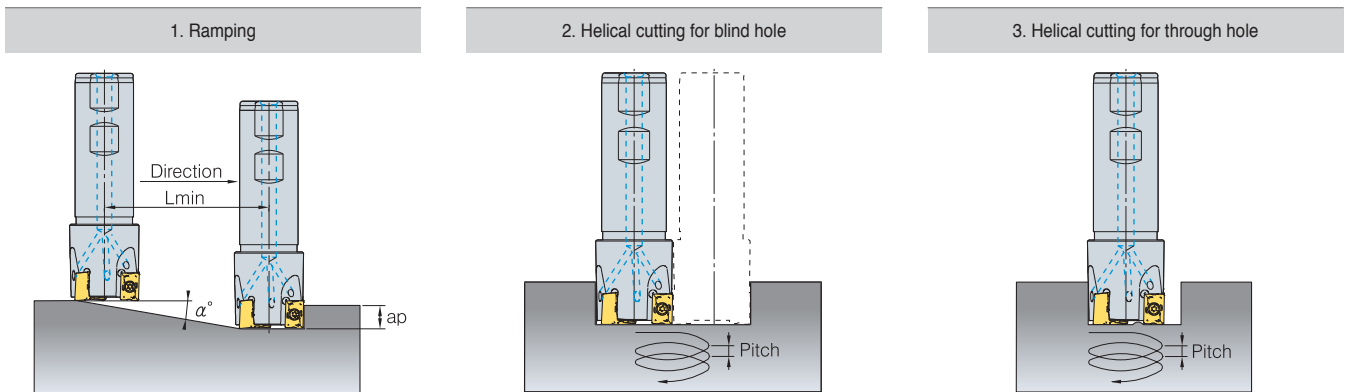

Designation	1. Ramping			2. Helical cutting for blind hole				3. Helical cutting for through hole	
	D	α°	Lmin	Maximum Hole Diameter	Maximum Pitch	Minimum Hole Diameter	Maximum Pitch	Minimum Hole Diameter	Minimum Pitch
RM4PS3014HR	14	5.0	114	27	3	25	2.5	19	1.0
RM4PS3016HR	16	4.0	143	31	3	29	2.0	23	1.0
RM4PS3018HR	18	4.0	143	35	3	33	3.0	27	2.0
RM4PS3020HR	20	4.0	143	39	4	37	3.0	31	2.0
RM4PS3025HR	25	3.5	163	49	4	47	4.0	41	3.0
RM4PS3032HR	32	3.0	191	63	4.5	61	4.0	55	3.5
RM4PS3040HR	40	2.0	286	79	4	77	3.5	71	3.0
RM4PS3050HR	50	1.5	382	99	3.5	97	3.5	91	3.0
RM4PC(M)3040HR	40	2.0	286	79	4	77	4.0	71	3.0
RM4PC(M)3050HR	50	1.5	382	99	3.5	97	3.5	91	3.0
RM4PC(M)3063HR	63	1.0	573	125	3	123	3.0	117	2.5
RM4PC(M)3080HR	80	1.0	573	159	4	157	4.0	151	3.5
RM4PC(M)3100HR	100	0.5	1146	199	2	197	2.0	191	2.0
RM4PS4032HR	32	2.5	229	62	4	59.5	3.0	49	2.0
RM4PS4040HR	40	2.0	286	78	4	75.5	3.0	65	2.0
RM4PS4050HR	50	2.0	286	98	5	95.5	4.0	85	3.5
RM4PS4063HR	63	2.0	286	124	5	121.5	5.0	111	5.0
RM4PC(M)4050HR	50	2.0	286	98	5	95.5	4.0	85	3.5
RM4PC(M)4063HR	63	2.0	286	124	5	121.5	5.0	111	5.0
RM4PC(M)4080HR	80	1.5	382	158	5	155.5	5.0	145	5.0
RM4PC(M)4100HR	100	1.0	573	198	5	195.5	4.5	185	4.0
RM4PC(M)4125HR	125	1.0	573	248	5	245.5	5.0	235	5.0
RM4PC(M)4160R	160	0.5	1146	318	4	315.5	3.5	305	3.5

The Lmin is when depth of cut is 10.0mm ($L_{min} = 10/\tan \alpha$)

▶ Recommended cutting condition

ISO	Grade	LNM(E)X100605PNR-MF		LNM(E)X100605PNR-MM		LNE(X)100605PNR-MA		Max-ap	LNM(E)X151008PNR-MF		LNM(E)X151008PNR-MM		LNE(X)151008PNR-MA		Max-ap
		vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)		vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)	
P	NCM325	-	-	-	-	-	-	9.0	150~300	0.05~0.30	120~300	0.05~0.35	150~300	0.03~0.20	14.0
	PC3500	150~300	0.05~0.25	120~300	0.05~0.30	150~300	0.03~0.20		150~300	0.05~0.30	120~300	0.05~0.35	150~300	0.03~0.20	
M	PC5300	120~180	0.05~0.25	100~180	0.05~0.30	120~200	0.03~0.20		120~180	0.05~0.30	100~180	0.05~0.3	120~200	0.03~0.20	
K	PC6510	150~300	0.08~0.30	120~300	0.08~0.35	-	-		150~300	0.08~0.35	120~300	0.08~0.35	-	-	



Rich Mill RM4Z

- ▶ **Plunge Mill RM4Z** Rich mill series RM4Z is a plunge mill for high efficiency vertical machining such as slotting and pocketing in roughing applications.
- ▶ Rich mill series RM4Z is a highly efficient milling tool for plunging, shouldering and facing. It makes operations more economical with the use of its double-sided 4-corner insert
- ▶ Plunge machining reduces lead time for high productivity and precision machining.
- ▶ In plunging the max depth of RM4Z 3000 type is 9.0mm and that of RM4Z 4000 type is 14.0mm


Features

- Through coolant system**
Improving chip control
Cooling inserts increases tool life
- Wide chip pocket**
Screw on system
Improving chip evacuation
- 1**: Double sided insert → 4 corner available
- 2**: High rake angle chip breaker and cutting edge
- 3**: Various available machining types
- 4**: High efficiency and economical insert
- Negative type insert - Strong cutting edge


Inserts

- Major cutting edge**
 - High rake cutting edge
 - Sharp cutting edge
- Chip breaker**
 - High rake angle
 - Control chip flow
- Step design**
 - Improving chip control
 - Reducing cutting load
- Concave design**
 - 4 corner available
 - Avoiding interference of cutting edges
- Minor cutting edge**
 - Special design for plunge machining
- Sides**
 - Negative type
 - Strong cutting edge


Uses

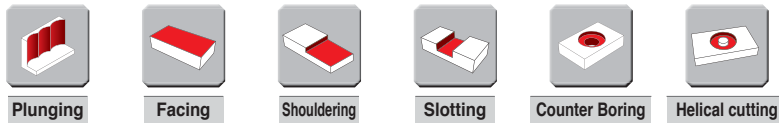

The depth of cut by machining type

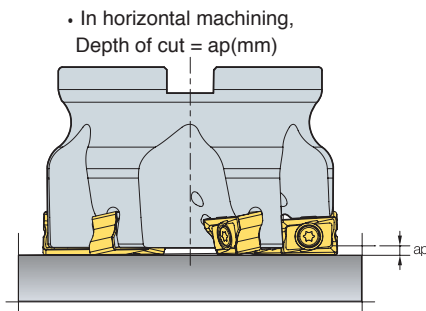


• In plunging, Depth of cut = ae (mm)



RM4Z	Horizontality	Verticality	
	max ap (mm)	max ae (mm)	step
RM4Z 3000	1.5	9	< 0.7D
RM4Z 4000	2.5	14	< 0.7D

Max Step in plunging

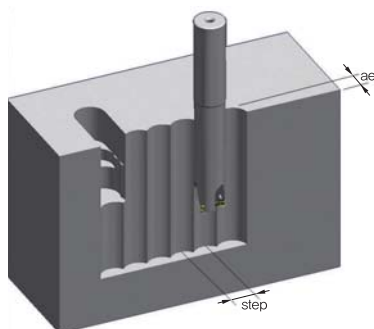


ae	Cutter Diameter(mm)								
	25	32	40	50	52	63	66	80	100
	max step (mm)								
1	9.7	11.1	12.4	14	14.2	15.7	16.1	17.7	19.9
2	13.5	15.4	17.4	19.5	20	22	22.6	24.9	28
3	16.2	18.6	21	23.7	24.2	26.8	27.4	30.3	34.1
4	18.3	21.1	24	27.1	27.7	30.7	31.4	34.8	39.1
5	20	23.2	26.4	30	30.6	34	34.9	38.7	43.5
6	21.3	24.9	28.5	32.4	33.2	36.9	37.9	42.1	47.4
7	22.4	26.4	30.3	34.6	35.4	39.5	40.6	45.2	51
8	23.3	27.7	32	36.6	37.5	41.9	43	48	54.2
9	24	28.7	33.4	38.4	39.3	44	45.2	50.5	57.2
10	-	-	-	-	-	46	47.3	52.9	60
11	-	-	-	-	-	47.8	49.1	55.1	62.5
12	-	-	-	-	-	49.4	50.9	57.1	64.9
13	-	-	-	-	-	50.9	52.4	59	67.2
14	-	-	-	-	-	52.3	53.9	60.7	69.3

Rich Mill RM4Z


▶ Through coolant system

- ▶ Exclusive hexagonal coolant socket bolt provides excellent cooling and chip evacuation.
- ▶ Direct coolant injection to cutting edge improves cooling effectiveness
- ▶ Coolant type arbor should be used.

*Coolant bolt is not included, it is for sale

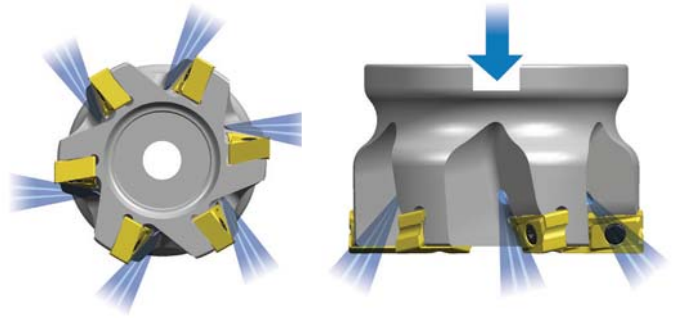


▶ Programming tip

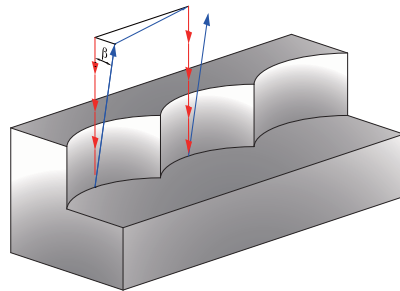

- Plunging feed direction
- Tool escape
- β Escape angle ($\beta \geq 1^\circ$)

- ▶ When your tool steps back after plunging, please get over 1° more escape angle.

▶ Helical machining

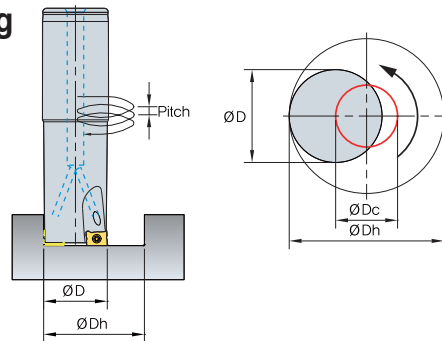

$$\text{ØDc} = \text{ØDh} - \text{ØD}$$

- ØDc = Tool center path
- ØDh = Desired hole diameter
- ØD = Tool Dia.

Designation	Diameter ØD(mm)	Helical data				
		ØDh max(mm)	Max. Pitch(mm)	ØDh min(mm)	Max. Pitch(mm)	
RM4ZS	3025HR-L25	25	48	1	30	0.4
	3032HR-L32	32	62	0	43	0.3
	3040HR-L32	40	78	0	59	0.3
RM4ZC	M3040HR	40	78	0	59	0.3
	M3050HR	50	98	0	79	0.3
	M3052HR	52	102	0	83	0.3
RM4ZM	3025HR-M12	25	48	1	30	0.4
	3032HR-M16	32	62	0	43	0.3
	3040HR-M16	40	78	0	59	0.3
RM4ZC	M4063HR	63	124	1	95	0.5
	M4066HR	66	130	1	101	0.5
	M4080HR	80	158	0	129	0.5
	M4100HR	100	198	0	169	0.3

▶ Recommended cutting condition

(mm)

ISO	Grade	LNM(E)X100605PNL-MM				LNM(E)X151008PNL-MM			
		vc(m/min)	fz(mm/t)	* max ae(mm)	** max ap(mm)	vc(m/min)	fz(mm/t)	* max ae(mm)	** max ap(mm)
P	PC3500	100~250	0.05~0.25	9	1.5	120~250	0.05~0.25	14	2.5
M	PC5300	100~250	0.08~0.30			120~250	0.08~0.30		
K	PC6510	80~180	0.05~0.20			100~180	0.05~0.20		

* max ae(mm) : (Plunging) max. radial depth of cut

** max ap(mm) : (Shouldering / Facing) max depth of cut



Rich Mill RM8


▶ Double sided insert to use 8 cutting edges

- ▶ Innovative double sided insert makes it possible to use 8 cutting edges. It is more economical than conventional single sided insert
- ▶ The unique geometry and high rake angle of cutting edge guarantees excellent surface finish. Applicable for various workpieces like steel, stainless steel, cast iron, aluminum
- ▶ Combined with the innovative geometry and various grades provided the tool offers durability and excellent tool life
- ▶ Various pitches and chip breakers can be applicable for diverse machining.
- ▶ Light Rich mill cutter can be useful for high speed machining and low power machine



▶ Through coolant system

- ▶ Exclusive coolant bolt is adapted to get better chip evacuation and more powerful cooling. To get optimal chip evacuation, the direction of coolant injection has been designed to reach to each cutting edge directly. Through coolant arbor is required.

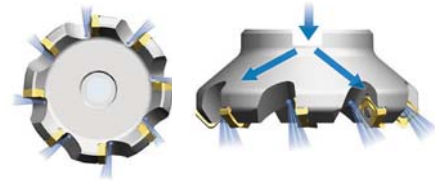

Through coolant system for decreasing cutting heat and good chip evacuation

▶ Chip breaker

Insert	Cutting edge	Features
For aluminum MA		Due to sharp cutting edge and buffed surface, it has good chip flow and welding resistance
Hard-to-cut material ML		Chip breaker with low cutting load is optimal for machining hard-to-cut materials.
Light cutting MF		Due to low cutting load, it is good for light cutting and difficult-to-cut material

Insert	Cutting edge	Features
General cutting MM		It is suitable design for general milling
Wiper W		Specialized edge design can be suitable for excellent surface roughness operation

▶ Features of insert

Insert	Cutting edge	Features
	View-A 	High rake chip breaker & positive setting angle for low cutting load
	View-B 	Designed wiper technology in minor cutting edge for improved surface roughness
	Chip breaker 	Low cutting load due to the positive setting and high rake angle chip breaker

▶ Features of cutter



Shape	Cutting edge	Features
		High rake angle makes positive setting angle for low cutting load
		Suitable for facing and chamfering • RM8A A=45° • RM8E A=75° • RM8Q A=88°

▶ Recommended cutting condition

ISO	Grade	SNM(E)X1206A(E)NN-MF		SNM(E)X1206A(E)NN-MM		SNEX1206A(E)NN-MA		Max-ap	SNM(E)X1507A(E)NN-MF		SNM(E)X1507A(E)NN-MM		Max-ap
		vc(m/min)	fz (mm/t)	vc(m/min)	fz (mm/t)	vc(m/min)	fz (mm/t)		vc(m/min)	fz (mm/t)	vc(m/min)	fz (mm/t)	
P	NC5330	-	-	150~300	0.10~0.35	150~300	0.10~0.35	RM8A 6.0mm	-	-	150~300	0.10~0.35	RM8A 7.5mm
	NCM325	200~300	0.05~0.30	150~300	0.10~0.35	150~300	0.10~0.35		200~300	0.05~0.30	150~300	0.10~0.35	
	PC3500	200~300	0.05~0.30	150~300	0.10~0.35	150~300	0.10~0.35		200~300	0.05~0.30	150~300	0.10~0.35	
M	PC9530	90~150	0.05~0.25	90~150	0.10~0.35	-	-	RM8E 9.0mm	90~150	0.10~0.30	90~150	0.10~0.35	RM8E 11mm
	PC5300	90~150	0.05~0.25	90~150	0.10~0.35	-	-		90~150	0.10~0.30	90~150	0.10~0.35	
K	PC6510	150~300	0.08~0.35	150~300	0.10~0.40	150~300	0.10~0.40	RM8Q 11.5mm	150~300	0.08~0.35	150~300	0.10~0.40	
	PC5300	150~300	0.08~0.35	150~300	0.10~0.40	150~300	0.10~0.40		150~300	0.08~0.35	150~300	0.10~0.40	

Rich Mill RMH8


- ▶ **Screw on clamping system**
 - ▶ Adopt and stable clamping system
- ▶ **Reinforced rigidity and enhanced clamping power**
 - ▶ Applying shim system, prevent cutter damage when insert breaks
- ▶ **Adopting exchangeable shim**
 - ▶ Using various kinds of cutter (Approach angle 45°, 75°, 88°)
 - ▶ Stable clamping power with insert

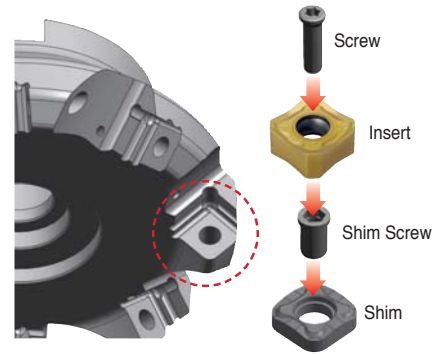

RMH8A
(AA 45°)



RMH8E
(AA 75°)




RMH8Q
(AA 88°)


Rich Mill RMT8

- ▶ **New generation clamping system**
 - ▶ New latch clamping system provides a powerful cutting force and an easy insert change
 - ▶ New grades with chipping resistance provides good surface roughness and better tool life
 - ▶ Due to the specially designed chip breaker, all operations are possible
 - ▶ RMT with various pitches can replace conventional ISO milling tool


Features of RMT

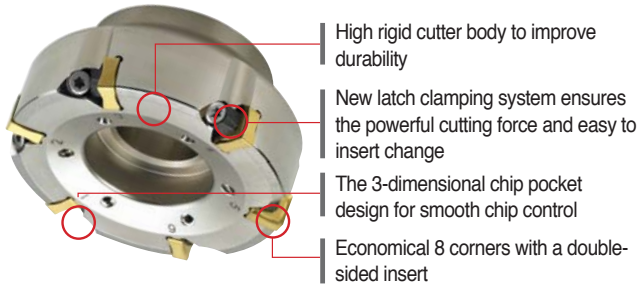

Features of RMT insert(using R/L)

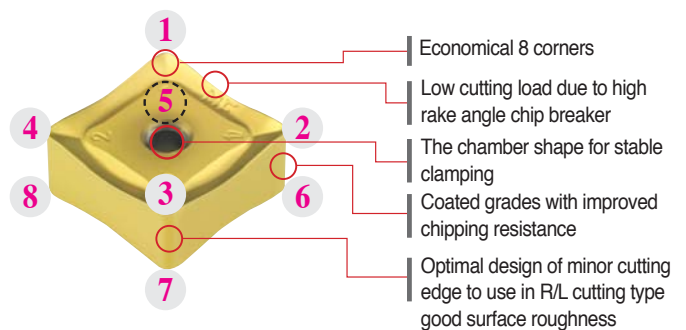

Clamping force analysis

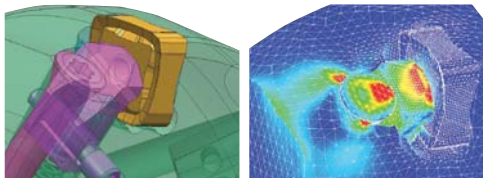

Clamping force analysis

Insert		Cutting edge	Features
Fine finishing MF			Our specialized insert design creates low cutting forces suitable for light cutting, HRSA
Strengthen MM			Suitable geometry design for general milling has wider ranges of machining

Recommended grades and chip breakers

ISO	Grade	MM	MF
P	NCM325		○
	PC5300		○
	PC3545		○
M	PC9530		◎
K	PC6510		◎

◎ : Optimum ○ : Proper

Recommended cutting condition

ISO	Grade	MM		MF	
		vc(m/min)	fz (mm/t)	vc(m/min)	fz (mm/t)
P	NC5330	190~310	0.10~0.35	190~310	0.05~0.30
	NCM325	160~270	0.10~0.35	160~270	0.05~0.30
	PC3500	130~210	0.10~0.35	130~210	0.05~0.30
M	PC9530	90~150	0.05~0.30	90~150	0.05~0.30
K	PC6510	140~230	0.10~0.40	140~230	0.08~0.35



Rich Mill RM16

- Features**
- ▶ Economical 16 cutting edges
 - ▶ Reduces cost in medium cutting
 - ▶ Wiper insert can be used for good surface roughness
 - ▶ Optimal matching of the special cutting edge geometry with variety of new grades provides consistence & long tool
 - ▶ When it is used 16 corners, maximum cutting depth is 5.5mm, but it is used 8 corners, maximum cutting depth is 13mm
 - ▶ Wiper insert is placed 0.05mm lower than facing insert in cutter
 - ▶ When feed is bigger than wiper cutting edge length(7mm), 2 wiper inserts are placed in symmetrical position



Chip breaker

Insert	Cutting edge	Features
Aluminum Cutting light MA		With sharp edge application, the better productivity has been accomplished, especially for Aluminum cutting.
Light cutting MF		Due to low cutting load, it is good for light cutting and difficult-to-cut material.
Hard-to-cut material ML		Chip breaker with low cutting load is optimal for machining hard-to-cut materials.
General cutting MM		It is suitable design for general milling.
Wiper W		It has better surface roughness than MM and MF chip breakers.

Instruction for wiper insert

Hand	Correct setting	Incorrect setting			
Right hand					
Decision	○	×	×	×	×
Left hand					
Decision	○	×	×	×	×

Through coolant system

- Well designed chip pocket for better chip flow
- Through coolant system reduces cutting heat and improves chip evacuation











Recommended cutting condition

ISO	Grade	ONM(H)X060608-MM		ONM(H)X060608-MF		ONHX060608-W		ONM(H)X080608-MM		ONM(H)X080608-MF		ONHX080608-W	
		vc(m/min)	fz (mm/t)	vc(m/min)	fz (mm/t)	vc(m/min)	fz (mm/t)	vc(m/min)	fz (mm/t)	vc(m/min)	fz (mm/t)	vc(m/min)	fz (mm/t)
P	NCM325	150~300	0.10~0.35	200~300	0.05~0.30	200~300	0.05~0.20	150~300	0.10~0.40	200~300	0.05~0.35	200~300	0.05~0.25
	PC3500	150~300	0.10~0.35	200~300	0.05~0.30	200~300	0.05~0.20	150~300	0.10~0.40	200~300	0.05~0.35	200~300	0.05~0.25
M	PC6510	120~180	0.10~0.35	100~180	0.05~0.30	100~180	0.05~0.20	120~180	0.10~0.40	100~180	0.05~0.35	100~180	0.05~0.25
K	PC9530	150~300	0.10~0.40	150~300	0.08~0.35	150~300	0.05~0.25	150~300	0.10~0.45	150~300	0.08~0.40	150~300	0.05~0.30











Cutters

	A.A	Designation	Shape	Cutter Diameter	Application			Features	Page					
RM3	90°	RM3PC(M)3000 <i>New</i>		Ø40~Ø80	XNKT060405PNER-ML	XNKT060405PNSR-MM		<ul style="list-style-type: none"> Economical 3 corners. Perfect perpendicularity Longer tool life due to direct injection into the cutting edge of insert 	E66					
		RM3PC(M)4000 <i>New</i>		Ø40~Ø125	XNCT080508PNFR-MA XNKT080508PNER-ML XNKT080508PNSR-MM	XNKT080512PNSR-MM XNKT080516PNSR-MM XNKT080520PNSR-MM			E67					
RM4	90°	RM4PC(M)3000		Ø40~Ø100	LNE X100605PNR-MF LNE X100608PNR-MM LNM X100605aPNR-MF LNM X100608PNR-MM LNE X100605PNR-MM LNE X100605PNR-MA LNM X100605PNR-MM LNE X100605PNL-MM LNE X100608PNR-MF LNM X100605PNL-MM LNM X100608PNR-MF			<ul style="list-style-type: none"> Economical 4 corners. Screw on type for slotting, facing. 	E70					
		RM4PC(M)4000			Ø50~Ø160	LNE X151004PNR-MF LNE X151016PNR-MF LNM X151004PNR-MF LNM X151016PNR-MF LNE X151004PNR-MM LNE X151016PNR-MM LNM X151004PNR-MM LNM X151016PNR-MM LNE X151008PNR-MF LNE X151004PNR-MA LNM X151008PNR-MF LNE X151008PNR-MA LNE X151008PNR-MM LNE X151008PNL-MM LNM X151008PNR-MM LNM X151008PNL-MM				<ul style="list-style-type: none"> Economical 4 corners. Screw on type for slotting, facing. 	E71			
		RM4ZC(M)3000 <i>New</i>				Ø40~Ø52					LNE X100605PNL-MM	LNM X100605PNL-MM	<ul style="list-style-type: none"> Economical 4 corners. Optimal insert application for vertical machining 	E83
		RM4ZC(M)4000 <i>New</i>				Ø63~Ø100					LNE X151008PNL-MM	LNM X151008PNL-MM		
RM8	45°	RM8AC(M)4000		Ø50~Ø400	SNE X1206ANN-MA SNE X1206ANN-W SNE X1206ANN-MF SNE X1507ANN-MF SNM X1206ANN-MF SNM X1507ANN-MF SNE X1206ANN-ML SNE X1507ANN-ML SNE X1206ANN-MM SNE X1507ANN-MM SNM X1206ANN-MM SNM X1507ANN-MM			<ul style="list-style-type: none"> Economical 8 corners. Low cutting load and excellent smooth cutting. 	E85					
		RM8AC(M)5000		Ø80~Ø400					E87					
	75°	RM8EC(M)4000		Ø50~Ø400	SNE X1206ENN-MA SNE X1206ENN-ML SNE X1206ENN-MF SNE X1206ENN-MM SNM X1206ENN-MF SNM X1206ENN-MM			<ul style="list-style-type: none"> Economical 8 corners. Low cutting load and excellent smooth cutting. 	E89					
		RM8EC(M)5000		Ø80~Ø400	SNE X1507ENN-MF SNE X1507ENN-MM SNM X1507ENN-MF SNM X1507ENN-MM SNE X1507ENN-ML				E91					
	88°	RM8QC(M)4000		Ø63~Ø200	SNE X1206QNN-MA SNE X120612-MA SNE X1206QNN-MF SNE X120612-MF SNM X1206QNN-MF SNM X120612-MF SNE X1206QNN-ML SNE X120612-ML SNE X1206QNN-MM SNE X120612-MM SNM X1206QNN-MM SNM X120612-MM			E93						
	45°	RMH8AC(M)4000 <i>New</i>		Ø50~Ø400	SNE X1206ANN-MA SNE X1206ANN-MM SNE X1206ANN-MF SNM X1206ANN-MM SNM X1206ANN-MF SNE X1206ANN-W SNE X1206ANN-ML			<ul style="list-style-type: none"> Economical 8 corners. Low cutting load and excellent smooth cutting. 	E86					
		RMH8AC(M)5000 <i>New</i>		Ø80~Ø400	SNE X1507ANN-MF SNE X1507ANN-MM SNM X1507ANN-MF SNM X1507ANN-MM SNE X1507ANN-ML				E88					
	75°	RMH8EC(M)4000 <i>New</i>		Ø50~Ø400	SNE X1206ENN-MA SNE X1206ENN-ML SNE X1206ENN-MF SNE X1206ENN-MM SNM X1206ENN-MF SNM X1206ENN-MM			<ul style="list-style-type: none"> Economical 8 corners. Low cutting load and excellent smooth cutting. 	E90					
		RMH8EC(M)5000 <i>New</i>		Ø80~Ø400	SNE X1507ENN-MF SNE X1507ENN-MM SNM X1507ENN-MF SNM X1507ENN-MM SNE X1507ENN-ML				E92					
	88°	RMH8QC(M)4000 <i>New</i>		Ø63~Ø200	SNE X1206QNN-MA SNE X120612-MA SNE X1206QNN-MF SNE X120612-MF SNM X1206QNN-MF SNM X120612-MF SNE X1206QNN-ML SNE X120612-ML SNE X1206QNN-MM SNE X120612-MM SNM X1206QNN-MM SNM X120612-MM			E94						




	A.A	Designation	Shape	Cutter Diameter	Application		Features	Page
RM8	45°	RMT8A(M) 4000/5000		Ø80~Ø315	SNCF1206ANN-MF / MM SNCF1507ANN-MF / MM	SNMF1206ANN-MF / MM SNMF1507ANN-MF / MM		E95 E96
	75°	RMT8E(M) 4000/5000		Ø80~Ø315	SNCF1206ENN-MF / MM SNCF1507ENN-MF / MM	SNMF1206ENN-MF / MM SNMF1507ENN-MF / MM		E97 E98
	88°	RMT8Q(M)4000		Ø80~Ø315	SNCF1206QNN-MF	SNMF1206QNN-MF		E99
RM16	45°	RM16AC(M) 6000/8000		Ø63~Ø400	ONHX060608-MF / ML / MM ONMX060608-MF / MM ONHX0606ANN-MF / MM ONMX0606ANN-MF / MM ONHX080608-MF / ML / MM ONMX080608-MF / MM	ONHX0806ANN-MF / MM ONMX0806ANN-MF / MM ONHX060608-MA ONHX060608-W ONHX080608-MA ONHX080608-W		E100 E101

Shanks / Modulares

	A.A	Designation	Shape	Cutter Diameter	Application		Features	Page
RM3	90°	RM3PS3000 <i>New</i>		Ø20~Ø40	XNKT060405PNER-ML	XNKT060405PNSR-MM		E68
		RM3PS4000 <i>New</i>		Ø32~Ø63	XNKT080508PNER-ML XNKT080508PNSR-MM	XNKT080512PNSR-MM XNKT080516PNSR-MM XNCT080520PNSR-MM		E69
RM4	90°	RM4PS3000		Ø14~Ø50	LNEX100605PNR-MF LNMX100605PNR-MF LNEX100605PNR-MM LNMX100605PNR-MM LNEX100608PNR-MF LNMX100608PNR-MF	LNEX100608PNR-MM LNMX100608PNR-MM LNEX100605PNR-MA LNMX100605PNL-MM		E80
		RM4PS4000		Ø32~Ø63	LNEX151004PNR-MF LNMX151004PNR-MF LNEX151004PNR-MM LNMX151004PNR-MM LNEX151008PNR-MF LNMX151008PNR-MF LNEX151008PNR-MM LNMX151008PNR-MM	LNEX151016PNR-MF LNMX151016PNR-MF LNEX151016PNR-MM LNMX151016PNR-MM LNEX151004PNR-MA LNMX151008PNR-MA LNEX151008PNL-MM LNMX151008PNL-MM		E81
		RM4ZS3000		Ø25~Ø40	LNEX100605PNL-MM	LNMX100605PNL-MM		E84
		RM4PM3000		Ø14~Ø50	LNEX100605PNR-MF LNMX100605PNR-MF LNEX100605PNR-MM LNMX100605PNR-MM LNEX100608PNR-MF LNMX100608PNR-MF	LNEX100608PNR-MM LNMX100608PNR-MM LNEX100605PNR-MA LNMX100605PNL-MM LNMX100605PNL-MM		E82
		RM4ZM3000		Ø25~Ø40	LNEX100605PNL-MM	LNMX100605PNL-MM		E84

RM3PC(M)3000 *New*



Designation		Stock	⊙	ØD	ØD ₂	Ød	Ød ₁	Ød ₂	a	b	E	F	ap	kg
RM3PCM	3040HR	●	5	40	35	16	9	14	8.4	5.6	16	40	5.5	0.2
	3040HR-M	●	6	40	35	16	9	14	8.4	5.6	16	40	5.5	0.2
	3050HR	●	6	50	41	22	11	18	10.4	6.3	20	40	5.5	0.3
	3050HR-M	●	7	50	41	22	11	18	10.4	6.3	20	40	5.5	0.3
	3063HR	●	7	63	49	22	11	18	10.4	6.3	20	40	5.5	0.49
	3063HR-M	●	8	63	49	22	11	18	10.4	6.3	20	40	5.5	0.49
RM3PC	3080HR	(●)	8	80	57	25.4(27)	14	25	9.5(12.4)	6(7)	25(23)	50	5.5	0.87
(RM3PCM)	3080HR-M	(●)	10	80	57	25.4(27)	14	25	9.5(12.4)	6(7)	25(23)	50	5.5	0.88

() Metric Size, ● Stock item

▶ Available Inserts



XNKT-ML



XNKT-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
XNKT 060405PNER-ML						●			●	●	●			
060405PNSR-MM						●			●	●	●			E23

▶ Available Arbors


Designation	Available Arbors	
	RM3PC	RM3PCM
RM3PC (RM3PCM) 3040HR	-	BT□□-FMC16-□□
3040HR-M		
3050HR	BT□□-FMC22-□□	
3050HR-M		
3063HR		
3063HR-M		
3080HR	BT□□-FMA25.4-□□	BT□□-FMC27-□□
3080HR-M		

▶ Parts

Specification	Screw	Wrench
Ø40~Ø80	FTNA0306	TW09S



RM3PC(M)4000 *New*



													(mm)	
Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		
RM3PCM	4040HR	●	3	40	35	16	16	14	8.4	5.6	19	40	8.0	0.19
	4040HR-M	●	4	40	35	16	16	14	8.4	5.6	19	40	8.0	0.19
	4050HR	●	4	50	42	22	22	18	10.4	6.3	20	40	8.0	0.28
	4050HR-M	●	5	50	42	22	22	18	10.4	6.3	20	40	8.0	0.29
	4063HR	●	5	63	49	22	22	18	10.4	6.3	20	40	8.0	0.54
	4063HR-M	●	6	63	49	22	22	18	10.4	6.3	20	40	8.0	0.53
RM3PC (RM3PCM)	4080HR	●(●)	5	80	57	25.4(27)	25.4(27)	20	9.5(12.4)	6(7)	25(23)	50	8.0	1.08
	4080HR-M	●(●)	7	80	57	25.4(27)	25.4(27)	20	9.5(12.4)	6(7)	25(23)	50	8.0	1.06
	4100HR	●(●)	7	100	67	31.75(32)	31.75(32)	26	12.7(14.4)	8(8)	33(25)	63(50)	8.0	1.68
	4100HR-M	●(●)	8	100	67	31.75(32)	31.75(32)	26	12.7(14.4)	8(8)	33(25)	63(50)	8.0	1.67
	4125HR	●(●)	8	125	90	38.1(40)	38.1(40)	32	15.9(16.4)	9(10)	38(29)	63	8.0	3.45
	4125HR-M	●(●)	10	125	90	38.1(40)	38.1(40)	32	15.9(16.4)	9(10)	38(29)	63	8.0	3.45

() Metric Size, ● Stock item

▶ Available Inserts



Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
XNCT 080508PNFR-MA															
XNKT 080508PNSR-MM						●			●	●	●				E22
080508PNER-ML						●			●	●	●				E23
080512PNSR-MM															
080516PNSR-MM															
080520PNSR-MM															

▶ Available Arbors

Designation	Available Arbors	
	RM3PC	RM3PCM
RM3PC (RM3PCM)	4040HR	BT□□-FMC16-□□
	4050HR	BT□□-FMC22-□□
	4063HR	
4080HR	BT□□-FMA25.4-□□	BT□□-FMC27-□□
4100HR	BT□□-FMA31.75-□□	BT□□-FMC32-□□
4125HR	BT□□-FMA38.1-□□	BT□□-FMC40-□□

▶ Parts

Specification		
Ø40~Ø125	Screw FTNA0408	Wrench TW15S

▶ Available Inserts E22, E23 ▶ Available Adaptors E318 ~ E320



RM3PS3000 *New*

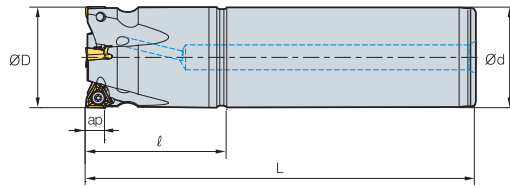


Fig. 1

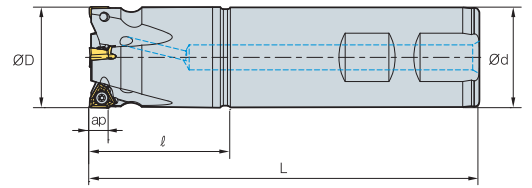


Fig. 2



(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap		Fig.
RM3PS 3020HR-2S20	●	2	20	20	35	100	5.5	0.21	2
3020HR-2L20	●	2	20	20	35	200	5.5	0.43	1
3021HR-2S20	●	2	21	20	30	100	5.5	0.21	2
3021HR-2L20	●	2	21	20	30	200	5.5	0.43	1
3025HR-3S20	●	2	25	20	35	115	5.5	0.27	2
3025HR-3L20	●	2	25	20	35	200	5.5	0.46	1
3025HR-3S25	●	3	25	25	40	115	5.5	0.36	2
3025HR-3L25	●	3	25	25	40	200	5.5	0.66	1
3026HR-2S20	●	2	26	20	35	115	5.5	0.29	2
3026HR-2L20	●	2	26	20	35	200	5.5	0.47	1
3026HR-3S20	●	3	26	20	35	115	5.5	0.28	2
3026HR-3L20	●	3	26	20	35	200	5.5	0.47	1
3026HR-2S25		2	26	25	35	115	5.5	0.37	2
3026HR-2L25		2	26	25	35	200	5.5	0.68	1
3026HR-3S25	●	3	26	25	35	115	5.5	0.37	2
3026HR-3L25	●	3	26	25	35	200	5.5	0.68	1
3032HR-3S25		3	32	25	42	125	5.5	0.48	2
3032HR-3L25		3	32	25	42	200	5.5	0.74	1
3032HR-4S25	●	4	32	25	42	125	5.5	0.48	2
3032HR-4L25	●	4	32	25	42	200	5.5	0.74	1
3032HR-4S32	●	4	32	32	42	125	5.5	0.68	2
3032HR-4L32	●	4	32	32	42	200	5.5	1.13	1
3033HR-3S25		3	33	25	42	125	5.5	0.49	2
3033HR-3L25		3	33	25	42	200	5.5	0.75	1
3033HR-4S25	●	4	33	25	42	125	5.5	0.49	2
3033HR-4L25	●	4	33	25	42	200	5.5	0.75	1
3033HR-4S32	●	4	33	32	42	125	5.5	0.70	2
3033HR-4L32	●	4	33	32	42	200	5.5	1.14	1
3040HR-4S32		4	40	32	45	130	5.5	0.83	2
3040HR-4L32		4	40	32	45	200	5.5	1.24	1
3040HR-5S32		5	40	32	45	130	5.5	0.83	2
3040HR-5L32		5	40	32	45	200	5.5	1.24	1

● Stock item

▶ Available Inserts



XNKT-ML



XNKT-MM

Designation	Cermet		Coated						Uncoated			Page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400		A30	G10E
XNKT 060405PNER-ML						●			●	●	●			
060405PNSR-MM						●			●	●	●			

▶ Parts

Specification		
Ø20~Ø40	Screw FTNA0306	Wrench TW09S



RM3PS4000 *New*

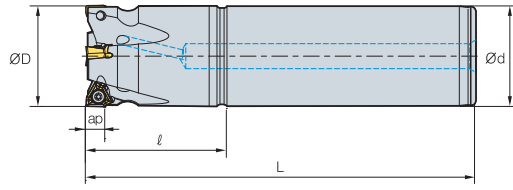


Fig. 1

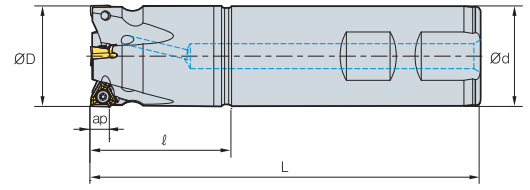


Fig. 2



• AR : -5°
• RR : -5°~7°

(mm)										
Designation	Stock		ØD	Ød	ℓ	L	ap		Fig.	
RM3PS 4032HR-3S32	●	3	32	32	42	125	8	0.67	2	
4032HR-3L32		3	32	32	42	200	8	1.11	1	
4033HR-3S32	●	3	33	32	42	125	8	0.68	2	
4033HR-3L32		3	33	32	42	200	8	1.13	1	
4040HR-3S32		3	40	32	42	130	8	0.8	2	
4040HR-3L32		3	40	32	42	200	8	1.21	1	
4040HR-4S32	●	4	40	32	42	130	8	0.81	2	
4040HR-4L32		4	40	32	42	200	8	1.22	1	
4050HR-4S32	●	4	50	32	42	135	8	0.99	2	
4050HR-4L32		4	50	32	42	200	8	1.38	1	
4050HR-4S40	●	4	50	40	42	135	8	1.32	2	
4050HR-4L40		4	50	40	42	200	8	1.94	1	
4050HR-5S32	●	5	50	32	42	135	8	1.02	2	
4050HR-5L32		5	50	32	42	200	8	1.4	1	
4050HR-5S40		5	50	40	42	135	8	1.35	2	
4050HR-5L40		5	50	40	42	200	8	1.96	1	
4063HR-5S32		5	63	32	42	135	8	1.31	2	
4063HR-5L32		5	63	32	42	200	8	1.7	1	
4063HR-5S40		5	63	40	42	135	8	1.64	2	
4063HR-5L40		5	63	40	42	200	8	2.25	1	
4063HR-6S32		6	63	32	42	135	8	1.31	2	
4063HR-6L32		6	63	32	42	200	8	1.7	1	
4063HR-6S40		6	63	40	42	135	8	1.64	2	
4063HR-6L40		6	63	40	42	200	8	2.26	1	

● Stock item

▶ Available Inserts



XNCT-MA



XNKT-ML



XNKT-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
XNCT 080508PNFR-MA															
XNKT 080508PNSR-MM						●			●	●	●				E22
080508PNER-ML						●			●	●	●				E23
080512PNSR-MM															
080516PNSR-MM															
080520PNSR-MM															

▶ Parts

Specification		
Ø32~Ø63	Screw FTNA0408	Wrench TW15S

▶ Available Inserts E22, E23

▶ Available Adaptors E318 ~ E320

RM4PC(M)3000





Fig. 1

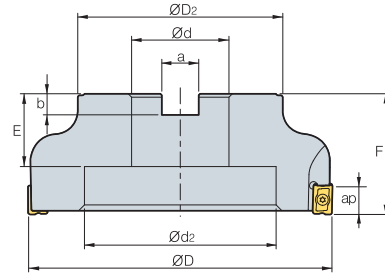


Fig. 2



(mm)

Designation	Stock		ØD	ØD ₂	Ød	Ød ₁	Ød ₂	a	b	E	F	ap		Bolt	Fig.	
RM4PCM	3040HR	●	4	40	35	16	9	14	8.4	5.6	19	40	9.0	0.24	SB0825	1
	3040HR-M	●	5	40	35	16	9	14	8.4	5.6	19	40	9.0	0.23	SB0825	1
	3050HR	●	5	50	42	22	11	18	10.4	6.3	20	40	9.0	0.36	SB1025	1
	3050HR-M	●	7	50	42	22	11	18	10.4	6.3	20	40	9.0	0.35	SB1025	1
	3063HR	●	7	63	49	22	11	18	10.4	6.3	20	40	9.0	0.61	SB1025	1
	3063HR-M	●	9	63	49	22	11	18	10.4	6.3	20	40	9.0	0.6	SB1025	1
RM4PC (RM4PCM)	3080HR	●	8	80	57	25.4(27)	14	20	9.5(12.4)	6.0(7.0)	25(23)	50	9.0	1.25(1.24)	SB1230	1
	3080HR-M	●	10	80	57	25.4(27)	14	20	9.5(12.4)	6.0(7.0)	25(23)	50	9.0	1.24(1.23)	SB1230	1
	3100HR	●	9	100	67	31.75(32)	18	26	12.7(14.4)	8.0(8.0)	33(25)	63(50)	9.0	2.46(1.94)	SB1630	1
	3100HR-M	●	12	100	67	31.75(32)	18	26	12.7(14.4)	8.0(8.0)	33(25)	63(50)	9.0	2.44(1.93)	SB1630	1

() Metric Size, ● Stock item

▶ Available Inserts



Designation	Cermet		Coated						Uncoated			Page			
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400		A30	G10E	H01
LNEX	100605PNR-MF				●										E09
	100605PNR-MM				●	●		●	●	●					
	100605PNR-MA												●		
	100605PNL-MM					●									
	100608PNR-MF					●			●	●					
LNMX	100605PNR-MF				●				●	●	●				
	100605PNR-MM				●	●		●	●	●					
	100608PNR-MF				●				●	●					
	100608PNR-MM				●				●	●					
	100605PNL-MM					●	●			●					

▶ Available Arbors

Designation	Available Arbors	
	RM4PC	RM4PCM
RM4PC(M)	3040HR	
	3040HR-M	-
	3050HR	
	3050HR-M	-
	3063HR	
	3063HR-M	BT□□-FMC22-□□
	3080HR	
	3080HR-M	BT□□-FMA25.4-□□
	3100HR	
	3100HR-M	BT□□-FMA31.75-□□
		BT□□-FMC27-□□
	BT□□-FMC32-□□	

▶ Parts




Specification		
Ø40~Ø100	Screw FTKA0307	Wrench TW09S

▶ Available Inserts E09

▶ Available Adaptors E318 ~ E320



RM4PC(M)4000

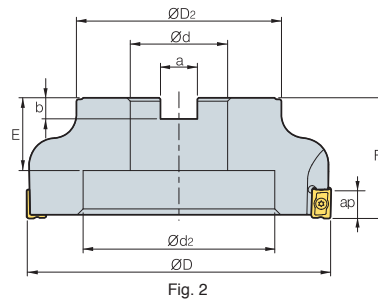

(mm)

Designation	Stock		ØD	ØD ₂	Ød	Ød ₁	Ød ₂	a	b	E	F	ap		Bolt	Fig.
RM4PCM 4050HR		3	50	46	22	11	18	10.4	6.3	20	40	14	0.36	SB1025	1
4050HR-M		4	50	46	22	11	18	10.4	6.3	20	40	14	0.35	SB1025	1
4063HR		4	63	49	22	11	18	10.4	6.3	20	40	14	0.56	SB1025	1
4063HR-M		6	63	49	22	11	18	10.4	6.3	20	40	14	0.57	SB1025	1
RM4PC (MM4PCM) 4080HR	● (●)	5	80	57	25.4(27)	14	20	9.5(12.4)	6.0(7.0)	25(23)	50	14	1.18(1.16)	SB1230	1
4080HR-M	● (●)	7	80	57	25.4(27)	14	20	9.5(12.4)	6.0(7.0)	25(23)	50	14	1.17(1.14)	SB1230	1
4100HR	● (●)	5	100	67	31.75(32)	18	26	12.7(14.4)	8.0(8.0)	33(25)	63(50)	14	2.35(1.84)	SB1630	1
4100HR-M	● (●)	8	100	67	31.75(32)	18	26	12.7(14.4)	8.0(8.0)	33(25)	63(50)	14	2.31(1.82)	SB1630	1
4125HR	● (●)	7	125	87	38.1(40)	22	32	15.9(16.4)	10(9.0)	35(30)	63	14	3.87(3.79)	SB2040	1
4125HR-M	● (●)	10	125	87	38.1(40)	22	32	15.9(16.4)	10(9.0)	35(30)	63	14	3.82(3.70)	SB2040	1
4160R	● (●)	8	160	107	50.8(40)	-	100	19(16.4)	11(9.0)	38(32)	63	14	5.0(4.75)	MBA	2
4160R-M	● (●)	12	160	107	50.8(40)	-	100	19(16.4)	11(9.0)	38(32)	63	14	4.97(4.71)	MBA	2

() Metric Size, ● Stock item

Available Inserts



Designation	Cermet		Coated						Uncoated		Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3545	PC9530	PC8510	PC5300	PC5400		A30	G10E
L NEX 151004PNR-MF				●				●					
151004PNR-MM					●								
151004PNR-MA													●
151008PNR-MF								●	●	●			
151008PNR-MM					●			●	●	●			
151008PNR-MA													●
151008PNL-MM					●								
151016PNR-MF					●			●					
151016PNR-MM								●	●				
L NMX 151004PNR-MF					●			●					
151004PNR-MM								●					
151008PNR-MF					●			●	●				
151008PNR-MM					●	●	●	●	●	●			
151008PNL-MM													
151016PNR-MF													
151016PNR-MM					●								

E09

Available Arbors

Designation	Available Arbors	
	RM4PC	RM4PCM
RM4PC(M) 4050HR		
4050HR-M	-	BT□□-FMC22-□□
4063HR		
4063HR-M		
4080HR	BT□□-FMA25.4-□□	BT□□-FMC27-□□
4080HR-M		
4100HR	BT□□-FMA31.75-□□	BT□□-FMC32-□□
4100HR-M		
4125HR	BT□□-FMA38.1-□□	BT□□-FMB40-□□
4125HR-M		BT□□-FMC40-□□
4160R	BT□□-FMA50.8-□□	
4160R-M		



Parts

Specification		
Ø50~Ø160	Screw FTKA0412B	Wrench TW15S

Available Inserts E09

Available Adaptors E318 ~ E320

RM4PFCB3000



(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	F	W	T-max	
RM4PFCB	308015R		10	80	40	25.4	9.5	6	25	50	15	19
	308017R		10	80	40	25.4	9.5	6	25	50	17	19
	310015R		12	100	54	31.75	12.7	8	32	50	15	22
	310017R		12	100	54	31.75	12.7	8	32	50	17	22
	312515R		14	125	70	38.1	15.9	10	38	60	15	26
	312517R		14	125	70	38.1	15.9	10	38	60	17	26
	316015R		16	160	70	38.1	15.9	10	38	60	15	44
	316017R		16	160	70	38.1	15.9	10	38	60	17	44

● Stock item

▶ Available Inserts



LNEX-MM



LNMX-MM

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3930	PC6510	PC5300	PC5400	A30	G10E		H01
LNEX					●		●		●	●	●				E09
LNMX					●		●	●	●	●					
					●										

▶ Available Arbors

Designation	Available Arbors		Designation	Available Arbors	
	RM4PFCB			RM4PFCB	
RM4PFCB	308015R	BT□□ -FMA 25.4-□□	RM4PFCB	312515R	BT□□ -FMA38.1-□□
	308017R			312517R	
	310015R	BT□□ -FMA 31.75-□□		316015R	
	310017R			316017R	

▶ Parts




Specification		
Ø80-Ø160	Screw FTKA0307	Wrench TW09S

▶ Available Inserts E09

▶ Available Adaptors E318 - E320



RM4PFCB4000



(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	F	W	T-max
RM4PFCB 408022R			6	80	40	25.4	9.5	6	25	50	19
408024R			6	80	40	25.4	9.5	6	25	50	19
408026R			6	80	40	25.4	9.5	6	25	50	19
408028R			6	80	40	25.4	9.5	6	25	50	19
410022R			8	100	54	31.75	12.7	8	32	50	22
410024R			8	100	54	31.75	12.7	8	32	50	22
410026R			8	100	54	31.75	12.7	8	32	50	22
410028R			8	100	54	31.75	12.7	8	32	50	22
412522R			10	125	70	38.1	15.9	10	38	60	26
412524R			10	125	70	38.1	15.9	10	38	60	26
412526R			10	125	70	38.1	15.9	10	38	60	26
412528R			10	125	70	38.1	15.9	10	38	60	26
416022R			12	160	70	38.1	15.9	10	38	60	44
416024R			12	160	70	38.1	15.9	10	38	60	44
416026R			12	160	70	38.1	15.9	10	38	60	44
416028R			12	160	70	38.1	15.9	10	38	60	44

● Stock item

▶ Available Inserts



LNEX-MM



LNMX-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
LNEX 151008PNR-MM					●				●	●	●			
151008PNL-MM					●									
LNMX 151008PNR-MM					●	●	●	●	●	●	●			
151008PNL-MM					●	●	●	●	●	●	●			

▶ Available Arbors

Designation	Available Arbors		Designation	Available Arbors	
	RM4PFCB			RM4PFCB	
RM4PFCB 408022R	BT□□-FMA 25.4-□□		RM4PFCB 412522R	BT□□-FMA38.1-□□	
408024R					
408026R					
408028R					
410022R	BT□□-FMA 31.75-□□		412524R		
410024R					
410026R					
410028R					
416022R					
416024R			412526R		
416026R			412528R		
416028R			416022R		
			416024R		
			416026R		
			416028R		




▶ Parts

Specification		
Ø80-Ø160	Screw FTKA0412B	Wrench TW15S

▶ Available Inserts E09

▶ Available Adaptors E318 ~ E320

RM4PHCB3000

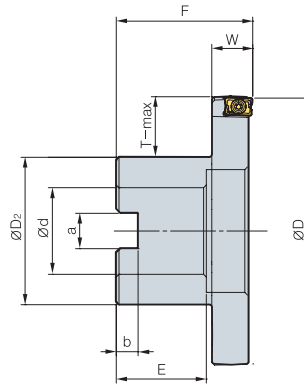

(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	F	W	T-max
RM4PHCB 308015R		10	80	40	25.4	9.5	6	25	50	15	19
310015R		12	100	54	31.75	12.7	8	32	50	15	22
312515R		14	125	70	38.1	15.9	10	38	60	15	26
316015R		16	160	70	38.1	15.9	10	38	60	15	44

● Stock item

▶ Available Inserts




LNEX-MF



LNEX-MM



LNEX-MA



LNMX-MF



LNMX-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
LNEX 100605PNR-MF					●				●	●	●			
100605PNR-MM					●		●		●	●	●			
100605PNR-MA													●	
100608PNR-MF					●				●	●	●			
100608PNR-MM					●				●	●	●			
LNMX 100605PNR-MF					●				●	●	●			
100605PNR-MM					●		●	●	●	●	●			
100608PNR-MF					●				●	●	●			
100608PNR-MM					●	●			●	●	●			

E09

▶ Available Arbors

Designation	Available Arbors	
	RM4PHCB	
RM4PHCB 308015R	BT□□ -FMA25.4-□□	
310015R	BT□□ -FMA 31.75-□□	
312515R		
316015R	BT□□ -FMA38.1-□□	

▶ Parts




Specification		
Ø80-Ø160	Screw FTKA0307	Wrench TW09S

▶ Available Inserts E09

▶ Available Adaptors E318 ~ E320



RM4PHCB4000

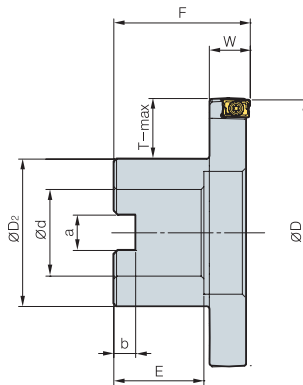

(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	F	W	T-max
RM4PHCB 408020R		6	80	40	25.4	9.5	6	25	50	20	19
410020R		8	100	54	31.75	12.7	8	32	50	20	22
412520R		10	125	70	38.1	15.9	10	38	60	20	26
416020R		12	160	70	38.1	15.9	10	38	60	20	44

● Stock item

▶ Available Inserts



LNX-MF



LNEX-MM



LNEX-MA



LNX-MF



LNX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
LNX					●				●						E09
151004PNR-MF															
151004PNR-MM									●						
151004PNR-MA														●	
151008PNR-MF										●	●	●			
151008PNR-MM					●				●	●	●				
151008PNR-MA														●	
151016PNR-MF					●				●						
151016PNR-MM									●	●					
LNX					●				●						
151004PNR-MF															
151004PNR-MM									●						
151008PNR-MF					●				●	●	●				
151008PNR-MM					●	●	●	●	●	●	●				
151016PNR-MF					●				●						
151016PNR-MM					●										

▶ Available Arbors

Designation	Available Arbors	
	RM4PHCB	
RM4PHCB 408020R	BT□□ -FMA25.4-□□	
410020R	BT□□ -FMA 31.75-□□	
412520R		
416020R	BT□□ -FMA38.1-□□	


▶ Parts

Specification		
Ø80-Ø160	Screw FTKA0412B	Wrench TW15S

▶ Available Inserts E09

▶ Available Adaptors E318 ~ E320

RM4PFCP3000

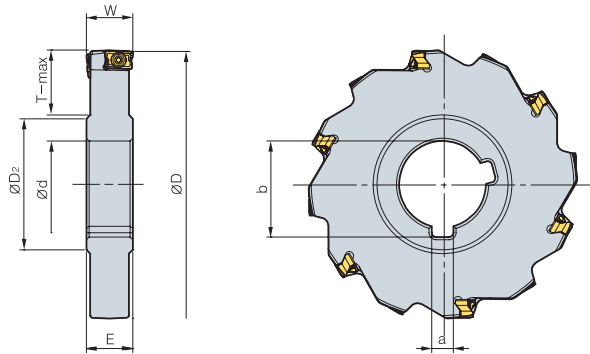

(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	W	T-max
RM4PFCP	308015R		10	80	41.5	25.4	6.35	28	15	17
	308017R		10	80	41.5	25.4	6.35	28	17	17
	310015R		12	100	48	31.75	7.94	35.2	15	24
	310017R		12	100	48	31.75	7.94	35.2	17	24
	312515R		14	125	58	38.1	9.53	42.3	15	32
	312517R		14	125	58	38.1	9.53	42.3	17	32
	316015R		16	160	58	38.1	9.53	42.3	15	49
	316017R		16	160	58	38.1	9.53	42.3	17	49

● Stock item

▶ Available Inserts



LNEX-MM



LNMX-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
LNEX	100605PNR-MM				●		●		●	●	●			
	100605PNL-MM								●	●	●			
LNMX	100605PNR-MM				●		●	●	●	●	●			
	100605PNL-MM				●									

E09

▶ Available Arbors


Designation	Available Arbors	
	RM4PFCP	
RM4PFCP	308015R 308017R	BT□□ -SCA 25.4-□□
	310015R 310017R	BT□□ -SCA 31.75-□□
	312515R 312517R 316015R 316017R	BT□□ -SCA38.1-□□

▶ Parts

Specification		
Ø80~Ø160	Screw FTKA0307	Wrench TW09S



RM4PFCP4000

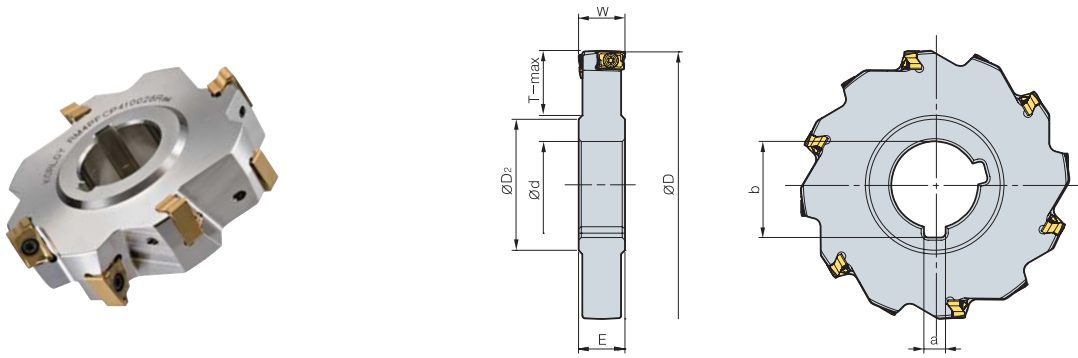

(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	W	T-max
RM4PFCP 408022R		6	80	41.5	25.4	6.35	28	22	22	17
408024R		6	80	41.5	25.4	6.35	28	24	24	17
408026R		6	80	41.5	25.4	6.35	28	26	26	17
408028R		6	80	41.5	25.4	6.35	28	28	28	17
410022R		8	100	48	31.75	7.94	35.2	22	22	24
410024R		8	100	48	31.75	7.94	35.2	24	24	24
410026R		8	100	48	31.75	7.94	35.2	26	26	24
410028R		8	100	48	31.75	7.94	35.2	28	28	24
412522R		10	125	58	38.1	9.53	42.3	22	22	32
412524R		10	125	58	38.1	9.53	42.3	24	24	32
412526R		10	125	58	38.1	9.53	42.3	26	26	32
412528R		10	125	58	38.1	9.53	42.3	28	28	32
416022R		12	160	58	38.1	9.53	42.3	22	22	49
416024R		12	160	58	38.1	9.53	42.3	24	24	49
416026R		12	160	58	38.1	9.53	42.3	26	26	49
416028R		12	160	58	38.1	9.53	42.3	28	28	49

● Stock item

▶ Available Inserts



LNEX-MM



LNMX-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC6300	PC5400	A30		G10E
LNEX 151008PNR-MM					●				●	●	●			
151008PNL-MM					●									
LNMX 151008PNR-MM					●	●	●	●	●	●	●			
151008PNL-MM					●	●	●	●	●	●	●			

▶ Available Arbors

Designation	Available Arbors		Designation	Available Arbors	
	RM4PFCB			RM4PFCB	
RM4PFCP 408022R 408024R 408026R 408028R	BT□□-SCA 25.4-□□		RM4PFCP 412522R 412524R 412526R 412528R 416022R 416024R 416026R 416028R	BT□□-SCA38.1-□□	
	BT□□-SCA 31.75-□□				



▶ Parts

Specification		
Ø80~Ø160	Screw FTKA0412B	Wrench TW15S

▶ Available Inserts E09

▶ Available Adaptors E318 ~ E320

RM4PHCP3000

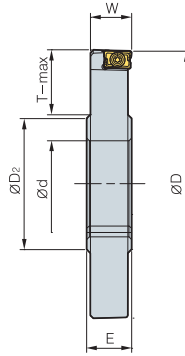

(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	W	T-max
RM4PHCP 308015R		10	80	41.5	25.4	6.35	28	16.5	15.1	17
310015R		12	100	48	31.75	7.94	35.2	16.5	15.1	24
312515R		14	125	58	38.1	9.52	42.3	16.5	15.1	32
316015R		16	160	58	38.1	9.52	42.3	16.5	15.1	49

● Stock item

Available Inserts



LNX-MF



LNX-MM



LNX-MA



LNX-MF



LNX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
LNX					●				●	●	●				E09
					●				●	●	●				
														●	
					●				●	●					
LNX					●				●	●	●				
					●				●	●	●				
					●				●	●	●				
					●	●			●	●	●				

Available Arbors

Designation	Available Arbors	
	RM4PHCP	
RM4PHCP 308015R	BT□□ -SCA25.4-□□	
310015R	BT□□ -SCA 31.75-□□	
312515R		
316015R	BT□□ -SCA38.1-□□	

Parts



Specification		
Ø80~Ø160	Screw FTKA0307	Wrench TW09S

Available Inserts E09

Available Adaptors E318 ~ E320



RM4PHCP4000

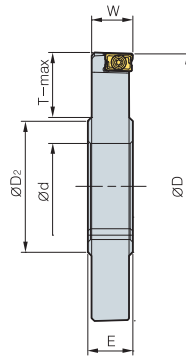

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	W	T-max
RM4PHCP 408020R		6	80	41.5	25.4	6.35	28	22	19.8	17
410020R		8	100	48	31.75	7.94	35.2	22	19.8	24
412520R		10	125	58	38.1	9.53	42.3	22	19.8	32
416020R		12	160	58	38.1	9.53	42.3	22	19.8	49

(mm)

● Stock item

Available Inserts




LNX-MF



LNX-MM



LNX-MA



LNX-MF



LNX-MM

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30	G10E		H01
LNX					●				●						E09
151004PNR-MF					●				●						
151004PNR-MM								●							
151004PNR-MA														●	
151008PNR-MF									●	●	●				
151008PNR-MM					●				●	●	●				
151008PNR-MA														●	
151016PNR-MF					●				●						
151016PNR-MM															
151016PNR-MA														●	
LNX					●				●						E09
151004PNR-MF					●				●						
151004PNR-MM									●						
151008PNR-MF					●				●	●	●				
151008PNR-MM					●	●	●	●	●	●	●				
151016PNR-MF					●				●						

Available Arbors

Designation	Available Arbors
	RM4PHCP
408020R	BT□□ -SCA25.4-□□
410020R	BT□□ -SCA 31.75-□□
412520R	
416020R	BT□□ -SCA38.1-□□


Parts

Specification		
Ø80~Ø160	Screw FTKA0412B	Wrench TW15S

Available Inserts E09

Available Adaptors E318 ~ E320

RM4PS3000

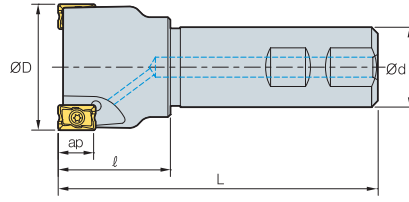

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap	
RM4PS 3014HR-S16	●	1	14	16	23	90	9.0	0.11
3016HR-S16	●	1	16	16	25	90	9.0	0.11
3018HR-S16	●	2	18	16	23	90	9.0	0.12
3020HR-S20	●	2	20	20	30	100	9.0	0.21
3020HR-S20M	●	3	20	20	30	100	9.0	0.21
3025HR-S25	●	2	25	25	35	115	9.0	0.38
3025HR-S25M	●	3	25	25	35	115	9.0	0.38
3032HR-S32	●	3	32	32	40	125	9.0	0.69
3032HR-S32M	●	4	32	32	40	125	9.0	0.7
3040HR-S32		4	40	32	42	130	9.0	0.86
3040HR-S32M		5	40	32	42	130	9.0	0.85
3040HR-S40		4	40	40	42	130	9.0	1.17
3040HR-S40M		5	40	40	42	130	9.0	1.17
3040HR-S42		4	40	42	42	130	9.0	1.26
3040HR-S42M		5	40	42	42	130	9.0	1.25
3050HR-S32	●	5	50	32	45	135	9.0	1.06
3050HR-S32M	●	7	50	32	45	135	9.0	1.05
3050HR-S40		5	50	40	45	135	9.0	1.38
3050HR-S40M		7	50	40	45	135	9.0	1.37
3050HR-S42		5	50	42	45	135	9.0	1.48
3050HR-S42M		7	50	42	45	135	9.0	1.48

● Stock item


▶ Available Inserts




LNX-MF




LNX-MM



LNX-MA



LNMX-MF



LNMX-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
LNX 100605PNR-MF					●				●	●	●			
100605PNR-MM					●		●		●	●	●			
100605PNR-MA														●
100605PNL-MM									●	●				
100608PNR-MF					●				●	●				
100608PNR-MM					●				●	●				
LNMX 100605PNR-MF					●				●	●	●			
100605PNR-MM					●		●	●	●	●				
100605PNL-MM					●									
100608PNR-MF					●				●	●				
100608PNR-MM					●	●			●	●				

E09


▶ Parts

Specification	 Screw FTKA0307	 Wrench TW09S
Ø14~Ø50		

▶ Available Inserts E09



RM4PS4000

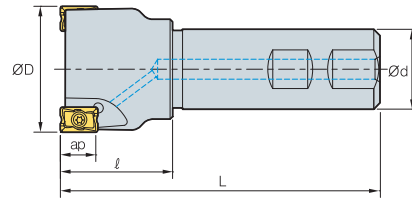

Designation	Stock		ØD	Ød	ℓ	L	ap	
RM4PS								(mm)
4032HR-S32	●	2	32	32	40	125	14	0.68
4040HR-S32	●	3	40	32	42	125	14	0.83
4040HR-S32M	●	4	40	32	43	125	14	0.83
4040HR-S40		3	40	40	42	125	14	1.14
4040HR-S42		3	40	42	42	125	14	1.23
4050HR-S32	●	3	50	32	45	125	14	1.02
4050HR-S32M	●	4	50	32	45	125	14	1.02
4050HR-S40		3	50	40	45	125	14	1.35
4050HR-S40M		4	50	40	45	125	14	1.34
4050HR-S42		3	50	42	45	125	14	1.45
4050HR-S42M		4	50	42	45	125	14	1.45
4063HR-S32	●	4	63	32	45	125	14	1.25
4063HR-S32M	●	6	63	32	45	125	14	1.24
4063HR-S40		4	63	40	45	125	14	1.62
4063HR-S40M		6	63	40	45	125	14	1.61
4063HR-S42		4	63	42	45	125	14	1.71
4063HR-S42M		6	63	42	45	125	14	1.7

● Stock item

▶ Available Inserts



LNEX-MF



LNEX-MM



LNEX-MA



LNMX-MF



LNMX-MM


Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
LNEX					●		●		●						E09
151004PNR-MM							●								
151004PNR-MA													●		
151008PNR-MF									●	●	●				
151008PNR-MM					●				●	●	●				
151008PNR-MA									●				●		
151016PNR-MF					●				●						
151016PNR-MM									●	●					
LNMX					●				●						
151004PNR-MM									●						
151008PNR-MF					●				●	●	●				
151008PNR-MM					●	●	●	●	●	●	●				
151016PNR-MF					●				●						
151016PNR-MM					●										

▶ Parts

Specification		
Ø32~Ø63	Screw FTKA0412B	Wrench TW15S

▶ Available Inserts E09

RM4PM3000

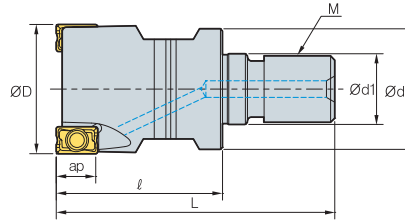

AA
90°

• AR : -6°
• RR : -39°~16°

(mm)

Designation	Stock		ØD	Ød	Ød1	l	L	M	ap	kg
RM4PM 3014HR-M06		1	14	12	6.5	25	40	M06	9.0	0.02
3016HR-M08	●	1	16	14.5	8.5	25	42	M08	9.0	0.02
3018HR-M08	●	2	18	14.5	8.5	25	42	M08	9.0	0.03
3020HR-M10	●	2	20	18	10.5	30	51	M10	9.0	0.06
3025HR-M12	●	2	25	23	12.5	35	59	M12	9.0	0.11
3032HR-M16	●	3	32	28	17	40	67	M16	9.0	0.21
3040HR-M16		4	40	28	17	40	67	M16	9.0	0.26
3050HR-M16		5	50	30	17	45	72	M16	9.0	0.41

● Stock item

Available Inserts



LNEX-MF



LNEX-MM



LNEX-MA



LNMX-MF



LNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
LNEX 100605PNR-MF					●										E09
100605PNR-MM					●		●		●	●					
100605PNR-MA														●	
100605PNL-MM									●	●					
100608PNR-MF					●				●	●					
100608PNR-MM					●				●	●					
LNMX 100605PNR-MF					●				●	●	●				
100605PNR-MM					●			●	●	●	●				
100605PNL-MM					●				●	●					
100608PNR-MF					●				●	●					
100608PNR-MM					●	●			●	●					

Available Arbors

Designation	Available Adaptor
RM4PM 3014HR-M06	MAT - M06
3016HR-M08	MAT - M08
3018HR-M08	
3020HR-M10	
3025HR-M12	MAT - M12
3032HR-M16	MAT - M16
3040HR-M16	
3050HR-M16	

Designation : RM4PM3032HR-M16
Modular Head Threading Measure size(M16)

||

Adaptor Spec. : MAT-M16-035-S32S
Adaptor Threading Measure(M16)

Parts


Specification	Image	Part Name
Ø14~Ø50		Screw FTKA0307
		Wrench TW09S

Available Inserts E09

Available Adaptors E281~E282



RM4ZC(M)3000/4000 *New*



• AR : -11°
• RR : -12°~10°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	Ød3	a	b	E	F	ap	ae		
RM4ZCM	3040HR	●	4	40	37	16	9	14	-	8.4	5.6	19	40	1.5	9.0	0.21
	3050HR	●	5	50	47	22	11	18	-	10.4	6.3	20	40	1.5	9.0	0.33
	3052HR		5	52	48	22	11	18	-	10.4	6.3	20	40	1.5	9.0	0.37
	4063HR	●	5	63	58	22	11	18	-	10.4	6.3	20	40	2.5	14.0	0.56
RM4ZC (RM4ZCM)	4066HR		5	66	61	25.4(27)	14	20	-	9.5(12.4)	6(7)	25	50	2.5	14.0	0.74
	4080HR	(●)	6	80	70	25.4(27)	14	20	35	9.5(12.4)	6(7)	25(23)	50	2.5	14.0	1.09
	4100HR		7	100	80	31.75(32)	18	26	42	12.7(14.4)	8(8)	25(33)	63(50)	2.5	14.0	1.71

() Metric Size, ● Stock item

▶ Available Inserts



LNX-MM



LNMX-MM

Designation	Cermet		Coated									Uncoated			Page
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30	G10E	H01	
3000 type	LNX	100605PNL-MM								●	●				E09
	LNMX	100605PNL-MM			●										
4000 type	LNX	151008PNL-MM			●										
	LNMX	151008PNL-MM													

▶ Available Arbors

Designation	Available Arbors		
	RM4ZC	RM4ZCM	
RM4ZCM	3040HR	BT□□-FMC16-□□ BT□□-SCA16-□□	
		3050HR 3052HR	BT□□-FMC22-□□
			4063HR
RM4ZC(M)	4066HR	BT□□-FMA25.4-□□	
	4080HR		BT□□-FMC27-□□
	4100HR	BT□□-FMA31.75-□□ BT□□-SCA31.75-□□	BT□□-FMC32-□□


▶ Parts

Specification	 Screw	 Wrench
Ø40~Ø52	FTKA0307	TW09S
Ø63~Ø100	FTKA0412B	TW15S

▶ Available Inserts E09

▶ Available Adaptors E318 ~ E320


RM4ZS3000 *New*

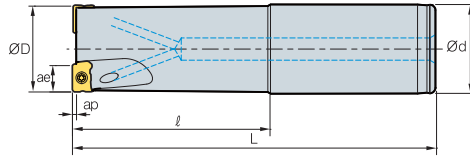

Designation		Stock		ØD	Ød	l	L	ap	ae	
RM4ZS	3025HR-L25	●	2	25	25	120	200	1.5	9.0	0.62
	3032HR-L32	●	3	32	32	120	210	1.5	9.0	1.13
	3040HR-L32		4	40	32	120	250	1.5	9.0	1.53

(mm) ● Stock item

RM4ZM3000 *New*

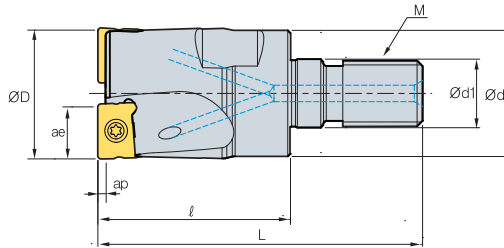

Designation		Stock		ØD	Ød	Ød1	l	L	M	ap	ae	
RM4ZM	3025HR-M12		2	25	23	12.5	35	59	M12	1.5	9.0	0.11
	3032HR-M16	●	3	32	29	17	40	67	M16	1.5	9.0	0.21
	3040HR-M16		4	40	29	17	40	67	M16	1.5	9.0	0.28

() Metric Size, ● Stock item

Available Inserts



LNEX-MM



LNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30		G10E	H01
LNEX 100605PNL-MM									●	●					E09
LNMX 100605PNL-MM					●										

Parts

Specification		
Ø25~Ø40	Screw FTKA0307	Wrench TW09S

Available Inserts E09



RM8AC(M)4000




Fig. 1

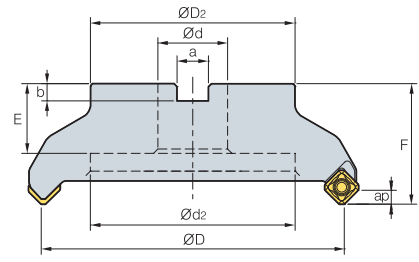


Fig. 2




• AR : -6°
• RR : -9°~6°

														(mm)	
Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		Fig.	
RM8ACM	4050HR-M	●	4	50	49	22	11	18	10.4	6.3	20	40	6.0	0.5	1
	4050HR-H	●	6	50	49	22	11	18	10.4	6.3	20	40	6.0	0.5	1
	4063HR-M	●	6	63	49	22	11	18	10.4	6.3	20	40	6.0	0.7	1
	4063HR-H	●	8	63	49	22	11	18	10.4	6.3	20	40	6.0	0.7	1
RM8AC (RM8ACM)	4080HR	●	5	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	6.0	1.2	1
	4080HR-M	●	7	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	6.0	1.2	1
	4080HR-H	●	10	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	6.0	1.3	1
	4100HR	●	6	100	67	31.75(32)	18	26	12.7(14.4)	8	33(25.5)	63(50)	6.0	1.7	1
	4100HR-M	●	8	100	67	31.75(32)	18	26	12.7(14.4)	8	33(25.5)	63(50)	6.0	1.7	1
	4100HR-H	●	12	100	67	31.75(32)	18	26	12.7(14.4)	8	33(25.5)	63(50)	6.0	1.7	1
	4125HR	●	8	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	36(30)	63	6.0	3.6	1
	4125HR-M	●	10	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	36(30)	63	6.0	3.6	1
	4125HR-H	●	16	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	36(30)	63	6.0	3.7	1
	4160R	●	10	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	6.0	4.8	2
	4160R-M	●	12	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	6.0	5.3	2
	4160R-H	●	20	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	6.0	5.4	2
	4200R-M	●	14	200	130	47.625(60)	-	135	25.4(25.7)	14	38(32)	63	6.0	7.1	2
	4200R-H	●	24	200	130	47.625(60)	-	135	25.4(25.7)	14	38(32)	63	6.0	7.1	2
	4250R-M	●	16	250	180	47.625(60)	-	180	25.4(25.7)	14	38(32)	63	6.0	11.9	2
	4250R-H	●	30	250	180	47.625(60)	-	180	25.4(25.7)	14	38(32)	63	6.0	12.0	2
4315R	●	18	315	240	47.625(60)	-	238	25.4(25.7)	14	38	63	6.0	18.8(18.6)	2	
4315R-M	●	20	315	240	47.625(60)	-	238	25.4(25.7)	14	38	63	6.0	18.8(18.6)	2	
4400R-M	●	28	400	260	47.625(60)	-	238	25.4(25.7)	14	38	80	6.0	37.7(37.4)	2	

() Metric Size, ● Stock item

▶ Available Inserts



Designation	Cermat		Coated						Uncoated			Page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400		A30	G10E
SNEX	1206ANN-MF			●	●			●	●	●				E18 E19
	1206ANN-ML									●	●			
	1206ANN-MM			●	●	●	●	●	●	●				
	1206ANN-MA				●	●	●	●	●	●				
	1206ANN-W				●	●	●	●	●	●				
SNMX	1206ANN-MF			●	●	●	●	●	●	●				
	1206ANN-MM			●	●	●	●	●	●	●				

▶ Available Arbors

Designation	Available Arbors	
	RM8AC	RM8ACM
RM8ACM	4050HR-□	-
	4063HR-□	BT□□-FMC22-□□
RM8AC (RM8ACM)	4080HR-□	BT□□-FMA25.4-□□
	4100HR-□	BT□□-FMA31.75-□□
	4125HR-□	BT□□-FMA38.1-□□
	4160R-□	BT□□-FMA50.8-□□
	4200R-□	
	4250R-□	BT□□-FMA47.625-□□
	4315R-□	
	4400R-□	BT□□-FMB60-□□

▶ Parts

Specification		
Ø50~Ø400	Screw FTKA0410	Wrench TW15S

▶ Available Inserts E18, E19 ▶ Available Adaptors E318 ~ E320

RMH8AC(M)4000 *New*

Shim type




Fig. 1

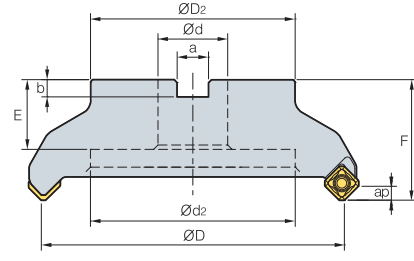


Fig. 2



• AR : -6°
• RR : -9°~6°

Designation		Stock		ØD	ØD ₂	Ød	Ød ₁	Ød ₂	a	b	E	F	ap		Fig.
RMH8AC (RMH8ACM)	4080HR-M	●	7	80	57	25.4(27)	14	20	9.5(12.4)	25(23)	50	6.0	6.0	1.2	1
	4100HR-M	●	8	100	67	31.75(32)	18	26	12.7(14.4)	33(25.5)	63(50)	6.0	6.0	1.7	1
	4125HR-M	●	10	125	87	38.1(40)	22	32	15.9(16.4)	36(30)	63	6.0	6.0	3.6	1
	4160R-M	●	12	160	107	50.8(40)	-	107	19(16.4)	38(32)	63	6.0	6.0	5.3	2
	4200R-M		14	200	130	47.625(60)	-	135	25.4(25.7)	38(32)	63	6.0	6.0	7.1	2
	4250R-M		16	250	180	47.625(60)	-	180	25.4(25.7)	38(32)	63	6.0	6.0	11.9	2
	4315R-M		20	315	240	47.625(60)	-	238	25.4(25.7)	38	63	6.0	6.0	18.8(18.6)	2
	4400R-M		26	400	260	47.625(60)	-	238	25.4(25.7)	38	80	6.0	6.0	37.7(37.4)	2

(mm)

() Metric Size, ● Stock item

▶ Available Inserts



SNEX-MF



SNEX-ML



SNEX-MM



SNEX-MA



SNEX-W



SNMX-MF



SNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
SNEX	1206ANN-MF				●	●			●	●	●				E18 E19
	1206ANN-ML				●	●			●	●	●				
	1206ANN-MM			●		●	●		●	●	●				
	1206ANN-MA					●	●		●	●	●				
	1206ANN-W					●	●		●	●	●				
SNMX	1206ANN-MF				●	●			●	●	●				
	1206ANN-MM			●	●	●	●		●	●	●				

▶ Available Arbors

Designation	Available Arbors	
	RMH8AC	RMH8ACM
RMH8AC (RMH8ACM)	4080HR-□ BT□□-FMA25.4-□□	BT□□-FMC27-□□
	4100HR-□ BT□□-FMA31.75-□□	BT□□-FMC32-□□
	4125HR-□ BT□□-FMA38.1-□□	BT□□-FMB40-□□
	4160R-□ BT□□-FMA50.8-□□	BT□□-FMC40-□□
	4200R-□	
	4250R-□	
	4315R-□	
	4400R-□ BT□□-FMA47.625-□□	BT□□-FMB60-□□



▶ Parts

Specification				
Ø80~Ø400	Screw FTKA0412B	Shim SS42RM8	Shim Screw SHXN0609F	Wrench TW15S

▶ Available Inserts E18, E19 ▶ Available Adaptors E318 ~ E320



RM8AC(M)5000

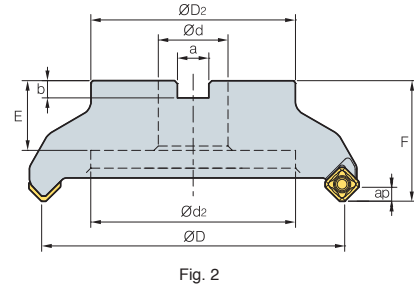

• AR : -6°
• RR : -9°~6°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		Fig.	
RM8AC	5080HR-M	●	6	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	7.5	1.2	1
(RM8ACM)	5100HR-M	●	7	100	67	31.75(32)	18	26	12.7(14.4)	8.0	33(25)	63(50)	7.5	2.5(1.8)	1
	5125HR-M	●	8	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	35(30)	63	7.5	3.6	1
	5160R-M	●	10	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	7.5	5(4.56)	2
	5200R-M	●	12	200	130	47.625(60)	-	135	25.4(25.7)	14.0	38	63	7.5	7.1(6.8)	2
	5250R-M	●	15	250	180	47.625(60)	-	180	25.4(25.7)	14.0	38	63	7.5	11.9(10.6)	2
	5315R-M		20	315	240	47.625(60)	-	238	25.4(25.7)	14.0	38	63	7.5	19.1(18.9)	2
	5400R-M		28	400	260	47.625(60)	-	238	25.4(25.7)	14.0	38	80	7.5	37.7(37.5)	2

()Metric Size, ● Stock item

▶ Available Inserts



SNEX-MF



SNEX-ML



SNEX-MM



SNMX-MF



SNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
SNEX	1507ANN-MF				●				●	●	●				E18
	1507ANN-ML				●				●	●	●				
	1507ANN-MM				●				●	●	●				
SNMX	1507ANN-MF				●				●	●	●				E19
	1507ANN-MM				●	●			●	●	●				

▶ Available Arbors

Designation	Available Arbors		
	RM8AC	RM8ACM	
RM8AC	5080HR-□	BT□□-FMA25.4-□□	BT□□-FMC27-□□
(RM8ACM)	5100HR-□	BT□□-FMA31.75-□□	BT□□-FMC32-□□
	5125HR-□	BT□□-FMA38.1-□□	BT□□-FMB40-□□
	5160R-□	BT□□-FMA50.8-□□	BT□□-FMC40-□□
	5200R-□		
	5250R-□		
	5315R-□		
	5400R-□	BT□□-FMA47.625-□□	BT□□-FMB60-□□

▶ Parts

Specification		
Ø80~Ø400	Screw FTGA0513	Wrench TW20-100

▶ Available Inserts E18, E19 ▶ Available Adaptors E318 ~ E320

RMH8AC(M)5000 *New*

Shim type




Fig. 1

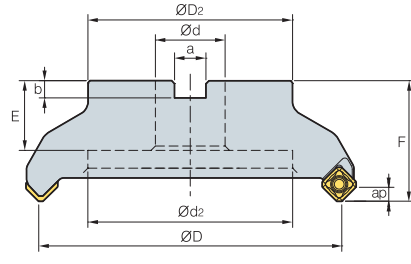


Fig. 2



• AR : -6°
• RR : -9°~6°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		Fig.	
RMH8AC	5080HR-M	●	6	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	7.5	1.2	1
(RMH8ACM)	5100HR-M	●	7	100	67	31.75(32)	18	26	12.7(14.4)	8.0	33(25)	63(50)	7.5	2.5(1.8)	1
	5125HR-M	●	8	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	36(30)	63	7.5	3.6	1
	5160R-M	●	10	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	7.5	5(4.56)	2
	5200R-M		12	200	130	47.625(60)	-	135	25.4(25.7)	14.0	38(32)	63	7.5	7.1(6.8)	2
	5250R-M		15	250	180	47.625(60)	-	180	25.4(25.7)	14.0	38(32)	63	7.5	11.9(10.6)	2
	5315R-M		20	315	240	47.625(60)	-	238	25.4(25.7)	14.0	38	63	7.5	19.1(18.9)	2
	5400R-M		22	400	260	47.625(60)	-	238	25.4(25.7)	14.0	38	80	7.5	37.7(37.5)	2

() Metric Size, ● Stock item

▶ Available Inserts



SNEX-MF



SNEX-ML



SNEX-MM



SNMX-MF



SNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
SNEX	1507ANN-MF				●				●	●	●				E18
	1507ANN-ML								●	●	●				
	1507ANN-MM				●				●	●	●				
SNMX	1507ANN-MF				●				●	●	●				E19
	1507ANN-MM				●	●			●	●	●				

▶ Available Arbors

Designation	Available Arbors		
	RMH8AC	RMH8ACM	
RMH8AC	5080HR-□	BT□□-FMA25.4-□□	BT□□-FMC27-□□
(RMH8ACM)	5100HR-□	BT□□-FMA31.75-□□	BT□□-FMC32-□□
	5125HR-□	BT□□-FMA38.1-□□	BT□□-FMB40-□□
	5160R-□	BT□□-FMA50.8-□□	BT□□-FMC40-□□
	5200R-□		
	5250R-□		
	5315R-□		
	5400R-□	BT□□-FMA47.625-□□	BT□□-FMB60-□□

▶ Parts

Specification				
Ø80~Ø400	Screw FTGA0513	Shim SS53RM8	Shim Screw SHXN0712F	Wrench TW20-100

▶ Available Inserts E18, E19 ▶ Available Adaptors E318 ~ E320



RM8EC(M)4000




Fig. 1

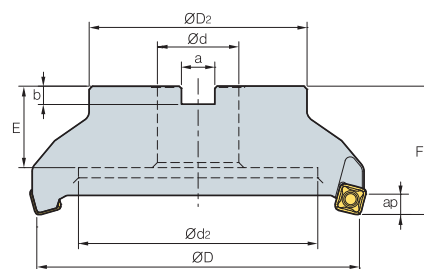


Fig. 2




• AR : -6°
• RR : -8°~6°

(mm)

Designation	Stock	⊙	ØD	ØD ₂	Ød	Ød ₁	Ød ₂	a	b	E	F	ap	kg	Fig.
RM8ECM														
4050HR-M		4	50	49	22	11	18	10.4	6.3	20	40	9.0	0.4	1
4063HR-M		6	63	49	22	11	18	10.4	6.3	20	40	9.0	0.6	1
RM8EC	●	5	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	9.0	1.2	1
(RM8ECM)	●	7	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	9.0	1.1	1
4100HR	●	6	100	67	31.75(32)	18	26	12.7(14.4)	8	33(25)	63(50)	9.0	1.6	1
4100HR-M	●	8	100	67	31.75(32)	18	26	12.7(14.4)	8	33(25)	63(50)	9.0	2.5	1
4125HR	●	8	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	35(29)	63	9.0	2.9(3.3)	1
4125HR-M	●	10	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	35(29)	63	9.0	3.0	1
4160R	●	10	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	9.0	4.4	2
4160R-M	●	12	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	9.0	4.0	2
4200R-M		16	200	130	47.625(60)	-	135	25.4(25.7)	14	38(32)	63	9.0	5.9	2
4250R-M		16	250	180	47.625(60)	-	180	25.4(25.7)	14	38	63	9.0	10.9(10.6)	2
4315R-M		20	315	240	47.625(60)	-	238	25.4(25.7)	14	38	63	9.0	18.1(17.9)	2
4400R-M		28	400	260	47.625(60)	-	238	25.4(25.7)	14	38	80	9.0	31.8(31.5)	2

()Metric Size, ● Stock item

Available Inserts





Designation	Cermet		Coated						Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400		A30	G10E
SNEX	1206ENN-MF								●	●				
	1206ENN-ML								●	●				
	1206ENN-MM				●	●			●	●				E18
	1206ENN-MA											●		E19
SNMX	1206ENN-MF				●				●	●				
	1206ENN-MM				●	●			●	●				

Available Arbors

Designation	Available Arbors	
	RM8EC	RM8ECM
RM8ECM	4050HR-□	
	4063HR-□	BT□□-FMC22-□□
RM8EC	4080HR-□	BT□□-FMA25.4-□□
(RM8ECM)	4100HR-□	BT□□-FMA31.75-□□
	4125HR-□	BT□□-FMA38.1-□□
	4160R-□	BT□□-FMA50.8-□□
	4200R-□	
	4250R-□	
	4315R-□	BT□□-FMA47.625-□□
	4400R-□	BT□□-FMB60-□□

Parts

Specification	 Screw	 Wrench
Ø50~Ø400	PTKA0411-R3	TW15S

Available Inserts E18, E19 Available Adaptors E318 ~ E320

RMH8EC(M)4000 *New*

Shim type




Fig. 1

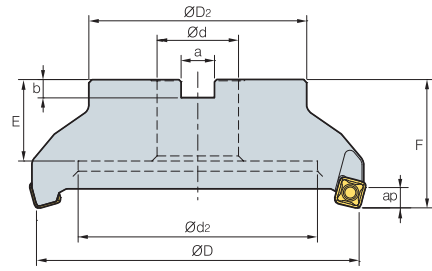


Fig. 2



• AR : -6°
• RR : -8°~6°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		Fig.	
RMH8EC	4080HR-M	(●)	7	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	9.0	1.1	1
(RMH8ECM)	4100HR-M	(●)	8	100	67	31.75(32)	18	26	12.7(14.4)	8	33(25.5)	63(50)	9.0	2.5	1
	4125HR-M	(●)	10	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	36(30)	63	9.0	3.0	1
	4160R-M	(●)	12	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	9.0	4.0	2
	4200R-M		16	200	130	47.625(60)	-	135	25.4(25.7)	14	38(32)	63	9.0	5.9	2
	4250R-M		16	250	180	47.625(60)	-	180	25.4(25.7)	14	38(32)	63	9.0	10.9(10.6)	2
	4315R-M		20	315	240	47.625(60)	-	238	25.4(25.7)	14	38	63	9.0	18.1(17.9)	2
	4400R-M		24	400	260	47.625(60)	-	238	25.4(25.7)	14	38	80	9.0	31.8(31.5)	2

() Metric Size, ● Stock item

Available Inserts



SNEX-MF



SNEX-ML



SNEX-MM



SNEX-MA



SNMX-MF



SNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC39530	PC6510	PC5300	PC5400	A30		G10E	H01
SNEX 1206ENN-MF									●	●	●				E18
1206ENN-ML									●	●	●				
1206ENN-MM					●	●			●	●	●				
1206ENN-MA									●	●	●		●		
SNMX 1206ENN-MF					●	●			●	●	●				
1206ENN-MM					●	●			●	●	●				

Available Arbors

Designation	Available Arbors	
	RMH8EC	RMH8ACM
RMH8EC 4080HR-□	BT□□-FMA25.4-□□	BT□□-FMC27-□□
(RMH8ECM) 4100HR-□	BT□□-FMA31.75-□□	BT□□-FMC32-□□
4125HR-□	BT□□-FMA38.1-□□	BT□□-FMB40-□□
4160R-□	BT□□-FMA50.8-□□	BT□□-FMC40-□□
4200R-□		
4250R-□		
4315R-□	BT□□-FMA47.625-□□	BT□□-FMB60-□□
4400R-□		

Parts

Specification				
Ø80~Ø400	PTKA0411-R3	SS42RM8	SHXN0609F	TW15S

Available Inserts E18, E19 Available Adaptors E318 ~ E320



RM8EC(M)5000




Fig. 1

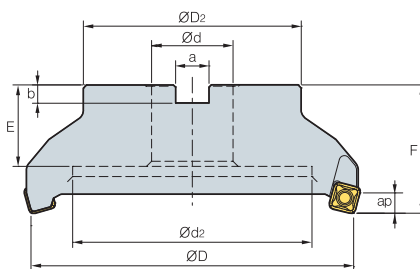


Fig. 2



• AR : -6°
• RR : -8°~6°

Designation	Stock		ØD	ØD ₂	Ød	Ød ₁	Ød ₂	a	b	E	F	ap		Fig.	
RM8EC	5080HR-M	● (●)	6	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	11.0	1.1	1
(RM8ECM)	5100HR-M	● (●)	7	100	67	31.75(32)	18	26	12.7(14.4)	8.0	33(25)	63(50)	11.0	2.1(1.7)	1
	5125HR-M		8	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	35(30)	63	11.0	3.4(3.3)	1
	5160R-M	● (●)	10	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	11.0	4.4(4.1)	2
	5200R-M	(●)	12	200	130	47.625(60)	-	135	25.4(25.7)	14.0	38	63	11.0	6.4(6.1)	2
	5250R-M	(●)	15	250	180	47.625(60)	-	180	25.4(25.7)	14.0	38	63	11.0	11.0(10.7)	2
	5315R-M		20	315	240	47.625(60)	-	238	25.4(25.7)	14.0	38	63	11.0	18.0(17.7)	2
	5400R-M		28	400	260	47.625(60)	-	238	25.4(25.7)	14.0	38	80	11.0	35.7(35.4)	2

(mm)

() Metric Size, ● Stock item

▶ Available Inserts



SNEX-MF




SNEX-ML



SNEX-MM



SNMX-MF



SNMX-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
SNEX 1507ENN-MF					●				●	●	●			
1507ENN-ML										●	●			
1507ENN-MM					●				●	●	●			
SNMX 1507ENN-MF					●				●	●	●			
1507ENN-MM					●	●			●	●	●			

▶ Available Arbors

Designation	Available Arbors	
	RM8EC	RM8ECM
RM8EC 5080HR-□	BT□□-FMA25.4-□□	BT□□-FMC27-□□
(RM8ECM) 5100HR-□	BT□□-FMA31.75-□□	BT□□-FMC32-□□
5125HR-□	BT□□-FMA38.1-□□	BT□□-FMB40-□□
5160R-□	BT□□-FMA50.8-□□	BT□□-FMC40-□□
5200R-□	BT□□-FMA47.625-□□	BT□□-FMB60-□□
5250R-□		
5315R-□		
5400R-□		

▶ Parts

Specification		
Ø80~Ø400	Screw FTGA0513	Wrench TW20-100

▶ Available Inserts E18, E19 ▶ Available Adaptors E318 ~ E320

RMH8EC(M)5000 *New*

Shim type




Fig. 1

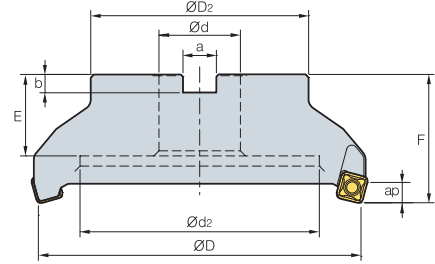


Fig. 2



• AR : -6°
• RR : -8°~6°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		Fig.
RM8QC (RM8QCM) 5080HR-M	● (●)	6	63	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	11.0	1.1	1
5100HR-M	● (●)	7	80	67	31.75(32)	18	26	12.7(14.4)	8.0	33(25.5)	63(50)	11.0	2.1(1.7)	1
5125HR-M		8	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	36(30)	63	11.0	3.4(3.3)	1
5160HR-M	● (●)	10	160	107	50.8(60)	-	107	19(16.4)	11(9)	38(32)	63	11.0	4.4(4.1)	2
5200R-M	(●)	12	200	130	47.625(60)	-	135	25.4(25.7)	14.0	38(32)	63	11.0	6.4(6.1)	2
5250R-M	(●)	15	250	180	47.625(60)	-	180	25.4(25.7)	14.0	38(32)	63	11.0	110(10.7)	2
5315R-M	(●)	20	315	240	47.625(60)	-	238	25.4(25.7)	14.0	38	63	11.0	18.0(17.7)	2
5400R-H		22	400	260	47.625(60)	-	238	25.4(25.7)	14.0	38	80	11.0	35.7(35.4)	2

() Metric Size, ● Stock item

▶ Available Inserts



SNEX-MF



SNEX-ML



SNEX-MM



SNMX-MF



SNMX-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
SNEX 1507ENN-MF					●				●	●	●			
1507ENN-ML										●	●			
1507ENN-MM					●				●	●	●			E18
SNMX 1507ENN-MF					●				●	●	●			E19
1507ENN-MM					●	●			●	●	●			

▶ Available Arbors

Designation	Available Arbors	
	RMH8EC	RMH8ECM
RMH8EC (RMH8ECM) 5080HR-□	BT□□-FMA25.4-□□	BT□□-FMC27-□□
5100HR-□	BT□□-FMA31.75-□□	BT□□-FMC32-□□
5125HR-□	BT□□-FMA38.1-□□	BT□□-FMB40-□□
5160R-□	BT□□-FMA50.8-□□	BT□□-FMC40-□□
5200R-□		
5250R-□		
5315R-□	BT□□-FMA47.625-□□	BT□□-FMB60-□□
5400R-□		

▶ Parts

Specification				
Ø80~Ø400	Screw FTGA0513	Shim SS53RM8	Shim Screw SHXN0712F	Wrench TW20-100

▶ Available Inserts E18, E19 ◀ Available Adaptors E318 ~ E320



RM8QC(M)4000




Fig. 1

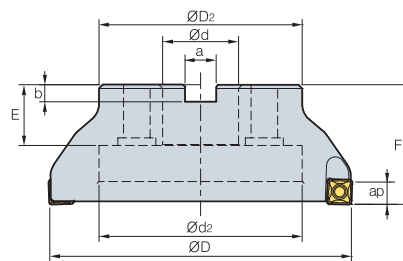


Fig. 2




• AR : -6°
• RR : -8°~6°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		Fig.
RM8QCM 4063HR-M			63	49	22	11	18	10.4	6.3	20	40	11.5	0.6	1
4063HR-H			63	49	22	11	18	10.4	6.3	20	40	11.5	0.6	1
RM8QC (RM8QCM) 4080HR-M	● (●)		80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	11.5	1.1	1
4080HR-H			80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	11.5	1.0	1
4100HR-M	● (●)		100	67	31.75(32)	18	26	12.7(14.4)	8	33(25.5)	63(50)	11.5	1.7	1
4100HR-H			100	67	31.75(32)	18	26	12.7(14.4)	8	33(25.5)	63(50)	11.5	1.6	1
4125HR-M	● (●)		125	87	38.1(40)	22	32	15.9(16.4)	10(9)	36(30)	63	11.5	3.3	1
4125HR-H			125	87	38.1(40)	22	32	15.9(16.4)	10(9)	36(30)	63	11.5	3.3	1
4160R-M	(●)		160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	11.5	3.9	2
4160R-H			160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	11.5	3.9	2
4200R-M			200	130	47.625(60)	-	135	25.4(25.7)	14	38(32)	63	11.5	6.4	2
4200R-H			200	130	47.625(60)	-	135	25.4(25.7)	14	38(32)	63	11.5	6.4	2

() Metric Size, ● Stock item

Available Inserts



Designation	Cermet		Coated						Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
SNEX 1206QNN-MF				●				●	●	●			
1206QNN-ML								●	●	●			
1206QNN-MM				●				●	●	●			
1206QNN-MA													●
120612-MF													
120612-ML									●	●			E17
120612-MM									●				E18
120612-MA													●
SNMX 1206QNN-MF				●				●	●	●			
1206QNN-MM				●				●	●	●			
120612-MF													
120612-MM				●				●					

Available Arbors

Designation	Available Arbors	
	RM8QC	RM8QCM
RM8QCM 4063HR-□	-	BT□□-FMC22-□□
RM8QC 4080HR-□	BT□□-FMA25.4-□□	BT□□-FMC27-□□
(RM8QCM) 4100HR-□	BT□□-FMA31.75-□□	BT□□-FMC32-□□
4125HR-□	BT□□-FMA38.1-□□	BT□□-FMB40-□□
4160R-□	BT□□-FMA50.8-□□	BT□□-FMC40-□□
4200R-□	BT□□-FMA47.625-□□	BT□□-FMB60-□□

Parts

Specification		
Ø63-Ø200	PTKA0411-R3	TW15S

Available Inserts E17, E18, E19

Available Adaptors E318 ~ E320

RMH8QC(M)4000 *New*

Shim type




Fig. 1

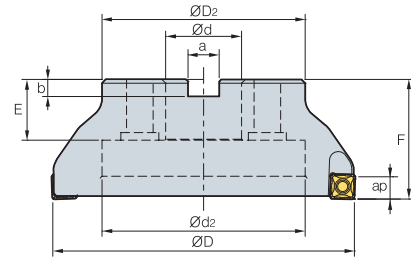


Fig. 2



• AR : -6°
• RR : -8°~6°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		Fig.	
RMH8QC	4080HR-M	(●)	7	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	11.5	1.1	1
(RMH8QCM)	4100HR-M	(●)	8	100	67	31.75(32)	18	26	12.7(14.4)	8	33(25.5)	63(50)	11.5	2.5	1
	4125HR-M	(●)	10	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	36(30)	63	11.5	3.0	1
	4160R-M	(●)	12	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	11.5	4.0	2
	4200R-M	(●)	16	200	130	47.625(60)	-	135	25.4(25.7)	14	38(32)	63	11.5	5.9	2

() Metric Size, ● Stock item

Available Inserts



SNEX-MF



SNEX-ML



SNEX-MM



SNEX-MA



SNMX-MF



SNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SNEX					●				●	●	●				E18
1206QNN-MF					●				●	●	●				
1206QNN-ML									●	●	●				
1206QNN-MM					●				●	●	●				
1206QNN-MA									●	●	●				
120612-MF										●	●				
120612-ML										●	●				
120612-MM									●	●	●				
120612-MA									●	●	●				
SNMX					●				●	●	●				
1206QNN-MF					●				●	●	●				
1206QNN-MM					●				●	●	●				
120612-MF										●	●				
120612-MM					●				●	●	●				

Available Arbors

Designation	Available Arbors		
	RMH8AC	RMH8ACM	
RMH8QC	4080HR-□	BT□□-FMA25.4-□□	BT□□-FMC27-□□
(RMH8QCM)	4100HR-□	BT□□-FMA31.75-□□	BT□□-FMC32-□□
	4125HR-□	BT□□-FMA38.1-□□	BT□□-FMB40-□□
	4160R-□	BT□□-FMA50.8-□□	BT□□-FMC40-□□
	4200R-□	BT□□-FMA47.625-□□	BT□□-FMB60-□□

Parts


Specification				
Ø80~Ø200	PTKA0411-R3	SS42RM8	SHXN0609F	TW15S

Available Inserts E18

Available Adaptors E318 ~ E320



RMT8A(M)4000

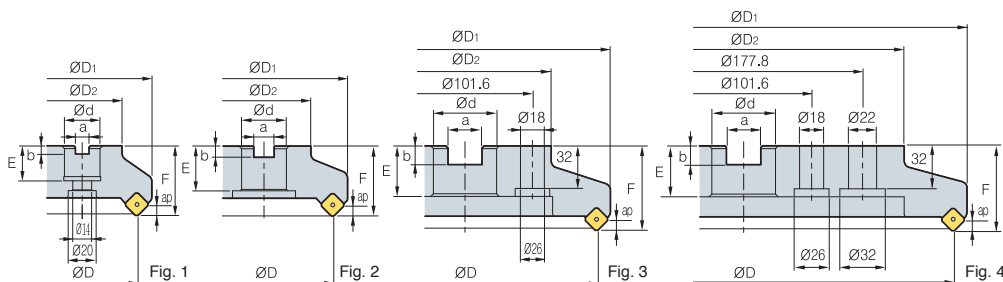

AA
45°
• AR : -6°
• RR : -6°

Designation	Stock		ØD	ØD ₁	ØD ₂	Ød	a	b	E	F	ap	$\frac{m}{kg}$	Fig.	
RMT8A (RMT8AM) 4080R			5	80	100	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	4	1.6	1
4080R-M			6	80	100	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	4	1.6	1
4100R			6	100	120	70	31.75(32)	12.7(14.4)	8(8)	32(28)	50	4	2.3	2
4100R-M			8	100	120	70	31.75(32)	12.7(14.4)	8(8)	32(28)	50	4	2.3	2
4125R			8	125	144	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	4	4.3	2
4125R-M			10	125	144	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	4	4.3	2
4160R			10	160	179	110	50.8(40)	19.0(16.4)	11(9)	38(30)	63	4	6.5	2
4160R-M			14	160	179	110	50.8(40)	19.0(16.4)	11(9)	38(30)	63	4	6.5	2
4200R			12	200	219	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	4	8.8	3
4200R-M			18	200	219	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	4	8.8	3
4250R			16	250	269	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	4	14.1	3
4250R-M			22	250	269	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	4	14.1	3
4315R			20	315	334	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	4	22.3	4
4315R-M			28	315	334	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	4	22.3	4

(mm)

() Metric Size, ● Stock item

Available Inserts



SNC(M)F-MF



SNC(M)F-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SNCF 1206ANN-MM					●										E16
SNMF 1206ANN-MM															E18

Available Arbors

Designation	General Arbor	NC Arbors	
		RMT8A	RMT8AM
RMT8A(M) <input type="checkbox"/> 080R	NT* <input type="checkbox"/> (M/U)-FMA25.4-25	BT** <input type="checkbox"/> -FMA25.4 - <input type="checkbox"/>	FMC27
<input type="checkbox"/> 100R	NT* <input type="checkbox"/> (M/U)-FMA31.75 - <input type="checkbox"/>	BT** <input type="checkbox"/> -FMA31.75 - <input type="checkbox"/>	FMC32
<input type="checkbox"/> 125R	NT* <input type="checkbox"/> (M/U)-FMA38.1 - <input type="checkbox"/>	BT** <input type="checkbox"/> -FMA38.1 - <input type="checkbox"/>	FMB40
<input type="checkbox"/> 160R	NT* <input type="checkbox"/> (M/U)-FMA50.8 - <input type="checkbox"/>	BT** <input type="checkbox"/> -FMA50.8 - <input type="checkbox"/>	FMB60
<input type="checkbox"/> 200R	NT* <input type="checkbox"/> (M/U)-FMA47.625-25, KCP-8***	BT** <input type="checkbox"/> -FMA47.625 - <input type="checkbox"/>	
<input type="checkbox"/> 250R			
<input type="checkbox"/> 315R	KCP-8***(Center Ring Plug)		

* -NT Number ** -BT Number ***Over Milling 5

Parts


Specification					
Ø80-Ø315	ETKA0523	KHB0417	SPR0315	LTC05SR-RM4	TW20-100

Available Inserts E16, E17, E18

Available Adaptors E318 ~ E320



RMT8A(M)5000

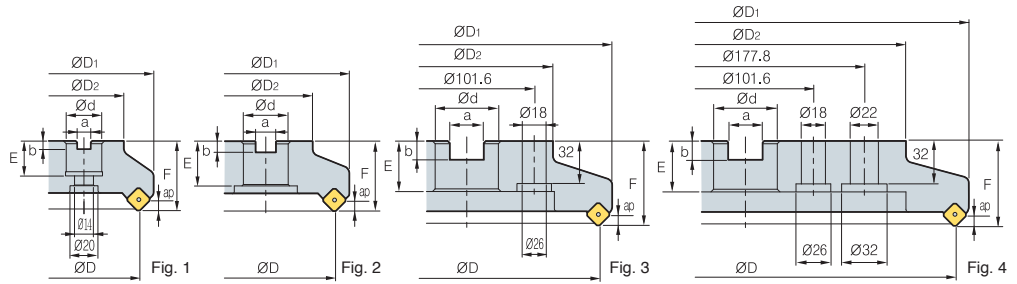

• AR : -6°
• RR : -6°

(mm)

Designation	Stock		ØD	ØD1	ØD2	Ød	a	b	E	F	ap		Fig.	
RMT8A (RMT8AM)	5080R		5	80	104	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	6	1.8	1
	5080R-M		6	80	104	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	6	1.8	1
	5100R		6	100	124	70	31.75(32)	12.7(14.4)	8(8)	32(28)	50	6	2.6	2
	5100R-M		8	100	124	70	31.75(32)	12.7(14.4)	8(8)	32(28)	50	6	2.6	2
	5125R	●	8	125	149	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	6	4.3	2
	5125R-M		10	125	149	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	6	4.3	2
	5160R	●	10	160	184	110	50.8(40)	19.0(16.4)	11(9)	38(30)	63	6	6.5	2
	5160R-M		14	160	184	110	50.8(40)	19.0(16.4)	11(9)	38(30)	63	6	6.5	2
	5200R		12	200	224	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	6	9.0	3
	5200R-M		18	200	224	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	6	9.0	3
	5250R		16	250	274	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	6	14.4	3
	5250R-M		22	250	274	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	6	14.4	3
	5315R		20	315	339	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	6	22.2	4
	5315R-M		28	315	339	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	6	22.2	4

() Metric Size, ● Stock item

Available Inserts



SNC(M)F-MF



SNC(M)F-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SNCF 1507ANN-MF					●				●						E16
SNCF 1507ANN-MM															E17
SNMF 1507ANN-MF					●										E18
SNMF 1507ANN-MM															

Available Arbors

Designation	General Arbor	NC Arbors	
		RMT8A	RMT8AM
RMT8A(M) <input type="checkbox"/> 080R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA25.4-25	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA25.4 - <input type="checkbox"/> <input type="checkbox"/>	FMC27
<input type="checkbox"/> 100R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA31.75 - <input type="checkbox"/> <input type="checkbox"/>	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA31.75	FMC32
<input type="checkbox"/> 125R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA38.1 - <input type="checkbox"/> <input type="checkbox"/>	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA38.1	FMC32
<input type="checkbox"/> 160R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA50.8 - <input type="checkbox"/> <input type="checkbox"/>	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA50.8	
<input type="checkbox"/> 200R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA47.625-25, KCP-8***	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA47.625 - <input type="checkbox"/> <input type="checkbox"/>	FMB60
<input type="checkbox"/> 250R			
<input type="checkbox"/> 315R			

* -NT Number ** -BT Number ***Over Milling 5


Parts

Specification					
Ø80-Ø315	ETKA0625	KHB0417	SPR0415	LTC06SR-RM5	TW20-100

Available Inserts E16, E17, E18 Available Adaptors E318 ~ E320



RMT8E(M)4000

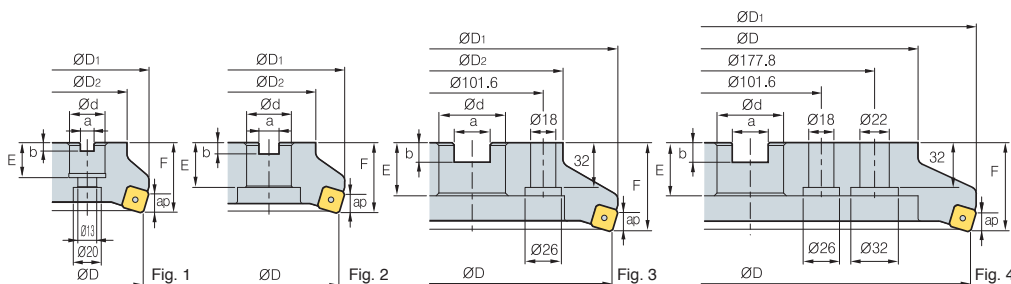

• AR : -6°
• RR : -8°~6°

Designation	Stock		ØD	ØD1	ØD2	Ød	a	b	E	F	ap		Fig.	
RMT8E	4080R	●	5	80	100	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	1.5	1	
(RMT8EM)	4080R-M		6	80	100	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	1.5	1	
	4100R	●	6	100	120	67	31.75(32)	12.7(14.4)	8(8)	32(28)	50	2	2	
	4100R-M		8	100	120	67	31.75(32)	12.7(14.4)	8(8)	32(28)	50	2	2	
	4125R		8	125	144	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	5	3.8	2
	4125R-M		10	125	144	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	5	3.8	2
	4160R	●	10	160	179	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	5	5.8	2
	4160R-M		14	160	179	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	5	5.8	2
	4200R		12	200	219	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	5	7.9	3
	4200R-M		18	200	219	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	5	7.9	3
	4250R		16	250	269	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	5	13.0	3
	4250R-M		22	250	269	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	5	13.0	3
	4315R		20	315	334	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	5	20.5	4
	4315R-M		28	315	334	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	5	20.5	4

() Metric Size, ● Stock item

▶ Available Inserts



SNC(M)F-MF



SNC(M)F-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SNCF	1206ENN-MF								●						E16
	1206ENN-MM				●			●							E17
SNMF	1206ENN-MF				●										E18
	1206ENN-MM				●										

▶ Available Arbors

Designation	General Arbor	NC Arbors	
		RMT8E	RMT8E
RMT8E(M)	<input type="checkbox"/> 080R NT* <input type="checkbox"/> (M/U)-FMA25.4-25	BT** <input type="checkbox"/> -FMA25.4 - <input type="checkbox"/>	FMC27
	<input type="checkbox"/> 100R NT* <input type="checkbox"/> (M/U)-FMA31.75 - <input type="checkbox"/>	BT** <input type="checkbox"/> -FMA31.75 - <input type="checkbox"/>	FMC32
	<input type="checkbox"/> 125R NT* <input type="checkbox"/> (M/U)-FMA38.1 - <input type="checkbox"/>	BT** <input type="checkbox"/> -FMA38.1 - <input type="checkbox"/>	FMB40
	<input type="checkbox"/> 160R NT* <input type="checkbox"/> (M/U)-FMA50.8 - <input type="checkbox"/>	BT** <input type="checkbox"/> -FMA50.8 - <input type="checkbox"/>	FMB60
	<input type="checkbox"/> 200R NT* <input type="checkbox"/> (M/U)-FMA47.625-25, KCP-8***	BT** <input type="checkbox"/> -FMA47.625 - <input type="checkbox"/>	
	<input type="checkbox"/> 250R		
	<input type="checkbox"/> 315R KCP-8*** (Center Ring Plug)		


*-NT Number **-BT Number ***Over Milling 5

▶ Parts

Specification					
Ø80~Ø315	ETKA0523	KHB0417	SPR0315	LTC05SR-RM4	TW20-100

Available Inserts E16, E17, E18 Available Adaptors E318 ~ E320



RMT8E(M)5000

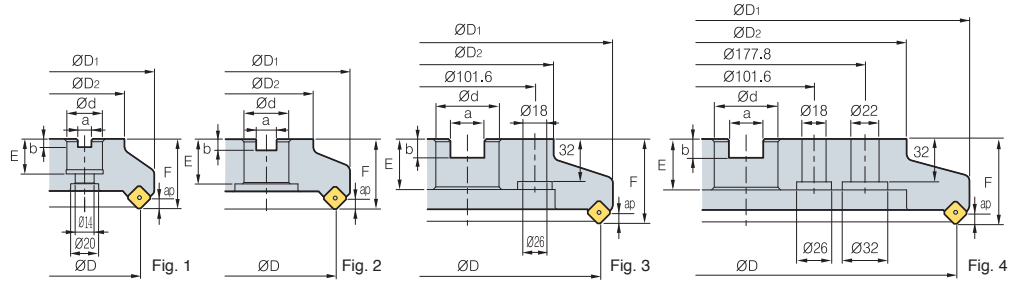

Designation	Stock		ØD	ØD1	ØD2	Ød	a	b	E	F	ap		Fig.	
RMT8E	5080R		5	80	88	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	8	1.4	1
(RMT8EM)	5080R-M		6	80	88	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	8	1.4	1
	5100R	●	6	100	108	67	31.75(32)	12.7(14.4)	8(8)	32(28)	50	8	1.9	2
	5100R-M		8	100	108	67	31.75(32)	12.7(14.4)	8(8)	32(28)	50	8	1.9	2
	5125R	●	8	125	133	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	8	3.7	2
	5125R-M		10	125	133	87	38.1(40)	15.9(16.4)	10(9)	38(30)	63	8	3.7	2
	5160R		10	160	168	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	8	5.7	2
	5160R-M		14	160	168	107	50.8(40)	19.0(16.4)	11(9)	38(30)	63	8	5.7	2
	5200R		12	200	208	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	8	7.5	3
	5200R-M		18	200	208	130	47.625(60)	25.4(25.7)	14(14)	38(38)	63	8	7.5	3
	5250R		16	250	258	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	8	12.4	3
	5250R-M		22	250	258	180	47.625(60)	25.4(25.7)	14(14)	38(38)	63	8	12.4	3
	5315R		20	315	323	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	8	19.9	4
	5315R-M		28	315	323	240	47.625(60)	25.4(25.7)	14(14)	38(38)	63	8	19.9	4

() Metric Size, ● Stock item

▶ Available Inserts



Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SNCF 1507ENN-MM					●				●						E16
SNMF 1507ENN-MM								●							E17
SNMF 1507ENN-MM					●										E18

▶ Available Arbors

Designation	General Arbor	NC Arbors	
		RMT8EM	RMT8EM
RMT8E(M) <input type="checkbox"/> 080R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA25.4-25	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA25.4 - <input type="checkbox"/> <input type="checkbox"/>	FMC27
<input type="checkbox"/> 100R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA31.75 - <input type="checkbox"/> <input type="checkbox"/>	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA31.75 - <input type="checkbox"/> <input type="checkbox"/>	FMC32
<input type="checkbox"/> 125R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA38.1 - <input type="checkbox"/> <input type="checkbox"/>	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA38.1 - <input type="checkbox"/> <input type="checkbox"/>	FMB40
<input type="checkbox"/> 160R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA50.8 - <input type="checkbox"/> <input type="checkbox"/>	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA50.8 - <input type="checkbox"/> <input type="checkbox"/>	FMB60
<input type="checkbox"/> 200R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA47.625-25, KCP-8***	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA47.625 - <input type="checkbox"/> <input type="checkbox"/>	FMB60
<input type="checkbox"/> 250R			
<input type="checkbox"/> 315R	KCP-8*** (Center Ring Plug)	-	-

* -NT Number ** -BT Number ***Over Milling 5



▶ Parts

Specification					
Ø80~Ø315	ETKA0625	KHB0417	SPR0415	LTC06SR-RM5	TW20-100

▶ Available Inserts E16, E17, E18 ▶ Available Adaptors E318 ~ E320



RMT8Q(M)

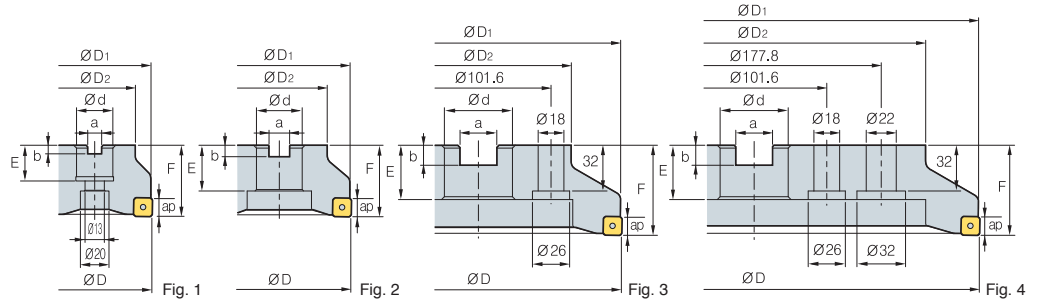

AA
88°

• AR : -6°
• RR : -11°~6°

Designation	Stock		ØD	ØD ₁	ØD ₂	Ød	a	b	E	F	ap		Fig.	
RMT8Q	4080R	●	5	80	79	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	5	1.4	1
(RMT8QM)	4080R-M		6	80	79	57	25.4(27)	9.5(12.4)	6(7)	25(22)	50	5	1.4	1
	4100R	●	6	100	99	67	31.75(32)		8(8)	32(28)	50	5	1.8	2
	4100R-M	●	8	100	99	67	31.75(32)		8(8)	32(28)	50	5	1.8	2
	4125R	● (●)	8	125	124	87	38.1(40)		10(9)	38(30)	63	5	3.6	2
	4125R-M		10	125	124	87	38.1(40)		10(9)	38(30)	63	5	3.6	2
	4160R	●	10	160	159	107	50.8(40)		11(9)	38(30)	63	5	5.7	2
	4160R-M		14	160	159	107	50.8(40)		11(9)	38(30)	63	5	5.7	2
	4200R		12	200	199	130	47.625(60)		14(14)	38(38)	63	5	7.5	3
	4200R-M		18	200	199	130	47.625(60)		14(14)	38(38)	63	5	7.5	3
	4250R		16	250	249	180	47.625(60)		14(14)	38(38)	63	5	12.5	3
	4250R-M		22	250	249	180	47.625(60)		14(14)	38(38)	63	5	12.5	3
	4315R		20	315	314	240	47.625(60)		14(14)	38(38)	63	5	19.9	4
	4315R-M		28	315	314	240	47.625(60)		14(14)	38(38)	63	5	19.9	4

() Metric Size, ● Stock item

▶ Available Inserts



SNMF-MF



SNMF-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SNMF 1206QNN-MF					●										E18
1206QNN-MM					●										

▶ Available Arbors

Designation	General Arbor	NC Arbors	
		RMT8Q	RMT8QM
RMT8Q(M) <input type="checkbox"/> 080R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA25.4-25	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA25.4 - <input type="checkbox"/> <input type="checkbox"/>	FMC27
<input type="checkbox"/> 100R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA31.75 - <input type="checkbox"/> <input type="checkbox"/>	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA31.75 - <input type="checkbox"/> <input type="checkbox"/>	FMC32
<input type="checkbox"/> 125R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA38.1 - <input type="checkbox"/> <input type="checkbox"/>	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA38.1 - <input type="checkbox"/> <input type="checkbox"/>	FMB40
<input type="checkbox"/> 160R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA50.8 - <input type="checkbox"/> <input type="checkbox"/>	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA50.8 - <input type="checkbox"/> <input type="checkbox"/>	
<input type="checkbox"/> 200R	NT* <input type="checkbox"/> <input type="checkbox"/> (M/U)-FMA47.625-25, KCP-8***	BT** <input type="checkbox"/> <input type="checkbox"/> -FMA47.625- <input type="checkbox"/> <input type="checkbox"/>	FMB60
<input type="checkbox"/> 250R			
<input type="checkbox"/> 315R	KCP-8*** (Center Ring Plug)	-	

*-NT Number **-BT Number ***Over Milling 5



▶ Parts

Specification					
Ø80-Ø315	ETKA0523	KHB0417	SPR0315	LTC05SR-RM4	TW20-100

▶ Available Inserts E18

▶ Available Adaptors E318 ~ E320

RM16AC(M)6000

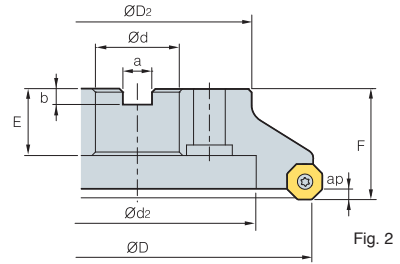

AA
45°

• AR : -6°
• RR : -6°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		Fig.	
RM16ACM 6063HR-M			5	63	49	22	11	18	10.4	6.3	20	40	4.0	0.7	1
RM16AC 6080HR-M	● (●)		6	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	4.0	1.2	1
(RM16ACM) 6100HR-M	● (●)		7	100	67	31.75(32)	18	26	12.7(14.4)	8	33(25)	63(50)	4.0	1.9	1
6125HR-M	● (●)		8	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	35(29)	63	4.0	3.5	1
6160R-M			10	160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	4.0	4.1	2
6200R-M			12	200	130	47.625(60)	-	135	25.4(25.7)	14	38(32)	63	4.0	6.1	2
6250R-M			15	250	180	47.625(60)	-	180	25.4(25.7)	14	38	63	4.0	11.5	2
6315R-M			20	315	240	47.625(60)	-	238	25.4(25.7)	14	38	63	4.0	18.9	2
6400R-M			26	400	260	47.625(60)	-	238	25.4(25.7)	14	38	80	4.0	32.7	2

() Metric Size, ● Stock item

▶ Available Inserts



ONHX-MF



ONHX-ML



ONHX-MM



ONHX-W



ONHX-MA



ONMX-MF



ONMX-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30		G10E
ONHX 060608-MM					●				●	●	●			
060608-MF					●				●	●	●			
060608-ML										●	●			
060608-MA														●
060608-W					●			●	●	●	●			
0606ANN-MM									●	●	●			
0606ANN-MF					●				●	●	●			
ONMX 060608-MM					●				●	●	●			
060608-MF					●				●	●	●			
0606ANN-MM					●				●	●	●			
0606ANN-MF								●	●	●	●			

E11

▶ Available Arbors

Designation	Available Arbors	
	RM16AC	RM16ACM
RM16AC(M) 6063HR-M		BT□□-FMC22-□□
6080HR-M	BT□□-FMA25.4-□□	BT□□-FMC27-□□
6100HR-M	BT□□-FMA31.75-□□	BT□□-FMC32-□□
6125HR-M	BT□□-FMA38.1-□□	BT□□-FMB40-□□
6160R-M	BT□□-FMA50.8-□□	BT□□-FMC40-□□
6200R-M		
6250R-M		
6315R-M	BT□□-FMA47.625-□□	BT□□-FMB60-□□
6400R-M		

▶ Parts



Specification		
Ø63~Ø400	Screw FTGA0513	Wrench TW20-100

▶ Available Inserts E11

▶ Available Adaptors E310 ~ E320



RM16AC(M)8000

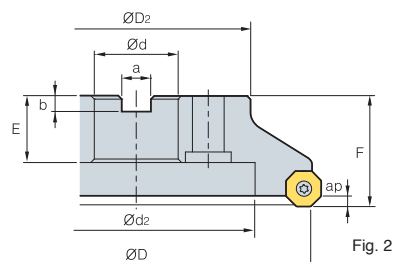

• AR : -6°
• RR : -6°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		Fig.
RM16ACM 8063HR-M			63	49	22	11	18	10.4	6.3	20	40	5.5	0.7	1
RM16AC 8080HR-M	● (●)		80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	5.5	1.2	1
(RM16ACM) 8100HR-M	(●)		100	67	31.75(32)	18	26	12.7(14.4)	8	33(25)	63(50)	5.5	1.8	1
8125HR-M	● (●)		125	87	38.1(40)	22	32	15.9(16.4)	10(9)	35(29)	63	5.5	3.5	1
8160R-M	● (●)		160	107	50.8(40)	-	107	19(16.4)	11(9)	38(32)	63	5.5	4.5	2
8200R-M	(●)		200	130	47.625(60)	-	135	25.4(25.7)	14(14)	38(32)	63	5.5	5.8	2
8250R-M			250	180	47.625(60)	-	180	25.4(25.7)	14	38	63	5.5	11.4	2
8315R-M			215	240	47.625(60)	-	238	25.4(25.7)	14	38	63	5.5	18.8	2
8400R-M			400	260	47.625(60)	-	238	25.4(25.7)	14	38	80	5.5	32.7	2

() Metric Size, ● Stock item

▶ Available Inserts



ONHX-MF



ONHX-ML



ONHX-MM



ONHX-W



ONHX-MA



ONMX-MF



ONMX-MM

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM825	NCM835	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
ONHX 080608-MM					●				●	●	●			
080608-MF										●	●			
080608-ML										●	●			
080608-W					●					●	●			
080608-MA													●	
0806ANN-MM										●	●			
0806ANN-MF										●	●			
ONMX 080608-MM					●				●	●	●			
080608-MF									●	●	●			
0806ANN-MM					●				●	●	●			
0806ANN-MF					●				●	●	●			

▶ Available Arbors

Designation	Available Arbors	
	RM16AC	RM16ACM
RM16AC(M) 8063HR-M	-	BT□□-FMC22-□□
8080HR-M	BT□□-FMA25.4-□□	BT□□-FMC27-□□
8100HR-M	BT□□-FMA31.75-□□	BT□□-FMC32-□□
8125HR-M	BT□□-FMA38.1-□□	BT□□-FMB40-□□
8160R-M	BT□□-FMA50.8-□□	BT□□-FMC40-□□
8200R-M		
8250R-M		
8315R-M	BT□□-FMA47.625-□□	BT□□-FMB60-□□
8400R-M		

▶ Parts

Specification		
Ø63-Ø400	Screw FTGA0513	Wrench TW20-100

▶ Available Inserts E11

▶ Available Adaptors E310 ~ E320


Lighter tool ensures excellent performance in high speed machining.

Aero Mill

- Excellent machining performance can be acquired especially at the high speeds due to the light aluminum cutter body that is 50% of the weight of a conventional steel cutter body
- High speed milling cutter for precise machining
- Special Aluminum material and high rake angle of insert provide rigid & stable machining
- High tolerance surface finishes can be acquired due to the low cutting load provided from the high rake angle
- Balanceable up to G2.5 level


▶ Assembly structure of cutter

- ▶ Increased stability based on cartridge type application
- ▶ Both insert and blade can be available in the same cutter
- ▶ Finishing to roughing can be possible because of wide chip pocket space
- ▶ Roughing and finishing available with carbide, PCD insert application
- ▶ Cutter breakage can be solved by making use of the chip cover

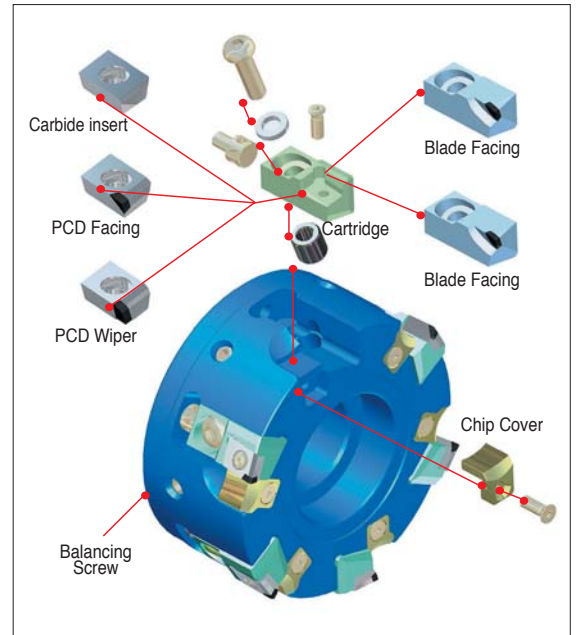


▶ Coolant through system


- ▶ Specially designed coolant through system provides coolant from the center of the cutter to the insert enhances the cooling rate and chip evacuation.
- ▶ Direction of coolant has designed to focus directly to the insert cutting edge to maximize chip evacuation and improve tool life
- ▶ Coolant bolt is applicable up to Ø160, coolant cover is applicable from Ø200 and over. Coolant devices are sold separately for through coolant system, through coolant arbor has to be used

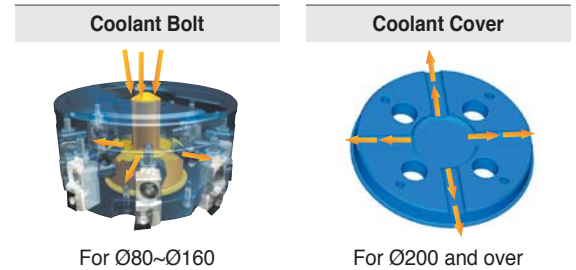

▶ Application range

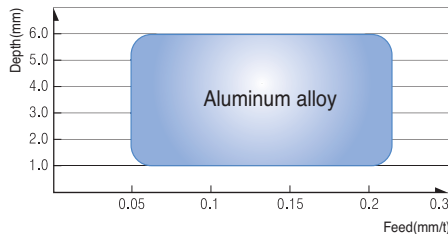


▶ Recommended cutting condition

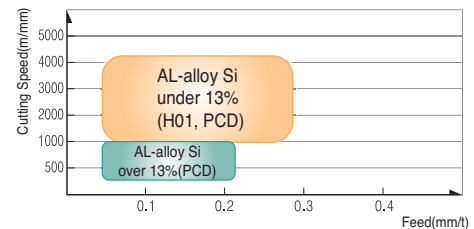

▶ Surface finish

- **Cutting condition**
 vc : 1570m/min vf : 3000mm/min
 S : 5000 rpm fz : 0.1mm/t
 ap : 0.5mm Machine : PCV620
- **Workpiece**
 A6061
- **Designation**
 Cutter : APD100R-A6Z (6Flutes)
 Insert : CDEW1204R-XCF(H01)

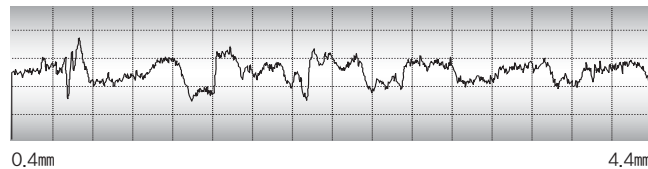

- Rmax : 2.1 μm
- Rz : 1.6 μm
- Ra : 0.3 μm

▶ Max. revolution

Diameter(mm)	Max. revolution(rpm)
Ø80	16,000
Ø100	15,000
Ø125	12,500
Ø160	10,000
Ø200	8,000
Ø250	6,500
Ø315	5,000

▶ Coolant parts


Diameter(mm)	Type	Designation	Shape	Note
Ø80	Coolant Bolt	CBP080-IN/MM		Extra charge
Ø100	Coolant Bolt	CBP100-IN CBP100-MM-1		
Ø125	Coolant Bolt	CBP125-IN CBP125-MM-1		
Ø160	Coolant Bolt	CBP160-IN CBP160-MM		
Ø200	Coolant Cover	CCP200		
Ø250	Coolant Cover	CCP250		
Ø315	Coolant Cover	CCP315		

• Choice : CBP100-IN : APD type, General for unmarked item




Cone Shaped Head Indexable Drill Aero Mill Plus

- Improve tool life up to 20% with a coolant system that enables direct spray cooling to cutting blades.
- Enable high feed milling by increasing the number of cutting blades by 20% through a simply structured coupling method for clamps
- Reduce setting time up to 40% by applying a spanner adjustment method
- Introduce an aluminum cutter body to provide a superior cutting performance during high speed milling.

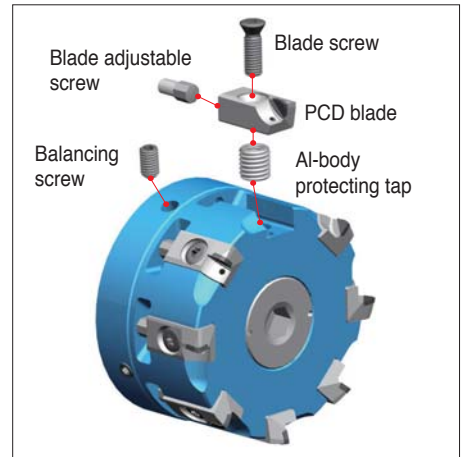


▶ Code system

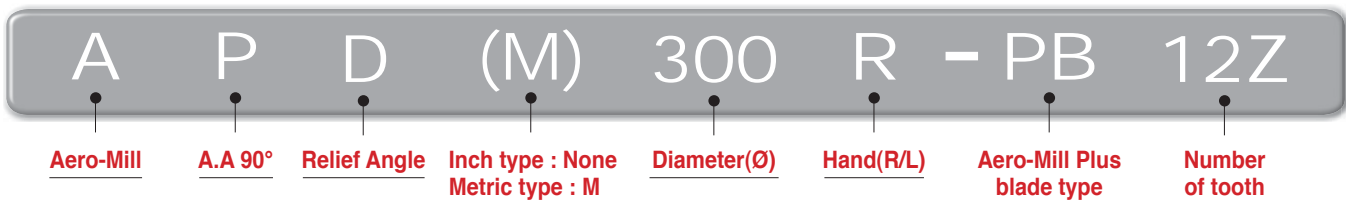


▶ Structure of Aero Mill Plus

- ▶ Prevent overload to the spindle bearings through weight reduction of the Al alloy body and enable high-speed processing.
- ▶ Provide PCD Blade-dedicated cutter design to offer stable tool life and increase of applied blades.
- ▶ Improve the blade life by applying a coolant system that enables direct spray cooling to cutting blades.
- ▶ Adopt a clamping method with simple structure without set screw.
- ▶ Reduce weight and apply a coolant bolt that is exclusively used for Aero-Mill Plus that applies coolant to remove internal chip.

▶ Application range

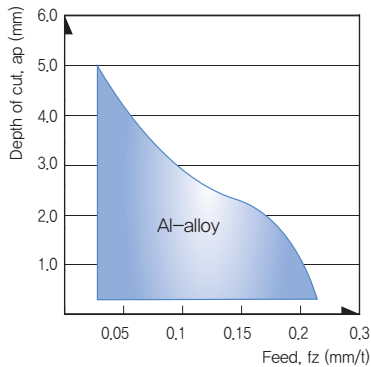

▶ Recommended cutting speed

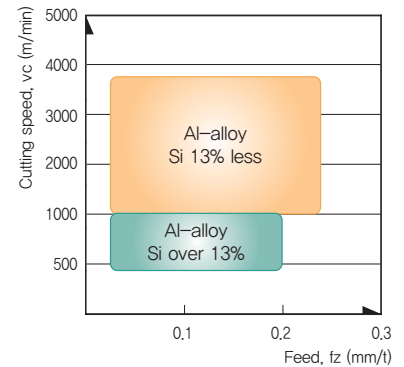

▶ Max. RPM

Diameter(mm)	Max. revolution(rpm)
Ø80	20,000
Ø100	18,000
Ø125	16,000
Ø160	13,000
Ø200	10,000
Ø250	8,000
Ø315	7,000

▶ Coolant parts

Diameter(mm)	Type	inch / mm	Designation	Shape	Material	Note
Ø80	Coolant bolt	inch, mm	CB12-AMaP80		Steel	Included
		inch	CB16-AMP100			
		mm	CB16-AMP100M			
		inch	CB20-AMP125			
		mm	CB20-AMP125M			
		inch	CB24-AMP160			
Ø160	Coolant cover	mm	CB20-AMP125M		Aluminum	Extra charge
		inch, mm	CCV-AMP200			
Ø200	Coolant cover	inch, mm	CCV-AMP250		Aluminum	Extra charge
Ø250			CCV-AMP250			
Ø315			CCV-AMP315			

E Technical information for Aero Mill Mini


Good performance in small-medium size of operations

Aero Mill Mini

- Good performance in small-medium size of operations
- Good duration of the steel body
- Choice of Uncoated carbide / PCD grades can be applied to various kind of work material
- Balance level : G25




Code system

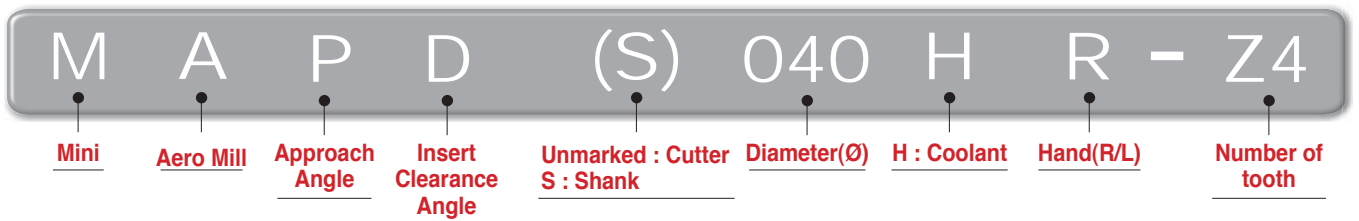


Structure of Aero Mill Mini


- ▶ Simple and strong design of Screw-on clamping.
- ▶ Adjustable range : ± 0.1 mm Max
- ▶ Adjustable step : Min. 2 micro meter
- ▶ Wide chip pocket area for Roughing and Aluminum machining.
- ▶ Inner coolant system

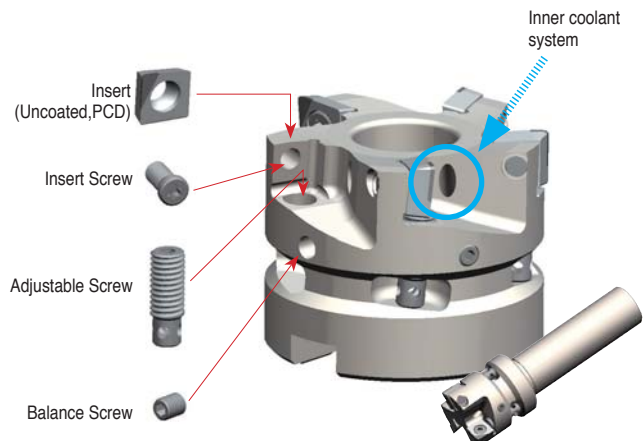

Application range

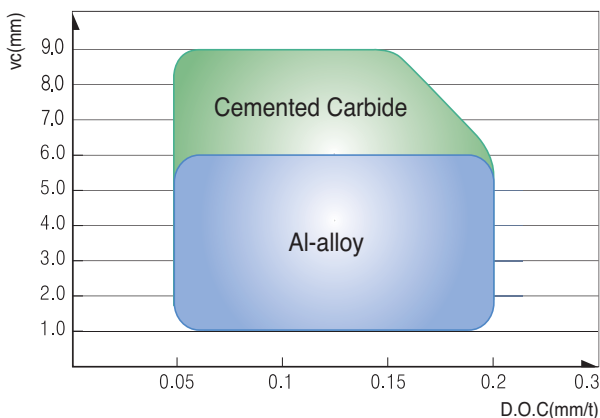

Recommended cutting condition

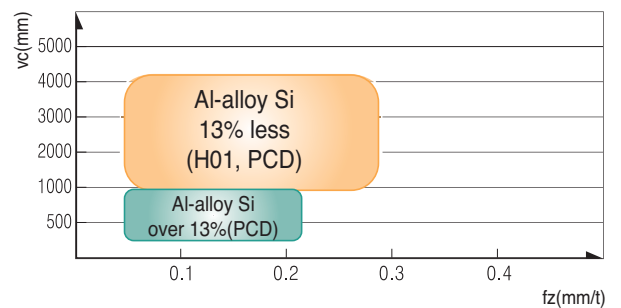



Max. RPM

Diameter	Max. RPM(min ⁻¹)
Ø32	26,000
Ø40	24,500
Ø50	22,000
Ø63	20,000



APD(M)-A

Cartridge + Insert

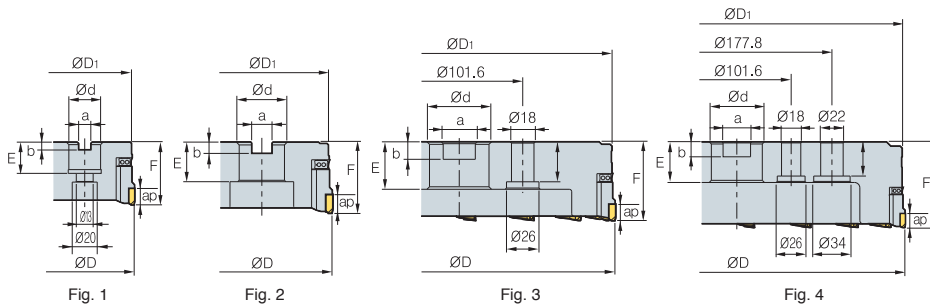

Designation	Stock		Z	ØD	ØD ₁	Ød	a	b	E	F	ap	Max rpm	kg	Fig.
	R	L												
APD (APDM)	080R/L-A6Z	●(●)	6	80	76	25.4(27)	9.5(12.4)	6(7)	25(22)	50	10	16000	0.75	1
	100R/L-A6Z	●(●)	6	100	95	31.75(32)	12.7(14.4)	8(8)	32(28)	50	10	15000	0.95	2
	125R/L-A8Z	●(●)	8	125	120	38.1(40)	15.9(16.4)	10(9)	38(30)	63	10	12500	1.8	2
	160R/L-A10Z		10	160	155	50.8(40)	19.0(16.4)	11(9)	38(30)	63	10	10000	2.9	2
	200R/L-A12Z		12	200	195	47.625(60)	25.4(25.7)	14(14)	38(38)	63	10	8000	4.0	3
	250R/L-A16Z		16	250	245	47.625(60)	25.4(25.7)	14(14)	38(38)	63	10	6500	6.3	3
	315R/L-A18Z		18	315	310	47.625(60)	25.4(25.7)	14(14)	38(38)	80	10	5000	11.3	4

() Metric Size, ● Stock item

▶ Available Inserts



Designation	Cermets			Uncoated			PCD	Page
	CN2000	CN20	CN30	H01	G10E	A30	ST20E	
CDEW	1204R-XCF			●				
	1204L-XCF							
	1204R-XAF							●
	1204L-XAF							
	1204R-NAF							●
	1204R-XAW							●
	1204L-XAW							●
	1204R-NAW							●

▶ Available Arbors

Designation	General Arbor	NC Arbors
APD(M) 080R/L	NT*□□ (M/U)-FMA25.4-25	BT** □□ -FMA25.4
100R/L	NT*□□ (M/U)-FMA31.75 -□□	BT** □□ -FMA31.75
125R/L	NT*□□ (M/U)-FMA38.1 -□□	BT** □□ -FMA38.1
160R/L	NT*□□ (M/U)-FMA50.8 -□□	BT** □□ -FMA50.8
200R/L	NT*□□ (M/U)-FMA47.625-25, KCP-	BT** □□ -FMA47.625-
250R/L	8***	□□
315R/L	KCP-8*** (Center Ring Plug)	-

*□□-NT Number **□□-BT Number ***Over Milling 5

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
Aluminum	1,000 ~ 4,000 500 ~ 2,500	0.05 ~ 0.30 0.05 ~ 0.20	DP200 H01

▶ Parts

Specification								
Ø80~Ø315	LAPDR/L-AJ	CAPDR/L-AJ	PTMA0411	FTNA0411	AZ0514	BHA0619-NYLOK	TW15S	HW50

▶ Available Inserts E06, E07 ▶ Available Adaptors E310 ~ E318

APD(M)-PB

Blade





Fig. 1




Fig. 2



• AR : 6°
• RR : -4°~1°

Designation	Stock		MAX	ØD	ØD1	Ød	a	b	E	F	ap	kg	Fig.
	R	L											
APD(M)-PB 080R/L-PB6Z	●		6 10	80	77	25.4(27)	9.5(12.4)	6(7)	23.5	50	5	0.55	1
080R/L-PB8Z	●		8 10	80	77	25.4(27)	9.5(12.4)	6(7)	23.5	50	5	0.55	1
100R/L-PB6Z	●		6 12	100	97	31.75(32)	12.7(14.4)	8	34(32)	50	5	0.92	2
100R/L-PB8Z	●		8 12	100	97	31.75(32)	12.7(14.4)	8	34(32)	50	5	0.92	2
125R/L-PB8Z	●		8 14	125	122	38.1(40)	15.9(16.4)	10(9)	40(35)	63	5	1.9	2
125R/L-PB10Z	●		10 14	125	122	38.1(40)	15.9(16.4)	10(9)	40(35)	63	5	1.9	2
160R/L-PB10Z	●		10 20	160	157	50.8(40)	19.0(16.4)	11(9)	41(35)	63	5	3.3	2
160R/L-PB12Z	●		12 20	160	157	50.8(40)	19.0(16.4)	11(9)	41(35)	63	5	3.3	2

(mm)

() Metric Size, ● Stock item

Available Blades



BAMPR-XAF



BAMPR-XAW



BAMPR-XAWR

Designation	PCD		Page
	DP150		
BAMPR-XAF	●		E06
BAMPR-XAW	●		
BAMPR-XAWR	●		

Available Arbors

Designation	NC Arbors
APD(M)-PB 080R/L-PB□□Z	BT□□-FMA25.4(FMC27)-□□
100R/L-PB□□Z	BT□□-FMA31.75(FMC32)-□□
125R/L-PB□□Z	BT□□-FMA38.1(FMB40)-□□
160R/L-PB□□Z	BT□□-FMA50.8(FMB/FMC40)-□□

Parts

Specification						
Ø80~Ø160	Blade screw ETKA0620	Blade adjustable screw AZ0514-SPN6	Al-body protecting tap UZD1010	Balancing screw KHE0610	Wrench for insert SPN-6	Wrench for Cartridge TW25-100

Available Inserts E06

Available Adaptors E318 ~ E320



APD(M)-PB

Blade





Fig. 3

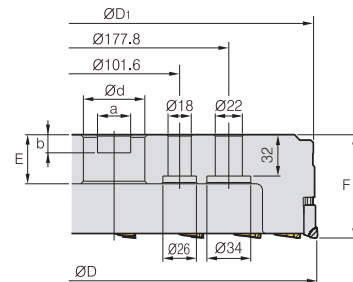


Fig. 4



AA
90°
• AR : -6°
• RR : -39°~16°

Designation	Stock		MAX	ØD	ØD1	Ød	a	b	E	F	ap	kg	Fig.
	R	L											
APD(M)-PB 200R/L-PB12Z			12 26	200	197	47.625(60)	25.4(25.7)	14	40	63	5	4.0	3
250R/L-PB16Z			16 32	250	247	47.625(60)	25.4(25.7)	14	40	63	5	6.5	3
315R/L-PB18Z			18 42	315	312	47.625(60)	25.4(25.7)	14	40	63	5	11.3	4

() Metric Size, ● Stock item

Available Blades



Designation	PCD		Page
	DP150		
BAMPR-XAF	●		E06
BAMPR-XAW	●		
BAMPR-XAWR	●		

Available Arbors

Designation	NC Arbors
APD(M)-PB 200R/L-PB□□Z	BT□□-FMA47.625(FMB60)-□□
250R/L-PB□□Z	
315R/L-PB□□Z	


Parts

Specification						
Ø200~Ø315	ETKA0620	AZ0514-SPN6	UZD1010	KHE0610	SPN-6	TW25-100

Available Inserts E06

Available Adaptors E318 ~ E320

MAPD000HR/L-Z0 *New*



※ PCD ap:5mm




• AR : 6°
• RR : -1°~12°


Designation	Stock		⊙	ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap	Max rpm	kg	
	R	L														
MAPD	040HR/L-Z4	●		4	40	34	16	8.4	5.6	18	40	9	14	9.5	24,000	0.24
	050HR/L-Z5	●		5	50	42	22	10.4	6.3	20	40	11	18	9.5	22,000	0.35
	063HR/L-Z6	●		6	63	42	22	10.4	6.3	20	40	11	18	9.5	20,000	0.65

● Stock item


▶ Available Inserts



SNEW



SNEW-XAF



SNEW-NAF

Strengthened Edge

Designation	Cermet				Uncoated			PCD	Page
	CN2000	CN20	CN30	H01	G10E	A30	ST20E	DP200	
SNEW	09T3ADFR			●					E18
	09T3ADTR-XAF							●	
	09T3ADTR-NAF							●	

▶ Available Arbors

Designation	NC Arbors
MAPD	040HR/L-Z4
	050HR/L-Z5
	063HR/L-Z6

BT** □□ - FMC16- □□
BT** □□ - FMC22- □□
BT** □□ - FMC22- □□

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
Aluminum	1,000 ~ 4,000	0.05 ~ 0.30	DP200 H01
	500 ~ 2,500	0.05 ~ 0.20	

▶ Coolant Bolt (Not included)

Designation	Applicable cutter	Available Cutters
CB0525	MAPD040HR/L-Z4	Ø40
CB1025	MAPD050HR/L-Z5	Ø50
	MAPD063HR/L-Z6	Ø63

▶ Parts


Specification	Insert Screw	Adjust Screw	Balance Screw	Wrench for Insert	Adjust Wrench
Ø40~Ø63	FTKA0408	AHX0617F-NYLOK	KHD0405	TW15S	HW20L

▶ Available Inserts E18

▶ Available Adaptors E318 ~ E320



MAPDS000HR/L-Z0 *New*

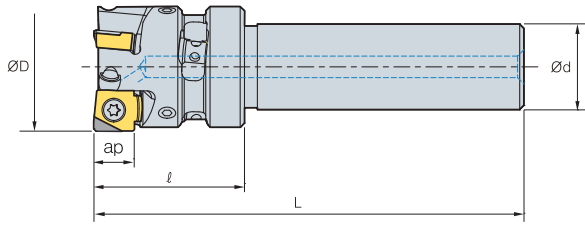

※ PCD ap:5mm




• AR : 6°
• RR : -4°~1°

Designation	Stock		Z	ØD	Ød	ℓ	L	ap	Max rpm	kg
	R	L								
MAPDS	●		3	32	20	35	100	9.5	26,000	0.35
	●		4	40	20	35	100	9.5	24,500	0.42


(mm)

● Stock item


▶ Available Inserts



SNEW



SNEW-XAF



SNEW-NAF

Strengthened Edge

Designation	Cermet				Uncoated			PCD	Page
	CN2000	CN20	CN30	H01	G10E	A30	ST20E	DP200	
SNEW				●				●	E18
09T3ADFR								●	
09T3ADTR-XAF								●	

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
Aluminum	1,000 ~ 4,000 500 ~ 2,500	0.05 ~ 0.30 0.05 ~ 0.20	DP200 H01

▶ Parts

Specification	Insert Screw	Adjust Screw	Balance Screw	Wrench for Insert	Adjust Wrench
Ø32~Ø63	FTKA0408	AHX0617F-NYL0K	KHD0405	TW15S	HW20L

▶ Available Inserts E18

▶ Available Adaptors E318 ~ E320


E PCD Face cutter

Code system

PDF 6 032 - HSK63A

PDF FACE CUTTER Tooth Diameter Shank

PCD FACE CUTTER

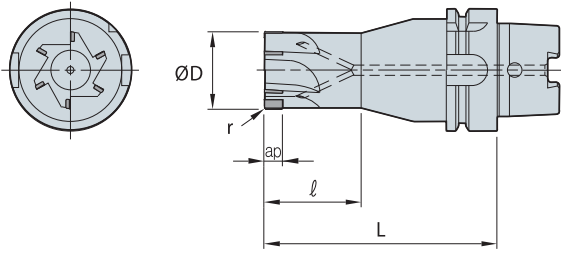

AA
90°

- AR : 6°
- RR : 5°~9°

(mm)

Designation	Stock		$\varnothing D$	r	ap	l	L
PDF	4032-HSK50A	4	32	0.5	8	50	120
	4040-HSK50A	4	40	0.5	8	50	120
	4032-HSK63A	4	32	0.5	8	50	120
	4040-HSK63A	4	40	0.5	8	50	120
	4050-HSK63A	4	50	0.5	8	50	120
	6063-HSK63A	6	63	0.5	12	-	100
	6063-HSK100A	6	63	0.5	12	-	100

● Stock item

Recommended cutting condition

Workpiece	$vc(m/min)$	$fz(mm/t)$	$ap(mm)$
Al, Brass, Alloy	200~2,000	0.02~0.1	0.05~4.0

Special PCD order sheet





Fig. 1




Fig. 2

Designation	Fig.	tooth	Dimensions(mm)					Shank spec.
			$\varnothing D$	r	ap	l	L	
PDF								



Various applications are available with multi-functional cutters


Alpha Mill

- Innovative curve cutting edge and chip-breaker design ensures ideal 90 degree cutting and lower cutting resistance
- Various applications are available with multi-functional cutters. (Facing, Slotting, Square shoulder milling and etc.)
- Improved insert life time with optimized with each application
- Excellent performance ensured at large depth of cut operations due to strong cutting edge and low cutting resistance

▶ Alpha Mill Insert

▶ Long tool life at high speed, high feed and deeper cutting by low cutting resistance and strong cutting edge


▶ Distinguished features of Alpha-Curve reduce cutting resistance and improve cutting edge strength and wear resistance

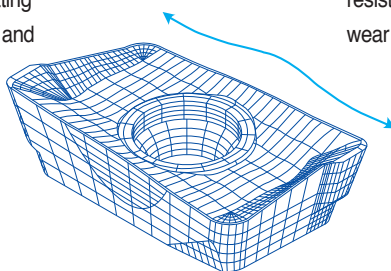

▶ Low cutting resistance is realized by KORLOY unique design i.e alpha curve cutting edge and optimal convex and concave design

▶ Highly efficient machining is available by the ideal application of the grade to material



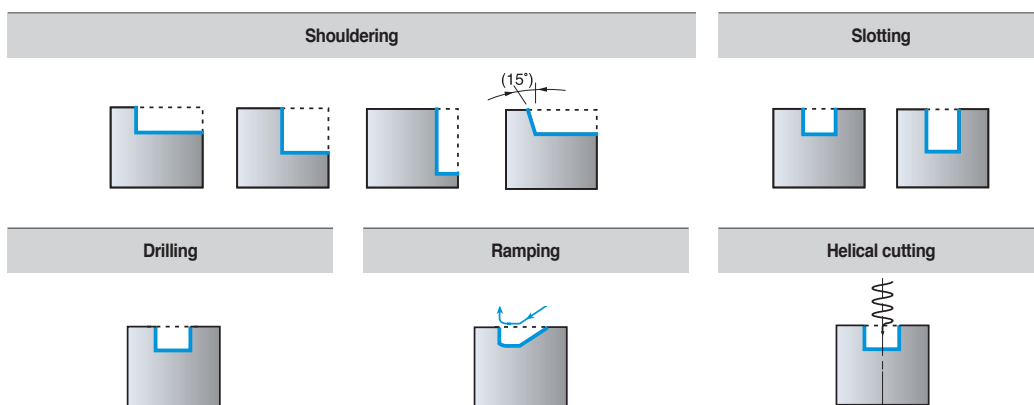

▶ Application example



Alpha Mill APMT-MA, ML

- Features**
- ▶ MA : Sharp edge and buffed surface for aluminum machining improve lubrication.
 - ▶ ML : Cutting edge and grades for hard-to-cut materials(Ti, STS, Inconel) ensure superb performance in machining.

Features of Chip breakers





Type	Chip breaker	Cutting edge	Features	Type	Chip breaker	Cutting edge	Features
Al	MA		Optimal cutting edge and buffed surface for aluminum machining ensure high performance in machining.	Light cutting	MF		Chip breaker with low cutting load and harder cutting edge than ML's are optimal for light cutting.
Hard-to-cut material	ML		Chip breaker with low cutting load is optimal for machining hard-to-cut materials.	General cutting	MM		Optimal for milling in general ranges

Product constitution

Item description	Type	Nose R	MA	ML	
APMT	1000Type	0.4	APMT0602PDR-MA	-	
		0.8	APMT060208PDR-MA	-	
	1500Type	0.4	APMT0903PDR-MA	APMT0903PDER-ML	
		0.8	APMT090308PDR-MA	APMT090308PDER-ML	
	2000Type	0.5	APMT11T3PDR-MA	APMT11T3PDER-ML	
		0.8	APMT11T308PDR-MA	APMT11T308PDER-ML	
	3000Type	0.4	APMT160404PDR-MA	APMT160404PDER-ML	
		0.8	APMT1604PDR-MA	APMT1604PDER-ML	
	4000Type	0.4	APMT180604PDR-MA	APMT180604PDER-ML	
		0.8	APMT1806PDR-MA	APMT1806PDER-ML	
		1.2	APMT180612PDR-MA	APMT180612PDER-ML	
		1.6	APMT180616PDR-MA	APMT180616PDER-ML	
		2.0	APMT180620PDR-MA	APMT180620PDER-ML	
		2.4	APMT180624PDR-MA	APMT180624PDER-ML	
			3.0	APMT180630R-MA	APMT180630R-ML


- The inserts can switch to the APMT type holders.

Recommended grades and chip breakers by workpiece

Chip breaker	Cutter edge	Recommended C/B and grade as per workpiece(● : 1st)													
		P				M		K		N		S			
		Low carbon steel		Mild steel		High carbon steel		Alloy steel		Stainless steel		Cast iron		Aluminum alloy	
		C/B	Grades	C/B	Grades	C/B	Grades	C/B	Grades	C/B	Grades	C/B	Grades	C/B	Grades
MA		-	-	-	-	-	-	-	-	●	●H01	-	-	-	-
ML		-	-	-	-	●	●PC5300 ○PC5400 ○PC3545 ○PC9530	-	-	-	-	-	-	●PC5300 ○PC5400 ○PC3545	-
MF		●	●PC3500 ○PC5300 ○PC5400 ○NCM325 ○NCM335	-	○PC3500 ○PC3545 ○NCM325 ○NCM335	-	●PC5300 ○PC5400 ○PC3545 ○PC9530	-	●PC6510 ○PC5300 ○PC5400	-	-	-	-	●PC5300 ○PC5400 ○PC3545	-
MM		-	●PC3500 ○PC5300 ○PC5400 ○NCM325 ○NCM335	●	●PC3500 ○PC5300 ○PC5400 ○NCM325 ○NCM335	-	●PC5300 ○PC5400 ○PC3545 ○PC9530	-	●PC6510 ○PC5300 ○PC5400	-	-	-	-	●PC5300 ○PC5400 ○PC3545	-



▶ Recommended depth of cut

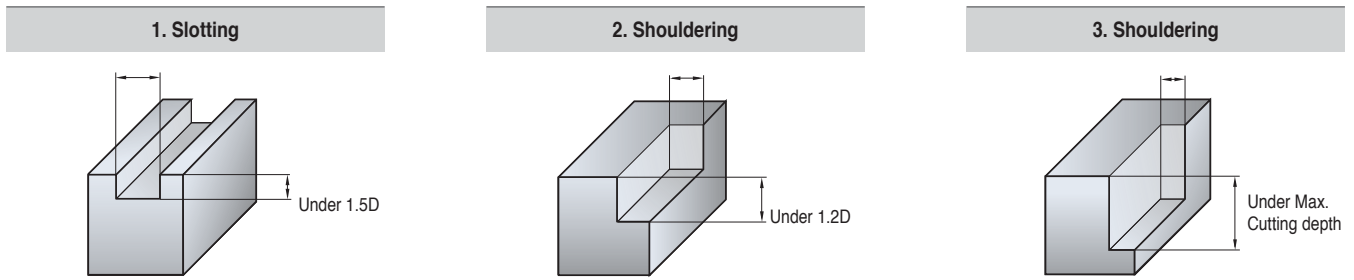

▶ Recommended cutting condition(for multi edge type)


Workpiece	Grades	Fig.	Tool Dia.							
			Ø20, 25		Ø32, 40		Ø50, 63		Ø80, 100	
			vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)
Mild steel, Low carbon steel	NCM325 PC3500	①	80~100	0.05~0.08	100~120	0.05~0.08	100~120	0.05~0.08	100~120	0.05~0.08
		②	100~120	0.08~0.10	120~140	0.08~0.10	120~140	0.08~0.10	120~140	0.08~0.10
		③	100~120	0.10~0.15	140~140	0.10~0.15	120~140	0.10~0.15	130~150	0.10~0.15
High carbon steel, Alloy steel	NCM325 PC3500	①	60~80	0.05	80~100	0.05	80~100	0.05	80~100	0.05
		②	80~100	0.05~0.08	100~120	0.08~0.10	100~120	0.08~0.10	100~120	0.08~0.10
		③	80~100	0.10~0.15	110~130	0.10~0.15	100~120	0.10~0.15	110~130	0.10~0.15
Alloy tool steel	NCM325 PC3500	①	50~70	0.05	70~90	0.05	70~90	0.05	70~90	0.05
		②	60~80	0.05~0.08	90~120	0.05~0.08	100~120	0.05~0.08	100~120	0.05~0.08
		③	90~110	0.12~0.18	100~130	0.10~0.15	100~120	0.10~0.15	110~130	0.10~0.15
Stainless steel	PC5300 PC9530	①	50~70	0.054	70~90	0.05	70~90	0.05	70~90	0.05
		②	60~80	0.05~0.08	90~120	0.05~0.08	100~120	0.05~0.08	100~120	0.05~0.08
		③	90~110	0.10~0.15	100~130	0.10~0.15	110~130	0.10~0.15	110~130	0.10~0.15
Cast iron	PC6510 PC5300	①	70~90	0.10~0.12	70~90	0.10~0.12	90~120	0.10~0.12	90~120	0.10~0.12
		②	80~100	0.12	90~120	0.12	100~140	0.12	100~140	0.12
		③	80~100	0.15~0.2	100~130	0.15~0.20	120~150	0.15~0.20	120~150	0.15~0.20
Aluminum alloy	H01	①	200~800	0.10~0.2	300~900	0.10~0.20	400~1,000	0.10~0.20	400~1,000	0.10~0.20
		②	250~900	0.15~0.3	300~950	0.15~0.3	400~1,000	0.10~0.40	400~1,000	0.10~0.40
		③	250~900	0.15~0.3	300~950	0.15~0.3	400~1,000	0.10~0.40	400~1,000	0.10~0.40
Hardened steel	PC3545 PC5300	①	50~70	0.03	60~90	0.03	60~90	0.03	60~90	0.03
		②	60~80	0.05~0.08	80~100	0.05~0.08	80~100	0.05~0.08	80~100	0.05~0.08
		③	80~100	0.05~0.08	80~100	0.05~0.08	80~100	0.05~0.08	80~100	0.05~0.08

▶ Recommended cutting condition(for single edge type)


Workpiece	Grades	Fig.	Tool Dia.							
			Ø20, 25		Ø32, 40		Ø50, 63		Ø80, 100	
			vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)
Mild steel, Low carbon steel	NCM325 PC3500	①	60~80	0.05~0.08	80~120	0.05~0.08	120~200	0.05~0.08	150~200	0.05~0.08
		②	80~120	0.08~0.10	120~180	0.08~0.10	180~250	0.08~0.10	200~250	0.08~0.10
		③	80~120	0.10~0.15	120~180	0.10~0.15	180~250	0.10~0.15	200~250	0.10~0.15
High carbon steel, Alloy steel	NCM325 PC3500	①	50~80	0.05	80~110	0.05	100~150	0.05	100~150	0.05
		②	80~100	0.05~0.08	110~150	0.05~0.10	150~200	0.05~0.10	150~200	0.05~0.10
		③	80~100	0.10~0.15	120~150	0.10~0.15	180~200	0.10~0.15	80~200	0.10~0.15
Alloy tool steel	NCM325 PC3500	①	50~70	0.05	80~100	0.05	100~130	0.05	100~130	0.05
		②	70~100	0.05~0.08	100~130	0.05~0.10	130~180	0.05~0.10	130~180	0.05~0.10
		③	70~100	0.10~0.15	100~150	0.10~0.15	130~180	0.10~0.15	130~180	0.10~0.15
Stainless steel	PC5300 PC9530	①	50~70	0.05	80~100	0.05	100~130	0.05	100~130	0.05
		②	70~100	0.05~0.08	100~130	0.05~0.10	130~180	0.05~0.10	130~180	0.05~0.10
		③	70~100	0.10~0.15	100~150	0.10~0.15	130~180	0.10~0.15	130~180	0.10~0.15
Cast iron	PC6510 PC5300	①	80~100	0.08~0.12	80~100	0.15	120~150	0.15	120~150	0.15
		②	100~120	0.12~0.15	100~130	0.15~0.18	150~200	0.15~0.18	150~200	0.15~0.18
		③	100~120	0.15~0.20	100~130	0.15~0.20	150~200	0.15~0.20	150~200	0.15~0.20
Aluminum alloy	H01	①	250~800	0.15~0.20	300~900	0.15~0.20	400~1,000	0.10~0.20	400~1,000	0.10~0.20
		②	250~900	0.20~0.25	350~950	0.20~0.25	400~1,000	0.20~0.30	400~1,000	0.20~0.30
		③	250~900	0.25~0.3	350~950	0.25~0.30	400~1,000	0.30~0.10	400~1,000	0.30~0.40
Hardened steel	PC3545 PC5300	①	50~70	0.03	60~90	0.03	60~90	0.03	60~90	0.03
		②	60~80	0.05~0.08	80~100	0.05~0.08	80~100	0.05~0.08	80~100	0.05~0.08
		③	80~100	0.05~0.08	80~100	0.05~0.08	80~100	0.05~0.08	80~100	0.05~0.08

▶ Cutting condition for ramping and helical operation


1. Ramping

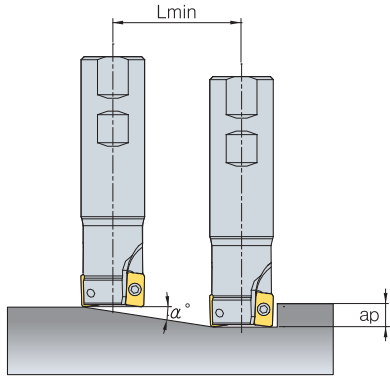

2. Helical cutting for blind hole

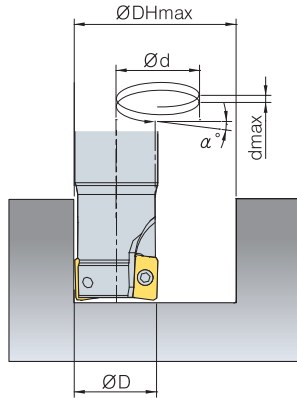

3. Helical cutting for through hole

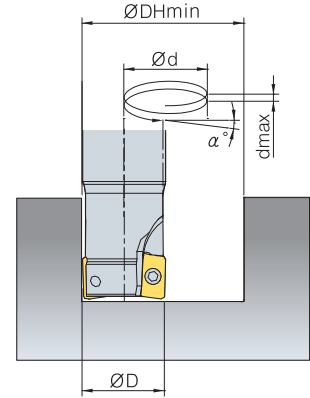


Designation	Tool Dia. ØD(min)	Ramping			Helical cutting for blind hole				Helical cutting for through hole	
		ap	Maximum angle α(°)	Lmin(mm)	Max. desirable hole Dia. ØDHmax(mm)	Max. pitch dmax(mm)	Min. desirable hole Dia. ØDHmin(mm)	Max. pitch dmax(mm)	Min. desirable hole Dia. ØDHmin(mm)	Max. pitch dmax(mm)
AMS1010HS	10	5	6.5	44	18.8	2.1	17.6	2.0	13	1.5
AMS1011HS	11		5.6	51	20.8	2.0	19.6	1.9	15	1.5
AMS1012HS	12		4.9	58	22.8	2.0	21.6	1.9	17	1.5
AMS1014HS	14		3.9	73	26.8	1.8	25.6	1.8	21	1.4
AMS1015HS	15		3.6	80	28.8	1.8	27.6	1.7	23	1.4
AMS1016HS	16		3.3	87	30.8	1.8	29.6	1.7	25	1.4
AMS1017HS	17		3.0	94	32.8	1.7	31.6	1.7	27	1.4
AMS1018HS	18		2.8	101	34.8	1.7	33.6	1.7	29	1.4
AMS1020HS	20		2.5	115	38.8	1.7	37.6	1.6	33	1.4
AMS1021HS	21		2.3	123	40.8	1.7	39.6	1.6	35	1.4
AMS1022HS	22		2.2	130	42.8	1.6	41.6	1.6	37	1.4
AMS1025HS	25		1.9	151	48.8	1.6	47.6	1.6	43	1.4
AMS1026HS	26		1.8	158	50.8	1.6	49.6	1.6	45	1.4
AMS1032HS	32		1.4	201	62.8	1.6	61.6	1.5	57	1.4
AMS1033HS	33		1.4	208	64.8	1.6	63.6	1.5	59	1.4
AMC1032HS	32		1.4	201	62.8	1.6	61.6	1.5	57	1.4
AMC1040HS	40		1.1	258	78.8	1.5	77.6	1.5	73	1.4
AMC1050HS	50		0.9	330	98.8	1.5	97.6	1.5	93	1.4
AMC1063HS	63		0.7	423	124.8	1.5	123.6	1.5	119	1.4
AMS1510HS	10		9	7.5	68	18.8	2.5	17.4	2.3	11
AMS1512HS	12	6.5		79	22.8	2.6	21.4	2.4	15	1.7
AMS1513HS	13	5.7		90	24.8	2.5	23.4	2.3	17	1.7
AMS1514HS	14	6.3		82	26.8	2.9	25.4	2.8	19	2.1
AMS1516HS	16	5.0		102	30.8	2.7	29.4	2.6	23	2.0
AMS1517HS	17	4.6		112	32.8	2.6	31.4	2.5	25	2.0
AMS1518HS	18	4.2		122	34.8	2.6	33.4	2.5	27	2.0
AMS1519HS	19	3.9		132	36.8	2.5	35.4	2.4	29	2.0
AMS1520HS	20	3.6		142	38.8	2.5	37.4	2.4	31	2.0
AMS1521HS	21	3.4		152	40.8	2.4	39.4	2.3	33	2.0
AMS1522HS	22	3.2		162	42.8	2.4	41.4	2.3	35	1.9
AMS1524HS	24	2.8		182	46.8	2.3	45.4	2.2	39	1.9
AMS1525HS	25	2.7		192	48.8	2.3	47.4	2.2	41	1.9
AMS1528HS	28	2.3		222	54.8	2.2	53.4	2.2	47	1.9
AMS1530HS	30	2.1		242	58.8	2.2	57.4	2.1	51	1.9
AMS1532HS	32	2.0		262	62.8	2.2	61.4	2.1	55	1.9
AMS1535HS	35	1.8		292	68.8	2.1	67.4	2.1	61	1.9
AMS1540HS	40	1.5		342	78.8	2.1	77.4	2.0	71	1.9
AMC15040HS	40	1.5		342	78.8	2.1	77.4	2.0	71	1.9
AMC15050HS	50	1.2		442	98.8	2.0	97.4	2.0	91	1.9
AMC15063HS	63	0.9		572	124.8	2.0	123.4	1.9	117	1.8
AMC15080HS	80	0.7		742	158.8	1.9	157.4	1.9	151	1.8
AMC15100HS	100	0.5		942	198.8	1.9	197.4	1.9	191	1.8




$$Lmin = \frac{ap}{\tan \alpha} \text{ (mm)}$$

▶ Cutting condition for ramping and helical operation


1. Ramping

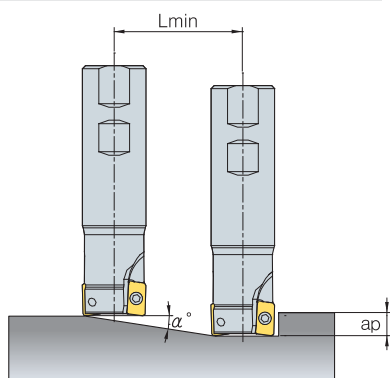

2. Helical cutting for blind hole

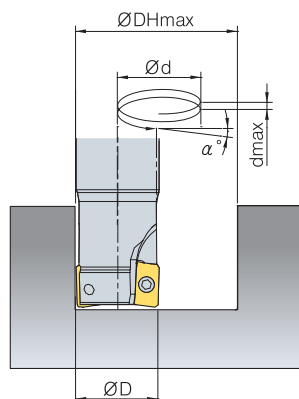



3. Helical cutting for through hole

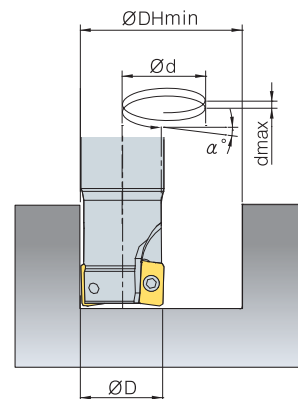

Designation	Tool Dia. ØD(min)	Ramping			Helical cutting for blind hole			Helical cutting for through hole			
		ap	Maximum angle α(°)	Lmin(mm)	Max. desirable hole Dia. ØDHmax(mm)	Max. pitch dmax(mm)	Min. desirable hole Dia. ØDHmin(mm)	Max. pitch dmax(mm)	Min. desirable hole Dia. ØDHmin(mm)	Max. pitch dmax(mm)	
AMS2010HS	10	10	16.82	33	18	5.4	16.4	5.0	11	3.3	
AMS2012HS	12		11.69	48	22	4.6	20.4	4.2	15	3.1	
AMS2014HS	14		7.55	75	26	3.4	24.4	3.2	19	2.5	
AMS2016HS	16		10.30	55	30	5.5	28	5.1	23	4.2	
AMS2018HS	18		8.23	69	34	4.9	32	4.6	27	3.9	
AMS2020HS	20		5.60	102	38	3.7	36	3.5	31	3.0	
AMS2022HS	22		5.15	111	42	3.8	40	3.6	35	3.2	
AMS2025HS	25		3.92	146	48	3.3	46	3.2	41	2.8	
AMS2032HS	32		2.70	212	62	2.9	60	2.8	55	2.6	
AMS2040HS	40		1.98	289	78	2.7	76	2.6	71	2.5	
AMS2050HS	50		1.48	386	98	2.5	96	2.5	91	2.4	
AMS2063HS	63		1.11	514	124	2.4	122	2.4	117	2.3	
AMC2050HS	50		0.36	1576	98	0.6	96	0.6	91	0.6	
AMC2063HS	63		0.27	2104	124	0.6	122	0.6	117	0.6	
AMC2080HS	80		0.21	2784	158	0.6	156	0.6	151	0.5	
AMC2100HS	100		0.16	3584	198	0.6	196	0.5	191	0.5	
AMS3025HS	25		10	4.72	121	48	4.0	46	3.8	36	3.0
AMS3032HS	32			3.00	191	62	3.2	60	3.1	50	2.6
AMS3040HS	40			2.29	250	78	3.1	76	3.0	66	2.6
AMS3050HS	50			1.64	350	98	2.8	96	2.7	86	2.5
AMS3063HS	63	1.22		470	124	2.6	122	2.6	112	2.4	
AMC3040HS	40	1.99		288	78	2.7	76	2.6	66	2.3	
AMC3050HS	50	1.67		343	98	2.9	96	2.8	86	2.5	
AMC3063HS	63	1.22		470	124	2.6	122	2.6	112	2.4	
AMC3080HS	80	0.90		636	158	2.5	156	2.5	146	2.3	
AMC3100HS	100	0.69		830	198	2.4	196	2.4	186	2.2	
AMS2025MH	25	10	1.50	764	48	1.3	46	1.2	-	-	
AMS2032MH	32		1.50	1146	62	1.6	60	1.6	-	-	
AMS3040MH	40	16	1.50	1528	78	2.0	76	2.0	-	-	
AMS4020HS	20	16	9.5	98	38.8	6.5	37.4	6.2	31	5.2	
AMS4021HS	21		5.2	179	40.8	3.7	39.4	3.6	33	3.0	
AMS4025HS	25		7.6	122	48.8	6.5	47.4	6.3	41	5.5	
AMS4026HS	26		7.1	130	50.8	6.4	49.4	6.2	43	5.4	
AMS4032HS	32		3.4	276	62.8	3.7	61.4	3.6	55	3.3	
AMS4033HS	33		3.2	288	64.8	3.7	63.4	3.6	57	3.2	
AMS4040HS	40		2.5	376	78.8	3.4	77.4	3.4	71	3.1	
AMS4050HS	50		1.9	502	98.8	3.2	97.4	3.2	91	3.0	
AMS4063HS	63		1.4	665	124.8	3.1	123.4	3.0	117	2.9	
AMC4050HS	50		1.9	502	98.8	3.2	97.4	3.2	91	3.0	
AMC4063HS	63		1.4	665	124.8	3.1	123.4	3.0	117	2.9	
AMC4080HS	80		1.1	878	158.8	2.9	157.4	2.9	151	2.8	
AMC4100HS	100		0.8	1128	198.8	2.9	197.4	2.9	191	2.8	
AMC4125HS	125		0.6	1442	248.8	2.8	247.4	2.8	241	2.7	

$$Lmin = \frac{ap}{\tan \alpha} \text{ (mm)}$$

AMC(M)1000S




• AR : 9°~13°
• RR : -14°~5°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap	
AMCM 1032HS	●	8	32	30	16	9	14	8.4	5.6	19	40	5.6	0.15
1040HS-16	●	10	40	34	16	9	14	8.4	5.6	19	40	5.6	0.24
1040HS-22		10	40	34	22	11	18	10.4	6.3	21	40	5.6	0.24
1050HS	●	12	50	42	22	11	18	10.4	6.3	21	40	5.6	0.36
1063HS	●	14	63	49	22	11	18	10.4	6.3	21	40	5.6	0.61

● Stock item

▶ Available Inserts



APMT-MA



APMT-MM

Designation	Cermet		Coated								Uncoated			page	
	CN2000	CN80	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
APMT 0602PDFR-MA														●	E05
060208PDFR-MA															
060202PDSR-MM				●	●		●			●	●				
0602PDSR-MM				●	●		●	●		●	●				
060208PDSR-MM				●	●		●			●	●				
060212R-MM				●	●					●	●				

▶ Available Arbors

Designation	Ød	NC Arbors
AMCM 1032HS	16	BT□□-FMC16-□□
1040HS-16		
1040HS-22		
1050HS	22	BT□□-FMC22-□□
1063HS		

▶ Parts



Specification		
Ø32~Ø63	Screw FTKA01842	Wrench TW06S-A

▶ Available Inserts E05

▶ Available Arbors and bolt E318 ~ E320



AMC(M)1500S




AA 90°
 • AR : 9°~13°
 • RR : -14°~5°

(mm)

Designation	Stock		ØD	ØD ₂	Ød	Ød ₁	Ød ₂	Ød ₃	a	b	E	F	ap		
AMCM 15040HS	●		5	40	34	16	9	14	-	8.4	5.6	19	40	9	0.22
15050HS	●		6	50	42	22	11	18	-	10.4	6.3	21	40	9	0.34
15063HS	●		8	63	49	22	11	18	-	10.4	6.3	21	40	9	0.57
AMC (AMCM) 15080HS	(●)		10	80	57	25.4(27)	14	25	35	9.5(12.4)	6(7)	24(23)	50	9	1.10
15100HS			12	100	67	31.75(32)	18	26	42	12.7(14.4)	8(8)	32(26)	63	9	2.10

() Metric Size, ● Stock item

▶ Available Inserts



APMT-MA



APMT-ML



APMT-MM

Designation	Cermet		Coated								Uncoated			page	
	CN2000	CN30	NCM825	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
APMT 0903PDFR-MA														●	E05
090308PDFR-MA															
0903PDER-ML															
090308PDER-ML															
0903PDSR-MM				●	●	●	●								
090308PDSR-MM				●	●		●								
090312R-MM							●								
090316R-MM				●	●										
090320R-MM					●										

▶ Available Arbors

Designation	Ød	NC Arbors
AMCM 15040HS	16	BT □□ - FMC16- □□
15050HS	22	BT □□ - FMC22- □□
15063HS		
15080HS	25.4	BT □□ - FMA25.4- □□
	27	BT □□ - FMC27- □□
15100HS	31.75	BT □□ - FMA31.75- □□
	32	BT □□ - FMC32- □□

▶ Parts



Specification		
Ø40~Ø100	Screw FTKA02565S	Wrench TW08S

▶ Available Inserts E05

▶ Available Arbors and bolt E318 ~ E320



AMC(M)2000S



• AR : 9°~13°
• RR : -14°~5°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	Ød3	a	b	E	F	ap		
AMCM	2040HS		5	40	34	16	9	14	-	8.4	5.6	18	40	11	0.22
	2050HS	●	6	50	42	22	11	18	-	10.4	6.3	20	40	11	0.34
	2063HS	●	8	63	49	22	11	18	-	10.4	6.3	20	40	11	0.57
AMC (AMCM)	2080HS	●	8	80	57	25.4(27)	14	25	35	9.5(12.4)	6(7)	25(22)	50	11	1.10
	2100HS	● (●)	10	100	67	31.75(32)	18	26	42	12.7(14.4)	8(8)	32(28)	63	11	2.10

() Metric Size, ● Stock item

Available Inserts



APMT-MA



APMT-ML



APMT-MM



APMT-MF

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT	11T3PDFR-MA													●	E05 E06
	11T308PDFR-MA														
	11T3PDER-ML									●	●				
	11T308PDER-ML														
	11T3PDSR-MM		●	●	●	●	●	●	●	●	●				
	11T3PDSR-MF		●	●	●	●	●	●	●	●	●				
	11T308PDSR-MM		●	●	●	●	●	●	●	●	●				
	11T312PDSR-MM		●	●	●	●	●	●	●	●	●				
	11T316R-MM		●	●	●	●	●	●	●	●	●				
	11T318R-MM									●	●				
	11T324R-MM			●	●		●			●	●				

Available Arbors

Designation	Ød	NC Arbors	
AMC(M)	2040HS	16	BT□□-FMC16-□□
	2050HS	22	BT□□-FMC22-□□
	2063HS	22	BT□□-FMC22-□□
	2080HS	25.4	BT□□-FMA25.4-□□
		27	BT□□-FMC27-□□
	2100HS	31.75	BT□□-FMA31.75-□□
		32	BT□□-FMC32-□□

Parts



Specification		
Ø40~Ø100	Screw FTKA02565S	Wrench TW08S

Available Inserts E05, E06

Available Arbors and bolt E318 ~ E320



AMC(M)3000S



• AR : 14°
• RR : -12°~8°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	Ød3	a	b	E	F	ap	
AMCM 3040HS	●	4	40	34	16	9	14	-	8.4	5.6	18	40	16	0.18
3050HS	● (●)	5	50	42	22	11	18	-	10.4	6.3	20	40	16	0.28
3063HS	(●)	6	63	49	22	11	18	-	10.4	6.3	20	40	16	0.50
AMC 3080HS	● (●)	7	80	57	25.4(27)	14	25	35	9.5(12.4)	6(7)	25(22)	50	16	1.02
(AMCM) 3100HS	● (●)	8	100	67	31.75(32)	18	26	42	12.7(14.4)	8(8)	32(28)	63	16	2.05

• It is recommended to use an exclusive holder with the "New" sticker for APMT inserts.

() Metric Size, ● Stock item

▶ Available Inserts



APMT-MA



APMT-ML



APMT-MM



APMT-MF

Designation	Cermet		Coated								Uncoated			page	
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
APMT 1604PDFR-MA														●	E05 E06
160404PDFR-MA															
1604PDER-ML															
160404PDER-ML															
1604PDSR-MM			●	●	●		●	●	●	●					
1604PDSR-MF			●	●	●		●	●	●	●					
160410PDSR-MM			●				●	●	●	●					
160416PDSR-MM			●	●	●		●	●	●	●					
160424R-MM				●	●		●	●	●	●					
160430R-MM									●	●					
160432R-MM			●	●	●		●	●	●	●					

▶ Available Arbors

Designation	Ød	NC Arbors
AMC(M) 3040HS	16	BT□□-FMC16-□□
3050HS	22	BT□□-FMC22-□□
3063HS		
3080HS	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
3100HS	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□



▶ Parts

Specification	 Screw FTKA0410	 Wrench TW15S
Ø40~Ø100		

Available Inserts E05, E06

Available Arbors and bolt E318 ~ E320

AMC(M)3000S-K



- AR : 14°
- RR : -12°~8°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap		
AMCM	3040HS-K	●	4	40	34	16	9	14	8.4	5.6	18	40	16	0.15
	3050HS-K	●	5	50	42	22	11	18	10.4	6.3	20	40	16	0.24
	3063HS-K	●	6	63	49	22	11	18	10.4	6.3	20	40	16	0.24
AMC (AMCM)	3080HS-K	●	7	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(22)	50	16	0.36
	3100HS-K	●	8	100	67	31.75(32)	18	26	12.7(14.4)	8(8)	32(28)	63	16	0.61

• It is recommended to use an exclusive holder with the "New" sticker for APMT inserts. () Metric Size, ● Stock item

Available Inserts



Designation	Coated								Uncoated			page	Designation	Coated								Uncoated			page					
	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	PC8110	PD2000			A30	G10E	H01	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300		PC5400	PC8110	PD2000	A30	G10E
APFT 1604PDSR-X22					●																									
1604PDTR-X22																														
APKT 1604PDSR	●		●			●																								
1604PDSR-MF																														
1604PDSR-MM																														
160432R-MM1																														
1604PDFR-MA																														
APKT 1604PDFR-MA2																														
160416FR-MA2																														
160432FR-MA2																														
1604PDFR-MA3																														
1604PDSR-X22																														
1604PDTR-X22																														

Available Arbors



Designation	Ød	NC Arbors
AMC(M) 3040HS-K	16	BT□□-FMC16-□□
3050HS-K	22	BT□□-FMC22-□□
3063HS-		
3080HS-K	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
3100HS-K	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□

Parts

Specification		
Ø40~Ø100	Screw FTKA0410	Wrench TW15S



AMC(M)1000SE / 2000SE

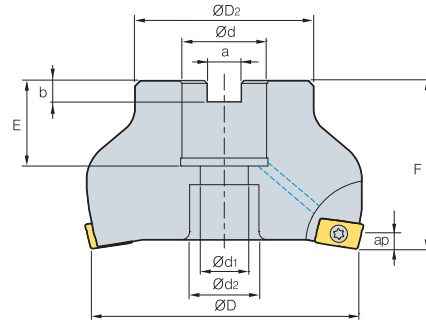

• AR : 45°
• RR : 0°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap	
AMCM 1040HSE			40	34	16	9	14	8.4	5.6	19	40	2.5	0.26
1050HSE			50	42	22	11	18	10.4	6.3	21	40	2.5	0.39
AMC 2080HSE	●		80	57	25.4(27)	14	20	9.5(12.4)	6.0(7.0)	25(22)	50	4	1.2
(AMCM) 2100HSE			100	67	31.75(32)	18	26	12.7(14.4)	8.0(8.0)	32(28)	63	4	2.33

() Metric Size, ● Stock item

Available Inserts



APMT-MM



APMT-MF

Type	Designation	Cermet		Coated								Uncoated			page
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	
1000 type	APMT 060202PDSR-MM				●	●		●			●	●			
	0602PDSR-MM				●	●		●	●	●	●	●			
	060208PDSR-MM				●	●		●			●	●			
	060212R-MM				●	●		●			●	●			
2000 type	APMT 11T3PDSR-MM			●	●	●	●	●	●	●	●	●			
	11T3PDSR-MF			●	●	●	●	●	●	●	●	●			
	11T308PDSR-MM			●	●	●	●	●	●	●	●	●			
	11T312PDSR-MM			●	●	●	●	●	●	●	●	●			
	11T316R-MM			●	●	●	●	●	●	●	●	●			
	11T318R-MM														
	11T324R-MM				●	●		●			●	●			

E05
E06

Available Arbors

Type	Designation	Ød	NC Arbors
1000 type	AMC(M) 1040HSE	16	BT□□-FMC16-□□
	1050HSE	22	BT□□-FMC22-□□
2000 type	AMC(M) 2080HSE	25.4	BT□□-FMA25.4-□□
		27	BT□□-FMC27-□□
	2100HSE	31.75	BT□□-FMA31.75-□□
		32	BT□□-FMC32-□□

Parts


Specification	Screw	Wrench	Wrench
Ø40~Ø50	FTKA01842	-	TW06S-A
Ø80~Ø100	FTKA02565S	TW08S	-

Available Inserts E05, E06

Available Arbors and bolt E318 ~ E320



AMC(M)3000SE

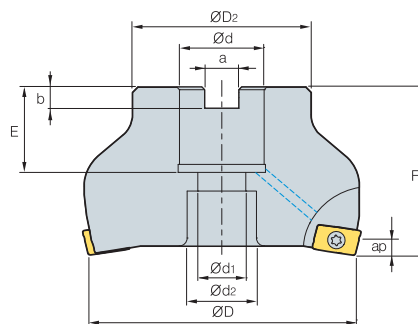

• AR : 45°
• RR : 0°

Designation	Stock		ØD	ØD ₂	Ød	Ød ₁	Ød ₂	a	b	E	F	ap	
AMC 3080HSE		4	80	57	25.4(27)	14	20	9.5(12.4)	6.0(7.0)	25(22)	50	6	1.3
(AMCM) 3100HSE		5	100	67	31.75(32)	18	26	12.7(14.4)	8.0(8.0)	32(28)	63	6	2.3

() Metric Size, ● Stock item

▶ Available Inserts



APMT-MM



APMT-MF

Designation	Cermet		Coated							Uncoated			page	
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30		G10E
APMT 1604PDSR-MM			●	●	●		●	●	●	●	●			
1604PDSR-MF			●	●	●		●	●	●	●	●			
160410PDSR-MM			●				●			●	●			
160416PDSR-MM			●	●	●		●			●	●			
160424R-MM				●	●		●			●	●			
160430R-MM							●			●	●			
160432R-MM			●	●	●		●			●	●			

▶ Available Arbors

Designation	Ød	NC Arbors
AMC(M) 3080HSE	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
3100HSE	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□


▶ Parts

Specification		
Ø80~Ø100	Screw FTKA0410	Wrench TW08S

Available Inserts E05, E06

Available Arbors and bolt E318 ~ E320

AMC(M)2000M



Designation		Stock	ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	No. of flute	ap	(mm)	
AMCM	2050M	●	16	50	40	22	11	18	10.4	6.3	21	58	4	39	0.7
AMC	2063M	● (●)	16	63	50	25.4(27)	13.5	20	9.5(12.4)	6(7)	25(25)	58	4	39	0.8
(AMCM)	2080M	● (●)	20	80	60	31.75(32)	-	45	12.7(14.4)	8(8)	35(28)	63	5	39	0.96
	2100M	(●)	24	100	80	38.1(40)	-	56	15.9(16.4)	10(9)	38(30)	63	6	39	1.2

() Metric Size, ● Stock item

Available Inserts




Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN80	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT	11T3PDFR-MA													●	E05 E06
	11T308PDFR-MA														
	11T3PDER-ML									●	●				
	11T308PDER-ML														
	11T3PDSR-MM						●								
	11T3PDSR-MF			●	●	●		●		●	●				
	11T308PDSR-MM			●	●	●		●	●	●	●				
	11T312PDSR-MM			●	●			●	●	●	●				
	11T316R-MM			●	●	●				●	●				
	11T318R-MM														
	11T324R-MM				●	●		●		●	●				

Available Arbors

Designation	Ød	NC Arbors
AMC(M) 2050M	22.225	BT□□-FMA22.225-□□ BT□□-SMA22.225-□□
	22	BT□□-FMC22-□□ BT□□-SMC22-□□
2063M	25.4	BT□□-FMA25.4-□□ BT□□-SMA25.4-□□
	27	BT□□-FMC27-□□ BT□□-SMC27-□□
2080M	31.75	BT□□-FMA31.75-□□ BT□□-SMA31.75-□□
	32	BT□□-FMC32-□□ BT□□-SMC32-□□
2100M	38.1	BT□□-FMA38.1-□□ BT□□-SMA38.1-□□
	40	BT□□-FMC40-□□ BT□□-SMC40-□□

Caution when insert are screwed

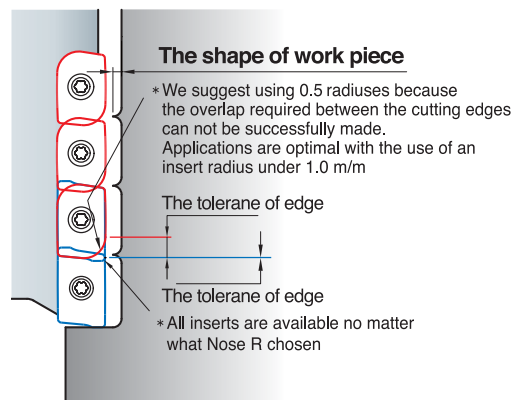

Parts


Specification	Screw	Wrench
Ø50~Ø100	FTKA02565S	TW08S

Available Inserts E05, E06

Available Arbors and bolt E318 ~ E320



AMC(M)3000M



AA
90°
• AR : 9°
• RR : -9°~5°


Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	No. of flute	ap	
AMC 3063M		16	63	57	25.4(27)	14	20	9.5(12.4)	6(7)	38(38)	85	4	57	1.1
(AMCM) 3080M		20	80	67	31.75(32)	14	26	12.7(14.4)	8(8)	40(40)	100	4	71	2.23
3100M		30	100	87	38.1(40)	22	32	15.9(16.4)	10(9)	40(40)	100	6	71	3.59

() Metric Size, ● Stock item

Available Inserts



APMT-MA



APMT-ML



APMT-MM




APMT-MF

Designation	Cermet		Coated							Uncoated			page	
	CN2000	CN30	NCM825	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
APMT 1604PDFR-MA														
160404PDFR-MA														
1604PDER-ML										●	●			
160404PDER-ML														
1604PDSR-MM			●	●	●		●	●	●	●	●			
1604PDSR-MF			●	●	●		●	●	●	●	●			E05
160410PDSR-MM			●				●	●	●	●	●			E06
160416PDSR-MM			●	●	●		●	●	●	●	●			
160424R-MM				●	●		●	●	●	●	●			
160430R-MM									●	●	●			
160432R-MM			●	●	●		●	●	●	●	●			

Available Arbors

Designation	Ød	NC Arbors	
AMC(M) 3063M	25.4	BT□□-FMA25.4-□□	BT□□-SMA25.4-□□
	27	BT□□-FMC27-□□	BT□□-SMC27-□□
3080M	31.75	BT□□-FMA31.75-□□	BT□□-SMA31.75-□□
	32	BT□□-FMC32-□□	BT□□-SMC32-□□
3100M	38.1	BT□□-FMA38.1-□□	BT□□-SMA38.1-□□
	40	BT□□-FMC40-□□	BT□□-SMC40-□□

Caution when insert are screwed

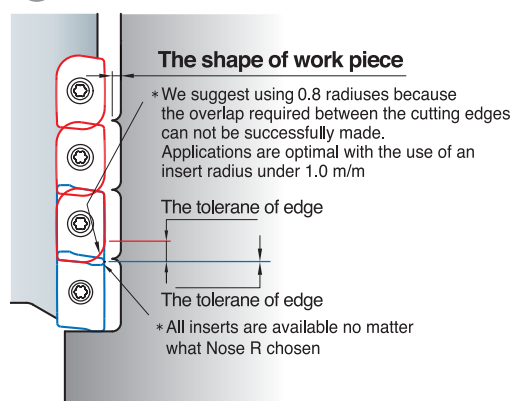

Parts

Specification		
Ø63~Ø100	Screw FTKA0410	Wrench TW15S

Available Inserts E05, E06

Available Arbors and bolt E318 ~ E320

AMS1000S

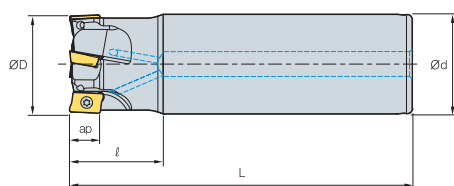


Fig. 1

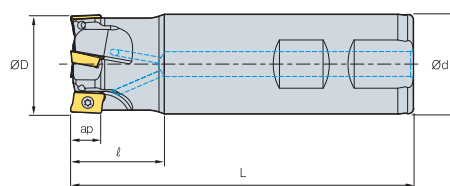


Fig. 2



AA 90°
 • AR : 7.5°~13°
 • RR : -17°~-6°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap		Fig.
AMS 1010HS	●	2	10	10	20	80	5.6	0.04	2
1011HS	●	2	11	10	20	80	5.6	0.04	2
1012HS-2	●	2	12	12	25	80	5.6	0.06	2
1012HS-2L12		2	12	12	25	120	5.6	0.09	1
1012HS-3	●	3	12	12	25	80	5.6	0.06	2
1014HS-2	●	2	14	16	25	90	5.6	0.11	2
1014HS-2L16		2	14	16	25	140	5.6	0.18	1
1014HS-3	●	3	14	16	25	90	5.6	0.11	2
1015HS	●	3	15	16	25	90	5.6	0.11	2
1015HS-3L16		3	15	16	25	140	5.6	0.18	1
1016HS-3	●	3	16	16	25	90	5.6	0.12	2
1016HS-3L16		3	16	16	25	160	5.6	0.22	1
1016HS-4	●	4	16	16	25	90	5.6	0.12	2
1017HS	●	4	17	16	25	90	5.6	0.12	2
1017HS-3L16		3	17	16	25	160	5.6	0.22	1
1018HS	●	4	18	16	25	90	5.6	0.12	2
1018HS-4L16		4	18	16	25	180	5.6	0.25	1
1020HS-4	●	4	20	20	30	110	5.6	0.23	2
1020HS-4L20		4	20	20	30	200	5.6	0.43	1
1020HS-5		5	20	20	30	110	5.6	0.23	2
1021HS	●	5	21	20	30	110	5.6	0.24	2
1021HS-4L20		4	21	20	30	200	5.6	0.43	1
1022HS	●	5	22	20	30	110	5.6	0.27	2
1025HS		7	25	25	30	120	5.6	0.39	2
1026HS	●	7	26	25	30	120	5.6	0.39	2
1032HS	●	8	32	32	35	120	5.6	0.65	2
1033HS		8	33	32	35	120	5.6	0.65	2

● Stock item

▶ Available Inserts



Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 0602PDFR-MA														●	E05
060208PDFR-MA															
060202PDSR-MM				●			●		●	●					
0602PDSR-MM				●	●		●	●	●	●					
060208PDSR-MM				●	●		●		●	●					
060212R-MM				●	●				●	●					
060216R-MM					●				●	●					

▶ Parts

Specification		
Ø10~Ø33	Screw FTKA01842	Wrench TW06S-A

▶ Available Inserts E05

AMS1500S

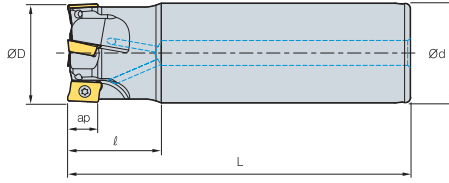


Fig. 1

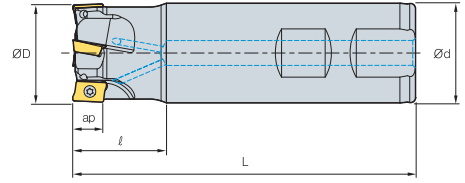


Fig. 2



AA
90°

- AR : 7.5°~12.5°
- RR : -28°~-14°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap		Fig.
AMS 15010HS	●	1	10	10	25	80	9	0.04	2
15010HS-1L16		1	10	16	30	160	9	0.21	1
15012HS	●	1	12	16	25	80	9	0.10	2
15012HS-1L16		1	12	16	30	160	9	0.21	1
15013HS	●	1	13	16	25	80	9	0.10	2
15014HS	●	1	14	16	25	80	9	0.10	2
15014HS-1L16		1	14	16	30	160	9	0.21	1
15016HS	●	2	16	16	30	90	9	0.11	2
15016HS-2L16	●	2	16	16	30	160	9	0.21	1
15017HS	●	2	17	16	30	90	9	0.12	2
15017HS-2L16		2	17	16	30	160	9	0.21	1
15018HS	●	2	18	16	30	90	9	0.14	2
15018HS-2L16		2	18	16	30	160	9	0.21	1
15019HS	●	2	19	16	30	90	9	0.16	2
15020HS	●	2	20	20	30	90	9	0.18	2
15020HS-2L20	●	2	20	20	30	160	9	0.34	1
15020HS-3	●	3	20	20	30	90	9	0.18	2
15021HS	●	2	21	20	30	90	9	0.20	2
15021HS-2L20		2	21	20	30	160	9	0.34	1
15021HS-3	●	3	21	20	30	90	9	0.2	2
15022HS	●	3	22	20	30	110	9	0.23	2
15022HS-3L20		3	22	20	30	180	9	0.38	1
15024HS	●	3	24	20	30	110	9	0.30	2
15024HS-4	●	4	24	20	30	110	9	0.3	2
15025HS-3S20	●	3	25	20	30	110	9	0.35	2
15025HS	●	3	25	25	30	110	9	0.35	2
15025HS-3L25	●	3	25	25	30	180	9	0.59	1

● Stock item

▶ Available Inserts



APMT-MA



APMT-ML



APMT-MM

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 0903PDFR-MA														●	E05
090308PDFR-MA															
0903PDER-ML										●	●				
090308PDER-ML															
0903PDSR-MM				●		●	●			●	●				
090308PDSR-MM				●	●		●			●	●				
090312R-MM							●			●	●				
090316R-MM				●	●					●	●				
090320R-MM					●					●	●				

▶ Parts

Specification			
Ø10~Ø25	Screw FTKA02555S FTKA02565S	Wrench TW08S	Cutter Dia. Ø10~Ø14 Ø16~Ø100

▶ Available Inserts E05



AMS1500S

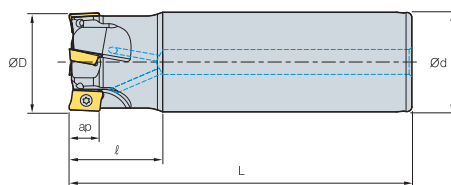


Fig. 1

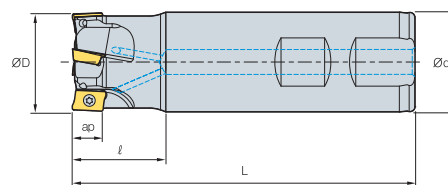


Fig. 2



- AR : 7.5°~12.5°
- RR : -28°~-14°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap		Fig.
AMS 15025HS-4S20	●	4	25	20	30	110	9	0.25	2
15025HS-4S25	●	4	25	25	30	110	9	0.25	2
15028HS	●	4	28	25	30	110	9	0.36	2
15028HS-4L25		4	28	25	30	180	9	0.61	1
15028HS-5	●	5	28	25	30	110	9	0.36	2
15030HS	●	4	30	25	30	110	9	0.38	2
15030HS-4L25		4	30	25	30	180	9	0.62	1
15030HS-5		5	30	25	30	110	9	0.38	2
15032HS		4	32	32	30	110	9	0.60	2
15032HS-4L32	●	4	32	32	30	180	9	1.00	1
15032HS-5		5	32	32	30	110	9	0.6	2
15035HS	●	5	35	32	30	110	9	0.70	2
15035HS-6		6	35	32	30	110	9	0.7	2
15040HS-S32	●	5	40	32	35	130	9	0.80	2
15040HS-5L32		5	40	32	35	200	9	1.20	1
15040HS-6S32		6	40	32	35	130	9	0.8	2
15040HS-S40		5	40	40	35	130	9	1.13	2
15040HS-6S40		6	40	40	35	130	9	1.13	2
15040HS-S42		5	40	42	35	130	9	1.23	2
15040HS-6S42		6	40	42	35	130	9	1.23	2

● Stock item

Available Inserts



APMT-MA



APMT-ML



APMT-MM

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 0903PDFR-MA														●	E05
090308PDFR-MA															
0903PDER-ML										●	●				
090308PDER-ML															
0903PDSR-MM				●		●	●			●	●				
090308PDSR-MM				●	●		●			●	●				
090312R-MM							●			●	●				
090316R-MM				●	●					●	●				
090320R-MM					●					●	●				

Parts

Specification		
Ø25~Ø40	Screw FTKA02565S	Wrench TW08S

Available Inserts E05

AMS2000S

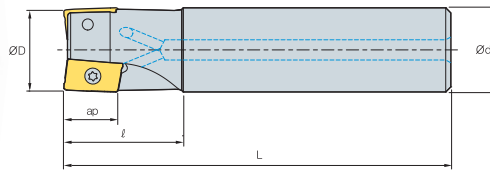


Fig. 1

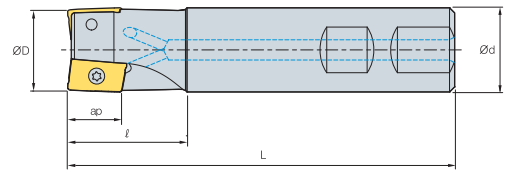


Fig. 2



• AR : 3°~14°
• RR : -25°~-18°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap		Fig.
AMS 2010HS	●	1	10	10	20	85	11	0.04	2
2010HS-1L16		1	10	16	30	160	11	0.21	1
2012HS	●	1	12	16	25	85	11	0.10	2
2012HS-1L16		1	12	16	30	160	11	0.21	1
2014HS	●	1	14	16	25	90	11	0.12	2
2014HS-1L16		1	14	16	30	160	11	0.21	1
2016HS	●	2	16	16	25	90	11	0.12	2
2016HS-2L16	●	2	16	16	30	180	11	0.21	1
2018HS	●	2	18	16	25	90	11	0.12	2
2018HS-2L16		2	18	16	30	180	11	0.21	1
2020HS	●	2	20	20	30	100	11	0.21	2
2020HS-2L20	●	2	20	20	30	210	11	0.49	1
2022HS	●	3	22	20	35	115	11	0.25	2
2022HS-3L20		3	22	20	35	180	11	0.38	1
2025HS	●	3	25	25	35	115	11	0.40	2
2025HS-3L25	●	3	25	25	40	180	11	0.59	1
2032HS	●	4	32	32	40	125	11	0.70	2
2032HS-4L32	●	4	32	32	50	180	11	1.00	1
2040HS	●	5	40	32	42	130	11	0.84	2
2040HS-5L32	●	5	40	32	50	200	11	1.20	1
2040HS-S40		5	40	40	42	130	11	1.15	2
2040HS-S42		5	40	42	42	130	11	2.00	2
2050HS	●	6	50	32	45	135	11	1.06	2
2050HS-S40		6	50	40	45	135	11	1.38	2
2050HS-S42		6	50	42	45	135	11	1.50	2
2063HS		8	63	32	45	135	11	1.31	2
2063HS-S40		8	63	40	45	135	11	1.62	2
2063HS-S42		8	63	42	45	135	11	1.70	2

● Stock item

Available Inserts



APMT-MA



APMT-ML



APMT-MM



APMT-MF

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 11T3PDFR-MA														●	
11T308PDFR-MA															
11T3PDER-ML										●	●				
11T308PDER-ML															
11T3PDSR-MM						●									
11T3PDSR-MF			●	●	●		●			●	●				E05
11T308PDSR-MM			●	●	●		●	●		●	●				E06
11T312PDSR-MM			●	●			●	●		●	●				
11T316R-MM			●	●	●					●	●				
11T318R-MM															
11T324R-MM				●	●		●			●	●				

Parts

Specification			
Ø10~Ø63	Screw FTKA02555S FTKA02565S	Wrench TW08S	Cutter Dia. Ø10~Ø14 Ø16~Ø100

Available Inserts E05, E06



AMS3000S

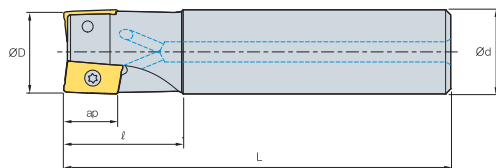


Fig. 1

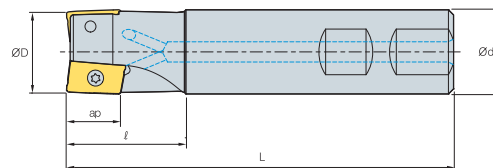


Fig. 2



AA 90°
 • AR : 3°~14°
 • RR : -18°~-10°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap	kg	Fig.
AMS 3025HS	●	2	25	25	35	115	16	0.40	2
3025HS-2M25	●	2	25	25	35	180	16	0.65	1
3025HS-2L25	●	2	25	25	60	220	16	0.75	1
3032HS	●	3	32	32	40	125	16	0.69	2
3032HS-2M32	●	2	32	32	40	200	16	1.13	1
3032HS-2L32		2	32	32	65	260	16	1.52	1
3032HS-3M32		3	32	32	40	200	16	1.12	1
3032HS-3L32	●	3	32	32	65	260	16	1.48	1
3040HS	●	4	40	32	42	130	16	0.80	2
3040HS-3M32	●	3	40	32	42	200	16	1.24	1
3040HS-3L32		3	40	32	42	260	16	1.61	1
3040HS-4M32		4	40	32	42	200	16	1.21	1
3040HS-4L32	●	4	40	32	42	260	16	1.58	1
3040HS-S40		4	40	40	42	130	16	1.10	2
3040HS-S42		4	40	42	42	130	16	1.20	2
3050HS	●	5	50	32	45	135	16	1.00	2
3050HS-S40		5	50	40	45	135	16	1.30	2
3050HS-S42		5	50	42	45	135	16	1.40	2
3063HS	●	6	63	32	45	135	16	1.25	2
3063HS-S40		6	63	40	45	135	16	1.50	2
3063HS-S42	●	6	63	42	45	135	16	1.54	2

● Stock item

Available Inserts



APMT-MA



APMT-ML



APMT-MM



APMT-MF

Designation	Cermet		Coated								Uncoated			page	
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
APMT 1604PDFR-MA														●	E05 E06
160404PDFR-MA															
1604PDER-ML										●	●				
160404PDER-ML															
1604PDSR-MM			●	●	●		●	●	●	●	●				
1604PDSR-MF			●	●	●		●	●	●	●	●				
160410PDSR-MM			●	●	●		●	●	●	●	●				
160416PDSR-MM			●	●	●		●	●	●	●	●				
160424R-MM				●	●		●	●	●	●	●				
160430R-MM				●	●		●	●	●	●	●				
160432R-MM			●	●	●		●	●	●	●	●				


Parts

Specification			
Ø25~Ø63	Screw FTKA0408 FTKA0410	Wrench TW15S	Cutter Dia. Ø25 Ø32~Ø100

Available Inserts E05, E06



AMS3000S-K

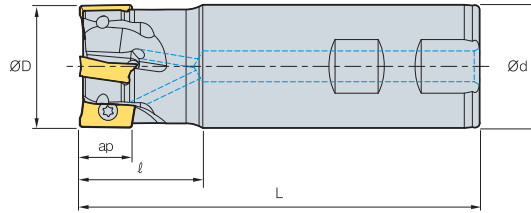


• AR : 14°
• RR : -18°~-10°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap	
AMS								
3025HS-K	●	2	25	25	35	115	16	0.4
3032HS-K	●	3	32	32	40	125	16	0.69
3040HS-K	●	4	40	32	42	130	16	0.8
3040HS-K-S40		4	40	40	42	130	16	1.1
3040HS-K-S42		4	40	42	42	130	16	1.2
3050HS-K		5	50	32	45	135	16	1.0
3050HS-K-S40	●	5	50	40	45	135	16	1.3
3050HS-K-S42	●	5	50	42	45	135	16	1.4
3063HS-K		6	63	32	45	135	16	1.25
3063HS-K-S40		6	63	40	45	135	16	1.5
3063HS-K-S42	●	6	63	42	45	135	16	1.54

● Stock item

Available Inserts



Designation	Coated										Uncoated			page	
	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	PC8110	PD2000	A30	G10E		H01
APMT			●												E04
1604PDSR-X22 1604PDTR-X22															
APKT	●		●				●								E04 E05
1604PDSR	●														
1604PDSR-MF	●							●							
1604PDSR-MM	●	●	●		●	●	●		●						
160432R-MM1	●														
1604PDFR-MA										●				●	
1604PDFR-MA2														●	
160416FR-MA2															
160432FR-MA2															
1604PDFR-MA3													●	●	
1604PDSR-X22 1604PDTR-X22	●														

Parts

Specification			
Ø25~Ø63	Screw FTKA0408 FTKA0410	Wrench TW15S	Cutter Dia. Ø25 Ø32~Ø100

Available Inserts E04, E05



AMS4000S

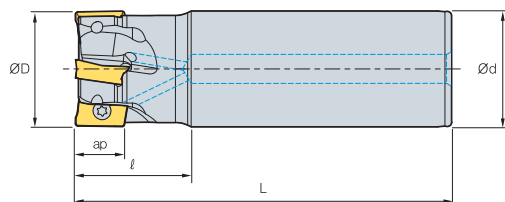


Fig. 1


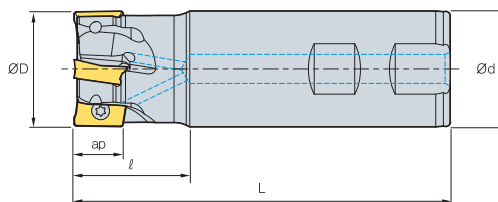


Fig. 2



- AR : 7°~13°
- RR : -20°~-6°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap	kg	Fig.
AMS 4020HS	●	1	20	20	30	90	17	0.18	2
4020HS-M		1	20	20	30	160	17	0.17	1
4021HS		1	21	20	30	90	17	0.19	2
4021HS-M		1	21	20	30	160	17	0.34	1
4025HS	●	2	25	25	40	110	17	0.35	2
4025HS-2M25		2	25	25	40	180	17	0.58	1
4025HS-2L25	●	2	25	25	40	230	17	0.8	1
4026HS	●	2	26	25	40	110	17	0.37	2
4026HS-2M25		2	26	25	40	180	17	0.60	1
4026HS-2L25		2	26	25	40	230	17	0.82	1
4032HS	●	3	32	32	40	125	17	0.65	2
4032HS-2M32		2	32	32	50	200	17	1.17	1
4032HS-2L32	●	2	32	32	50	260	17	1.5	1
4032HS-3M32	●	3	32	32	50	200	17	1.10	1
4032HS-3L32		3	32	32	50	260	17	1.48	1
4033HS	●	3	33	32	40	125	17	0.68	2
4033HS-2M32		2	33	32	50	200	17	1.12	1
4033HS-2L32	●	2	33	32	50	260	17	1.55	1
4033HS-3M32	●	3	33	32	50	200	17	1.12	1
4033HS-3L32		3	33	32	50	260	17	1.55	1

● Stock item

Available Inserts



APMT-MA



APMT-ML






APMT-MM



APMT-MF

Designation	Cermet								Coated			Uncoated			page	
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	H01		
APMT 1806PDR-MA														●	E05 E06	
180604PDR-MA																
180612PDR-MA																
180616PDR-MA																
180620PDR-MA																
180624PDR-MA																
180630R-MA																
1806PDER-ML										●	●					
180604PDER-ML																
180612PDER-ML																
180616PDER-ML																
APMT 180620PDER-ML																E05 E06
180624PDER-ML																
180630R-ML																
1806PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●		
1806PDSR-MF										●				●		
180612PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●		
180616PDSR-MM										●				●		
180620PDSR-MM														●		
180624PDSR-MM										●	●			●		
180630R-MM														●		
180632R-MM										●	●			●		

Parts

Specification			
Ø20~Ø33	Screw FTKA0408 FTKA0410	Wrench TW15S	Cutter Dia. Ø20~Ø25 Ø32~Ø100

Available Inserts E05, E06

AMS4000S

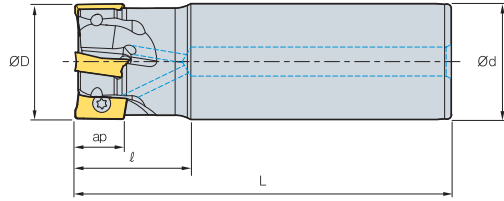


Fig. 1

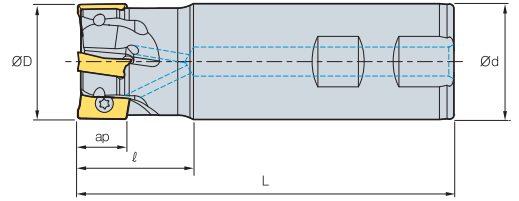


Fig. 2



AA 90°
 • AR : 7°~13°
 • RR : -20°~-6°

(mm)


Designation	Stock		ØD	Ød	ℓ	L	ap		Fig.	
AMS	4040HS-3M32	●	3	40	32	50	200	17	1.20	1
	4040HS-3L32	●	3	40	32	50	260	17	1.60	1
	4040HS-4M32		4	40	32	50	200	17	1.20	1
	4040HS-4L32		4	40	32	50	260	17	1.60	1
	4040HS-S32	●	4	40	32	40	130	17	0.76	2
	4040HS-S40		4	40	40	40	130	17	1.10	2
	4040HS-S42		4	40	42	40	130	17	1.20	2
	4050HS-S32	●	5	50	32	40	135	17	0.95	2
	4050HS-S40		5	50	40	40	135	17	1.30	2
	4050HS-S42	●	5	50	42	40	135	17	1.40	2
	4063HS-S32	●	6	63	32	40	135	17	1.25	2
	4063HS-S40		6	63	40	40	135	17	1.60	2
	4063HS-S42	●	6	63	42	40	135	17	1.70	2

● Stock item

▶ Available Inserts



APMT-MA



APMT-ML



APMT-MM



APMT-MF

Designation	Cermet		Coated							Uncoated			page	Designation	Cermet		Coated							Uncoated			page			
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30			G10E	H01	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300		PC5400	A30	G10E
APMT 1806PDFR-MA															APMT 180620PDER-ML															E05 E06
180604PDFR-MA															180624PDER-ML															
180612PDFR-MA															180630R-ML															
180616PDFR-MA															1806PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	
180620PDFR-MA															1806PDSR-MF							●				●				
180624PDFR-MA															180612PDSR-MM			●	●	●	●		●		●		●			
180630R-MA															180616PDSR-MM							●								
1806PDER-ML															180620PDSR-MM															
180604PDER-ML															180624PDSR-MM							●	●							
180612PDER-ML															180630R-MM										●	●				
180616PDER-ML															180632R-MM							●	●		●	●				


▶ Parts

Specification		
Ø40~Ø63	Screw FTKA0410	Wrench TW15S

▶ Available Inserts E05, E06



AMS1000SE / 2000SE

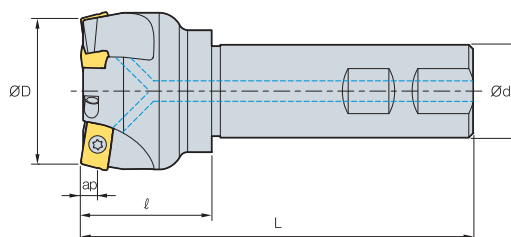

• AR : -4.5°~ -1°
• RR : -3°~ 0°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap	
AMS 1025HSE		3	25	25	30	115	2.5	0.41
AMS 2025HSE	●	2	25	25	30	115	4	0.4
2032HSE	●	3	32	32	40	125	4	0.72
2040HSE	●	3	40	32	40	130	4	0.86
2040HSE-S40		3	40	40	40	130	4	1.2
2040HSE-S42		3	40	42	40	130	4	1.3
2050HSE		4	50	32	40	135	4	0.98
2050HSE-S40		4	50	40	40	135	4	1.3
2050HSE-S42		4	50	42	40	135	4	1.4
2063HSE		5	63	32	40	135	4	1.24
2063HSE-S40		5	63	40	40	135	4	1.57
2063HSE-S42		5	63	42	40	135	4	1.62

● Stock item

▶ Available Inserts



APMT-MF



APMT-MM


Type	Designation	Cermet		Coated							Uncoated			page		
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
1000형	APMT 060202PDSR-MM				●	●		●			●	●				E05
	0602PDSR-MM				●	●		●	●	●	●	●				
	060208PDSR-MM				●	●		●			●	●				
	060212R-MM				●	●		●			●	●				
	060216R-MM				●	●		●			●	●				
2000형	APMT 11T3PDSR-MM			●	●	●	●	●	●	●	●	●				
	11T3PDSR-MF			●	●	●	●	●	●	●	●	●				
	11T308PDSR-MM			●	●	●	●	●	●	●	●	●				
	11T312PDSR-MM			●	●	●	●	●	●	●	●	●				
	11T316R-MM			●	●	●	●	●	●	●	●	●				
	11T318R-MM				●	●	●	●	●	●	●	●				
	11T324R-MM				●	●	●	●	●	●	●	●				

▶ Parts

Specification	Screw	Wrench	Wrench
Ø25	FTKA01842	-	TW06S-A
Ø25~Ø63	FTKA02565S	TW08S	-

▶ Available Inserts E05

AMS3000SE

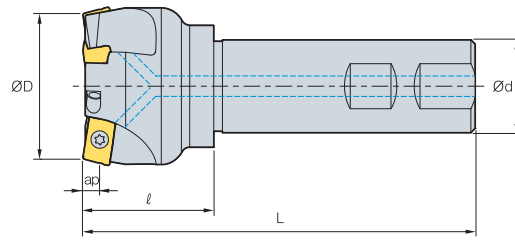

• AR : $-4.5^{\circ} \sim -1^{\circ}$
• RR : $-3^{\circ} \sim 0^{\circ}$

(mm)

Designation	Stock		ØD	Ød	l	L	ap	
AMS 3050HSE		3	50	32	45	135	6	1.0
3050HSE-S40		3	50	40	45	135	6	1.3
3050HSE-S42		3	50	42	45	135	6	1.4
3063HSE		4	63	32	45	135	6	1.3
3063HSE-S40		4	63	40	45	135	6	1.6
3063HSE-S42		4	63	42	45	135	6	1.7

● Stock item

▶ Available Inserts



APMT-MF



APMT-MM

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM825	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 1604PDSR-MM			●	●	●		●	●	●	●	●				E05
1604PDSR-MF			●	●	●		●			●	●				
160410PDSR-MM			●	●	●		●			●	●				
160416PDSR-MM			●	●	●		●			●	●				
160424R-MM				●	●		●			●	●				
160430R-MM					●		●			●	●				
160432R-MM			●	●	●		●			●	●				


▶ Parts

Specification		
Ø50~Ø63	Screw FTKA0410	Wrench TW15S

▶ Available Inserts E05



AMS1000M / 1500M

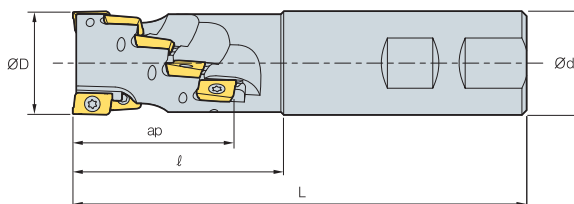

AA
90°

- AR : 7°~9°
- RR : -13°~-10°


Designation	Stock		ØD	Ød	ℓ	L	No. of flute	ap	
AMS 1016M		6	16	16	30	80	2	15.5	0.3
AMS 1020M		12	20	20	32	85	3	20.5	0.3
AMS 1025M		20	25	25	39	95	4	25.5	0.3
AMS 15020M		3	20	20	42	105	1	26.5	0.3
AMS 15025M		8	25	25	50	110	2	35	0.3
AMS 15032M		10	32	32	60	120	2	44	0.3

● Stock item

▶ Available Inserts



APMT-MA




APMT-ML



APMT-MM

Type	Designation	Cermet		Coated							Uncoated			page		
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
1000 type	APMT 0602PDFR-MA														●	E05
	060208PDFR-MA															
	060202PDSR-MM				●	●		●			●	●				
	0602PDSR-MM				●	●		●	●		●	●				
	060208PDSR-MM				●	●		●			●	●				
	060212R-MM				●	●					●	●				
1500 type	APMT 060216R-MM					●					●	●				
	0903PDFR-MA														●	
	090308PDFR-MA															
	0903PDER-ML										●	●				
	090308PDER-ML															
	0903PDSR-MM				●		●		●		●	●				
	090308PDSR-MM				●	●		●			●	●				
	090312R-MM							●			●	●				
090316R-MM				●	●					●	●					
090320R-MM					●					●	●					

▶ Caution when insert are screwed


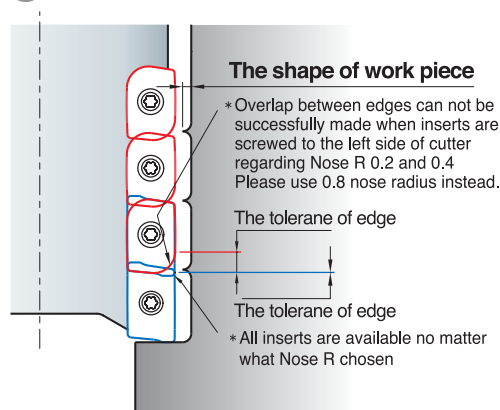


▶ Parts

Specification			
Ø16~Ø25	FTKA01842	-	TW06S-A
Ø20~Ø32	FTKA02565S	TW08S	-

▶ Available Inserts E05

AMS2000M / 4000M

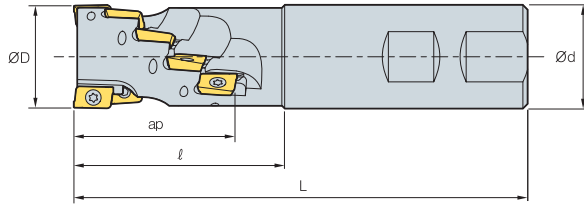

• AR : 7°~9°
• RR : -13°~-10°

(mm)


Designation	Stock		ØD	Ød	l	L	No. of flute	ap	
AMS 2020M	●	3	20	20	45	120	1	29.4	0.32
AMS 2025M	●	8	25	25	55	130	2	38.9	0.40
AMS 2032M	●	10	32	32	65	140	2	48.5	0.65
AMS 2040M	●	14	40	40	75	150	2	58	0.75
AMS 4032M		4	32	32	60	130	2	31.6	0.65
AMS 4040M		6	40	40	70	140	2	46	1.11
AMS 4050M-S40		6	50	40	55	125	2	46	1.22
AMS 4050M		8	50	40	70	140	2	61	1.37

● Stock item

Available Inserts



APMT-MA



APMT-ML




APMT-MM



APMT-MF

Type	Designation	Cermet		Coated							Uncoated		Type	Designation	Cermet		Coated							Uncoated		page					
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400			A30	G10E	H01	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530		PC6510	PC5300	PC5400	A30	G10E
2000 type	APMT 11T3PDFR-MA												●																		
	11T308PDFR-MA																														
	11T3PDER-ML																														
	11T308PDER-ML																														
	11T3PDSR-MM																														
	11T3PDSR-MM																														
	11T3PDSR-MF																														
	11T308PDSR-MM																														
	11T312PDSR-MM																														
	11T316R-MM																														
11T318R-MM																															
11T324R-MM																															
4000 type	APMT 1806PDFR-MA																														
	180604PDFR-MA																														
	180612PDFR-MA																														
	180616PDFR-MA																														
	180620PDFR-MA																														
	180624PDFR-MA																														
	APMT 180630R-MA																														
	1806PDER-ML																														
180604PDER-ML																															
180612PDER-ML																															
180616PDER-ML																															
180620PDER-ML																															
180624PDER-ML																															
180630R-ML																															
1806PDSR-MM																															
1806PDSR-MF																															
180612PDSR-MM																															
180616PDSR-MM																															
180620PDSR-MM																															
180624PDSR-MM																															
180630R-MM																															
180632R-MM																															

Caution when insert are screwed

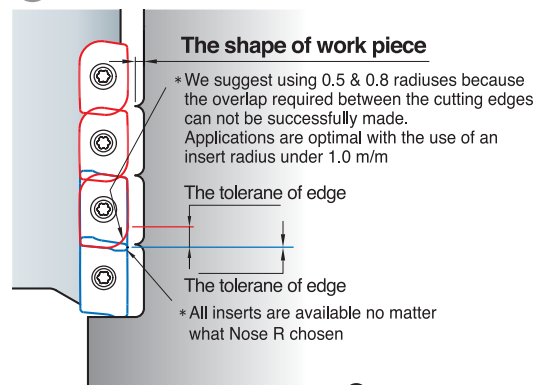

Parts

Specification		
Ø20~Ø40	FTKA02565S	TW08S
Ø32~Ø50	FTKA0410	TW15S

Available Inserts E05, E06



AMS1000MH / 1500MH / 2000MH / 3000MH

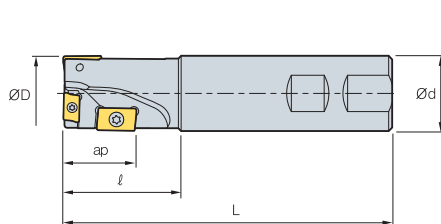


Fig. 1

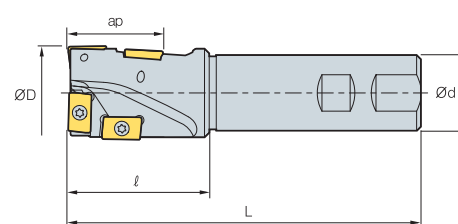


Fig. 2



• AR : 9°~12°
• RR : -12°~-10°

(mm)

Designation	Stock	ØD	Ød	ℓ	L	ap	kg	APMT 0602	APMT 0903	APM(X)T 11T3 -	APMT 1604	APKT 1604 -	Fig.
AMS 1014MH	●	3	14	12	30	120	11	0.16	3	-	-	-	1
AMS 1016MH	●	3	16	14	30	140	11	0.20	3	-	-	-	1
AMS 1018MH	●	3	18	16	30	140	11	0.21	3	-	-	-	1
AMS 15020MH	●	3	20	20	35	140	17	0.31	1	2	-	-	1
AMS 2025MH	●	3	25	25	40	130	20	0.45	-	-	3	-	1
AMS 2032MH	●	3	32	32	50	140	30	0.75	-	-	1	2	1
AMS 3040MH-K	●	4	40	32	60	150	40	0.90	-	-	-	-	4

● Stock item

Available Inserts



APKT-MF



APKT-MM



APMT-MA



APMT-ML



APMT-MF



APMT-MM



APXT-MA

Type	Designation	Coated										Uncoated			page	
		NCM925	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	PC8110	PD2000	A30	G10E		H01
1000 type	APMT 0602PDFR-MA														●	E04 E05 E06
	060208PDFR-MA															
	060202PDSR-MM	●	●			●			●	●						
	0602PDSR-MM	●	●			●	●		●	●						
	060208PDSR-MM	●	●			●			●	●						
1500 type	APMT 0903PDFR-MA														●	
	090308PDFR-MA															
	0903PDER-ML								●	●						
	090308PDER-ML								●	●						
	0903PDSR-MM	●	●		●	●			●	●						
090308PDSR-MM	●	●		●	●			●	●							
2000 type	APMT 11T3PDFR-MA														●	
	11T308PDFR-MA															
	11T3PDER-ML									●	●					
	11T308PDER-ML									●	●					
	11T3PDSR-MM	●	●	●	●	●	●		●	●						
	11T3PDSR-MF	●	●	●	●	●	●		●	●						
	11T308PDSR-MM	●	●	●	●	●	●		●	●						
	11T312PDSR-MM	●	●	●	●	●	●		●	●						
	11T316R-MM	●	●	●	●	●	●		●	●						
11T318R-MM																
11T324R-MM		●	●		●				●	●						
3000 type	APMT 1604PDSR-MM	●		●		●	●	●	●	●		●				
	1604PDSR-MF	●		●		●	●	●	●	●		●				
3000-K type	APKT 1604PDSR-MM	●	●	●		●	●	●	●	●		●				
	1604PDSR-MF	●		●		●	●	●	●	●		●				

Parts

Specification	Screw	Wrench	Wrench
Ø14~Ø18	FTKA01842	-	TW06S-A
Ø20	FTKA02565S	TW08S	-
Ø25~Ø32	FTKA02565S	TW08S	-
Ø40	FTKA0410	TW15S	-


Recommended cutting condition

	Drilling	Shouldering	Slotting
vc(m/min)	80~200	80~200	80~200
fz(mm/t)	0.03~0.06	0.05~0.25	0.05~0.20

• Please keep the drill depth under 0.25D when you're drilling
• Please keep the step depth from 0.2 to 0.3mm

Available Inserts E04, E05, E06

AMM1000

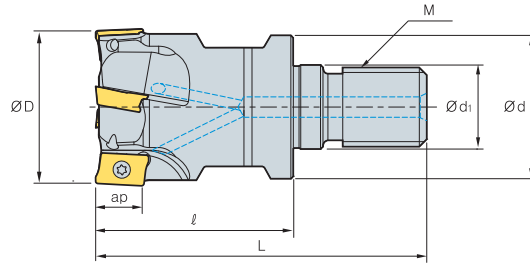

- AR : 7.5°~12.5°
- RR : -28°~-6°

(mm)

Designation	Stock		ØD	Ød	Ød1	l	L	M	ap	kg
AMM 1012HR-M06	●	3	12	11	6.5	25	40	M06	5.6	0.02
1016HR-M08		4	16	14.5	8.5	25	42	M08	5.6	0.03
1020HR-M10	●	5	20	18	10.5	30	51	M10	5.6	0.07
1025HR-M12		7	25	23	12.5	35	59	M12	5.6	0.12
1032HR-M16		8	32	29	17	40	67	M16	5.6	0.23

● Stock item

▶ Available Inserts



APMT-MA



APMT-MM

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM925	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 0602PDFR-MA														●	E05
060208PDFR-MA															
060202PDSR-MM				●			●			●	●				
0602PDSR-MM				●	●		●	●		●	●				
060208PDSR-MM				●	●		●			●	●				
060212R-MM				●	●					●	●				
060216R-MM					●					●	●				

▶ Available Adaptor

Designation	Available Adaptor
AMM 1012HR-M06	MAT - M06
1016HR-M08	MAT - M08
1020HR-M10	MAT - M10
1025HR-M12	MAT - M12
1032HR-M16	MAT - M16

Designation : AMM1032HR-M16
Modular Head Threading Measure size(M16)

||

Adaptor Spec. : MAT-M16-035-S32S
Adaptor Threading Measure(M16)

▶ Parts


Specification		
Ø12~Ø32	 Screw FTKA01842	 Wrench TW06S-A

▶ Available Inserts E05

▶ Available Adaptor E271-E272



AMM1500

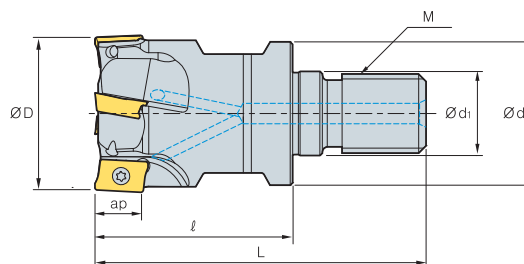

• AR : 7.5°~12.5°
• RR : -28°~-6°

(mm)

Designation	Stock		ØD	Ød	Ød1	ℓ	L	M	ap	kg
AMM 15010HR-M06		1	10	9.5	6.5	25	40	M06	9	0.01
15012HR-M06		1	12	11	6.5	25	40	M06	9	0.02
15016HR-M08	●	2	16	14.5	8.5	25	42	M08	9	0.03
15020HR-M10	●	2	20	18	10.5	30	51	M10	9	0.06
15025HR-M12	●	3	25	23	12.5	35	59	M12	9	0.12
15032HR-M16	●	4	32	29	17	40	67	M16	9	0.22

● Stock item

▶ Available Inserts



Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN80	NCM825	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 0903PDFR-MA														●	E05
090308PDFR-MA															
0903PDER-ML										●	●				
090308PDER-ML															
0903PDSR-MM				●	●	●	●			●	●				
090308PDSR-MM				●	●		●			●	●				
090312R-MM							●			●	●				
090316R-MM					●					●	●				
090320R-MM					●					●	●				

▶ Available Adaptor

Designation	Available Adaptor
AMM 15010HR-M06	MAT - M06
15012HR-M06	
15016HR-M08	MAT - M08
15020HR-M10	MAT - M10
15025HR-M12	MAT - M12
15032HR-M16	MAT - M16

Designation : AMM1032HR-M16
Modular Head Threading Measure size(M16)

||

Adaptor Spec. : MAT-M16-035-S32S
Adaptor Threading Measure(M16)


▶ Parts

Specification	Screw	Wrench	Cutter Dia.
Ø10~Ø32	FTKA02555S FTKA02565S	TW08S	Ø10~Ø14 Ø16~Ø100

▶ Available Inserts E05

▶ Available Adaptor E271-E272

AMM2000

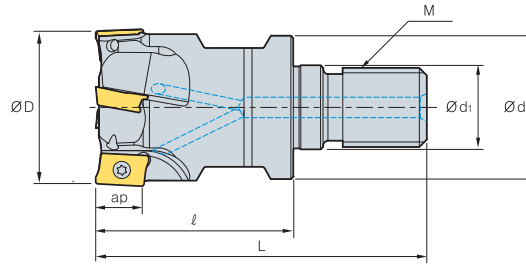

- AR : 7.5°~12.5°
- RR : -28°~-6°

(mm)

Designation	Stock		ØD	Ød	Ød1	l	L	M	ap	
AMM 2016HR-M08		2	16	14.5	8.5	25	42	M08	11	0.04
2020HR-M10		2	20	18	10.5	30	51	M10	11	0.07
2025HR-M12	●	3	25	23	12.5	35	59	M12	11	0.04
2032HR-M16		4	32	29	17	40	67	M16	11	0.23
2040HR-M16		5	40	29	17	40	67	M16	11	0.25

● Stock item

▶ Available Inserts



Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 11T3PDFR-MA														●	E05 E06
11T308PDFR-MA															
11T3PDER-ML										●	●				
11T308PDER-ML															
11T3PDSR-MM			●	●	●	●	●	●	●	●	●				
11T3PDSR-MF			●	●	●	●	●	●	●	●	●				
11T308PDSR-MM			●	●	●	●	●	●	●	●	●				
11T312PDSR-MM			●	●	●	●	●	●	●	●	●				
11T316R-MM			●	●	●	●	●	●	●	●	●				
11T318R-MM			●	●	●	●	●	●	●	●	●				
11T324R-MM				●	●	●	●	●	●	●	●				

▶ Available Adaptor

Designation	Available Adaptor
AMM 2016HR-M08	MAT - M08
2020HR-M10	MAT - M10
2025HR-M12	MAT - M12
2032HR-M16	MAT - M16
2040HR-M16	

Designation : AMM1032HR-M16
Modular Head Threading Measure size(M16)

II

Adaptor Spec. : MAT-M16-035-S32S
Adaptor Threading Measure(M16)

▶ Parts

Specification		
Ø16~Ø40	Screw FTKA02565S	Wrench TW08S

▶ Available Inserts E05, E06

▶ Available Adaptor E281~E282



Guarantee strong constrain force by 2 side constrain

BT/HSK Tooling System

▶ Code System(Single, Multi edge type)

BT50 HAT 4 063 114 - 4 F						
Arbor type	Item Name	Series	Diameter	Length(ap)	No. of flute	Front piece or Total length
BT30/40/50 HSK40/50/63/100	AM HAT RM	1000 Type 1500 Type 2000 Type 3000 Type 4000 Type	063 : Ø63	Length : 114 HS : Coolant + Single	No. of flute : 4 No. of tooth : 4	Front Piece(Y/N) Y : F No code : No L : Long type

▶ Code System(Modular type)

BT50 MAT M16 092			
Arbor type	Item category	M Dimensions	Total length(L)
BT30/40/50 HSK40/50/63/100	MAT	M16	092 : 92

DBT system

▶ (D)BT Arbor Feature

- ▶ Guaranteed strong force by 2 side constrain
- ▶ Guarantee strengthen cutting at high speed
- ▶ Guaranteed superior surface roughness

DBT(Constrain, Increased Surface roughness)	BT
2 side constrain (Taper, 1side)	1 side constrain (Taper)
DBT Workpiece Ra = 0.3 μ m	BT Workpiece Ra = 0.5 μ m

HSK system


▶ HSK Arbor Feature

- ▶ Guaranteed strong constrain force by 2 side constrain
- ▶ Guaranteed strengthened cutting at high speeds
- ▶ Guaranteed superior surface roughness
- ▶ Guaranteed exactness at axle direction and repeated direction


▶ HSK Tolerance comparison

Arbor type	Max. Tolerance	Min. Tolerance	Available facility
HSK-T	0.075	0.035	Multi-Tasking Machine
HSK-A	0.33	0.08 general	MCT

HSK A : HSK T key Tolerance comparison

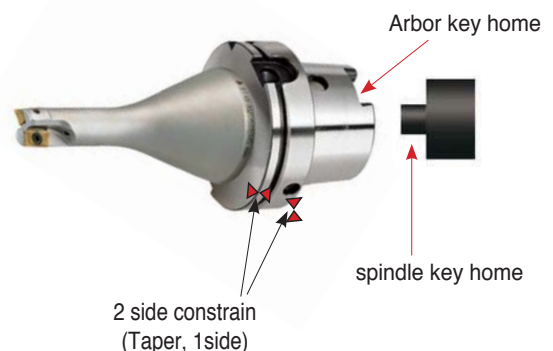

BT30 AM1000HS / BT40 AM1500HS

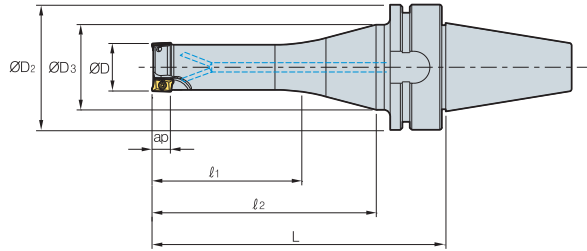


AA
90°
• AR : 7.5°~13°
• RR : -28°~-7°

(mm)

Designation	Stock	⚙️	ØD	ØD ₂	ØD ₃	l ₁	l ₂	L	ap
BT30 AM1010HS-2		2	10	46	41	35	83	112	5.6
AM1012HS-2		2	12	46	41	35	83	112	5.6
AM1012HS-3		3	12	46	41	35	83	112	5.6
AM1016HS-3		3	16	46	41	35	83	112	5.6
AM1016HS-4		4	16	46	41	35	83	112	5.6
AM1020HS-4		4	20	46	41	45	98	127	5.6
AM1020HS-5		5	20	46	41	45	98	127	5.6
BT40 AM15016HS-2		2	16	63	50	45	83	117	9
AM15016HS-2L		2	16	63	50	35	118	152	9
AM15020HS-2		2	20	63	50	60	98	132	9
AM15020HS-3		3	20	63	50	60	98	132	9
AM15020HS-2L		2	20	63	50	50	118	152	9
AM15025HS-3		3	25	63	50	75	113	147	9
AM15025HS-4		4	25	63	50	75	113	147	9
AM15025HS-3L		3	25	63	50	65	133	167	9
AM15032HS-4		4	32	63	50	80	113	147	9
AM15032HS-5		5	32	63	50	80	113	147	9
AM15032HS-4L		4	32	63	50	70	133	167	9
AM15040HS-5		5	40	63	50	60	98	132	9
AM15040HS-6		6	40	63	50	60	98	132	9
AM15040HS-5L		5	40	63	50	50	118	152	9

● Stock item

▶ Available Inserts



Type	Designation	Cermet		Coated						Uncoated		Type	Designation	Cermet		Coated						Uncoated		page							
		CN2000	CN30	NCM825	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300			PC5400	A30	G10E	H01	CN2000	CN30	NCM825	NC5330	PC3500	PC3600		PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E
1000 type	APMT 0602PDR-MA												●	APMT 0903PDR-MA																●	E05 E06
	060208PDR-MA													090308PDR-MA																	
	060202PDR-MM													0903PDR-ML																	
	0602PDR-MM													090308PDR-ML																	
	060208PDR-MM													0903PDR-MM																	
	060212R-MM													090308PDR-MM																	
	060216R-MM													090312R-MM																	
1500 type													090316R-MM																		
													090320R-MM																		


▶ Parts

Specification	Screw	Wrench	Wrench	Cutter Dia.
Ø10~Ø20	FTKA01842	-	TW06S-A	Ø10~Ø63
Ø16~Ø40	FTKA02565S	TW08S	-	Ø16~Ø100

▶ Available Inserts E05, E06



BT40 AM2000HS

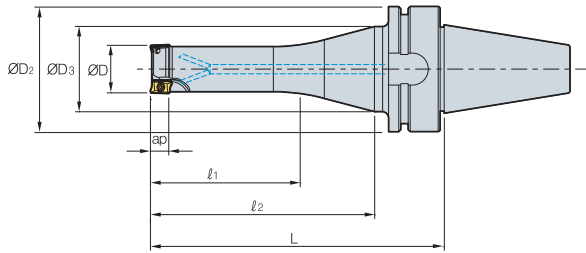

• AR : 7°~10°
• RR : -20°~-7°

(mm)

Designation	Stock		ØD	ØD ₂	ØD ₃	l ₁	l ₂	L	ap
BT40	AM2016HS-2		16	63	50	45	83	117	11
	AM2016HS-2L		16	63	50	35	118	152	11
	AM2020HS-2		20	63	50	60	98	132	11
	AM2020HS-2L		20	63	50	50	118	152	11
	AM2025HS-3		25	63	50	75	113	147	11
	AM2025HS-3L		25	63	50	65	113	147	11
	AM2032HS-4		32	63	50	80	113	147	11
	AM2032HS-4L		32	63	50	70	133	167	11
	AM2040HS-5		40	63	50	60	98	132	11
	AM2040HS-5L		40	63	50	50	118	152	11
	AM2050HS-6		50	63	50	60	98	132	11
	AM2050HS-6L		50	63	50	50	118	152	11

● Stock item

Available Inserts



APMT-MA



APMT-ML



APMT-MM



APMT-MF


Designation	Cermet		Coated								Uncoated			page	
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
APMT 11T3PDFR-MA														●	E05 E06
11T308PDFR-MA															
11T3PDER-ML										●	●				
11T308PDER-ML															
11T3PDSR-MM			●	●	●	●	●	●	●	●	●				
11T3PDSR-MF			●	●	●		●	●	●	●	●				
11T308PDSR-MM			●	●	●		●	●	●	●	●				
11T312PDSR-MM			●	●	●		●	●	●	●	●				
11T316R-MM			●	●	●				●	●					
11T318R-MM										●	●				
11T324R-MM				●	●		●			●	●				

Parts

Specification		
Ø16~Ø50	Screw FTKA02565S	Wrench TW08S

Available Inserts E05, E06

BT50 AM3000HS / AM4000HS

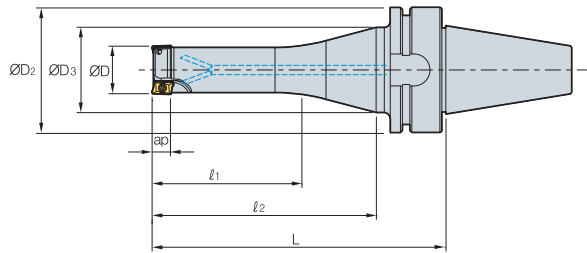

• AR : 7°~10°
• RR : -20°~-7°

(mm)


Designation	Stock		ØD	ØD2	ØD3	ℓ1	ℓ2	L	ap
BT50	AM3025HS-2		25	100	80	65	113	158	16
	AM3025HS-2L		25	100	80	55	123	168	16
	AM3032HS-3		32	100	80	70	113	158	16
	AM3032HS-3L		32	100	80	60	123	168	16
	AM3040HS-4		40	100	80	50	98	143	16
	AM3040HS-4L		40	100	80	40	108	153	16
	AM3050HS-5		50	100	80	50	98	143	16
AM3050HS-5L		50	100	80	40	108	153	16	
BT50	AM4020HS-1		20	100	80	50	98	143	17
	AM4025HS-2		25	100	80	65	113	158	17
	AM4032HS-3		32	100	80	70	113	158	17
	AM4032HS-3L		32	100	80	60	123	168	17
	AM4040HS-4		40	100	80	50	98	143	17
	AM4040HS-4L		40	100	80	40	108	153	17
	AM4050HS-5		50	100	80	50	98	143	17
	AM4050HS-5L		50	100	80	40	108	153	17

● Stock item

Available Inserts



APMT-MA



APMT-ML



APMT-MM



APMT-MF

Type	Designation	Cermet		Coated						Uncoated			Type	Designation	Cermet		Coated						Uncoated			page									
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400			A30	G10E	H01	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530		PC6510	PC5300	PC5400	A30	G10E	H01			
3000 type	APMT 1604PDFR-MA												●	APMT 180630R-MA																					
	160404PDFR-MA													1806PDER-ML																					
	1604PDER-ML													180604PDER-ML																					
	160404PDER-ML													180612PDER-ML																					
	1604PDSR-MM			●	●	●	●	●	●	●	●	●	●	180616PDER-ML																					
	1604PDSR-MF			●	●	●	●	●	●	●	●	●	●	180620PDER-ML																					
	160410PDSR-MM			●	●	●	●	●	●	●	●	●	●	180624PDER-ML																					
	160416PDSR-MM			●	●	●	●	●	●	●	●	●	●	180630R-ML					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	160424R-MM			●	●	●	●	●	●	●	●	●	●	1806PDSR-MM					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
160430R-MM			●	●	●	●	●	●	●	●	●	●	1806PDSR-MF					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
160432R-MM			●	●	●	●	●	●	●	●	●	●	180612PDSR-MM					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
4000 type	APMT 1806PDFR-MA												●	180616PDSR-MM					●	●	●	●	●	●	●	●	●	●	●	●	●				
	180604PDFR-MA													180620PDSR-MM					●	●	●	●	●	●	●	●	●	●	●	●	●				
	180612PDFR-MA													180624PDSR-MM					●	●	●	●	●	●	●	●	●	●	●	●	●				
	180616PDFR-MA													180630R-MM					●	●	●	●	●	●	●	●	●	●	●	●	●	●			
	180620PDFR-MA													180632R-MM					●	●	●	●	●	●	●	●	●	●	●	●	●	●			
	180624PDFR-MA																																		


Parts

Specification			
Ø25~Ø50	FTKA0408 FTKA0410	TW15S	Ø25 Ø32~Ø100
Ø20~Ø50	FTKA0408 FTKA0410	TW15S	Ø20~Ø25 Ø32~Ø200

Available Inserts E05, E06



HSK63A AM1000HS/1500HS

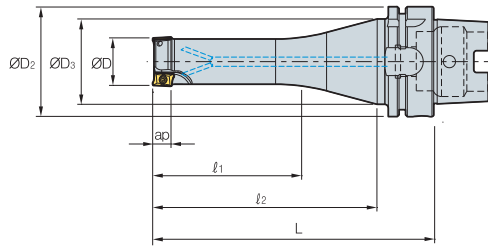

• AR : 7.5°~13°
• RR : -28°~-7°

(mm)

Designation	Stock		ØD	ØD2	ØD3	l1	l2	L	ap
HSK63A	AM1010HS-2	2	10	63	53	35	83	116	5.6
	AM1012HS-2	2	12	63	53	35	83	116	5.6
	AM1012HS-3	3	12	63	53	35	83	116	5.6
	AM1016HS-3	3	16	63	53	35	83	116	5.6
	AM1016HS-4	4	16	63	53	35	83	116	5.6
	AM1020HS-4	4	20	63	53	45	98	131	5.6
HSK63A	AM1020HS-5	5	20	63	53	45	98	131	5.6
	AM15016HS-2	2	16	63	53	45	83	116	9
	AM15016HS-2L	2	16	63	53	35	118	151	9
	AM15020HS-2	2	20	63	53	60	98	131	9
	AM15020HS-3	3	20	63	53	60	98	131	9
	AM15020HS-2L	2	20	63	53	50	118	151	9
	AM15025HS-3	3	25	63	53	75	113	146	9
	AM15025HS-4	4	25	63	53	75	113	146	9
	AM15025HS-3L	3	25	63	53	65	133	166	9
	AM15032HS-4	4	32	63	53	80	113	146	9
	AM15032HS-5	5	32	63	53	80	113	146	9
	AM15032HS-4L	4	32	63	53	70	133	166	9
	AM15040HS-5	5	40	63	53	60	98	131	9
	AM15040HS-6	6	40	63	53	60	98	131	9
	AM15040HS-5L	5	40	63	53	50	118	151	9

● Stock item

Available Inserts



APMT-MA



APMT-ML



APMT-MM

Type	Designation	Cermet		Coated							Uncoated			page					
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01			
1000 type	APMT	0602PDFR-MA																	
		060208PDFR-MA																	
		060202PDSR-MM				●			●			●	●						
		0602PDSR-MM				●	●		●	●	●	●	●						
		060208PDSR-MM				●	●		●			●	●						
		060212R-MM				●	●					●	●						
1500 type	APMT	060216R-MM				●					●	●							
		0903PDFR-MA																●	
		090308PDFR-MA																	
		0903PDER-ML										●	●						
		090308PDER-ML										●	●						
		0903PDSR-MM				●		●				●	●						
		090308PDSR-MM				●	●		●			●	●						
		090312R-MM				●			●			●	●						
	090316R-MM				●	●					●	●							
	090320R-MM					●					●	●							


E05

Parts

Specification	Screw	Wrench	Wrench	Cutter Dia.
Ø10~Ø20	FTKA01842	-	TW06S-A	Ø10~Ø63
Ø16~Ø40	FTKA02565S	TW08S	-	Ø16~Ø100

Available Inserts E05

HSK63A AM2000HS

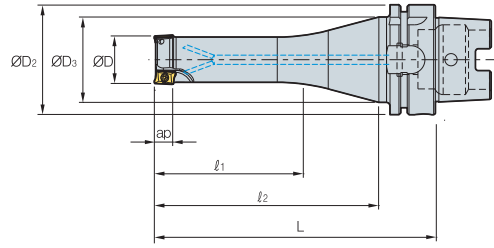

• AR : 7°~10°
• RR : -20°~-7°

(mm)

Designation	Stock		ØD	ØD2	ØD3	l1	l2	L	ap
HSK63A	AM2016HS-2		16	63	53	45	83	116	11
	AM2016HS-2L		16	63	53	35	118	151	11
	AM2020HS-2		20	63	53	60	98	131	11
	AM2020HS-2L		20	63	53	50	118	151	11
	AM2025HS-3		25	63	53	75	113	146	11
	AM2025HS-3L		25	63	53	65	113	146	11
	AM2032HS-4		32	63	53	80	113	146	11
	AM2032HS-4L		32	63	53	70	133	166	11
	AM2040HS-5		40	63	53	60	98	131	11
	AM2040HS-5L		40	63	53	50	118	151	11
	AM2050HS-6		50	63	53	60	98	131	11
	AM2050HS-6L		50	63	53	50	118	151	11

● Stock item

Available Inserts



APMT-MA



APMT-ML



APMT-MM



APMT-MF

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 11T3PDFR-MA														●	E05 E06
11T308PDFR-MA															
11T3PDER-ML										●	●				
11T308PDER-ML															
11T3PDSR-MM			●	●	●	●	●	●	●	●	●				
11T3PDSR-MF			●	●	●	●	●	●	●	●	●				
11T308PDSR-MM			●	●	●	●	●	●	●	●	●				
11T312PDSR-MM			●	●	●	●	●	●	●	●	●				
11T316R-MM			●	●	●	●	●	●	●	●	●				
11T318R-MM			●	●	●	●	●	●	●	●	●				
11T324R-MM				●	●	●	●	●	●	●	●				


Parts

Specification		
Ø16~Ø50	Screw FTKA02565S	Wrench TW08S

Available Inserts E05, E06



HSK63A AM3000HS / 4000HS

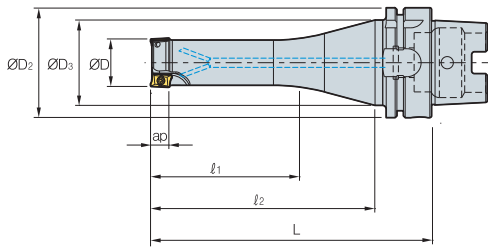


• AR : 7°~10°
• RR : -20°~-7°

(mm)

Designation	Stock		ØD	ØD2	ØD3	l1	l2	L	ap
HSK63A	AM3025HS-2		25	63	53	65	113	146	16
	AM3025HS-2L		25	63	53	55	123	156	16
	AM3032HS-3		32	63	53	70	113	146	16
	AM3032HS-3L		32	63	53	60	123	156	16
	AM3040HS-4		40	63	53	50	98	131	16
	AM3040HS-4L		40	63	53	40	108	141	16
	AM3050HS-5		50	63	53	50	98	131	16
HSK63A	AM4020HS-1		20	63	53	50	98	131	17
	AM4025HS-2		25	63	53	65	113	146	17
	AM4032HS-3		32	63	53	70	113	146	17
	AM4032HS-3L		32	63	53	60	123	156	17
	AM4040HS-4		40	63	53	50	98	131	17
	AM4040HS-4L		40	63	53	40	108	141	17
	AM4050HS-5		50	63	53	50	98	131	17
	AM4050HS-5L		50	63	53	40	108	141	17

● Stock item

▶ Available Inserts




Type	Designation	Cermets									Type	Designation	Cermets									page												
		CN2000	CN30	Coated					Uncoated				CN2000	CN30	Coated					Uncoated														
				NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	H01					NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	H01			
3000 type	APMT 1604PDR-MA														●	APMT 180630R-MA																E05 E06		
	160404PDR-MA															1806PDER-ML																		
	1604PDER-ML															180604PDER-ML																		
	160404PDER-ML															180612PDER-ML																		
	1604PDSR-MM			●	●	●	●	●	●	●	●	●				180616PDER-ML																		
	1604PDSR-MF			●	●	●	●	●	●	●	●	●				180620PDER-ML																		
	160410PDSR-MM			●	●	●	●	●	●	●	●	●				180624PDER-ML																		
	160416PDSR-MM			●	●	●	●	●	●	●	●	●				180630R-ML																		
	160424R-MM			●	●	●	●	●	●	●	●	●				1806PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	●		●	●
	160430R-MM			●	●	●	●	●	●	●	●	●				1806PDSR-MF			●	●	●	●	●	●	●	●	●	●	●	●	●		●	●
160432R-MM			●	●	●	●	●	●	●	●	●				180612PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
4000 type	APMT 1806PDR-MA														●	180620PDSR-MM																		
	180604PDR-MA															180616PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	180612PDR-MA															180624PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	180616PDR-MA															180630R-MM																		
	180620PDR-MA															180632R-MM			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	180624PDR-MA																																	

▶ Parts

Specification			
Ø25~Ø50	Screw FTKA0408 FTKA0410	Wrench TW15S	Cutter Dia. Ø25 Ø32~Ø100
Ø20~Ø50	FTKA0408 FTKA0410	TW15S	Ø20~Ø25 Ø32~Ø200

▶ Available Inserts E05, E06

BT30/40 AM1000/1500

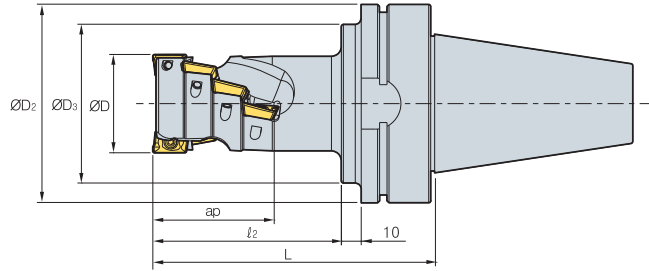

AA
90°




• AR : -12.5°~13°
• RR : -17°~6°

(mm)

Designation	Stock		ØD	ØD2	ØD3	l1	l2	L	ap	
BT30	AM1016015-2		6	16	46	41	30	62	2	15.5
	AM1020020-3		12	20	46	41	32	64	3	20.5
	AM1025025-4		20	25	46	41	39	71	4	25.5
BT40	AM1016015-2		6	16	63	50	30	67	2	15.5
	AM1020020-3		12	20	63	50	32	69	3	20.5
	AM1025025-4		20	25	63	50	39	76	4	25.5
BT30	AM15020026-1		3	20	46	41	42	74	1	26.5
	AM15025035-2		8	25	46	41	50	62	2	35
	AM15032044-2		10	32	46	41	60	92	2	44
BT40	AM15020026-1		3	20	63	50	42	79	1	26.5
	AM15025035-2		8	25	63	50	50	87	2	35
	AM15032044-2		10	32	63	50	60	97	2	44

● Stock item


▶ Available Inserts



Type	Designation	Cermet		Coated								Uncoated			page						
		CN2000	CN30	NCM925	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01					
1000 type	APMT 0602PDFR-MA																				
	060208PDFR-MA																				
	060202PDSR-MM				●				●			●	●								
	0602PDSR-MM				●	●			●	●		●	●								
	060208PDSR-MM				●	●			●			●	●								
	060212R-MM				●	●						●	●								
1500 type	APMT 060216R-MM					●					●	●									
	0903PDFR-MA																			●	
	090308PDFR-MA																				
	0903PDER-ML												●	●							
	090308PDER-ML												●	●							
	0903PDSR-MM				●			●				●	●								
	090308PDSR-MM				●	●			●			●	●								
	090312R-MM				●				●			●	●								
090316R-MM				●	●						●	●									
090320R-MM					●						●	●									

E05

▶ Caution when insert are screwed

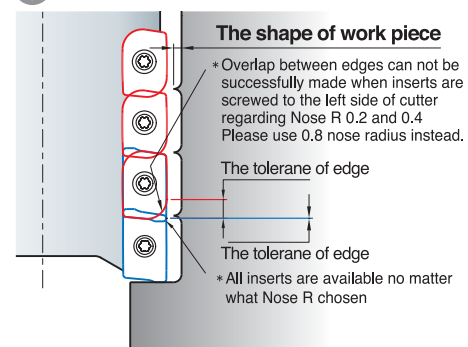


▶ Parts

Specification				
Ø16~Ø25	FTKA01842	-	TW06S-A	Ø10~Ø63
Ø20~Ø32	FTKA02565S	TW08S	-	Ø16~Ø100

▶ Available Inserts E05



BT30 / 40 AM2000

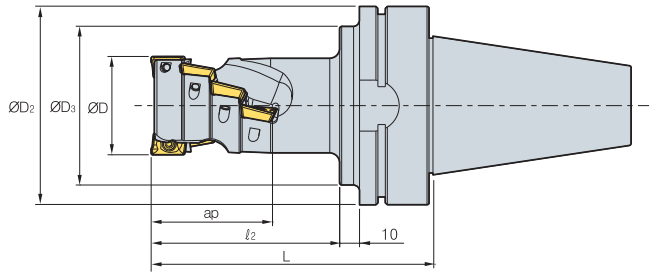

AA
90°
• AR : -9°
• RR : -13°~8°

(mm)

Designation	Stock		ØD	ØD2	ØD3	l2	L	No. of flute	ap	
BT30	AM2020029-1		3	20	46	41	45	77	1	29.4
	AM2025038-2		8	25	46	45	55	87	2	38.9
	AM2032048-2		10	32	46	45	65	97	2	48.5
	AM2040058-2		14	40	46	45	75	107	2	58
	AM2050039-4		16	50	46	45	58	90	4	39
	AM2063039-4		16	63	46	45	58	90	4	39
	AM2080039-5		20	80	46	45	63	95	5	39
	AM2100039-6		24	100	46	45	63	95	6	39
BT40	AM2020029-1		3	20	63	50	45	82	1	29.4
	AM2025038-2		8	25	63	50	55	92	2	38.9
	AM2032048-2		10	32	63	50	65	102	2	48.5
	AM2040058-2		14	40	63	50	75	112	2	58
	AM2050039-4		16	50	63	50	58	95	4	39
	AM2063039-4		16	63	63	50	58	95	4	39
	AM2080039-5		20	80	63	50	63	100	5	39
	AM2100039-6		24	100	63	50	63	100	6	39

● Stock item

▶ Available Inserts



APMT-MA



APMT-ML




APMT-MM



APMT-MF

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 11T3PDFR-MA															
11T308PDFR-MA															
11T3PDER-ML										●	●				
11T308PDER-ML															
11T3PDSR-MM			●	●	●	●	●	●	●	●	●				E05
11T3PDSR-MF			●	●	●	●	●	●	●	●	●				E06
11T308PDSR-MM			●	●	●	●	●	●	●	●	●				
11T312PDSR-MM			●	●	●	●	●	●	●	●	●				
11T316R-MM			●	●	●	●	●	●	●	●	●				
11T318R-MM															
11T324R-MM				●	●		●			●	●				

▶ Caution when insert are screwed

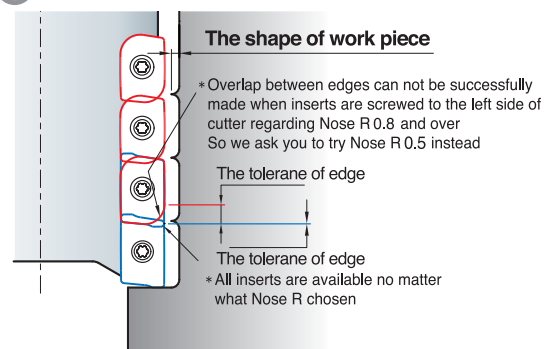


▶ Parts

Specification		
Ø20~Ø100	FTKA02565S	TW08S

▶ Available Inserts E05, E06

BT50 AM3000 / 4000

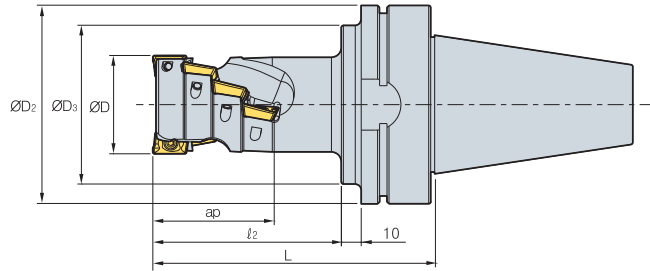

AA
90°
• AR : 13°~15°
• RR : -11°~-4°

(mm)

Designation	Stock	Flutes	ØD	ØD2	ØD3	l2	L	No. of flute	ap
BT50	AM3050043-2	6	50	100	80	72	120	2	43
	AM3063057-4	16	63	100	80	86	134	4	57
	AM3080071-4	20	80	100	80	100	148	4	71
	AM3100071-6	30	100	100	80	100	148	6	71
	AM4040046-2	6	40	100	80	75	123	2	46
BT50	AM4050061-2	8	50	100	80	95	143	2	61
	AM4063061-4	16	63	100	80	90	138	4	61
	AM4080076-4	20	80	100	80	105	153	4	76
	AM4100076-6	30	100	100	80	105	153	6	76

● Stock item

▶ Available Inserts



APMT-MA



APMT-ML



APMT-MM




APMT-MF

Type	Designation	Cermet		Coated							Uncoated		Type	Designation	Cermet		Coated							Uncoated		page										
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400			A30	G10E	H01	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530		PC6510	PC5300	PC5400	A30	G10E	H01				
3000 type	APMT 1604PDFR-MA													4000 type	APMT 180630R-MA																					
	160404PDFR-MA														1806PDER-ML																					
	1604PDER-ML														180604PDER-ML																					
	160404PDER-ML														180612PDER-ML																					
	1604PDSR-MM														180616PDER-ML																					
	1604PDSR-MF														180620PDER-ML																					
	160410PDSR-MM														180624PDER-ML																					
	160416PDSR-MM														180630R-ML																					
	160424R-MM														1806PDSR-MM																					
	160430R-MM														1806PDSR-MF																					
160432R-MM													180612PDSR-MM																							
4000 type	APMT 1806PDFR-MA													180616PDSR-MM																						
	180604PDFR-MA													180620PDSR-MM																						
	180612PDFR-MA													180624PDSR-MM																						
	180616PDFR-MA													180630R-MM																						
	180620PDFR-MA													180632R-MM																						
	180624PDFR-MA																																			

▶ Parts

Specification		
Ø50~Ø100	FTKA0410	TW15S
Ø40~Ø100	FTKA0410	TW15S


▶ Caution when insert are screwed

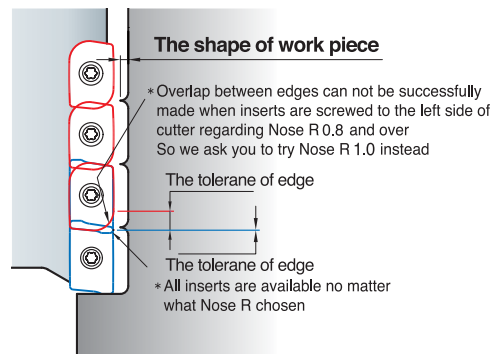

▶ Available Inserts E05, E06



BT50 HAT4000

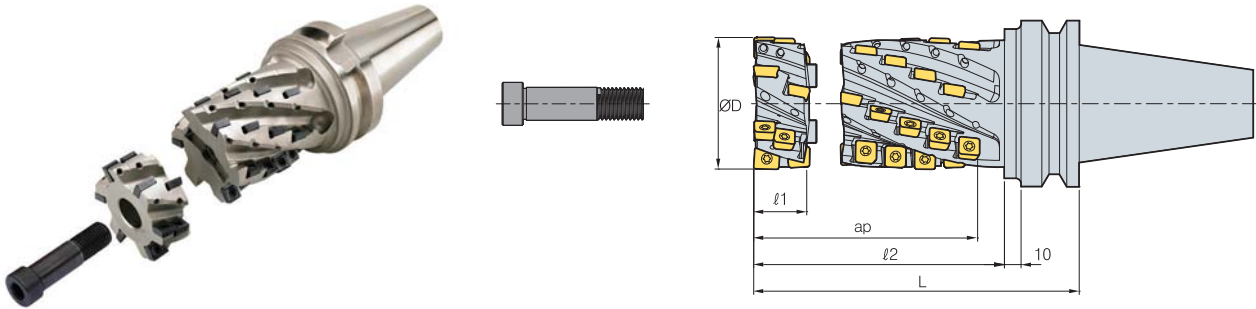

(mm)

Designation	Stock	Gears		ØD	l1	l2	L	No. of flute	ap	Application	
		SPMT	ZPMT								
BT50- (Set)	HAT4050094-2F	10	1	50	32	119	160	2	94	HAT4050032-2F	
	HAT4050104-2F	11	1	50	32	129	170	2	104		
	HAT4050114-2F	12	1	50	32	139	180	2	114		
	HAT4063094-4F	20	2	63	32	119	160	4	94		HAT4063032-4F
	HAT4063104-4F	22	2	63	32	129	170	4	104		
	HAT4063114-4F	24	2	63	32	139	180	4	114		
	HAT4080094-4F	20	2	80	33	119	160	4	94		HAT4080033-4F
HAT4080104-4F	22	2	80	33	129	170	4	104			
HAT4080114-4F	24	2	80	33	139	180	4	114			
HAT4080114-4F	24	2	80	33	139	180	4	114			
(Front Piece)	HAT4050032-2F	3	1	50	32	-	-	2	-	-	
	HAT4063032-4F	6	2	63	32	-	-	4	-		
	HAT4080033-4F	6	2	80	33	-	-	4	-		

● Stock item

▶ Available Inserts



SPMT-MM



ZPMT-MM

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM825	NCM835	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SPMT 120508-MMN															E20
ZPMT 1505PPSR-MMN															E23

▶ Set specification


Set Designation	Designation	Front Piece	Clamping Bolt
HAT4050094-2F	HAT4050062-2F	HAT4050032-2F	HSB1255
HAT4050104-2F	HAT4050072-2F		
HAT4050114-2F	HAT4050082-2F		
HAT4063094-4F	HAT4063062-4F	HAT4063032-4F	HSB1670
HAT4063104-4F	HAT4063072-4F		
HAT4063114-4F	HAT4063082-4F		
HAT4080094-4F	HAT4080061-4F	HAT4080033-4F	HSB1682
HAT4080104-4F	HAT4080071-4F		
HAT4080114-4F	HAT4080081-4F		

▶ Parts

Specification	Screw	Wrench
Ø50~Ø80	ETNA0511	TW20

▶ Available Inserts E20, E23

HSK63A AM1000 / 1500

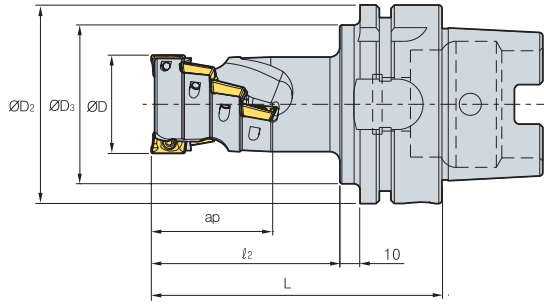

AA
90°
• AR : -12,5°~13°
• RR : -17°~-6°

(mm)


Designation	Stock		ØD	ØD ₂	ØD ₃	l ₂	L	No. of flute	ap
HSK63A AM1016015-2		6	16	63	53	30	66	2	15.5
AM1020020-3		12	20	63	53	32	68	3	20.5
AM1025025-4		20	25	63	53	39	75	4	25.5
HSK63A AM15020026-1		3	20	63	53	42	78	1	26.5
AM15025035-2		8	25	63	53	50	86	2	35
AM15032044-2		10	32	63	53	60	96	2	44

● Stock item

Available Inserts



APMT-MA



APMT-ML




APMT-MM

Type	Designation	Cermet		Coated								Uncoated			page		
		CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01	
1000 type	APMT 0602PDFR-MA																
	060208PDFR-MA																
	060202PDSR-MM				●			●			●	●					
	0602PDSR-MM				●	●		●	●	●	●	●					
	060208PDSR-MM				●	●		●			●	●					
	060212R-MM				●	●					●	●					
1500 type	APMT 060216R-MM					●					●	●					
	0903PDFR-MA																●
	090308PDFR-MA																
	0903PDER-ML											●	●				
	090308PDER-ML																
	0903PDSR-MM				●		●				●	●					
	090308PDSR-MM				●	●					●	●					
	090312R-MM										●	●					
090316R-MM				●	●					●	●						
090320R-MM					●					●	●						

E05

Caution when insert are screwed

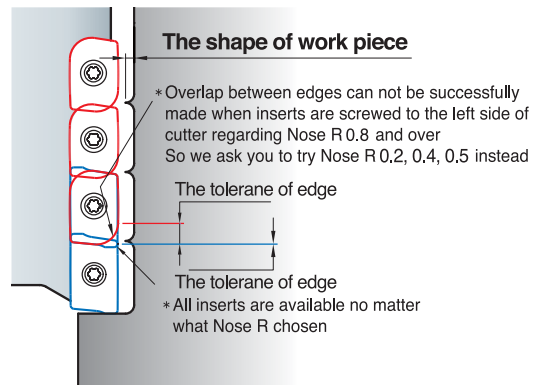


Parts

Specification			
Ø16~Ø25	FTKA01842	-	TW06S-A
Ø20~Ø32	FTKA02565S	TW08S	-

Available Inserts E05



HSK63A AM2000

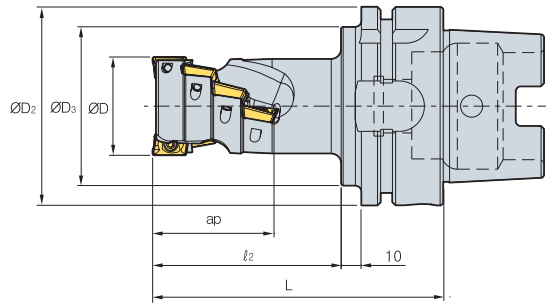

AA
90°
• AR : -12,5°~13°
• RR : -17°~-6°

(mm)

Designation	Stock		ØD	ØD ₂	ØD ₃	l ₂	L	No. of flute	ap
HSK63A AM2020029-1		3	20	63	53	45	81	1	29.4
AM2025038-2		8	25	63	53	55	91	2	38.9
AM2032048-2		10	32	63	53	65	101	2	48.5
AM2040058-2		14	40	63	53	75	111	2	58
AM2050039-4		16	50	63	53	58	94	4	39
AM2063039-4		16	63	63	53	58	94	4	39
AM2080039-5		20	80	63	53	63	99	5	39
AM2100039-6		24	100	63	53	63	99	6	39

● Stock item

▶ Available Inserts



APMT-MA



APMT-ML




APMT-MM



APMT-MF

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM825	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 11T3PDFR-MA															
11T308PDFR-MA															
11T3PDER-ML										●	●				
11T308PDER-ML															
11T3PDSR-MM			●	●	●	●	●	●	●	●	●				E05
11T3PDSR-MF			●	●	●		●		●	●	●				E06
11T308PDSR-MM			●	●	●		●	●	●	●	●				
11T312PDSR-MM			●	●	●		●	●		●	●				
11T316R-MM			●	●	●					●	●				
11T318R-MM															
11T324R-MM				●	●		●			●	●				

▶ Caution when insert are screwed

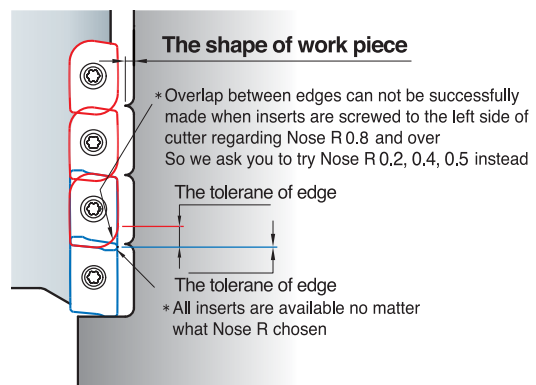


▶ Parts

Specification		
Ø20~Ø100	FTKA02565S	TW08S

▶ Available Inserts E05, E06

HSK100A AM3000

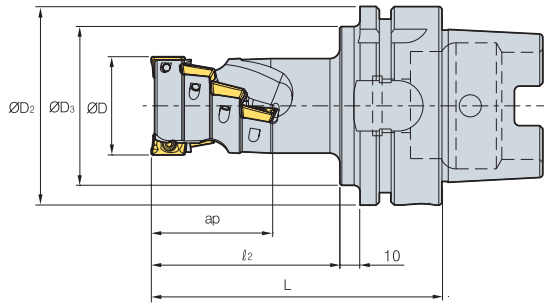

- AR : $-13^{\circ} \sim 15^{\circ}$
- RR : $-11^{\circ} \sim -4^{\circ}$

(mm)

Designation	Stock		ØD	ØD ₂	ØD ₃	l ₂	L	No. of flute	ap
HSK100A AM3050043-2		6	50	100	88	72	111	2	43
AM3063057-4		16	63	100	88	86	125	4	57
AM3080071-4		20	80	100	88	100	139	4	71
AM3100071-6		30	100	100	88	100	139	6	71

● Stock item

Available Inserts



APMT-MA



APMT-ML




APMT-MM



APMT-MF

Designation	Cermet		Coated							Uncoated			page		
	CN2000	CN30	NCM325	NC5330	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30		G10E	H01
APMT 1604PDFR-MA														●	
160404PDFR-MA															
1604PDER-ML										●	●				
160404PDER-ML															
1604PDSR-MM			●	●	●		●	●	●	●	●				E05
1604PDSR-MF			●	●	●		●	●	●	●	●				E06
160410PDSR-MM			●				●		●	●	●				
160416PDSR-MM			●	●	●		●		●	●	●				
160424R-MM				●	●		●		●	●	●				
160430R-MM									●	●	●				
160432R-MM			●	●	●		●		●	●	●				

Caution when insert are screwed

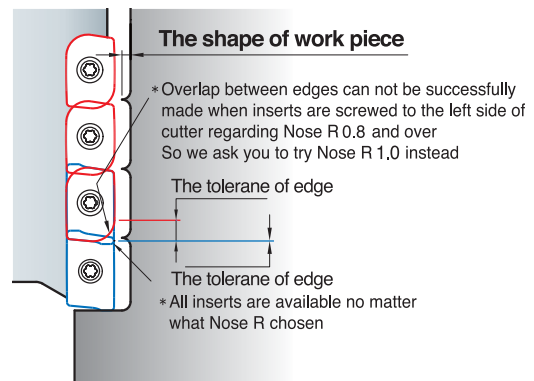


Parts

Specification		
Ø50~Ø100	Screw FTKA0410	Wrench TW15S

Available Inserts E05, E06



HSK100A AM4000

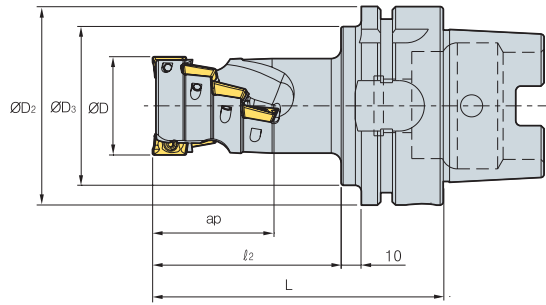

AA
90°


- AR : -13°~15°
- RR : -11°~-4°

(mm)

Designation	Stock		ØD	ØD ₂	ØD ₃	l ₂	L	No. of flute	ap
HSK100A AM4040046-2		6	40	100	88	75	114	2	46
AM4050061-2		8	50	100	88	95	134	2	61
AM4063061-4		16	63	100	88	90	129	4	61
AM4080076-4		20	80	100	88	105	144	4	76
AM4100076-6		30	100	100	88	105	144	6	76

● Stock item

Available Inserts



APMT-MA



APMT-ML




APMT-MM



APMT-MF

Designation	Cermet		Coated						Uncoated			page	Designation	Cermet		Coated						Uncoated			page				
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400			A30	G10E	H01	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530		PC6510	PC5300	PC5400	A30
APMT 1806PDR-MA													●	APMT 180620PDER-ML															
180604PDR-MA														180624PDER-ML															
180612PDR-MA														180630R-ML															
180616PDR-MA														1806PDSR-MM			●	●	●	●	●	●	●	●	●	●	●	●	●
180620PDR-MA														1806PDSR-MF					●					●	●	●	●	●	
180624PDR-MA														180612PDSR-MM			●	●	●		●			●	●	●	●	●	
180630R-MA														180616PDSR-MM					●			●			●	●	●	●	
1806PDER-ML													● ●	180620PDSR-MM															
180604PDER-ML														180624PDSR-MM					●	●					●	●	●	●	
180612PDER-ML														180630R-MM											●	●	●	●	
180616PDER-ML														180632R-MM					●	●		●			●	●	●	●	

Caution when insert are screwed

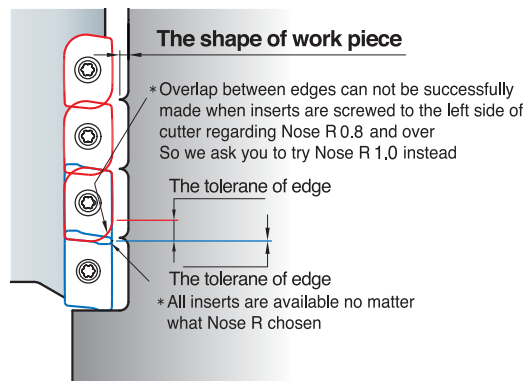


Parts

Specification		
Ø40~Ø100	FTKA0410	TW15S

Available Inserts E05, E06

BT30 / BT40 / BT50

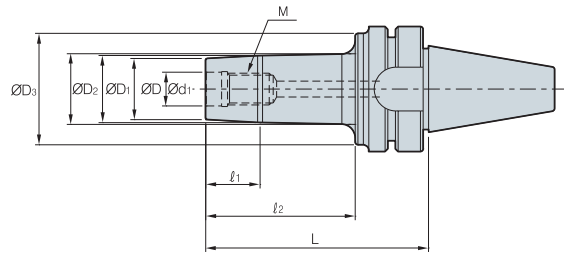

(mm)


Designation	Stock	ØD	ØD ₁	ØD ₂	ØD ₃	Ød ₁	l ₁	l ₂	L	M	
BT30	MAT-M06-053		11	11.7	13	30	6.5	5	21	53	06×1.0
	MAT-M08-057		14.5	15.7	17.5	35	8.5	7	25	57	08×1.25
	MAT-M10-062		18	19.7	24	38	10.5	7	30	62	10×1.5
	MAT-M12-067		23	24.7	27.5	41	12.5	10	35	67	12×1.75
	MAT-M16-067		29	31.7	33.5	41	17	10	35	67	16×2.0
BT40	MAT-M06-062		11	11.7	14	40	6.5	5	25	62	08×1.0
	MAT-M06-077		11	11.7	14	40	6.5	5	40	77	06×1.0
	MAT-M06-092		11	11.7	14	40	6.5	5	55	92	06×1.0
	MAT-M08-067		14.5	15.7	19	44	8.5	7	30	67	08×1.25
	MAT-M08-082		14.5	15.7	19	44	8.5	7	45	82	08×1.25
	MAT-M08-097		14.5	15.7	19	44	8.5	7	60	97	08×1.25
	MAT-M10-072		18	19.7	23	50	10.5	10	35	72	10×1.5
	MAT-M10-087		18	19.7	23	50	10.5	10	50	87	10×1.5
	MAT-M10-102		18	19.7	23	50	10.5	10	65	102	10×1.5
	MAT-M12-077		23	24.7	30	55	12.5	10	40	77	12×1.75
	MAT-M12-092		23	24.7	30	55	12.5	13	55	92	12×1.75
	MAT-M12-107		23	24.7	30	55	12.5	13	70	107	12×1.75
	MAT-M16-077		29	31.7	37	55	17	13	40	77	16×2.0
	MAT-M16-092		29	31.7	37	55	17	13	55	92	16×2.0
	MAT-M16-107		29	31.7	37	55	17	13	70	107	16×2.0
BT50	MAT-M06-083		11	11.7	15	40	6.5	5	35	83	06×1.0
	MAT-M06-098		11	11.7	15	40	6.5	5	50	98	06×1.0
	MAT-M06-113		11	11.7	15	40	6.5	5	65	113	06×1.0
	MAT-M08-088		14.5	15.7	20	45	8.5	7	40	88	08×1.25
	MAT-M08-103		14.5	15.7	20	45	8.5	7	55	103	08×1.25
	MAT-M08-118		14.5	15.7	20	45	8.5	7	70	118	08×1.25
	MAT-M10-093		18	19.7	25	55	10.5	10	45	93	10×1.5
	MAT-M10-113		18	19.7	25	55	10.5	10	65	113	10×1.5
	MAT-M10-128		18	19.7	25	55	10.5	10	80	128	10×1.5
	MAT-M12-103		23	24.7	33	65	12.5	10	55	103	12×1.75
	MAT-M12-118		23	24.7	33	65	12.5	13	70	118	12×1.75
	MAT-M12-133		23	24.7	33	65	12.5	13	85	133	12×1.75
	MAT-M16-103		29	31.7	41	85	17	13	55	103	16×2.0
	MAT-M16-118		29	31.7	41	85	17	13	70	118	16×2.0
	MAT-M16-133		29	31.7	41	85	17	13	85	133	16×2.0

Available Modular E33

● Stock item



HSK63A / HSK100A

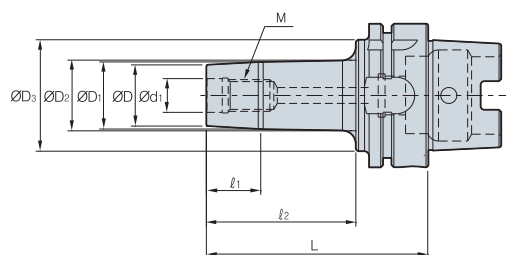

(mm)

Designation	Stock	ØD	ØD1	ØD2	ØD3	Ød1	l1	l2	L	M	
HSK63A	MAT-M06-061		11	11.7	27	40	6.5	5	25	61	06*1.0
	MAT-M06-076		11	11.7	27	40	6.5	5	40	76	06*1.0
	MAT-M06-091		11	11.7	27	40	6.5	5	55	91	06*1.0
	MAT-M08-066		14.5	15.7	30.5	44	8.5	7	30	66	08*1.25
	MAT-M08-081		14.5	15.7	30.5	44	8.5	7	45	81	08*1.25
	MAT-M08-096		14.5	15.7	30.5	44	8.5	7	60	96	08*1.25
	MAT-M10-071		18	19.7	34	50	10.5	10	35	71	10*1.5
	MAT-M10-086		18	19.7	34	50	10.5	10	50	86	10*1.5
	MAT-M10-101		18	19.7	34	50	10.5	10	65	101	10*1.5
	MAT-M12-076		23	24.7	36.5	55	12.5	10	40	76	12*1.75
	MAT-M12-091		23	24.7	36.5	55	12.5	13	55	91	12*1.75
	MAT-M12-106		23	24.7	36.5	55	12.5	13	70	106	12*1.75
	HSK100A	MAT-M16-076		29	31.7	38.5	55	17	13	40	76
MAT-M16-091			29	31.7	38.5	55	17	13	55	91	16*2.0
MAT-M16-106			29	31.7	38.5	55	17	13	70	106	16*2.0
MAT-M06-074			11	11.7	15	40	6.5	5	35	74	06*1.0
MAT-M06-089			11	11.7	15	40	6.5	5	50	89	06*1.0
MAT-M06-104			11	11.7	15	40	6.5	5	65	104	06*1.0
MAT-M08-079			14.5	15.7	20	45	8.5	7	40	79	08*1.25
MAT-M08-094			14.5	15.7	20	45	8.5	7	55	94	08*1.25
MAT-M08-109			14.5	15.7	20	45	8.5	7	70	109	08*1.25
MAT-M10-084			18	19.7	25	55	10.5	10	45	84	10*1.5
MAT-M10-104			18	19.7	25	55	10.5	10	65	104	10*1.5
MAT-M10-119			18	19.7	25	55	10.5	10	80	119	10*1.5
MAT-M12-094			23	24.7	33	65	12.5	10	55	94	12*1.75
MAT-M12-109		23	24.7	33	65	12.5	13	70	109	12*1.75	
MAT-M12-124		23	24.7	33	65	12.5	13	85	124	12*1.75	
MAT-M16-094		29	31.7	41	85	17	13	55	94	16*2.0	
MAT-M16-109		29	31.7	41	85	17	13	70	109	16*2.0	
MAT-M16-124		29	31.7	41	85	17	13	85	124	16*2.0	

Available Modular E33

● Stock item


Rigid body employs high tensile aluminum

Future Mill



- Light aluminum body(50% of steel body) can be used for high speed cutting, tapping center, and on low power machines
- Easy handling
- It can be used for aluminum alloys, medium cutting of steel, and cast iron
- Rigid body employs high tensile aluminum
- Locators for excellent durability
- Various kinds of chip breaker are available
- Due to the high rake angle, it provides low cutting loads and good surface roughness

▶ Cutter

- ▶ Strong clamping between aluminum body and locator with double screw provides high efficiency
- ▶ Acute angle of locator seat provides strong clamping
- ▶ Wide chip pocket area provides good chip evacuation
- ▶ High tensile strength aluminum body

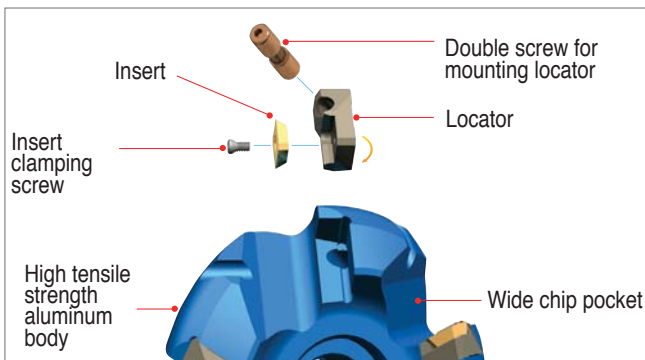

▶ Locator

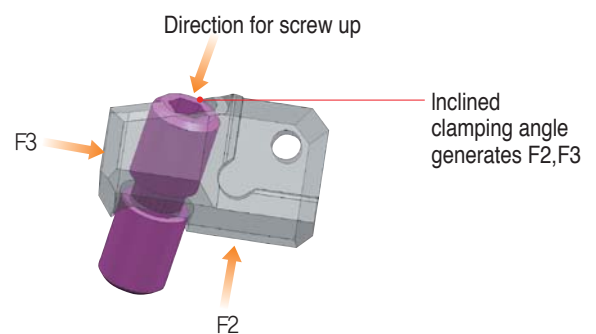
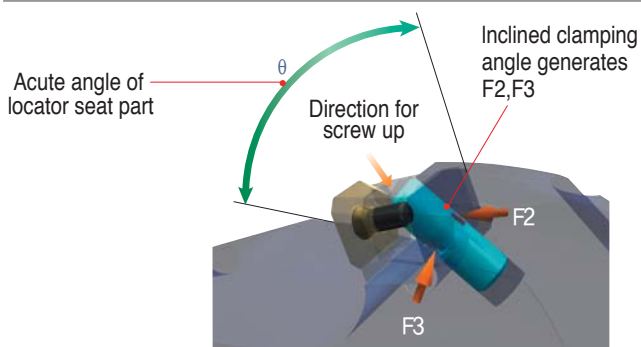


▶ Through coolant system


- ▶ Exclusively designed coolant bolt and cover provide excellent coolant action and chip evacuation for improved tool life
- ▶ Exact coolant direction to cutting area
- ▶ Exclusive coolant bolt and cover are sold separately. Through coolant arbor is required

• Bolt : Ø63 ~ Ø160


• Cover : Over Ø200



▶ Application range as per workpiece

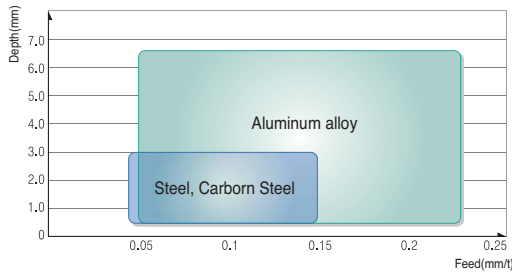

▶ Cutting speed

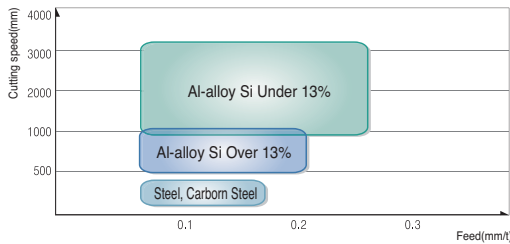


▶ Max. available revolution

Cutter diameter	Max. revolution
Ø63	20,000
Ø80	16,000
Ø100	13,000
Ø125	10,000
Ø160	8,000
Ø200	6,500
Ø250	5,000
Ø315	4,000

Future Mill(FMA)

▶ Features

- ▶ General milling cutter for high productivity
- ▶ Adjustable pitch of cutter and various chip breaker offer wide application range.
- ▶ Light cutter body allows high speed cutting and can be used in low horse power machine
- ▶ Smooth cutting with low cutting load is accomplished with high rake angle

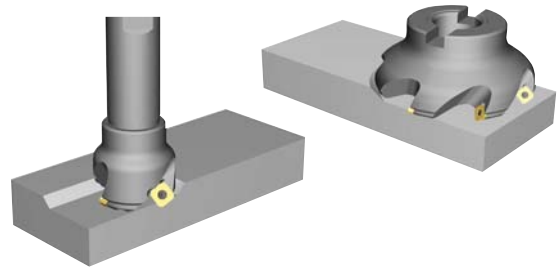

▶ Chip breaker

Type	Chip breaker	Cutting edge	Features of chip breaker
Light cutting	Non C/B		Superior surface roughness at finishing due to ground type cermet insert
	MF		Superior cutting quality for light and difficult-to-cut material machining through the low cutting load of chip breaker
General cutting	MM		Suitable for various cutting due to special shape design for general cutting
Roughing	MR		Tough cutting edge provides stable cutting performance in severe interruption
For aluminum	MA		Superior cutting quality for aluminum due to sharp cutting edge and buffed surface • SQET-MA: Sharp cutting edge due to high accurate grinding • SQXT-MA: Suitable cutting edge for roughing


▶ Recommended cutting condition

ISO	C/B Grade	vc(m/min)	MF	MM	MR	MA
			fz(mm/t)	fz(mm/t)	fz(mm/t)	fz(mm/t)
P	NC5330	210~350	0.05 ~ 0.20	0.10 ~ 0.30	0.10 ~ 0.30	-
	NCM325	190~310	0.05 ~ 0.20	0.10 ~ 0.30	0.10 ~ 0.30	-
	PC3500	160~270	0.05 ~ 0.20	0.10 ~ 0.30	0.10 ~ 0.30	-
M	PC9530	90~150	0.05 ~ 0.15	0.10 ~ 0.30	-	-
	NCM335	70~120	0.05 ~ 0.15	0.10 ~ 0.30	-	-
K	PC5300	110~180	0.05 ~ 0.20	0.10 ~ 0.30	-	-
Aluminum	H01	260~440	-	-	-	0.10 ~ 0.35


Future Mill(FMP)

▶ Features

- ▶ The strong cutting edge ensures excellent tool life in high feed and high speed, deep depth of cut, with low cutting loads
- ▶ Optimal grades for most workpieces make high efficiency cutting possible
- ▶ Unique chip breaker makes good chip evacuation and lower cutting loads (①)
- ▶ Innovative curve cutting edge lowers cutting load and provides a stronger cutting edge (②)

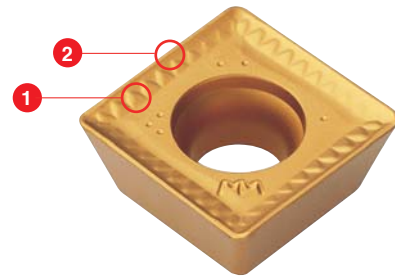

▶ Machining examples

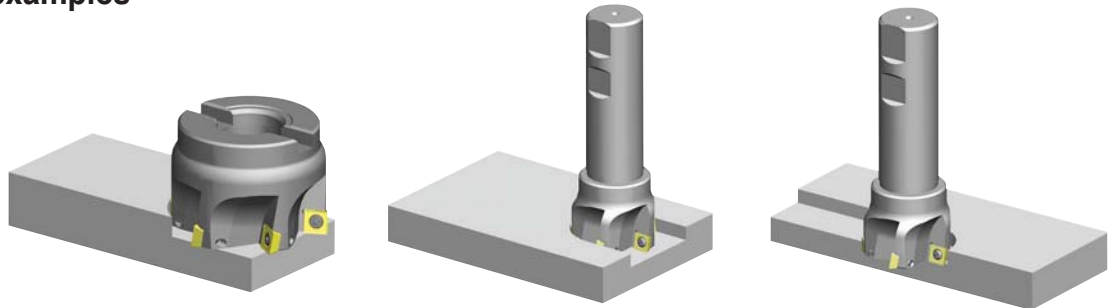

▶ Features of chip breaker

- ▶ Innovative special cutting edge and chip breaker design ensures ideal 90° cutting and low cutting load
- ▶ Various applications are available with multi functional cutters (Facing, Slotting, Shouldering)
- ▶ Improved tool life due to special coated grades
- ▶ Superior cutting quality at deep cutting depth through the low cutting load and strong cutting edge

▶ Recommended C/B and grade as per workpiece

Chip breaker	Cutter edge	Recommended C/B and grade as per workpiece (●:1st)									
		Low carbon steel Mild steel		High carbon steel Alloy steel		Stainless steel		Cast iron		Aluminum alloy	
		C/B	Grade	C/B	Grade	C/B	Grade	C/B	Grade	C/B	Grade
Low cutting load type MF		●	○NCM325 ○NC5330 ●NCM335		●NCM325 ○NC5330 ○NCM335	●	○NCM325 ○NC5330 ●NCM335	●	●PC6510 ○PC215K	-	-
Reinforced cutting edge type MM			○NCM325 ○NC5330 ●NCM335		●NCM325 ○NC5330 ○NCM335		○NCM325 ○NC5330 ●NCM335		●PC6510 ○PC215K	-	-
Sharp cutting edge type MA		-	-	-	-	-	-	-	-	●	●H01 ○G10E

▶ Recommended cutting condition

(mm)

ISO	Cutting Speed vc(m/min)							
	CVD Coated			PVD Coated				Carbide
	NCM325	NCM335	PC3535	PC3545	PC6510	PC8520	PC9530	H01
P	190~310	180~290	160~270	130~210	-	-	-	-
M	110~180	100~160	-	70~120	-	110~180	90~150	-
K	-	-	-	-	180~230	-	-	-
N	-	-	-	-	-	-	-	260~440




Future Mill(FMR)

- Features**
- ▶ Wide coverage for medium to roughing, general steel to high hardness mold materials.
 - ▶ 2 step shape of insert provides strong clamping and can minimize components to replace the shim.
 - ▶ 4-8 cutting edge available per insert. (Inscribed circle 05, 06, 07, 08, 10, 12, 16, 20)
 - ▶ Uneven flute spacing prevents vibration on high speed applications and provides more stable machining.
 - ▶ Precise design of the insert seat prevents insert from chattering.
 - ▶ Special design of the insert bottom prevents movement and chatter of insert.
 - ▶ Easy to change cutting edge due to the rotation prevention design of the insert.





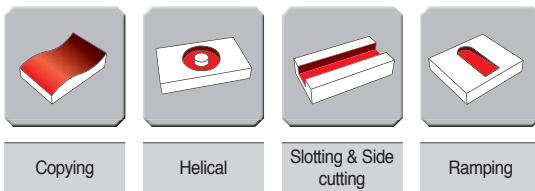



Machining examples





FMR Insert cutting edge shape

Designation	RDHW□□□□M0F	RDHW□□□□M0F	RDHW□□□□M0F
Cutting edge shape (G calss)			

Chip breakers

Chip breakers	Cutter edge	Features
Finishing MF 		Low cutting resistance chip breaker design guarantees long tool life good performance at finishing and difficult-to-cut material machining
Medium MM 		Suitable for general milling at wide application range
Aluminum MA 		Sharp cutting edge and buffed top face for aluminum machining prevent welding and control chip flow

Clamping system

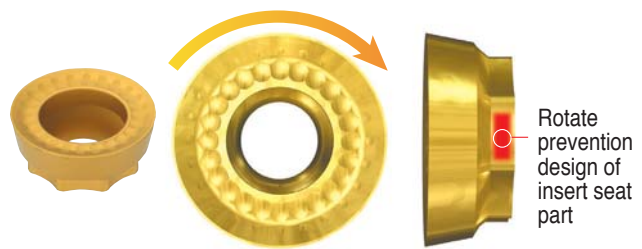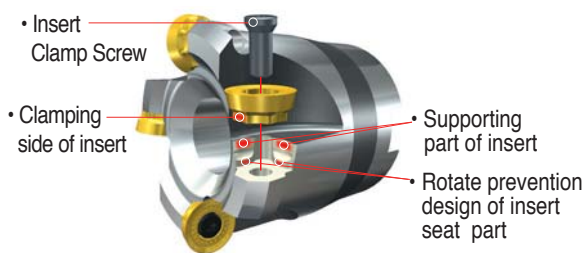


FMR □ 3000 type
FMR □ 4000 type

FMR □ 5000 type
FMR □ 6000 type


RDKT10T3M0-□□
RDKT1204M0-□□

RDKT1605M0-MM
RDKT2006M0-MM

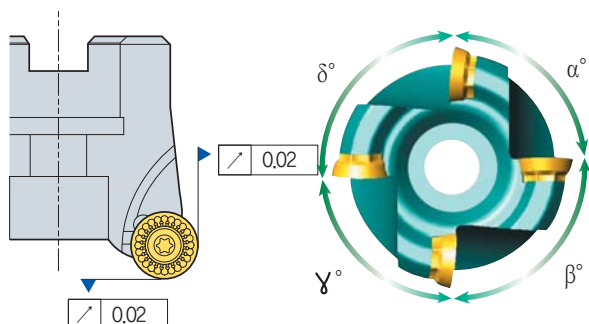

Good surface finish due to the precise design of insert seat part of cutter

Uneven flute spacing prevents vibration at high speed application and provides stable machining

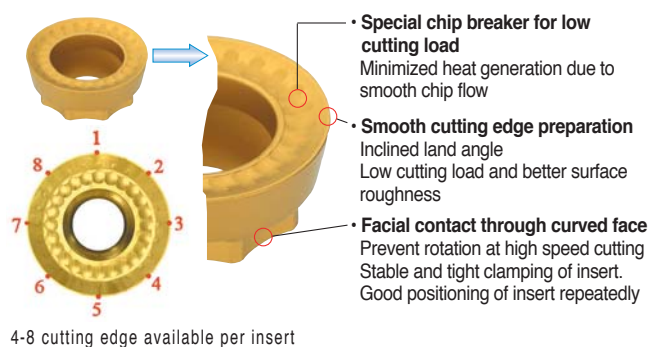

4-8 cutting edge available per insert

Future Mill(FMR)

▶ Chip removal rate (cm³/min)

Workpiece	Grades	Ø8	Ø10	Ø12	Ø15	Ø16	Ø20	Ø21	Ø25	Ø26	Ø32	Ø33	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125	Ø160
P General structure steel (under 200HB) General carbon steel (under 30 Hrc) High carbon steel, Alloy steel (30-40 Hrc) High carbon steel, Alloy steel (40-50 Hrc) Alloy steel (over 50 Hrc)	PC3500 PC3545 PC5300	4.97	9.94	9.94	14.92	31.83	31.83	47.74	47.74	47.74	71.61	38.19	95.49	119.36	143.23	167.11	190.98	133.69	509.29
		V=250, fz=0.25, ap=0.5, ae=0.5D		V=300, fz=0.4, ap=1.0, ae=0.5D		V=250, fz=0.4, ap=1.5, ae=0.5D												V=200, fz=0.5, ap=4.0, ae=0.5D	
		3.97	7.95	7.95	11.93	25.46	25.46	38.19	38.19	38.19	57.29	38.19	76.39	95.49	114.59	133.69	152.78	133.69	458.36
		V=200, fz=0.25, ap=0.5, ae=0.5D		V=250, fz=0.4, ap=1.0, ae=0.5D		V=200, fz=0.4, ap=1.5, ae=0.5D												V=180, fz=0.5, ap=4.0, ae=0.5D	
		2.86	5.72	5.72	8.59	22.91	22.91	34.37	34.37	34.37	51.56	34.37	68.75	85.94	103.13	120.32	137.5	120.32	407.43
		V=180, fz=0.20, ap=0.5, ae=0.5D		V=200, fz=0.4, ap=1.0, ae=0.5D		V=180, fz=0.4, ap=1.5, ae=0.5D												V=160, fz=0.5, ap=4.0, ae=0.5D	
1.24	2.48	2.48	3.72	11.45	11.45	14.32	17.18	14.32	21.48	14.32	28.64	35.8	42.97	50.13	57.29	50.13	249.55		
V=130, fz=0.15, ap=0.4, ae=0.5D		V=170, fz=0.3, ap=0.9, ae=0.5D		V=150, fz=0.3, ap=1.0, ae=0.5D												V=140, fz=0.4, ap=3.5, ae=0.5D			
0.95	1.9	1.9	2.86	7.63	7.63	9.54	11.45	9.54	14.32	9.54	19.09	23.87	28.64	33.42	38.19	33.42	152.78		
V=100, fz=0.15, ap=0.4, ae=0.5D		V=130, fz=0.3, ap=0.9, ae=0.5D		V=100, fz=0.3, ap=1.0, ae=0.5D												V=100, fz=0.4, ap=3.0, ae=0.5D			
M Stainless steel	PC5300	2.06	4.13	4.13	6.2	16.55	16.55	12.41	24.82	12.41	18.62	12.41	24.82	31.03	37.24	43.44	49.65	43.44	331.04
		V=130, fz=0.20, ap=0.5, ae=0.5D		V=200, fz=0.2, ap=1.0, ae=0.5D		V=100, fz=0.3, ap=1.0, ae=0.5D												V=130, fz=0.5, ap=4.0, ae=0.5D	
K Cast iron	PC5300	2.86	5.72	5.72	8.59	14.32	14.32	21.48	21.48	21.48	32.22	21.48	42.97	53.71	64.45	75.2	85.94	75.2	366.69
		V=180, fz=0.20, ap=0.5, ae=0.5D		V=180, fz=0.2, ap=1.0, ae=0.5D		V=180, fz=0.2, ap=1.5, ae=0.5D												V=180, fz=0.4, ap=4.0, ae=0.5D	

▶ Required machine power (P_{KW} = 0.75 x P_{HP})

▶ RDKT10

Workpiece	Grades	Ø21	Ø25	Ø26	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Cutting condition			
											vc	fz	ap	ae
P General structure steel (under 200HB) General carbon steel (under 30 Hrc) High carbon steel, Alloy steel (30-40 Hrc) High carbon steel, Alloy steel (40-50 Hrc) Alloy steel (over 50 Hrc)	PC3500 PC3545 PC5300	2.2	2.2	2.2	3.3	4.4	5.5	6.6	7.7	8.8	250	0.4	1.5	0.5D
		2.1	2.1	2.1	3.1	4.1	5.2	6.2	7.3	8.3	200	0.4	1.5	0.5D
		2.2	2.2	2.2	3.3	4.5	5.6	6.7	7.9	9	180	0.4	1.5	0.5D
		1.1	1.1	1.1	1.6	2.1	2.6	3.2	3.7	4.2	150	0.3	1.0	0.5D
		0.7	0.7	0.7	1.1	1.4	1.7	2.1	2.4	2.8	100	0.3	1.0	0.5D
M Stainless steel	PC5300	0.6	0.6	0.6	0.8	1.2	1.5	1.7	2	2.3	130	0.2	1.5	0.5D
K Cast iron	PC5300	0.6	0.6	0.6	0.9	1.2	1.5	1.8	2.1	2.4	180	0.2	1.5	0.5D

• The figures in the above chart means Php value.


▶ RDKT12

Workpiece	Grades	Ø32	Ø33	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125	Cutting condition			
										vc	fz	ap	ae
P General structure steel (under 200HB) General carbon steel (under 30 Hrc) High carbon steel, Alloy steel (30-40 Hrc) High carbon steel, Alloy steel (40-50 Hrc) Alloy steel (over 50 Hrc)	PC3500 PC3545 PC5300	1.7	1.7	2.6	3.5	3.5	4.4	5.3	6.1	200	0.4	1.5	0.5D
		2	2	3.1	4.1	2.6	5.2	6.2	7.2	180	0.4	1.5	0.5D
		2.2	2.2	3.3	4.4	2.8	5.6	6.7	7.8	160	0.4	1.5	0.5D
		1	1	1.5	1.6	2.1	2.6	3.1	3.6	140	0.3	1.0	0.5D
		0.7	0.7	1	1.4	0.8	1.7	2.1	2.4	100	0.3	1.0	0.5D
M Stainless steel	PC5300	0.5	0.5	0.8	1.1	0.7	1.4	1.7	2	130	0.2	1.5	0.5D
K Cast iron	PC5300	0.6	0.6	0.9	1.2	0.7	1.5	1.8	2.1	180	0.2	1.5	0.5D

• The figures in the above chart means Php value.

▶ Chip removal rate by cutting condition

• Used insert : RDKT10

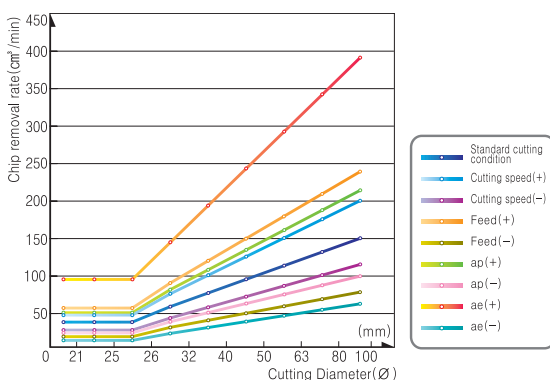

▶ Variation of cutting condition

Standard	ISO			
	vc=200	fz=0.4	ap=1.5	ae=0.5D
Speed (+)	250			
Speed (-)	150			
Feed (+)	0.6			
Feed (-)	0.2			
ap (+)	2			
ap (-)	1			
ae (+)	D			
ae (-)	0.2D			



 Recommended cutting condition

▶ Side milling, Slotting, Ramping, Copying

Workpiece	Hardness	Grades	Cutting speed (m/min)	FMR1000		FMR1500		FMR2000		FMR2500		FMR3000		FMR4000		FMR5000		FMR6000	
				ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)
Carbon steel	200HB ≤	PC5300	280	≤ 1.0	≤ 0.4	≤ 1.2	≤ 0.4	≤ 1.5	≤ 0.4	≤ 1.7	≤ 0.4	≤ 2.0	≤ 0.5	≤ 2.4	≤ 0.6	≤ 3.0	≤ 0.7	≤ 4.0	≤ 0.8
		PC5400	245																
	30-HRC ≤	PC5300	250	≤ 0.7	≤ 0.4	≤ 1.2	≤ 0.4	≤ 1.5	≤ 0.4	≤ 1.7	≤ 0.4	≤ 2.0	≤ 0.5	≤ 2.4	≤ 0.6	≤ 3.0	≤ 0.7	≤ 4.0	≤ 0.8
		PC5400	210																
P Alloy steel	30~40HRC	PC5300	195	≤ 0.7	≤ 0.2	≤ 0.9	≤ 0.2	≤ 1.2	≤ 0.2	≤ 1.5	≤ 0.2	≤ 1.7	≤ 0.3	≤ 2.0	≤ 0.4	≤ 2.7	≤ 0.5	≤ 3.7	≤ 0.6
		PC5400	170																
	40~50HRC	PC5300	150	≤ 0.7	≤ 0.2	≤ 0.9	≤ 0.2	≤ 1.2	≤ 0.2	≤ 1.5	≤ 0.2	≤ 1.7	≤ 0.3	≤ 2.0	≤ 0.4	≤ 2.7	≤ 0.5	≤ 3.7	≤ 0.6
		PC5400	130																
M High alloy steel (alloy constituent > 5%)	Tensile strength 350MPa ≤	PC5300	120	≤ 0.7	≤ 0.2	≤ 0.9	≤ 0.2	≤ 1.2	≤ 0.2	≤ 1.5	≤ 0.2	≤ 1.7	≤ 0.3	≤ 2.0	≤ 0.4	≤ 2.7	≤ 0.5	≤ 3.7	≤ 0.6
		PC5400	105																
	270HBs	PC5300	130	≤ 0.7	≤ 0.2	≤ 0.9	≤ 0.2	≤ 1.2	≤ 0.2	≤ 1.5	≤ 0.2	≤ 1.7	≤ 0.3	≤ 2.0	≤ 0.4	≤ 2.7	≤ 0.5	≤ 3.7	≤ 0.6
		PC5400	110																
K Cast iron, Ductile cast iron	Low tensile	PC5300	145	≤ 0.7	≤ 0.4	≤ 1.2	≤ 0.4	≤ 1.5	≤ 0.4	≤ 1.7	≤ 0.4	≤ 2.0	≤ 0.5	≤ 2.4	≤ 0.6	≤ 3.0	≤ 0.7	≤ 4.0	≤ 0.8
		PC5400	110																

▶ Plunging


Workpiece	Hardness	Grades	Cutting speed (m/min)	FMR1000		FMR1500		FMR2000		FMR2500		FMR3000		FMR4000		FMR5000		FMR6000	
				ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)
Carbon steel	200HB ≤	PC5300	280	≤ 2.5	≤ 0.2	≤ 3.0	≤ 0.2	≤ 3.5	≤ 0.2	≤ 4.0	≤ 0.2	≤ 5.0	≤ 0.3	≤ 6.0	≤ 0.4	≤ 8.0	≤ 0.5	≤ 10.0	≤ 0.6
		PC5400	245																
	30-HRC ≤	PC5300	250	≤ 2.5	≤ 0.2	≤ 3.0	≤ 0.2	≤ 3.5	≤ 0.2	≤ 4.0	≤ 0.2	≤ 5.0	≤ 0.3	≤ 6.0	≤ 0.4	≤ 8.0	≤ 0.5	≤ 10.0	≤ 0.6
		PC5400	210																
P Alloy steel	30~40HRC	PC5300	195	≤ 2.5	≤ 0.1	≤ 3.0	≤ 0.1	≤ 3.5	≤ 0.1	≤ 4.0	≤ 0.1	≤ 5.0	≤ 0.2	≤ 6.0	≤ 0.3	≤ 8.0	≤ 0.4	≤ 10.0	≤ 0.5
		PC5400	170																
	40~50HRC	PC5300	150	≤ 2.5	≤ 0.1	≤ 3.0	≤ 0.1	≤ 3.5	≤ 0.1	≤ 4.0	≤ 0.1	≤ 5.0	≤ 0.2	≤ 6.0	≤ 0.3	≤ 8.0	≤ 0.4	≤ 10.0	≤ 0.5
		PC5400	130																
M High alloy steel (alloy constituent > 5%)	Tensile strength 350MPa ≤	PC5300	120	≤ 2.5	≤ 0.1	≤ 3.0	≤ 0.1	≤ 3.5	≤ 0.1	≤ 4.0	≤ 0.1	≤ 5.0	≤ 0.2	≤ 6.0	≤ 0.3	≤ 8.0	≤ 0.4	≤ 10.0	≤ 0.5
		PC5400	105																
	270HBs	PC5300	130	≤ 2.5	≤ 0.1	≤ 3.0	≤ 0.1	≤ 3.5	≤ 0.1	≤ 4.0	≤ 0.1	≤ 5.0	≤ 0.2	≤ 6.0	≤ 0.3	≤ 8.0	≤ 0.4	≤ 10.0	≤ 0.5
		PC5400	110																
K Cast iron, Ductile cast iron	Low tensile	PC5300	145	≤ 2.5	≤ 0.2	≤ 3.0	≤ 0.2	≤ 3.5	≤ 0.2	≤ 4.0	≤ 0.2	≤ 5.0	≤ 0.3	≤ 6.0	≤ 0.4	≤ 8.0	≤ 0.5	≤ 10.0	≤ 0.6
		PC5400	110																

▶ Helical cutting

Workpiece	Hardness	Grades	Cutting speed (m/min)	FMR1000		FMR1500		FMR2000		FMR2500		FMR3000		FMR4000		FMR5000		FMR6000	
				ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)	ap(mm)	fz(mm/t)
Carbon steel	200HB ≤	PC5300	280	≤ 1.0	≤ 0.2	≤ 1.0	≤ 0.2	≤ 1.0	≤ 0.2	≤ 1.0	≤ 0.2	≤ 2.0	≤ 0.3	≤ 2.0	≤ 0.4	≤ 4.0	≤ 0.5	≤ 4.0	≤ 0.6
		PC5400	245																
	30-HRC ≤	PC5300	250	≤ 0.7	≤ 0.2	≤ 0.7	≤ 0.2	≤ 0.7	≤ 0.2	≤ 0.7	≤ 0.2	≤ 2.0	≤ 0.3	≤ 2.0	≤ 0.4	≤ 4.0	≤ 0.5	≤ 4.0	≤ 0.6
		PC5400	210																
P Alloy steel	30~40HRC	PC5300	195	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 1.7	≤ 0.2	≤ 1.7	≤ 0.3	≤ 3.7	≤ 0.4	≤ 3.7	≤ 0.5
		PC5400	170																
	40~50HRC	PC5300	150	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 1.7	≤ 0.2	≤ 1.7	≤ 0.3	≤ 3.7	≤ 0.4	≤ 3.7	≤ 0.5
		PC5400	130																
M High alloy steel (alloy constituent > 5%)	Tensile strength 350MPa ≤	PC5300	120	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 1.7	≤ 0.2	≤ 1.7	≤ 0.3	≤ 3.7	≤ 0.4	≤ 3.7	≤ 0.5
		PC5400	105																
	270HBs	PC5300	130	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 0.7	≤ 0.1	≤ 1.7	≤ 0.2	≤ 1.7	≤ 0.3	≤ 3.7	≤ 0.4	≤ 3.7	≤ 0.5
		PC5400	110																
K Cast iron, Ductile cast iron	Low tensile	PC5300	145	≤ 1.0	≤ 0.2	≤ 1.0	≤ 0.2	≤ 1.0	≤ 0.2	≤ 1.0	≤ 0.2	≤ 2.0	≤ 0.3	≤ 2.0	≤ 0.4	≤ 4.0	≤ 0.5	≤ 4.0	≤ 0.6
		PC5400	110																



FMR Vibration test

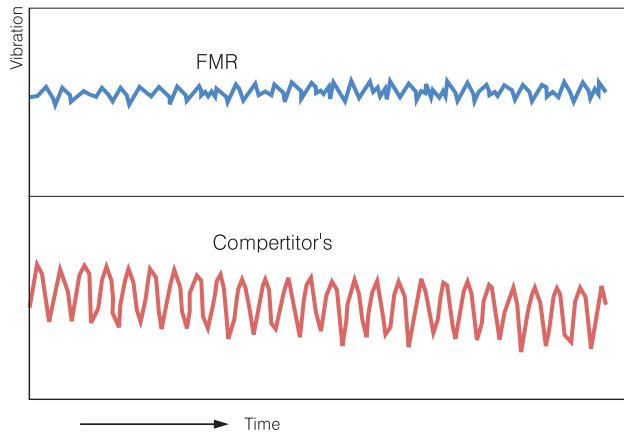


Bolt : Ø63 ~ Ø160

- **Workpiece** STD11
- **Cutting condition** $vc = 200\text{m/min}$
 $fz = 0.40\text{mm/t}$
 $ap = 2.0\text{mm}$
 $ae = 4.0\text{mm}$
- **Designation** FMRS3032RD-S
RDKT10T3M0-MM
(PC3500)

Cutting condition formulas for milling

Cutting speed	RPM
$vc = \frac{\pi \times D \times n}{1000} \text{ (m/min)}$	$n = \frac{vc \times 1000}{\pi \times D} \text{ (min}^{-1}\text{)}$
Feed(per tooth)	Feed(per minute)
$fz = \frac{vf}{Z \times n} \text{ (mm/t)}$	$vf = fz \times n \times z \text{ (mm/min)}$
Chip removal rate	Required machine power
$Q = \frac{ap \times ae \times vf}{1000} \text{ (cm}^3\text{/min)}$	$P_{kw} = \frac{Q \times kc}{60 \times 102 \times \eta} \text{ (kW)}$ $Php = \frac{Pc}{0.75} \text{ (hp)}$

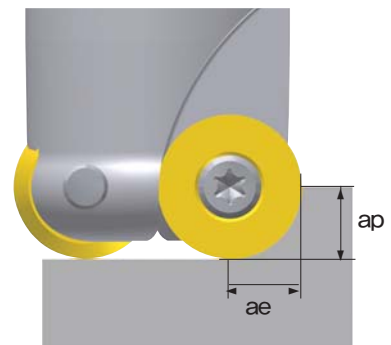


vc = Cutting speed(m/min)	Pkw = Required machine power(kW)
n = Revolution per a minute(min ⁻¹)	Php = Horsepower requirement(hp)
D = Cutting diameter(mm)	Q = Chip removal amount(cm ³ /min)
De = Efficient cutting diameter(mm)	ap = Depth of cut(mm)
vf = Feed per a minute(mm/min)	ae = Width of cut(mm)
fz = Feed per tooth(mm/t)	Kc = Specific cutting resistance(MPa)
z = Number of tooth	η = Mechanical efficiency(%)
Pc = Power requirement(kW)	

Feed as per cutting depth

Designation	Chip breaker	Depth of cut (mm)								
		0.2~0.5	0.5~1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0
RDHW0501M0	-	0.25	0.15	-	-	-	-	-	-	-
RDHW06T1M0	-	0.30	0.20	0.10	-	-	-	-	-	-
RDHW0702M0	-	0.35	0.25	0.10	0.07	-	-	-	-	-
RDHW0803M0	-	0.40	0.30	0.15	0.01	-	-	-	-	-
RDKT10T3M0 -	MF/MM	-	0.40	0.35	0.30	0.20	-	-	-	-
RDKT1204M0 -	MF/MM	-	0.50	0.45	0.30	0.25	0.22	-	-	-
RDHW1605M0	-	-	0.60	0.50	0.45	0.35	0.30	0.20	0.10	-
RDHW2006M0	-	-	-	0.60	0.50	0.40	0.30	0.25	0.15	0.10
RDKT1605M0 -	MM	-	0.60	0.50	0.45	0.35	0.30	0.20	0.10	-
RDKT2006M0 -	MM	-	-	0.60	0.50	0.40	0.30	0.25	0.15	0.10



▶ Ramping technical data

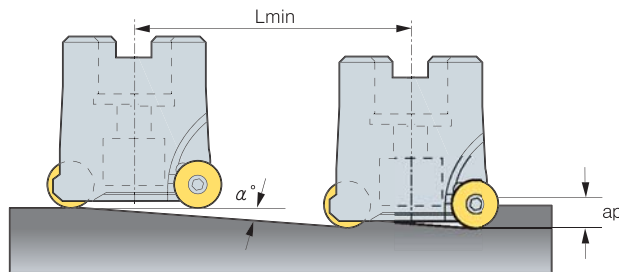


$$L_{min} = \frac{a_p}{\tan \alpha^\circ} \text{ (mm)}$$

※ \$L_{min}\$: Min. inclination cutting length
 \$\alpha^\circ\$: Max. ramping angle
 \$a_p\$: Depth of cut

Section	Tool Dia.	Ramping angle \$\alpha^\circ\$ (Max)	Cutting length L(mm) by ramping angle									
			\$a_p=1\$	\$a_p=2\$	\$a_p=2.5\$	\$a_p=3\$	\$a_p=3.5\$	\$a_p=4\$	\$a_p=5\$	\$a_p=6\$	\$a_p=8\$	\$a_p=10\$
FMR1000	08	18.14	3	6	8	-	-	-	-	-	-	-
	10	11.7	5	10	12	-	-	-	-	-	-	-
	12	8.43	7	13	17	-	-	-	-	-	-	-
	15	5.93	10	19	24	-	-	-	-	-	-	-
FMR1500	10	20.67	21	5	7	8	-	-	-	-	-	-
	12	10.05	10	11	14	17	-	-	-	-	-	-
	16	6.12	6	19	23	28	-	-	-	-	-	-
FMR2000	20	4.36	4	26	33	39	-	-	-	-	-	-
	15	9.42	6	12	15	18	21	-	-	-	-	-
FMR2500	20	5.85	10	20	24	29	34	-	-	-	-	-
	16	13.7	4	8	10	12	14	16	-	-	-	-
FMR3000	20	9.29	6	12	15	18	21	24	-	-	-	-
	25	6.56	9	17	22	26	30	35	-	-	-	-
	25	21.8	3	5	6	8	9	10	13	-	-	-
	32	13.24	4	9	11	13	15	17	21	-	-	-
	40	9.09	6	13	16	19	22	25	31	-	-	-
	50	6.52	9	17	22	26	31	35	44	-	-	-
FMR4000	63	4.76	12	24	30	36	42	48	60	-	-	-
	80	3.52	16	33	41	49	57	65	81	-	-	-
	100	2.69	21	43	53	64	74	85	106	-	-	-
	32	15.95	3	7	9	10	12	14	17	21	-	-
	40	10.3	6	11	14	17	19	22	28	33	-	-
	50	7.13	8	16	20	24	28	32	40	48	-	-
FMR5000	63	5.08	11	22	28	34	39	45	56	67	-	-
	80	3.69	16	31	39	47	54	62	78	93	-	-
	100	2.79	21	41	51	62	72	82	103	123	-	-
	125	2.14	27	54	67	80	94	107	134	161	-	-
	40	7.4	8	15	19	23	27	31	38	46	62	-
	50	5.22	11	22	27	33	38	44	55	66	88	-
FMR6000	63	3.79	15	30	38	45	53	60	75	91	121	-
	80	2.97	19	39	48	58	67	77	96	116	154	-
	100	2.09	27	55	69	82	96	110	137	164	219	-
	125	1.63	35	70	88	105	123	141	176	211	281	-
	40	7.44	8	15	19	23	27	31	38	46	61	77
FMR6000	50	4.97	11	23	29	34	40	46	57	69	92	46
	63	3.69	16	31	39	47	54	62	78	93	124	62
	80	2.72	21	42	53	63	74	84	105	126	168	84
	100	2.12	27	54	68	81	95	108	135	162	216	108
	125	1.57	36	73	91	109	128	146	182	219	292	146

Helical cutting technical data - ØDH Min




- ØD = Tool Dia.(mm), ØDH Min, Max = Min, Max diameter(mm)
- Ød = Tool Path (mm)
- ØDH Min(Min diameter) = ØD × 2 - Insert size, ØDH Max(Max diameter) = ØD × 2 - 2
- Ød(tool path) = ØDH Min, Max - øD

(mm)

Section	Insert	Tool Dia.	ØDH Min	Ød	Ramping angle (α°)									
					ap=1	ap=2	ap=2.5	ap=3	ap=3.5	ap=4	ap=5	ap=6	ap=8	ap=10
FMR1000	5	08	11	3	6.11	12.35	15.57	-	-	-	-	-	-	-
	5	10	15	5	3.65	7.34	7.34	-	-	-	-	-	-	-
	5	12	19	7	2.61	5.23	5.23	-	-	-	-	-	-	-
	5	15	25	10	1.83	3.65	3.65	-	-	-	-	-	-	-
FMR1500	6	10	14	4	4.57	9.20	9.20	13.95	-	-	-	-	-	-
	6	12	18	6	3.04	6.11	6.11	9.20	-	-	-	-	-	-
	6	16	26	10	1.83	3.65	3.65	5.49	-	-	-	-	-	-
FMR2000	7	15	23	8	2.28	4.57	4.57	6.88	8.04	-	-	-	-	-
	7	20	33	13	1.40	2.81	2.81	4.22	4.92	-	-	-	-	-
FMR2500	8	16	24	8	2.28	4.57	4.57	6.88	8.04	9.20	-	-	-	-
	8	20	32	12	1.52	3.04	3.04	4.57	5.34	6.11	-	-	-	-
	8	25	42	17	1.07	2.15	2.15	3.22	3.76	4.30	-	-	-	-
FMR3000	10	25	40	15	1.22	2.43	2.43	3.65	4.27	4.88	6.11	-	-	-
	10	32	54	22	0.83	1.66	1.66	2.49	2.91	3.32	4.15	-	-	-
	10	40	70	30	0.61	1.22	1.22	1.83	2.13	2.43	3.04	-	-	-
	10	50	90	40	0.46	0.91	0.91	1.37	1.60	1.83	2.28	-	-	-
	10	63	116	53	0.34	0.69	0.69	1.03	1.21	1.38	1.72	-	-	-
	10	80	150	70	0.26	0.52	0.52	0.78	0.91	1.04	1.30	-	-	-
FMR4000	12	32	52	20	0.91	1.83	1.83	2.74	3.20	3.65	4.57	5.49	-	-
	12	40	68	28	0.65	1.30	1.30	1.96	2.28	2.61	3.26	3.92	-	-
	12	50	88	38	0.48	0.96	0.96	1.44	1.68	1.92	2.40	2.88	-	-
	12	63	114	51	0.36	0.72	0.72	1.07	1.25	1.43	1.79	2.15	-	-
	12	80	148	68	0.27	0.54	0.54	0.81	0.94	1.07	1.34	1.61	-	-
	12	100	188	88	0.21	0.41	0.41	0.62	0.73	0.83	1.04	1.24	-	-
FMR5000	16	40	64	24	0.76	1.52	1.52	2.28	2.66	3.04	3.81	4.57	6.11	-
	16	50	84	34	0.54	1.07	1.07	1.61	1.88	2.15	2.69	3.22	4.30	-
	16	63	110	47	0.39	0.78	0.78	1.16	1.36	1.55	1.94	2.33	3.11	-
	16	80	144	64	0.29	0.57	0.57	0.86	1.00	1.14	1.43	1.71	2.28	-
	16	100	184	84	0.22	0.43	0.43	0.65	0.76	0.87	1.09	1.30	1.74	-
	16	125	234	109	0.17	0.33	0.33	0.50	0.59	0.67	0.84	1.00	1.34	-
FMR6000	20	50	80	30	0.61	1.22	1.22	1.83	2.13	2.43	3.04	3.65	4.88	6.11
	20	63	106	43	0.42	0.85	0.85	1.27	1.49	1.70	2.12	2.55	3.40	4.25
	20	80	140	60	0.30	0.61	0.61	0.91	1.06	1.22	1.52	1.83	2.43	3.04
	20	100	180	80	0.23	0.46	0.46	0.68	0.80	0.91	1.14	1.37	1.83	2.28
	20	125	230	105	0.17	0.35	0.35	0.52	0.61	0.70	0.87	1.04	1.39	1.74
	20	160	300	140	0.13	0.26	0.26	0.39	0.46	0.52	0.65	0.78	1.04	1.30



▶ Helical cutting technical data - ØDH Max



- ØD = Tool Dia.(mm), ØDH Min, Max = Min, Max diameter(mm)
- Ød = Tool Path (mm)
- ØDH Min(Min diameter) = ØD × 2 - Insert size, ØDH Max(Max diameter) = ØD × 2 - 2
- Ød(tool path) = ØDH Min, Max - ØD

(mm)

Section	Insert	Tool Dia.	ØDH Min	Ød	Ramping angle (α°)									
					ap=1	ap=2	ap=2.5	ap=3	ap=3.5	ap=4	ap=5	ap=6	ap=8	ap=10
FMR1000	5	08	14	6	3.04	6.11	7.65	-	-	-	-	-	-	-
	5	10	18	8	2.28	4.57	5.72	-	-	-	-	-	-	-
	5	12	22	10	1.83	3.65	4.57	-	-	-	-	-	-	-
	5	15	28	13	1.40	2.81	3.51	-	-	-	-	-	-	-
FMR1500	6	10	18	8	2.28	4.57	5.72	6.88	-	-	-	-	-	-
	6	12	22	10	1.83	3.65	4.57	5.49	-	-	-	-	-	-
	6	16	30	14	1.30	2.61	3.26	3.92	-	-	-	-	-	-
	6	20	38	18	1.01	2.03	2.54	3.04	-	-	-	-	-	-
FMR2000	7	15	28	13	1.40	2.81	3.51	4.22	4.92	-	-	-	-	-
	7	20	38	18	1.01	2.03	2.54	3.04	3.55	-	-	-	-	-
FMR2500	8	16	30	14	1.30	2.61	3.26	3.92	4.57	5.23	-	-	-	-
	8	20	38	18	1.01	2.03	2.54	3.04	3.55	4.06	-	-	-	-
	8	25	48	23	0.79	1.59	1.98	2.38	2.78	3.18	-	-	-	-
FMR3000	10	25	48	23	0.79	1.59	1.98	2.38	2.78	3.18	3.97	-	-	-
	10	32	62	30	0.61	1.22	1.52	1.83	2.13	2.43	3.04	-	-	-
	10	40	78	38	0.48	0.96	1.20	1.44	1.68	1.92	2.40	-	-	-
	10	50	98	48	0.38	0.76	0.95	1.14	1.33	1.52	1.90	-	-	-
	10	63	124	61	0.30	0.60	0.75	0.90	1.05	1.20	1.50	-	-	-
	10	80	158	78	0.23	0.47	0.58	0.70	0.82	0.94	1.17	-	-	-
FMR4000	10	100	198	98	0.19	0.37	0.47	0.56	0.65	0.74	0.93	-	-	-
	12	32	62	30	0.61	1.22	1.52	1.83	2.13	2.43	3.04	3.65	-	-
	12	40	78	38	0.48	0.96	1.20	1.44	1.68	1.92	2.40	2.88	-	-
	12	50	98	48	0.38	0.76	0.95	1.14	1.33	1.52	1.90	2.28	-	-
	12	63	124	61	0.30	0.60	0.75	0.90	1.05	1.20	1.50	1.80	-	-
	12	80	158	78	0.23	0.47	0.58	0.70	0.82	0.94	1.17	1.40	-	-
	12	100	198	98	0.19	0.37	0.47	0.56	0.65	0.74	0.93	1.12	-	-
FMR5000	12	125	248	123	0.15	0.30	0.37	0.45	0.52	0.59	0.74	0.89	-	-
	16	40	78	38	0.48	0.96	1.20	1.44	1.68	1.92	2.40	2.88	3.85	-
	16	50	98	48	0.38	0.76	0.95	1.14	1.33	1.52	1.90	2.28	3.04	-
	16	63	124	61	0.30	0.60	0.75	0.90	1.05	1.20	1.50	1.80	2.39	-
	16	80	158	78	0.23	0.47	0.58	0.70	0.82	0.94	1.17	1.40	1.87	-
	16	100	198	98	0.19	0.37	0.47	0.56	0.65	0.74	0.93	1.12	1.49	-
FMR6000	16	125	248	123	0.15	0.30	0.37	0.45	0.52	0.59	0.74	0.89	1.19	-
	20	50	98	48	0.38	0.76	0.95	1.14	1.33	1.52	1.90	2.28	3.04	3.81
	20	63	124	61	0.30	0.60	0.75	0.90	1.05	1.20	1.50	1.80	2.39	2.99
	20	80	158	78	0.23	0.47	0.58	0.70	0.82	0.94	1.17	1.40	1.87	2.34
	20	100	198	98	0.19	0.37	0.47	0.56	0.65	0.74	0.93	1.12	1.49	1.86
	20	125	248	123	0.15	0.30	0.37	0.45	0.52	0.59	0.74	0.89	1.19	1.48
20	160	318	158	0.12	0.23	0.29	0.35	0.40	0.46	0.58	0.69	0.92	1.16	

E Technical Information for FMR P-positive

Future Mill series for mold making FMR P-positive *New*

- Stable clamping system enables stable machining and productivity.
- Varied product line-up ensures wide application range.
- Optimal shape and grade with high hardness for hard-to-cut material machining.



▶ Features

- ▶ P-positive relief angle (11°) ensures high rigidity and high machinability in die steel and high-resistant alloy machining.
- ▶ Flat clearance face of insert prevents interference and revolution while machining.
- ▶ Optimal grades and chip breakers for various workpieces



- ▶ Chip breaker
 - Concave shape ensures wide chip pocket and lowers cutting temperature.
- ▶ Clearance face for preventing rotation
 - Prevents rotation in machining.
 - Divides corners.
 - Prevents interference in high-feed machining.
 - Ensures stable clamping.
- ▶ Through-coolant system
 - Superb chip evacuation
 - Low cutting heat ensures long tool life.
- ▶ Sockets are compatible with mount bolts in clamping of the cutter greater than Ø80.
 - More internal machining the internal diameter of cutter reduces weight.
 - Compatible clamping and light cutter facilitate machining.

▶ Usage and features of chip breakers

Chip breaker	Cutting edge	Applications	Features
MA		Aluminum machining	Optimal cutting edge for aluminum machining and buffed surface ensure high machinability.
ML		Titanium machining	Excellent results in titanium machining thanks to a high hardness cutting edge and the chip breaker reducing the cutting load.
MF		Fine finishing	Chip breaker for low cutting resistance enables fine finishing.
MM		General machining	Optimal for general machining
None C/B		Super hard material machining	Optimal for high hardness die steel and heat resistant alloy

▶ Recommended cutting condition

* Recommended chip breaker : ● First ○ Second

	Workpiece	Hardness	Grade	Cutting conditions				Chip breaker					
				vc(m/min)	fz(mm/t)	ap(mm)	ae(mm)	MA	ML	MF	MM	None C/B 1 2	
P	Low carbon steel	HB80~180	PC5400	100~250	0.12~0.70	0.3~6.0	0.7D~0.1D	-	-	●	○	-	-
	High carbon steel	HB180~280	PC5400	100~220	0.12~0.70	0.3~6.0	0.7D~0.1D	-	-	●	○	-	-
	Low alloy steel	Under Hrc27	PC3600	180~290	0.20~0.60	0.3~6.0	0.7D~0.1D	-	-	-	●	○	-
			PC5400 / PC5300	100~200	0.20~0.60	0.3~6.0	0.7D~0.1D	-	-	-	●	○	-
	Low pre-hardened steel	Hrc20~50	PC3600	130~250	0.30~0.50	~ 0.5	0.7D~0.1D	-	-	-	-	●	○
			PC5300	50~150	0.30~0.50	~ 0.5	0.7D~0.1D	-	-	-	-	●	○
High alloy steel	Under Hrc27	PC3600	130~250	0.30~0.50	~ 0.5	0.7D~0.1D	-	-	-	●	○	-	
High pre-hardened steel	Hrc20~48	PC5300	100~220	0.30~0.50	~ 0.5	0.7D~0.1D	-	-	-	●	○	-	
M	Stainless steel	Under HB270	PC5300 / PC5400	100~150	0.20~0.60	0.3~6.0	0.7D~0.1D	-	-	○	●	-	-
K	Gray cast iron, Ductile cast iron	Under 350MPa	PC5300	120~210	0.20~0.60	0.3~6.0	0.7D~0.1D	-	-	○	●	-	-
N	Aluminum	-	H01	300~800	0.30~0.60	0.3~6.0	0.7D~0.1D	●	-	-	-	-	-
S	Heat resistant alloy	Fe	Hrc30~40	PC5300 / PC5400	35~60	0.30~0.50	~ 0.5	0.7D~0.1D	-	●	○	-	-
		Ni or Co	Hrc40~45	PC5300 / PC5400	30~50	0.30~0.50	~ 0.5	0.7D~0.1D	-	●	○	-	-
	Titanium	Hrc35~45	PC5300 / PC5400	40~70	0.30~0.50	~ 1.5	0.7D~0.1D	-	●	○	-	-	
H	High hardened materials	Over Hrc50	PC5300 / PC5400	30~50	0.30~0.50	~ 0.5	0.7D~0.1D	-	-	-	-	●	○



▶ Feed per tooth according to a_p (fz, mm/t)

(mm)

Insert	Insert size (d)	Feed per tooth according to a_p							
		$a_p=1$	$a_p=2$	$a_p=3$	$a_p=4$	$a_p=5$	$a_p=6$	$a_p=8$	$a_p=10$
RPMT08	8	0.30	0.22	0.18	0.15	-	-	-	-
RPMT10	10	0.40	0.28	0.25	0.20	0.12	-	-	-
RPMT12	12	0.60	0.45	0.35	0.30	0.25	0.20	-	-
RPMT16	16	0.65	0.45	0.40	0.32	0.30	0.28	0.23	-
RPMT20	20	0.70	0.50	0.42	0.35	0.32	0.29	0.25	0.22


Cutting performance

P Carbon steel (SM490A Heat treatment, HRC 38~40)

- **Cutting conditions** vc (m/min) = 250
 fz (mm/tooth) = 0.6
 a_p (mm) = 1
wet

- **Tools** **Insert** RPMT1204M0E-MF(PC5300)
 Holder FMRS4032HRP-3L25

- **Result**




P Alloy steel (KP4M Heat treatment, HRC 30~45)

- **Cutting conditions** vc (m/min) = 178
 fz (mm/tooth) = 0.72
 a_p (mm) = 1.5
dry

- **Tools** **Insert** RPMT1606M0S-MM(PC5300)
 Holder FMRCM5063HRP-4

- **Result**





P Alloy steel (KP1, HRC 28~33)

- **Cutting conditions** vc (m/min) = 178
 fz (mm/tooth) = 0.74
 a_p (mm) = 0.8
dry

- **Tools** **Insert** RPMT1204M0E-MF(PC5300)
 Holder FMRCM4063HRP-6

- **Result**

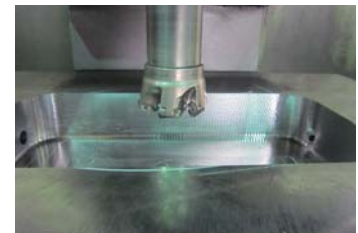


P Alloy steel (STD61, HRC 50~52)


- **Cutting conditions** vc (m/min) = 50
 fz (mm/tooth) = 0.15
 a_p (mm) = 4.0
dry

- **Tools** **Insert** RPMW1204M0S1(PC5300)
 Holder FMRS4032HRP-3L25

- **Result**




▶ Maximum angle table for Ramping machining

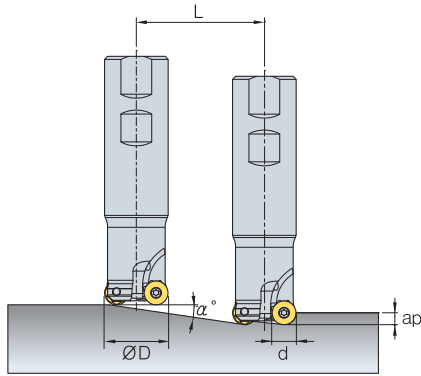

$$L = \frac{ap}{\tan \alpha^\circ} \text{ (mm)}$$

※ L(mm) : Cutting length
 α° : Max. ramping angle
 ap : Depth of cut




(mm)

Section	Insert size(d)	Tool Dia. (ØD)	Ramping angle α°(max)	Cutting length L(mm) by ap									
				ap=1	ap=2	ap=2.5	ap=3	ap=3.5	ap=4	ap=5	ap=6	ap=8	ap=10
FMR2500	8	17	4.7	12	24	30	36	42	48	-	-	-	-
	8	18	4.1	14	28	34	41	48	55	-	-	-	-
	8	20	15.4	4	7	9	11	13	14	-	-	-	-
	8	21	13.9	4	8	10	12	14	16	-	-	-	-
	8	25	9.8	6	12	14	17	20	23	-	-	-	-
	8	26	9.2	6	12	16	19	22	25	-	-	-	-
FMR3000	10	25	13.8	4	8	10	12	14	16	20	-	-	-
	10	26	12.6	4	9	11	13	16	18	22	-	-	-
	10	32	8.4	7	14	17	20	24	27	34	-	-	-
	10	33	8.0	7	14	18	21	25	29	36	-	-	-
	10	40	5.8	10	20	25	30	34	39	49	-	-	-
	10	50	4.2	14	27	34	41	48	55	68	-	-	-
	10	63	3.1	19	37	47	56	65	75	93	-	-	-
	10	66	2.9	20	40	50	60	69	79	99	-	-	-
FMR4000	12	25	4.5	13	25	32	38	44	51	63	76	-	-
	12	26	4.1	14	28	35	42	49	56	70	84	-	-
	12	32	14.7	4	8	10	11	13	15	19	23	-	-
	12	33	13.8	4	8	10	12	14	16	20	24	-	-
	12	40	9.6	6	12	15	18	21	24	30	36	-	-
	12	50	6.7	9	17	21	26	30	34	43	51	-	-
	12	63	4.8	12	24	30	36	42	48	60	72	-	-
	12	66	4.5	13	26	32	38	45	51	64	77	-	-
	12	80	3.5	17	33	41	50	58	66	83	99	-	-
	12	100	2.6	22	44	55	65	76	87	109	131	-	-
FMR5000	16	40	17.8	3	6	8	9	11	12	16	19	25	-
	16	50	11.3	5	10	13	15	18	20	25	30	40	-
	16	63	7.6	7	15	19	22	26	30	37	45	60	-
	16	66	7.1	8	16	20	24	28	32	40	48	64	-
	16	80	5.3	11	21	27	32	37	43	53	64	85	-
	16	100	4.0	14	29	36	43	51	58	72	87	116	-
	16	125	3.0	19	38	48	58	67	77	96	115	154	-
	16	160	2.2	26	52	65	78	90	103	129	155	207	-
FMR6000	20	50	17.8	3	6	8	9	11	12	16	19	25	31
	20	63	11.1	5	10	13	15	18	20	25	30	41	51
	20	80	7.4	8	15	19	23	27	31	38	46	61	77
	20	100	5.3	11	21	27	32	37	43	53	64	85	107
	20	125	4.0	14	29	36	43	51	58	72	87	116	145
	20	160	2.9	20	40	49	59	69	79	99	119	158	198
	20	200	2.2	26	52	65	78	90	103	129	155	207	258
	20	250	1.7	33	67	84	100	117	134	167	200	267	334


* Insert size(d): Please refer page E13, applicable insert drawing.



▶ Minimum hole diameter table for Helical machining(ØDHmin)

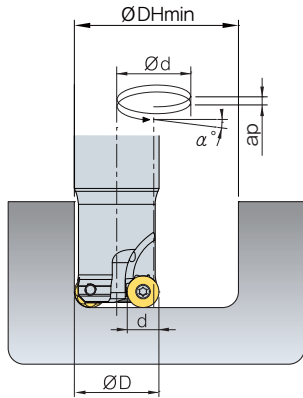

- ØD = Tool Dia. (mm)
 - Ød (Tool Path, mm) = ØDHmin, max - ØD
 - ØDHmin (Minimum hole diameter) = ØD × 2 - Insert size (d)
 - ØDHmax (Maximum hole diameter) = ØD × 2 - 2
 - Ramping angle by $ap(\alpha^\circ) = \tan^{-1} \left(\frac{ap}{\pi \times \text{Ød}} \right)$
- Helical angle adjusted by ap cannot exceed maximum angle
- ap = Depth of cut




(mm)


Section	Insert size(d)	Tool Dia. (ØD)	Ramping angle α°(max)	ØDH min	Ød	Ramping angle (α°) by ap									
						ap=1	ap=2	ap=2.5	ap=3	ap=3.5	ap=4	ap=5	ap=6	ap=8	ap=10
FMR2500	8	17	4.7	26	9	2.03	4.06	-	-	-	-	-	-	-	-
	8	18	4.1	28	10	1.83	3.65	-	-	-	-	-	-	-	-
	8	20	15.4	32	12	1.52	3.04	3.81	4.57	5.34	6.11	-	-	-	-
	8	21	13.9	34	13	1.40	2.81	3.51	4.22	4.92	5.63	-	-	-	-
	8	25	9.8	42	17	1.07	2.15	2.69	3.22	3.76	4.30	-	-	-	-
	8	26	9.2	44	18	1.01	2.03	2.54	3.04	3.55	4.06	-	-	-	-
FMR3000	10	25	13.8	40	15	1.22	2.43	3.04	3.65	4.27	4.88	-	-	-	-
	10	26	12.6	42	16	1.14	2.28	2.85	3.43	4.00	4.57	-	-	-	-
	10	32	8.4	54	22	0.83	1.66	2.07	2.49	2.91	3.32	-	-	-	-
	10	33	8.0	56	23	0.79	1.59	1.98	2.38	2.78	3.18	-	-	-	-
	10	40	5.8	70	30	0.61	1.22	1.52	1.83	2.13	2.43	-	-	-	-
	10	50	4.2	90	40	0.46	0.91	1.14	1.37	1.60	1.83	-	-	-	-
	10	63	3.1	116	53	0.34	0.69	0.86	1.03	1.21	1.38	-	-	-	-
	10	66	2.9	122	56	0.33	0.65	0.81	0.98	1.14	1.30	-	-	-	-
FMR4000	12	25	4.5	38	13	1.40	2.81	3.51	-	-	-	-	-	-	-
	12	26	4.1	40	14	1.30	2.61	3.26	-	-	-	-	-	-	-
	12	32	14.7	52	20	0.91	1.83	2.28	2.74	3.20	3.65	4.57	5.49	-	-
	12	33	13.8	54	21	0.87	1.74	2.17	2.61	3.04	3.48	4.35	5.23	-	-
	12	40	9.6	68	28	0.65	1.30	1.63	1.96	2.28	2.61	3.26	3.92	-	-
	12	50	6.7	88	38	0.48	0.96	1.20	1.44	1.68	1.92	2.40	2.88	-	-
	12	63	4.8	114	51	0.36	0.72	0.89	1.07	1.25	1.43	1.79	2.15	-	-
	12	66	4.5	120	54	0.34	0.68	0.84	1.01	1.18	1.35	1.69	2.03	-	-
	12	80	3.5	148	68	0.27	0.54	0.67	0.81	0.94	1.07	1.34	1.61	-	-
	12	100	2.6	188	88	0.21	0.41	0.52	0.62	0.73	0.83	1.04	1.24	-	-
FMR5000	16	40	17.8	64	24	0.76	1.52	1.90	2.28	2.66	3.04	3.81	4.57	6.11	-
	16	50	11.3	84	34	0.54	1.07	1.34	1.61	1.88	2.15	2.69	3.22	4.30	-
	16	63	7.6	110	47	0.39	0.78	0.97	1.16	1.36	1.55	1.94	2.33	3.11	-
	16	66	7.1	116	50	0.36	0.73	0.91	1.09	1.28	1.46	1.83	2.19	2.92	-
	16	80	5.3	144	64	0.29	0.57	0.71	0.86	1.00	1.14	1.43	1.71	2.28	-
	16	100	4.0	184	84	0.22	0.43	0.54	0.65	0.76	0.87	1.09	1.30	1.74	-
	16	125	3.0	234	109	0.17	0.33	0.42	0.50	0.59	0.67	0.84	1.00	1.34	-
	16	160	2.2	304	144	0.13	0.25	0.32	0.38	0.44	0.51	0.63	0.76	1.01	-
FMR6000	20	50	17.8	80	30	0.61	1.22	1.52	1.83	2.13	2.43	3.04	3.65	4.88	6.11
	20	63	11.1	106	43	0.42	0.85	1.06	1.27	1.49	1.70	2.12	2.55	3.40	4.25
	20	80	7.4	140	60	0.30	0.61	0.76	0.91	1.06	1.22	1.52	1.83	2.43	3.04
	20	100	5.3	180	80	0.23	0.46	0.57	0.68	0.80	0.91	1.14	1.37	1.83	2.28
	20	125	4.0	230	105	0.17	0.35	0.43	0.52	0.61	0.70	0.87	1.04	1.39	1.74
	20	160	2.9	300	140	0.13	0.26	0.33	0.39	0.46	0.52	0.65	0.78	1.04	1.30
	20	200	2.2	380	180	0.10	0.20	0.25	0.30	0.35	0.41	0.51	0.61	0.81	1.01
	20	250	1.7	480	230	0.08	0.16	0.20	0.24	0.28	0.32	0.40	0.48	0.63	0.79

* Insert size(d): Please refer page E13, applicable insert drawing.

Maximum hole diameter table for Helical machining (ØDHmax)

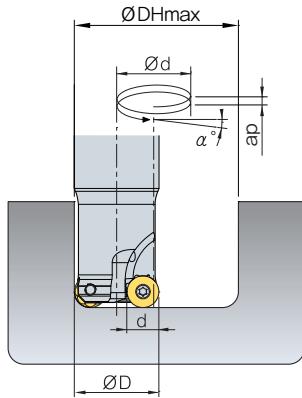

- ØD = Tool Dia. (mm)
- Ød (Tool Path, mm) = ØDHmin, max - ØD
- ØDHmin (Minimum hole diameter) = ØD × 2 - Insert size (d)
- ØDHmax (Maximum hole diameter) = ØD × 2 - 2
- Ramping angle by $\alpha^\circ = \tan^{-1} \left(\frac{ap}{\pi \times \text{Ød}} \right)$
- Helical angle adjusted by ap cannot exceed maximum angle
- ap = Depth of cut





(mm)

Section	Insert size (d)	Tool Dia. (ØD)	Ramping angle α° (max)	ØDH max	Ød	Ramping angle (α°) by ap									
						ap=1	ap=2	ap=2.5	ap=3	ap=3.5	ap=4	ap=5	ap=6	ap=8	ap=10
FMR2500	8	17	4.7	32	15	1.22	2.43	3.04	3.65	-	-	-	-	-	-
	8	18	4.1	34	16	1.14	2.28	2.85	3.43	-	-	-	-	-	-
	8	20	15.4	38	18	1.01	2.03	2.54	3.04	3.55	4.06	-	-	-	-
	8	21	13.9	40	19	0.96	1.92	2.40	2.88	3.37	3.85	-	-	-	-
	8	25	9.8	48	23	0.79	1.59	1.98	2.38	2.78	3.18	-	-	-	-
	8	26	9.2	50	24	0.76	1.52	1.90	2.28	2.66	3.04	-	-	-	-
FMR3000	10	25	13.8	48	23	0.79	1.59	1.98	2.38	2.78	3.18	-	-	-	-
	10	26	12.6	50	24	0.76	1.52	1.90	2.28	2.66	3.04	-	-	-	-
	10	32	8.4	62	30	0.61	1.22	1.52	1.83	2.13	2.43	-	-	-	-
	10	33	8.0	64	31	0.59	1.18	1.47	1.77	2.06	2.36	-	-	-	-
	10	40	5.8	78	38	0.48	0.96	1.20	1.44	1.68	1.92	-	-	-	-
	10	50	4.2	98	48	0.38	0.76	0.95	1.14	1.33	1.52	-	-	-	-
	10	63	3.1	124	61	0.30	0.60	0.75	0.90	1.05	1.20	-	-	-	-
	10	66	2.9	130	64	0.29	0.57	0.71	0.86	1.00	1.14	-	-	-	-
FMR4000	12	25	4.5	48	23	0.79	1.59	1.98	2.38	2.78	3.18	-	-	-	-
	12	26	4.1	50	24	0.76	1.52	1.90	2.28	2.66	3.04	-	-	-	-
	12	32	14.7	62	30	0.61	1.22	1.52	1.83	2.13	2.43	3.04	3.65	-	-
	12	33	13.8	64	31	0.59	1.18	1.47	1.77	2.06	2.36	2.95	3.54	-	-
	12	40	9.6	78	38	0.48	0.96	1.20	1.44	1.68	1.92	2.40	2.88	-	-
	12	50	6.7	98	48	0.38	0.76	0.95	1.14	1.33	1.52	1.90	2.28	-	-
	12	63	4.8	124	61	0.30	0.60	0.75	0.90	1.05	1.20	1.50	1.80	-	-
	12	66	4.5	130	64	0.29	0.57	0.71	0.86	1.00	1.14	1.43	1.71	-	-
	12	80	3.5	158	78	0.23	0.47	0.58	0.70	0.82	0.94	1.17	1.40	-	-
	12	100	2.6	198	98	0.19	0.37	0.47	0.56	0.65	0.74	0.93	1.12	-	-
FMR5000	16	40	17.8	78	38	0.48	0.96	1.20	1.44	1.68	1.92	2.40	2.88	3.85	-
	16	50	11.3	98	48	0.38	0.76	0.95	1.14	1.33	1.52	1.90	2.28	3.04	-
	16	63	7.6	124	61	0.30	0.60	0.75	0.90	1.05	1.20	1.50	1.80	2.39	-
	16	66	7.1	130	64	0.29	0.57	0.71	0.86	1.00	1.14	1.43	1.71	2.28	-
	16	80	5.3	158	78	0.23	0.47	0.58	0.70	0.82	0.94	1.17	1.40	1.87	-
	16	100	4.0	198	98	0.19	0.37	0.47	0.56	0.65	0.74	0.93	1.12	1.49	-
	16	125	3.0	248	123	0.15	0.30	0.37	0.45	0.52	0.59	0.74	0.89	1.19	-
	16	160	2.2	318	158	0.12	0.23	0.29	0.35	0.40	0.46	0.58	0.69	0.92	-
FMR6000	20	50	17.8	98	48	0.38	0.76	0.95	1.14	1.33	1.52	1.90	2.28	3.04	3.81
	20	63	11.1	124	61	0.30	0.60	0.75	0.90	1.05	1.20	1.50	1.80	2.39	2.99
	20	80	7.4	158	78	0.23	0.47	0.58	0.70	0.82	0.94	1.17	1.40	1.87	2.34
	20	100	5.3	198	98	0.19	0.37	0.47	0.56	0.65	0.74	0.93	1.12	1.49	1.86
	20	125	4.0	248	123	0.15	0.30	0.37	0.45	0.52	0.59	0.74	0.89	1.19	1.48
	20	160	2.9	318	158	0.12	0.23	0.29	0.35	0.40	0.46	0.58	0.69	0.92	1.16
	20	200	2.2	398	198	0.09	0.18	0.23	0.28	0.32	0.37	0.46	0.55	0.74	0.92
	20	250	1.7	498	248	0.07	0.15	0.18	0.22	0.26	0.29	0.37	0.44	0.59	0.74

* Insert size (d): Please refer page E13, applicable insert drawing.



FMAC(M)3000



• AR : 21°
• RR : -17°~-12°

Designation		Stock		ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap		Fig.	
FMACM	3050HR			4	50	42	22	10.4	6.3	20	40	11	17.5	4.0	0.4	1
	3050HR-H	●		6	50	42	22	10.4	6.3	20	40	11	17.5	4.0	0.4	1
	3063HR			5	63	49	22	10.4	6.3	20	40	11	17.5	4.0	0.5	1
	3063HR-H	●		8	63	49	22	10.4	6.3	20	40	11	17.5	4.0	0.6	1
FMAC (FMACM)	3080HR	● (●)		6	80	57	25.4(27)	9.5(12.4)	6(7)	25(23)	50	14	20	4.0	1.1	1
	3080HR-H	(●)		10	80	57	25.4(27)	9.5(12.4)	6(7)	25(23)	50	14	20	4.0	1.2	1
	3100HR			7	100	67	31.75(32)	12.7(14.4)	8(8)	35(25.5)	50	(18)	45(26)	4.0	1.7	2(1)
	3100HR-H			12	100	67	31.75(32)	12.7(14.4)	8(8)	35(25.5)	50	(18)	45(26)	4.0	1.7	2(1)
	3125HR			8	125	87	38.1(40)	15.9(16.4)	10(9)	42(29)	63	(22)	55(32)	4.0	3.3(3.5)	2(1)
	3125HR-H			14	125	87	38.1(40)	15.9(16.4)	10(9)	42(29)	63	(22)	55(32)	4.0	3.3(3.5)	2(1)

() Metric Size, ● Stock item

Available Inserts



SEET-MF



SEET-MM



SEET-MA




SEXT-MF



SEXT-MM



SEXT-MR



SEEW



SEEW-W

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC8510	PC5300	PC5400	A30	G10E		H01
SEET	0903AGFN-MA													●	E15 E16
	0903AGSN-MF		●					●							
	0903AGSN-MM		●												
SEXT	0903AGSN-MF														
	0903AGSN-MM				●				●	●					
	0903AGSN-MR														
SEEW	0903AGTN														

Available Arbors




Designation	Ød	NC Arbors
FMAC(M) 3050HR-□	22	BT□□ - FMC22 - □□
3063HR-□		
3080HR-□	25.4	BT□□ - FMA25.4 - □□
	27	BT□□ - FMC27 - □□
3100HR-□	31.75	BT□□ - FMA31.75 - □□
	32	BT□□ - FMC32 - □□
3125HR-□	38.1	BT□□ - FMA38.1 - □□
	40	BT□□ - FMB / FMC40 - □□

Parts

Specification	 Screw	 Insert Wrench
Ø50~Ø125	FTKA0307	TW09S

Available Inserts E15, E16 Available Arbors and bolt E318-E320

FMAC(M)4000

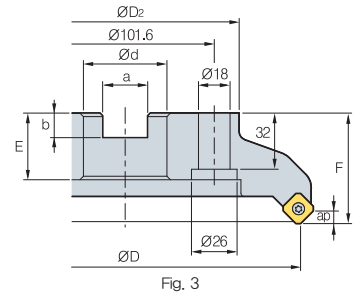

• AR : 21°
• RR : -17°~-12°

(mm)

Designation	Stock	⊗	ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap	kg	Fig.	
FMACM															
4050HR			3	50	42	22	10.4	6.3	20	40	11	18	6.5	0.4	1
4063HR			4	63	49	22	10.4	6.3	20	40	11	18	6.5	0.6	1
4063HR-M			5	63	49	22	10.4	6.3	20	40	11	18	6.5	0.6	1
4063HR-H			6	63	49	22	10.4	6.3	20	40	11	18	6.5	0.6	1
FMAC (FMACM)															
4080HR	● (●)		5	80	57	25.4(27)	9.5(12.4)	6(7)	25(23)	50	14	20	6.5	1.1	1
4080HR-M	●		6	80	57	25.4(27)	9.5(12.4)	6(7)	25(23)	50	14	20	6.5	1.1	1
4080HR-H			8	80	57	25.4(27)	9.5(12.4)	6(7)	25(23)	50	14	20	6.5	1.1	1
4100HR	● (●)		5	100	67	31.75(32)	12.7(14.4)	8(8)	33(25)	63(50)	18	26	6.5	2(1.6)	1
4100HR-M	● (●)		7	100	67	31.75(32)	12.7(14.4)	8(8)	33(25)	63(50)	18	26	6.5	2(1.6)	1
4100HR-H			10	100	67	31.75(32)	12.7(14.4)	8(8)	33(25)	63(50)	18	26	6.5	2(1.6)	1
4125HR			6	125	87	38.1(40)	15.9(16.4)	10(9)	35(29)	63	22	32	6.5	3.1	1
4125HR-M	●		8	125	87	38.1(40)	15.9(16.4)	10(9)	35(29)	63	22	32	6.5	3.1	1
4125HR-H			12	125	87	38.1(40)	15.9(16.4)	10(9)	35(29)	63	22	32	6.5	3.1	1
4160R	● (●)		7	160	107	50.8(40)	19.0(16.4)	11(9)	38(35)	63	-	-	6.5	4.8	2
4160R-M	● (●)		10	160	107	50.8(40)	19.0(16.4)	11(9)	38(35)	63	-	-	6.5	4.8	2
4160R-H			16	160	107	50.8(40)	19.0(16.4)	11(9)	38(35)	63	-	-	6.5	4.8	2
4200R	● (●)		8	200	130	47.625(60)	25.4(25.7)	14	38(32)	63	-	-	6.5	6.1	3
4200R-M	● (●)		12	200	130	47.625(60)	25.4(25.7)	14	38(32)	63	-	-	6.5	6.1	3
4200R-H			18	200	130	47.625(60)	25.4(25.7)	14	38(32)	63	-	-	6.5	6.1	3

() Metric Size, ● Stock item

Available Inserts



Designation	Cermet		Coated						Uncoated			Page			
	CN2000	CN30	NCM825	NCM835	PC3500	PC9530	PC6510	PC5300	PC5400	PC215K	PD2000		A30	G10E	H01
SEET	14M4AGFN-MA														
	14M4AGSN-MF		●	●	●	●	●	●	●	●					
	14M4AGSN-MM		●	●	●	●	●	●	●	●					
SEXT	14M4AGSN-MF		●	●	●	●	●	●	●	●					
	14M4AGSN-MM		●	●	●	●	●	●	●	●					E15
	14M4AGSN-MR		●	●	●	●	●	●	●	●					E16
SEEW	14M4AGTN	●													
	14M4AGFN-W														
	14M4AGSN-W														
	14M4AGTN-W														

Available Arbors

Designation	Ød	NC Arbors
FMAC(M) 4050HR-□	22	BT□□-FMC22-□□
4063HR-□		
4080HR-□	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
4100HR-□	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
4125HR-□	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMB40-□□
4160R-□	50.8	BT□□-FMA50.8-□□
	40	BT□□-FMB/FMC40-□□
4200R-□	47.625	BT□□-FMA47.625-□□
	60	BT□□-FMB60-□□

Parts



Specification					
Ø50~Ø200	FTGA03512	SS42SAF	SHXN0509F	TW15S	HW35L

Available Inserts E15, E16 Available Arbors and bolt E318-E320



FMAC(M)3000-A

(Aluminum Body)

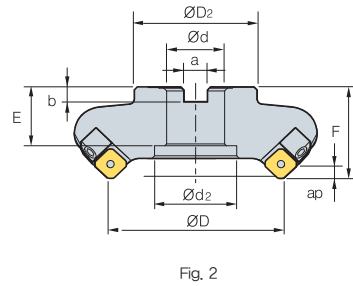

AA
45°

- AR : 21°
- RR : -16°~-12°

(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap		Fig.
FMACM 3063R-A		3	63	49	22	10.4	6.3	20	40	11	18	4	0.5	1
FMAC 3080R-A	●	4	80	57	25.4(27)	9.5(12.4)	6(7)	25	50	13.5	20	4	0.6	1
(FMACM) 3100R-A		5	100	67	31.75(32)	12.7(14.4)	8(8)	32	50	-	45	4	0.8	2
3100R-25.4-A		5	100	67	25.4	9.5	6	25	50	-	38	4	0.9	2
3125R-A	●	6	125	87	38.1(40)	15.9(16.4)	10(9)	38	63	-	56	4	1.6	2
3125R-25.4-A	●	6	125	70	25.4	9.5	6	25	63	-	38	4	1.7	2

() Metric Size, ● Stock item

▶ Available Inserts



SEET-MF



SEET-MM



SEET-MA




SEXT-MF



SEXT-MM



SEXT-MR



SEEW

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
SEET 0903AGFN-MA														●	E15 E16
0903AGSN-MF			●					●							
0903AGSN-MM			●							●					
SEXT 0903AGSN-MF										●					
0903AGSN-MM					●				●	●					
0903AGSN-MR								●	●	●					
SEEW 0903AGTN															

▶ Available Arbors

Designation	Ød	NC Arbors
FMAC(M) 3063R-□	22	BT□□-FMC22-□□
3080R-□	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
3100R-□	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
3125R-□	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMB40-□□






▶ Parts

Specification					
Ø63~Ø125	FTKA0307	TW09S	HW30L	LFMA3R-A	DHA620

▶ Available Inserts E15, E16 ▶ Available Arbors and bolt E318-E320

FMAC(M)4000-A

(Aluminum body)



AA
45°

- AR : 21°
- RR : -16°~-12°

(mm)

Designation	Stock	⊗	ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap	kg	Fig.
FMACM 4063R-A			63	49	22	10.4	6.3	20	50	11	18	6.5	0.6	1
FMAC 4080R-A	● (●)		80	67	25.4(27)	9.5(12.4)	6(7)	25(22)	50	13.5	20	6.5	0.8	1
(FMACM) 4100R-A	● (●)		100	67	31.75(32)	12.7(14.4)	8(8)	32	50	-	45	6.5	1.1	2
4100R-25.4-A	●		100	67	25.4	9.5	6	25	50	-	38	6.5	1.2	2
4125R-A	●		125	87	38.1(40)	15.9(16.4)	10(9)	38(35)	63	-	56	6.5	1.7	2
4125R-25.4-A	●		125	70	25.4	9.5	6	25	63	-	38	6.5	1.8	2
4160R-A	●		160	107	50.8(40)	19.0(16.4)	11(9)	38(35)	63	-	75	6.5	2.5	2
4200R-A	● (●)		200	130	47.625(60)	25.4(25.7)	14(14)	38(32)	63	-	-	6.5	3.2	3
4250R-A			250	180	47.625(60)	25.4(25.7)	14(14)	38	63	-	-	6.5	4.1	3
4315R-A			315	240	47.625(60)	25.4(25.7)	14(14)	38	63	-	-	6.5	6.7	4

Note) Through coolant type between Ø50~Ø125

() Metric Size, ● Stock item

Available Inserts



Designation	Cermet		Coated						Uncoated			Page		
	CN2000	CN30	NCM825	NCM835	PC3500	PC9530	PC6810	PC5300	PC5400	PC215K	PD2000		A30	G10E
SEET 14M4AGFN-MA														
14M4AGSN-MF			●	●	●	●	●	●	●					
14M4AGSN-MM			●	●	●	●	●	●	●					
SEXT 14M4AGSN-MF			●	●	●	●	●	●	●					
14M4AGSN-MM			●	●	●	●	●	●	●					E15
14M4AGSN-MR			●	●	●	●	●	●	●					E16
SEEW 14M4AGTN		●												
14M4AGFN-W														
14M4AGSN-W														
14M4AGTN-W														

Available Arbors

Designation	Ød	NC Arbors
FMAC(M) 4063R-□	22	BT□□-FMC22-□□
4080R-□	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
4100HR-□	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
4125R-□	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMB40-□□
4160R-□	50.8	BT□□-FMA50.8-□□
4200R-□	40	BT□□-FMB / FMC40-□□
	47.625	BT□□-FMA47.625-□□
4250R-□	60	BT□□-FMB60-□□
4315R-□	60	BT□□-FMB60-□□


Parts

Specification					
Ø63~Ø315	FTGA03510	TW15S	HW40L	LFMA4R-A	DHA0830

Available Inserts E15, E16



FMAS3000

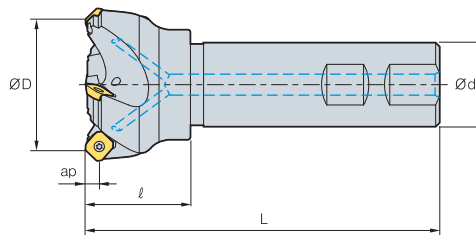

• AR : 23°
• RR : -17°~-13°

Designation		Stock		ØD	Ød	ℓ	L	ap	
FMAS	3025HR		2	25	25	35	115	4	0.4
	3032HR		3	32	25	40	125	4	0.5
	3032HR-S32		3	32	32	40	130	4	0.8
	3040HR	●	3	40	32	40	130	4	0.9
	3040HR-S40		3	40	40	40	140	4	1.3
	3040HR-S42		3	40	42	40	140	4	1.4
	3050HR		4	50	32	40	135	4	1
	3050HR-S40		4	50	40	40	140	4	1.3
	3050HR-S42		4	50	42	40	140	4	1.5
	3063HR	●	5	63	32	45	135	4	1.2
	3063HR-S40		5	63	40	45	145	4	1.6
	3063HR-S42		5	63	42	45	145	4	1.7

(mm)

● Stock item

Available Inserts




SEET-MF



SEET-MM




SEET-MA




SEXT-MF




SEXT-MM



SEXT-MR



SEEW



SEEW-W


Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
SEET	0903AGFN-MA													●	E15 E16
	0903AGSN-MF		●					●		●					
	0903AGSN-MM		●							●					
SEXT	0903AGSN-MF									●	●				
	0903AGSN-MM				●				●	●	●				
	0903AGSN-MR								●	●	●				
SEEW	0903AGTN														

Parts

Specification		
Ø25~Ø63	Screw FTKA0307	Insert Wrench TW09S

Available Inserts E15, E16

FMAS4000

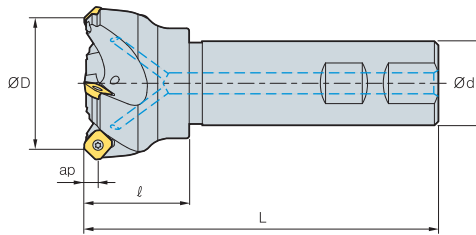

- AR : 23°
- RR : -17°~-13°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap	
FMAS 4050HR		3	50	32	45	135	6.5	1
4050HR-S40		3	50	40	45	135	6.5	1.3
4050HR-S42		3	50	42	45	135	6.5	1.45
4063HR		4	63	32	45	135	6.5	1.2
4063HR-S40		4	63	40	45	135	6.5	1.5
4063HR-S42		4	63	42	45	135	6.5	1.6

● Stock item

Available Inserts



SEET-MF



SEET-MM




SEET-MA




SEXT-MF



SEXT-MM



SEXT-MR



SEEW



SEEW-W

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC9530	PC6510	PC5300	PC5400	PC215K	PD2000	A30	G10E		H01
SEET 14M4AGFN-MA											●			●	E15 E16
14M4AGSN-MF			●	●		●	●	●							
14M4AGSN-MM			●	●	●	●		●							
SEXT 14M4AGSN-MF			●		●			●	●	●					
14M4AGSN-MM			●	●	●	●	●	●	●						
14M4AGSN-MR			●		●	●		●							
SEEW 14M4AGTN		●													
14M4AGFN-W															
14M4AGSN-W															
14M4AGTN-W															



Parts

Specification					
Ø50~Ø63	FTGA03512	SS42SAF	SHXN0509F	TW15S	HW35L

Available Inserts E15, E16



FMPC(M)3000




• AR : 10°
• RR : -9°~-8°

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap	kg	Fig.
FMPCM 3050HS		5	50	40	22	10.4	6.3	20	40	11	18	7	0.3	1
3063HS		6	63	40	22	10.4	6.3	20	40	11	18	7	0.5	1
FMPC 3080HS	● (●)	7	80	55	25.4(27)	9.5(12.4)	6(7)	25(22)	50	14	20	7	1.0	1
(FMPCM) 3100HS	(●)	8	100	67	31.75(32)	12.7(14.4)	8(8)	36(26)	50	18	45(26)	7	1.5	2(1)

() Metric Size, ● Stock item


Available Inserts




SDET-MF



SDET-MM




SDET-MA



SDXT-MF



SDXT-MM



SDXT-MA

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3545	PD2000	PC9530	PC6510	PC5300	PC5400	A30		G10E
SDET 09M402R-MA							●							●
09M405R-MF														
09M405R-MM														
SDXT 09M405R-MF			●	●				●	●	●	●			
09M405L-MF														
09M405R-MM			●	●	●	●		●	●	●	●			
09M405L-MM														
09M405R-MA														●

E14


Available Arbors

Designation	Ød	NC Arbors
FMPC(M) 3050HS	22	BT□□-FMC22-□□
3063HS		
3080HS	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
3100HS	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□

Parts

Specification		
Ø50~Ø100	FTGA03508	TW15S



■ Assembling



Available Inserts E14

Available Arbors and bolt E318-E320

FMPC(M)4000




AA 90°
 • AR : 10°
 • RR : -9°~-8°

(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap		Fig.
FMPCM 4063HS		5	63	49	22	10.4	6.3	20(20)	50(50)	11	18	11	0.4	1
FMPC 4080HS	● (●)	6	80	57	25.4(27)	9.5(12.4)	6(7)	25(23)	50(50)	14	20	11	0.9	1
(FMPCM) 4100HS	(●)	7	100	67	31.75(32)	12.7(14.4)	8(8)	33(25)	63(50)	18	26	11	1.9(1.5)	1
4125HS	● (●)	8	125	87	38.1(40)	15.9(16.4)	10(9)	35(29)	63	22	32	11	3.1	1

() Metric Size, ● Stock item


Available Inserts




SDET-MF



SDET-MM



SDET-MA



SDXT-MF



SDXT-MM



SDXT-MA

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
SDET 130504R-MA														●	E14
130508R-MF															
130508R-MM															
SDXT 130508R-MF			●	●				●	●	●	●				
130508R-MM			●	●	●		●	●	●	●	●				
130538-MM															
130508R-MA														●	


Available Arbors

Designation	Ød	NC Arbors
FMPC(M) 4063HS	22	BT□□-FMC22-□□
4080HS	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
4100HS	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
4125HS	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMB / FMC40-□□

Parts

Specification		
Ø63~Ø125	FTNC04511	TW20S

■ Assembling






Available Inserts E14

Available Arbors and bolt E318-E320



FMPC(M)3000-A

(Aluminum Body)




• AR : 10°
• RR : -9°~-7.3°

(mm)

Designation	Stock		ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap		Fig.
FMPCM 3063S-A	● (●)	3	63	40	22	10.4	6.3	20	40	11.0	18	7	0.2	1
FMPC 3080S-A	● (●)	4	80	55	25.4(27)	9.5(12.4)	6(7)	25(22)	50	13.5	20	7	0.4	1
(FMPCM) 3100S-A	●	5	100	67	31.75(32)	12.7(14.4)	8(8)	32	50	-	45	7	0.6	2
3100S-25.4-A	●	5	100	67	25.4	9.5	6	25	50	-	38	7	0.7	2

() Metric Size, ● Stock item


▶ Available Inserts




SDET-MF



SDET-MM



SDET-MA



SDXT-MF



SDXT-MM



SDXT-MA

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3545	PD2000	PC9530	PC6510	PC5300	PC5400	A30		G10E
SDET 09M402R-MA							●							●
09M405R-MF														
09M405R-MM														
SDXT 09M405R-MF			●	●				●	●	●	●			
09M405L-MF														
09M405R-MM			●	●	●	●		●	●	●	●			
09M405L-MM														
09M405R-MA														●

E14

▶ Available Arbors

Designation	Ød	NC Arbors
FMPC(M) 3063S-□	22	BT□□-FMC22-□□
3080S-□	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
3100S-□	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
3125S-□	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMB / FMC40-□□

▶ Parts






Specification							
Ø63	FTGA03508	TW15S	HW30L	LFMP3R-A	DHA0624	CFMP3R14R1-A	PXMA0306
Ø80~Ø100	FTGA03508	TW15S	HW30L	LFMP3R-A	DHA0624	CFMP3R-A	PXMA0306

Available Inserts E14

Available Arbors and bolt E318-E320

FMPC(M)4000-A

(Aluminum Body)

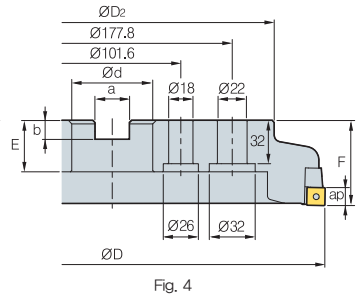


• AR : 10°
• RR : -9°~-7.3°

(mm)

Designation	Stock	ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap	kg	Fig.
FMPCM 4063S-A	●	63	49	22	10.4	6.3	20	50	11	18	11	0.6	1
FMPCM 4080S-A	● (●)	80	67	25.4(27)	9.5(12.4)	6(7)	25(22)	50	13.5	20	11	0.8	1
FMPCM 4100S-A	● (●)	100	67	31.75(32)	12.7(14.4)	8(8)	32	50	-	45	11	1.1	2
4100S-25.4-A	●	100	67	25.4	9.5	6	25	50	-	38	11	1.2	2
4125S-A	● (●)	125	87	38.1(40)	15.9(16.4)	10(9)	38(35)	63	-	56	11	1.7	2
4125S-25.4-A	●	125	70	25.4	9.5	6	25	63	-	38	11	1.8	2
4160S-A		160	107	50.8(40)	19.0(16.4)	11(9)	38(35)	63	-	75	11	2.5	2
4200S-A		200	130	47.625(60)	25.4(25.7)	14(14)	38(32)	63	-	-	11	3.2	3
4250S-A		250	180	47.625(60)	25.4(25.7)	14(14)	38	63	-	-	11	4.1	3
4315S-A		315	240	47.625(60)	25.4(25.7)	14(14)	38	63	-	-	11	6.7	4

() Metric Size, ● Stock item


Available Inserts




SDET-MF



SDET-MM



SDET-MA



SDXT-MF



SDXT-MM



SDXT-MA

Designation	Cermet		Coated						Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6610	PC5300	PC5400		A30	G10E
SDET 130504R-MA														●
130508R-MF														
130508R-MM														
SDXT 130508R-MF			●	●			●	●	●	●				E14
130508R-MM			●	●	●	●	●	●	●	●				
130538-MM														
130508R-MA														●

Available Arbors

Designation	Ød	NC Arbors
FMPC(M) 4063S-□	22	BT□□-FMC22-□□
4080S-□	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
4100S-□	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
4125S-□	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMB40-□□
4160S-□	50.8	BT□□-FMA50.8-□□
	40	BT□□-FMB/FMC40-□□
4200S-□	47.625	BT□□-FMA47.625-□□
4250S-□	60	BT□□-FMB60-□□
4315S-□	60	BT□□-FMB60-□□

Parts


Specification	Screw	Insert Wrench	Locator Wrench	Locator	Locator Screw	Chip cover	Chip cover Screw
Ø63~Ø80	FTNC04509	TW20S	HW40L	LFMP4R1-A	DHA0825	CFMP3R14R1-A	PXMA0306
Ø100~Ø315	FTNC04509	TW20S	HW40L	LFMP4R-A	DHA0830	CFMP4R-A	PXMA0306

Available Inserts E14

Available Arbors and bolt E318-E320




FMPS3000

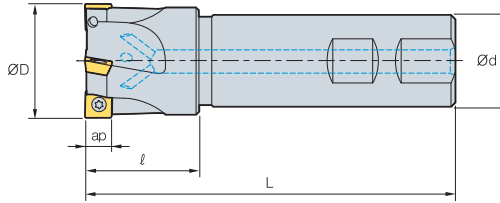

Designation	Stock		ØD	Ød	l	L	ap	
FMAS								(mm)
3025HS	●	2	25	25	35	115	7	0.4
3032HS	●	3	32	25	40	125	7	0.5
3040HS	●	4	40	32	40	130	7	0.8
3040HS-S40		4	40	40	45	140	7	1.2
3040HS-S42		4	40	42	45	140	7	1.3
3050HS	●	5	50	32	40	135	7	1
3050HS-S40		5	50	40	40	140	7	1.3
3050HS-S42		5	50	42	40	140	7	1.4
3063HS	●	6	63	32	45	135	7	1.2
3063HS-S40		6	63	40	45	145	7	1.6
3063HS-S42		6	63	42	45	145	7	1.7

● Stock item

▶ Available Inserts

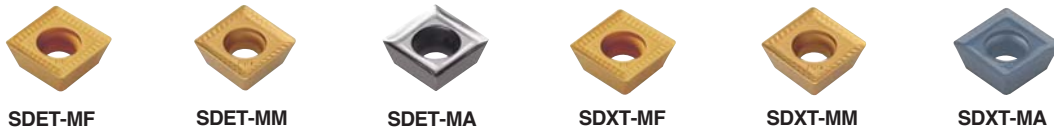


Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3545	PD2000	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SDET							●							●	E14
SDXT			●	●				●	●	●	●				
			●	●	●	●		●	●	●	●				
													●		

▶ Parts


Specification		
Ø25~Ø63	FTGA03508	TW15S

■ Assembling

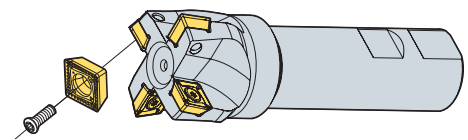

▶ Available Inserts E14

FMPS4000

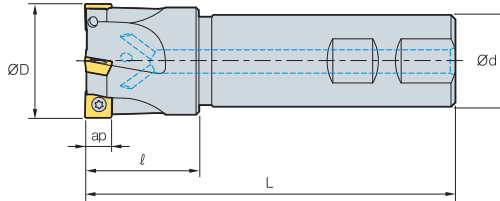

Designation		Stock		ØD	Ød	ℓ	L	ap	
FMPS	4040HS	●	3	40	32	40	130	11	1
	4040HS-S40		3	40	40	40	140	11	1.3
	4040HS-S42		3	40	42	40	140	11	1.4
	4050HS	●	4	50	32	45	135	11	1.5
	4050HS-S40		4	50	40	45	145	11	1.7
	4050HS-S42		4	50	42	45	145	11	1.6
	4063HS		5	63	32	45	135	11	2.1
	4063HS-S40		5	63	40	45	145	11	2.4
	4063HS-S42		5	63	42	45	145	11	2.6

● Stock item


Available Inserts




SDET-MF



SDET-MM




SDET-MA



SDXT-MF



SDXT-MM




SDXT-MA

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SDET														●	E14
SDXT			●	●				●	●	●	●				
			●	●	●		●	●	●	●					
														●	

Parts

Specification		
Ø40~Ø63	FTNC04511	TW20S


Assembling

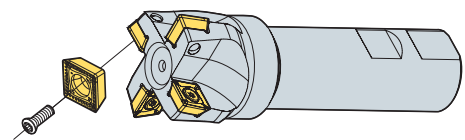

Available Inserts E14



FMRC(M)3000

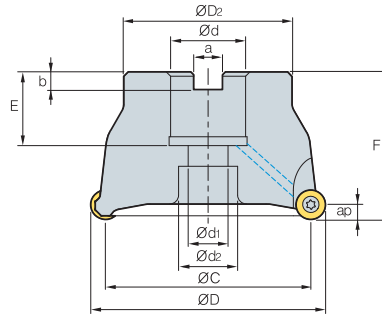

• AR : 5°
• RR : -5°

Designation		Stock		ØD	ØC	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap	
FMRCM	3040HRD		3	40	30	36	16	8.4	5.6	18	40	9	14	5.0	0.2
	3040HRD-H		4	40	30	36	16	8.4	5.6	18	40	9	14	5.0	0.2
	3050HRD		4	50	40	42	22	10.4	6.3	20	40	11	16.5	5.0	0.3
	3050HRD-H		5	50	40	42	22	10.4	6.3	20	40	11	16.5	5.0	0.3
	3063HRD	●	5	63	53	49	22	10.4	6.3	20	50	11	16.5	5.0	0.64
	3063HRD-H		6	63	53	49	22	10.4	6.3	20	50	11	16.5	5.0	0.64
FMRC (FMRCM)	3080HRD		6	80	70	57	25.4(27)	9.5(12.4)	6(7.0)	25(22)	50(50)	14	19	5.0	1.1
	3080HRD-H		7	80	70	57	25.4(27)	9.5(12.4)	6(7.0)	25(22)	50(50)	14	19	5.0	1.1
	3100HRD		7	100	90	67	31.75(32)	12.7(14.4)	8(8.0)	32(28)	63(63)	18	26	5.0	2.1
	3100HRD-H		8	100	90	67	31.75(32)	12.7(14.4)	8(8.0)	32(28)	63(63)	18	26	5.0	2.1

Note) It's general that you measure of inner diameter when the diameter of FMRC/FMRCM is Ø40~Ø63

()Metric Size, ● Stock item

▶ Available Inserts



RDKT-MF



RDKT-MM



RDCT-MA

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
RDCT 10T3M0-MA														●	E12 E13
RDKT 10T3M0-MF							●	●		●					
10T3M0-MM			●	●	●		●	●	●	●					

▶ Available Arbors


Designation	Ød	Available Adoptor
FMRC(M) 3040HRD 3040HRD-H	16	BT□□-FMC16-□□
3050HRD 3050HRD-H	22	BT□□-FMC22-□□
3063HRD 3063HRD-H		
3080HRD		
3080HRD-H	27	BT□□-FMA / FMB25.4-□□ BT□□-FMB / FMC27-□□
3100HRD	31.75	BT□□-FMA31.75-□□
3100HRD-H	32	BT□□-FMC32-□□

▶ Parts

Specification		
Ø40~Ø100	Screw FTGA03508	Wrench TW15S

▶ Available Inserts E12, E13 ▶ Available Arbors and bolt E318-E320

FMRC(M)4000

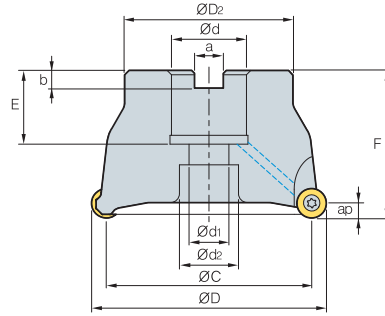

- AR : 5°
- RR : -5°

(mm)

Designation	Stock	⚙️	ØD	ØC	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap	⚖️	
FMRCM	4050HRD		4	50	38	42	22	10.4	6.3	20	50	11	18	6.0	0.4
	4063HRD		4	63	51	49	22	10.4	6.3	20	50	11	18	6.0	0.6
	4063HRD-M		5	63	51	49	22	10.4	6.3	20	50	11	18	6.0	0.6
FMRC (FMRCM)	4080HRD	●	5	80	68	57	25.4(27)	9.5(12.4)	6(7.0)	25(23)	50(50)	14	20	6.0	1.0
	4080HRD-M	●	6	80	68	57	25.4(27)	9.5(12.4)	6(7.0)	25(23)	50(50)	14	20	6.0	1.0
	4100HRD		6	100	88	67	31.75(32)	12.7(14.4)	8(8.0)	33(25)	63(50)	18	26	6.0	1.9(1.5)
	4100HRD-M		7	100	88	67	31.75(32)	12.7(14.4)	8(8.0)	33(25)	63(50)	18	26	6.0	1.9(1.5)
	4125HRD		7	125	113	87	38.1(40)	15.9(16.4)	10(9.0)	35(29)	63(63)	22	32	6.0	3.0
4125HRD-M		8	125	113	87	38.1(40)	15.9(16.4)	10(9.0)	35(29)	63(63)	22	32	6.0	3.0	

Note) It's general that you measure of inner diameter when the diameter of FMRC/FMRCM is Ø40~Ø63

() Metric Size, ● Stock item

▶ Available Inserts



RDKT-MF



RDKT-MM



RDCT-MA

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
RDCT 1204M0-MA														●	E12 E13
RDKT 1204M0-MF					●		●	●		●					
1204M0-MM			●	●	●		●	●		●					

▶ Available Arbors

Designation	Ød	NC Arbors
FMRC(M) 4063HRD	22	BT□□-FMC22-□□
4063HRD-M		
4080HRD		
4080HRD	25.4	BT□□-FMA / FMB25.4-□□
4080HRD-M		
4080HRD-M	27	BT□□-FMB / FMC27-□□
4100HRD	31.75	BT□□-FMA31.75-□□
4100HRD-M	32	BT□□-FMC32-□□
4125HRD	38.1	BT□□-FMA / FMB38.1-□□
4125HRD-M	40	BT□□-FMB / FMC40-□□


▶ Parts

Specification	Screw	Wrench
Ø50~Ø125	FTKA0410	TW15S

▶ Available Inserts E12, E13 ▶ Available Arbors and bolt E318-E320



FMRC(M)5000



- AR : 5°
- RR : -5°

(mm)

Designation	Stock		ØD	ØC	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap		
FMRCM	5050HRD		3	50	34	42	22	10.4	6.3	20	50	11	16.5	8.0	0.4
	5063HRD		4	63	47	49	22	10.4	6.3	20	50	11	18	8.0	0.6
	5063HRD-H		5	63	47	49	22	10.4	6.3	20	50	11	18	8.0	0.6
FMRC (FMRCM)	5080HRD	● (●)	5	80	64	57	25.4(27)	9.5(12.4)	6(7.0)	25(23)	50(50)	14	20	8.0	0.9
	5080HRD-H		6	80	64	57	25.4(27)	9.5(12.4)	6(7.0)	25(23)	50(50)	14	20	8.0	0.9
	5100HRD	● (●)	6	100	84	67	31.75(32)	12.7(14.4)	8(8)	33(25)	63(50)	18	26	8.0	1.9(1.4)
	5100HRD-H		7	100	84	67	31.75(32)	12.7(14.4)	8(8)	33(25)	63(50)	18	26	8.0	1.9(1.4)
	5125HRD	(●)	7	125	109	87	38.1(40)	15.9(16.4)	10(9)	35(29)	63(63)	22	32	8.0	3
5125HRD-H		8	125	109	87	38.1(40)	15.9(16.4)	10(9)	35(29)	63(63)	22	32	8.0	3	

Note) It's general that you measure of inner diameter when the diameter of FMRC/FMRCM is Ø40-Ø63 - Ø160 is not inner coolant

() Metric Size, ● Stock item

▶ Available Inserts



RDHW-E,F,S



RDKT-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
RDHW	1605M0E														E12
	1605M0F														
	1605M0S														
RDKT	1605M0-MM				●			●							E13
	1605M0-ML														
	1605M0-MF														

▶ Available Arbors

Designation	Ød	NC Arbors
FMRC(M)		
5050HRD		
5063HRD	22	BT□□-FMC22-□□
5063HRD-H		
5080HRD	25.4	BT□□-FMA / FMB25.4-□□
5080HRD-H	27	BT□□-FMB / FMC27-□□
5100HRD	31.75	BT□□-FMA31.75-□□
5100HRD-H	32	BT□□-FMC32-□□
5125HRD	38.1	BT□□-FMA / FMB38.1-□□
5125HRD-H	40	BT□□-FMB / FMC40-□□

▶ Parts

Specification	Screw	Wrench
Ø50~Ø125	FTGA0513-P	TW20-100

▶ Available Inserts E12, E13 ▶ Available Arbors and bolt E318-E320

FMRC(M)6000




Fig. 1




Fig. 2




Fig. 3



- AR : 5°
- RR : -5°

(mm)

Designation	Stock		ØD	ØC	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap		Fig.	
FMRCM 6063HRD			3	63	43	49	22	10.4	6.3	20	50	11	17	10.0	0.5	1
6063HRD-M			4	63	43	49	22	10.4	6.3	20	50	11	17	10.0	0.5	1
FMRC (FMRCM) 6080HRD	(●)		4	80	60	57	25.4(27)	9.5(12.4)	6(7.0)	25(22)	50	14	20	10.0	0.8	1
6080HRD-M			5	80	60	57	25.4(27)	9.5(12.4)	6(7.0)	25(22)	50	14	20	10.0	0.8	1
6100HRD	● (●)		5	100	80	67	31.75(32)	12.7(14.4)	8(8)	32(28)	63	18	26	10.0	1.6	1
6100HRD-M			6	100	80	67	31.75(32)	12.7(14.4)	8(8)	32(28)	63	18	26	10.0	1.6	1
6125HRD	●		6	125	105	87	38.1(40)	15.9(16.4)	10(9)	41(29)	63	- (22)	55(32)	10.0	2.7(2.9)	2(1)
6125HRD-M			7	125	105	87	38.1(40)	15.9(16.4)	10(9)	41(29)	63	- (22)	55(32)	10.0	2.7(2.9)	2(1)
6160RD	(●)		7	160	140	107	50.8(40)	19(16.4)	11(9)	38(35)	63	-	78	10.0	4.4	3
6160RD-M			8	160	140	107	50.8(40)	19(16.4)	11(9)	38(35)	63	-	78	10.0	4.4	3

Note) It's general that you measure of inner diameter when the diameter of FMRC/FMRCM is Ø40~Ø63 - Ø160 is not inner coolant

() Metric Size, ● Stock item

Available Inserts



RDHW-E,F,S



RDKT-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
RDHW 2006M0E															E12
2006M0F															
2006M0S															
RDKT 2006M0-MM					●		●								

Available Arbors

Designation	Ød	NC Arbors
FMRC(M) 6063HRD	22	BT□□-FMC22-□□
6063HRD-M		
6080HRD	25.4	BT□□-FMA / FMB25.4-□□
6080HRD-M	27	BT□□-FMB / FMC27-□□
6100HRD	31.75	BT□□-FMA31.75-□□
6100HRD-M	32	BT□□-FMC32-□□
6125HRD	38.1	BT□□-FMA / FMB38.1-□□
6125HRD-M	40	BT□□-FMB / FMC40-□□
6160RD	50.8	BT□□-FMA50.8-□□
6160RD-M	40	BT□□-FMB / FMC40-□□

Parts

Specification		
Ø63~Ø160	FTGA0515-P	TW20-100

Available Inserts E12, E13 Available Arbors and bolt E318-E320



FMRS1000 / 1500

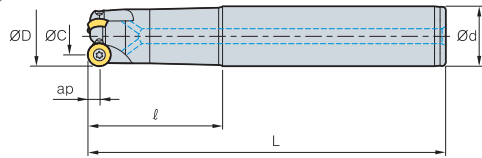


Fig. 1

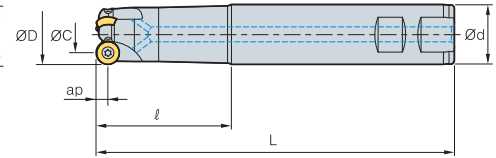


Fig. 2



- AR : 5°
- RR : -5°~-1°

(mm)											
Designation	Stock		ØD	ØC	Ød	l	L	ap		Fig.	
FMRS	1008HRD-M		1	8	5.5	10	30	80	2.5	0.2	1
	1008HRD-L		1	8	5.5	10	50	100	2.5	0.2	1
	1010HRD-M		2	10	5	12	44	100	2.5	0.2	1
	1010HRD-L		2	10	5	12	64	120	2.5	0.2	1
	1012HRD-M	●	2	12	7	12	44	100	2.5	0.3	1
	1012HRD-L		2	12	7	16	80	160	2.5	0.3	1
	1015HRD-M		3	15	10	16	80	160	2.5	0.3	1
FMRS	1015HRD-L		3	15	10	16	100	200	2.5	0.4	1
	1510HRD-M		1	10	6	12	44	100	3.0	0.2	1
	1510HRD-L		1	10	6	12	64	120	3.0	0.2	1
	1512HRD-M		2	12	6	12	54	110	3.0	0.3	1
	1512HRD-L	●	2	12	6	16	80	160	3.0	0.3	1
	1516HRD-M		3	16	10	16	60	130	3.0	0.3	1
	1516HRD-L		3	16	10	20	90	180	3.0	0.4	1
1520HRD-M		3	20	14	20	80	150	3.0	0.4	1	
1520HRD-L		3	20	14	20	90	200	3.0	0.5	1	

● Stock item

▶ Available Inserts



RDHW-E,F,S



RDKW

Type	Designation	Cermet		Coated								Uncoated			Page
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	
1000 type	RDHW	0501M0E							●						E12 E13
		0501M0F													
		0501M0S													
1500 type	RDKW	0501M0E				●									
	RDHW	06T1M0E							●						
		06T1M0F													
		06T1M0S													
	RDKW	06T1M0E				●									

▶ Parts

Specification	 Screw	 Wrench
Ø8~Ø15	FTNA0203	TW06P
Ø10~Ø20	FTNA02205	TW06P

▶ Available Inserts E12, E13

FMRS2000 / 2500

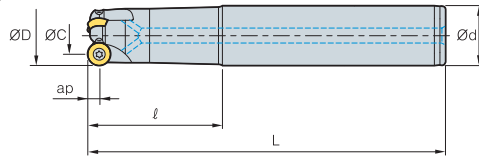


Fig. 1

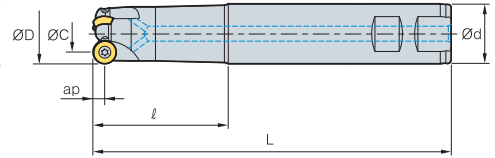


Fig. 2



- AR : 5°
- RR : -5°~ -1°

(mm)

Designation	Stock		ØD	ØC	Ød	l	L	ap	kg	Fig.
FMRS	2015HRD-S		15	8	16	55	115	3.5	0.3	2
	2015HRD-M	●	15	8	20	80	150	3.5	0.4	1
	2015HRD-L		15	8	20	90	200	3.5	0.5	1
	2020HRD-S		20	14	20	65	125	3.5	0.3	2
	2020HRD-M	●	20	14	20	80	150	3.5	0.4	1
2020HRD-L	●	20	14	25	90	200	3.5	0.5	1	
FMRS	2516HRD-S		16	8	16	65	125	4.0	0.3	2
	2516HRD-M		16	8	16	80	150	4.0	0.4	1
	2516HRD-L		16	8	20	90	200	4.0	0.5	1
	2520HRD-S		20	12	20	65	125	4.0	0.4	2
	2520HRD-M		20	12	20	80	150	4.0	0.5	1
	2520HRD-L		20	12	25	90	200	4.0	0.6	1
	2525HRD-S	●	25	17	25	55	125	4.0	0.5	2
	2525HRD-M		25	17	25	90	200	4.0	0.6	1
	2525HRD-L		25	17	32	110	250	4.0	0.7	1

● Stock item

Available Inserts



RDHW-E,F,S



RDKW

Type	Designation	Cermet		Coated							Uncoated			Page	
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
2000 type	RDHW	0702M0E							●						E12 E13
		0702M0F													
		0702M0S													
2500 type	RDKW	0702M0E				●									
	RDHW	0803M0E							●						
		0803M0F													
	0803M0S														
	RDKW	0803M0E				●									

Parts

Specification	Screw	Wrench
Ø15~Ø20	FTNA02555 FTNA0305	TW07S
Ø16~Ø25	FTNA0306 (Ø200이상)	TW09S



FMRS3000

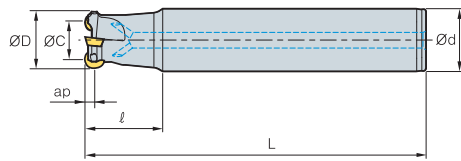


Fig. 1

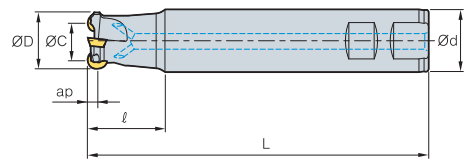


Fig. 2



- AR : 5°
- RR : -8°~ -5°

Designation		Stock		ØD	ØC	Ød	l	L	ap		Fig.
FMRS	3021HRD-M		1	21	11	20	40	150	5	0.4	1
	3021HRD-M2		2	21	11	20	40	150	5	0.4	1
	3021HRD-L		1	21	11	20	50	200	5	0.6	1
	3021HRD-L2	●	2	21	11	20	50	200	5	0.6	1
	3025HRD-S	●	2	25	15	25	35	115	5	0.5	1
	3025HRD-M	●	2	25	15	25	70	200	5	0.7	1
	3025HRD-L	●	2	25	15	25	100	250	5	1	1
	3026HRD-M	●	2	26	16	25	70	200	5	0.65	1
	3026HRD-L		2	26	16	25	100	250	5	0.7	1
	3032HRD-S	●	3	32	22	32	40	125	5	1	2
	3032HRD-M	●	3	32	22	32	70	200	5	1.3	1
	3032HRD-L		3	32	22	32	150	300	5	1.6	1
	3040HRD-S		4	40	30	32	40	125	5	1.3	2
	3040HRD-M	●	4	40	30	32	70	200	5	1.5	1
3040HRD-L		4	40	30	32	150	300	5	1.8	1	

● Stock item

Available Inserts



RDKT-MF



RDKT-MM



RDCT-MA

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
RDCT 10T3M0-MA														●	E12 E13
RDKT 10T3M0-MF							●	●		●					
RDKT 10T3M0-MM			●	●	●		●	●	●	●					

Parts

Specification		
Ø21~Ø40	Screw FTGA03508(07)	Wrench TW15S

Available Inserts E12, E13

FMRS4000

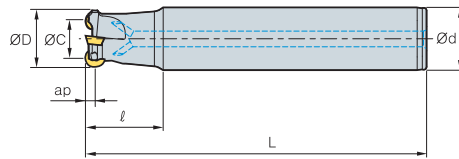


Fig. 1

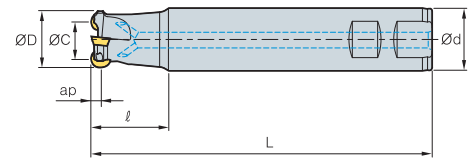


Fig. 2



- AR : 5°
- RR : -8°~ -5°

(mm)

Designation	Stock		ØD	ØC	Ød	l	L	ap		Fig.
FMRS 4032HRD-S	●	2	32	20	32	40	125	6	0.8	2
4032HRD-M	●	2	32	20	32	70	200	6	1.1	1
4032HRD-L		2	32	20	32	150	300	6	1.6	1
4033HRD-S		2	33	21	32	40	125	6	0.9	2
4033HRD-M	●	2	33	21	32	70	200	6	1.1	1
4033HRD-L		2	33	21	32	150	300	6	1.7	1
4040HRD-S		3	40	28	32	40	125	6	1	2
4040HRD-M	●	3	40	28	32	70	200	6	1.6	1
4040HRD-L	●	3	40	28	32	150	300	6	1.8	1
4040HRD-S40		3	40	28	40	40	125	6	1.3	2
4040HRD-M40		3	40	28	40	70	200	6	2	1
4040HRD-L40		3	40	28	40	150	300	6	2.4	1
4040HRD-S42		3	40	28	42	40	125	6	1.6	2
4040HRD-M42		3	40	28	42	70	200	6	2.4	1
4040HRD-L42		3	40	28	42	150	300	6	2.8	1
4050HRD-S	●	4	50	38	42	50	125	6	1.5	2
4050HRD-M	●	4	50	38	42	50	250	6	2.1	1
4050HRD-L		4	50	38	42	50	300	6	2.7	1
4050HRD-S40		4	50	38	40	50	150	6	2	2
4050HRD-M40		4	50	38	40	50	250	6	2.6	1
4050HRD-L40		4	50	38	40	50	300	6	3.2	1

● Stock item

Available Inserts



RDKT-MF



RDKT-MM



RDCT-MA

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
RDCT 1204M0-MA														●	E12
RDKT 1204M0-MF					●		●	●		●					E13
RDKT 1204M0-MM			●	●	●		●	●	●	●					

Parts

Specification		
Ø32~Ø50	Screw FTKA0410	Wrench TW15S



FMRS5000

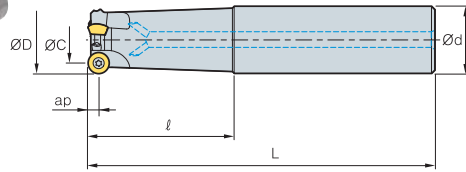


Fig. 1

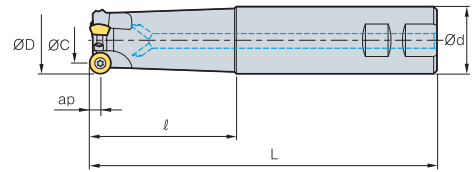


Fig. 2



- AR : 5°
- RR : -8°~ -5°

(mm)											
Designation	Stock		ØD	ØC	Ød	l	L	ap		Fig.	
FMRS											
5040HRD-S		2	40	24	32	40	125	8	1.4	2	
5040HRD-M		2	40	24	32	70	200	8	1.8	1	
5040HRD-L		2	40	24	32	150	300	8	2.0	1	
5040HRD-S40		2	40	24	40	40	125	8	1.6	2	
5040HRD-M40		2	40	24	40	70	200	8	2.0	1	
5040HRD-L40		2	40	24	40	150	300	8	2.4	1	
5040HRD-S42		2	40	24	42	40	125	8	2.0	2	
5040HRD-M42		2	40	24	42	70	200	8	2.4	1	
5040HRD-L42		2	40	24	42	150	300	8	2.8	1	
5050HRD-S40		3	50	34	40	50	150	8	2.0	2	
5050HRD-M40		3	50	34	40	50	250	8	2.4	1	
5050HRD-L40		3	50	34	40	50	300	8	2.6	1	
5050HRD-S		3	50	34	42	50	150	8	1.5	2	
5050HRD-M		3	50	34	42	50	250	8	1.8	1	
5050HRD-L		3	50	34	42	50	300	8	2.0	1	
5063HRD-S40		4	63	47	40	50	150	8	1.7	2	
5063HRD-M40		4	63	47	40	50	250	8	2.0	1	
5063HRD-L40		4	63	47	40	50	300	8	2.3	1	
5063HRD-S		4	63	47	42	50	150	8	1.6	2	
5063HRD-M		4	63	47	42	50	250	8	1.8	1	
5063HRD-L		4	63	47	42	50	300	8	2.0	1	

● Stock item

▶ Available Inserts



RDHW-E,F,S



RDKT-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
RDHW	1605M0E														E12
	1605M0F														
	1605M0S														
RDKT	1605M0-MM				●			●							E13
	1605M0-ML														
	1605M0-MF														

▶ Parts

Specification		
Ø40~Ø63	Screw FTGA0513-P	Wrench TW20-100

▶ Available Inserts E12, E13

FMRS6000

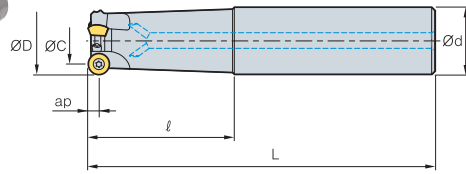


Fig. 1

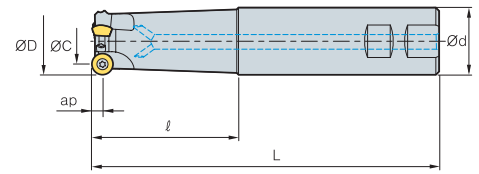


Fig. 2



- AR : 5°
- RR : -8°~ -5°

(mm)

Designation	Stock		ØD	ØC	Ød	l	L	ap		Fig.
FMRS	6050HRD-S40		50	31	40	50	150	10	1.3	2
	6050HRD-S42		50	31	42	50	150	10	1.4	2
	6050HRD-M40		50	31	40	50	250	10	2.2	1
	6050HRD-M42		50	31	42	50	250	10	2.4	1
	6050HRD-L40		50	31	40	50	300	10	2.7	1
	6050HRD-L42		50	31	42	50	300	10	3.0	1
	6063HRD-S40		63	44	40	50	150	10	1.5	2
	6063HRD-S42		63	44	42	50	150	10	1.6	2
	6063HRD-M40		63	44	40	50	250	10	2.5	1
	6063HRD-M42		63	44	42	50	250	10	2.7	1
	6063HRD-L40		63	44	40	50	300	10	3.0	1
	6063HRD-L42		63	44	42	50	300	10	3.2	1

● Stock item

Available Inserts



RDHW-E,F,S



RDKT-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
RDHW	2006M0E														E12
	2006M0F													E13	
	2006M0S														
RDKT	2006M0-MM				●		●								


Parts

Specification		
Ø50~Ø63	Screw FTGA0515-P	Wrench TW20-100

Available Inserts E12, E13



FMRM1000 / 1500 / 2000 / 2500

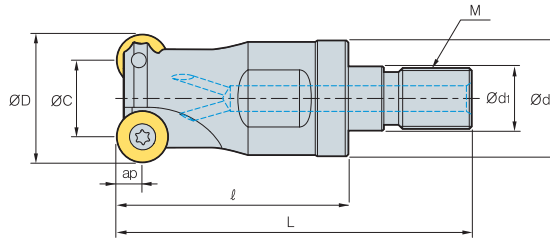

• AR : 0°~5°
• RR : -5°~-1°

Designation	Stock	⚙️	ØD	ØC	Ød	Ød1	ℓ	L	M	ap	⚖️
FMRM 1008HRD-M06		1	8	5.5	9.5	6.5	25	40	M06	2.5	0.02
1010HRD-M06		2	10	5	9.5	6.5	25	40	M06	2.5	0.02
1012HRD-M06		2	12	7	11	6.5	25	40	M06	2.5	0.02
1015HRD-M08		3	15	10	14.5	8.5	30	47	M08	2.5	0.04
1510HRD-M06		1	10	7	9.5	6.5	25	40	M06	3.0	0.02
1512HRD-M06	●	2	12	6	11	6.5	25	40	M06	3.0	0.02
1516HRD-M08		3	16	10	14.5	8.5	30	47	M08	3.0	0.02
1520HRD-M10		3	20	14	18	10.5	35	56	M10	3.0	0.07
2015HRD-M08		2	15	8	14.5	8.5	30	47	M08	3.5	0.04
2020HRD-M10		3	20	13	18	10.5	35	56	M10	3.5	0.07
2516HRD-M08		2	16	8	14.5	8.5	30	47	M08	4.0	0.04
2520HRD-M10		2	20	12	18	10.5	35	56	M10	4.0	0.07
2525HRD-M12		3	25	17	22.5	12.5	45	69	M12	4.0	0.13

(mm)

● Stock item

Available Inserts



RDHW-E,F,S



RDKW

Type	Designation	Cermet		Coated							Uncoated			Page	
		CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
1000 type	RDHW 0501M0E,F,S								●						E12 E13
	RDKW 0501M0E					●									
1500 type	RDHW 06T1M0E,F,S								●						
	RDKW 06T1M0E					●									
2000 type	RDHW 0702M0E,F,S								●						
	RDKW 0702M0E					●									
2500 type	RDHW 0803M0E,F,S								●						
	RDKW 0803M0E					●									

Available Adaptor

Designation	Available Adaptor	Designation	Available Adaptor
FMRM 008HRD-M06	MAT - M06	FMRM 1520HRD-M10	MAT - M10
1010HRD-M06		2015HRD-M08	MAT - M08
1012HRD-M06		2020HRD-M10	MAT - M10
1015HRD-M08		2516HRD-M08	MAT - M08
1510HRD-M06	MAT - M06	2520HRD-M10	MAT - M10
1512HRD-M06		2525HRD-M12	MAT - M12
1515HRD-M08	MAT - M08		

Designation : FMRM1008HRD-M06
Modular Head Threading Measure size(M06)

||


Adaptor Spec. : MAT-M06-020-S10S
Adaptor Threading Measure(M06)

Parts

Specification	Screw	Wrench	Wrench
Ø8~Ø15	FTNA0203	TW06P	-
Ø10~Ø20	FTNA02205	TW06P	-
Ø15~Ø20	FTNA02555	-	TW07S
Ø16~Ø25	FTNA0305	-	TW09S

Available Inserts E12, E13 Available Adaptor E271~E272

FMRM3000 / 4000 / 5000

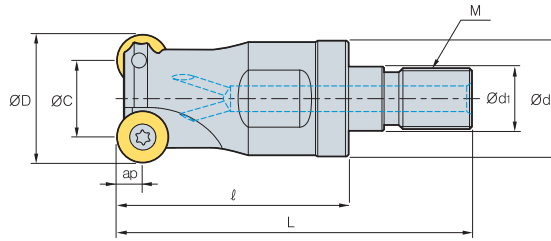

- AR : 0°~5°
- RR : -8°~-5°

(mm)

Designation	Stock		ØD	ØC	Ød	Ød ₁	ℓ	L	M	ap	
FMRM 3021HRD-M10		2	21	11	18	10.5	35	56	M10	5.0	0.1
3025HRD-M12		2	25	15	22.5	12.5	45	69	M12	5.0	0.15
3032HRD-M16		3	32	22	29	17	50	77	M16	5.0	0.2
3042HRD-M16		4	42	32	29	17	50	77	M16	5.0	0.24
4025HRD-M12		2	25	13	22.5	12.5	45	69	M12	6.0	0.12
4032HRD-M16		2	32	20	29	17	50	77	M16	6.0	0.22
4040HRD-M16		3	40	28	29	17	50	77	M16	6.0	0.23
4042HRD-M16		4	42	28	29	17	50	77	M16	6.0	0.25
5040HRD-M16		2	40	24	29	17	50	77	M16	8.0	0.25

● Stock item

▶ Available Inserts



RDHW-E,F,S



RDCT-MA



RDKT-MF



RDKT-MM

Type	Designation	Cermet		Coated							Uncoated			Page			
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC3510	PC3300	PC3400	A30		G10E	H01	
3000 type	RDCT 10T3M0-MA																
	RDKT 10T3M0-MF							●	●		●						
	10T3M0-MM			●	●	●		●	●	●	●						
4000 type	RDCT 1204M0-MA																●
	RDKT 1204M0-MF							●	●	●	●						
	1204M0-MM			●	●	●		●	●	●	●						
5000 type	RDHW 1605M0E,F,S																
	RDKT 1605M0-MM							●	●								
	1605M0-ML																

▶ Available Adaptor

Designation	Available Adaptor	Designation	Available Adaptor
FMRM 3021HRD-M10	MAT - M10	FMRM 4025HRD-M12	MAT - M12
3025HRD-M12	MAT - M12	4032HRD-M16	MAT - M16
3032HRD-M16	MAT - M16	4040HRD-M16	
3042HRD-M16		4042HRD-M16	
		5040HRD-M16	

Designation : FMRM1008HRD-M06
Modular Head Threading Measure size(M06)

II

Adaptor Spec. : MAT-M06-020-S10S
Adaptor Threading Measure(M06)


▶ Parts

Specification	 Screw	 Wrench
Ø21~Ø42	FTGA03508(07)	TW15S
Ø25~Ø42	FTKA0410	TW15S
Ø40	FTGA0513-P	TW20-100

▶ Available Inserts E12, E13 ▶ Available Adaptor E318-E320



FMRCM3000 *New*

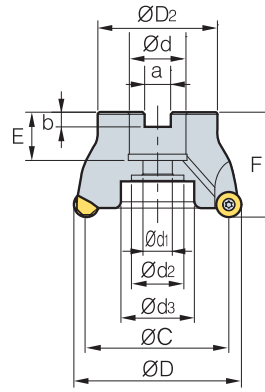

- AR : 5°
- RR : -4° ~ 0°

Designation		Stock		ØD	ØD ₂	Ød	Ød ₁	Ød ₂	d ₃	a	b	E	F	ap		Insert size	
FMRCM	3040HRP-5	●		5	40	38	16	9	14	-	8.4	5.6	19	40	5	0.22	10
	3050HRP-6	●		6	50	45	22	11	18	-	10.4	6.3	20	40	5	0.35	10
	3052HRP-6			6	52	45	22	11	18	-	10.4	6.3	20	40	5	0.37	10
	3063HRP-6	●		6	63	50	22	11	18	-	10.4	6.3	20	40	5	0.55	10
	3063HRP-7	●		7	63	50	22	11	18	-	10.4	6.3	20	40	5	0.56	10
	3066HRP-7			7	66	50	22	11	18	-	10.4	6.3	20	40	5	0.60	10

● Stock item

▶ Available Inserts



Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM825	NCM835	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
RPCT 10T3M0-MA														●	E13
RPET 10T3M0E-ML															
RPMT 10T3M0E-MF						●				●	●				
10T3M0S-MM						●				●	●				
RPMW 10T3M0E1										●	●				

▶ Available Arbors

Designation	Ød	Available Arbor
FMRCM 3040HRP-5	16	BT□□-FMC16-□□
3050HRP-6	22	BT□□-FMC22-□□
3052HRP-6	22	BT□□-FMC22-□□
3063HRP-6	22	BT□□-FMC22-□□
3063HRP-7	22	BT□□-FMC22-□□
3066HRP-7	22	BT□□-FMC22-□□


▶ Parts

Specification			
Ø40~Ø66	Screw FTGA03508	Wrench TW15S	Cutter Dia. Ø40~Ø66

▶ Available Inserts E13

▶ Available Arbors and bolt E318-E320

FMRC(M)4000 *New*

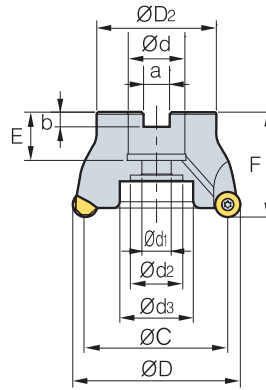

- AR : 5°
- RR : -2° ~ 0°

Designation		Stock		ØD	ØD ₂	Ød	Ød ₁	Ød ₂	Ød ₃	a	b	E	F	ap		Insert size
FMRCM	4050HRP-4	●	4	50	45	22	11	18	-	10.4	6.3	20	40	6	0.26	12
	4050HRP-5	●	5	50	45	22	11	18	-	10.4	6.3	20	40	6	0.28	12
	4052HRP-5		5	52	45	22	11	18	-	10.4	6.3	20	40	6	0.30	12
	4063HRP-5	●	5	63	50	22	11	18	-	10.4	6.3	20	40	6	0.44	12
	4063HRP-6	●	6	63	50	22	11	18	-	10.4	6.3	20	40	6	0.48	12
	4066HRP-6		6	66	50	22	11	18	-	10.4	6.3	20	40	6	0.50	12
FMRC (FMRCM)	4080HRP-6	●	6	80	57	25.4(27)	14	25	35	9.5(12.4)	6(7)	24(23)	50	6	0.92	12
	4080HRP-7	●	7	80	57	25.4(27)	14	25	35	9.5(12.4)	6(7)	24(23)	50	6	0.90	12
	4100HRP-7	●	7	100	67	31.75(32)	18	26	42	12.7(14.4)	8(8)	32(25)	63(53)	6	1.46	12

() Metric Size, ● Stock item

▶ Available Inserts



RPCT-MA



RPMT-ML



RPMT-MF



RPMT-MM



RPMW

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6610	PC5300	PC5400	A30		G10E	H01
RPCT 1204M0-MA														●	E13
RPET 1204M0E-ML														● ●	
RPMT 1204M0E-MF						●								● ●	
	1204M0S-MM					●								● ●	
RPMW 1204M0S1														● ●	
	1204M0S2													● ●	

▶ Available Arbors

Designation	Ød	Available Arbor
FMRCM	4050HRP-4	BT□□-FMC22-□□
	4050HRP-5	
	4052HRP-5	
	4063HRP-5	
	4063HRP-6	
	4066HRP-6	
FMRC(M)	4080HRP-6	BT□□-FMA25.4-□□
		BT□□-FMC27-□□
	4080HRP-7	BT□□-FMA25.4-□□
		BT□□-FMC27-□□
	4100HRP-7	BT□□-FMA31.5-□□
	BT□□-FMC32-□□	

▶ Parts





Specification			
Ø50~Ø100	Screw FTKA0410	Wrench TW15S	Cutter Dia. Ø50~Ø100

▶ Available Inserts E13

▶ Available Arbors and bolt E318-E320



FMRC(M)5000 *New*



- AR : 5°
- RR : -1° ~ 0°

Designation	Stock		$\varnothing D$	$\varnothing D_2$	$\varnothing d$	$\varnothing d_1$	$\varnothing d_2$	$\varnothing d_3$	a	b	E	F	ap		Fig.	Insert size
FMRCM 5063HRP-4	●	4	63	50	22	11	18	-	10.4	6.3	20	40	8	0.43	1	16
5063HRP-5	●	5	63	50	22	11	18	-	10.4	6.3	20	40	8	0.44	1	16
5066HRP-5	●	5	66	50	22	11	18	-	10.4	6.3	20	40	8	0.48	1	16
FMRC (FMRCM) 5080HRP-5	●	5	80	57	25.4(27)	14	25	35	9.5(12.4)	6(7)	24(23)	50	8	0.77	1	16
5080HRP-6	● (●)	6	80	57	25.4(27)	14	25	35	9.5(12.4)	6(7)	24(23)	50	8	0.82	1	16
5100HRP-6	●	6	100	67	31.75(32)	18	26	42	12.7(14.4)	8(8)	32(25)	63(55)	8	1.42	1	16
5125HRP-7	● (●)	7	125	87	38.1(40)	22	32	52	15.9(16.4)	10(9)	35(29)	68(63)	8	2.78	1	16
5125HRP-8	●	8	125	87	38.1(40)	22	32	52	15.9(16.4)	10(9)	35(29)	68(63)	8	2.79	1	16
5160RP-8	●	8	160	107	50.8(40)	-	-	100	19(16.4)	11(9)	38(32)	63	8	4.01	2(3)	16

() Metric Size, ● Stock item

▶ Available Inserts



Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30		G10E	H01
RPCT 1606M0-MA														●	E13
RPET 1606M0E-ML															
RPMT 1606M0E-MF						●				●	●				
1606M0S-MM						●				●	●				
RPMW 1606M0S1										●	●				

▶ Available Arbors

Designation	$\varnothing d$	Available Arbor
FMRCM 5063HRP-4	22	BT□□-FMC22-□□
5063HRP-5		
5066HRP-5		
FMRC(M) 5080HRP-5	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
5080HRP-6	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
5100HRP-6	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
5125HRP-7	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMC40-□□
5125HRP-8	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMC40-□□
5160RP-8	50.8	BT□□-FMA50.8-□□
	40	BT□□-FMC40-□□


▶ Parts

Specification			
$\varnothing 63\sim\varnothing 160$	FTGA0512-P	TW20-100	$\varnothing 63\sim\varnothing 160$

▶ Available Inserts E13

▶ Available Arbors and bolt E318-E320

FMRC(M)6000 *New*

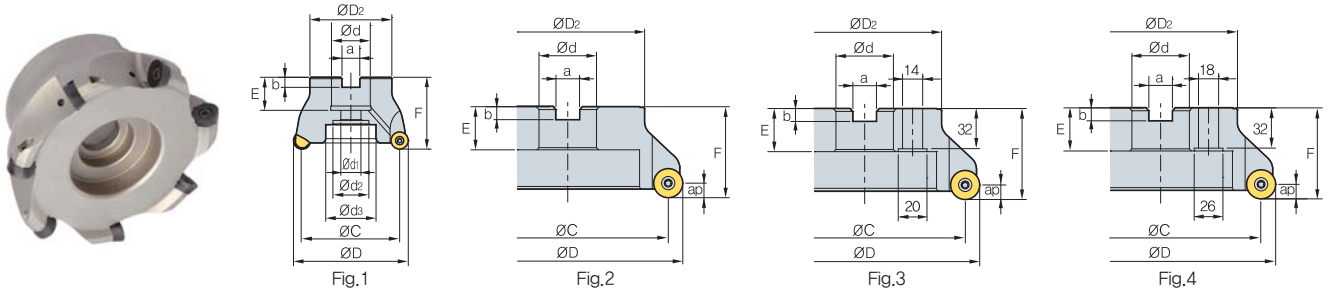

- AR : 5°
- RR : -1° ~ 0°

Designation	Stock	ØD	ØC	ØD ₂	Ød	Ød ₁	Ød ₂	Ød ₃	a	b	E	F	ap	kg	Fig.	Insert size	
FMRCM 6063HRP-4	●	4	63	43	50	22	11	18	-	10.4	6.3	20	40	10	0.37	1	20
FMRC 6080HRP-5	● (●)	5	80	60	57	25.4(27)	14	25	35	9.5(12.4)	6(7)	24(23)	50	10	0.87	1	20
(FMRCM) 6100HRP-5	● (●)	5	100	80	67	31.75(32)	18	26	42	12.7(14.4)	8(8)	32(25)	63(55)	10	1.31	1	20
6100HRP-6		6	100	80	67	31.75(32)	18	26	42	12.7(14.4)	8(8)	32(25)	63(55)	10	1.40	1	20
6125HRP-5	● (●)	5	125	105	87	38.1(40)	22	32	52	15.9(16.4)	10(9)	35(29)	68(63)	10	2.77	1	20
6125HRP-7	● (●)	7	125	105	87	38.1(40)	22	32	52	15.9(16.4)	10(9)	35(29)	68(63)	10	2.89	1	20
6160RP-6	● (●)	6	160	140	107	50.8(40)	-	-	100	19(16.4)	11(9)	38(32)	63	10	3.58	2(3)	20
6160RP-8	● (●)	8	160	140	107	50.8(40)	-	-	100	19(16.4)	11(9)	38(32)	63	10	3.53	2(3)	20
6200RP-8	● (●)	8	200	180	130	47.625(60)	-	-	132	25.4(25.7)	14(14)	38	63	10	5.15	4	20
6250RP-9	● (●)	9	250	230	180	47.625(60)	-	-	180	25.4(25.7)	14(14)	38	63	10	9.72	4	20

() Metric Size, ● Stock item

Available Inserts



Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
RPCT 2007M0-MA														●	E13
RPET 2007M0E-ML															
RPMT 2007M0E-MF						●				●	●				
2007M0S-MM						●				●	●				
RPMW 2007M0S1										●	●				

Available Arbors

Designation	Ød	Available Arbor	Designation	Ød	Available Arbor
FMRCM 6063HRP-4	22	BT□□-FMC22-□□	FMRC(M)	38.1	BT□□-FMA38.1-□□
FMRC(M) 6080HRP-5	25.4	BT□□-FMA25.4-□□			(40)
	(27)	BT□□-FMC27-□□		50.8	BT□□-FMA50.8-□□
6100HRP-5	31.75	BT□□-FMA31.75-□□			(40)
	(32)	BT□□-FMC32-□□		50.8	BT□□-FMA50.8-□□
6100HRP-6	31.75	BT□□-FMA31.75-□□			(40)
	(32)	BT□□-FMC32-□□		47.625	BT□□-FMA47.625-□□
6125HRP-5	38.1	BT□□-FMA38.1-□□			(60)
	(40)	BT□□-FMC40-□□		47.625	BT□□-FMA47.625-□□
					(60)

Parts


Specification	Screw	Wrench	Cutter Dia.
Ø63~Ø250	FTKA0615-P	TW25-100	Ø63~Ø250

Available Inserts E13

Available Arbors and bolt E318-E320



FMRS2500 *New*

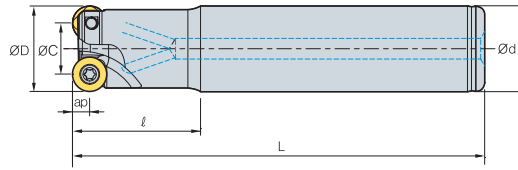

- AR : -4°
- RR : -4°~-1°

Designation		Stock		ØD	ØC	Ød	ℓ	L	ap		Insert size
FMRS	2517HRP-2S16	●	2	17	9	16	35	90	4	0.11	8
	2517HRP-2M16	●	2	17	9	16	35	150	4	0.20	8
	2517HRP-2L16	●	2	17	9	16	35	200	4	0.27	8
	2518HRP-2M16		2	18	10	16	35	150	4	0.20	8
	2518HRP-2L16		2	18	10	16	35	200	4	0.28	8
	2520HRP-3S20	●	3	20	12	20	35	130	4	0.27	8
	2520HRP-3M20	●	3	20	12	20	100	180	4	0.36	8
	2520HRP-3L20	●	3	20	12	20	130	250	4	0.50	8
	2521HRP-3S20	●	3	21	13	20	35	130	4	0.28	8
	2521HRP-3M20	●	3	21	13	20	35	180	4	0.40	8
	2521HRP-3L20	●	3	21	13	20	35	250	4	0.55	8
	2525HRP-4S25	●	4	25	17	25	35	150	4	0.48	8
	2525HRP-4M25	●	4	25	17	25	60	180	4	0.60	8
	2525HRP-4L25	●	4	25	17	25	130	250	4	0.81	8
	2526HRP-4S25	●	4	26	18	25	35	150	4	0.48	8
2526HRP-4L25	●	4	26	18	25	130	250	4	0.85	8	

● Stock item

▶ Available Inserts



RPET-ML



RPMT-MF



RPMT-MM



RPMW

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
RPET	0803M0E-ML														E13
RPMT	0803M0E-MF					●				●	●				
	0803M0S-MM					●				●	●				
RPMW	0803M0E1									●	●				

▶ Parts

Specification			
Ø17~Ø26	Screw FTNA0305 FTNA0306	Wrench TW09S	Cutter Dia. Ø17 Ø18~Ø26

▶ Available Inserts E13

FMRS3000 New

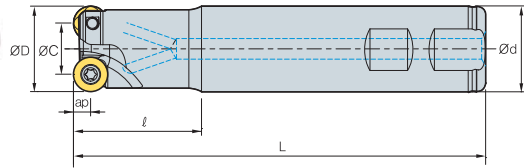


Fig. 1

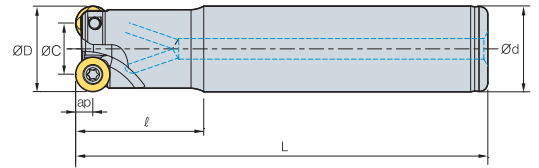


Fig. 2



- AR : -4°
- RR : -1°

Designation		Stock		ØD	ØC	Ød	ℓ	L	ap		Fig.	Insert size
FMRS	3025HRP-2M20	●	2	25	15	20	40	170	5	0.40	2	10
	3025HRP-2S25	●	2	25	15	25	40	120	5	0.39	1	10
	3025HRP-2M25	●	2	25	15	25	60	160	5	0.52	2	10
	3025HRP-2L25	●	2	25	15	25	130	250	5	0.80	2	10
	3026HRP-2L25	●	2	26	16	25	30	200	5	0.69	2	10
	3032HRP-3S32	●	3	32	22	32	40	125	5	0.68	1	10
	3032HRP-3L32	●	3	32	22	32	60	200	5	1.08	2	10
	3032HRP-4S32	●	4	32	22	32	40	125	5	0.66	1	10
	3032HRP-4L25	●	4	32	22	25	60	200	5	0.74	2	10
	3033HRP-4S32	●	4	33	23	32	40	125	5	0.67	1	10
	3033HRP-4M32	●	4	33	23	32	60	180	5	1.00	2	10
	3033HRP-4L32	●	4	33	23	32	180	300	5	1.64	2	10

(mm)

● Stock item

Available Inserts



RPCT-MA



RPET-ML



RPMT-MF



RPMT-MM



RPMW

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM925	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
RPCT 10T3M0-MA														●	E13
RPET 10T3M0E-ML															
RPMT 10T3M0E-MF						●				●	●				
RPMT 10T3M0S-MM						●				●	●				
RPMW 10T3M0E1						●				●	●				


Parts

Specification			
Ø25~Ø33	Screw FTGA03507 FTGA03508	Wrench TW15S	Cutter Dia. Ø25~Ø26 Ø32~Ø33

Available Inserts E13



FMRS4000 *New*

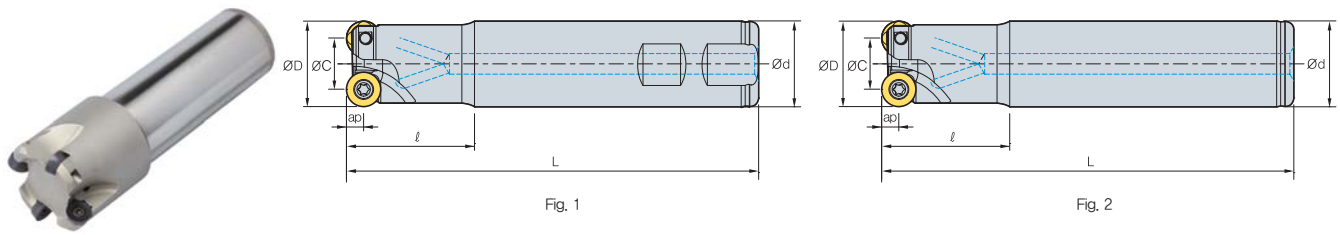

- AR : -4°
- RR : -2°~ 0°

												(mm)
Designation	Stock		ØD	ØC	Ød	ℓ	L	ap		Fig.	Insert size	
FMRS	4025HRP-2S25	●	2	25	13	25	60	160	6	0.46	1	12
	4026HRP-2L25	●	2	26	14	25	60	200	6	0.48	2	12
	4032HRP-2L25	●	2	32	20	25	40	190	6	0.68	2	12
	4032HRP-2S32	●	2	32	20	32	50	125	6	0.64	1	12
	4032HRP-2L32		2	32	20	32	50	250	6	1.40	2	12
	4032HRP-3S32	●	3	32	20	32	50	125	6	0.64	1	12
	4032HRP-3M32	●	3	32	20	32	60	160	6	0.85	2	12
	4033HRP-3M32		3	33	21	32	60	200	6	1.01	2	12
	4033HRP-3L32	●	3	33	21	32	60	300	6	1.67	2	12
	4040HRP-3S32	●	3	40	28	32	35	105	6	0.60	1	12
	4040HRP-3M32	●	3	40	28	32	50	160	6	0.96	2	12
	4040HRP-4S32	●	4	40	28	32	35	105	6	0.60	1	12
	4040HRP-4M32	●	4	40	28	32	35	150	6	0.87	2	12
	4040HRP-4L32		4	40	28	32	35	250	6	1.46	2	12
	4050HRP-4M32	●	4	50	38	32	50	150	6	1.10	2	12
	4050HRP-4M40	●	4	50	38	40	50	150	6	1.44	2	12
	4050HRP-4M42	●	4	50	38	42	50	150	6	1.55	2	12

● Stock item

▶ Available Inserts



Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
RPCT 1204M0-MA														●	E13
RPET 1204M0E-ML										●	●				
RPMT 1204M0E-MF						●				●	●				
1204M0S-MM						●				●	●				
RPMW 1204M0S1										●	●				
1204M0S2										●	●				

▶ Parts

Specification			
Ø25~Ø50	Screw FTKA0408 FTKA0410	Wrench TW15S	Cutter Dia. Ø25~Ø26 Ø32~Ø50

▶ Available Inserts E13

FMRS5000 / 6000 *New*

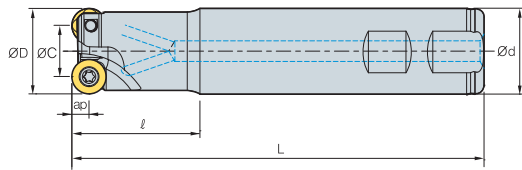


Fig. 1

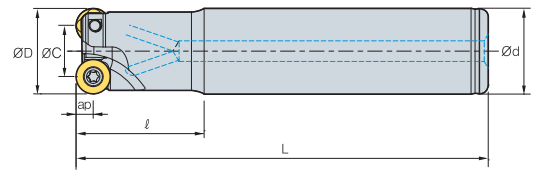


Fig. 2



- AR : -4°
- RR : -2° ~ 0°

(mm)

Designation	Stock		ØD	ØC	Ød	ℓ	L	ap		Insert size	Fig.	
FMRS	5040HRP-2M32	●	2	40	24	32	50	160	8	0.92	16	2
	5040HRP-2L32	●	2	40	24	32	50	250	8	1.45	16	2
	5050HRP-3M40		3	50	34	40	50	160	8	1.48	16	2
	5050HRP-3L40		3	50	34	40	50	300	8	2.86	16	2
	6050HRP-3S32	●	3	50	30	32	50	160	10	1.06	20	1
	6050HRP-3M32	●	3	50	30	32	50	200	10	1.30	20	2
	6050HRP-3S40	●	3	50	30	40	50	125	10	1.45	20	1
	6050HRP-3M40	●	3	50	30	40	50	200	10	1.85	20	2

● Stock item

▶ Available Inserts



Type	Designation	Cermet		Coated							Uncoated			Page			
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01	
5000 type	RPCT 1606M0-MA																
	RPET 1606M0E-ML																
	RPMT 1606M0E-MF						●				●	●					
	RPMT 1606M0S-MM						●				●	●					
	RPMW 1606M0S1											●	●				
6000 type	RPCT 2007M0-MA																●
	RPCT 2007M0E-ML																
	RPMT 2007M0E-MF						●				●	●					
	RPMT 2007M0S-MM						●				●	●					
	RPMW 2007M0S1											●	●				


▶ Parts

Specification			
Ø40~Ø50	FTGA0511-P	TW20-100	Ø40~Ø50
Ø50	FTKA0615-P	TW25-100	Ø50

적용인서트 E13



FMRM2500 / 3000 / 4000 / 5000 *New*

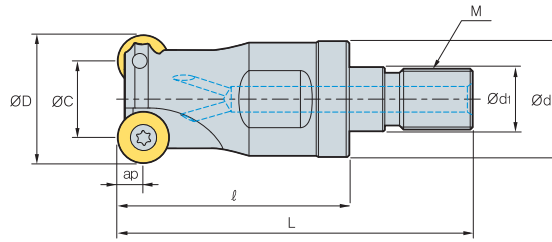

- AR : -4°
- RR : -4° ~ 0°

Designation	Stock		ØD	ØC	Ød	Ød1	ℓ	L	M	ap		Insert size
FMRM 2517HRP-M08		2	17	9	14.5	8.5	25	42	M08	4	0.03	8
2521HRP-M10		3	21	13	18	10.5	30	51	M10	4	0.06	8
2526HRP-M12		4	26	18	23	12.5	35	59	M12	4	0.11	8
2533HRP-M16		4	33	25	29	17	40	67	M16	4	0.22	8
2540HRP-M16		5	40	32	29	17	40	67	M16	4	0.26	8
3026HRP-M12		3	26	16	23	12.5	35	59	M12	5	0.10	10
3033HRP-M16		3	33	23	29	17	40	67	M16	5	0.20	10
3035HRP-M16		3	35	25	29	17	40	67	M16	5	0.22	10
3040HRP-M16		3	40	30	29	17	40	67	M16	5	0.25	10
3042HRP-M16		3	42	32	29	17	40	67	M16	5	0.27	10
4026HRP-M12		2	26	14	23	12.5	35	59	M12	6	0.10	12
4033HRP-M16		3	33	21	29	17	40	67	M16	6	0.21	12
4035HRP-M16		3	35	23	29	17	40	67	M16	6	0.21	12
4040HRP-M16		4	40	28	29	17	40	67	M16	6	0.24	12
4042HRP-M16		4	42	30	29	17	40	67	M16	6	0.25	12
5040HRP-M16		2	40	24	29	17	40	67	M16	8	0.21	16
5042HRP-M16		2	42	26	29	17	40	67	M16	8	0.23	16

(mm)

● Stock item

Available Inserts



RPCT-MA



RPET-ML



RPMT-MF



RPMT-MM



RPMW

Type	Designation	Cermat		Coated							Uncoated			Page	Type	Designation	Cermat		Coated							Uncoated			Page									
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30				G10E	H01	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300		PC5400	A30	G10E	H01					
2500 type	RPET 0803M0E-ML														4000 type	RPMT 1204M0S-MM															E13							
	RPMT 0803M0E-MF					●			●	●				RPMT 1204M0S1							●			●	●													
	0803M0S-MM					●				●	●			1204M0S2										●	●													
	RPMW 0803M0E1					●				●	●			5000 type	RPCT 1606M0-MA																							E13
3000 type	RPCT 10T3M0-MA														●	RPCT 1606M0E-ML																						
	RPET 10T3M0E-ML															RPMT 1606M0E-MF														●								
	RPMT 10T3M0E-MF													●	1606M0S-MM														●	●								
	10T3M0S-MM													●	RPMW 1606M0S1								●				●	●										
4000 type	RPCT 1204M0-MA													●																								
	RPET 1204M0E-ML																																					
	RPMT 1204M0E-MF													●																								

Parts

Specification				
Ø17~Ø40	FTNA0305 FTNA0306	TW09S	-	Ø17 Ø21~Ø40
Ø26~Ø42	FTGA03507 FTGA03508	TW15S	-	Ø26 Ø33~Ø42
Ø26~Ø42	FTKA0408 FTKA0410	TW15S	-	Ø26 Ø33~Ø42
Ø40~Ø42	FTGA0511-P	-	TW20-100	Ø40~Ø42


HRMD is more economical due to the use of 6 cutting edges compared to HRM tool with a 3 edge positive insert

HRMDouble

- HRMD is more economical due to the use of 6 cutting edges compared to HRM tool with a 3 edge positive insert
- High rake angle cutting edge and chip breaker reduces cutting load
- Negative geometry has been designed for rigidity of cutting edge and double sided function
- Simple screw on system and stable support achieves strong clamping force
- Unique insert design for high feed and multifunctional machining
- HRMD insert with symmetrical cutting edge is applicable for both R and L type machining



▶ Features of Insert

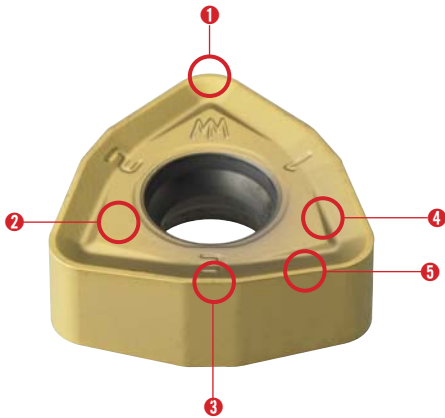

1 Nose-R

- Security of rigid edge in ramping Pocket machining
- Round edge suitable for high feed rates Insert geometry
- Possible to use R/L type machining

2 Clamping surface

- Design for stable clamping
- Prevention of friction by chip

3 Minor cutting edge

- Improvement of surface roughness in high feed machining
- Special design for decreasing thrust force
- Symmetrical insert design for R/L type tool

4 Chip breaker

- Reduction of cutting load due to high rake angle
- Improvement of chip flow and evacuation in various applications
- Prevention of damage on clamping face of insert

5 Major cutting edge

- Symmetrical design insert for R/L type tool
- Superior cutting performance due to high rake angle cutting edge
- Low cutting resistance in high feed
- Special design for decreasing thrust force

▶ Features of Cutter



Inner coolant system

- Improvement of chip control and evacuation
- Longer tool life due to reduced cutting temperature


3-surface constrained system

- Strong clamping system
- Stable clamping system against different cutting resistances in various machining applications


Simple screw on system

- Strong clamping of screw on system
- Convenient clamping system
- Wide chip pocket for better chip evacuation


▶ **Cutter type Code system**

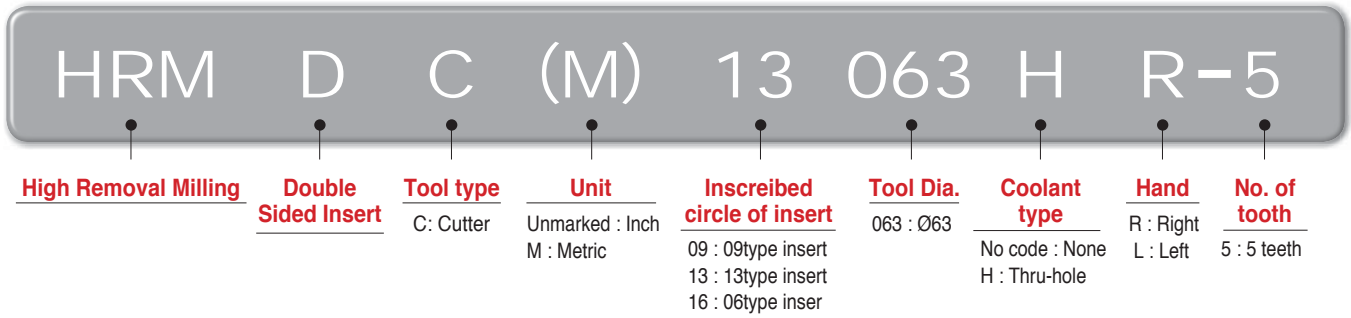


▶ **Shank type Code system**

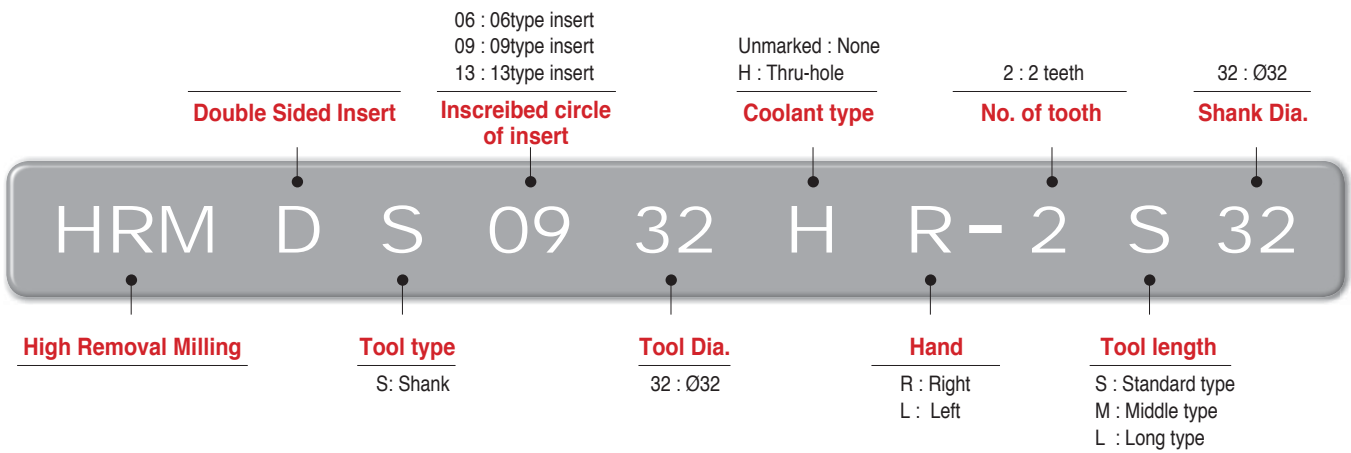

▶ **Modular Head Code system**

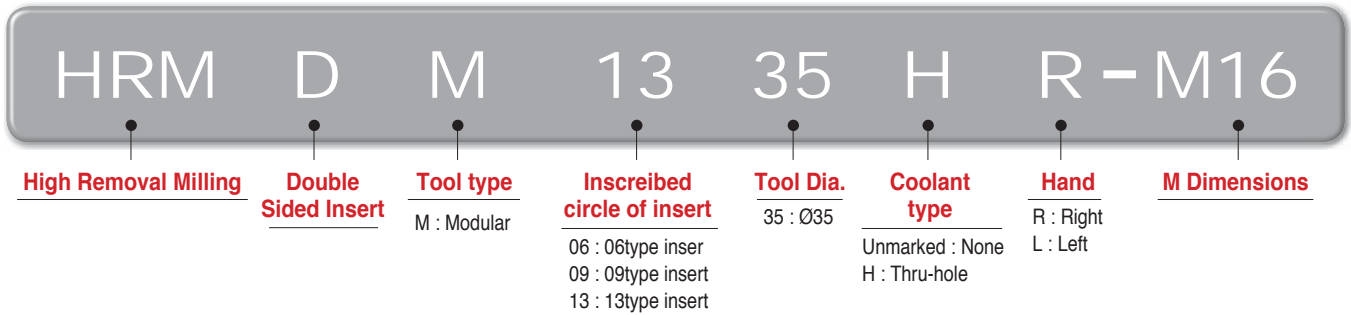


▶ **Modular Adaptor Code system**

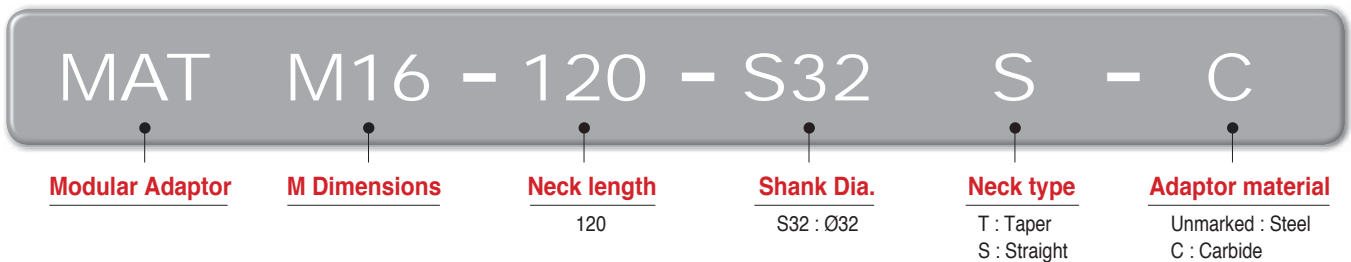

▶ Corner R programming

Designation	Cutting condition		Approx. R (mm)	
	Max.ap(mm)	Max.fz(mm/t)	Input. R	Uncut
WNMX060312ZNN-MM	1.0	1.2	1.8	0.4
WNMX09T316ZNN-MM	1.5	2.0	2.5	0.6
WNMX130520ZNN-MM	2.0	3.0	3.0	0.8
WNMX160720ZNN-MM	2.5	3.5	3.5	1.2

Information for uncut part by using "Input.R" for CAM program




Uncut part can be changed by poor machine condition or weak clamp of workpiece, etc

▶ Interference prevent system


Designation	ØD(mm)	Ød(mm)	t(mm)
HRMDS0617HR-2□16	17	16	1
HRMDS0618HR-2□16	18	16	2
HRMDS0621HR-2□20	21	20	1
HRMDS0626HR-3□25	26	25	1
HRMDS0633HR-4□32	33	32	1
HRMDS0926HR-2□25	26	25	1
HRMDS0933HR-3□32	33	32	1
HRMDS0935HR-4□32	35	32	3
HRMDS0940HR-4□32	40	32	8
HRMDS0950HR-5□32	50	32	18
HRMDS0950HR-5□40	50	40	10
HRMDS0950HR-5□42	50	42	8
HRMDS1333HR-3□32	33	32	1
HRMDS1335HR-4□32	35	32	3
HRMDS1340HR-4□30	40	30	8
HRMDS1350HR-4□32	50	32	18
HRMDS1350HR-4□40	50	40	10
HRMDS1350HR-4□42	50	42	8
HRMDS1363HR-5□32	63	32	31
HRMDS1363HR-5□40	63	40	23
HRMDS1363HR-5□42	63	42	21

The side clearance prevents to interference between tool and workpiece even in deep hole machining

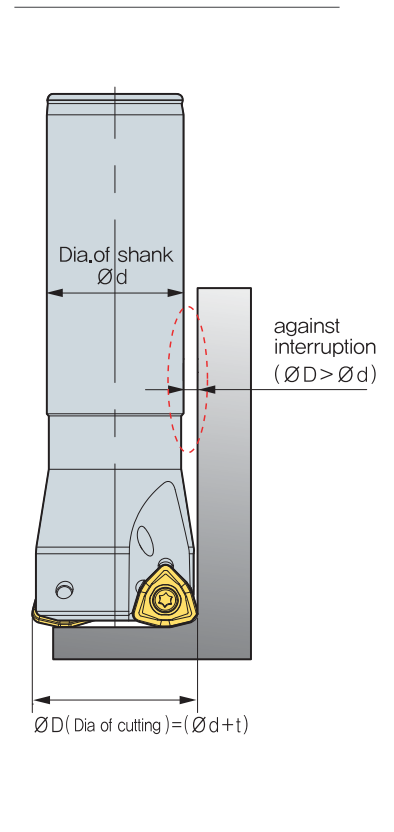


▶ Ramping & Helical cutting technical data

Ramping

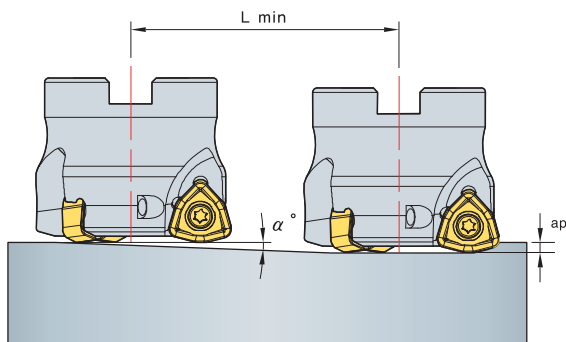

Helical cutting

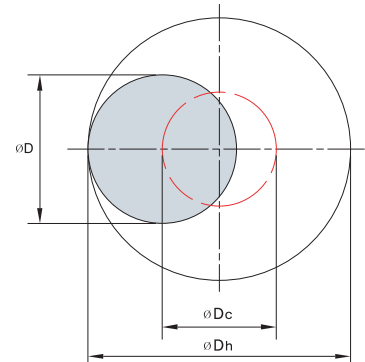

$$L_{min} = \frac{ap}{\tan \alpha^\circ} \text{ (mm)}$$

$$\varnothing D_c = \varnothing D_h - \varnothing D$$

$\varnothing D_c$ = Tool pass of tool center

$\varnothing D_h$ = Desirable hole diameter on workpiece

$\varnothing D$ = Tool Dia.

- Adjust feed to under 70% of Recommended cutting condition when ramping & helical cutting
- In helical ramping, max. cutting depth per 1 helical revolution of cutter should not exceed max. cutting depth as per insert size
- in ramping, max. cutting depth for 1 ramping process should not exceed max. depth of cut as per used insert size

Designation	Tool Dia. $\varnothing D$ (mm)	Efficient cutting diameter $\varnothing D_e$ (mm)	Ramping			Helical ramping	
			Max. ap (mm)	Max. angle α°	Cutting Length L_{min} (mm)	Dh Min. Cutting diameter(mm) (mm)	Dh Max. Cutting diameter(mm)
HRMDS0616HR	16	9.5	1	4.8	11	23.8	29.6
HRMDS0617HR	17	10.5	1	4.1	13	25.8	31.6
HRMDS0618HR	18	11.5	1	3.5	16	27.8	33.6
HRMDS0620HR	20	13.5	1	2.5	22	31.8	37.6
HRMDS0621HR	21	14.5	1	2.2	26	33.8	39.6
HRMDS0625HR	25	18.5	1	1.3	44	41.8	47.6
HRMDS0626HR	26	19.5	1	1.2	47	43.8	49.6
HRMDS0632HR	32	25.5	1	0.6	95	55.8	61.6
HRMDS0633HR	33	26.5	1	0.5	114	57.8	63.6
HRMDS0925HR	25	15.4	1.5	5.4	15.8	37.6	46.8
HRMDS0926HR	26	16.4	1.5	5.0	17.0	39.6	48.8
HRMDS0930HR	30	20.4	1.5	3.9	22.0	47.6	56.8
HRMDS0932HR	32	22.3	1.5	3.5	24.5	51.6	60.8
HRMDS0933HR	33	23.3	1.5	3.3	25.8	53.6	62.8
HRMDS0935HR	35	25.4	1.5	3.0	28.3	57.6	66.8
HRMDS0940HR	40	30.2	1.5	2.5	34.5	67.6	76.8
HRMDS0950HR	50	40.2	1.5	1.8	47.0	87.6	96.8
HRMDS1332HR	32	19.3	2	5.7	20.0	47	60
HRMDS1333HR	33	20.3	2	5.4	21.3	49	62
HRMDS1335HR	35	22.3	2	4.8	24.0	53	66
HRMDS1340HR	40	27.2	2	3.7	30.7	63	76
HRMDS1350HR	50	37	2	2.6	44.0	83	96
HRMDS1363HR	63	50	2	1.9	61.3	109	122
HRMDCM09040HR	40	30.2	1.5	2.5	34.5	67.6	76.8
HRMDCM09050HR	50	40.2	1.5	1.8	47.0	87.6	96.8
HRMDCM09063HR	63	53.1	1.5	1.4	63.3	113.6	122.8
HRMDC(M)09080HR	80	70.1	1.5	1.0	84.5	147.6	156.8
HRMDC(M)09100HR	100	90	1.5	0.8	109.5	187.6	196.8
HRMDCM13050HR	50	37	2	2.6	44.0	83	96
HRMDCM13063HR	63	50	2	1.9	61.3	109	122
HRMDC(M)13080HR	80	66.9	2	1.4	84.0	143	156
HRMDC(M)13100HR	100	86.9	2	1.0	110.7	183	196
HRMDC(M)13125HR	125	111.9	2	0.8	144.0	233	246
HRMDC(M)16080HR	80	63.3	2.5	1.4	102	138	156
HRMDC(M)16100HR	100	83.3	2.5	1	143	178	196
HRMDC(M)16125HR	125	108.3	2.5	0.7	204	228	246
HRMDC(M)16160R	160	143.3	2.5	0.5	286	298	316
HRMDC(M)16200R	200	183.3	2.5	0.3	477	378	396
HRMDC(M)16250R	250	233.3	2.5	0.2	716	478	496
HRMDC(M)16315R	315	298.3	2.5	0.1	1432	608	626


▶ Application area



Copying



Facing



Slotting




Ramping



Helical cutting



Through coolant system

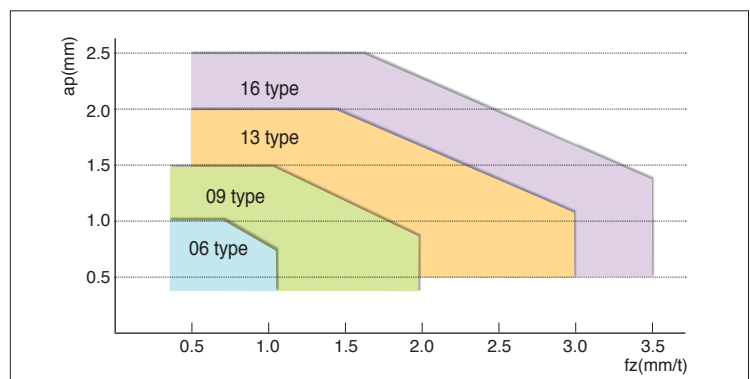

▶ Recommended cutting condition

ISO	Workpiece	Material	Grade	Cutting speed, vc(m/min)	
P	Carbon steel	Low carbon steel	SUM22, C=0.1~25	PC5300 280 PC5400 245	
		General carbon steel	C=0.30~55	PC5300 255 PC5400 220	
		High carbon steel	C=0.55~80	PC5300 240 PC5400 205	
		-	SCM415(H), SCM420, SCM440	PC5300 195 PC5400 170	
	Low alloy steel (Alloy constituent < 5%)	Hardened	-	PC5300 115 PC5400 100	
		annealed	SKD61	PC5300 150 PC5400 130	
	High alloy steel (Alloy constituent > 5%)	annealed	SKD61	PC5300 120 PC5400 105	
		Hardened	SKH51, SKH55	PC5300 160 PC5400 135	
	M	Stainless steel	Ferritic / martensitic	SUS410, SUS420, SUS430	PC5300 130 PC5400 110
			Austenitic	SUS303, SUS304, SUS316	PC5300 100 PC5400 85
Duplex(Austenitic / Ferritic)			F51	PC5300 145 PC5400 110	
-			-	PC5300 120 PC5400 90	
K	Gray cast iron	Low tensile	FC200, FC250	PC5300 95 PC5400 70	
		High tensile	FC300, FC350	PC5300 85 PC5400 65	
		Ferritic	FCD400, FCD500	PC5300 60 PC5400 50	
		Pearlitic	FCD600, FCD700	PC5300 55 PC5400 45	
S	Fe Base	-	Incoloy	PC5300 25 PC5400 20	
	Ni Base	-	Inconel, Nimonic, Hastelloy	PC5300 130 PC5400 105	
	Co base	-	stelite	PC5300 65 PC5400 55	
	Titanium alloys	-	pure Ti alloy(TiAl6V4)	PC5300 105 PC5400 65	

▶ Machining Example



Working condition

Work piece : SM45C(HrC22) **Tool information** : HRMDCM13050HR-4
Cutting speed : $vc = 283\text{m/min}$ ($1,803^{-1}$) WNMX130520ZNN-MM(PC3500)
 $fz = 1.4\text{mm/tooth}$
 $vf = 10,097\text{mm/min}$
 $ap = 0.8\text{mm}$
 $ae = 35\text{mm}$
 Coolant : Dry, Machining: Copying
 Machine : Horizontal MCT
 Overhang of tool : 250mm

40% Increased productivity
80% Reduced tool cost

Test result

In comparing HRMD with our competitor using the same cutting conditions, the cutting speed of HRMD was higher with the same depth of cut ($ap \times ae$), the cycle time was reduced by 40% and the tool life was increased to over 60%. HRMD is economically more efficient due to the use of 6 cutting edges compared to EDNW type with positive insert



Working condition

Work piece : STS304 **Tool information** : HRMDCM13100HR-6
Cutting speed : $vc = 130\text{m/min}$ (414-1) WNMX130520ZNN-MM(PC3545)
 $fz = 1.2\text{mm/tooth}$
 $vf = 2,981\text{mm/min}$
 $ap = 1.0\text{mm}$
 $ae = 80\text{mm}$
 Coolant : Wet, Machining : Facing and Slotting
 Machine : Vertical MCT
 Overhang of tool : 250mm


80% Increased productivity
25% Reduced tool cost

Test result

In comparing HRMD with our competitor using the same cutting conditions, the cutting speed of HRMD was higher with the same depth of cut ($ap \times ae$), the cycle time was reduced by 80% and the tool life was same, but HRMD is economically more efficient due to the use of 6 cutting edges compared to SDKN type with positive insert



HRMDC(M)09



• AR : -7°
• RR : -12°~-18°

(mm)

Designation	Stock		ϕD	ϕD_2	ϕd	ϕd_1	ϕd_2	a	b	E	F	ap		Bolt
HRMDCM 09040HR-3		3	40	34	16	9	14	8.4	5.6	19	40	1.5	0.2	SB0825
09040HR-4	●	4	40	34	16	9	14	8.4	5.6	19	40	1.5	0.2	
09050HR-4	●	4	50	42	22	11	18	10.4	6.3	21	40	1.5	0.3	SB1025
09050HR-5	●	5	50	42	22	11	18	10.4	6.3	21	40	1.5	0.3	
09063HR-5	●	5	63	49	22	11	18	10.4	6.3	21	40	1.5	0.5	SB1025
09063HR-6	●	6	63	49	22	11	18	10.4	6.3	21	40	1.5	0.5	
09080HR-6		6	80	57	27	14	20	12.4	7	23	50	1.5	1.1	SB1230
09080HR-7	●	7	80	57	27	14	20	12.4	7	23	50	1.5	1.1	
09100HR-7	●	7	100	67	32	18	26	14.4	8	25	50	1.5	1.7	SB1630
09100HR-8		8	100	67	32	18	26	14.4	8	25	50	1.5	1.7	
HRMDC 09080HR-6		6	80	57	25.4	14	20	9.5	6	24	50	1.5	1.1	SB1230
09080HR-7		7	80	57	25.4	14	20	9.5	6	24	50	1.5	1.1	
09080HR-31.75-6		6	80	67	31.75	18	26	12.7	8	32	63	1.5	1.5	SB1630
09080HR-31.75-7		7	80	67	31.75	18	26	12.7	8	32	63	1.5	1.5	
09100HR-7		7	100	67	31.75	18	26	12.7	8	32	63	1.5	2.1	SB1630
09100HR-8		8	100	67	31.75	18	26	12.7	8	32	63	1.5	2.1	

● Stock item

▶ Available Inserts



WNMX-MF




WNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
WNMX 09T316ZNN-MF					●		●	●		●	●				E22
09T316ZNN-MM															

▶ Available Arbors

Designation	NC Arbors	
HRMDCM	09040HR-□	BT□□-FMC16-□□ SK□□-FMC16-□□
	09050HR-□	BT□□-FMC22-□□
	09063HR-□	SK□□-FMC22-□□
	09080HR-□	BT□□-FMC27-□□ SK□□-FMC27-□□
	09100HR-□	BT□□-FMC32-□□ SK□□-FMC32-□□
	HRMDC	09080HR-□
09080HR-31.75-□		BT□□-FMA31.75-□□
09100HR-□		SK□□-FMA31.75-□□

▶ Bolt



Designation	Dimensions(mm)				
	M	a	b	L	pitch
SB0825	M08	13	8	25	1.25
SB1025	M10	16	10	25	1.5
SB1230	M12	18	12	30	1.75
SB1630	M16	24	16	30	2.0


▶ Parts

Specification		
Ø40~Ø100	Screw FTKA0307	Wrench TW09S

▶ Available Inserts E22

▶ Available Arbors and bolt E318-E320

HRMDC(M)13




• AR : -7°
• RR : -12°~-4°

(mm)


Designation	Stock	ØD	ØD ₂	Ød	Ød ₁	Ød ₂	Ød ₃	a	b	E	F	ap	kg	Bolt		
HRMDCM	13050HR-3	●	3	50	42	22	11	17	-	10.4	6.3	21	40	2	0.3	SB1025
	13050HR-4	●	4	50	42	22	11	17	-	10.4	6.3	21	40	2	0.3	
	13063HR-4	●	4	63	49	22	11	18	-	10.4	6.3	21	40	2	0.5	SB1025
	13063HR-5	●	5	63	49	22	11	18	-	10.4	6.3	21	40	2	0.5	
	13080HR-5	●	5	80	57	27	14	20	-	12.4	7	23	50	2	1	SB1230
	13080HR-6	●	6	80	57	27	14	20	-	12.4	7	23	50	2	1	
	13100HR-6	●	6	100	67	32	18	26	-	14.4	8	25	50	2	1.6	SB1630
	13100HR-7	●	7	100	67	32	18	26	-	14.4	8	25	50	2	1.6	
HRMDC	13125HR-7	●	7	125	87	40	22	32	52	16.4	9	29	63	2	3.2	SB2040
	13125HR-8	●	8	125	87	40	22	32	52	16.4	9	29	63	2	3.2	MBA-M20
	13080HR-5	●	5	80	57	25.4	14	20	-	9.5	6	24	50	2	1	SB1230
	13080HR-6	●	6	80	57	25.4	14	20	-	9.5	6	24	50	2	1	
	13080HR-31.75-5	●	5	80	67	31.75	18	26	-	12.7	8	32	63	2	1.4	SB1630
	13080HR-31.75-6	●	6	80	67	31.75	18	26	-	12.7	8	32	63	2	1.4	
	13100HR-6	●	6	100	67	31.75	18	26	-	12.7	8	32	63	2	2.1	SB1630
	13100HR-7	●	7	100	67	31.75	18	26	-	12.7	8	32	63	2	2.1	
13125HR-7	●	7	125	87	38.1	22	32	52	15.9	10	35	63	2	3.3	SB2040	
13125HR-8	●	8	125	87	38.1	22	32	52	15.9	10	35	63	2	3.3	MBA-M20	

● Stock item

Available Inserts



WNMX-MF



WNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
WNMX 130520ZNN-MF										●	●				E22
130520ZNN-MM					●		●	●		●	●				

Available Arbors

Designation	NC Arbors	
HRMDCM	13050HR-□	BT□□-FMC22-□□ SK□□-FMC22-□□
	13063HR-□	BT□□-FMC22-□□
	13080HR-□	SK□□-FMC27-□□
	13100HR-□	BT□□-FMC32-□□ SK□□-FMC32-□□
		13125HR-□
	HRMDC	13080HR-□
13080HR-31.75-□		SK□□-FMA25.4-□□
13100HR-□		BT□□-FMA31.75-□□ SK□□-FMA31.75-□□
		13125HR-□

Bolt

Fig. 1





Fig. 2



Designation	Dimensions(mm)							Fig.
	M	a	b	b1	C	L	pitch	
SB1025	M10	16	10	-	-	25	1.5	1
SB1230	M12	18	12	-	-	30	1.75	1
SB1630	M16	24	16	-	-	30	2.0	1
SB2040	M20	30	20	-	-	40	2.5	1
MBA-M20	M20	50	14	20	27	30	2.5	2

Parts

Specification	Screw	Wrench
Ø50~Ø125	FTKA0412B	TW15S

Available Inserts E22

Available Arbors and bolt E318-E320



HRMDC(M)16 *New*




Fig. 1




Fig. 2




Fig. 3




Fig. 4



• AR : -7°
• RR : -12°~-4°

(mm)


Designation	Stock	⚙️	ØD	ØD2	Ød	Ød1	Ød2	Ød3	a	b	E	F	ap	⚖️	Bolt	Fig.	
HRMDC	16080HR-4		4	80	65	25.4(27)	14	20	-	9.5(12.4)	6(7)	25(23)	50	2.5	0.99	SB1230	1
(HRMDCM)	16080HR-5		5	80	65	25.4(27)	14	20	-	9.5(12.4)	6(7)	25(23)	50	2.5	0.91		
	16100HR-5		5	100	85	31.75(32)	18	26	-	12.7(14.4)	8	33(25)	63(50)	2.5	1.68	SB1630	1
	16100HR-6		6	100	85	31.75(32)	18	26	-	12.7(14.4)	8	33(25)	63(50)	2.5	1.64		
	16125HR-6		6	125	100	38.1(40)	22	32	52	15.9(16.4)	10(9)	36(29)	63	2.5	3.23	SB2040	1
	16125HR-7		7	125	100	38.1(40)	22	32	52	15.9(16.4)	10(9)	36(29)	63	2.5	3.24		
	16160R-7		7	160	107	50.8(40)	-	90	-	19(16.4)	11(9)	38(32)	63	2.5	3.73	MBA-M24	2
	16160R-8		8	160	107	50.8(40)	-	90	-	19(16.4)	11(9)	38(32)	63	2.5	3.77		
	16200R-8		8	200	145	47.625(60)	-	132	-	25.4(25.7)	14	38	63	2.5	6.48	-	3
	16200R-10		10	200	145	47.625(60)	-	132	-	25.4(25.7)	14	38	63	2.5	6.61		
	16250R-10		10	250	190	47.625(60)	-	190	-	25.4(25.7)	14	38	63	2.5	11.01	-	3
	16250R-12		12	250	190	47.625(60)	-	190	-	25.4(25.7)	14	38	63	2.5	11.04		
	16315R-12		12	315	250	47.625(60)	-	238	-	25.4(25.7)	14	38	63	2.5	18.34	-	4
	16315R-14		14	315	250	47.625(60)	-	238	-	25.4(25.7)	14	38	63	2.5	18.35		

() Metric Size, ● Stock item

Available Inserts



WNMX-MF



WNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
WNMX	160720ZNN-MF										●	●			E22
	160720ZNN-MM										●	●			

Available Arbors

Designation	HRMDC	HRMDCM
HRMDCM	16080HR-4	BT□□-FMA25.4-□□
	16080HR-5	BT□□-FMC27-□□
	16100HR-5	BT□□-FMA31.75-□□
	16100HR-6	BT□□-FMC32-□□
	16125HR-6	BT□□-FMA38.1-□□
	16125HR-7	BT□□-FMB40-□□
	16160R-7	BT□□-FMA50.8-□□
	16160R-8	BT□□-FMC40-□□
	16200R-8	
	16200R-10	
	16250R-10	BT□□-FMA47.625-□□
	16250R-12	BT□□-FMB60-□□
	16315R-12	
	16315R-14	

Bolt

Fig. 1





Fig. 2



Designation	Dimensions(mm)							Fig.
	M	a	b	b1	C	L	pitch	
SB1025	M10	16	10	-	-	25	1.5	1
SB1230	M12	18	12	-	-	30	1.75	1
SB1630	M16	24	16	-	-	30	2.0	1
SB2040	M20	30	20	-	-	40	2.5	1
MBA-M20	M20	50	14	20	27	30	2.5	2
MBA-M24	M24	65	14	24	37	36	3.0	2


Parts

Specification	Screw	Wrench
Ø80-Ø315	FTGA0513-P	TW20-100

Available Inserts E22

Available Arbors and bolt E318-E320

HRMDS06 *New*

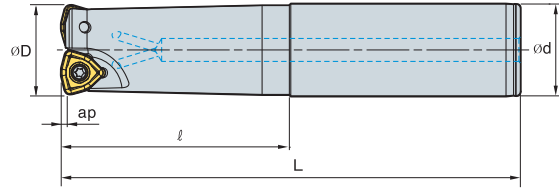


- AR : -7°
- RR : -17°~-25°

(mm)

Designation	Stock		$\varnothing D$	$\varnothing d$	l	L	ap	
HRMDS 0616HR-2S16	●	2	16	16	30	110	1.0	0.15
0616HR-2M16	●	2	16	16	70	150	1.0	0.20
0616HR-2L16		2	16	16	100	200	1.0	0.26
0617HR-2S16	●	2	17	16	20	110	1.0	0.15
0617HR-2M16	●	2	17	16	20	150	1.0	0.21
0617HR-2L16		2	17	16	20	200	1.0	0.28
0618HR-2S16		2	18	16	20	110	1.0	0.15
0618HR-2M16	●	2	18	16	20	150	1.0	0.21
0618HR-2L16		2	18	16	20	200	1.0	0.28
0620HR-2S20	●	2	20	20	50	130	1.0	0.28
0620HR-2M20	●	2	20	20	100	180	1.0	0.38
0620HR-2L20		2	20	20	130	250	1.0	0.53
0621HR-2S20		2	21	20	20	130	1.0	0.29
0621HR-2M20	●	2	21	20	20	180	1.0	0.40
0621HR-2L20	●	2	21	20	20	250	1.0	0.57
0625HR-3S25		3	25	25	60	140	1.0	0.44
0625HR-3M25	●	3	25	25	80	180	1.0	0.57
0625HR-3L25	●	3	25	25	120	250	1.0	0.80
0626HR-3S25		3	26	25	30	140	1.0	0.46
0626HR-3M25	●	3	26	25	30	180	1.0	0.60
0626HR-3L25	●	3	26	25	30	250	1.0	0.84
0632HR-4S32		4	32	32	70	150	1.0	0.82
0632HR-4M32	●	4	32	32	100	200	1.0	1.10
0632HR-4L32	●	4	32	32	180	300	1.0	1.66
0633HR-4S32		4	33	32	40	200	1.0	1.14
0633HR-4M32	●	4	33	32	40	250	1.0	1.43
0633HR-4L32	●	4	33	32	40	300	1.0	1.73

● Stock item

▶ Available Inserts




Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
WNMX 060312ZNN-MF										●	●				E22
060312ZNN-MM										●	●				

▶ Parts

Specification		
$\varnothing 16\sim\varnothing 33$	Screw ETNA02506	Wrench TW07S



HRMDS09

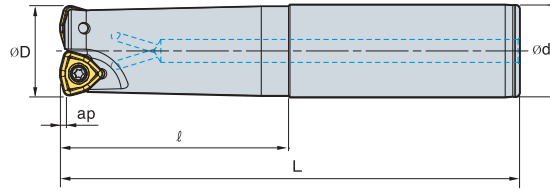

• AR : -7°
• RR : -17°~-25°

(mm)

Designation	Stock		$\varnothing D$	$\varnothing d$	ℓ	L	ap	
HRMDS 0925HR-2S25	●	2	25	25	60	140	1.5	0.5
0925HR-2M25	●	2	25	25	120	200	1.5	0.6
0925HR-2L25	●	2	25	25	180	300	1.5	1
0926HR-2S25	●	2	26	25	60	140	1.5	0.5
0926HR-2M25	●	2	26	25	60	200	1.5	0.7
0926HR-2L25	●	2	26	25	60	300	1.5	1
0930HR-3S32	●	3	30	32	70	150	1.5	0.8
0930HR-3M32	●	3	30	32	120	200	1.5	1
0930HR-3L32		3	30	32	180	300	1.5	1.5
0932HR-3S32	●	3	32	32	70	150	1.5	0.8
0932HR-3M32	●	3	32	32	120	200	1.5	1.1
0932HR-3L32		3	32	32	180	300	1.5	1.7
0933HR-3S32		3	33	32	70	150	1.5	0.8
0933HR-3M32	●	3	33	32	70	200	1.5	1.1
0933HR-3L32	●	3	33	32	70	300	1.5	1.7
0935HR-4S32	●	4	35	32	50	150	1.5	0.9
0935HR-4M32	●	4	35	32	50	200	1.5	1.1
0935HR-4L32	●	4	35	32	50	300	1.5	1.7
0940HR-4S32	●	4	40	32	50	150	1.5	0.9
0940HR-4L32	●	4	40	32	50	300	1.5	1.8
0940HR-4S40		4	40	40	60	150	1.5	1.3

● Stock item

▶ Available Inserts




Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
WNMX 09T316ZNN-MF															E22
09T316ZNN-MM					●		●	●		●	●				

▶ Parts

Specification		
$\varnothing 25 \sim \varnothing 40$	Screw FTKA0307	Wrench TW09S

▶ Available Inserts E22

HRMDS09

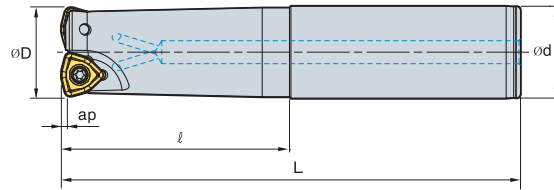

- AR : -7°
- RR : -17°~-25°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap	
HRMDS 0940HR-4M40		4	40	40	130	250	1.5	2.2
0940HR-4L40		4	40	40	180	300	1.5	2.7
0940HR-4S42		4	40	42	60	150	1.5	1.4
0940HR-4M42		4	40	42	130	250	1.5	2.3
0940HR-4L42		4	40	42	180	300	1.5	2.8
0950HR-4S32		4	50	32	40	150	1.5	1.1
0950HR-4M32		4	50	32	40	250	1.5	1.6
0950HR-4L32		4	50	32	40	300	1.5	2
0950HR-4S40		4	50	40	40	150	1.5	1.4
0950HR-4M40		4	50	40	40	250	1.5	2.4
0950HR-4L40		4	50	40	40	300	1.5	2.9
0950HR-4S42		4	50	42	40	150	1.5	1.6
0950HR-4M42	●	4	50	42	40	250	1.5	2.6
0950HR-4L42		4	50	42	40	300	1.5	3.1
0950HR-5S32		5	50	32	40	150	1.5	1.1
0950HR-5M32		5	50	32	40	250	1.5	1.6
0950HR-5L32		5	50	32	40	300	1.5	2
0950HR-5S40		5	50	40	40	150	1.5	1.4
0950HR-5M40		5	50	40	40	250	1.5	2.4
0950HR-5L40		5	50	40	40	300	1.5	2.9
0950HR-5S42		5	50	42	40	150	1.5	1.6
0950HR-5M42		5	50	42	40	250	1.5	2.6
0950HR-5L42		5	50	42	40	300	1.5	3.1

● Stock item

▶ Available Inserts



Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
WNMX 09T316ZNN-MF 09T316ZNN-MM					●		●	●		●	●				E22


▶ Parts

Specification		
Ø40~Ø50	Screw FTKA0307	Wrench TW09S

▶ Available Inserts E22



HRMDS13

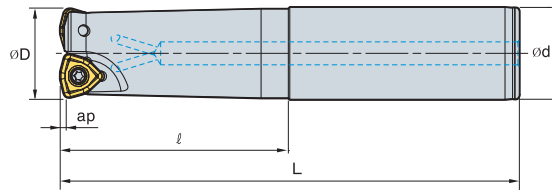

AA 14°
 • AR : -7°
 • RR : -14°~ -16°

(mm)

Designation	Stock	Flutes	ØD	Ød	ℓ	L	ap	kg
HRMDS 1332HR-2S32	●	2	32	32	70	150	2	0.8
1332HR-2M32	●	2	32	32	120	200	2	1
1332HR-2L32	●	2	32	32	180	300	2	1.6
1333HR-2S32	●	2	33	32	70	150	2	0.8
1333HR-2M32	●	2	33	32	70	200	2	1.1
1333HR-2L32	●	2	33	32	70	300	2	1.7
1335HR-2S32		2	35	32	50	150	2	0.8
1335HR-2M32	●	2	35	32	50	200	2	1.1
1335HR-2L32		2	35	32	50	300	2	1.7
1340HR-3S32	●	3	40	32	50	150	2	0.8
1340HR-3M32	●	3	40	32	50	250	2	1.4
1340HR-3L32	●	3	40	32	50	300	2	1.7
1340HR-3S40		3	40	40	60	150	2	1.2
1340HR-3M40		3	40	40	130	250	2	2.1
1340HR-3L40		3	40	40	180	300	2	2.6
1340HR-3S42		3	40	42	60	150	2	1.4
1340HR-3M42		3	40	42	130	250	2	2.3
1340HR-3L42		3	40	42	180	300	2	2.7
1350HR-3S32		3	50	32	50	150	2	1.1
1350HR-3M32		3	50	32	50	250	2	1.7
1350HR-3L32		3	50	32	50	300	2	2
1350HR-3S40		3	50	40	50	150	2	1.5
1350HR-3M40		3	50	40	50	250	2	2.4
1350HR-3L40		3	50	40	50	300	2	2.9
1350HR-3S42		3	50	42	50	150	2	1.6
1350HR-3M42		3	50	42	50	250	2	2.6
1350HR-3L42		3	50	42	50	300	2	3.1

● Stock item

▶ Available Inserts



WNMX-MF



WNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
WNMX 130520ZNN-MF															E22
130520ZNN-MM					●		●	●		●	●				


▶ Parts

Specification	Screw	Wrench
Ø32~Ø50	FTKA0412B	TW15S

▶ Available Inserts E22



HRMDS13

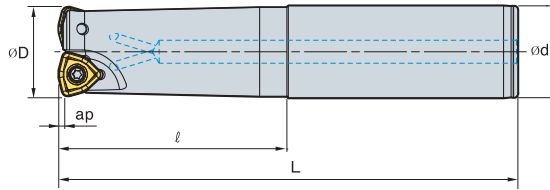


- AR : -7°
- RR : -14°~-16°

(mm)


Designation	Stock		ØD	Ød	ℓ	L	ap	
HRMDS 1350HR-4S32		4	50	32	50	150	2	1.1
1350HR-4M32		4	50	32	50	250	2	1.7
1350HR-4L32		4	50	32	50	300	2	2
1350HR-4S40		4	50	40	50	150	2	1.5
1350HR-4M40		4	50	40	50	250	2	2.4
1350HR-4L40		4	50	40	50	300	2	2.9
1350HR-4S42		4	50	42	50	150	2	1.6
1350HR-4M42		4	50	42	50	250	2	2.6
1350HR-4L42		4	50	42	50	300	2	3.1
1363HR-4S32		4	63	32	50	150	2	1.4
1363HR-4M32		4	63	32	50	250	2	2.1
1363HR-4L32		4	63	32	50	300	2	2.4
1363HR-4S40		4	63	40	50	150	2	1.8
1363HR-4M40		4	63	40	50	250	2	2.8
1363HR-4L40		4	63	40	50	300	2	3.2
1363HR-4S42		4	63	42	50	150	2	1.9
1363HR-4M42		4	63	42	50	250	2	3
1363HR-4L42		4	63	42	50	300	2	3.5
1363HR-5S32		5	63	32	50	150	2	1.5
1363HR-5M32		5	63	32	50	250	2	2
1363HR-5L32		5	63	32	50	300	2	2.3
1363HR-5S40		5	63	40	50	150	2	1.8
1363HR-5M40		5	63	40	50	250	2	2.8
1363HR-5L40		5	63	40	50	300	2	3.2
1363HR-5S42		5	63	42	50	150	2	1.9
1363HR-5M42		5	63	42	50	250	2	3
1363HR-5L42		5	63	42	50	300	2	3.5

● Stock item

▶ Available Inserts



WNMX-MF



WNMX-MM



Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
WNMX 130520ZNN-MF										●	●				E23
130520ZNN-MM					●		●			●	●				

▶ Parts

Specification		
Ø50~Ø63	Screw FTKA0412B	Wrench TW15S



HRMDM06 *New*

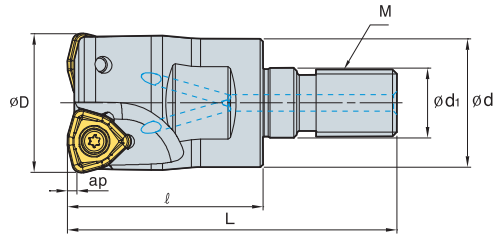

• AR : -7°
• RR : -18°~-25°

(mm)


Designation	Stock		ØD	Ød	Ød ₁	ℓ	L	M	ap	
HRMDM 0616HR-M08		2	16	14.5	8.5	25	42	M08	1.0	0.03
0617HR-M08		2	17	14.5	8.5	25	42	M08	1.0	0.03
0618HR-M08		2	18	14.5	8.5	25	42	M08	1.0	0.03
0620HR-M10		2	20	18	10.5	30	51	M10	1.0	0.06
0621HR-M10		2	21	18	10.5	30	51	M10	1.0	0.07
0625HR-M12		3	25	23	12.5	35	59	M12	1.0	0.10
0626HR-M12		3	26	23	12.5	35	59	M12	1.0	0.11
0632HR-M16		4	32	29	17	40	67	M16	1.0	0.21
0633HR-M16		4	33	29	17	40	67	M16	1.0	0.22

● Stock item

▶ Available Inserts



WNMX-MF



WNMX-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
WNMX 060312ZNN-MF										●	●				E23
060312ZNN-MM										●	●				

▶ Available Adaptor

Designation	Available Adaptor	Designation	Available Adaptor
HRMDM 0616HR-M08	MAT- M08	HRMDM 0625HR-M12	MAT- M12
0617HR-M08	MAT- M08	0626HR-M12	MAT- M12
0618HR-M08	MAT- M08	0632HR-M16	MAT- M16
0620HR-M10	MAT- M10	0633HR-M16	MAT- M16
0621HR-M10	MAT- M10		

Designation : HRMDM0932HR-M16
Modular Head Threading Measure size(M16)

||

Adaptor Spec. : MAT-M16-035-S32S
Adaptor Threading Measure(M16)



▶ Parts

Specification		
Ø16~Ø33	Screw ETNA02506	Wrench TW07S

▶ Available Inserts E23

▶ Available Arbors and bolt E318-E320

HRMDM09/13

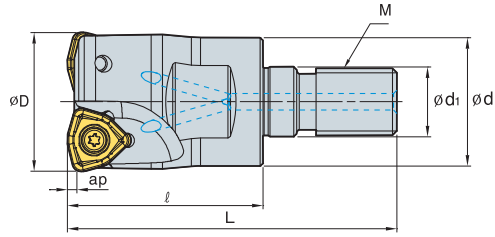


• AR : -7°
• RR : -18°~-25°

(mm)

Designation	Stock		ØD	Ød	Ød1	l	L	M	ap	
HRMDM 0925HR-M12	●	2	25	23	12.5	35	59	M12	1.5	0.10
0926HR-M12	●	2	26	23	12.5	35	59	M12	1.5	0.11
0930HR-M16	●	3	30	29	17	40	67	M16	1.5	0.19
0932HR-M16	●	3	32	29	17	40	67	M16	1.5	0.20
0933HR-M16		3	33	29	17	40	67	M16	1.5	0.21
0935HR-M16	●	4	35	29	17	40	67	M16	1.5	0.22
0940HR-M16	●	4	40	29	17	40	67	M16	1.5	0.25
1332HR-M16	●	2	32	29	17	40	67	M16	2	0.20
1333HR-M16		2	33	29	17	40	67	M16	2	0.20
1335HR-M16		2	35	29	17	40	67	M16	2	0.22
1340HR-M16		3	40	29	17	45	72	M16	2	0.26

● Stock item

Available Inserts



Type	Designation	Cermet		Coated							Uncoated			Page	
		CN2000	CN30	NCM925	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
09 type	WNMX 09T316ZNN-MF										●	●			E23
	09T316ZNN-MM					●		●	●		●	●			
13 type	WNMX 130520ZNN-MF										●	●			
	130520ZNN-MM					●		●	●		●	●			

Available Adaptor

Designation	Available Adaptor	Designation	Available Adaptor
HRMDM 0925HR-M12	MAT- M12	HRMDM 0940HR-M16	MAT- M16
0926HR-M12		1332HR-M16	
0930HR-M16		1333HR-M16	
0932HR-M16	1335HR-M16		
0933HR-M16	1340HR-M16		
0935HR-M16			

Designation : HRMDM0932HR-M16
Modular Head Threading Measure size(M16)

||

Adaptor Spec. : MAT-M16-035-S32S
Adaptor Threading Measure(M16)

Parts


Specification	 Screw	 Wrench
Ø25~Ø40	FTKA0307	TW09S
Ø32~Ø40	FTKA0412B	TW15S

Available Inserts E23

Available Arbors and bolt E318-E320



HRMC(M)13/15



• AR : 7°
• RR : -15°~ -5°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap	kg	Bolt	
HRMC(M)	13050HR-3	●	3	50	47	22.225(22)	11	16.4	8.0(10.4)	5(6.3)	20(21)	50	2.0	0.4	SB1035
	13050HR-4	● ●	4	50	47	22.225(22)	11	16.4	8.0(10.4)	5(6.3)	20(21)	50	2.0	0.4	SB1035
	13063HR-4	●	4	63	60	22.225(22)	11	17	8.0(10.4)	5(6.3)	20(21)	50	2.0	0.7	SB1035
	13080HR-5	●	5	80	76	31.75(27)	18(13)	26(20)	12.7(12.4)	8(7)	32(23)	70	2.0	1.6	SB16(12)45
HRMC(M)	15063HR-3	●	3	63	60	22.225(22)	11	17	8.0(10.4)	5(6.3)	20(21)	50	2.5	0.7	SB1035
	15080HR-4	● ●	4	80	76	31.75(27)	18(13)	26(20)	12.7(12.4)	8(7)	32(23)	70	2.5	1.7	SB16(12)45
	15100HR-5		5	100	96	31.75(32)	18	26	12.7(14.4)	8(8)	32(26)	70	2.5	2.8	SB1645
	15100HR-6	●	6	100	96	31.75(32)	18	26	12.7(14.4)	8(8)	32(26)	70	2.5	3.2	SB1645
	15125HR-6		6	125	98	38.1(40)	22	32	15.9(16.4)	10(9)	35(29)	63	2.5	3.3	SB2040
	15160R-7		7	160	100	50.8(40)	-	72	19.0(16.4)	11(9)	38(35)	63	2.5	4.3	MBA-M24(M20)

() Metric Size, ● Stock item

Available Inserts




WDKT-MH

Type	Designation	Cermet		Coated						Uncoated			Page		
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3845	PC9630	PC6510	PC5300	PC5400		A30	G10E
13 type	WDKT 130520ZDSR-MH					●		●	●	●	●				E22
15 type	WDKT 150625ZDSR-MH					●		●	●	●	●				

Available Arbors

Designation	HRMDC	HRMDCM
HRMC(M) 13050HR-3	BT□□-FMA22.225-□□	BT□□-FMC22-□□
		SK□□-FMC22-□□
13063HR-4		
13080HR-5	BT□□-FMA31.75-□□	BT□□-FMC27-□□
	SK□□-FMA31.75-□□	SK□□-FMC27-□□
15063HR-3	BT□□-FMA22.225-□□	BT□□-FMC22-□□
		SK□□-FMC22-□□
15080HR-4		BT□□-FMC27-□□
	BT□□-FMA31.75-□□	SK□□-FMC27-□□
15100HR-5	SK□□-FMA31.75-□□	BT□□-FMC32-□□
15100HR-6		SK□□-FMC32-□□
15125HR-6	BT□□-FMA38.1-□□	BT□□-FMB40-□□
	SK□□-FMA38.1-□□	BT□□-FMC40-□□
15160R-7	BT□□-FMA50.8-□□	SK□□-FMC40-□□

Bolt

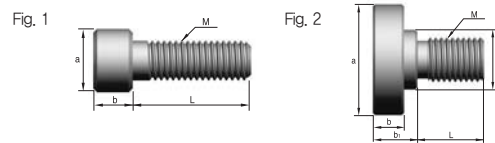

Designation	M	Dimensions(mm)					Fig.	
		a	b	b1	C	L		pitch
SB1035	M10	16	10	-	-	35	1.5	1
SB1245	M12	18	12	-	-	45	1.75	1
SB1645	M16	24	16	-	-	45	2.0	1
SB2040	M20	30	20	-	-	40	2.5	1
MBA-M20	M20	50	14	20	27	30	2.5	2
MBA-M24	M24	65	14	24	37	36	3.0	2


Parts

Specification	Screw	Clamp	Clamp Screw	C-Ring	Wrench
Ø50~Ø80	FTGA0513-P	CHH4.5R1	CTX04513H	CR03	TW20-100
Ø63~Ø160	FTGA0513-P	CHH5.5R1	CTX0515	CR04	TW20-100

Available Inserts E22

Available Arbors and bolt E318-E320

HRMS 08/10

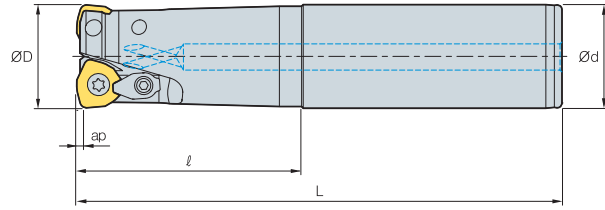

- AR : 7°
- RR : -11°~-5°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap	
HRMS 0820HR-2S20	●	2	20	20	50	130	1.0	0.3
0820HR-2M20	●	2	20	20	100	180	1.0	0.4
0820HR-2L20	●	2	20	20	130	250	1.0	0.5
0821HR-2S20	●	2	21	20	50	130	1.0	0.3
0821HR-2M20	●	2	21	20	50	180	1.0	0.4
0821HR-2L20	●	2	21	20	50	250	1.0	0.5
1025HR-2S25	●	2	25	25	60	140	1.5	0.4
1025HR-2M25	●	2	25	25	120	200	1.5	0.6
1025HR-2L25	●	2	25	25	180	300	1.5	0.9
1026HR-2S25	●	2	26	25	60	140	1.5	0.4
1026HR-2M25	●	2	26	25	60	200	1.5	0.6
1026HR-2L25	●	2	26	25	60	300	1.5	1.0
1030HR-2S32	●	2	30	32	70	150	1.5	0.8
1030HR-2M32	●	2	30	32	120	200	1.5	1.0
1030HR-2L32	●	2	30	32	180	300	1.5	1.5

● Stock item

Available Inserts



WDKT-MH


Type	Designation	Cermet		Coated							Uncoated			Page	
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
08 type	WDKT 080316ZDSR-MH					●		●	●	●	●				E22
10 type	WDKT 10T320ZDSR-MH					●		●	●	●	●				

Parts

Specification					
Ø20~Ø21	FTNA0306	-	-	-	TW09P
Ø25~Ø30	FTKA0408	CHH3.5R1	CTX03510	CR03	TW15S



HRMS13

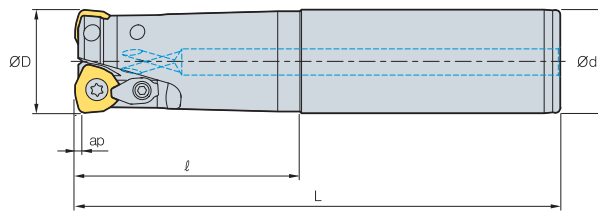

• AR : 7°
• RR : -11°~-5°

(mm)

Designation	Stock		ØD	Ød	ℓ	L	ap	
HRMS 1332HR-2S32	●	2	32	32	70	150	2.0	0.8
1332HR-2M32	●	2	32	32	120	200	2.0	1.0
1332HR-2L32	●	2	32	32	180	300	2.0	1.6
1333HR-2S32		2	33	32	70	150	2.0	0.8
1333HR-2M32	●	2	33	32	70	200	2.0	1.1
1333HR-2L32	●	2	33	32	70	300	2.0	1.7
1335HR-2S32	●	2	35	32	50	150	2.0	0.8
1335HR-2M32	●	2	35	32	50	200	2.0	1.1
1335HR-2L32		2	35	32	50	300	2.0	1.7
1340HR-3S32	●	3	40	32	50	150	2.0	0.8
1340HR-3M32	●	3	40	32	50	250	2.0	1.4
1340HR-3L32		3	40	32	50	300	2.0	1.7
1340HR-3S40		3	40	40	60	150	2.0	1.2
1340HR-3M40		3	40	40	130	250	2.0	2.1
1340HR-3L40		3	40	40	180	300	2.0	2.6
1340HR-3S42		3	40	42	60	150	2.0	1.4
1340HR-3M42	●	3	40	42	130	250	2.0	2.3
1340HR-3L42		3	40	42	180	300	2.0	2.7

● Stock item

▶ Available Inserts



WDKT-MH


Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
WDKT 130520ZDSR-MH					●		●	●	●	●	●				E22

▶ Parts

Specification					
Ø32,33,35	FTGA0510-P	CHH4.5R1	CTX04513H	CR03	TW20
Ø40	FTGA0512-P	CHH5.5R1	CTX04513H	CR03	TW20

▶ Available Inserts E22

HRMS15

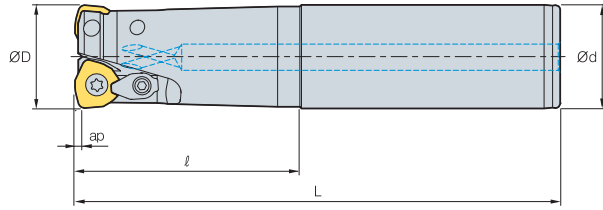

• AR : 7°
• RR : -8°~6°

(mm)

Designation	Stock		ØD	Ød	l	L	ap	
HRMS 1550HR-3S32		3	50	32	50	150	2.5	1.0
1550HR-3M32		3	50	32	50	250	2.5	1.6
1550HR-3L32		3	50	32	50	300	2.5	1.9
1550HR-3S40		3	50	40	50	150	2.5	1.4
1550HR-3M40		3	50	40	50	250	2.5	2.3
1550HR-3L40		3	50	40	50	300	2.5	2.8
1550HR-3S42	●	3	50	42	50	150	2.5	1.5
1550HR-3M42		3	50	42	50	250	2.5	2.5
1550HR-3L42		3	50	42	50	300	2.5	3.0
1563HR-4S32		4	63	32	50	150	2.5	1.3
1563HR-4M32		4	63	32	50	250	2.5	1.9
1563HR-4L32		4	63	32	50	300	2.5	2.2
1563HR-4S40		4	63	40	50	150	2.5	1.7
1563HR-4M40		4	63	40	50	250	2.5	2.6
1563HR-4L40		4	63	40	50	300	2.5	3.1
1563HR-4S42		4	63	42	50	150	2.5	1.8
1563HR-4M42		4	63	42	50	250	2.5	2.8
1563HR-4L42		4	63	42	50	300	2.5	3.3

● Stock item

Available Inserts



WDKT-MH

Designation	Cermet		Coated						Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400		A30	G10E
WDKT 150625ZDSR-MH					●		●	●	●	●				E22


Parts

Specification					
Ø50~Ø63	Screw FTGA0513-P	Clamp CHH5.5R1	Clamp Screw CTX0515	C-Ring CR04	Wrench TW20

Available Inserts E22



HRMM08/10/13

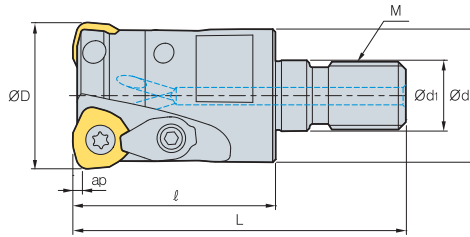

• AR : 7°
• RR : -11°~-5°

(mm)

Designation	Stock	⊗	ØD	Ød	Ød1	ℓ	L	M	ap	kg
HRMM 0820HR-M10	●	2	20	18	10.5	30	51	M10	1	0.06
0821HR-M10		2	21	18	10.5	30	51	M10	1	0.06
0825HR-M12	●	3	25	23	12.5	35	59	M12	1	0.11
0826HR-M12	●	3	26	23	12.5	35	59	M12	1	0.11
0828HR-M12		3	28	23	12.5	35	59	M12	1	0.12
0832HR-M16		4	32	29	17	40	67	M16	1	0.21
0833HR-M16	●	4	33	29	17	40	67	M16	1	0.21
0835HR-M16		4	35	29	17	40	67	M16	1	0.23
0840HR-M16		5	40	29	17	40	67	M16	1	0.25
1025HR-M12		2	25	23	12.5	35	59	M12	1.5	0.1
1026HR-M12		2	26	23	12.5	35	59	M12	1.5	0.1
1030HR-M16	●	2	30	29	17	40	67	M16	1.5	0.2
1032HR-M16		3	32	29	17	45	72	M16	1.5	0.26
1035HR-M16		3	35	29	17	45	72	M16	1.5	0.23
1040HR-M16		4	40	29	17	45	72	M16	1.5	0.27
1332HR-M16	●	2	32	29	17	40	67	M16	2	0.17
1333HR-M16		2	33	29	17	40	67	M16	2	0.17
1335HR-M16		2	35	29	17	40	67	M16	2	0.19
1340HR-M16	●	3	40	29	17	45	72	M16	2	0.24

● Stock item

Available Inserts



WDKT-MH

Type	Designation	Cermet		Coated						Uncoated			Page		
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400		A30	G10E
08 type	WDKT 080316ZDSR-MH					●		●	●	●	●				E23
10 type	WDKT 10T320ZDSR-MH					●		●	●	●	●				
13 type	WDKT 130520ZDSR-MH					●		●	●	●	●				

Available Adaptor

Designation	Available Adaptor	Designation	Available Adaptor	Designation	Available Adaptor
HRMM 0820HR-M10	MAT-M10	HRMM 0835HR-M16	MAT-M16	HRMM 1040HR-M16	MAT-M16
0821HR-M10		0840HR-M16		1332HR-M16	
0825HR-M12	MAT-M12	1025HR-M12	MAT-M12	1333HR-M16	MAT-M16
0826HR-M12		1026HR-M12		1335HR-M16	
0828HR-M12		1030HR-M16		1340HR-M16	
0832HR-M16	MAT-M16	1032HR-M16	MAT-M16		
0833HR-M16		1035HR-M16			

Designation : HRMM0820HR-M10
Modular Head Threading Measure size(M10)

||

Adaptor Spec. : MAT-M10-030-S20S
Adaptor Threading Measure(M10)

Parts


Specification						
Ø20~Ø40	FTNA0306	-	-	-	-	-
Ø25~Ø40	FTKA0408	CHH3.5R1	CTX03510	CR03	TW15S	-
Ø32,33,35	FTGA0510-P	CHH4.5R1	CTX04513H	CR03	-	TW20
Ø40	FTGA0512-P	CHH5.5R1	CTX04513H	CR03	-	TW20

Available Inserts E23

Available Arbors and bolt E281~E282



THE

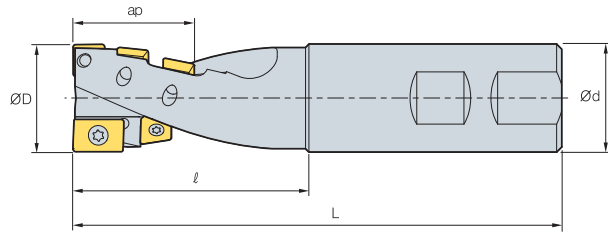

(mm)

Designation	Stock	ØD	Ød	l	L	ap	No. of flute	kg	Available Inserts	
									Lower cutting edge	External cutting edge
THE 25R		25	25	55	120	25	2	0.4	APLT070304R 1z	SPMT060304 4z
THE 32R		32	32	70	145	40	2	0.5	ADLT150308R 1z	SDMT090308-MM 5z
THE 40R	●	40	42	88	175	54	2	1.3	ZPMT1504PPSR-MM 1z	SPMT120408-MM 5z
THE 50R	●	50	42	85	175	54	4	1.4	ZPMT1504PPSR-MM 2z	SPMT120408-MM 10z

● Stock item

Available Inserts



ADLT




APLT



SPMT-MM



SPMT



SDMT-MM



ZPMT-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
SPMT 060304			●												
SDMT 090308-MM					●					●					E04
SPMT 120408-MM					●		●			●					E05 E14
APLT 070304R										●					E21
ADLT 150308R			●							●					E24
ZPMT 1504PPSR-MM					●		●			●					

Recommended cutting condition

• Grooving

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	90~140	0.05~0.20	PC5300
M	50~90	0.05~0.20	PC5300
K	70~120	0.05~0.25	PC5300

• Side cutting

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	150~240	0.05~0.20	PC5300
M	90~150	0.05~0.20	PC5300
K	120~200	0.10~0.25	PC5300

Parts

Specification	Screw	Wrench	Wrench
Ø25	ETNA02506	TW07P	-
Ø32	ETNA0408	-	TW15S
Ø40	ETNA0511	-	TW20S
Ø50	ETNA0511	-	TW20S


Available Inserts E04, E05, E14, E21, E24



Longer tool life is achieved due to the excellent cutting performance of the insert grade

Laser Mill

- Long tool life has been achieved due to the excellent cutting performance of the insert grade
- Optimum machining of molds has been achieved with the MQL available system
- Easy clamping with simple screw on system
- Various holder line up: steel shank, carbide shank, modular type
- High accuracy indexable endmills for mold finishing

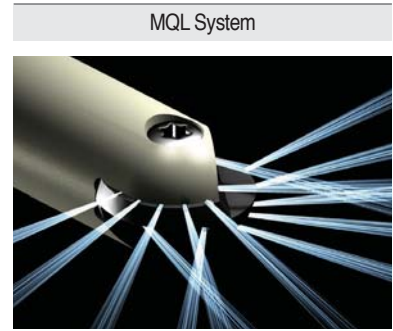

- Environmental friendly system
- Decreased coolant cost
- Lubrication of cutting edge
- Improved chip control property
- Increased tool life & improved surface quality

▶ Clamping system

Sub coolant way

Main coolant way

- High precision (ground internal diameter)
Run-out : 0.02mm
Accuracy of 'R part' : below 0.01
- Through coolant system

Through coolant hole

High precision screw

Through coolant way

▶ Features



- Six types of inserts are available with one holder
- Single screw for clamping of insert : Easy clamping system
- Various types of holders (Steel shank, Carbide shank, Modular type)
- MQL applicable - environmentally responsible with longer tool life & improved surface quality.


LBS, LR Order-made items

LBH-Ball	LRH-Corner radius	LFH-High feed	LCF-Chamfer	LBS-Ball type	LR-Corner R type
<ul style="list-style-type: none"> • Helical cutting edge • Suitable for harder material with high feed 	<ul style="list-style-type: none"> • Helical cutting edge • Variety of nose -R 	<ul style="list-style-type: none"> • Helical cutting edge • Suitable for high feed 	<ul style="list-style-type: none"> • Straight cutting edge • Center drilling and chamfering 	<ul style="list-style-type: none"> • Straight cutting edge • Suitable for precise 	<ul style="list-style-type: none"> • Straight cutting edge • Variety of nose-R

▶ Features of Laser Mill Grades

PC2005	<ul style="list-style-type: none"> • Extremely high hardness grade • The harmony between improved blade design and strong chip breaker • Optimized for machining heat-treated steel and high hardness steel
PC2010	<ul style="list-style-type: none"> • High wear resistance and excellent toughness • The harmony between excellent thermal shock resistance and strong cutting edges. • Optimized for machining tool steel and pre hardened steel
PC2015	<ul style="list-style-type: none"> • High welding resistance and excellent toughness • The harmony between tough grade and excellent cutting edge design • Optimized for machining carbon steel

▶ Application Guideline per Workpiece

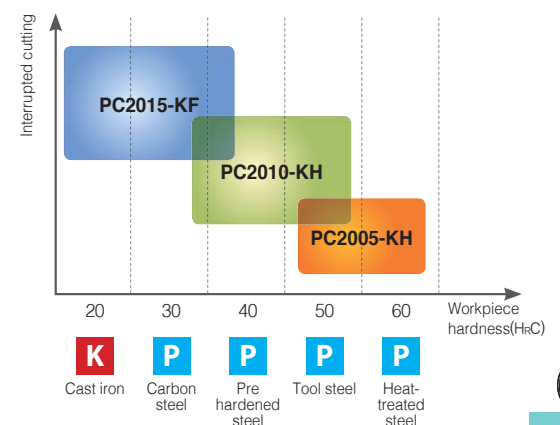

▶ Features of KF / KH Chip Breaker

- ▶ **KF** : Exclusive chip breaker for stable machining of carbon steel with its characteristics of high wear resistance at center part and improved blade design.
- ▶ **KH** : Stronger insert with the combination of rake angle and relief angle that are ideal for machining high hardness workpiece.

Type	Shape comparison		
Standard (For general cutting)			
	<ul style="list-style-type: none"> • Proper to general cutting • Insert shape for uniform performance 		
KH (For high hardness steel)			
	<ul style="list-style-type: none"> • Center shaper proper for machining high hardness workpiece and uniformed tool life at center part • Improved cutting edge design by higher rake angle(α°) • Lower relief angle(β°) increases strength of cutting edges than universal inserts. 		
KF (For carbon steel)			
	<ul style="list-style-type: none"> • Smaller chisel improves wear resistance at center for machining carbon steel. • Improved cutting edge design by higher rake angle(α°) • Longer tool life and better cutting performance with the use of excellent blade design 		

▶ Recommended Cutting Conditions


Workpiece			Grade	Chip breaker	Recommended cutting conditions				
ISO	Material	HB(HRC)			vc(m/min)	fz(mm/t)	ap(mm)	ae(mm)	
K	Gray cast iron	GC250	180(8)	PC2015 PC2010 PC2005	KF	130~210	0.2~0.5	0.07D	0.07D
	Ductile cast iron	GCD600	250(24)						
P	Carbon steel	S20C~S50C	150	PC2010 PC2015 PC210F	KH	170~250	0.2~0.5	0.07D	0.07D
	Alloy steel	SCM21~SCM5H	270(28)						
		KP4M	300(32)						
		NIMAX	370(40)						
		CENA1	370(40)						
		NAK80	400(43)						
	STAVAX	510(52)							
High speed tool steel	SKH51~SKH59	550(55)	PC2005 PC2010	KH	80~130	0.1~0.2	0.3D	0.3D	
Alloy tool steel	STD61(Hot forging)	630(60)							
	STD11(Cold forging)								

Overhang	vc(m/min)	fz(mm/t)
Under 3D	100%	100%
3D ~ 5D	70%	70%
5D ~ 8D	60%	60%
8D ~ 10D	50%	50%



▶ Cutting condition formula for milling

Practical Cutting speed	RPM
$v_{ce} = \frac{\pi \times D_e \times n}{1000} \text{ (m/min)}$	$n = \frac{v_{ce} \times 1000}{\pi \times D_e} \text{ (min}^{-1}\text{)}$
Feed per tooth	Feed per minute
$f_z = \frac{v_f}{z \times n} \text{ (mm/t)}$	$v_f = f_z \times z \times n \text{ (mm/min)}$
Chip removal amount	Power requirement
$Q = \frac{a_p \times a_e \times v_f}{1000} \text{ (cm}^3\text{/min)}$	$P_{kw} = \frac{Q \times k_c}{60 \times 1000 \times \eta} \text{ (kW)}$
	$P_{hp} = \frac{P_c}{0.75} \text{ (hp)}$

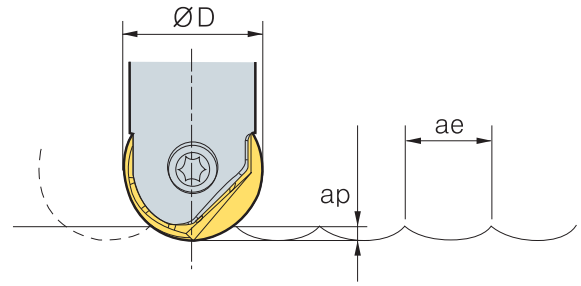


v_c = Cutting speed(m/min)	P_{kw} = Power Requirement (kW)
v_{ce} = Practical cutting speed(m/min)	P_{hp} = Horsepower requirement(hp)
n = Revolution per Minute(min ⁻¹)	Q = Chip removal amount(cm ³ /min)
D = Cutting diameter(mm)	a_p = Depth of cut(mm)
D_e = Actual diameter(mm)	a_e = Width of cut(mm)
v_f = Feed per minute(mm/min)	k_c = Specific cutting resistance(kg/mm ²)
f_z = Feed per tooth(mm/t)	η = Mechanical efficiency(%)
z = Number of tooth	

▶ Practical cutting speed calculation formulas

1. Formula of actual diameter

• Formula : Actual diameter

$$D_e = 2\sqrt{a_p(D - a_p)}$$



2. θ° Using : Calculating cutting speed at P point (Cutting speed according to depth of cut when ramping)

• Formula : Practical cutting speed


$$v_{ce} = \frac{\pi D \sin \theta \times n}{1000} \text{ (m/min)}$$

$$\theta = \cos^{-1}\left(\frac{D - 2a_p}{D}\right) + (90 - \alpha^\circ)$$

3. In case of using a_p : Calculating cutting speed at Q point

• Formula : Practical cutting speed


$$v_{ce} = \frac{2\pi n \sqrt{a_p(D - a_p)}}{1000}$$



▶ Practical cutting speed calculation formulas

		h(surface roughness) (µm)									
R(mm)	ae(mm)	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
5		0.3	1.0	2.3	4.0	6.3	9.0	12.3	16.0	20.3	25.0
6		0.2	0.8	1.9	3.3	5.2	7.5	10.2	13.3	16.9	20.8
8		0.2	0.6	1.4	2.5	3.9	5.6	7.7	10.0	12.7	15.6
10		0.1	0.5	1.1	2.0	3.1	4.5	6.1	8.0	10.1	12.5
12.5		0.1	0.4	0.9	1.6	2.5	3.6	4.9	6.4	8.1	10.0
15		0.1	0.3	0.8	1.3	2.1	3.0	4.1	5.3	6.8	8.3
16		0.1	0.3	0.7	1.3	2.0	2.8	3.8	5.0	6.3	7.8




• Formula of surface roughness : $h(\text{surface finish}) = \frac{(a_e)^2}{8R} \times 1000 (\mu\text{m})$

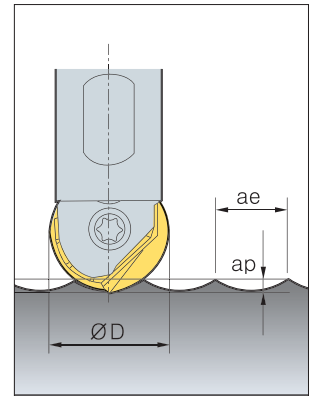







▶ Actual diameter data

ap	ØD	Ø08	Ø10	Ø12	Ø16	Ø20	Ø25	Ø30	Ø32
0.1		1.8	2.0	2.2	2.5	2.8	3.2	3.5	3.6
0.2		2.5	2.8	3.1	3.6	4.0	4.5	4.9	5.0
0.3		3.0	3.4	3.7	4.3	4.9	5.4	6.0	6.2
0.5		3.9	4.4	4.8	5.6	6.2	7.0	7.7	7.9
1.0		5.3	6.0	6.6	7.7	8.7	9.8	10.8	11.1
1.5		6.2	7.1	7.9	9.3	10.5	11.9	13.1	13.5
2.0		6.9	8.0	8.9	10.6	12.0	13.6	15.0	15.5
2.5		7.4	8.7	9.7	11.6	13.2	15.0	16.6	17.2
3.0		7.7	9.2	10.4	12.5	14.3	16.2	18.0	18.7
3.5		7.9	9.5	10.9	13.2	15.2	17.3	19.3	20.0
4.0		8.0	9.8	11.3	13.9	16.0	18.3	20.4	21.2
5.0				11.8	14.8	17.3	20.0	22.4	23.2
6.0				12.0	15.5	18.3	21.4	24.0	25.0
7.0					15.9	19.1	22.4	25.4	26.5
8.0					16.0	19.6	23.3	26.5	27.7
10.0						20.0	24.5	28.3	29.7

Performance Test

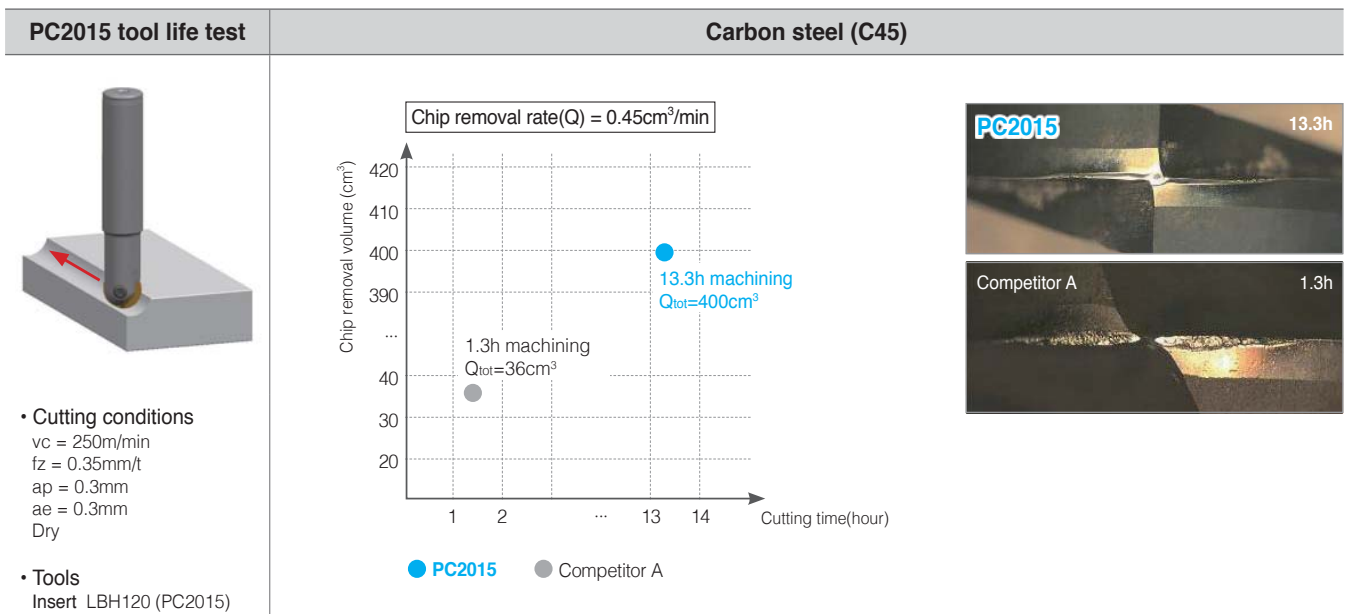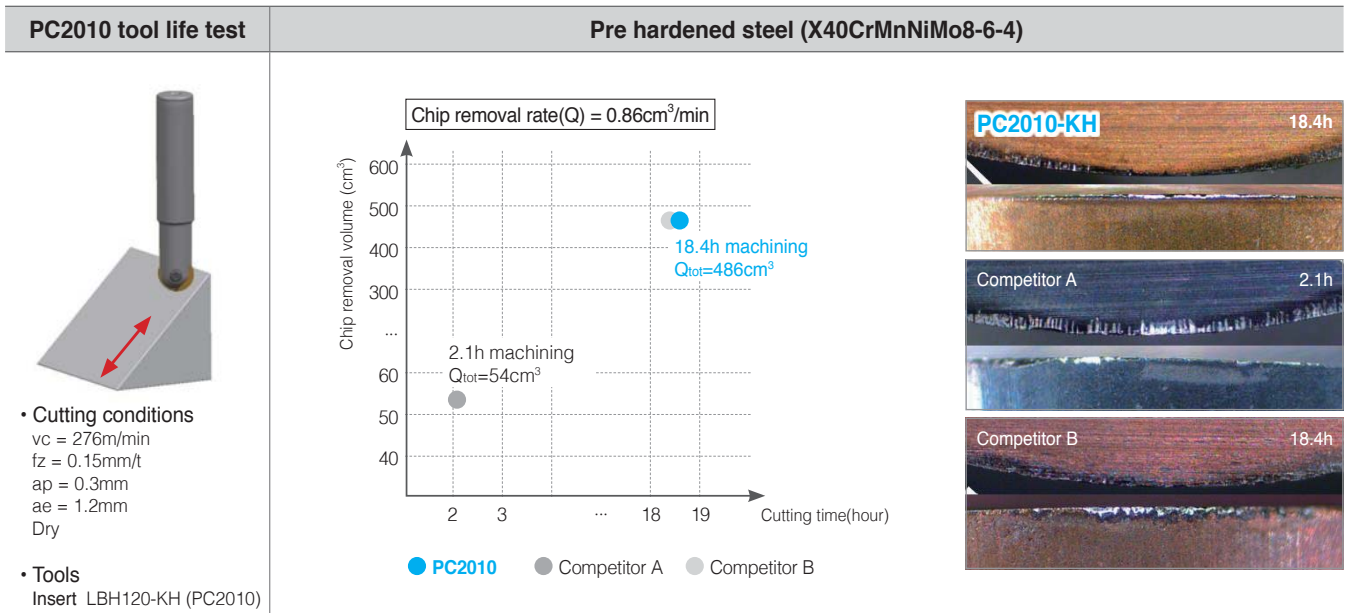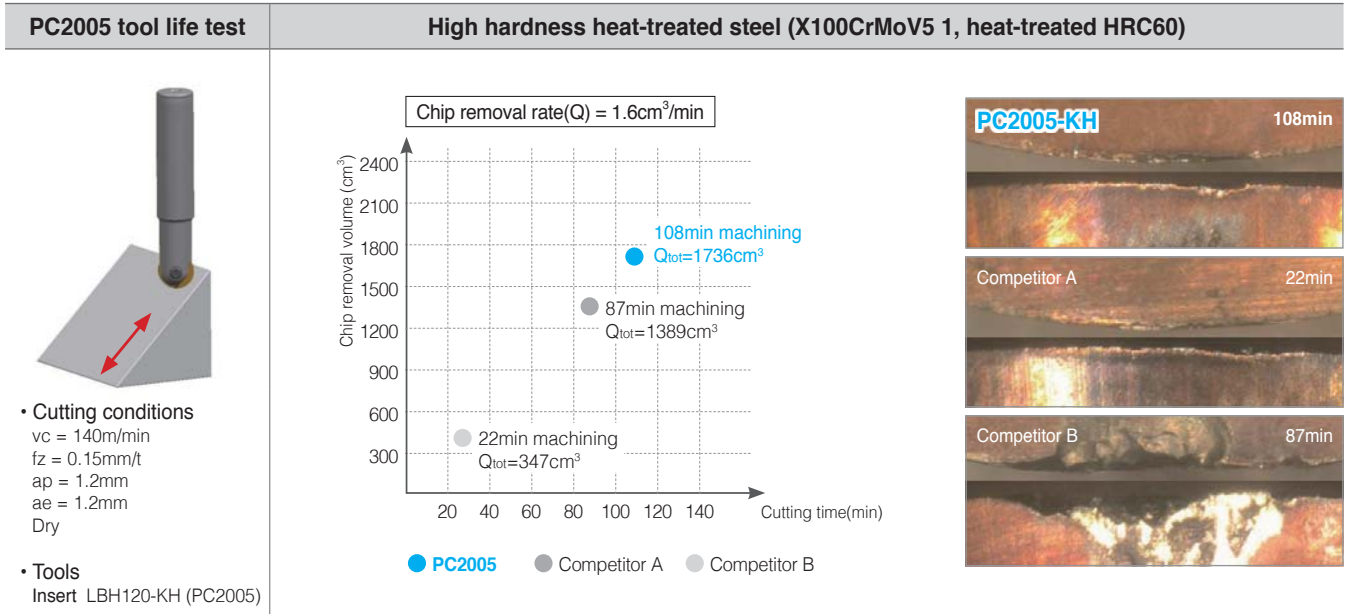

Available Inserts

	LBH (Ball type)	LRH (Corner radius type)	LFH (High feed type)	LCF (Chamfer type)	LBS(Ball type)	LR(Corner radius type)
Holders	 R accuracy ± 0.005	 Corner R ± 0.015			 R accuracy ± 0.005	 Corner R ± 0.015
LBE080	LBH080 LBH090 LBH080-KF LBH090-KF LBH080-KH LBH090-KH				LBS080 LBS090	
LBE100 LRE100	LBH100 LBH110 LBH100-KF LBH110-KF LBH100-KH LBH110-KH	LRH100-R05 LRH100-R20 LRH100-R10 LRH110-R05	LFH100		LBS100 LBS110	LR100-R05 LR100-R20 LR100-R10 LR110-R05
LBE120 LRE120	LBH120 LBH130 LBH120-KF LBH130-KF LBH120-KH LBH130-KH	LRH120-R05 LRH120-R20 LRH120-R10 LRH130-R05	LFH120		LBS120 LBS130	LR120-R05 LR120-R20 LR120-R10 LR130-R05
LBE160 LRE160	LBH160 LBH170 LBH160-KF LBH170-KF LBH160-KH LBH170-KH	LRH160-R05 LRH160-R30 LRH160-R10 LRH170-R05 LRH160-R20	LFH160	LCF160-D90	LBS160 LBS170	LR160-R05 LR160-R30 LR160-R10 LR170-R05 LR160-R20
LBE200 LRE200	LBH200 LBH210 LBH200-KF LBH210-KF LBH200-KH LBH210-KH	LRH200-R05 LRH200-R30 LRH200-R10 LRH210-R05 LRH200-R20	LFH200	LCF200-D90	LBS200 LBS210	LR200-R05 LR200-R30 LR200-R10 LR210-R05 LR200-R20
LBE250 LRE250	LBH250 LBH260 LBH250-KF LBH260-KF LBH250-KH LBH260-KH	LRH250-R05 LRH250-R30 LRH250-R10 LRH260-R05 LRH250-R20	LFH250	LCF250-D90	LBS250 LBS260	LR250-R05 LR250-R30 LR250-R10 LR260-R05 LR250-R20
LBE300 LRE300	LBH300 LBH310 LBH300-KF LBH310-KF LBH300-KH LBH310-KH	LRH300-R10 LRH300-R30 LRH300-R20 LRH310-R05	LFH300		LBS300 LBS310	LR300-R10 LR300-R30 LR300-R20 LR310-R05
LBE320 LRE320	LBH320 LBH320-KF LBH320-KH	LRH320-R10 LRH320-R30 LRH320-R20	LFH320		LBS320	LR320-R10 LR320-R30 LR320-R20

Available Inserts E07, E08



Long tool life due to high hardness grade

GBE

- Indexable Ballnose Endmill for Molds in medium & roughing applications
- Long tool life with high hardness grade
- Helical high accuracy cutting edge
- Optimized mold machining process with our internal coolant system
- Able to adjust to medium processing in middle & big roughing mold process
- Various holders in normal & long style holders



▶ Holder Code System

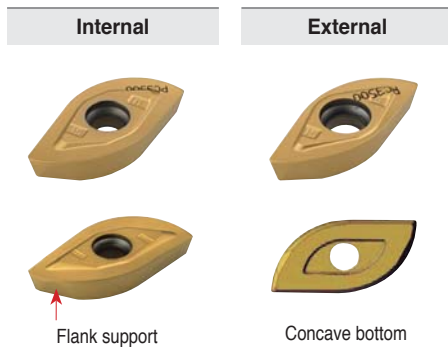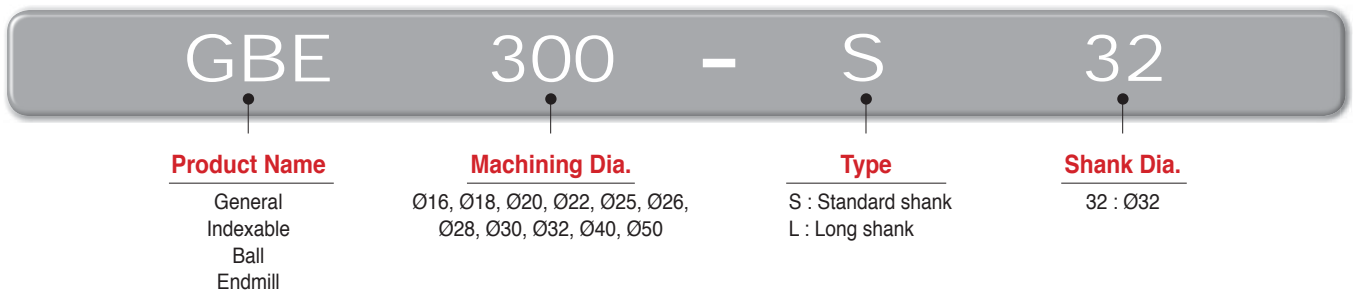


- ▶ Ability to handle high accuracy & large depth of cut applications.
 - Run-out : within 0.05mm
 - R accuracy : within 0.05mm
- ▶ Various diameters (Ø16,20,25,30,32,40,50)
- ▶ Minimal cutting resistance due to Helical cutting edge
- ▶ Anti-rotation of insert due to concave bottom & stable setting by flank support
- ▶ Long tool life & better processing due to 2 cutting inserts
- ▶ Better tool life with new grade





- ▶ Various diameters (Ø16,20,25,30,32,40,50)
- ▶ Improved chip treatment with internal coolant(cutting edge portion)
- ▶ Long tool life & better processing
- ▶ Easy insert setting with projection part to prevent vibration during processing

▶ How to set insert

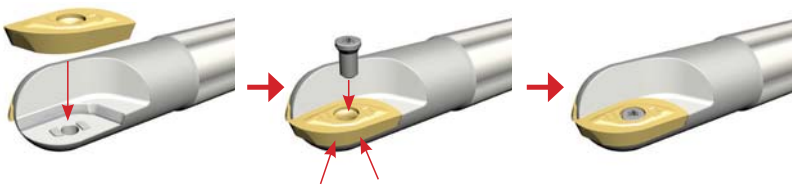

1. Set the insert to the holder projection seat
2. Push the insert into the pocket as shown by red arrows and screw down with wrench

▶ Cutting Performance Test

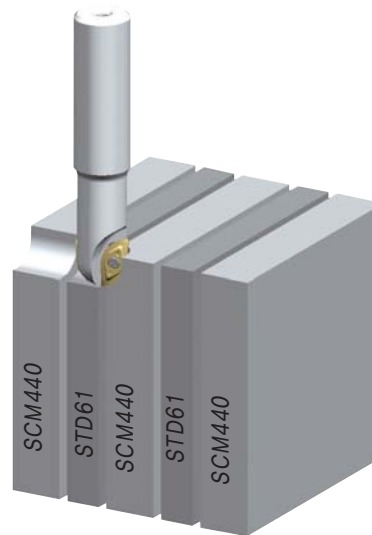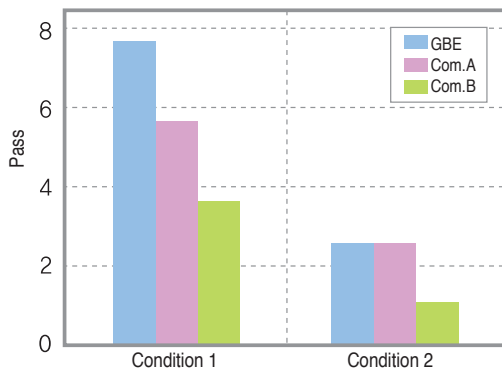

▶ Cutting condition

Class.	Cutting speed(vc)	Feed(fz)	Depth of cut(ap)	Depth of cut(ae)	Workpiece	Etc.
Condition 1	150m/min	0.15mm/t	5mm	8mm	STD61(HrC50) + SCM440(HrC20)	Dry
Condition 2	100m/min	0.1mm/t	8mm	8mm		


▶ Inserts / Parts

Type	Insert			Parts			
	Internal I/S	External I/S	External main I/S	Screw		Wrench	
Dia.	Internal I/S	External I/S	External main I/S	Int./Ext. type	Ext. main type	Int./Ext. type	Ext. main type
Ø16	ZPET080M-MM	ZPET080S-MM	-	FTKA02555S	-	TW08S	-
Ø18	ZPET090M-MM	ZPET090S-MM	-	FTKA0307	-	TW09S	-
Ø20	ZPET100M-MM	ZPET100S-MM	SPMT060304	FTKA0307	ETNA02506	TW09S	TW07P
Ø22	ZPET110M-MM	ZPET110S-MM	SPMT060304	FTKA0408	ETNA02506	TW15S	TW07P
Ø25	ZPET125M-MM	ZPET125S-MM	SPMT060304	FTKA0409	ETNA02506	TW15S	TW07P
Ø26	ZPET130M-MM	ZPET130S-MM	SDMT090308-MM	FTKA0409	ETNA0408	TW15S	TW15S
Ø28	ZPET140M-MM	ZPET140S-MM	SDMT090308-MM	FTGA0511-P	ETNA0408	TW20	TW15S
Ø30	ZPET150M-MM	ZPET150S-MM	SDMT090308-MM	FTGA0511-P	ETNA0408	TW20-100	TW15S
Ø32	ZPET160M-MM	ZPET160S-MM	SDMT090308-MM	FTGA0511-P	ETNA0408	TW20-100	TW15S
Ø40	ZPET200M-MM	ZPET200S-MM	SPMT120408-MM	FTGA0614	ETNA0511	TW20-100	TW20S
Ø50	ZPET250M-MM	ZPET250S-MM	SPMT120408-MM	FTGA0818	ETNA0511	TW25S	TW20S

Recommended cutting condition

Workpiece	Machining type	Hardness (HRC)	vc(m/min)	fz(mm/t)	ap(mm)	ae(mm)
Carbon, Alloy steel	Flank	Under 25	160~250	0.1~0.5	0.3~0.5D	0.2~0.3D
	Groove		120~200	0.1~0.5	0.3~0.5D	-
	Deep flank		160~250	0.1~0.5	1.0~1.5D	0.1~0.2D
Carbon, Alloy steel	Flank	Under 45	120~200	0.1~0.5	0.3~0.5D	0.2~0.3D
	Groove		120~160	0.1~0.5	0.3~0.5D	-
	Deep flank		120~200	0.1~0.5	1.0~1.5D	0.1~0.2D
Mold Alloy steel	Flank	30~40	120~200	0.1~0.3	0.3~0.5D	0.2~0.3D
	Groove		120~160	0.1~0.3	0.3~0.5D	-
	Deep flank		120~200	0.1~0.3	1.0~1.5D	0.1~0.2D
Cast iron(GC, GCD)	Flank	20~30	150~300	0.2~0.7	0.3~0.5D	0.2~0.3D
	Groove		150~300	0.2~0.7	0.3~0.5D	-
	Deep flank		150~300	0.2~0.7	1.0~1.5D	0.1~0.2D
Heat treatment steel	Flank	50~60	40~100	0.1~0.3	0.3~0.5D	0.2~0.3D
	Groove		40~100	0.1~0.3	0.3~0.5D	-
	Deep flank		40~100	0.1~0.3	1.0~1.5D	0.1~0.2D



Line-up for Indexable ball Endmill

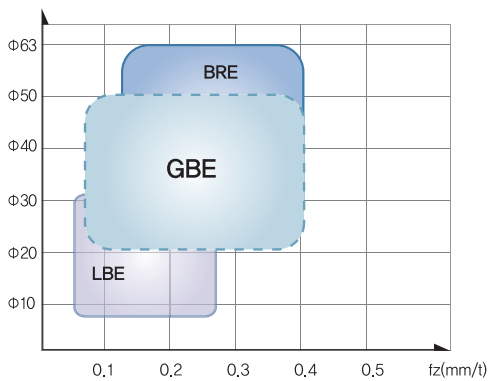

Type	Application				
	Machining Dignity	Machining Efficiency	Machining Dia. Equivalence	Economical	Flank Machining with LongEdge
Laser Mill	●	○	◐	○	○
GBE	◐	●	◐	◐	●
BRE	○	●	●	●	●

● : Very Good ◐ : Good ○ : Normal

Test Result for wear resistance


Cutting condition		Wear resistance photos				
			GBE	Com.A	Com.B	
 <p>Cutting time : 4 Pass</p>	<ul style="list-style-type: none"> • Workpiece KP4M(HrC33), Dry • Condition vc = 280m/min fz = 0.25mm/t ap = 5~10mm ae = 5~10mm vf = 1,486mm/min n = 2,971rpm • Tool Holder : GBE300-S32 Insert : ZPET150M-MM(PC3500) ZPET150S-MM(PC3500) 	Top	Internal			
			External			
		Flank	Internal			
			External			
 <p>Cutting time : 4 Pass</p>	<ul style="list-style-type: none"> • Workpiece STD11(HrC20), Dry • Condition vc = 250m/min fz = 0.2mm/t ap = 5mm ae = 5mm vf = 1,062mm/min n = 2,653rpm • Tool Holder : GBE300-S32 Insert : ZPET150M-MM(PC3500) ZPET150S-MM(PC3500) 	Top	Internal			
			External			
		Flank	Internal			
			External			




Better tool life and anti-breakage with special surface treatment on the holder

BRE

- Cutting Performance : Good chip control & Superior cutting performance with optimal cutting edge line
- High rigidity body : Better tool life and special surface treatment to strengthen the holder
Easy to set and good durability with TCRX screw
Good chip control with our 3D flute design & improved external quality
- Insert : Able to apply in high speed & feed applications due to special grade which has wear & breakage resistance and stable cutting performance with high cutting edge toughness & high rake angle chip breaker

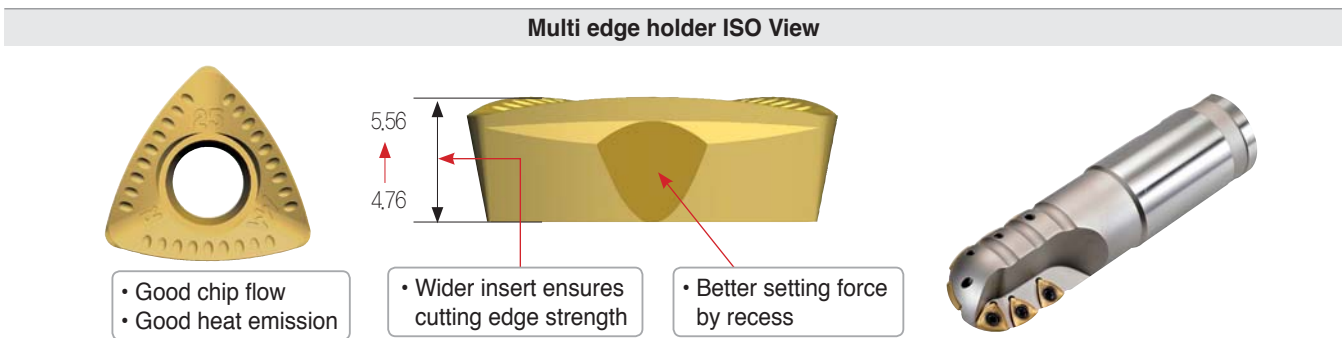

BRE machining type for roughing & Recommended cutting condition

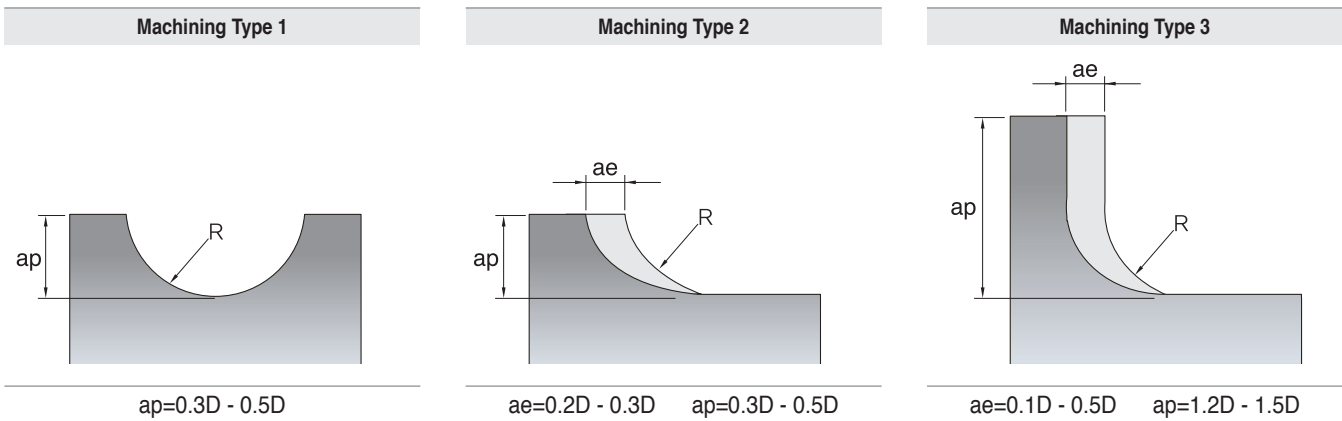

Workpiece	Machining Type	Velocity(m/min)	Feed(mm/t)	Grade
Carbon / Alloy steel	1	120~220	0.1~0.4	NCM325
	2	120~220	0.2~0.4	NCM325
	3	100~180	0.1~0.3	NCM325
Alloy steel	1	100~200	0.1~0.4	NCM325
	2	100~200	0.2~0.4	NCM325
	3	80~160	0.1~0.3	NCM325
Tool steel	1	80~150	0.1~0.3	NCM325
	2	80~150	0.15~0.35	NCM325
	3	60~120	0.1~0.3	NCM325
High hardness material (Hr35-45)	1	60~120	0.1~0.3	NCM325
	2	60~120	0.1~0.3	NCM325
	3	50~80	0.1~0.2	NCM325
Cast iron	1	100~180	0.2~0.5	NCM320K
	2	100~180	0.2~0.5	NCM320K
	3	80~160	0.15~0.4	NCM320K

Steel Shank (Ball type)

LBE 08/10/12/16/20/25/30/32

Straight type

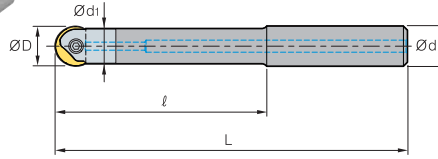


Fig. 1

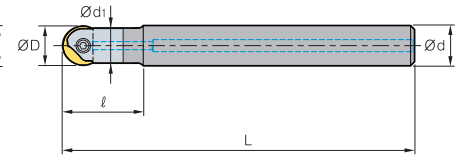


Fig. 2



(mm)

Designation	Stock	Dimensions					Parts		Available Inserts(Ø)	Fig.
		ØD	Ød	Ød1	ℓ	L	Clamp Screw	Wrench		
LBE 080080S-S08C	●	8, 9	8	7.5	80	136	ETND02506F	TWP07S	8,9	1
080100S-S08C	●	8, 9	8	7.5	100	156				
080020S-S08C-130	●	8, 9	8	7.5	20	130	ETND02506F	TWP07S	8,9	2
080020S-S08C-150	●	8, 9	8	7.5	20	150				
100080S-S10C	●	10, 11	10	9.5	80	136	ETND0307F	TWP08S	10, 11	1
100120S-S10C	●	10, 11	10	9.5	120	176				
100023S-S10C-130	●	10, 11	10	9.5	23	130	ETND0307F	TWP08S	10, 11	2
100023S-S10C-170	●	10, 11	10	9.5	23	170				
120100S-S12C	●	12, 13	12	11.5	100	156	ETND03509	TWP10S	12,13	1
120150S-S12C	●	12, 13	12	11.5	150	206				
120025S-S12C-150	●	12, 13	12	11.5	25	150	ETND03509	TWP10S	12,13	2
120025S-S12C-200	●	12, 13	12	11.5	25	200				
160100S-S16C	●	16, 17	16	15.5	100	160	ETND0413	TWP15S	16,17	1
160150S-S16C	●	16, 17	16	15.5	150	210				
160030S-S16C-160	●	16, 17	16	15.5	30	160	ETND0413	TWP15S	16,17	2
160030S-S16C-210	●	16, 17	16	15.5	30	210				
200120S-S20C	●	20, 21	20	19.5	120	190	ETKD0516	TWP20	20,21	1
200170S-S20C	●	20, 21	20	19.5	170	240				
200035S-S20C-190	●	20, 21	20	19.5	35	190	ETKD0516	TWP20	20,21	2
200035S-S20C-240	●	20, 21	20	19.5	35	240				
250140S-S25C		25, 26	25	24.5	140	220	ETKD0620	TWP25	25,26	1
250170S-S25C		25, 26	25	24.5	170	250				
250040S-S25C-220		25, 26	25	24.5	40	220	ETKD0620	TWP25	25,26	2
250040S-S25C-250		25, 26	25	24.5	40	250				
300140S-S32C		30, 31	32	29.5	140	230	ETGD0825	TWP40	30,31	1
300170S-S32C		30, 31	32	29.5	170	260				
300050S-S32C-230		30, 31	32	29.5	50	230	ETGD0825	TWP40	30,31	2
300050S-S32C-260		30, 31	32	29.5	50	260				
320140S-S32C		32	32	31.5	140	230	ETGD0825	TWP40	32	1
320170S-S32C	●	32	32	31.5	170	260				
320050S-S32C-230		32	32	31.5	50	230	ETGD0825	TWP40	32	2
320050S-S32C-260		32	32	31.5	50	260				

Available Inserts E07, E08


● Stock item



Steel Shank (Ball type)

Taper type

LBE 08/10/12/16/20/25/30/32

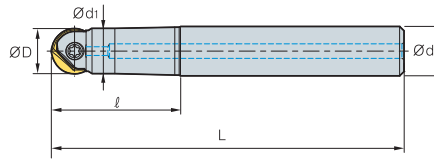


Designation	Stock	Dimensions					Parts		Available Inserts(Ø)
		ØD	Ød	Ød ₁	l	L	Clamp Screw	Wrench	
LBE 080035T-S12	●	8, 9	12	7.5	35	91	ETND02506F	TWP07S	8, 9
080055T-S12	●	8, 9	12	7.5	55	111			
080075T-S12	●	8, 9	12	7.5	75	131			
100035T-S12	●	10, 11	12	9.5	35	91	ETND0307F	TWP08S	10, 11
100055T-S12	●	10, 11	12	9.5	55	111			
100075T-S12	●	10, 11	12	9.5	75	131			
120055T-S12	●	12, 13	12	10.4	55	111	ETND03509	TWP10S	12, 13
120085T-S16	●	12, 13	16	11.5	85	145			
160065T-S16	●	16, 17	16	14	65	125			
160100T-S20	●	16, 17	20	15.5	100	170	ETND0413	TWP15S	16, 17
200075T-S20	●	20, 21	20	17.5	75	145			
200115T-S25	●	20, 21	25	19.5	115	195			
250090T-S25	●	25, 26	25	22	90	170	ETKD0620	TWP25	25, 26
250135T-S32	●	25, 26	32	24.5	135	225			
300105T-S32	●	30, 31	32	29.5	105	195			
300160T-S32	●	30, 31	32	29.5	160	250	ETGD0825	TWP40	30, 31
320105T-S32	●	32	32	29	105	195			
320160T-S32	●	32	32	29	160	250			

● Stock item

Steel Shank (Ball type)

Straight type

LBE12 / 16 / 20 / 25 / 30 / 32

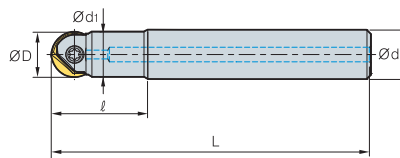

Designation	Stock	Dimensions					Parts		Available Inserts(Ø)
		ØD	Ød	Ød ₁	l	L	Clamp Screw	Wrench	
LBE 120035S-S12	●	12, 13	12	11.5	35	91	ETND03509	TWP10S	12,13
160035S-S16	●	16, 17	16	15.5	35	95	ETND0413	TWP15S	16,17
200040S-S20	●	20, 21	20	19.5	40	110	ETKD0516	TWP20	20,21
250045S-S25	●	25, 26	25	24.5	40	125	ETKD0620	TWP25	25,26
300055S-S32	●	30, 31	32	29.5	55	145	ETGD0825	TWP40	30,31
320055S-S32	●	32	32	31.5	55	145	ETGD0825	TWP40	32

● Stock item

➔ Available Inserts E07, E08



Carbide Shank (Corner R type) LRE 10/12/16/20/25/30/32

Straight type

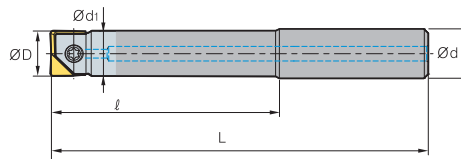


Fig. 1

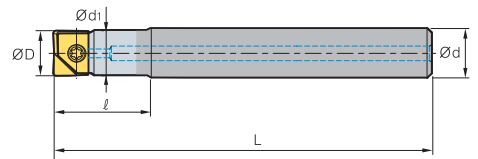


Fig. 2




(mm)

Designation	Stock	Dimensions					Parts		Available Inserts(Ø)	Fig.
		ØD	Ød	Ød ₁	ℓ	L	Clamp Screw	Wrench		
LBE 100080S-S10C	●	10, 11	10	9.5	80	136	ETND0307F	TWP08S	10, 11	1
100120S-S10C	●	10, 11	10	9.5	120	176				
100023S-S10C-130	●	10, 11	10	9.5	23	130	ETND0307F	TWP08S	10, 11	2
100023S-S10C-170	●	10, 11	10	9.5	23	170				
120100S-S12C	●	12, 13	12	11.5	100	156	ETND03509	TWP10S	12,13	1
120150S-S12C	●	12, 13	12	11.5	150	206				
120025S-S12C-150	●	12, 13	12	11.5	25	150	ETND03509	TWP10S	12,13	2
120025S-S12C-200	●	12, 13	12	11.5	25	200				
160100S-S16C	●	16, 17	16	15.5	100	160	ETND0413	TWP15S	16,17	1
160150S-S16C	●	16, 17	16	15.5	150	210				
160030S-S16C-160	●	16, 17	16	15.5	30	160	ETND0413	TWP15S	16,17	2
160030S-S16C-210	●	16, 17	16	15.5	30	210				
200120S-S20C	●	20, 21	20	19.5	120	190	ETKD0516	TWP20	20,21	1
200170S-S20C	●	20, 21	20	19.5	170	240				
200035S-S20C-190	●	20, 21	20	19.5	35	190	ETKD0516	TWP20	20,21	2
200035S-S20C-240	●	20, 21	20	19.5	35	240				
250140S-S25C		25, 26	25	24.5	140	220	ETKD0620	TWP25	25,26	1
250170S-S25C		25, 26	25	24.5	170	250				
250040S-S25C-220		25, 26	25	24.5	40	220	ETKD0620	TWP25	25,26	2
250040S-S25C-250		25, 26	25	24.5	40	250				
300140S-S32C		30, 31	32	29.5	140	230	ETGD0825	TWP40	30,31	1
300170S-S32C		30, 31	32	29.5	170	260				
300050S-S32C-230		30, 31	32	29.5	50	230	ETGD0825	TWP40	30,31	2
300050S-S32C-260		30, 31	32	29.5	50	260				
320140S-S32C		32	32	31.5	140	230	ETGD0825	TWP40	32	1
320170S-S32C		32	32	31.5	170	260				
320050S-S32C-230		32	32	31.5	50	230	ETGD0825	TWP40	32	2
320050S-S32C-260		32	32	31.5	50	260				

● Stock item

Steel Shank (Corner R type) LRE 10 / 12

Taper type

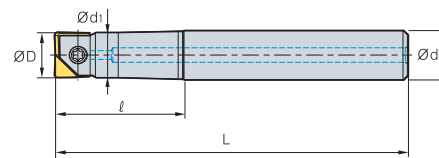

(mm)


Designation	Stock	Dimensions					Parts		Available Inserts(Ø)
		ØD	Ød	Ød ₁	ℓ	L	Clamp Screw	Wrench	
LBE 100025T-S12		10, 11	12	9.5	25	111	ETND0307F	TWP08S	10,11
100050T-S12		10, 11	12	9.5	50	150			
120060T-S16		12, 13	16	11.5	60	160	ETND03509	TWP10S	12,13

● Stock item



Steel Shank (Corner R type) LRE 12/16/25/30/32

Straight type

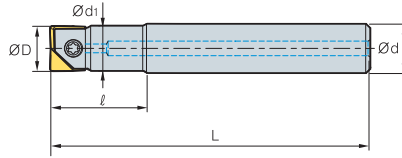

(mm)


Designation	Stock	Dimensions					Parts		Available Inserts(Ø)
		ØD	Ød	Ød ₁	ℓ	L	Clamp Screw	Wrench	
LBE 120030S-S12		12, 13	12	11.5	30	111	ETND03509	TWP10S	12, 13
160050S-S16		16, 17	16	15.5	50	131	ETND0413	TWP15S	16, 17
160060S-S16		16, 17	16	15.5	60	160			
200060S-S20		20, 21	20	19.5	60	145	ETKD0516	TWP20	20, 21
200080S-S20		20, 21	20	19.5	80	180	ETKD0620	TWP25	25, 26
250070S-S25		25, 26	25	24.5	70	145			
250100S-S25		25, 26	25	24.5	100	225	ETGD0825	TWP40	30, 31
300070S-S32		30, 31	32	29.5	70	160			
300100S-S32		30, 31	32	29.5	100	225	ETGD0825	TWP40	32
320080S-S32		32	32	31.5	80	160			
320100S-S32		32	32	31.5	100	225			

Available Inserts E07, E08

• T stands for taper type, S stands for straight type

● Stock item

LBE-MHD

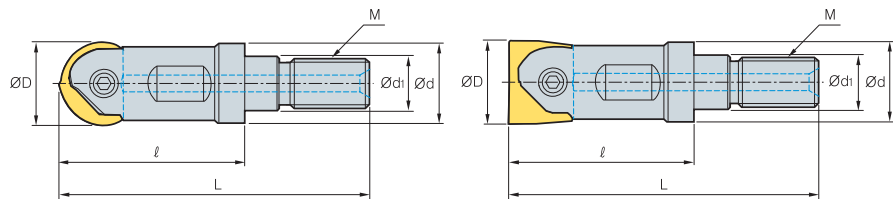

(mm)

Designation	Stock	Dimensions							Parts		Available Inserts(Ø)
		M	ØD	L	ℓ	Ød	Ød ₁	Clamp Screw	Wrench		
LBE 100-MHD-M06	●	M06	10, 11	40	25	9.5	6.5	ETND0307F	TWP08S	10, 11	
120-MHD-M06	●	M06	12, 13	40	25	11	6.5	ETND03509	TWP10S	12, 13	
160-MHD-M08	●	M08	16, 17	47	30	14.5	8.5	ETND0413	TWP15S	16, 17	
200-MHD-M10	●	M10	20, 21	56	35	18	10.5	ETKD0516	TWP20	20, 21	
250-MHD-M12	●	M12	25, 26	69	45	22.5	12.5	ETKD0620	TWP25	25, 26	
300-MHD-M16	●	M16	30, 31	77	50	28	17	ETGD0825	TWP40	30, 31	
320-MHD-M16	●	M16	32	77	50	29	17	ETGD0825	TWP40	32	

● Stock item

Designation : LBE320-MHD-M16
Modular Head Threading Measure size(M16)

=

Adaptor Spec. : MAT-M16-035-S32S
Adaptor Threading Measure(M16)

Available Inserts E07, E08

Available Adaptors E253~E254

BFE

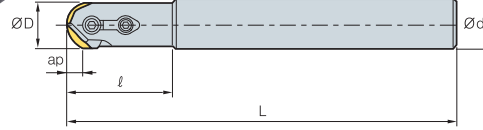


Fig. 1

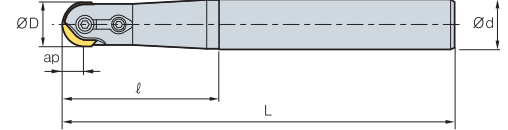


Fig. 2



(mm)

Designation	Stock	ØD	Ød	ℓ	L	ap		Fig.	Available Inserts
BFE 16-S	●	16	16	36	140	8.0	0.2	1	RC16
16-M	●	16	20	65	170	8.0	0.3	2	
16-L	●	16	25	65	200	8.0	0.5	2	
20-S	●	20	20	45	160	10.0	0.4	1	RC20
20-M	●	20	25	80	200	10.0	0.6	2	
20-L	●	20	25	80	250	10.0	0.8	2	RC25
25-S		25	25	45	160	12.5	0.7	1	
25-M	●	25	32	90	210	12.5	1.1	2	
25-L		25	32	90	300	12.5	1.7	2	RC30
30-S		30	32	65	175	15.0	0.9	2	
30-M		30	32	100	250	15.0	1.4	2	
30-L		30	32	100	350	15.0	2.0	2	RC32
32-S		32	32	56	175	16.0	0.9	1	
32-M	●	32	32	100	250	16.0	1.4	1	
32-L	●	32	32	100	350	16.0	2.0	1	

● Stock item

▶ Available Inserts



RC

Designation	Coated	Page
	PC210F	
RC 16	●	E12
20	●	
25	●	
30		
32	●	

▶ Recommended cutting condition

Workpiece	Cutting Condition	
	vc(m/min)	fz(mm/t)
General steel(SS41, SM25C) Over HB180	150 ~ 250	0.10 ~ 0.30
Alloy steel(SM55C, SCM) Under HB300	100 ~ 200	0.10 ~ 0.20
Cast iron Under HB300	100 ~ 200	0.10 ~ 0.30

▶ Parts

Specification					
	Screw	Clamp	Clamp Screw	Stopper Ring	Wrench
Ø16	FTGA0513	CBH4.5R1	CTX04513	ER03	TW20
Ø20	FTGA0517	CBH4.5R2	CTX04513	ER03	TW20
Ø25	FTGA0621	CBH5R1	CTX0517	ER04	TW20
Ø30, 32	FTGA0826	CBH6R1	CTX0621	ER05	TW25

Available Inserts E12



GBE (Single Edge)




Fig. 1




Fig. 2




Fig. 2



(mm)

Designation	Stock	Dimensions					Available Inserts			Parts				Fig.
		ØD	Ød	l	L	ap	Internal	External	Ext. main	Screw		Wrench		
										Int./Ext. type	Ext. main type	Int./Ext. type	Ext. main type	
GBE 160-S20		16	20	50	130	15	ZPET080M-MM	ZPET080S-MM	-	FTKA02555S	-	TW08S	-	1
160-L20		16	20	90	200	15	ZPET080M-MM	ZPET080S-MM	-	FTKA02555S	-	TW08S	-	1
180-S20		18	20	60	130	17	ZPET090M-MM	ZPET090S-MM	-	FTKA0307	-	TW09S	-	1
180-L20		18	20	80	200	17	ZPET090M-MM	ZPET090S-MM	-	FTKA0307	-	TW09S	-	1
200-S25	●	20	25	60	140	18	ZPET100M-MM	ZPET100S-MM	-	FTKA0307	-	TW09S	-	1
200-L25	●	20	25	80	250	18	ZPET100M-MM	ZPET100S-MM	-	FTKA0307	-	TW09S	-	1
220-S25		22	25	70	140	21	ZPET110M-MM	ZPET110S-MM	-	FTKA0408	-	TW15S	-	1
220-L25		22	25	100	250	21	ZPET110M-MM	ZPET110S-MM	-	FTKA0408	-	TW15S	-	1
250-S32	●	25	32	70	150	23	ZPET125M-MM	ZPET125S-MM	-	FTKA0409	-	TW15S	-	1
250-L32	●	25	32	100	300	23	ZPET125M-MM	ZPET125S-MM	-	FTKA0409	-	TW15S	-	1
260-S32		26	32	70	150	24.5	ZPET130M-MM	ZPET130S-MM	-	FTKA0409	-	TW15S	-	1
260-L32		26	32	100	300	24.5	ZPET130M-MM	ZPET130S-MM	-	FTKA0409	-	TW15S	-	1
280-S32		28	32	70	150	26	ZPET140M-MM	ZPET140S-MM	-	FTGA0511-P	-	TW20	-	1
280-L32		28	32	120	300	26	ZPET140M-MM	ZPET140S-MM	-	FTGA0511-P	-	TW20	-	1
300-S32		30	32	70	160	27	ZPET150M-MM	ZPET150S-MM	-	FTGA0511-P	-	TW20-100	-	2
300-L32	●	30	32	120	350	27	ZPET150M-MM	ZPET150S-MM	-	FTGA0511-P	-	TW20-100	-	2
320-S32	●	32	32	70	160	28	ZPET160M-MM	ZPET160S-MM	-	FTGA0511-P	-	TW20-100	-	2
320-L32	●	32	32	120	350	28	ZPET160M-MM	ZPET160S-MM	-	FTGA0511-P	-	TW20-100	-	2
400-S42	●	40	42	100	200	37	ZPET200M-MM	ZPET200S-MM	-	FTGA0614	-	TW20-100	-	2
400-L42		40	42	150	350	37	ZPET200M-MM	ZPET200S-MM	-	FTGA0614	-	TW20-100	-	2
500-S42		50	42	100	200	47	ZPET250M-MM	ZPET250S-MM	-	FTGA0818	-	TW25-100	-	3
500-L42		50	42	100	350	47	ZPET250M-MM	ZPET250S-MM	-	FTGA0818	-	TW25-100	-	3

Available Inserts E23

● Stock item

GBE-M (Multi Edge)




Fig. 1




Fig. 2




Fig. 3




Designation	Stock	Dimensions						Available Inserts			Parts				Fig.
		ØD	Ød	l	L	ap	Internal	External	Ext. main	Screw		Wrench			
										Int./Ext. type	Ext. main type	Int./Ext. type	Ext. main type		
GBE 200M-S25	●	20	25	70	150	28	ZPET100M-MM	ZPET100S-MM	SPMT060304	FTKA0307	ETNA02506	TW09S	TW07P	1	
200M-L25	●	20	25	70	250	28	ZPET100M-MM	ZPET100S-MM	SPMT060304	FTKA0307	ETNA02506	TW09S	TW07P	1	
220M-S25		22	25	80	150	31	ZPET110M-MM	ZPET110S-MM	SPMT060304	FTKA0408	ETNA02506	TW15S	TW07P	1	
220M-L25		22	25	80	250	31	ZPET110M-MM	ZPET110S-MM	SPMT060304	FTKA0408	ETNA02506	TW15S	TW07P	1	
250M-S32		25	32	80	180	33	ZPET125M-MM	ZPET125S-MM	SPMT060304	FTKA0409	ETNA02506	TW15S	TW07P	1	
250M-L32	●	25	32	80	300	33	ZPET125M-MM	ZPET125S-MM	SPMT060304	FTKA0409	ETNA02506	TW15S	TW07P	1	
260M-S32		26	32	80	180	39	ZPET130M-MM	ZPET130S-MM	SDMT090308-MM	FTKA0409	ETNA0408	TW15S	TW15S	1	
260M-L32		26	32	80	300	39	ZPET130M-MM	ZPET130S-MM	SDMT090308-MM	FTKA0409	ETNA0408	TW15S	TW15S	1	
280M-S32		28	32	80	180	41	ZPET140M-MM	ZPET140S-MM	SDMT090308-MM	FTGA0511-P	ETNA0408	TW20	TW15S	1	
280M-L32		28	32	80	300	41	ZPET140M-MM	ZPET140S-MM	SDMT090308-MM	FTGA0511-P	ETNA0408	TW20	TW15S	1	
300M-S32	●	30	32	100	200	41	ZPET150M-MM	ZPET150S-MM	SDMT090308-MM	FTGA0511-P	ETNA0408	TW20-100	TW15S	1	
300M-L32	●	30	32	100	350	41	ZPET150M-MM	ZPET150S-MM	SDMT090308-MM	FTGA0511-P	ETNA0408	TW20-100	TW15S	1	
320M-S32	●	32	32	100	200	42	ZPET160M-MM	ZPET160S-MM	SDMT090308-MM	FTGA0511-P	ETNA0408	TW20-100	TW15S	2	
320M-L32	●	32	32	100	350	42	ZPET160M-MM	ZPET160S-MM	SDMT090308-MM	FTGA0511-P	ETNA0408	TW20-100	TW15S	2	
400M-S42		40	42	100	200	56	ZPET200M-MM	ZPET200S-MM	SPMT120408-MM	FTGA0614	ETNA0511	TW20-100	TW20S	2	
400M-L42		40	42	100	350	56	ZPET200M-MM	ZPET200S-MM	SPMT120408-MM	FTGA0614	ETNA0511	TW20-100	TW20S	2	
500M-S42		50	42	100	200	67	ZPET250M-MM	ZPET250S-MM	SPMT120408-MM	FTGA0818	ETNA0511	TW25-100	TW20S	3	
500M-L42		50	42	100	350	67	ZPET250M-MM	ZPET250S-MM	SPMT120408-MM	FTGA0818	ETNA0511	TW25-100	TW20S	3	

➔ Available Inserts E23

● Stock item



GBEM

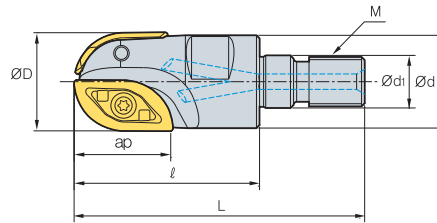

Designation	Stock	Dimensions							Available Inserts	
		ØD	Ød	Ød ₁	ℓ	L	M	ap	Internal	External
GBEM	160-M08	16	15	8.5	30	47	M08	15	ZPET080M-MM	ZPET080S-MM
	200-M10	20	18.6	10.5	35	56	M10	18	ZPET100M-MM	ZPET100S-MM
	250-M12	25	23.2	12.5	45	69	M12	23	ZPET125M-MM	ZPET125S-MM
	300-M16	30	27.8	17	50	77	M16	27	ZPET150M-MM	ZPET150S-MM
	320-M16	32	29.8	17	50	77	M16	28	ZPET160M-MM	ZPET160S-MM

(mm)

● Stock item

▶ Available Inserts



Designation	Coated				Page	
	NCM325	PC3500	PC5300	PC3545		
ZPET	080M-MM				E23	
	090M-MM	●	●			
	100M-MM	●	●			
	110M-MM	●	●			
	125M-MM	●	●			
	130M-MM	●	●			
	140M-MM	●	●			
	150M-MM	●	●			
	160M-MM	●	●			
	200M-MM	●				
	250M-MM					
ZPET	080S-MM					
	090S-MM		●			
	100S-MM		●			
	110S-MM		●			
	125S-MM		●			
	130S-MM		●			
	140S-MM		●			
	150S-MM		●			
	160S-MM		●			
	200S-MM		●			
	250S-MM					
SPMT	060304	●			E20	
SDMT	090308-MM		●	●	E14	
SPMT	120408-MM		●	●	●	E20

▶ Parts

Specification	Screw		Wrench		Cutter Dia.
	Int./Ext. type	Ext. main type	Int./Ext. type	Ext. main type	
Ø16	FTKA02555	—	TW08S	—	Ø16
Ø20	FTKA0307	ETNA02506	TW09S	TW07P	Ø20
Ø25	FTKA0409	ETNA02506	TW15S	TW07P	Ø25
Ø30	FTGA0511-P	ETNA0408	TW20-100	TW15S	Ø30
Ø32	FTGA0511-P	ETNA0408	TW20-100	TW15S	Ø32

Designation : **GBEM320-M16**
Modular Head Threading Measure size(M16)





||

Adaptor Spec. : **MAT-M16-035-S32S**
Adaptor Threading Measure(M16)

➔ Available Inserts **E14, E20, E23**



BRE

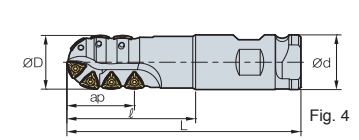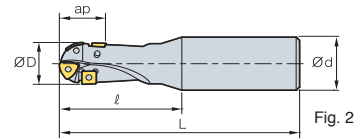

• AR : 0°~10°
• RR : -3°~0°

(mm)

Designation	Stock	Dimensions					Available Inserts		Parts		$\frac{kg}{m}$	Fig.				
		$\varnothing D$	$\varnothing d$	ℓ	L	ap	Main	Ext. main	Screw	Wrench						
BRE 20R-S	●	20	20	50	125	20	ZDMT080310R-MM	SPMT060304	ETNA02506	TW07P	0.3	1				
20R-M	●	20	20	75	150	20					0.3	1				
20R-L	●	20	25	100	200	20					0.3	2				
20R-SL	●	20	25	65	125	20					0.3	3				
25R-S	●	25	25	70	150	23	ZDMT110312.5R-MM	SPMT060304	ETNA02506	TW07P	0.5	1				
25R-M	●	25	25	95	175	23					0.5	1				
25R-L	●	25	32	100	200	23					0.4	2				
25R-SL	●	25	25	75	135	23					0.4	3				
32R-S	●	32	32	85	175	31	ZDMT130416R-MM	SDMT090308-MM	ETNA0408	TW15S	0.9	1				
32R-M	●	32	32	100	200	31					0.9	1				
32R-L	●	32	32	150	250	31					0.7	1				
32R-SL	●	32	32	75	150	31					0.7	3				
40R-S	●	40	42	85	175	41	ZPMT160520R-MM	SPMT120408-MM SPMT120508-MMN	ETNA0511	TW20-100	1.3	1				
40R-S-40	●	40	42	85	175	41					1.3	1				
40R-M	●	40	42	100	200	41					1.3	1				
40R-M-40	●	40	42	100	200	41					1.3	1				
40R-L	●	40	42	150	250	41					1.3	1				
40R-L-40	●	40	42	150	250	41					1.3	1				
40R-SL	●	40	42	80	160	41					1.3	3				
40R-SL-40	●	40	42	80	160	41					1.3	3				
50R-S	●	50	42	100	200	45	ZPMT160525R-MM	SPMT120408-MM SPMT120508-MMN	ETNA0511	TW20-100	2.6	1				
50R-S-40	●	50	42	100	200	45					2.6	1				
50R-L	●	50	42	100	300	45					2.6	1				
50R-L-40	●	50	42	100	300	45					2.6	1				
50R-SL	●	50	42	100	250	45					2.6	3				
50R-SL-40	●	50	42	100	250	45					2.6	3				
63R-S	●	63	42	100	200	52					ZPMT160531.5R-MM	SPMT120408-MM SPMT120508-MMN	ETNA0511	TW20-100	3.0	1
63R-S-40	●	63	42	100	200	52									3.0	1
63R-L	●	63	42	100	300	52	3.0	1								
63R-L-40	●	63	42	100	300	52	3.0	1								
63R-SL	●	63	42	100	250	52	3.0	3								
63R-SL-40	●	63	42	100	250	52	3.0	3								
40XR-SC40	●	40	40	110	200	54	ZPMT160520R-MM	ETNA0511	TW20-100	1.4					4	
40XR-LC40	●	40	40	150	250	54	ZPMT160525R-MM	ETNA0511	TW20-100	1.9					4	
50XR-SC50.8	●	50	50.8	110	200	57	ZPMT160525R-MM	ETNA0511	TW20-100	2.3	4					
50XR-LC50.8	●	50	50.8	150	250	57	ZPMT160525R-MM	ETNA0511	TW20-100	3.0	4					

● Stock item

▶ Available Inserts



Designation	Coated						Page
	NCM825	PC3500	PC3300	PC3525	PC3545	PC3510	
SDMT 090308-MM	●	●	●				E14
SPMT 060304	●	●	●				E20
SPMT 120408-MM		●	●		●		E20
SPMT 120508-MMN							
ZDMT 080310R-MM	●	●	●				E23
ZDMT 110312.5R-MM	●	●	●				
ZDMT 130416R-MM	●	●	●				
ZDMT 130416R-MM	●	●	●				
ZPMT 160520R-MM	●	●	●				E23
ZPMT 160525R-MM	●	●	●				
ZPMT 160525R-MM	●	●	●				
ZPMT 160525R-MR		●	●				
ZPMT 160531.5R-MM	●	●	●				

▶ Parts

Specification			
$\varnothing 20 \sim \varnothing 50$	ETNA02506* ETNA0408** ETNA0511	TW15S** TW20-100	TW07P*

● Stock item

▶ Recommended cutting condition

Machining • Slotting-A • Shouldering (general cutting edge)-B • Shouldering (long cutting edge)-C

Workpiece	Hardness	Cutting Condition		Machining
		vc(m/min)	fz(mm/t)	
P Carbon steel, Alloy steel (S50, SCM440)	180 ~ 280HB	260(180 ~ 310)	0.125(0.10 ~ 0.15)	A
		240(160 ~ 290)	0.15(0.10 ~ 0.20)	B
		190(130 ~ 230)	0.10(0.05 ~ 0.15)	C
	280 ~ 380HB	170(120 ~ 200)	0.10(0.05 ~ 0.15)	A
		170(120 ~ 200)	0.15(0.10 ~ 0.20)	B
		170(120 ~ 200)	0.10(0.05 ~ 0.15)	C
M Pre-Hardened (NAK55)	35 ~ 45HRC	170(110 ~ 190)	0.10(0.05 ~ 0.15)	A
		160(110 ~ 180)	0.15(0.10 ~ 0.20)	B
K High alloy steel (STD, STT)	≤ 300 HB	190(130 ~ 230)	0.10(0.05 ~ 0.15)	A
		170(120 ~ 200)	0.15(0.10 ~ 0.20)	B
K Stainless steel (STS420J)	≤ 260 HB	170(120 ~ 200)	0.10(0.05 ~ 0.15)	A
		260(180 ~ 310)	0.10(0.05 ~ 0.15)	B
		240(160 ~ 290)	0.15(0.10 ~ 0.20)	C
H General cast iron (GC250)	Tensile strength ≤ 350 MPa	260(180 ~ 310)	0.15(0.10 ~ 0.20)	A
		240(160 ~ 290)	0.10(0.05 ~ 0.15)	B
		170(110 ~ 180)	0.10(0.05 ~ 0.15)	C
	Tensile strength 360~500MPa	200(140 ~ 240)	0.10(0.05 ~ 0.15)	A
		190(130 ~ 230)	0.15(0.10 ~ 0.20)	B
		170(100 ~ 200)	0.10(0.05 ~ 0.15)	C
Tensile strength 500~800MPa	150(110 ~ 180)	0.15(0.10 ~ 0.20)	A	
	150(110 ~ 180)	0.10(0.05 ~ 0.15)	B	
	110(70 ~ 130)	0.15(0.10 ~ 0.20)	C	
H Hardened steel (STD, STT)	45 ~ 60HRC	110(70 ~ 130)	0.15(0.10 ~ 0.20)	A
		100(60 ~ 120)	0.10(0.05 ~ 0.15)	B

▶ Available Inserts E14, E20, E23




Multifunctional milling tool for mold making

HAVE *New*


- Tools for Z axis feed plunge machining to cut faster and more effectively in vertical machining
- Machining with whole diameter

▶ Maximum step in vertical machining

ae	Diameter										
	16	17	20	21	25	26	32	33	35	40	50
	max step (mm)										
1	7.7	8	8.7	8.9	9.7	10	11.1	11.3	11.6	12.4	14
2	10.5	10.9	12	12.3	13.5	13.8	15.4	15.7	16.2	17.4	19.5
3	12.4	12.9	14.2	14.6	16.2	16.6	18.6	18.9	19.5	21	23.7
4	13.8	14.4	16	16.4	18.3	18.7	21.1	21.5	22.2	24	27.1
5	14.8	15.4	17.3	17.8	20	20.4	23.2	23.6	24.4	26.4	30
6	15.4	16.2	18.3	18.9	21.3	21.9	24.9	25.4	26.3	28.5	32.4
7	15.8	16.7	19	19.7	22.4	23	26.4	26.9	28	30.3	34.6
8	16	16.9	19.5	20.3	23.3	24	27.7	28.2	29.3	32	36.6
9	15.8	16.9	19.9	20.7	24	24.7	28.7	29.3	30.5	33.4	38.4
10	15.4	16.7	20	20.9	24.4	25.2	29.6	30.3	31.6	34.6	40
11	14.8	16.2	19.9	20.9	24.8	25.6	30.3	31.1	32.4	35.7	41.4
12	13.8	15.4	19.5	20.7	24.9	25.9	30.9	31.7	33.2	36.6	42.7
13	12.4	14.4	19	20.3	24.9	26	31.4	32.2	33.8	37.4	43.8
14	10.5	12.9	18.3	19.7	24.8	25.9	31.7	32.6	34.2	38.1	44.9
15	7.7	10.9	17.3	18.9	24.4	25.6	31.9	32.8	34.6	38.7	45.8
16	-	8	16	17.8	24	25.2	32	32.9	34.8	39.1	46.6
17	-	-	14.2	16.4	23.3	24.7	31.9	32.9	34.9	39.5	47.3
18	-	-	12	14.6	22.4	24	31.7	32.8	34.9	39.7	48
19	-	-	8.7	12.3	21.3	23	31.4	32.6	34.8	39.9	48.5
20	-	-	-	8.9	20	21.9	30.9	32.2	34.6	40	48.9
21	-	-	-	-	18.3	20.4	30.3	31.7	34.2	39.9	49.3
22	-	-	-	-	16.2	18.7	29.6	31.1	33.8	39.7	49.6
23	-	-	-	-	13.5	16.6	28.7	30.3	33.2	39.5	49.8
24	-	-	-	-	9.7	13.8	27.7	29.3	32.4	39.1	49.9
25	-	-	-	-	-	10	26.4	28.2	31.6	38.7	50



▶ Programming in vertical cutting




- Vertical machining route
- Rapid feed
- β Angle between tool and Workpiece ($\beta \geq 1^\circ$)

- ▶ Reduce 30% of feed till 3mm machining
- ▶ Have the tool be away from the workpiece more than $1^\circ(\beta)$ after finishing the machining or when moving the tool to the next step.


▶ Cutting Condition

Designation	Hardness	Grade	Cutting Condition		Ø16,17		Ø20,21		Ø25,26		Ø32,33		Ø35		Ø40		Ø50	
			vc (m/min)	Feed (mm/rev)	Step (mm)	Feed (mm/rev)	Step (mm)	Feed (mm/rev)	Step (mm)	Feed (mm/rev)	Step (mm)	Feed (mm/rev)	Step (mm)	Feed (mm/rev)	Step (mm)	Feed (mm/rev)	Step (mm)	
P	Mild steel, Low Carbon steel (SS400)	Under 200HB	PC3500	200 (150~250)	0.03	0.20	0.04	0.30	0.05	0.30	0.05	0.30	0.06	0.30	0.06	0.30	0.07	0.30
	Carbon steel, Alloy Steel (SM50C, SCM440)	Under 100HRC	PC3500	180 (120~220)	0.03	0.20	0.04	0.30	0.05	0.30	0.05	0.30	0.05	0.30	0.06	0.30	0.06	0.30
M	Stainless steel (STS)	Under 270HB	PC5300	160 (120~200)	0.03	0.15	0.04	0.25	0.05	0.25	0.05	0.25	0.05	0.25	0.06	0.25	0.06	0.25
K	Cast iron (GC, GCD)	350N/mm ²	PC5300	200 (150~250)	0.04	0.40	0.05	0.50	0.06	0.50	0.06	0.50	0.06	0.50	0.07	0.50	0.07	0.50
H	Hardened steel	40~55HRC	PC5300	80 (50~120)	0.03	0.15	0.03	0.25	0.04	0.25	0.04	0.25	0.04	0.25	0.04	0.25	0.05	0.25

1. Ramping

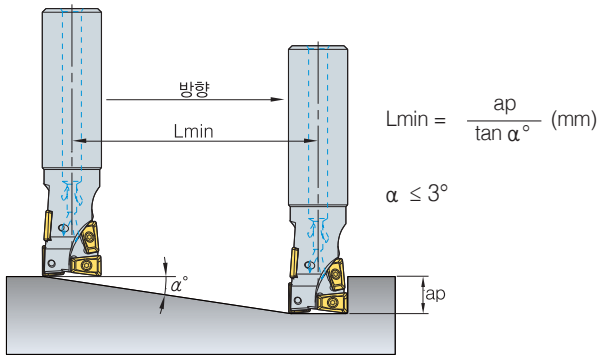

2. Helical Cutting

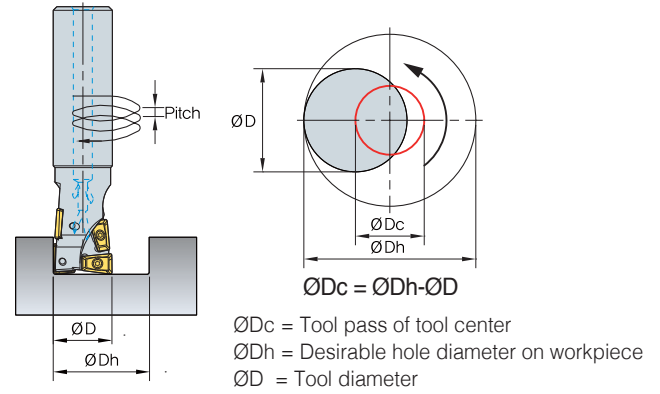

▶ Cutting Condition for ramping and helical operation

Designation	Hardness	Grade	Cutting Speed vc (m/min)	Ø16,17				Ø20,21				Ø25,26				Ø32,33				Ø35				Ø40				Ø50			
				ØDh	ap	fz	max pitch	ØDh	ap	fz	max pitch	ØDh	ap	fz	max pitch	ØDh	ap	fz	max pitch	ØDh	ap	fz	max pitch	ØDh	ap	fz	max pitch	ØDh	ap	fz	max pitch
P Mild steel, Low Carbon steel (SS400)	≤200HB	PC3500	200 (150~250)	19	0.5D	0.15	0.35	23	0.5D	0.18	0.35	29	0.5D	0.2	0.46	37	0.5D	0.25	0.58	41	0.5D	0.28	0.69	47	0.5D	0.3	0.81	58	0.5D	0.35	0.92
			180 (120~220)	19	0.5D	0.15	0.26	23	0.5D	0.16	0.26	29	0.5D	0.18	0.35	37	0.5D	0.2	0.44	41	0.5D	0.22	0.53	47	0.5D	0.25	0.61	58	0.5D	0.28	0.70
M Carbon steel, Alloy Steel (SM50C, SCM440)	≤100HB	PC3500	180 (120~220)	19	0.5D	0.15	0.26	23	0.5D	0.16	0.26	29	0.5D	0.18	0.35	37	0.5D	0.2	0.44	41	0.5D	0.22	0.53	47	0.5D	0.25	0.61	58	0.5D	0.28	0.70
			160 (120~200)	19	0.2D	0.13	0.18	23	0.2D	0.15	0.18	29	0.2D	0.18	0.24	37	0.2D	0.2	0.24	41	0.2D	0.22	0.36	47	0.2D	0.25	0.42	58	0.2D	0.28	0.48
K Cast iron (GC, GCD)	≤350N/mm ²	PC5300	200 (150~250)	19	0.7D	0.17	0.43	23	0.7D	0.2	0.42	29	0.7D	0.2	0.57	37	0.7D	0.25	0.71	41	0.7D	0.28	0.86	47	0.7D	0.3	1.0	58	0.7D	0.35	1.14
H Hardened steel	40~55HrC	PC5300	80 (50~120)	19	0.2D	0.1	0.18	23	0.2D	0.12	0.18	29	0.2D	0.13	0.24	37	0.2D	0.15	0.30	41	0.2D	0.17	0.36	47	0.2D	0.18	0.42	58	0.2D	0.2	0.48

▶ Recommended cutting condition in shouldering

Designation	Hardness	Grade	Cutting Speed vc (m/min)	Ø16,17			Ø20,21			Ø25,26			Ø32,33			Ø35			Ø40			Ø50		
				max ap	max ae	max fz	max ap	max ae	max fz	max ap	max ae	max fz	max ap	max ae	max fz	max ap	max ae	max fz	max ap	max ae	max fz	max ap	max ae	max fz
P Mild steel, Low Carbon steel (SS400)	≤200HB	PC3500	200 (150~250)	17	8	0.25	22	10	0.3	27	13	0.35	35	16	0.4	40	18	0.45	44	20	0.5	55	25	0.6
			180 (120~220)	17	8	0.2	22	10	0.25	27	13	0.3	35	16	0.35	40	18	0.4	44	20	0.4	55	25	0.5
M Carbon steel, Alloy Steel (SM50C, SCM440)	≤100HB	PC3500	180 (120~220)	17	8	0.2	22	10	0.25	27	13	0.3	35	16	0.35	40	18	0.4	44	20	0.4	55	25	0.5
M Stainless steel (STS)	≤270HB	PC5300	160 (120~200)	17	8	0.2	22	10	0.25	27	13	0.3	35	16	0.35	40	18	0.4	44	20	0.4	55	25	0.5
K Cast iron (GC, GCD)	≤350N/mm ²	PC5300	200 (150~250)	17	8	0.25	22	10	0.3	27	13	0.35	35	16	0.4	40	18	0.45	44	20	0.5	55	25	0.6
H Hardened steel	40~55HrC	PC5300	80 (50~120)	17	5	0.15	22	6	0.2	27	7	0.22	35	8	0.25	40	9	0.3	44	10	0.3	55	14	0.35

▶ Recommended cutting condition in grooving

Designation	Hardness	Grade	Cutting Speed vc (m/min)	Ø16,17		Ø20,21		Ø25,26		Ø32,33		Ø35		Ø40		Ø50	
				max ap	max fz	max ap	max fz	max ap	max fz	max ap	max fz	max ap	max fz	max ap	max fz		
P Mild steel, Low Carbon steel (SS400)	≤200HB	PC3500	200 (150~250)	17	0.15	22	0.18	27	0.2	35	0.25	40	0.27	44	0.3	55	0.35
			180 (120~220)	17	0.15	22	0.15	27	0.18	35	0.2	40	0.22	44	0.25	55	0.3
M Carbon steel, Alloy Steel (SM50C, SCM440)	≤100HB	PC3500	180 (120~220)	17	0.15	22	0.15	27	0.18	35	0.2	40	0.22	44	0.25	55	0.3
M Stainless steel (STS)	≤270HB	PC5300	160 (120~200)	17	0.15	22	0.15	27	0.18	35	0.2	40	0.22	44	0.25	55	0.3
K Cast iron (GC, GCD)	≤350N/mm ²	PC5300	200 (150~250)	17	0.15	22	0.18	27	0.2	35	0.25	40	0.27	44	0.3	55	0.35
H Hardened steel	40~55HrC	PC5300	80 (50~120)	12	0.1	14	0.12	17	0.15	22	0.15	25	0.18	28	0.18	35	0.22



HAVE (Multi Edge) *New*

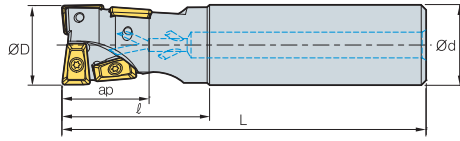


Fig. 1


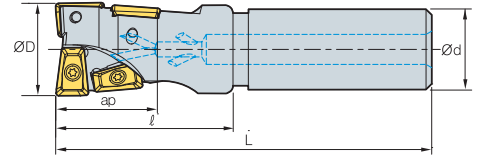


Fig. 2



Designation	Stock		ØD	Ød	ℓ	L	ap	Available Inserts		Fig.
HAVE	0816HR-S16M	4	16	16	30	120	17.6	XPMT0802ER-MM	0.15	1
	200					0.26			1	
	0817HR-S16M	4	17	16	30	120	17.6	XPMT0802ER-MM	0.18	2
	200					0.27			2	
	1020HR-S20M	4	20	20	35	130	22	XPMT1003ER-MM	0.26	1
	210					0.44			1	
	1021HR-S20M	4	21	20	35	130	22	XPMT1003ER-MM	0.26	2
	210					0.45			2	
	1325HR-S25M	4	25	25	45	140	27	XPMT13T3ER-MM	0.41	1
	75				220	0.71			1	
	1326HR-S25M	4	26	25	45	140	27	XPMT13T3ER-MM	0.45	2
	220					0.68			2	
	1632HR-S32M	4	32	32	50	150	35.2	XPMT1604ER-MM	0.72	1
	250					1.32			1	
	1633HR-S32M	4	33	32	50	150	35.2	XPMT1604ER-MM	0.76	2
	250					1.27			2	
	1835HR-S32M	4	35	32	50	150	40	XPMT1805ER-MM	0.75	1
	230					1.23			1	
	2040HR-S32M	4	40	32	55	160	44	XPMT2006ER-MM	0.74	2
	240					1.35			2	
	2550HR-S42M	4	50	42	70	170	55	XPMT2507ER-MM	1.53	2
	250					2.60			2	

● Stock item

▶ Available Inserts



XPMT-MM

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
XPMT 0802ER-MM					●					●					E23
1003ER-MM					●					●					
13T3ER-MM					●					●					
1604ER-MM					●					●					
1805ER-MM					●					●					
2006ER-MM					●					●					
2507ER-MM					●					●					

▶ Parts

Specification		
Ø16~Ø17	FTNA0204	TW06S-A
Ø20~Ø21	FTNA02205	
Ø25~Ø26	FTKA0307	TW09S
Ø32~Ø33	FTKA0408	TW15S
Ø35		
Ø40	FTGA0511-P	TW20S-100
Ø50	FTNA0615	

▶ Available Inserts E23

HAVE (Single Edge) *New*

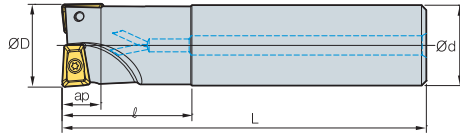


Fig. 1

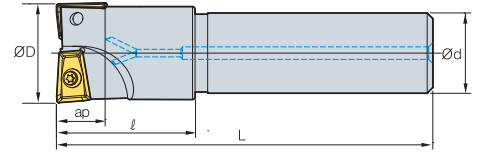


Fig. 2



• AR : 7°~12°
• RR : -12°~4°

(mm)

Designation	Stock		ØD	Ød	l	L	ap	Available Inserts		Fig.	
HAVE	0816HR-S16		16	16	30	120	7.5	XPMT0802ER-MM		0.16	1
	0816HR-L16									0.27	1
	0817HR-S16	2	17	16	30	120	7.5			0.16	2
	0817HR-L16									0.27	2
	1020HR-S20		20	20	35	130	9.5	XPMT1003ER-MM		0.28	1
	1020HR-L20									0.46	1
	1021HR-S20	2	21	20	35	130	9.5			0.28	2
	1021HR-L20									0.46	2
	1325HR-S25		25	25	45	140	12	XPMT13T3ER-MM		0.44	1
	1325HR-L25									0.76	1
	1326HR-S25	2	26	25	45	140	12			0.47	2
	1326HR-L25									0.76	2
	1632HR-S32		32	32	50	150	15.4	XPMT1604ER-MM		0.77	1
	1632HR-L32									1.36	1
	1633HR-S32	2	33	32	50	150	15.4			0.81	2
	1633HR-L32									1.41	2
	1835HR-S32		35	32	50	150	16.7	XPMT1805ER-MM		0.81	1
	1835HR-L32									1.28	1
	2040HR-S32		40	32	55	160	19.3	XPMT2006ER-MM		0.95	2
	2040HR-L32									1.45	2
	2550HR-S42		50	42	70	170	24	XPMT2507ER-MM		1.68	2
	2550HR-L42									2.54	2

● Stock item

Available Inserts



XPMT-MM

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
XPMT 0802ER-MM					●										E23
1003ER-MM					●										
13T3ER-MM					●										
1604ER-MM					●										
1805ER-MM					●										
2006ER-MM					●										
2507ER-MM					●										

Parts

Specification		
Ø16~Ø17	FTNA0204	TW06S-A
Ø20~Ø21	FTNA02205	
Ø25~Ø26	FTKA0307	TW09S
Ø32~Ø33	FTKA0408	TW15S
Ø35		
Ø40	FTGA0511-P	TW20S-100
Ø50	FTNA0615	



High productivity with optimized grade for high speed machining

O-ring Cutter *New*

- Optimized for grooving the seat of an O-ring in a plastic mold.
- Guarantees superior surface roughness compared to HSS and brazed tool.
- High productivity with optimized grade for high speed machining.
- Reduced time for regrinding and tool alignment.
- Special types are available for quotation.


▶ Holder Code System



▶ Insert Code System



▶ Grooving and assembly of O-ring

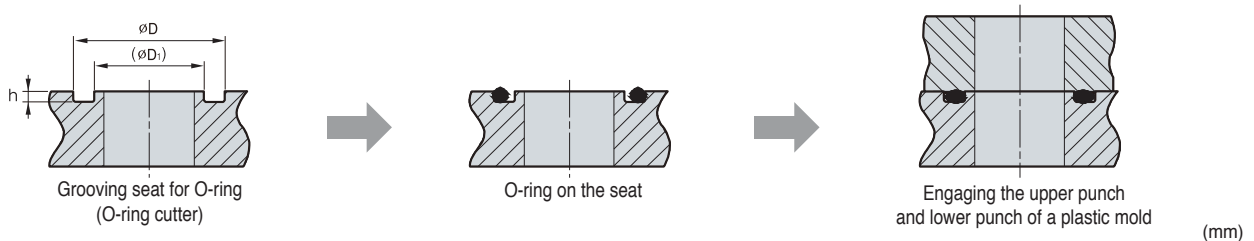


O-ring size	ØD	(ØD1)	h ± 0.05
P08	11.0	5.8	1.40
P09	12.0	6.8	
P10	13.0	7.8	
P11	15.0	8.5	
P12	16.0	9.5	1.80
P14	18.0	11.5	
P15	19.0	12.5	
P16	20.0	13.5	
P18	22.0	15.5	
P20	24.0	17.5	
P21	25.0	18.5	2.70
P22	26.0	19.5	
P24	30.0	20.6	
P25	31.0	21.6	

O-ring size	ØD	(ØD1)	h ± 0.05
P26	32.0	22.6	2.70
P28	34.0	24.6	
P29	35.0	25.6	
P30	36.0	26.6	
P31	37.0	27.6	
P32	38.0	28.6	
P34	40.0	30.6	
P35	41.0	31.6	
P38	44.0	34.6	
G40	46.0	36.6	
G25	30.0	21.8	2.40
G30	35.0	26.8	
G35	40.0	31.8	
G40	45.0	36.8	


▶ Recommended cutting condition

Workpiece	fz (mm/t)	vc(m/min)
		Coating
		PC3500
Stainless Steel (STS304)	0.03~0.12	60~130
Carbon Steel (SM□□C)	0.05~0.15	80~150
Alloy Steel (SCM)	0.05~0.15	80~150
Hardened Steel (STD, NAK)	0.03~0.12	60~130

▶ Machining Example

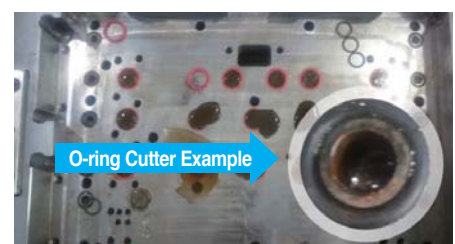

ORC *New*

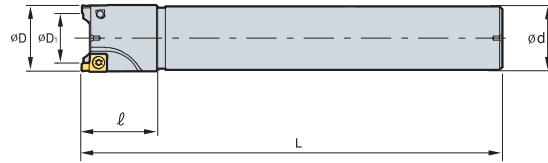

(mm)

Designation	Stock		ØD	ØD ₁	Ød	l	L	Available Inserts	O-Ring size
ORC -	P08		11.0	5.7	16	30	150	ORG265	P08
	P09		12.0	6.7	16	30	150	ORG265	P09
	P10		13.0	7.7	16	30	150	ORG265	P10
	P11		15.0	8.5	16	30	150	ORG325	P11
	P12		16.0	9.5	16	30	200	ORG325	P12
	P14		18.0	11.5	20	30	200	ORG325	P14
	P15		19.0	12.5	20	30	200	ORG325	P15
	P16		20.0	13.5	20	30	200	ORG325	P16
	P18		22.0	15.5	20	30	200	ORG325	P18
	P20		24.0	17.5	25	30	200	ORG325	P20
	P21		25.0	18.5	25	30	200	ORG325	P21
	P22		26.0	19.5	25	30	200	ORG325	P22
	P24		30.0	20.6	32	40	250	ORG470	P24
	P25		31.0	21.6	32	40	250	ORG470	P25
	P26		32.0	22.6	32	40	250	ORG470	P26
	P28		34.0	24.6	32	40	250	ORG470	P28
	P29		35.0	25.6	32	40	250	ORG470	P29
	P30		36.0	26.6	32	40	250	ORG470	P30
	P31		37.0	27.6	32	40	250	ORG470	P31
	P32		38.0	28.6	32	40	250	ORG470	P32
P34		40.0	30.6	42	40	250	ORG470	P34	
P35		41.0	31.6	42	40	250	ORG470	P35	
P38		44.0	34.6	42	40	250	ORG470	P38	
P40		46.0	36.6	42	40	250	ORG470	P40	
ORC -	G25		30.0	21.9	32	40	250	ORG405	G25
	G30		35.0	26.9	32	40	250	ORG405	G30
	G35		40.0	31.9	42	40	250	ORG405	G35
	G40		45.0	36.9	42	40	250	ORG405	G40

● Stock item

▶ Available Inserts



ORG

Cutter Designation	Designation	Cermet		Coated							Uncoated			Page		
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
ORC-P08~P10	ORG 265					●										E12
ORC-P11~P22	325					●										
ORC-P24~P40	470					●										
ORC-G25~G40	405					●										

▶ Parts

Specification		
Ø11~Ø26	FTKA0307	TW09S
Ø30~Ø46	FTGA03508	TW15S
Ø30~Ø45		

▶ Available Inserts E12



All applications for chamfers

Chamfer Tool

- All chamfer applications
- Chamfer angles 15°, 30°, 45°, 60° for various customer's needs
- The long cutting edge provides a wide chamfering range



Back & Front Chamfer Tools



Long Chamfer Tools


▶ Code System

CE	45	-	11	25	R	-	S	20
Chamfer Endmill	Chamfer angle 45°		Inscribed circle of insert 11 : SPMT110408-KC 12 : SPMN120308 31 : XCET310404ER-KC	Min. Cutting Dia. Ø25	Hand R : Right L : Left		Overall length S : Standard M : Middle L : Long	Shank Dia. Ø20

▶ Recommended cutting condition

Workpiece	Grades	ØD(Ø5 ~Ø20)		ØD(Ø25 ~Ø35)	
		vc (m/min)	fz (mm/t)	vc (m/min)	fz (mm/t)
P	PC3500	160~270	0.05~0.25	160~270	0.05~0.25
	PC5300	190~310		190~310	
	A30	60~100		60~100	
M	PC5300	100~160	0.05~0.20	100~160	0.10~0.30
	PC3545	70~120		70~120	
K	PC5300	110~180	0.10~0.30	110~180	0.30~0.50
	G10E	50~90		50~90	

▶ Application example

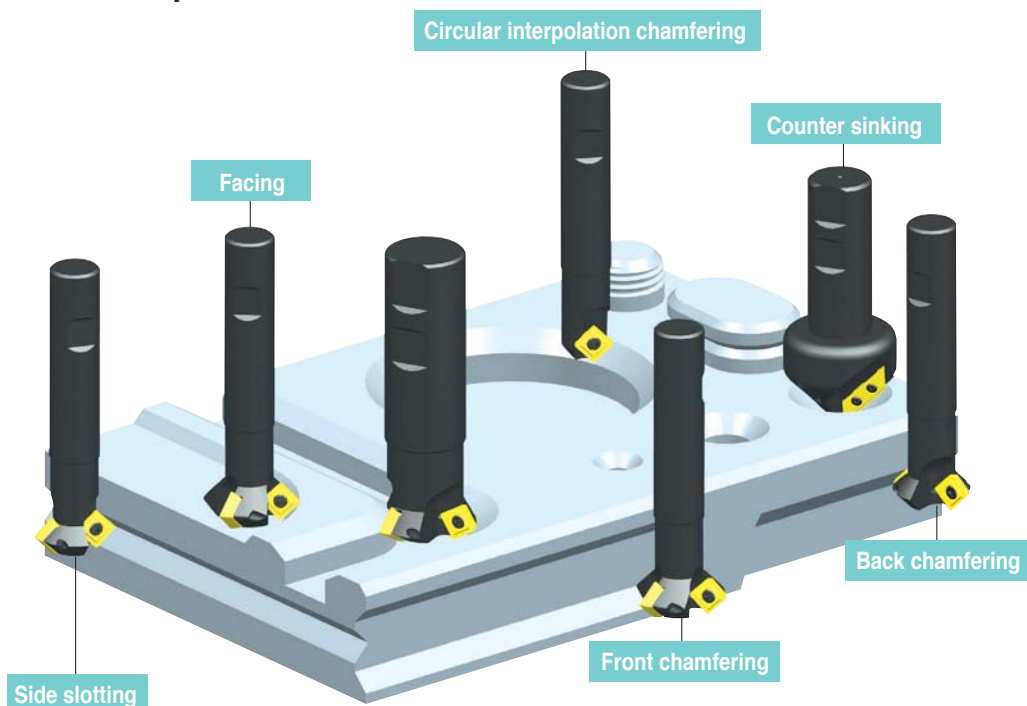


Multi-functional Chamfer Tool

Code System

CE	45	- 16	00	R	- S	20
Chamfer Endmill	Chamfer angle 45°	Inscribed circle of insert 16 : TWX16R-KC 22 : TWX22R-KC	Min. Cutting Dia. Ø0	Hand R : Right L : Left	Overall length S : 90,110 L : 200	Shank Dia. Ø12 Ø20 Ø25

Application area and Recommended cutting condition

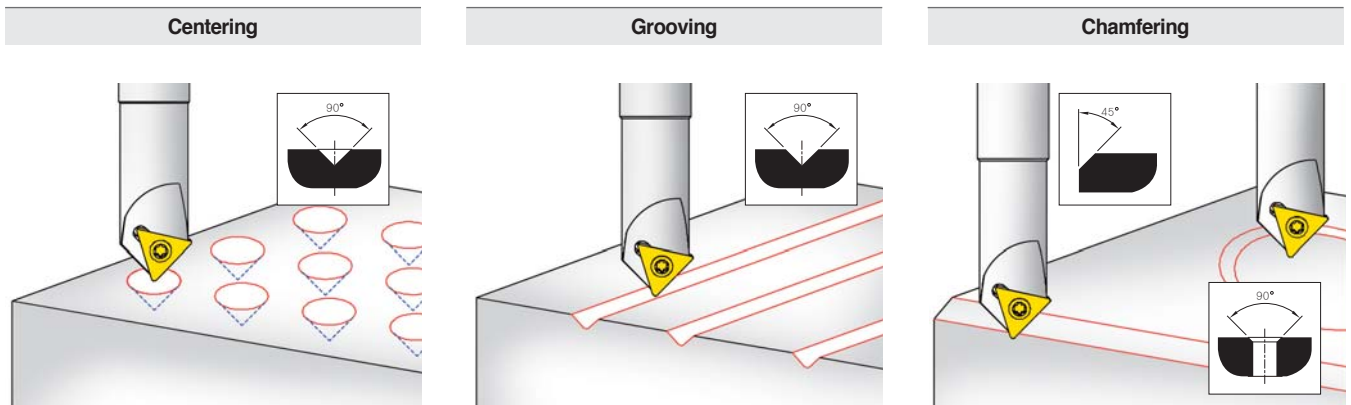

Workpiece	Hardness (HRC)	Centering, Grooving		Chamfering	
		vc (m/min)	fz (mm/t)	vc (m/min)	fz (mm/t)
Mild steel, Carbon steel, Alloy steel	Under HRC 30	80 ~ 200	0.01 ~ 0.04	100 ~ 250	0.04 ~ 0.06
High Carbon steel, Alloy steel	HRC 30~40	150 ~ 250	0.02 ~ 0.06	150 ~ 300	0.05 ~ 0.10
Aluminum, Copper	-	150 ~ 300	0.04 ~ 0.08	150 ~ 350	0.05 ~ 0.10
Cast iron	-	80 ~ 150	0.02 ~ 0.06	100 ~ 250	0.05 ~ 0.10
Stainless steel	-	60 ~ 120	0.01 ~ 0.03	60 ~ 150	0.03 ~ 0.06
HRSA	-	60 ~ 80	0.01 ~ 0.03	60 ~ 100	0.03 ~ 0.06

Note) Please keep fz. Backtouch & Chipping one caused by wrong fz

Machining Example



Solid Chamfer Tool


New

▶ Code System

CCT	090	T	-	080	L
Type	Chamfer angle	Cutting Edge		Diameter	Tool length
CCT : Centering & Chamfering Tool CET : Centering & Chamfering Endmill Tool	060 : 60° 090 : 90° 120 : 120°	None : Singel T : Twin		080 : Ø8.0	None : Standard L : Long


▶ Features

CET(Centering & Chamfering Endmill Tool)



- ▶ For internal chamfering up to 0.5mm
- ▶ Can be applied to side milling and easy to regrinding

CCT(Centering & Chamfering Tool)

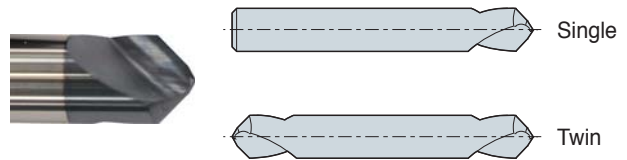

- ▶ Chipping resistance realizes machining in high speed due to double point angle
- ▶ Lowers cutting load due to web thinning

▶ CET / CCT Application example

	Centering	Hole Chamfering	Chamfering (External)	Chamfering (Internal)	Side milling	Slot milling
Applications (CET)						
60°	×	●	●	● ~ ▲	●	×
90°	▲	●	●	●	●	● ~ ▲
120°	●	●	●	●	●	●
Applications (CCT)						
60°	●	●	● ~ ▲	▲ ~ ×	×	×
90°	●	●	● ~ ▲	▲ ~ ×	×	×
120°	●	●	●	●	×	●

CE (Back & Front)

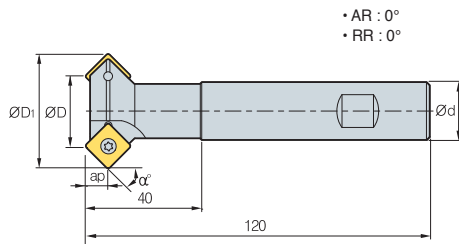


Fig. 1

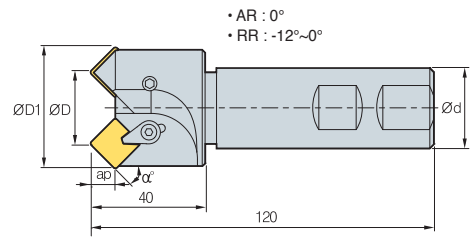


Fig. 2



(mm)


Designation	Stock	ØD	ØD ₁	Ød	ap	Fig.	Available Inserts	α°(Chamfer angle)		Machining range (Min~Max)	Uses
								Front	Back		
CE 15-1125R-S20	●	25	30.5	20	9.5	1	SPMT110408 - KC	15°	-	Ø25~Ø30	Front chamfering
30-1125R-S20	●	25	35.5	20	8.5	1		30°	60°	Ø25~Ø35	Front, Back chamfering
45-1107R-S20	●	7	21.9	20	7.0	1		45°	-	Ø7~Ø21	Front chamfering
45-1119R-S20	●	19	33.9	20	7.0	1		45°	45°	Ø19~Ø33	Front, Back chamfering
45-1125R-S20	●	25	39.9	20	7.0	1		45°	45°	Ø25~Ø39	Front, Back chamfering
60-1125R-S32	●	25	43.3	32	5.0	1		60°	30°	Ø25~Ø42	Front, Back chamfering
45-1207R-S32	●	7	23.3	32	7.8	2	SPMN120308	45°	-	Ø7~Ø22	Front chamfering
45-1220R-S32	●	20	37.3	32	7.8	2		45°	-	Ø21~Ø36	Front chamfering
45-1225R-S32	●	25	42.3	32	7.8	2		45°	-	Ø26~Ø41	Front chamfering
45-1235R-S32	●	35	52.3	32	7.8	2		45°	-	Ø36~Ø51	Front chamfering

● Stock item

Available Inserts



SPMT-KC



SPMN

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCMG25	NCMG35	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
SPMT 110408-KC						●						●	●	
SPMN 120308												●		

E21


Parts

Specification	Screw	Clamp	C-Ring	Wrench	Wrench
Ø7~Ø25	FTKA0408	-	-	TW15S	-
Ø7~Ø35	CHX0617L	CH6R2	CR05	-	HW30L

Available Inserts E21



CE (Long Chamfer)

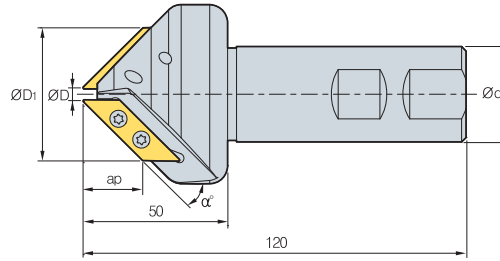

• AR : -5°~1°
• RR : 0°

(mm)

Designation	Stock		ØD	ØD ₁	Ød	ap	α° (Chamfer angle)	Machining range (Min-Max)	Uses
CE 30-3105R-S32	●	1	5	35	32	26	30°	Ø5~Ø35	Front Chamfering
CE 45-3105R-S32	●	2	5	48	32	21	45°	Ø5~Ø48	Front Chamfering
CE 60-3105R-S32	●	2	5	57	32	15	60°	Ø5~Ø57	Front Chamfering

● Stock item

▶ Available Inserts



XCET-KC

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
XCET 310404ER-KC					●							●	●		E22

▶ Parts

Specification		
Ø5	Screw FTKA03510	Wrench TW15S

▶ Available Inserts E22

CE (Multi-functional)

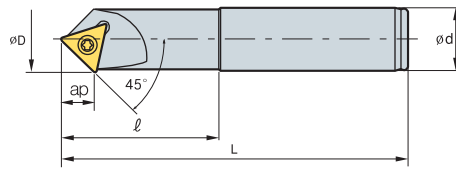


Fig. 1

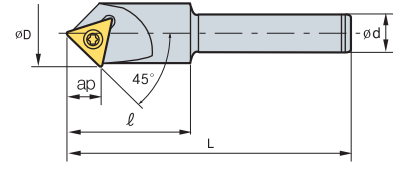


Fig. 2



• AR : -12°~15°
• RR : 0°

(mm)

Designation	Stock	ØD	Ød	ℓ	L	ap	Fig.	Available Inserts	Machining range (Min-Max)	Uses
CE 45-1600R-S12	●	22	12	40	90	10	2	TWX16R-KC	Ø0 ~ Ø20	Centering Grooving Chamfering
45-1600R-S20	●	22	20	50	110	10	1	TWX16R-KC	Ø0 ~ Ø20	
45-1600R-L20	●	22	20	60	200	10	1	TWX16R-KC	Ø0 ~ Ø20	
45-2200R-S12	●	29	12	40	90	14	2	TWX22R-KC	Ø0 ~ Ø27	
45-2200R-S25	●	29	25	50	110	14	1	TWX22R-KC	Ø0 ~ Ø27	
45-2200R-L25	●	29	25	60	200	14	1	TWX22R-KC	Ø0 ~ Ø27	

● Stock item


Available Inserts



TWX-KC

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN80	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
TWX 16R-KC					●										E22
22R-KC					●										


Parts

Specification	 Screw FTNA0408	 Wrench TW15L
Ø22~Ø29		

➔ Available Inserts E22



CET *New*

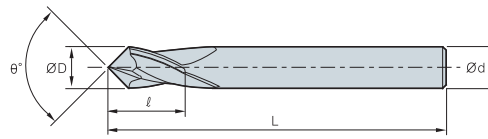

(mm)

Designation	Stock	ØD	Ød	l	L	θ°
CET060 -	030	3	3	5.5	50	60°
	040	4	4	7	50	
	060	6	6	10	60	
	080	8	8	13	70	
	100	10	10	16	70	
	120	12	12	18	80	
	160	16	16	24	100	
CET090 -	030	●	3	5.5	50	90°
	040	●	4	7	50	
	060	●	6	10	60	
	080	●	8	13	70	
	100	●	10	16	70	
	120	●	12	18	80	
	160		16	16	24	
CET120 -	030		3	5.5	50	120°
	040		4	7	50	
	060		6	10	60	
	080		8	13	70	
	100		10	16	70	
	120		12	18	80	
	160		16	16	24	

● Stock item

CCT *New*

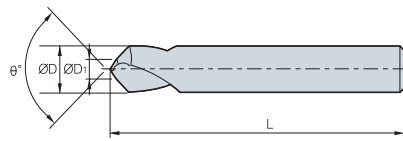


Fig. 1

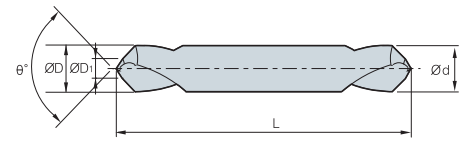


Fig. 2


(mm)

Designation	Stock	ØD = Ød	ØD1	L	θ°	Fig.	
CCT060 -	030	3	1.0	40	60°	1	
	040	4	1.5	40			
	060	6	2.0	50			
	080	8	2.5	60			
	100	10	3.0	70			
	120	12	4.0	80			
CCT060T -	030	3	1.0	40		60°	2
	040	4	1.5	40			
	060	6	2.0	50			
	080	8	2.5	60			
	100	10	3.0	70			
	120	12	4.0	80			
CCT060T -	030L	3	1.0	100	60°		2
	040L	4	1.5	100			
	060L	6	2.0	100			
	080L	8	2.5	120			
	100L	10	3.0	120			
	120L	12	4.0	150			
CCT090 -	030	●	3	40		90°	1
	040	●	4	40			
	060	●	6	50			
	080	●	8	60			
	100	●	10	70			
	120		12	80			
CCT090T -	030		3	40	90°		2
	040		4	40			
	060		6	50			
	080		8	60			
	100		10	70			
	120		12	80			
CCT090T -	030L		3	100		90°	2
	040L		4	100			
	060L		6	100			
	080L		8	120			
	100L		10	120			
	120L		12	150			
CCT120 -	030		3	40	120°		1
	040		4	40			
	060		6	50			
	080		8	60			
	100		10	70			
	120		12	80			
CCT120T -	030		3	40		120°	2
	040		4	40			
	060		6	50			
	080		8	60			
	100		10	70			
	120		12	80			
CCT120T -	030L		3	100	120°		2
	040L		4	100			
	060L		6	100			
	080L		8	120			
	100L		10	120			
	120L		12	150			

● Stock item



TFE

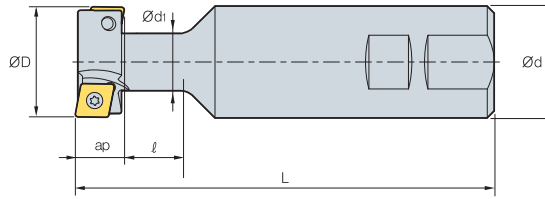

AA
90°


• AR : 5°
• RR : -5°

(mm)


Designation	Stock		ØD	Ød	Ød ₁	l	L	ap	Available Inserts
TFE 2125R/L		2	21	25	10.5	20	109	9	CPMT06
2525R/L		2	25	25	12.5	21	112	11	CPMT08
3232R/L		2	32	32	16.5	26	120	14	CPMT09
4032R/L		2	40	32	20.5	32	130	18	CPMH12
5032R/L		4	50	32	26.5	38	140	22	CPMH12

● Stock item

▶ Available Inserts



CPMT




CPMH

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
CPMT 060204-MM					●										E07
080308-MM					●										
09T308-MM					●										
CPMH 120408-MM					●										

▶ Parts

Specification		
Ø21	FTNA02555	TW08S
Ø25	FTNA0306	TW09S
Ø32	FTNA0407	TW15S
Ø40	PTMA0511A	TW15S
Ø50		

Assembling

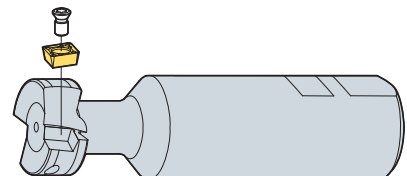

▶ Available Inserts E07


Buffed on top face of insert ensure good chip control and reduces built-up edge

Pro-A Mill

- Buffed top face of insert ensures good chip control and reduces built-up edge
- Small size modular type for aluminum machining
- Various line up of modular system for aluminum machining
- For shouldering, curved surface and ramping
- High rake angle chip breaker ensures excellent surface roughness improved cooling effect, and chip control by through coolant system, even in deep pocket machining



Uses

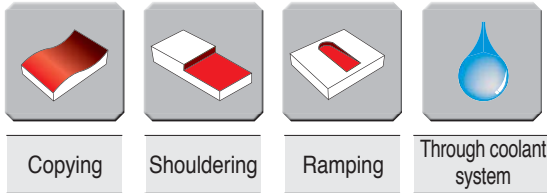

Copying

Shouldering

Ramping

Through coolant system

Pro-A Mill series

Type	Series	Pro-A mill	Through coolant system
Application of small-sized Aluminum machining	Pro-A 2000	<ul style="list-style-type: none"> • Modular : $\varnothing 12 \sim \varnothing 42$ • Shank : $\varnothing 12 \sim \varnothing 42$ • Insert : VDKT11T210N-MA VDKT11T220N-MA 	○
General application of Aluminum machining	Pro-A 4000	<ul style="list-style-type: none"> • cutter : $\varnothing 40 \sim \varnothing 100$ • Shank : $\varnothing 32 \sim \varnothing 40$ • Insert : VCKT220530N-MA 	○


Recommended cutting condition

Workpiece		Cutting speed v_c (m/min)
Aluminum alloy	Rm < 280 MPa	1000
	Rm > 280 MPa	800
Copper alloy	Long chip	250
Thermo plastic	-	300
Aluminum alloy	Si < 12%	800
Copper alloy	Short chip	400
Magnesium alloy	-	400
Duroplastics	-	150




▶ Pro-A Mill Ramping & Helical cutting technical data


1. Ramping

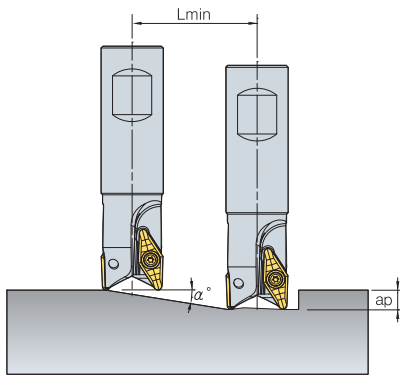

2. Blind hole Helical cutting



3. Thru hole Helical cutting



Designation	ØD(mm)	Ramping		Blind hole Helical cutting				Thru hole Helical cutting	
		α°(max)	Lmin(mm)	ØDHmax(mm)	dmax(mm)	ØDHmin(mm)	dmax(mm)	ØDHmin(mm)	dmax(mm)
PAS2012HR	12	11.9	38	23	4.8	21	4.4	19	4.0
PAS2016HR	16	12.5	36	31	6.9	29	6.4	27	6.0
PAS2020HR	20	9.7	47	39	6.7	37	6.3	35	6.0
PAS2025HR	25	7.6	60	49	6.5	47	6.3	45	6.0
PAS2032HR	32	5.8	79	63	6.4	61	6.2	59	6.0
PAS2042HR	42	4.3	105	83	6.3	81	6.2	79	6.0
PAS4032HR	32	24.4	22	59	26.8	54	24.5	40	18.2
PAS4040HR	40	18.4	30	75	25.0	70	23.3	56	18.7
PAS4050HR	50	14.0	40	95	23.8	90	22.5	76	19.0
PAS4063HR	63	10.7	53	121	22.8	116	21.9	102	19.2
PAC(M)4080HR	80	8.1	70	155	22.1	150	21.4	136	19.4
PAC(M)4100HR	100	6.3	90	195	21.7	190	21.1	176	19.6

- Lmin : When ap=8mm
- Lmin : Minimum inclination cutting length
- α° : Max. ramping angle
- ap : Depth of cut

$$Lmin = \frac{ap}{\tan \alpha^\circ} \text{ (mm)}$$





Strong clamping due to the concave design of insert bottom

Pro-X Mill

- Strong clamping due to the concave design of insert bottom
- Good chip flow and less build up edge achieved with the buffed surface of insert
- High rake angle of insert provides good surface finish and low cutting load
- Specially designed for high speed machining of aluminum
- Suitable for square shouldering and curved surface machining




▶ Clamping system for high speed

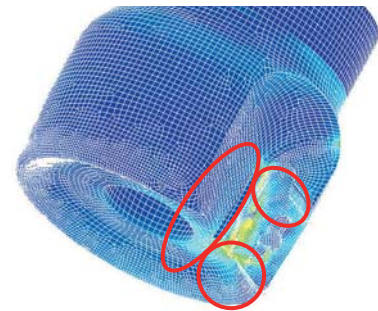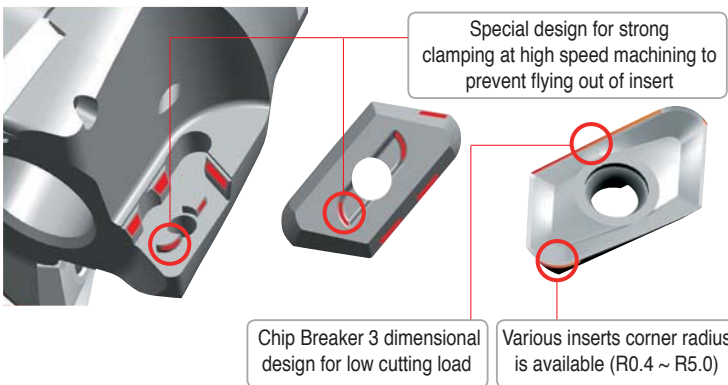

- Clamping design as per FEM analysis
- Strong clamping of insert

▶ Centrifugal force as per RPM

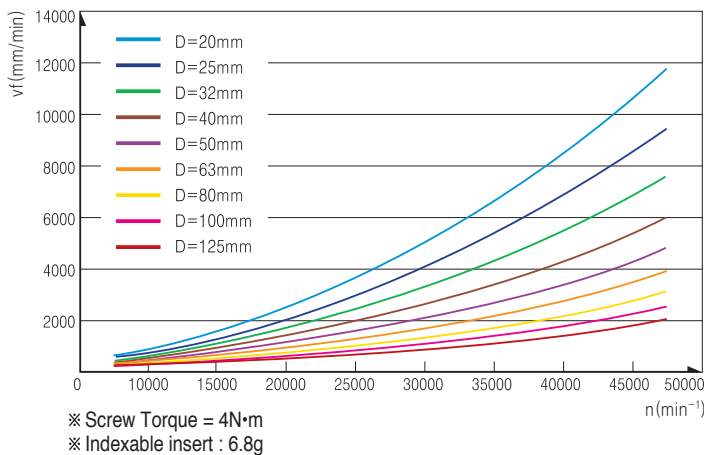

Marking [• Designation • Max. RPM]



▶ Max. RPM as per cutting diameter

Cutting diameter ØD(mm)	5000 type		6000 type	
	n(min ⁻¹)	vc(m/min)	n(min ⁻¹)	vc(m/min)
20	14,000	940	-	940
25	28,000	2,559	10,000	2,559
32	25,000	2,894	8,900	2,894
40	22,000	3,240	19,000	3,240
50	20,000	3,611	16,000	3,611
63	18,000	4,055	15,000	4,055
80	16,000	4,572	13,000	4,572
100	14,000	5,118	11,000	5,118
125	13,000	5,731	10,000	5,731

▶ Recommended cutting condition


Workpiece		Cutting Speed vc(m/min)	Feed fz(mm/t)
Aluminum alloy	Rm280 < MPa	1200	0.30
	Rm280 > MPa	1000	0.25
Copper alloy	Long chipping	400	0.20
Thermo plastic	-	350	0.15
Aluminum alloy	Si <12%	1000	0.25
	Si ≥12%	-	-
Copper alloy	Short chipping	500	0.20
Magnesium alloy	-	450	0.20
Duroplastics	-	200	0.15

※ In case of actual machining accidental breakage of insert or tool could happen even under the written RPM special cover or door is necessary to prevent damage from broken insert or broken tool




Pro-X Mill Ramping & Helical cutting technical data


1. Ramping

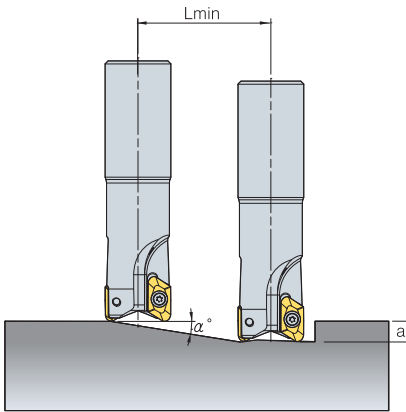

2. Blind hole Helical cutting



3. Thru hole Helical cutting




Designation	ØD(mm)	Ramping		Blind hole Helical cutting				Thru hole Helical cutting	
		α°(max)	Lmin(mm)	ØDHmax(mm)	dmax(mm)	ØDHmin(mm)	dmax(mm)	ØDHmin(mm)	dmax(mm)
PAXS5020HR	20	8.4	68	34	5.0	32	4.7	27	4.0
PAXS5025HR	25	13.2	43	44	10.4	42	9.9	34	8.0
PAXS5032HR	32	9.5	60	58	9.7	56	9.3	48	8.0
PAXS5040HR	40	7.1	80	74	9.3	72	9.0	64	8.0
PAXCM5050HR	50	5.4	105	94	9.0	92	8.8	84	8.0
PAXCM5063HR	63	4.2	138	120	8.7	118	8.6	110	8.0
PAXC(M)5080HR	80	3.2	180	154	8.6	152	8.4	144	8.0
PAXC(M)5100HR	100	2.5	230	194	8.4	192	8.3	184	8.0
PAXC(M)5125HR	125	2.0	293	244	8.3	242	8.3	234	8.0
PAXS6025HR	25	9.0	63	44	6.9	42	6.6	38	6.0
PAXS6032HR	32	6.6	87	58	6.7	56	6.5	52	6.0
PAXS6040HR	40	12.1	47	74	15.9	72	15.4	56	12.0
PAXCM6050HR	50	9.0	63	94	14.8	92	14.5	76	12.0
PAXCM6063HR	63	6.7	85	120	14.1	118	13.9	102	12.0
PAXC(M)6080HR	80	5.0	113	154	13.6	152	13.4	136	12.0
PAXC(M)6100HR	100	3.9	147	194	13.2	192	13.1	176	12.0
PAXC(M)6125HR	125	3.0	188	244	13.0	242	12.8	226	12.0

- Lmin : When ap=10mm
- Lmin : Minimum inclination cutting length

$$Lmin = \frac{ap}{\tan \alpha^\circ} \text{ (mm)}$$
 - α° : Max. ramping angle
 - ap : Depth of cut

Plunging, Slotting, Drilling technical data

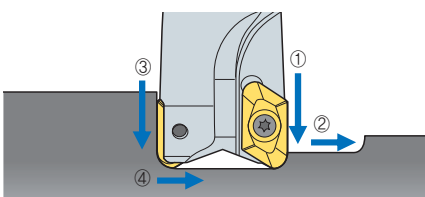


1. When drilling, grooving machining sequence is ① → ② → ③ → ④
2. When drilling, grooving, decrease the feed and cutting speed 30%~50% from the recommended data

• Cutting condition for drilling

Holder	ap(mm)	
	5000 Type	6000 Type
Ø20	8	-
Ø25	4	11
Ø32	4	6
Ø40~125	4	6

Insert	ap(mm)	
	5000 Type	6000 Type
XETK19	4	-
XETK25	6	-

Uses

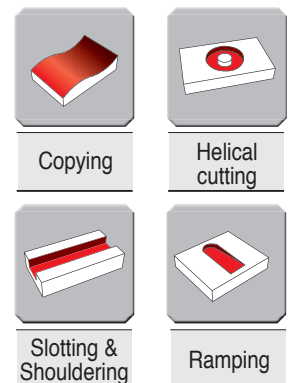


New indexable milling tool for the machining of high quality workpieces

Pro-L Mill *New*

- Improved perpendicularity and lower cutting resistance by composition of clearance face and High Helix edge
- Productivity increase due to more than half as much of Depth of Cut comparing to existing product
- Strong clamping design by adaption of double screw on system
- Improved chip flow due to helical type design of chip pocket and application of coolant system



▶ Uses

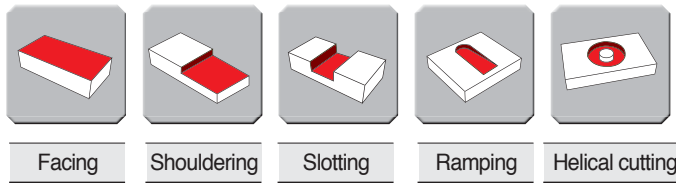

▶ Features



▶ Code System of Shank type





PAL	S	050	H	R	-	3	S	40
<u>Pro-L Mill</u>	<u>Tool type</u>	<u>Tool Dia.</u>	<u>Coolant type</u>	<u>Hand</u>		<u>No. of tooth</u>	<u>Tool length</u>	<u>Shank Dia.</u>
	S: Shank	050 : Ø50	Unmarked : None H : Thru-hole	R : Right L : Left		3 : 3 teeth	S : Standard type M : Middle type L : Long type	40 : Ø40

▶ Code System of Cutter type

PAL	C	M	063	H	R
<u>Pro-L Mill</u>	<u>Tool type</u>	<u>Unit</u>	<u>Tool Dia.</u>	<u>Coolant type</u>	<u>Hand</u>
	C: Cutter	M : Metric	063 : Ø63	Unmarked : None H : Thru-hole	R : Right M : Multi edge



▶ Chip breakers

Usage	Insert's type	Edge type	Features
Al	MA 		Application of the edge optimized for Aluminum machining and buffed finish ensure excellent machining quality
Hard-to-cut material	ML 		Design of Low cutting resistance Chip Breaker ensures excellent machining quality for light cutting and Hard-to-cut material

▶ Selection of Grade and Chip Breaker

Category	M (Stainless steel)	N (Aluminum alloy)	S (HRSA)
Grade	PC5300 / PC5400	H01	PC5300 / PC5400
MA	-	○	-
ML	○	-	○

▶ Cutting Performance


N Al6061 (HRC30)

- **Cutting condition**
 - vc = 500m/min
 - fz = 0.2mm/t
 - ap = 30 ~ 60mm
 - ae = 1 ~ 5mm(finishing : 1mm, roughing : 5mm)
 - z = 3




Pro-L Mill Ramping & Helical cutting technical data


1. Ramping

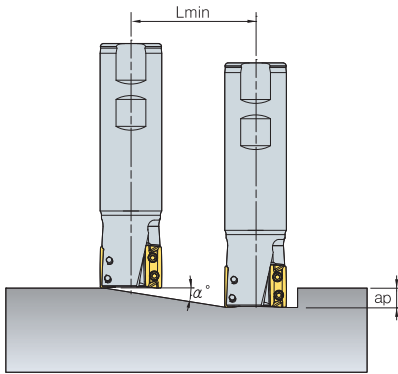

2. Blind hole Helical cutting



3. Thru hole Helical cutting



Designation	ØD(mm)	Ramping		Blind hole Helical cutting				Thru hole Helical cutting	
		α°(max)	Lmin(mm)	ØDHmax (mm)	dmax (mm)	ØDHmin (mm)	dmax (mm)	ØDHmin (mm)	dmax (mm)
PALS032HR-2S20	32	3.37	170	62	3.6	60	3.5	55	3.2
PALS032HR-2S25	32	3.37	170	62	3.6	60	3.5	55	3.2
PALS032HR-2S32	32	3.37	170	62	3.6	60	3.5	55	3.2
PALS040HR-2S32	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-2S40	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-2S42	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-3S32	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-3S40	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-3S42	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS050HR-3S32	50	2.08	275	98	3.6	96	3.5	91	3.3
PALS050HR-3S40	50	2.08	275	98	3.6	96	3.5	91	3.3
PALS050HR-3S42	50	2.08	275	98	3.6	96	3.5	91	3.3
PALS063HR-4S32	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HR-4S40	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HR-4S42	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HM-4S32	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HM-4S40	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HM-4S42	63	1.76	325	124	3.8	122	3.8	117	3.6
PALCM063HR	63	1.76	325	124	3.8	122	3.8	117	3.6

• Lmin : When ap=10mm

• Lmin : Minimum inclination cutting length


$$L_{min} = \frac{ap}{\tan \alpha} \text{ (mm)}$$

α° : Max. rampig angle

ap : Depth of cut



PAC(M)2000 / 4000

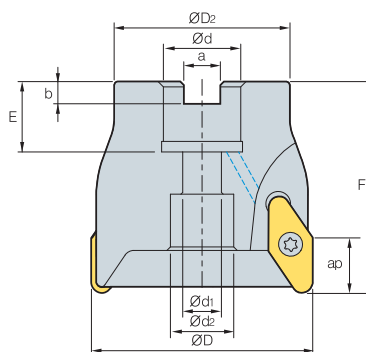

• AR : 0°
• RR : -3°

(mm)

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap	kg	
PACM	2040HR		3	40	34	16	9	14	8.4	5.6	18	40	8.7	0.2
	2050HR		4	50	42	22	11	18	10.4	6.3	22	50	8.7	0.4
	2063HR		5	63	49	22	11	18	10.4	6.3	22	50	8.7	0.6
PAC (PACM)	2080HR		5	80	57	25.4(27)	14	20	9.5(12.4)	6.0(7.0)	25	50	8.7	0.9
	2100HR		6	100	67	31.75(32)	(18)	44(26)	12.7(14.4)	8.0	37(30)	63	8.7	1.9
PACM	4040HR	●	3	40	32	16	9	11.5	8.4	5.6	20	55	15	0.2
	4050HR	●	3	50	40	22	11	18	10.4	6.3	20	55	15	0.3
	4063HR	●	4	63	50	22	11	18	10.4	6.3	20	60	15	0.6
PAC (PACM)	4080HR		4	80	60	25.4(27)	14	20	9.5(12.4)	6.0(7.0)	25	60	15	1.0
	4100HR	(●)	5	100	80	31.75(32)	(18)	44(26)	12.7(14.4)	8.0	37(26)	60	15	1.6

() Metric Size ● Stock item

▶ Available Inserts



VCKT-MA

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC3300	PC5400	A30		G10E	H01
VCKT 220530N-MA														●	E23

▶ Available Arbors

Designation	Ød	Available Arbors	
PACM	2040HR	16	BT□□-FMC16-□□
	2050HR	22	BT□□-FMC22-□□
	2063HR	22	BT□□-FMC22-□□
PAC (PACM)	2080HR	25.4	BT□□-FMC25.4-□□
	2100HR	27	BT□□-FMC27-□□
31.75		BT□□-FMC31.75-□□	
	32	BT□□-FMC32-□□	

Designation	Ød	Available Arbors	
PACM	4040HR	16	BT□□-FMC16-□□
	4050HR	22	BT□□-FMC22-□□
	4063HR	22	BT□□-FMC22-□□
PAC (PACM)	4080HR	25.4	BT□□-FMC25.4-□□
	4100HR	27	BT□□-FMC27-□□
31.75		BT□□-FMC31.75-□□	
	32	BT□□-FMC32-□□	


▶ Parts

Specification	Screw	Wrench	Arbor Bolt
Ø40~Ø100	FTNC04509(Ø40) FTNC04511	TW 20S	PHMA0834(Ø40)

▶ Available Inserts E22

▶ Available Arbors and bolt E318~E320

PAM2000

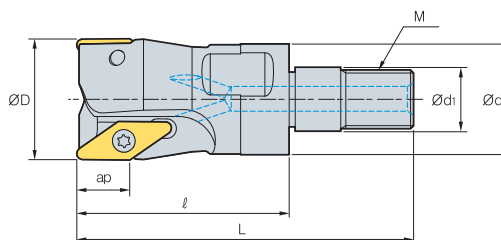

Designation	Stock		ØD	Ød	Ød ₁	ℓ	L	M	ap	
PAM 2012HR-M06		1	12	11.0	6.5	33	48	M06	8	0.02
2016HR-M08		2	16	14.5	8.5	36	53	M08	8	0.04
2020HR-M10		2	20	18.0	10.5	36	57	M10	8	0.06
2025HR-M12	●	3	25	22.5	12.5	41	65	M12	8	0.1
2032HR-M16		4	32	28.5	17.0	45	72	M16	8	0.18
2042HR-M16		5	42	28.5	17.0	45	72	M16	8	0.27

● Stock item

▶ Available Inserts



VDKT-MA

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
VDKT 11T210N-MA														●	E22

▶ Available Adaptors

Designation	Available Adaptors
PAM 2012HR-M06	MAT - M06
2016HR-M08	MAT - M08
2020HR-M10	MAT - M10
2025HR-M12	MAT - M12
2032HR-M16	MAT - M16
2042HR-M16	MAT - M16

Designation : PAM2012HR-M06
Modular Head Threading Measure size(M06)

II

Adaptor Spec. : MAT-M06-030-S20S
Adaptor Threading Measure(M06)

▶ Parts

Specification		
Ø12~Ø42	Screw ETNA02505* ETNA02506	Wrench TW 07S


▶ Available Inserts E22

▶ Available Adaptors E281~E282

* PAM2012:2016



PAXC(M)5000

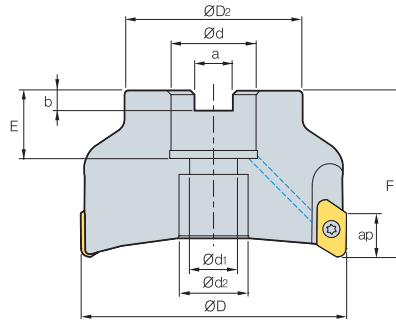

• AR : 8°~17.5°
• RR : -9.5°~5°

(mm)

Designation	Stock		⊙	ØD	ØD ₂	Ød	Ød ₁	Ød ₂	a	b	E	F	Max rpm	ap	kg
	A	B													
PAXCM	5040HR-A,B	● ●	3	40	34	16	9	14	8.4	5.6	19	40	25,800	17	0.15
	5050HR-A,B	● ●	4	50	42	22	11	18	10.4	6.3	21	50	23,000	17	0.3
	5063HR-A,B	● ●	5(4)	63	49	22	11	18	10.4	6.3	21	50	20,500	17	0.56
PAXC (PAXCM)	5080HR-A,B	● (●) ● (●)	5	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	24(23)	50	18,200	17	1.0
	5100HR-A,B	● (●) ● (●)	6	100	67	31.75(32)	18	26	12.7(14.4)	8(8)	32(26)	63	16,300	17	2.3
	5125HR-A,B	● ● (●)	7	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	35(29)	63	14,600	17	3.2

• A type : Insert NoseR 0.4~3.2, B type : Insert NoseR 4.0~5.0

() Metric Size, ● Stock item

▶ Available Inserts



XEKT-MA

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PD2000	A30		G10E	H01
XEKT	19M504FR-MA										●			●	E22
	19M508FR-MA										●			●	
	19M512FR-MA										●			●	
	19M516FR-MA										●			●	
	19M518FR-MA										●			●	
	19M520FR-MA										●			●	
	19M530FR-MA										●			●	
	19M532FR-MA										●			●	
	19M540FR-MA										●			●	
	19M550FR-MA										●			●	

▶ Available Arbors

Designation	Ød	Available Arbors
PAXC(M)	5040HR-A,B	BT□□-FMC16-□□
	5050HR-A,B	BT□□-FMC22-□□
	5063HR-A,B	
5080HR-A,B	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
5100HR-A,B	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
5125HR-A,B	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMC40-□□

▶ Parts


Specification	Screw	Wrench
Ø40~Ø125	PTKA0408	TW 15S

▶ Available Inserts E22

▶ Available Arbors and bolt E318-E320



PAXC(M)6000

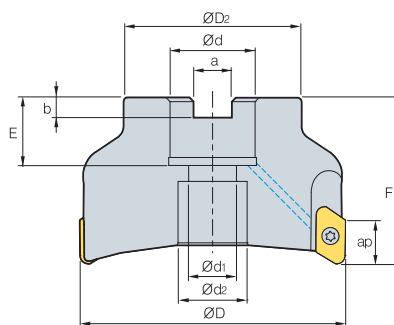

• AR : 8°~17.5°
• RR : -9.5°~-5°

Designation	Stock		⚙️	ØD	ØD ₂	Ød	Ød ₁	Ød ₂	a	b	E	F	Max rpm	ap	⚖️
	A	B													
PAXCM 6050HR-A,B			2	50	42	16	9	14	8.4	5.6	18	50	23,000	23	0.32
6063HR-A,B	●		3	63	49	22	11	18	10.4	6.3	21	50	20,500	23	0.53
PAXC 6080HR-A,B	●	(●)	4	80	57	25.4(27)	14	20	9.5(12.4)	6(7)	25(23)	50	18,200	23	0.73
(PAXCM) 6100HR-A,B	●		5	100	67	31.75(32)	18	26	12.7(14.4)	8(8)	32.5(26)	63	16,300	23	1.7
6125HR-A,B			6	125	87	38.1(40)	22	32	15.9(16.4)	10(9)	35(29)	63	14,600	23	3.06

• A type : Insert NoseR 0.4~3.2, B type : Insert NoseR 4.0~5.0

() Metric Size, ● Stock item

▶ Available Inserts



XEKT-MA

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
XEKT 250604FR-MA														●	E22
250608FR-MA														●	
250612FR-MA														●	
250616FR-MA														●	
250620FR-MA														●	
250630FR-MA														●	
250632FR-MA														●	
250640FR-MA														●	
250650FR-MA														●	

▶ Available Arbors

Designation	Ød	Available Arbors
PAXC(M) 6050HR-A,B	16	BT□□-FMC16-□□
6063HR-A,B	22	BT□□-FMC22-□□
6080HR-A,B	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
6100HR-A,B	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
6125HR-A,B	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMC40-□□


▶ Parts

Specification	Screw	Wrench
Ø50~Ø125	FTGA0513-P	TW 20-100

▶ Available Inserts E22

▶ Available Arbors and bolt E318~E320

PAXS5000

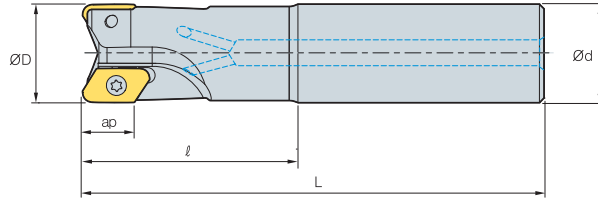

(mm)

Designation	Stock		⊙	ØD	Ød	l	L	Max rpm	ap	kg
	A	B								
PAXS 5020HR-A,B	●	●	1	20	20	60	130	15,000	17	0.24
5025HR-A,B	●	●	2	25	25	60	140	32,600	17	0.4
5025HR-A,B-L200			2	25	25	60	200	32,600	17	0.63
5032HR-A,B	●	●	2	32	32	70	150	28,800	17	0.74
5032HR-A,B-L220			2	32	32	70	220	28,800	17	1.2
5040HR-A,B-S32			3	40	32	70	160	25,800	17	1.0
5040HR-A,B-L220			3	40	32	70	220	25,800	17	1.4
5040HR-A,B-S40			3	40	40	70	160	25,800	17	1.3
5040HR-A,B-S42			3	40	42	70	160	25,800	17	1.4

• A type : Insert NoseR 0.4~3.2, B type : Insert NoseR 4.0~5.0

● Stock item



▶ Available Inserts



XEKT-MA

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PD2000	A30		G10E	H01
XEKT 19M504FR-MA											●			●	E22
19M508FR-MA											●			●	
19M512FR-MA											●			●	
19M516FR-MA											●			●	
19M518FR-MA											●			●	
19M520FR-MA											●			●	
19M530FR-MA											●			●	
19M532FR-MA											●			●	
19M540FR-MA											●			●	
19M550FR-MA											●			●	


▶ Parts

Specification	 Screw	 Wrench
Ø20~Ø40	PTKA0408	TW 15S

▶ Available Inserts E22



PAXS6000

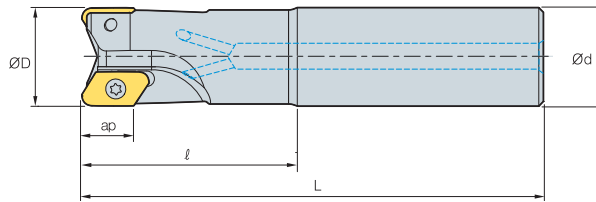

Designation	Stock		⊘	ØD	Ød	l	L	Max rpm	ap	kg
	A	B								
PAXS 6025HR-A,B	●	●	1	25	25	60	140	32,600	23	0.42
6025HR-A,B-L200	●		1	25	25	60	200	32,600	23	0.63
6032HR-A,B	●		1	32	32	70	150	28,800	23	0.72
6032HR-A,B-L220			1	32	32	70	220	28,800	23	1.14
6040HR-A,B-S32	●		2	40	32	70	160	25,800	23	0.88
6040HR-A,B-L220			2	40	32	70	220	25,800	23	1.23
6040HR-A,B-S40			2	40	40	70	160	25,800	23	1.2
6040HR-A,B-S42			2	40	42	70	160	25,800	23	1.3

• A type : Insert NoseR 0.4~3.2, B type : Insert NoseR 4.0~5.0 ● Stock item



Available Inserts



XEKT-MA


Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
XEKT 250604FR-MA														●	E22
250608FR-MA														●	
250612FR-MA														●	
250616FR-MA															
250630FR-MA															
250632FR-MA														●	
250640FR-MA															
250650FR-MA														●	

Parts

Specification	 Screw FTGA0513-P	 Wrench TW 20-100
Ø25~Ø40		

Available Inserts E22

PAXM5000

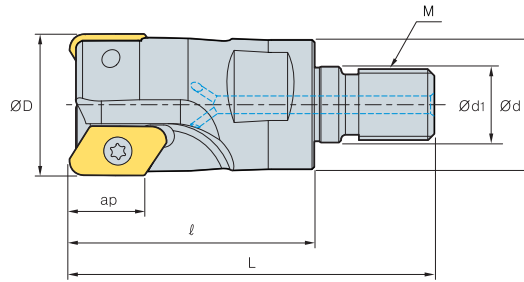

Designation	Stock		⊙	ØD	Ød	Ød ₁	ℓ	L	M	ap	kg
	A	B									
PAXM 5025HR-A,B-M12	●		2	25	23	12.5	55	79	M12	17	0.12
5032HR-A,B-M16	●		2	32	29	17.0	55	82	M16	17	0.2
5040HR-A,B-M16	●		3	40	29	17.0	55	82	M16	17	0.4

• A type : Insert NoseR 0.4~3.2, B type : Insert NoseR 4.0~5.0 ● Stock item

Available Inserts



XEKT-MA

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PD2000	A30		G10E
XEKT 19M504FR-MA											●			●
19M508FR-MA											●			●
19M512FR-MA											●			●
19M516FR-MA														●
19M518FR-MA														●
19M520FR-MA											●			●
19M530FR-MA														●
19M532FR-MA											●			●
19M540FR-MA											●			●
19M550FR-MA											●			●

Available Adaptors

Designation	Available Adaptors
PAXM 5025HR-A,B-M12	MAT - M12
5032HR-A,B-M16	MAT - M16
5040HR-A,B-M16	

Designation : PAXM5025HR-M12
Modular Head Threading Measure size(M12)


II

Adaptor Spec. : MAT-M12-030-S25S
Adaptor Threading Measure(M12)

Parts

Specification	Screw	Wrench
Ø25~Ø40	PTKA0407 PTKA0408	TW 15S

PALCM *New*

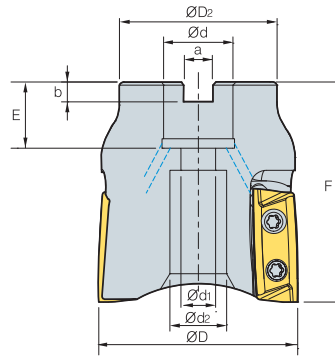

Designation	Stock		ØD	ØD2	Ød	Ød1	Ød2	Ød3	a	b	E	E1	F	ap	
PALCM 063HR		4	63	50	22	11	18	-	10.4	6.3	21	28	70	34	0.57

(mm)

● Stock item

▶ Available Inserts



Type	Designation	Cermet		Coated								Uncoated			Page
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E	
Ø63	LXET 340504PEFR-63-MA														E10
	3405PEFR-63-MA														
	340512PEFR-63-MA														
	340516PEFR-63-MA														
	340504PEER-63-ML														
	3405PEER-63-ML														
	340512PEER-63-ML														
	340516PEER-63-ML														

▶ Available Arbors

Designation	Ød	Available Arbors
PALCM 063HR	22	BT□□-FMC22-□□


▶ Parts

Specification		
Ø63	Screw FTGA0511-P	Wrench TW20-100

▶ Available Inserts E10

▶ Available Adaptors E318~E320

PALS (Single Edge) New

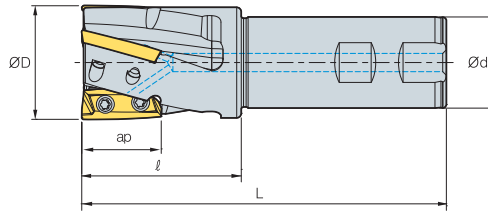

• AR: 12°~16°
• RR: -5°~9°

(mm)

Designation	Stock		ØD	Ød	l	L	ap	
PALS 032HR-2S20		2	32	20	50	140	25	0.36
032HR-2S25		2	32	25	50	140	25	0.48
032HR-2S32		2	32	32	50	140	25	0.71
040HR-2S32		2	40	32	50	140	25	0.85
040HR-2S40		2	40	40	50	140	25	1.16
040HR-2S42		2	40	42	50	140	25	1.26
040HR-3S32		3	40	32	50	140	25	0.80
040HR-3S40		3	40	40	50	140	25	1.10
040HR-3S42		3	40	42	50	140	25	1.20
050HR-3S32		3	50	32	70	160	34	1.10
050HR-3S40		3	50	40	70	160	34	1.40
050HR-3S42		3	50	42	70	160	34	1.50
063HR-4S32		4	63	32	70	160	34	1.60
063HR-4S40		4	63	40	70	160	34	1.92
063HR-4S42		4	63	42	70	160	34	2.00

● Stock item

Available Inserts



LXET-MA



LXET-ML

Type	Designation	Cermet		Coated						Uncoated			Type	Designation	Cermet		Coated						Uncoated			Page	
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400			A30	G10E	H01	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530		PC6510
Ø32	LXET 250404PEFR-32-MA												Ø50	LXET 340504PEFR-50-MA													E10
	2504PEFR-32-MA													LXET 3405PEFR-50-MA													
	250412PEFR-32-MA													LXET 340512PEFR-50-MA													
	250416PEFR-32-MA													LXET 340516PEFR-50-MA													
	250404PEER-32-ML													LXET 340504PEER-50-ML													
	2504PEER-32-ML													LXET 3405PEER-50-ML													
	250412PEER-32-ML													LXET 340512PEER-50-ML													
	250416PEER-32-ML													LXET 340516PEER-50-ML													
Ø40	LXET 250404PEFR-40-MA												Ø63	LXET 340504PEFR-63-MA													
	2504PEFR-40-MA											LXET 3405PEFR-63-MA															
	250412PEFR-40-MA											LXET 340512PEFR-63-MA															
	250416PEFR-40-MA											LXET 340516PEFR-63-MA															
	250404PEER-40-ML											LXET 340504PEER-63-ML															
	2504PEER-40-ML											LXET 3405PEER-63-ML															
	250412PEER-40-ML											LXET 340512PEER-63-ML															
	250416PEER-40-ML											LXET 340516PEER-63-ML															


Parts

Specification			
	Screw	Wrench	Wrench
Ø32	FTKA0408	TW15S	-
Ø40	FTKA0410	TW15S	-
Ø50	FTGA0510-P	-	TW20-100
Ø63	FTGA0511-P	-	TW20-100

Available Inserts E10



PALS (Multi Edge) *New*

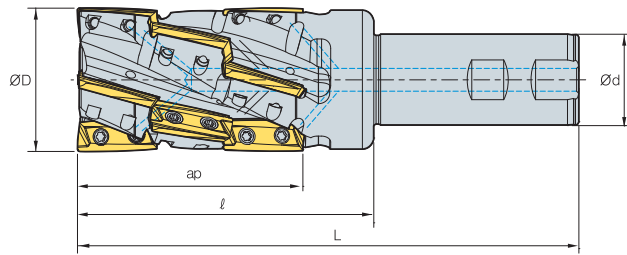

• AR : 16°
• RR : -8°

Designation	Stock		Ød	Ød ₁	l ₁	l ₂	ap	
PALS	063HM-4S32	12	63	32	130	220	96	1.60
	063HM-4S40	12	63	40	130	220	96	1.92
	063HM-4S42	12	63	42	130	220	96	2.00

(mm)

● Stock item

▶ Available Inserts




Type	Designation	Cermet		Coated							Uncoated			Page	
		CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
Ø63	LXET	340504PEFR-63-MA													E10
		3405PEFR-63-MA													
		340512PEFR-63-MA													
		340516PEFR-63-MA													
		340504PEER-63-ML													
		3405PEER-63-ML													
		340512PEER-63-ML													

▶ Parts

Specification		
Ø63	Screw FTGA0511-P	Wrench TW20-100

▶ Available Inserts E10

HSK63A/100A PAX5000

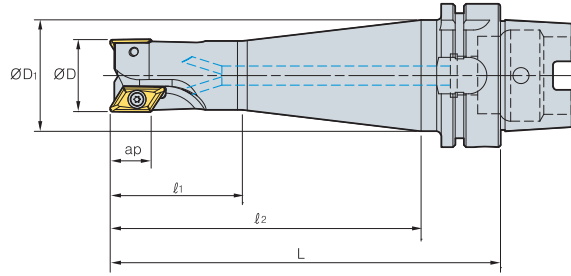

• AR : 5°~17.5°

• RR : -14°~5°

(mm)

Designation	Stock		⊘	ØD	ØD1	l ₁	l ₂	L	ap	kg
	A	B								
HSK63A PAX5032HR-A, B			2	32	53	58	137	163	17	1.14
HSK100A PAXCM5080HR-A, B			5	80	-	-	66	95	17	4
PAXCM5100HR-A, B			6	100	-	-	66	95	17	4.6

• A type : Insert NoseR 0.4~3.2, B type : Insert NoseR 4.0~5.0

• Max Rake Angle & Max rpm can be referred to E242~E243

● Stock item

▶ Available Inserts





XEKT-MA

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM625	NCM635	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PD2000	A30		G10E
XEKT 19M504FR-MA											●			●
19M508FR-MA											●			●
19M512FR-MA											●			●
19M516FR-MA											●			●
19M518FR-MA											●			●
19M520FR-MA											●			●
19M530FR-MA											●			●
19M532FR-MA											●			●
19M540FR-MA											●			●
19M550FR-MA											●			●

E22

▶ Parts

Specification	 Screw	 Wrench
Ø32~Ø100	PTKA0407 PTKA0408	TW 15S

▶ Available Inserts E22



MAT (Steel Shank type)

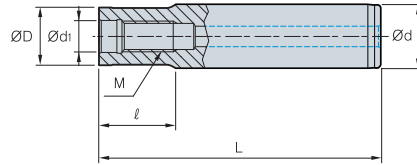


Fig. 1

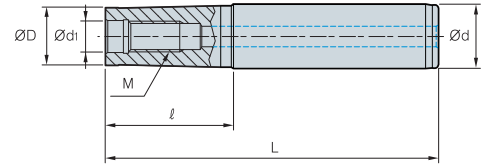


Fig. 2

(mm)

Designation	Stock	ØD	Ød	Ød ₁	ℓ	L	M	Fig.
MAT								
M06-020-S10S	●	9.5	10	6.5	20	70	M06	1
M6B-020-S12S	●	11.0	12	6.5	20	76	M06	1
M6B-040-S12S	●	11.0	12	6.5	40	96	M06	1
M08-020-S16S	●	14.5	16	8.5	20	80	M08	1
M10-030-S20S	●	18.0	20	10.5	30	100	M10	1
M12-030-S25S	●	22.5	25	12.5	29	110	M12	1
M16-035-S32S	●	28.5	32	17.0	35	125	M16	1
M06-040-S12T	●	9.5	12	6.5	40	96	M06	2
M06-065-S16T	●	9.5	16	6.5	65	125	M06	2
M6B-065-S16T	●	11.0	16	6.5	65	125	M06	2
M6B-080-S16T	●	11.0	16	6.5	80	140	M06	2
M08-040-S16T	●	14.5	16	8.5	40	100	M08	2
M08-065-S16T	●	14.5	16	8.5	65	125	M08	2
M08-080-S20T	●	14.5	20	8.5	80	150	M08	2
M08-110-S25T	●	14.5	25	8.5	110	190	M08	2
M10-050-S20T	●	18.0	20	10.5	50	120	M10	2
M10-070-S20T	●	18.0	20	10.5	70	140	M10	2
M10-090-S25T		18.0	25	10.5	90	170	M10	2
M10-110-S25T	●	18.0	25	10.5	110	190	M10	2
M10-130-S32T	●	18.0	32	10.5	130	220	M10	2
M12-050-S25T	●	22.5	25	12.5	50	130	M12	2
M12-070-S25T		22.5	25	12.5	70	150	M12	2
M12-090-S25T	●	22.5	25	12.5	90	170	M12	2
M12-110-S32T	●	22.5	32	12.5	110	200	M12	2
M12-175-S40T	●	22.5	40	12.5	175	300	M12	2
M16-055-S32T	●	28.5	32	17.0	55	145	M16	2
M16-080-S32T	●	28.5	32	17.0	80	170	M16	2
M16-120-S32T	●	28.5	32	17.0	120	210	M16	2
M16-175-S40T	●	28.5	40	17.0	175	300	M16	2

• S : Straight Neck Adaptor • T : Taper Neck Adaptor

<p>FMRM type</p> <p>E197, 198, 207</p>	<p>LBE-MHD type</p> <p>E242</p>	<p>PAM type</p> <p>E271</p>	<p>PAXM type</p> <p>E276</p>	<p>AMM type</p> <p>E140, 141, 142</p>
<p>RM4PM type</p> <p>E82</p>	<p>RM4ZM type</p> <p>E84</p>	<p>HRMM type</p> <p>E227</p>	<p>HRMDM type</p> <p>E221, 222</p>	<p>PAXM type</p> <p>E276</p>

Applicable Modular E33 (FMRM, LBE, PAM, AMM, RM4PM, RM4ZM, HRMM, PAXM)

MAT-C(Carbide Shank type)

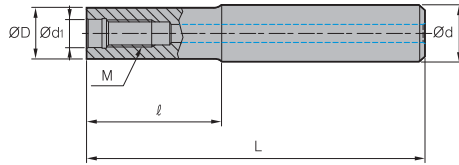


Fig. 1

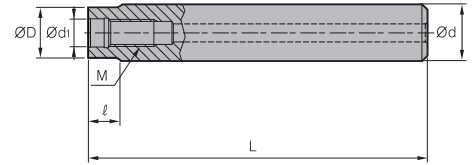


Fig. 2

(mm)

	Designation	Stock	ØD	Ød	Ød1	ℓ	L	M	Fig.
MAT	M08-080-S16S-C	●	14.5	16	8.5	80	150	M08	1
	M08-110-S16S-C	●	14.5	16	8.5	110	180	M08	1
	M08-150-S16S-C		14.5	16	8.5	150	250	M08	1
	M08-010-S16S-C-150		14.5	16	8.5	10	150	M08	2
	M08-010-S16S-C-180		14.5	16	8.5	10	180	M08	2
	M08-010-S16S-C-250		14.5	16	8.5	10	250	M08	2
	M10-090-S20S-C	●	18.0	20	10.5	90	170	M10	1
	M10-110-S20S-C		18.0	20	10.5	110	200	M10	1
	M10-175-S20S-C		18.0	20	10.5	175	300	M10	1
	M10-010-S20S-C-170	●	18.0	20	10.5	10	170	M10	2
	M10-010-S20S-C-200		18.0	20	10.5	10	200	M10	2
	M10-010-S20S-C-300		18.0	20	10.5	10	300	M10	2
	M12-090-S25S-C	●	22.5	25	12.5	90	170	M12	1
	M12-110-S25S-C		22.5	25	12.5	110	200	M12	1
	M12-175-S25S-C		22.5	25	12.5	175	300	M12	1
	M12-015-S25S-C-170		22.5	25	12.5	15	170	M12	2
	M12-015-S25S-C-200		22.5	25	12.5	15	200	M12	2
	M12-015-S25S-C-300		22.5	25	12.5	15	300	M12	2
	M16-090-S32S-C	●	28.5	32	17.0	90	180	M16	1
	M16-120-S32S-C		28.5	32	17.0	120	210	M16	1
M16-175-S32S-C		28.5	32	17.0	175	300	M16	1	
M16-020-S32S-C-180		28.5	32	17.0	20	180	M16	2	
M16-020-S32S-C-210		28.5	32	17.0	20	210	M16	2	
M16-020-S32S-C-300	●	28.5	32	17.0	20	300	M16	2	

● Stock item

FMRM type



➡ E197, 198, 207

LBE-MHD type



➡ E242

PAM type



➡ E271

PAXM type



➡ E276

AMM type



➡ E140, 141, 142

RM4PM type



➡ E82

RM4ZM type



➡ E84

HRMM type



➡ E227

HRMDM type



➡ E221, 222

PAXM type



➡ E276



Adjusting side cutter

▶ Code System

P : Plane type
B : Boss type

A : Adjusting side cutter
Adjusting

Cutter type

Max. width of cutter

For half side cutter, minimum width of the cutter will be written only.

R **A** **FC** **B** **125** **14** **18** - **R**

Insert clamping way **Insert configuration** **Cutter Dia.** **Min. width of cutter** **Hand**

R : Radial type
(Using SDXT)


T : Tangential type
(Using CNHQ)

FC
Full side cutter

HC
Half side cutter


Hand		
Unmarked	R	L
Neutral	Right	Left
Full side cutter (Plane type)	Half side cutter (Boss type)	

▶ Tangential Type (High rigidity)

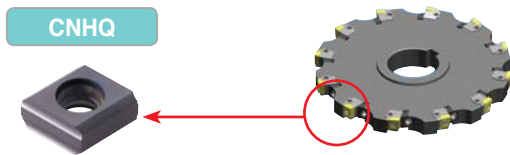

- Medium/Roughing
- Excellent performance at medium to roughing range (14~30mm) table operation due to the strong rigidity of the cutter
- Good performance in heavy interruption and deep depth of cut application

▶ Radial Type (Low cutting load)

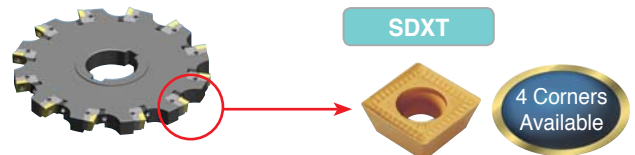


- Medium/Finishing
- Suitable for small width cutting operation (12~24mm)
- 3 dimensional chip breaker provides smooth cutting operation.
- Several chip breakers as per applications are available (MF, MM, FA)
- Economical insert using 4 cutting edges per insert

▶ Insert Features

- ▶ Precise adjustable side cutter can control the width of the cutter by 5 μ m unit
- ▶ Since the width of the cutter is adjustable up to ± 1.5 mm, single cutter can cover various cutting width
- ▶ Specially designed clamping system of the locator provides excellent rigidity by using elastic deformation of the locator
- ▶ Tangential type clamping system of insert provides enough strength can withstand large width cutting operations
- ▶ 3-dimensional chip breaker of insert provides smooth cutting with low cutting load at medium to finishing range

▶ Operating manual

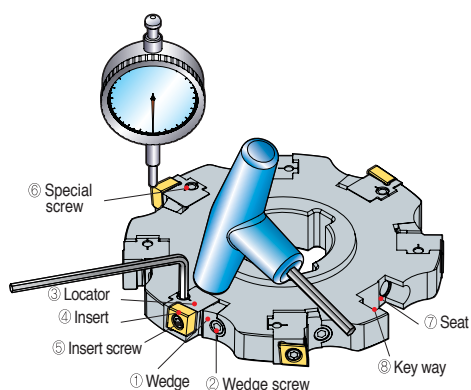

How to assemble the adjusting side cutter


1. Clamp ①wedge slightly on ⑦locator-wedge pocket by using ②wedge screw
2. Put ③locator on ⑦locator-wedge pocket along with the ⑧key-way
3. Tighten the ⑥taper screw little bit to set proper position of locator
4. Tighten the ②wedge screw tightly by using 70~80N.m torque
5. After put the ④insert on insert pocket of ③locator, clamp it with ⑤insert screw by using 40~50N.m torque

How to adjust Run-out & Cutting width

1. Settle the adjusting side cutter after cleaning to the jig for measurement
2. Un-screw the ②Wedge screw first, then tighten ①wedge slightly again by using 8N.m torque
3. Adjusting the height of cutting edge by using a dial gauge to set the width of the cutter
4. Tighten the ②wedge screw tightly by using 70~80N.m torque
5. To finish the setting, tighten the ⑥taper screw for strong clamp

Tangential type

▶ Cutting width as per insert & type of cutter



Designation	Coated		Cutting width for half side cutter (ap)	Cutting width for full side cutter (ap)	L	d	t
	NCM325	PC6510					
CNHQ1005	- C0.5		9.0	14~18	10	10	5.4
	- R0.5						
	- C1.0						
	- R1.0						
CNHQ1305	- C0.5		12	18~21 / 21~24	12.7	10	5.4
	- R0.5		11.5	18~21 / 21~23			
	- C1.0		11	18~21 / 21~22			
	- R1.0						
	- C1.5						
CNHQ1606	- C0.5		15	24~27 / 27~30	16	12	6.4
	- R0.5		14.5	24~27 / 27~29			
	- C1.0		14	24~27 / 27~28			
	- R1.0						
	- C1.5						
	- R1.5						
	- C2.0		13.5	24~27			

▶ Applicable holder E285, E286 ▶ Available Arbors and bolt E318~E320


● Stock item

▶ Recommended cutting condition

ISO	Grades	vc(m/min)	fz(mm/t)
P	NCM325	190~310	0.10~0.30
	PC3500	160~270	
M	PC5300	90~150	0.10~0.30
	NCM335	180~290	
K	PC215K	120~200	0.10~0.30
	PC6510	140~230	

Radial type

▶ Cutting width as per insert & type of cutter



Designation	Coated							Uncoated	Cutting width for half side cutter (ap)	Cutting width for full side cutter (ap)	d	t
	NCM325	NCM335	PC3500	PC3545	PC9530	PC6510	PC5300	H01				
SDXT	09M405R-MA							●	8	12~14 14~16	9.525	4
	09M405L-MA											
	09M405R-MF	●	●			●	●	●				
	09M405L-MF											
	09M405R-MM	●	●	●		●	●	●				
	09M405L-MM											
SDXT	130508R-MA							●	10.5	16~18 18~20 20~22 22~24	13.5	5.56
	130508L-MA											
	130508R-MF	●	●			●	●	●				
	130508L-MF											
	130508R-MM	●	●	●		●	●	●				
	130508L-MM											

▶ Applicable holder E287, E288 ▶ Available Arbors and bolt E318~E320


● Stock item

▶ Recommended cutting condition


ISO	Grades	vc(m/min)	fz(mm/t)
P	NCM325	190~310	0.08~0.30
	NCM335	180~290	0.08~0.25
	PC3500	160~270	0.10~0.25
M	PC9530	90~150	0.10~0.25
	PC5300	90~150	
K	PC8110	140~230	0.10~0.25
	PC6510	140~230	



Tangential type (Full side cutter)

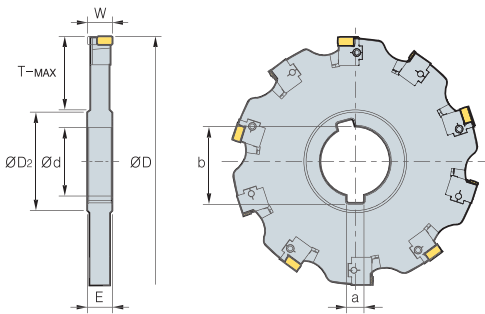

• TAFCP(M)

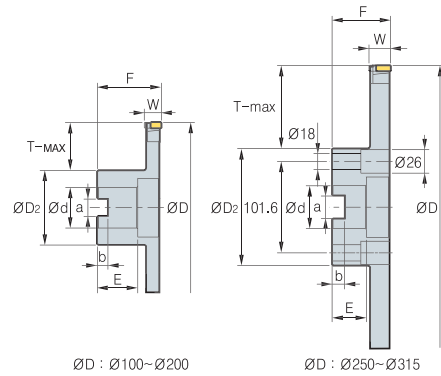

• TAFCB(M)

Designation	Ød	E	ØD2	a	b	T-MAX	Designation	Ød	F	ØD2	a	b	E	T-MAX	Designation		
															ØD	W	No. of tooth
TAFCP (M) 1001418	31.75(32)	14	48	7.92(8)	35.2	24	TAFCB (M) 1001418R/L	31.75(32)	50	54	12.7(14.4)	8	28	21	100	14-18	6
1251418	38.1(40)	14	56	9.52(10)	42.3	32	1251418R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	14-18	8
1601418	38.1(40)	14	56	9.52(10)	42.3	50	1601418R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	14-18	10
2001418	50.8(50)	14	72	12.7(12)	55.8	61	2001418R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	14-18	12
2501418	50.8(50)	14	72	12.7(12)	55.8	86	2501418R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	14-18	16
3151418	50.8(50)	14	72	12.7(12)	55.8	118	3151418R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	14-18	20
TAFCP (M) 1001821	31.75(32)	18	48	7.92(8)	35.2	24	TAFCB (M) 1001821R/L	31.75(32)	50	50	12.7(14.4)	8	28	21	100	18-21	6
1251821	38.1(40)	18	56	9.52(10)	42.3	32	1251821R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	18-21	8
1601821	38.1(40)	18	56	9.52(10)	42.3	50	1601821R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	18-21	10
2001821	50.8(50)	18	72	12.7(12)	55.8	61	2001821R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	18-21	12
2501821	50.8(50)	18	72	12.7(12)	55.8	86	2501821R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	18-21	16
3151821	50.8(50)	18	72	12.7(12)	55.8	118	3151821R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	18-21	20
TAFCP (M) 1002124	31.75(32)	21	48	7.92(8)	35.2	24	TAFCB (M) 1002124R/L	31.75(32)	50	54	12.7(14.4)	8	28	21	100	21-24	6
1252124	38.1(40)	21	56	9.52(10)	42.3	32	1252124R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	21-24	8
1602124	38.1(40)	21	56	9.52(10)	42.3	50	1602124R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	21-24	10
2002124	50.8(50)	21	72	12.7(12)	55.8	61	2002124R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	21-24	12
2502124	50.8(50)	21	72	12.7(12)	55.8	86	2502124R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	21-24	16
3152124	50.8(50)	21	72	12.7(12)	55.8	118	3152124R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	21-24	20
TAFCP (M) 1252427	38.1(40)	24	56	9.52(10)	42.3	32	TAFCB (M) 1252427R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	24-27	8
1602427	38.1(40)	24	56	9.52(10)	42.3	50	1602427R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	24-27	10
2002427	50.8(50)	24	72	12.7(12)	55.8	61	2002427R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	24-27	12
2502427	50.8(50)	24	72	12.7(12)	55.8	86	2502427R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	24-27	16
3152427	50.8(50)	24	72	12.7(12)	55.8	118	3152427R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	24-27	20
TAFCP (M) 1252730	38.1(40)	27	56	9.52(10)	42.3	32	TAFCB (M) 1252730R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	27-30	8
1602730	38.1(40)	27	56	9.52(10)	42.3	50	1602730R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	27-30	10
2002730	50.8(50)	27	72	12.7(12)	55.8	61	2002730R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	27-30	12
2502730	50.8(50)	27	72	12.7(12)	55.8	86	2502730R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	27-30	16
3152730	50.8(50)	27	72	12.7(12)	55.8	118	3152730R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	27-30	20

➡ Available Inserts and Recommended cutting condition **E284**

• The ap (Maximum width of cutter) size written above is the number when using insert having corner size C0.5 or R0.5

• () Metric Size


Parts

Specification	Insert	Locator	Wedge	Insert Screw	Wedge Screw	Locator Screw	Insert Wrench	Wedge Wrench	Locator Wrench
□□□1418R/L	CNHQ1005-□□□	LSA-CH10R/L	WSA10N	FTKA0410	DHA0617	SHGA0411	TW15S	HW30	-
□□□1821R/L	CNHQ1305-□□□	LSA-CH13R/L	WSA13N	FTKA0410	DHA0821F	SHGA0411	TW15S	HW40	HW30L
□□□2124R/L	CNHQ1305-□□□	LSA-CH13R/L	WSA13N	FTKA0410	DHA0821F	SHGA0411	TW15S	HW40	HW30L
□□□2427R/L	CNHQ1606-□□□	LSA-CH16R/L	WSA13N	FTGA0513-P	DHA0821F	SHGA0411	TW20S	HW40	HW30L
□□□2730R/L	CNHQ1606-□□□	LSA-CH16R/L	WSA13N	FTGA0513-P	DHA0821F	SHGA0411	TW20S	HW40	HW30L


• Note) The Wedge screw for 1001821, 1002124 cutter is DHA0818F



Tangential type (Half side cutter)

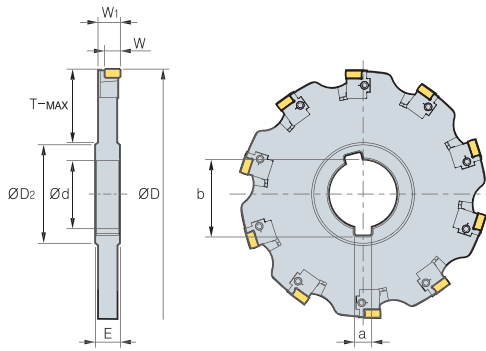

• TAHCP(M)

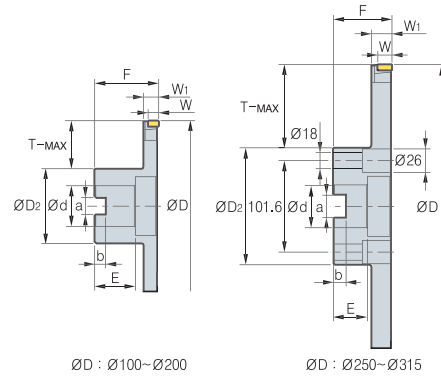

ØD : Ø100~Ø200

ØD : Ø250~Ø315

• TAHCB(M)

(mm)

Designation	Ød	E	ØD2	a	b	T-MAX	Designation	Ød	F	ØD2	a	b	E	T-MAX	Dimensions			
															ØD	W	W1	No. of tooth
TAHCP (M) 10014R/L	31.75(32)	14	48	7.92(8)	35.2	24	TAHCB (M) 10014R/L	31.75(32)	50	54	12.7(14.4)	8	28	21	100	9	13.25	6
TAHCP (M) 12514R/L	38.1(40)	14	56	9.52(10)	42.3	32	TAHCB (M) 12514R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	9	13.25	8
TAHCP (M) 16014R/L	38.1(40)	14	56	9.52(10)	42.3	50	TAHCB (M) 16014R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	9	13.25	10
TAHCP (M) 20014R/L	50.8(50)	14	72	12.7(12)	55.8	61	TAHCB (M) 20014R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	9	13.25	12
TAHCP (M) 25014R/L	50.8(50)	14	72	12.7(12)	55.8	86	TAHCB (M) 25014R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	9	13.25	16
TAHCP (M) 31514R/L	50.8(50)	14	72	12.7(12)	55.8	118	TAHCB (M) 31514R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	9	13.25	20
TAHCP (M) 10018R/L	31.75(32)	18	48	7.92(8)	35.2	24	TAHCB (M) 10018R/L	31.75(32)	50	50	12.7(14.4)	8	28	21	100	12	16.75	6
TAHCP (M) 12518R/L	38.1(40)	18	56	9.52(10)	42.3	32	TAHCB (M) 12518R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	12	16.75	8
TAHCP (M) 16018R/L	38.1(40)	18	56	9.52(10)	42.3	50	TAHCB (M) 16018R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	12	16.75	10
TAHCP (M) 20018R/L	50.8(50)	18	72	12.7(12)	55.8	61	TAHCB (M) 20018R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	12	16.75	12
TAHCP (M) 25018R/L	50.8(50)	18	72	12.7(12)	55.8	86	TAHCB (M) 25018R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	12	16.75	16
TAHCP (M) 31518R/L	50.8(50)	18	72	12.7(12)	55.8	118	TAHCB (M) 31518R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	12	16.75	20
TAHCP (M) 10021R/L	31.75(32)	21	48	7.92(8)	35.2	24	TAHCB (M) 10021R/L	31.75(32)	50	54	12.7(14.4)	8	28	21	100	12	19.75	6
TAHCP (M) 12521R/L	38.1(40)	21	56	9.52(10)	42.3	32	TAHCB (M) 12521R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	12	19.75	8
TAHCP (M) 16021R/L	38.1(40)	21	56	9.52(10)	42.3	50	TAHCB (M) 16021R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	12	19.75	10
TAHCP (M) 20021R/L	50.8(50)	21	72	12.7(12)	55.8	61	TAHCB (M) 20021R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	12	19.75	12
TAHCP (M) 25021R/L	50.8(50)	21	72	12.7(12)	55.8	86	TAHCB (M) 25021R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	12	19.75	16
TAHCP (M) 31521R/L	50.8(50)	21	72	12.7(12)	55.8	118	TAHCB (M) 31521R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	12	19.75	20
TAHCP (M) 12524R/L	38.1(40)	24	56	9.52(10)	42.3	32	TAHCB (M) 12524R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	15	22.75	8
TAHCP (M) 16024R/L	38.1(40)	24	56	9.52(10)	42.3	50	TAHCB (M) 16024R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	15	22.75	10
TAHCP (M) 20024R/L	50.8(50)	24	72	12.7(12)	55.8	61	TAHCB (M) 20024R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	15	22.75	12
TAHCP (M) 25024R/L	50.8(50)	24	72	12.7(12)	55.8	86	TAHCB (M) 25024R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	15	22.75	16
TAHCP (M) 31524R/L	50.8(50)	24	72	12.7(12)	55.8	118	TAHCB (M) 31524R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	15	22.75	20
TAHCP (M) 12527R/L	38.1(40)	27	56	9.52(10)	42.3	32	TAHCB (M) 12527R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	15	25.75	8
TAHCP (M) 16027R/L	38.1(40)	27	56	9.52(10)	42.3	50	TAHCB (M) 16027R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	15	25.75	10
TAHCP (M) 20027R/L	50.8(50)	27	72	12.7(12)	55.8	61	TAHCB (M) 20027R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	15	25.75	12
TAHCP (M) 25027R/L	50.8(50)	27	72	12.7(12)	55.8	86	TAHCB (M) 25027R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	15	25.75	16
TAHCP (M) 31527R/L	50.8(50)	27	72	12.7(12)	55.8	118	TAHCB (M) 31527R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	15	25.75	20

Available Inserts and Recommended cutting condition E284

The ap (Maximum width of cutter) size written above is the number when using insert having corner size C0.5 or R0.5

() Metric Size


Parts

Specification	Insert	Locator	Wedge	Insert Screw	Wedge Screw	Locator Screw	Insert Wrench	Wedge Wrench	Locator Wrench
□□□1418R/L	CNHQ1005-□□□	LSA-CH10R/L	WSA10N	FTKA0410	DHA0617	SHGA0411	TW15S	HW30	-
□□□1821R/L	CNHQ1305-□□□	LSA-CH13R/L	WSA13N	FTKA0410	DHA0821F	SHGA0411	TW15S	HW40	HW30L
□□□2124R/L	CNHQ1305-□□□	LSA-CH13R/L	WSA13N	FTKA0410	DHA0821F	SHGA0411	TW15S	HW40	HW30L
□□□2427R/L	CNHQ1606-□□□	LSA-CH16R/L	WSA13N	FTGA0513-P	DHA0821F	SHGA0411	TW20S	HW40	HW30L
□□□2730R/L	CNHQ1606-□□□	LSA-CH16R/L	WSA13N	FTGA0513-P	DHA0821F	SHGA0411	TW20S	HW40	HW30L


Note) The Wedge screw for 10018, 10021 cutter is DHA0818F



Radial type (Full side cutter)

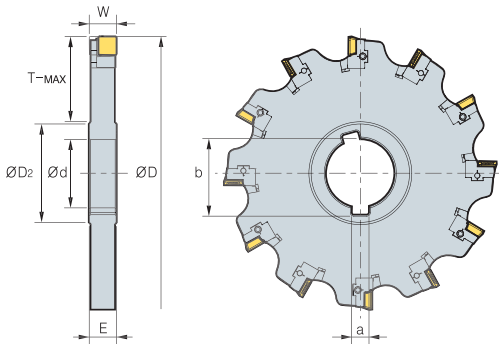

• RAFCP(M)

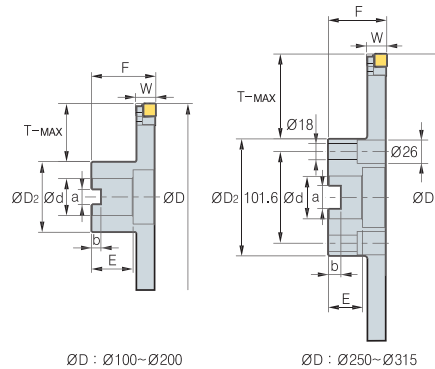

• RAFCB(M)

ØD : Ø100~Ø200

ØD : Ø250~Ø315

RAFCP (M)						RAFCB (M)						Dimensions (mm)					
Designation	Ød	E	ØD2	a	b	T-MAX	Designation	Ød	F	ØD2	a	b	E	T-MAX	ØD	W	No. of tooth
RAFCP 1001214 (M)	31.75(32)	12	48	7.92(8)	35.2	24	RAFCB 1001214R/L (M)	31.75(32)	50	54	12.7(14.4)	8	28	21	100	12-14	6
1251214	38.1(40)	12	56	9.52(10)	42.3	32	1251214R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	12-14	8
1601214	38.1(40)	12	56	9.52(10)	42.3	50	1601214R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	12-14	10
2001214	50.8(50)	12	72	12.7(12)	55.8	61	2001214R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	12-14	12
2501214	50.8(50)	12	72	12.7(12)	55.8	86	2501214R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	12-14	16
3151214	50.8(50)	12	72	12.7(12)	55.8	118	3151214R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	12-14	20
RAFCP 1001416 (M)	31.75(32)	14	48	7.92(8)	35.2	24	RAFCB 1001416R/L (M)	31.75(32)	50	50	12.7(14.4)	8	28	21	100	14-16	6
1251416	38.1(40)	14	56	9.52(10)	42.3	32	1251416R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	14-16	8
1601416	38.1(40)	14	56	9.52(10)	42.3	50	1601416R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	14-16	10
2001416	50.8(50)	14	72	12.7(12)	55.8	61	2001416R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	14-16	12
2501416	50.8(50)	14	72	12.7(12)	55.8	86	2501416R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	14-16	16
3151416	50.8(50)	14	72	12.7(12)	55.8	118	3151416R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	14-16	20
RAFCP 1251618 (M)	38.1(40)	16	56	9.52(10)	42.3	32	RAFCB 1251618R/L (M)	38.1(40)	60	70	15.9(16.4)	10	30	25	125	16-18	8
1601618	38.1(40)	16	56	9.52(10)	42.3	50	1601618R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	16-18	10
2001618	50.8(50)	16	72	12.7(12)	55.8	61	2001618R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	16-18	12
2501618	50.8(50)	16	72	12.7(12)	55.8	86	2501618R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	16-18	16
3151618	50.8(50)	16	72	12.7(12)	55.8	118	3151618R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	16-18	20
RAFCP 1251820 (M)	38.1(40)	18	56	9.52(10)	42.3	32	RAFCB 1251820R/L (M)	38.1(40)	60	70	15.9(16.4)	10	30	25	125	18-20	8
1601820	38.1(40)	18	56	9.52(10)	42.3	50	1601820R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	18-20	10
2001820	50.8(50)	18	72	12.7(12)	55.8	61	2001820R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	18-20	12
2501820	50.8(50)	18	72	12.7(12)	55.8	86	2501820R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	18-20	16
3151820	50.8(50)	18	72	12.7(12)	55.8	118	3151820R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	18-20	20
RAFCP 1252022 (M)	38.1(40)	20	56	9.52(10)	42.3	32	RAFCB 1252022R/L (M)	38.1(40)	60	70	15.9(16.4)	10	30	25	125	20-22	8
1602022	38.1(40)	20	56	9.52(10)	42.3	50	1602022R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	20-22	10
2002022	50.8(50)	20	72	12.7(12)	55.8	61	2002022R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	20-22	12
2502022	50.8(50)	20	72	12.7(12)	55.8	86	2502022R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	20-22	16
3152022	50.8(50)	20	72	12.7(12)	55.8	118	3152022R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	20-22	20
RAFCP 1252224 (M)	38.1(40)	22	56	9.52(10)	42.3	32	RAFCB 1252224R/L (M)	38.1(40)	60	70	15.9(16.4)	10	30	25	125	22-24	8
1602224	38.1(40)	22	56	9.52(10)	42.3	50	1602224R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	22-24	10
2002224	50.8(50)	22	72	12.7(12)	55.8	61	2002224R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	22-24	12
2502224	50.8(50)	22	72	12.7(12)	55.8	86	2502224R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	22-24	16
3152224	50.8(50)	22	72	12.7(12)	55.8	118	3152224R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	22-24	20


Available Inserts and Recommended cutting condition **E284** • The ap (Maximum width of cutter) size written above is the number when using insert having corner size C0.5 or R0.5
 • () Metric Size

Parts


Specification	Insert	Locator	WSD09N Wedge	WSA10N Wedge	Insert Screw	Wedge Screw	Locator Screw	Insert Wrench	Wedge, Locator Wrench
□□□1214R/L	SDXT09M40□R/L	LSD09R/L	WSD09N	WSA10N	FTGA03508	DHA0617	SHGA0409	TW15S	HW30
□□□1416R/L	SDXT09M40□R/L	LSD09R/L	WSD09N	WSA10N	FTGA03508	DHA0617	SHGA0409	TW15S	HW30
□□□1618R/L	SDXT13050□R/L	LSD13R/L	WSD09N	WSA10N	FTNC04509	DHA0617	SHGA0411	TW20S	HW30
□□□1820R/L	SDXT13050□R/L	LSD13R/L	WSD09N	WSA10N	FTNC04509	DHA0617	SHGA0411	TW20S	HW30
□□□2022R/L	SDXT13050□R/L	LSD13R/L	WSD09N	WSA10N	FTNC04509	DHA0617	SHGA0411	TW20S	HW30
□□□2224R/L	SDXT13050□R/L	LSD13R/L	WSD09N	WSA10N	FTNC04509	DHA0617	SHGA0411	TW20S	HW30



Radial type (Half side cutter)

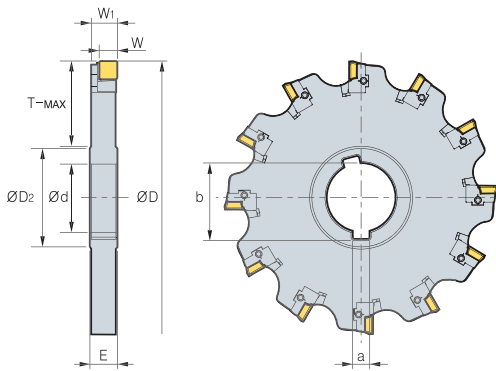

• RAHCP(M)

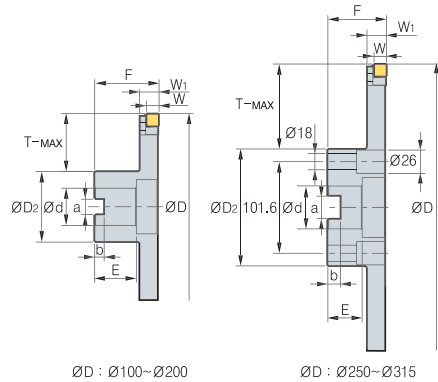

ØD : Ø100-Ø200

ØD : Ø250-Ø315

• RAHCB(M)

(mm)

Designation	Ød	E	ØD2	a	b	T-MAX	Designation	Ød	F	ØD2	a	b	E	T-MAX	Dimensions			
															ØD	W	W1	No. of tooth
RAHCP 10012R/L (M)	31.75(32)	12	48	7.92(8)	35.2	24	RAHCB 10012R/L (M)	31.75(32)	50	54	12.7(14.4)	8	28	21	100	8	11.1	6
12512R/L	38.1(40)	12	56	9.52(10)	42.3	32	12512R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	8	11.1	8
16012R/L	38.1(40)	12	56	9.52(10)	42.3	50	16012R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	8	11.1	10
20012R/L	50.8(50)	12	72	12.7(12)	55.8	61	20012R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	8	11.1	12
25012R/L	50.8(50)	12	72	12.7(12)	55.8	86	25012R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	8	11.1	16
31512R/L	50.8(50)	12	72	12.7(12)	55.8	118	31512R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	8	11.1	20
RAHCP 10014R/L (M)	31.75(32)	14	48	7.92(8)	35.2	24	RAHCB 10014R/L (M)	31.75(32)	50	50	12.7(14.4)	8	28	21	100	8	13.1	6
12514R/L	38.1(40)	14	56	9.52(10)	42.3	32	12514R/L	38.1(40)	60	70	15.9(16.4)	10	30	25	125	8	13.1	8
16014R/L	38.1(40)	14	56	9.52(10)	42.3	50	16014R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	8	13.1	10
20014R/L	50.8(50)	14	72	12.7(12)	55.8	61	20014R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	8	13.1	12
25014R/L	50.8(50)	14	72	12.7(12)	55.8	86	25014R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	8	13.1	16
31514R/L	50.8(50)	14	72	12.7(12)	55.8	118	31514R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	8	13.1	20
RAHCP 12516R/L (M)	38.1(40)	16	56	9.52(10)	42.3	32	RAHCB 12516R/L (M)	38.1(40)	60	70	15.9(16.4)	10	30	25	125	10.5	15	8
16016R/L	38.1(40)	16	56	9.52(10)	42.3	50	16016R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	10.5	15	10
20016R/L	50.8(50)	16	72	12.7(12)	55.8	61	20016R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	10.5	15	12
25016R/L	50.8(50)	16	72	12.7(12)	55.8	86	25016R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	10.5	15	16
31516R/L	50.8(50)	16	72	12.7(12)	55.8	118	31516R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	10.5	15	20
RAHCP 12518R/L (M)	38.1(40)	18	56	9.52(10)	42.3	32	RAHCB 12518R/L (M)	38.1(40)	60	70	15.9(16.4)	10	30	25	125	10.5	17	8
16018R/L	38.1(40)	18	56	9.52(10)	42.3	50	16018R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	10.5	17	10
20018R/L	50.8(50)	18	72	12.7(12)	55.8	61	20018R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	10.5	17	12
25018R/L	50.8(50)	18	72	12.7(12)	55.8	86	25018R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	10.5	17	16
31518R/L	50.8(50)	18	72	12.7(12)	55.8	118	31518R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	10.5	17	20
RAHCP 12520R/L (M)	38.1(40)	20	56	9.52(10)	42.3	32	RAHCB 12520R/L (M)	38.1(40)	60	70	15.9(16.4)	10	30	25	125	10.5	19	8
16020R/L	38.1(40)	20	56	9.52(10)	42.3	50	16020R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	10.5	19	10
20020R/L	50.8(50)	20	72	12.7(12)	55.8	61	20020R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	10.5	19	12
25020R/L	50.8(50)	20	72	12.7(12)	55.8	86	25020R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	10.5	19	16
31520R/L	50.8(50)	20	72	12.7(12)	55.8	118	31520R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	10.5	19	20
RAHCP 12522R/L (M)	38.1(40)	22	56	9.52(10)	42.3	32	RAHCB 12522R/L (M)	38.1(40)	60	70	15.9(16.4)	10	30	25	125	10.5	21	8
16022R/L	38.1(40)	22	56	9.52(10)	42.3	50	16022R/L	38.1(40)	60	70	15.9(16.4)	10	30	43	160	10.5	21	10
20022R/L	50.8(50)	22	72	12.7(12)	55.8	61	20022R/L	50.8(40)	65	90	19.0(16.4)	11	30	53	200	10.5	21	12
25022R/L	50.8(50)	22	72	12.7(12)	55.8	86	25022R/L	47.625(60)	65	130	25.4(25.7)	14	38	58	250	10.5	21	16
31522R/L	50.8(50)	22	72	12.7(12)	55.8	118	31522R/L	47.625(60)	65	130	25.4(25.7)	14	38	90	315	10.5	21	20

Available Inserts and Recommended cutting condition E284


• The ap (Maximum width of cutter) size written above is the number when using insert having corner size R0.5. The ap is subject to change as per insert corner size
 • The ap (Maximum width of cutter) size written above is the number when using SDXT09M405R-MM. The ap is subject to change as per insert corner size
 • () Metric Size

Parts

Specification	Insert	Locator	WSD09N Wedge	WSA10N Wedge	Insert Screw	Wedge Screw	Locator Screw	Insert Wrench	Wedge, Locator Wrench
□□□1214R/L	SDXT09M40□R/L	LSD09R/L	WSD09N	WSA10N	FTGA03508	DHA0617	SHGA0409	TW15S	HW30
□□□1416R/L	SDXT09M40□R/L	LSD09R/L	WSD09N	WSA10N	FTGA03508	DHA0617	SHGA0409	TW15S	HW30
□□□1618R/L	SDXT13050□R/L	LSD13R/L	WSD09N	WSA10N	FTNC04509	DHA0617	SHGA0411	TW20S	HW30
□□□1820R/L	SDXT13050□R/L	LSD13R/L	WSA10N	WSA10N	FTNC04509	DHA0617	SHGA0411	TW20S	HW30
□□□2022R/L	SDXT13050□R/L	LSD13R/L	WSA10N	WSA10N	FTNC04509	DHA0617	SHGA0411	TW20S	HW30
□□□2224R/L	SDXT13050□R/L	LSD13R/L	WSA10N	WSA10N	FTNC04509	DHA0617	SHGA0411	TW20S	HW30



FC(M) (Full side cutter)

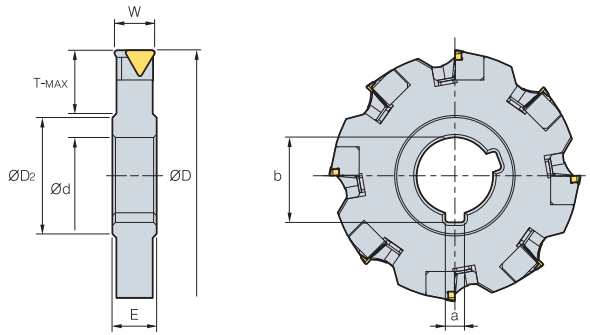

(mm)

Designation	Stock		ØD	W	T-MAX	Ød	E	a	b	ØD2	Insert	
FC (FCM)	08010		6	80	10	17.0	25.4(27)	12	6.35(7)	28	41.5	TPCN1103PPN
	10012		8	100	12	24.0	31.75(32)	14	7.92(8)	35.2	48	TPCN1103PPN
	12512		10	125	12	31.5	38.1(40)	14	9.52(10)	42.3	58	TPCN1103PPN
	12520		8	125	20	31.5	38.1(40)	22	9.52(10)	42.3	58	TPCN1103PPN
	16012		12	160	12	49.0	38.1(40)	14	9.52(10)	42.3	58	TPCN1103PPN
	16016		12	160	16	49.0	38.1(40)	18	9.52(10)	42.3	58	TPCN1103PPN
	16018		10	10	18	49.0	38.1(40)	20	9.52(10)	42.3	58	TPCN1603PPN
	16020		10	10	20	49.0	38.1(40)	22	9.52(10)	42.3	58	TPCN1603PPN
	20022		12	200	22	61.0	50.8(50)	24	12.7(12)	55.8	72	TPCN1603PPN
	25024		16	250	24	81.0	50.8(50)	26	12.7(12)	55.8	84	TPCN1603PPN
31524		16	315	24	113.5	50.8(50)	26	12.7(12)	55.8	84	TPCN1603PPN	

• () Metric Size, • Stock item

▶ Available Inserts



TPCN

Designation	Cermet		Coated							Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E
TPCN 1103PPN		●										●	●	
1603PPN		●	●						●				●	

E21

▶ Available Arbors


Designation	Arbors		
FC(M)	08010	BT40-SCA27-75/120	BT50-SCA27-90/135
	10012	BT40-SCA32-105	BT50-SCA32-90/135
	12512	-	BT50-SCA40-90/135
	12520	-	BT50-SCA40-90/135
	16012	-	BT50-SCA40-90/135
	16018	-	BT50-SCA40-90/135
	16020	-	BT50-SCA40-90/135
	20022	-	-
	25024	-	-
	31524	-	-

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190~310	0.10~0.25	NCM325 PC3500 A30
	160~270	0.10~0.30	
	60~100	0.10~0.25	
M	90~150	0.10~0.25	PC9530 A30
	80~150	0.10~0.30	
K	140~230	0.10~0.35	PC6510 G10E
	50~90	0.10~0.40	

▶ Parts

Locator	Wedge	Screw	Locator Screw	Wrench
LFC2R/L · LFC3R/L	WFC2N · WFC3N	DHA0617	MHB0310	HW30L
LFC2R/L-1*	WFC2N-1*	DHA0815	MHB0410	HW40L


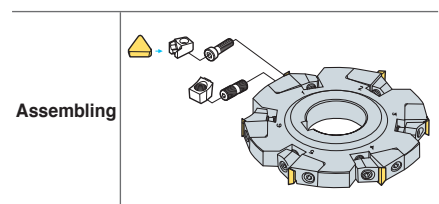


▶ Available Inserts E21

▶ Available Arbors and bolt E318~E320

* FC08010

HC(M) (Half side cutter)



• AR : 5°
• RR : 0°

(mm)

Designation	Stock		Z	ØD	W	T-MAX	Ød	E	a	b	ØD ₂	Insert
	R	L										
HC (HCM)	10024R/L		6	100	24	24.0	31.75(32)	27	7.92(8)	35.2	48	TPCN1603PPN
	12524R/L		8	125	24	31.5	38.1(40)	27	9.52(10)	42.3	58	TPCN1603PPN
	16024R/L		10	160	24	49.0	38.1(40)	27	9.52(10)	42.3	58	TPCN1603PPN
	20024R/L		12	200	24	62.0	50.8(50)	27	12.7(12)	55.8	72	TPCN1603PPN
	25024R/L		16	250	24	81.0	50.8(50)	27	12.7(12)	55.8	84	TPCN1603PPN
	31524R/L		20	315	24	113.5	50.8(50)	27	12.7(12)	55.8	84	TPCN1603PPN

• () Metric Size, • Stock item

Available Inserts



TPCN

Designation	Cermet		Coated								Uncoated			Page		
	CN2000	CN80	NCM325	NCM335	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
TPCN 1603PPN		●	●											●		E21

Available Arbors


Designation	Arbors	
HC (M)	BT40-SCA31.75-105	BT50-SCA31.75-90/135
12524R/L	-	BT50-SCA38.1-90/135
16024R/L	-	BT50-SCA38.1-90/135
20024R/L	-	-
25024R/L	-	-
31524R/L	-	-

Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190~310	0.10~0.25	NCM325 PC3500 A30
	160~270	0.10~0.30	
	60 ~ 100	0.10~0.25	
M	90~150	0.10~0.25	PC9530 A30
	80~150	0.10~0.30	
K	140~230	0.10~0.35	PC6510 G10E
	50~90	0.10~0.40	

Parts

Specification	Locator	Wedge	Screw	Locator Screw	Wrench
Ø100~Ø315	LFC3R/L	WFC3N	DHA0815	MHB0410	HW40L


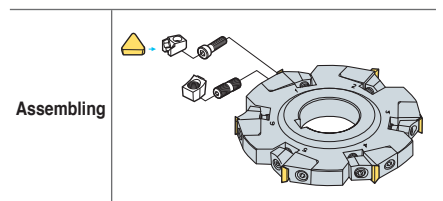


Available Inserts E21

Available Arbors and bolt E318-E320



SPP(M)



• AR : -2°
• RR : -28°

(mm)

Designation	Stock		ØD	W	T-MAX	Ød	a	b	E	ØD2	Insert	Screw	Wrench
SPP	080-04		80	4	20	25.4(27)	6.35(7)	28.04(29.8)	8	40	PNEJ1223N	PTMA0403F	TW15S
(SPPM)	080-05		80	5	20	25.4(27)	6.35(7)	28.04(29.8)	8	40	PNEJ1230N	PTMA0404F	TW15S
	080-06		80	6	20	25.4(27)	6.35(7)	28.04(29.8)	8	40	PNEJ1235N	PTMA0405F	TW15S
	100-04		100	4	24	31.75(32)	7.94(8)	35.18(34.8)	8	47	PNEJ1223N	PTMA0403F	TW15S
	100-05		100	5	24	31.75(32)	7.94(8)	35.18(34.8)	8	47	PNEJ1230N	PTMA0404F	TW15S
	100-06		100	6	25	31.75(32)	7.94(8)	35.18(34.8)	8	47	PNEJ1235N	PTMA0405F	TW15S
	100-07		100	7	25	31.75(32)	7.94(8)	35.18(34.8)	10	47	PNEJ1240N	PTMA0406F	TW15S
	100-08		100	8	25	31.75(32)	7.94(8)	35.18(34.8)	10	47	PNEJ1245N	PTMA0407F	TW15S
	100-09		100	9	25	31.75(32)	7.94(8)	35.18(34.8)	12	47	PNEJ1250N	PTKA0408F	TW15S
	100-10		100	10	25	31.75(32)	7.94(8)	35.18(34.8)	12	47	PNEJ1255N	PTKA0409F	TW15S
	125-04		125	4	30	38.1(40)	9.53(10)	42.32(43.5)	8	56	PNEJ1223N	PTMA0403F	TW15S
	125-05		125	5	32	38.1(40)	9.53(10)	42.32(43.5)	8	56	PNEJ1230N	PTMA0404F	TW15S
	125-06		125	6	32	38.1(40)	9.53(10)	42.32(43.5)	8	56	PNEJ1235N	PTMA0405F	TW15S
	125-07	●	125	7	32	38.1(40)	9.53(10)	42.32(43.5)	10	56	PNEJ1240N	PTMA0406F	TW15S
	125-08		125	8	32	38.1(40)	9.53(10)	42.32(43.5)	10	56	PNEJ1245N	PTKA0407F	TW15S
	125-09		125	9	32	38.1(40)	9.53(10)	42.32(43.5)	12	56	PNEJ1250N	PTKA0408F	TW15S
	125-10		125	10	32	38.1(40)	9.53(10)	42.32(43.5)	12	56	PNEJ1255N	PTKA0409F	TW15S
	160-04		160	4	45	38.1(40)	9.53(10)	42.32(43.5)	8	66	PNEJ1223N	PTMA0403F	TW15S
	160-05		160	5	45	38.1(40)	9.53(10)	42.32(43.5)	8	66	PNEJ1230N	PTMA0404F	TW15S
	160-06		160	6	45	38.1(40)	9.53(10)	42.32(43.5)	8	66	PNEJ1235N	PTMA0405F	TW15S
	160-07		160	7	45	38.1(40)	9.53(10)	42.32(43.5)	10	66	PNEJ1240N	PTMA0406F	TW15S
	160-08		160	8	45	38.1(40)	9.53(10)	42.32(43.5)	10	66	PNEJ1245N	PTKA0407F	TW15S
	160-09		160	9	45	38.1(40)	9.53(10)	42.32(43.5)	12	66	PNEJ1250N	PTKA0408F	TW15S
	160-10		160	10	45	38.1(40)	9.53(10)	42.32(43.5)	12	66	PNEJ1255N	PTKA0409F	TW15S
	160-11		160	11	45	38.1(40)	9.53(10)	42.32(43.5)	14	66	PNEJ1260N	PTKA0410F	TW15S
	160-12		160	12	45	38.1(40)	9.53(10)	42.32(43.5)	14	66	PNEJ1265N	PTKA0411F	TW15S
	160-13		160	13	45	38.1(40)	9.53(10)	42.32(43.5)	16	66	PNEJ1270N	PTKA0412F	TW15S
	160-14		160	14	45	38.1(40)	9.53(10)	42.32(43.5)	16	66	PNEJ1275N	PTKA0413F	TW15S
	200-06		200	6	60	50.8(50)	12.7(12)	55.83(53.5)	8	70	PNEJ1235N	PTMA0405F	TW15S
	200-07		200	7	60	50.8(50)	12.7(12)	55.83(53.5)	10	70	PNEJ1240N	PTMA0406F	TW15S
	200-08		200	8	60	50.8(50)	12.7(12)	55.83(53.5)	10	70	PNEJ1245N	PTKA0407F	TW15S
	200-09		200	9	60	50.8(50)	12.7(12)	55.83(53.5)	12	70	PNEJ1250N	PTKA0408F	TW15S
	200-10		200	10	60	50.8(50)	12.7(12)	55.83(53.5)	12	70	PNEJ1255N	PTKA0409F	TW15S
	200-11		200	11	60	50.8(50)	12.7(12)	55.83(53.5)	14	70	PNEJ1260N	PTKA0410F	TW15S
	200-12		200	12	60	50.8(50)	12.7(12)	55.83(53.5)	14	70	PNEJ1265N	PTKA0411F	TW15S
	200-13		200	13	60	50.8(50)	12.7(12)	55.83(53.5)	16	70	PNEJ1270N	PTKA0412F	TW15S
	200-14		200	14	60	50.8(50)	12.7(12)	55.83(53.5)	16	70	PNEJ1275N	PTKA0413F	TW15S

() Metric Size, ● Stock item


▶ Available Arbors

Designation	Arbors		
	BT30	BT40	BT50
SPP 080-04~06	BT30-SCA25.4-60	BT40-SCA25.4-75/120	BT50-SCA25.4-90/135
100-04~10	-	BT40-SCA31.75-105	BT50-SCA31.75-90/135
125-04~09	-	-	BT50-SCA38.1-90/135
160-04~14	-	-	BT50-SCA38.1-90/135
200-06~14	-	-	-
SPPM 080-04~06	-	BT40-SCA27-75/120	BT50-SCA27-90/135
100-04~10	-	BT40-SCA32-105	BT50-SCA32-90/135
125-04~09	-	-	BT50-SCA40-90/135
160-04~14	-	-	BT50-SCA40-90/135
200-06~14	-	-	-

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190~310	0.10~0.25	NCM325 PC3500 A30
	160~270	0.10~0.30	
	60~100	0.10~0.25	
M	90~150	0.10~0.25	PC9530 A30
	80~150	0.10~0.30	
K	140~230	0.10~0.35	PC6510 G10E
	50~90	0.10~0.40	

▶ Code system


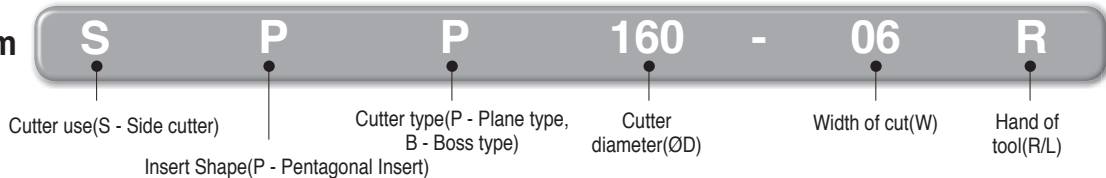


Available Inserts **E12**

Available Arbors and bolt **E308~E310**



SPB(M)



- AR : -2°
- RR : 28°

(mm)

Designation	Stock		⊙	ØD	W	T-MAX	ØD ₂	Ød	a	b	F	E	Insert	Screw	Wrench
	R	L													
SPB 080-04R/L			8	80	4	18	40	25.4(27)	9.5(12.4)	6(7)	50	25(22)	PNEJ1223N	PTMA0403F	TW15S
(SPBM) 080-05R/L			8	80	5	18	40	25.4(27)	9.5(12.4)	6(7)	50	25(22)	PNEJ1230N	PTMA0404F	TW15S
080-06R/L			8	80	6	18	40	25.4(27)	9.5(12.4)	6(7)	50	25(22)	PNEJ1235N	PTMA0405F	TW15S
100-04R/L			10	100	4	21	54	31.75(32)	12.7(14.4)	8(8)	50	32(28)	PNEJ1223N	PTMA0403F	TW15S
100-05R/L			10	100	5	21	54	31.75(32)	12.7(14.4)	8(8)	50	32(28)	PNEJ1230N	PTMA0404F	TW15S
100-06R/L			10	100	6	21	54	31.75(32)	12.7(14.4)	8(8)	50	32(28)	PNEJ1235N	PTMA0405F	TW15S
100-07R/L			10	100	7	21	54	31.75(32)	12.7(14.4)	8(8)	50	32(28)	PNEJ1240N	PTMA0406F	TW15S
100-08R/L			10	100	8	21	54	31.75(32)	12.7(14.4)	8(8)	50	32(28)	PNEJ1245N	PTMA0407F	TW15S
100-09R/L			10	100	9	21	54	31.75(32)	12.7(14.4)	8(8)	50	32(28)	PNEJ1250N	PTMA0408F	TW15S
100-10R/L			10	100	10	21	54	31.75(32)	12.7(14.4)	8(8)	50	32(28)	PNEJ1255N	PTMA0409F	TW15S
125-04R/L			12	125	4	25	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1223N	PTMA0403F	TW15S
125-05R/L			12	125	5	25	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1230N	PTMA0404F	TW15S
125-06R/L			12	125	6	25	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1235N	PTMA0405F	TW15S
125-07R/L			12	125	7	25	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1240N	PTMA0406F	TW15S
125-08R/L			12	125	8	25	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1245N	PTKA0407F	TW15S
125-09R/L			12	125	9	25	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1250N	PTKA0408F	TW15S
125-10R/L			12	125	10	25	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1255N	PTKA0409F	TW15S
160-04R/L			16	160	4	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1223N	PTMA0403F	TW15S
160-05R/L			16	160	5	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1230N	PTMA0404F	TW15S
160-06R/L			16	160	6	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1235N	PTMA0405F	TW15S
160-07R/L			16	160	7	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1240N	PTMA0406F	TW15S
160-08R/L			16	160	8	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1245N	PTKA0407F	TW15S
160-09R/L			16	160	9	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1250N	PTKA0408F	TW15S
160-10R/L			16	160	10	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1255N	PTKA0409F	TW15S
160-11R/L			16	160	11	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1260N	PTKA0410F	TW15S
160-12R/L			16	160	12	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1265N	PTKA0411F	TW15S
160-13R/L			16	160	13	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1270N	PTKA0412F	TW15S
160-14R/L			16	160	14	43	70	38.1(40)	15.9(16.4)	10(9)	60(50)	38(30)	PNEJ1275N	PTKA0413F	TW15S
200-06R/L			18	200	6	53	90	50.8(40)	19(16.4)	11(9)	65	38(30)	PNEJ1235N	PTMA0405F	TW15S
200-07R/L			18	200	7	53	90	50.8(40)	19(16.4)	11(9)	65	38(30)	PNEJ1240N	PTMA0406F	TW15S
200-08R/L			18	200	8	53	90	50.8(40)	19(16.4)	11(9)	65	38(30)	PNEJ1245N	PTKA0407F	TW15S
200-09R/L			18	200	9	53	90	50.8(40)	19(16.4)	11(9)	65	38(30)	PNEJ1250N	PTKA0408F	TW15S
200-10R/L			18	200	10	53	90	50.8(40)	19(16.4)	11(9)	65	38(30)	PNEJ1255N	PTKA0409F	TW15S
200-11R/L			18	200	11	53	90	50.8(40)	19(16.4)	11(9)	65	38(30)	PNEJ1260N	PTKA0410F	TW15S
200-12R/L			18	200	12	53	90	50.8(40)	19(16.4)	11(9)	65	38(30)	PNEJ1265N	PTKA0411F	TW15S
200-13R/L			18	200	13	53	90	50.8(40)	19(16.4)	11(9)	65	38(30)	PNEJ1270N	PTKA0412F	TW15S
200-14R/L			18	200	14	53	90	50.8(40)	19(16.4)	11(9)	65	38(30)	PNEJ1275N	PTKA0413F	TW15S

• () Metric Size, ● Stock item

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	190~310	0.10~0.25	NCM325 PC3500 A30
	160~270	0.10~0.30	
	60~100	0.10~0.25	
M	90~150	0.10~0.25	PC9530 A30
	80~150	0.10~0.30	
K	140~230	0.10~0.35	PC6510 G10E
	50~90	0.10~0.40	

▶ Notice(When mounting inserts)


- Insert chip breaker should face chip pocket of the cutter
- Fasten screw after insert contacts securely on its seat
- If there is a gap between insert and its seat after mounting it may cause tool troubles

Available Inserts E12

Available Arbors and bolt E318~E320



SPS

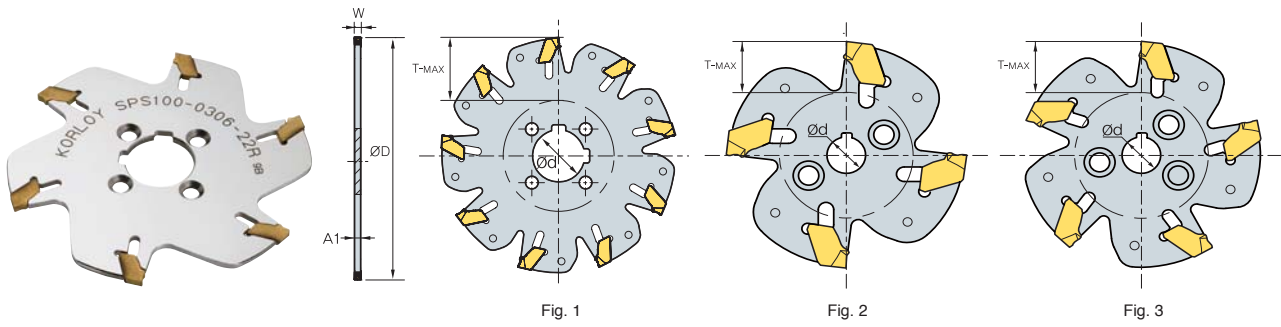


(mm)

SPS	Designation	Stock	⊙	ØD	W	T-MAX	Ød	A1	Fig.	Insert	Adaptor			
											WS	DF		
	050-0204-08R		4	50	2.2	11	8	1.8	2	SPFN 200 ()	WS2528-M4	-		
	063-0205-10R		5	63	2.2	15.5	10	1.8	3		WS2532-M5	-		
	080-0207-22R/F		7	80	2.2	20/17	22	1.8	1		WS3240-M5	DF22-46		
	100-0209-22R/F		9	100	2.2	30/27	22	1.8	1		WS3240-M5	DF22-46		
	125-0211-32F		11	125	2.2	35	32	1.8	1		-	DF32-55		
	160-0214-32F		14	160	2.2	52.5	32	1.8	3		-	DF32-55		
	063-0305-10R		5	63	3	15.5	10	2.55	1		SPFN 300 ()	WS2532-M5	-	
	080-0307-22R/F		7	80	3	20/17	22	2.55	1			WS3240-M5	DF22-46	
	100-0309-22R/F		9	100	3	30/27	22	2.55	1			WS3240-M5	DF22-46	
	125-0311-32F		11	125	3	35	32	2.55	1			-	DF32-55	
	160-0314-32F		14	160	3	52.5	32	2.55	1			-	DF32-55	
	200-0318-40F		18	200	3	60	40	2.55	1			-	DF40-80	
	080-0406-22R/F		6	80	4	20/17	22	3.4	1			SPFN 400 ()	WS3240-M5	DF22-46
	100-0408-22R/F		8	100	4	30/27	22	3.4	1				WS3240-M5	DF22-46
	125-0410-32F		10	125	4	35	32	3.4	1				-	DF32-55
	160-0413-32F		13	160	4	52.5	32	3.4	1	-			DF32-55	
	200-0417-40F		17	200	4	60	40	3.4	1	-	DF40-80			


• () Metric Size, • Stock item

▶ WS()-() (Weldon Shank)

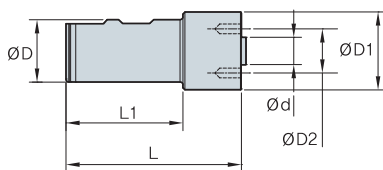

Designation	L	L1	D	D1	D2	d	Screw
WS2528-M4	110	85	25	28	18	8	PTKA0408
WS2532-M5	110	85	25	32	22	10	PTKA0515
WS3240-M5	120	90	32	40	32	22	PTKA0515

▶ DF()-() (Drive Flange set)

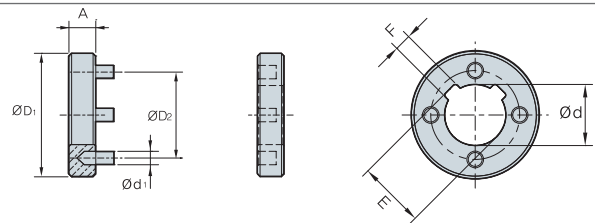

Designation	D1	D2	d	d1	A	E	F
DF22-46	46	32	22	5	10	24.1	6
DF32-55	55	45	32	6	10	34.8	8
DF40-80	80	63	40	11	12	43.5	10
DF50-110	110	80	50	14	14	53.6	12

▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
P	160~270 130~210	0.13~0.25 0.10~0.17	PC3500 PC3545
M	90~150	0.10~0.22	PC5300
K	110~180	0.10~0.25	PC215K

▶ Available Inserts E20



E Technical Information for Wind Mill

For slotting workpieces with corner radii of varying size and width

WIND MILL ^{New}

- Optimal machining for slotting applications
- A unique recess design on the minor cutting edge reduces cutting load and improves tool life
- Special clamping system prevents incorrect clamping and fracture



▶ Item description

• **Insert**




• **Cutter** WFS(M) - Plane type




WFSB(M) - Boss type



▶ Cutter Code system

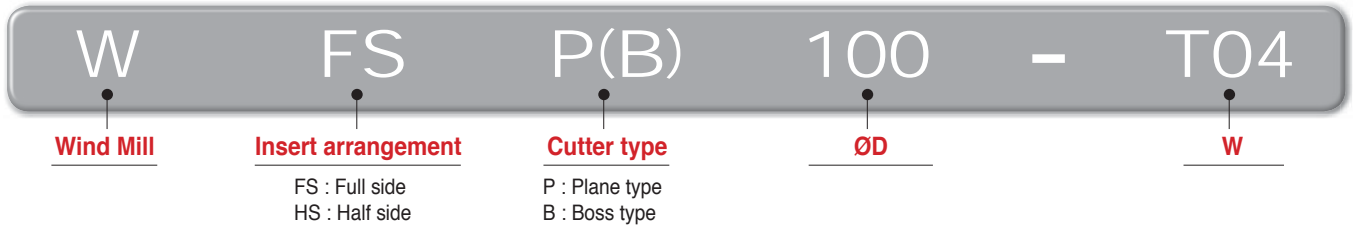

▶ Insert Code system

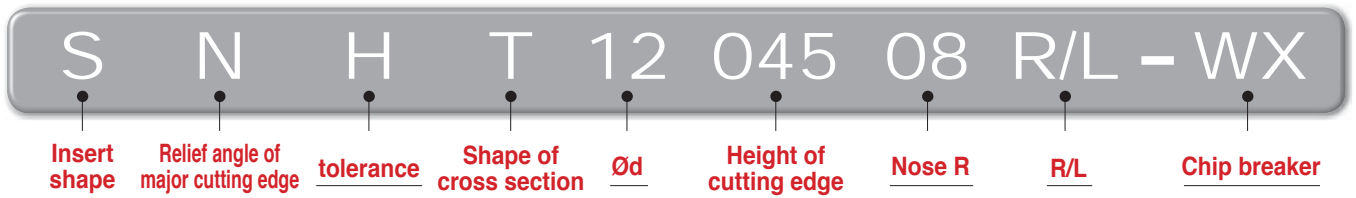


▶ Features


- Ideal geometry for superior surface roughness and extended tool life




- Perpendicular slot

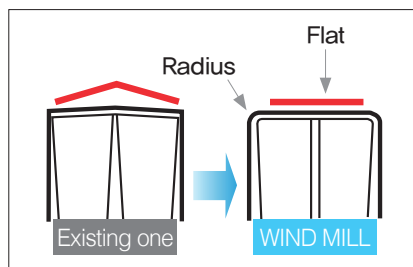

- Protruded part on tip seat prevents wrong clamping and fracture


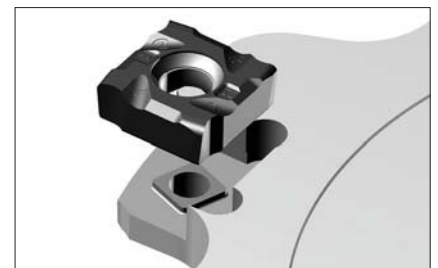


- Workpieces with corner radii of varying size and width (R0.2~R2.0)

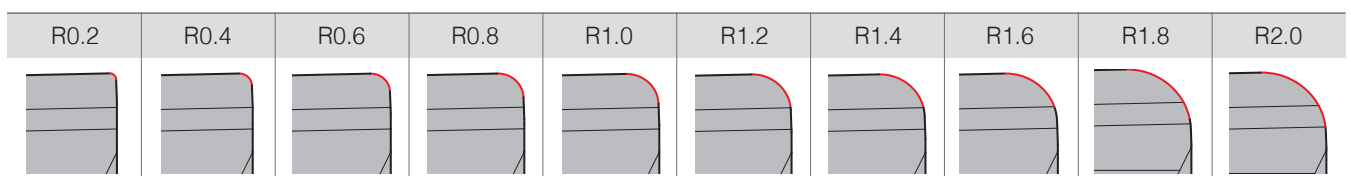


▶ Application Example

- **Workpiece** FCD500K
- **Cutting conditions**
 - vc(m/min) = 200
 - fz(mm/t) = 0.2
 - vf(mm/min) = 600
 - ap(mm) = 2~3
- **Tool** KSF140R-T14-HM-2
SNHT1205408R/L-WX (PC5300)

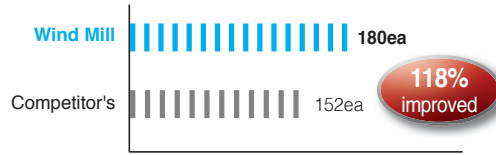


- **Workpiece** Mild steel (Lug for Vessel)
- **Cutting conditions**
 - vc(m/min) = 560
 - fz(mm/t) = 0.09
 - vf(mm/min) = 750
 - ap(mm) = 6
- **Tool** WFSP178R/L-T06
SNHT1203508R/L-WX (PC5300)



▶ Recommended cutting condition

Workpiece	Cutting conditions		Grade
	vc(m/min)	fz (mm/t)	
P	150 ~ 250	0.10 ~ 0.25	PC5300
M	120 ~ 200	0.10 ~ 0.30	PC5300
K	100 ~ 150	0.10 ~ 0.30	PC5300

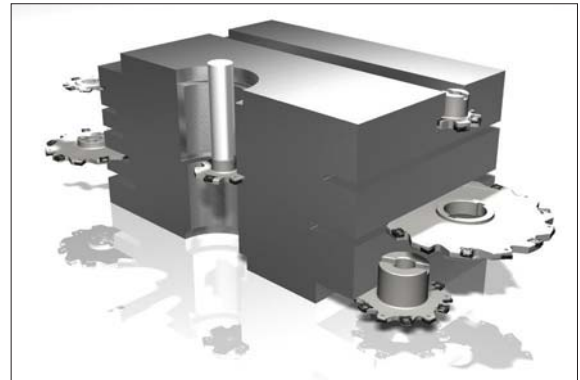

▶ List of inserts

Designation	Coated	Dimensions				Nose R	Configuration
	PC5300	Ød	Ød ₁	t	W		
SNHT 11023□□R/L-WX	●	11.0	4	2.30	4.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6	
1103□□R/L-WX	●	11.0	4	3.00	5.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6	
1203□□R/L-WX		12.7	5	3.25	5.5	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	
12035□□R/L-WX	●	12.7	5	3.54	6.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	
1204□□R/L-WX		12.7	5	4.00	7.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	
12045□□R/L-WX	●	12.7	5	4.54	8.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	
1205□□R/L-WX		12.7	5	5.00	9.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	
12054□□R/L-WX	●	12.7	5	5.47	10.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	
1206□□R/L-WX		12.7	5	6.00	11.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	
12065□□R/L-WX		12.7	5	6.50	12.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	
1207□□R/L-WX		12.7	5	7.00	13.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	
12075□□R/L-WX		12.7	5	7.50	14.0	0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 2.0	

• Inserts with various nose R sizes can be supplied in 2~3 weeks

WFSB(M) - Boss type *New*

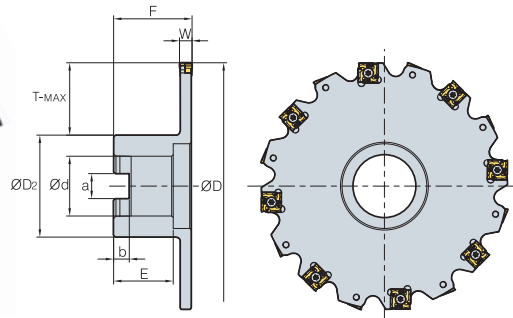


Fig. 1

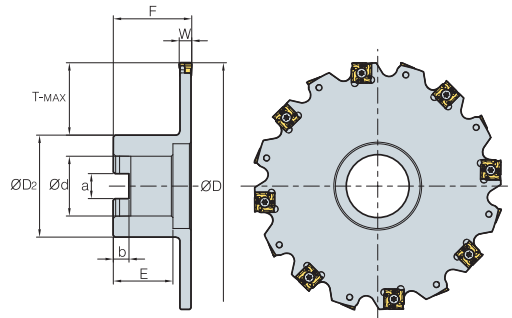


Fig. 2



- AR : -2°
- RR : -12°

(mm)

Designation	Stock		ØD	W	T-MAX	ØD ₂	Ød	a	b	F	E	Insert	Screw	Wrench	
	R	L													
WFSBM			8	80	4	17	40	22	10.4	6.3	50	21	SNHT11023R/L-WX	PTMA03503	TW09S
			8	80	5	17	40	22	10.4	6.3	50	21	SNHT1103R/L-WX	PTMA03504	TW09S
			8	80	6	17	40	22	10.4	6.3	50	21	SNHT12035R/L-WX	PTMA04045F	TW15S
WFSB			10	100	4	21	50(48)	25.4(27)	9.5(12.4)	6(7)	50	25	SNHT11023R/L-WX	PTMA03503	TW09S
(WFSBM)			10	100	5	21	50(48)	25.4(27)	9.5(12.4)	6(7)	50	25	SNHT1103R/L-WX	PTMA03504	TW09S
			10	100	6	21	50(48)	25.4(27)	9.5(12.4)	6(7)	50	25	SNHT12035R/L-WX	PTMA04045F	TW15S
			10	100	7	21	50(48)	25.4(27)	9.5(12.4)	6(7)	50	25	SNHT1204R/L-WX	PTMA0405F	TW15S
			10	100	8	21	50(48)	25.4(27)	9.5(12.4)	6(7)	50	25	SNHT12045R/L-WX	PTMA0406F	TW15S
			10	100	9	21	50(48)	25.4(27)	9.5(12.4)	6(7)	50	25	SNHT1205R/L-WX	PTMA0407F	TW15S
			10	100	10	21	50(48)	25.4(27)	9.5(12.4)	6(7)	50	25	SNHT12054R/L-WX	PTMA0408F	TW15S
			12	125	4	30	60(58)	31.75(32)	12.7(14.4)	8	50	32(30)	SNHT11023R/L-WX	PTMA03503	TW09S
			12	125	5	30	60(58)	31.75(32)	12.7(14.4)	8	50	32(30)	SNHT1103R/L-WX	PTMA03504	TW09S
			12	125	6	30	60(58)	31.75(32)	12.7(14.4)	8	50	32(30)	SNHT12035R/L-WX	PTMA04045F	TW15S
			12	125	7	30	60(58)	31.75(32)	12.7(14.4)	8	50	32(30)	SNHT1204R/L-WX	PTMA0405F	TW15S
			12	125	8	30	60(58)	31.75(32)	12.7(14.4)	8	50	32(30)	SNHT12045R/L-WX	PTMA0406F	TW15S
			12	125	9	30	60(58)	31.75(32)	12.7(14.4)	8	50	32(30)	SNHT1205R/L-WX	PTMA0407F	TW15S
			12	125	10	30	60(58)	31.75(32)	12.7(14.4)	8	50	32(30)	SNHT12054R/L-WX	PTMA0408F	TW15S
			16	160	4	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT11023R/L-WX	PTMA03503	TW09S
			16	160	5	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT1103R/L-WX	PTMA03504	TW09S
			16	160	6	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT12035R/L-WX	PTMA04045F	TW15S
			16	160	7	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT1204R/L-WX	PTMA0405F	TW15S
			16	160	8	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT12045R/L-WX	PTMA0406F	TW15S
			16	160	9	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT1205R/L-WX	PTMA0407F	TW15S
			16	160	10	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT12054R/L-WX	PTMA0408F	TW15S
			16	160	11	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT1206R/L-WX	PTKA0409F	TW15S
			16	160	12	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT12065R/L-WX	PTKA0410F	TW15S
			16	160	13	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT1207R/L-WX	PTKA0411F	TW15S
			16	160	14	43	80(70)	38.1(40)	15.9(16.4)	10(9)	60	38(32)	SNHT12075R/L-WX	PTKA0412F	TW15S
			18	200	6	53	90	38.1(40)	15.9(16.4)	10(9)	65	38(32)	SNHT12035R/L-WX	PTMA04045F	TW15S
			18	200	7	53	90	38.1(40)	15.9(16.4)	10(9)	65	38(32)	SNHT1204R/L-WX	PTMA0405F	TW15S
			18	200	8	53	90	38.1(40)	15.9(16.4)	10(9)	65	38(32)	SNHT12045R/L-WX	PTMA0406F	TW15S
			18	200	9	53	90	38.1(40)	15.9(16.4)	10(9)	65	38(32)	SNHT1205R/L-WX	PTMA0407F	TW15S
			18	200	10	53	90	38.1(40)	15.9(16.4)	10(9)	65	38(32)	SNHT12054R/L-WX	PTMA0408F	TW15S
			18	200	11	53	90	38.1(40)	15.9(16.4)	10(9)	65	38(32)	SNHT1206R/L-WX	PTKA0409F	TW15S
			18	200	12	53	90	38.1(40)	15.9(16.4)	10(9)	65	38(32)	SNHT12065R/L-WX	PTKA0410F	TW15S
			18	200	13	53	90	38.1(40)	15.9(16.4)	10(9)	65	38(32)	SNHT1207R/L-WX	PTKA0411F	TW15S
			18	200	14	53	90	38.1(40)	15.9(16.4)	10(9)	65	38(32)	SNHT12075R/L-WX	PTKA0412F	TW15S
			20	250	6	73(78)	100(90)	50.8(40)	19.1(16.4)	11(9)	65	38(32)	SNHT12035R/L-WX	PTMA04045F	TW15S
			20	250	7	73(78)	100(90)	50.8(40)	19.1(16.4)	11(9)	65	38(32)	SNHT1204R/L-WX	PTMA0405F	TW15S
			20	250	8	73(78)	100(90)	50.8(40)	19.1(16.4)	11(9)	65	38(32)	SNHT12045R/L-WX	PTMA0406F	TW15S
			20	250	9	73(78)	100(90)	50.8(40)	19.1(16.4)	11(9)	65	38(32)	SNHT1205R/L-WX	PTMA0407F	TW15S
			20	250	10	73(78)	100(90)	50.8(40)	19.1(16.4)	11(9)	65	38(32)	SNHT12054R/L-WX	PTMA0408F	TW15S
			20	250	11	73(78)	100(90)	50.8(40)	19.1(16.4)	11(9)	65	38(32)	SNHT1206R/L-WX	PTKA0409F	TW15S
			20	250	12	73(78)	100(90)	50.8(40)	19.1(16.4)	11(9)	65	38(32)	SNHT12065R/L-WX	PTKA0410F	TW15S
			20	250	13	73(78)	100(90)	50.8(40)	19.1(16.4)	11(9)	65	38(32)	SNHT1207R/L-WX	PTKA0411F	TW15S
			20	250	14	73(78)	100(90)	50.8(40)	19.1(16.4)	11(9)	65	38(32)	SNHT12075R/L-WX	PTKA0412F	TW15S


Available Inserts E18

•Ø80 : Fig.1 , Ø100~Ø250 : Fig.2

• () Metric Size, • Stock item



WFSP(M) - Plane type *New*

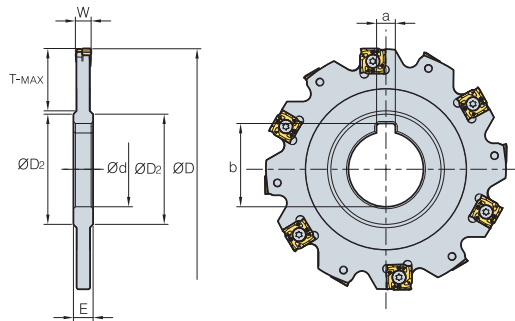

- AR : -2°
- RR : -12°

(mm)

Designation	Stock		ØD	W	T-MAX	ØD2	Ød	a	b	E	Insert	Screw	Wrench
WFSP (WFSBM)	●	8	80	4	20	40	25.4(27)	6.35(7)	28(29.8)	8	SNHT11023R/L-WX	PTMA03503	TW09S
	●	8	80	5	20	40	25.4(27)	6.35(7)	28(29.8)	8	SNHT1103R/L-WX	PTMA03504	TW09S
	●	8	80	6	20	40	25.4(27)	6.35(7)	28(29.8)	8	SNHT12035R/L-WX	PTMA04045F	TW15S
		10	100	4	24	47	31.75(32)	7.92(8)	35.2(34.8)	8	SNHT11023R/L-WX	PTMA03503	TW09S
	●	10	100	5	24	47	31.75(32)	7.92(8)	35.2(34.8)	8	SNHT1103R/L-WX	PTMA03504	TW09S
		10	100	6	24	47	31.75(32)	7.92(8)	35.2(34.8)	8	SNHT12035R/L-WX	PTMA04045F	TW15S
		10	100	7	24	47	31.75(32)	7.92(8)	35.2(34.8)	10	SNHT1204R/L-WX	PTMA0405F	TW15S
		10	100	8	24	47	31.75(32)	7.92(8)	35.2(34.8)	10	SNHT12045R/L-WX	PTMA0406F	TW15S
		10	100	9	24	47	31.75(32)	7.92(8)	35.2(34.8)	12	SNHT1205R/L-WX	PTMA0407F	TW15S
		10	100	10	24	47	31.75(32)	7.92(8)	35.2(34.8)	12	SNHT12054R/L-WX	PTMA0408F	TW15S
		12	125	4	32	56	38.1(40)	9.52(10)	42.3(43.5)	8	SNHT11023R/L-WX	PTMA03503	TW09S
		12	125	5	32	56	38.1(40)	9.52(10)	42.3(43.5)	8	SNHT1103R/L-WX	PTMA03504	TW09S
		12	125	6	32	56	38.1(40)	9.52(10)	42.3(43.5)	8	SNHT12035R/L-WX	PTMA04045F	TW15S
		12	125	7	32	56	38.1(40)	9.52(10)	42.3(43.5)	10	SNHT1204R/L-WX	PTMA0405F	TW15S
	●	12	125	8	32	56	38.1(40)	9.52(10)	42.3(43.5)	10	SNHT12045R/L-WX	PTMA0406F	TW15S
		12	125	9	32	56	38.1(40)	9.52(10)	42.3(43.5)	12	SNHT1205R/L-WX	PTMA0407F	TW15S
	●	12	125	10	32	56	38.1(40)	9.52(10)	42.3(43.5)	12	SNHT12054R/L-WX	PTMA0408F	TW15S
		16	160	4	45	66	38.1(40)	9.52(10)	42.3(43.5)	8	SNHT11023R/L-WX	PTMA03503	TW09S
		16	160	5	45	66	38.1(40)	9.52(10)	42.3(43.5)	8	SNHT1103R/L-WX	PTMA03504	TW09S
		16	160	6	45	66	38.1(40)	9.52(10)	42.3(43.5)	8	SNHT12035R/L-WX	PTMA04045F	TW15S
		16	160	7	45	66	38.1(40)	9.52(10)	42.3(43.5)	10	SNHT1204R/L-WX	PTMA0405F	TW15S
	●	16	160	8	45	66	38.1(40)	9.52(10)	42.3(43.5)	10	SNHT12045R/L-WX	PTMA0406F	TW15S
		16	160	9	45	66	38.1(40)	9.52(10)	42.3(43.5)	12	SNHT1205R/L-WX	PTMA0407F	TW15S
	●	16	160	10	45	66	38.1(40)	9.52(10)	42.3(43.5)	12	SNHT12054R/L-WX	PTMA0408F	TW15S
		16	160	11	45	66	38.1(40)	9.52(10)	42.3(43.5)	14	SNHT1206R/L-WX	PTKA0409F	TW15S
		16	160	12	45	66	38.1(40)	9.52(10)	42.3(43.5)	14	SNHT12065R/L-WX	PTKA0410F	TW15S
		16	160	13	45	66	38.1(40)	9.52(10)	42.3(43.5)	16	SNHT1207R/L-WX	PTKA0411F	TW15S
		16	160	14	45	66	38.1(40)	9.52(10)	42.3(43.5)	16	SNHT12075R/L-WX	PTKA0412F	TW15S
		18	200	6	60	70	50.8(50)	12.7(12)	55.8(53.5)	8	SNHT12035R/L-WX	PTMA04045F	TW15S
		18	200	7	60	70	50.8(50)	12.7(12)	55.8(53.5)	10	SNHT1204R/L-WX	PTMA0405F	TW15S
	●	18	200	8	60	70	50.8(50)	12.7(12)	55.8(53.5)	10	SNHT12045R/L-WX	PTMA0406F	TW15S
		18	200	9	60	70	50.8(50)	12.7(12)	55.8(53.5)	12	SNHT1205R/L-WX	PTMA0407F	TW15S
	●	18	200	10	60	70	50.8(50)	12.7(12)	55.8(53.5)	12	SNHT12054R/L-WX	PTMA0408F	TW15S
		18	200	11	60	70	50.8(50)	12.7(12)	55.8(53.5)	14	SNHT1206R/L-WX	PTKA0409F	TW15S
		18	200	12	60	70	50.8(50)	12.7(12)	55.8(53.5)	14	SNHT12065R/L-WX	PTKA0410F	TW15S
		18	200	13	60	70	50.8(50)	12.7(12)	55.8(53.5)	16	SNHT1207R/L-WX	PTKA0411F	TW15S
		18	200	14	60	70	50.8(50)	12.7(12)	55.8(53.5)	16	SNHT12075R/L-WX	PTKA0412F	TW15S
		20	250	6	88	70	50.8(50)	12.7(12)	55.8(53.5)	8	SNHT12035R/L-WX	PTMA04045F	TW15S
		20	250	7	88	70	50.8(50)	12.7(12)	55.8(53.5)	10	SNHT1204R/L-WX	PTMA0405F	TW15S
		20	250	8	88	70	50.8(50)	12.7(12)	55.8(53.5)	10	SNHT12045R/L-WX	PTMA0406F	TW15S
		20	250	9	88	70	50.8(50)	12.7(12)	55.8(53.5)	12	SNHT1205R/L-WX	PTMA0407F	TW15S
		20	250	10	88	70	50.8(50)	12.7(12)	55.8(53.5)	12	SNHT12054R/L-WX	PTMA0408F	TW15S
		20	250	11	88	70	50.8(50)	12.7(12)	55.8(53.5)	14	SNHT1206R/L-WX	PTKA0409F	TW15S
		20	250	12	88	70	50.8(50)	12.7(12)	55.8(53.5)	14	SNHT12065R/L-WX	PTKA0410F	TW15S
		20	250	13	88	70	50.8(50)	12.7(12)	55.8(53.5)	16	SNHT1207R/L-WX	PTKA0411F	TW15S
		20	250	14	88	70	50.8(50)	12.7(12)	55.8(53.5)	16	SNHT12075R/L-WX	PTKA0412F	TW15S

Available Inserts E18

() Metric Size, ● Stock item



E Technical Information for High feed Cutter

High feed cutter with extra pitch for cast iron and light alloy steels

High feed Cutter

- High feed cutter employs extra pitch for cast iron and light alloy steels
- Quick change type for reduction of cutter change time
- Cutting edge chatter is controlled
- Quick change type for cutter size under $\phi 160$, 2piece types for cutter size over $\phi 200$



▶ Guide of insert setting

▶ Special equipment has to be used to get precise run out with high feed cutter.


Adaptor type	Roller type	Plate type
<ul style="list-style-type: none"> - Mainly under $\phi 160$ diameter is used in 1piece type - Available for fixed size of cutter and assembling & checking can be done at the same time 	<ul style="list-style-type: none"> - Mainly over $\phi 200$ diameter is used in 2piece type - Due to 3 adjustable guide roller, variety size of cutter can be assembled 	<ul style="list-style-type: none"> - Suitable for small size cutter due to the simple structure - It is unnecessary to unclamp the cutter from the machine, it's possible to reassemble the cutter as it mounted on the machine - You should make plate by yourself

Guide of insert setting in adaptor/roller type

1. Clean the cutter and equipment
2. Pointer should be assembled with same height with cutter
3. Move to each insert on tip seat to end of pointer and tighten (torque 2N.m) wedge.
4. Exchange pointer to dial gauge
5. Measure the run-out totally
6. When a insert over run-out, loosen wedge and adjust run-out. (for roughing 10~20 μ , for finishing 5~10 μ)
7. Tighten (torque 7-8N.m) wedge
8. Measure the final run-out by dial gauge

(Notice) When you clamp wedge too tighten, run-out is getting worse to cutter distortion
When you clamp wedge, you should use torque wrench to set more precisely




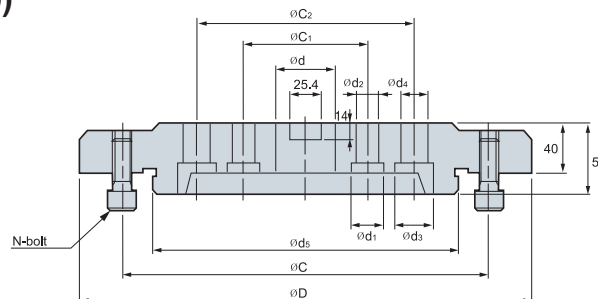


▶ Adaptor($\phi 200 \sim \phi 450$)



Designation	ϕD	ϕd	ϕd_1	ϕd_2	ϕd_3	ϕd_4	ϕd_5	ϕC	ϕC_1	ϕC_2	N	Cutter	
APR	200	180	47.625	26	18	-	-	80	120	101.6	-	4	$\phi 200$
	250	230	47.625	26	18	-	-	120	170	101.6	-	4	$\phi 250$
	315	295	47.625	26	18	32	22	180	230	101.6	177.8	6	$\phi 315$
	355	335	63.50	26	18	32	22	220	270	101.6	177.8	6	$\phi 355$
	400	370	63.50	26	18	32	22	250	300	101.6	177.8	8	$\phi 400$
	450	420	63.50	26	18	32	22	300	350	101.6	177.8	8	$\phi 450$



High feed cutters type and features

Designation	Cutter diameter	Workpiece, Application range	Min. surface roughness	Approach angle and Max. cutting depth is for 5000 type	Axial rake angle	Radial rake angle	Available insert
ANH4000 ANH5000	Ø100~Ø450	Cast iron Roughing	25Z		-5°	-6°	SNCN1204ENN SNCN1504ENN
CDH4000 CDH5000	Ø100~Ø450	Cast iron Roughing Finishing	18Z		+10°	+5°	SDCN42R SDCN53R
DEH5000	Ø100~Ø450	Al alloy Roughing	20Z		+14°	+6°	HECN090408FN
DPH5000	Ø100~Ø450	Cast iron Roughing Finishing	12Z		+5°	-3°	HPEN090408 HPEN090408-WC
PNH4000 PNH5000	Ø125~Ø450	Cast iron Finishing	12Z		-5°	-6°	SNEF435 SNEF535
PPH4000	Ø125~Ø450	Cast iron Finishing	12Z		+5°	-5°	SPEN120416-WC

Recommended cutting condition


Workpiece	Cutting Condition		Grades	Remark
	vc(m/min)	fz(mm/t)		
Cast iron	100~230	0.05~0.20	PC6510	PVD Coated
	80~150	0.05~0.20	H01,G10E	Uncoated
Al alloy	400	0.10~0.30	PC6510	PVD Coated
	400	0.05~0.20	H01,G10E	Uncoated

E Technical Information for Storm Mill

Excellent tool life achieved by the wide variety of grades to match work conditions

Storm Mill


- Conventional cutter with wide coverage
- Using 4 corners (Maximum 8 corner available with R/L type cutter)
- Effective on large depth of cut applications due to the long cutting edge
- Excellent tool life guaranteed by wide variety of grades to suit any working conditions
- 2 different types of inserts(chamfer / nose R) are available with 1 type of cutter

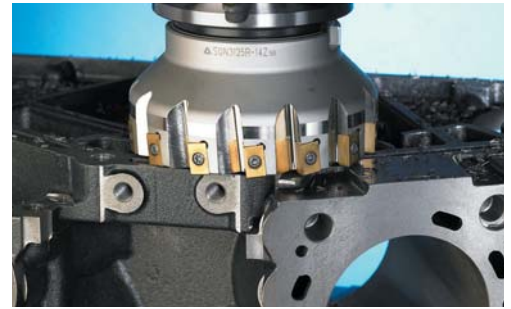


▶ Code System

S	Q	N	3	250	R	(2)	28Z
Cutter	Approach angle	Relief angle of insert	Insert	Cutter Dia.	Hand	Cutter shape	No. of tooth
S : Storm Mill	Q : 88° F : 85° A : 45° E : 75°	N : Negative (0°)	3 : 9.525mm 4 : 12.7mm	MM	R : Right L : Left	No code : Normal type 2 : Quick change type (2 pieces type)	

▶ Cutter

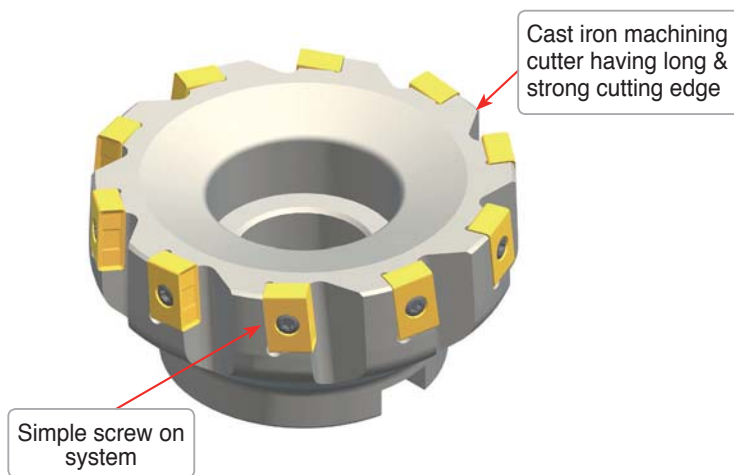

▶ Clamping of insert

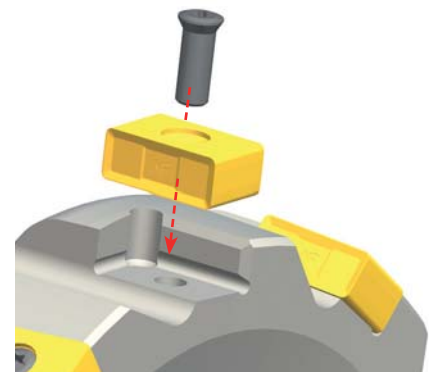

▶ Recommended cutting condition

Designation Grades	Gray cast iron		Ductile cast iron	
	GC		GCD	
	vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)
PC3500	150~250	0.08~0.28	100~180	0.08~0.28
PC6510	150~300	0.10~0.28	100~200	0.10~0.28
PC3545	150~250	0.08~0.22	100~180	0.08~0.22
H01	100~200	0.08~0.22	70~140	0.08~0.22
G10E	90~120	0.08~0.28	60~130	0.08~0.28




Optimal cutter for steel and cast iron machining with easily adjustable run-out

Shave Mill

- Adjustable Range (Adjustable range: 0.1mm, Adjustable allowance: within 2 μ m)
- Wiper crown type 8-cornered insert reduces machining cost and realizes excellent surface roughness
- Grade with high toughness and wear resistance ensures long tool life
- The cBN grade achieves superior surface finish

▶ Cutter Code System

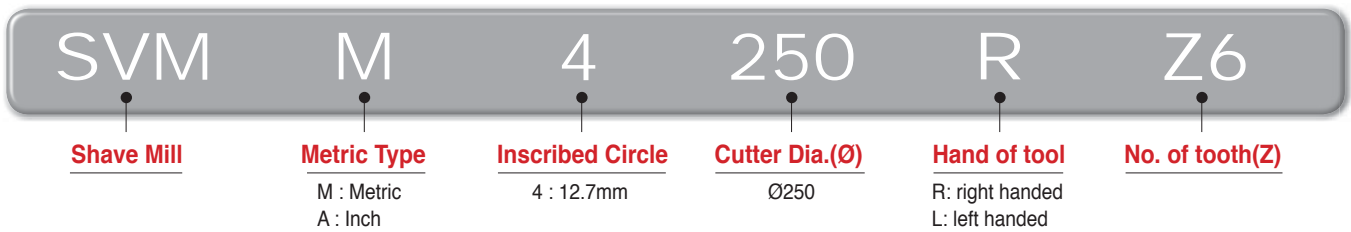

▶ Insert Code System


■ Carbide

Nose R type	SNEU120420-MF
Chamfer type	SNEU1204ANN-MF
Low cutting type	SNEU1204-WMF

■ cBN

SNEU1204-TBW
T : Nagaland B : cBN W : Wiper

▶ Features


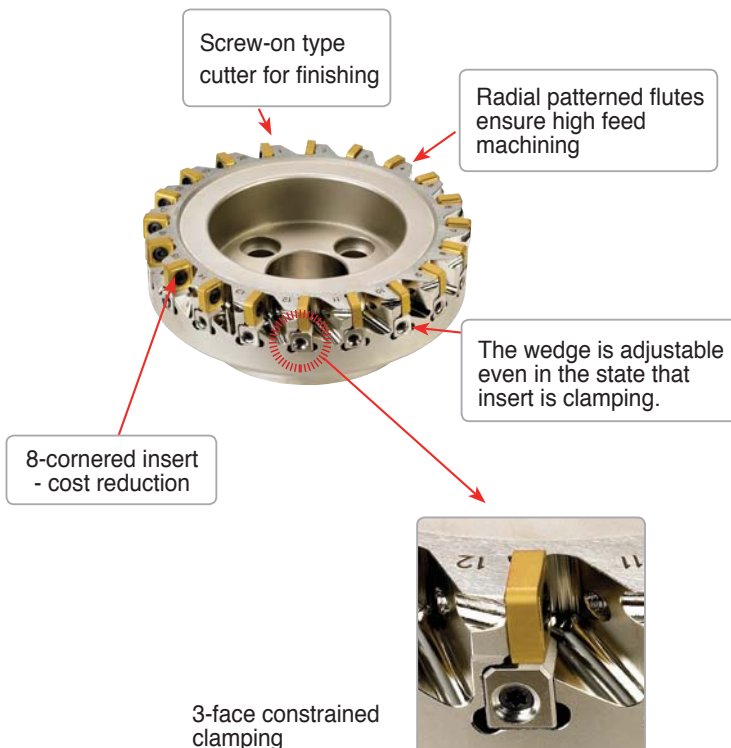


▶ Adjustment

- Adjustable range: 0.1mm
- Adjustability: below 2 μ
- Operation: easy and simple

E Technical Information for Shave Mill

Features of insert

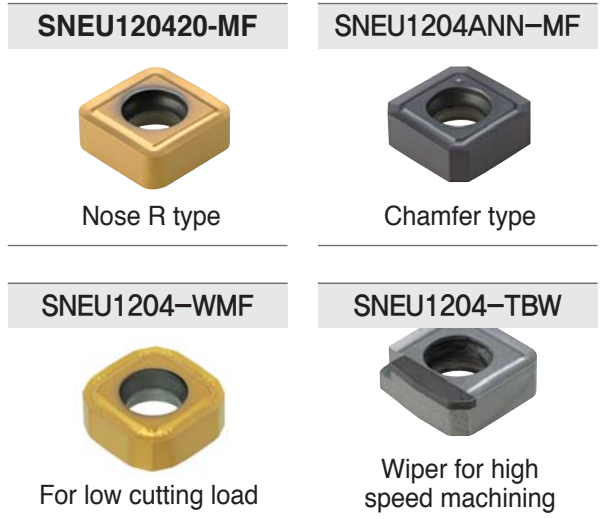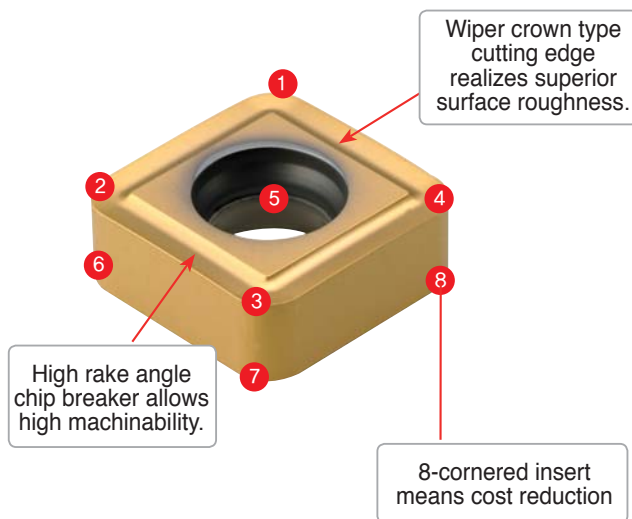


Recommended cutting condition

Workpiece	Cutting Condition			Grades
	vc(m/min)	fz(mm/t)	ap(mm)	
P	160~270	0.05 ~ 0.2	~ 0.5	PC3500
K	140~230 600~1000	0.05 ~ 0.3 0.05 ~ 0.2	~ 0.5 ~ 0.5	PC6510 DBN920

Application example 1

- Work piece : Cylinder head (facing)
- Cutting conditions : vc=200, fz=0.15, ap=0.5, Dry
- Tools : Shave Mill - SVM4250R
Insert - PC6510 SNEU120420-MF

- Work piece : FC25(HB250) Cylinder head (facing)
- Cutting conditions : vc=700, fz=0.1, ap=0.5, Dry
- Tools : Shave Mill - SVM4160R
Insert - DBN920 SNEU1204-cBN

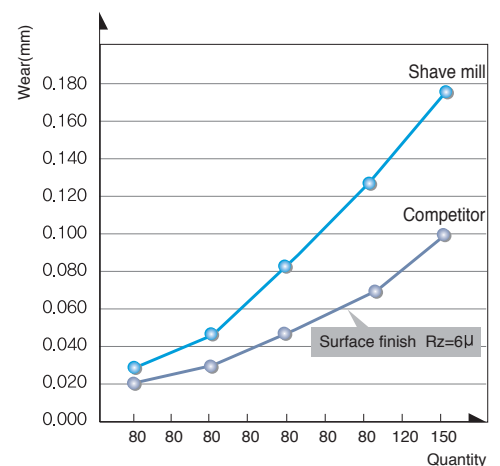

Results

	Tool life	Surface finish	Machinability
Shave mill	250 pcs	Rz=3µ	High
Competitor	180 pcs	Rz=3.5µ	Normal

- Korloy's shave mills ensure twice the machinability, adjustability, and surface roughness than competitor's, along with twice the tool life.




Better tool life with special grade which has both toughness and wear resistance

Shave Mill Ultra

- Superior surface roughness for this Finishing cutter when applied to heavy work pieces
- Easy to handle and good rigidity with simple screw on system
- Superior surface finishes due to the wiper crown cutting edge
- Better tool life with special grade which has both toughness and wear resistance
- Two different types: economical normal type and adjustable run-out type 'B'

▶ Code System of Cutter

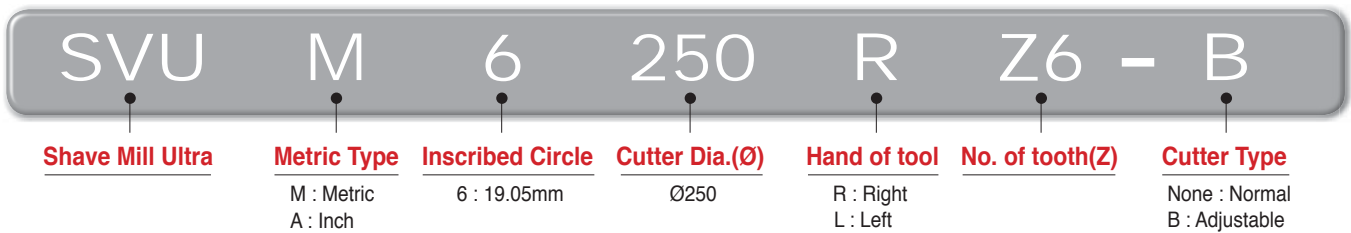

▶ Code System of Insert



▶ Features

Normal type

- Good rigidity and economical due to simple screw on type
- Better surface roughness when you use only 1 insert but adjust the 'ap' under 0.03mm

Adjustable cutting edge (Type B)

- Easy to handle the run-out due to Korloy exclusive high toughness cutting edge special parts

4-Corner Insert

- Good cutting performance & chip flow due to positive rake angle chip breaker
- Economical 4 corner use insert
- Good surface roughness by wiper crown cutting edge design

Adjustable Range

- Range : 1.0mm
- Allowance : Within 2 μ

▶ Recommended cutting condition

Workpiece	Cutting Condition			Tooth	Grades
	vc(m/min)	fz(mm/t)	ap(mm)		
P	160~270	0.05~0.20	~0.50	Full use	PC3500
	160~270	2~5	~0.03	1use	
K	140~230	0.05~0.20	~0.50	Full use	PC6510
	140~230	2~5	~0.03	1use	

E Technical Information for Cube Mill

Special Korloy cutter for cast iron roughing

Cube Mill

- Special Korloy cutter for cast iron roughing
- 8 corner using insert (maximum 16 corner available with 2 cutter, R/L cutter)
- Excellent cutting performance with positive rake angle made by 3 dimensional chip breaker
- Excellent tool life by combination of the variety of grades and chip breakers to match most working conditions
- 2 different type of inserts(chamfer / nose R) are available with 1 type cutter




Roughing for cast iron

▶ Code System

CBM	E	3	250	R	(2)	- 28Z
Cutter	AA	Inscribed circle of Insert	Cutter Dia	Hand	Cutter shape	No. of tooth(Z)
CBM : CUBE MILL	Q : 88° C : 65° F : 85° A : 45° E : 75°	3 : 9.525 4 : 12.7	Ø250	R : Right L : Left	Unmarked : Normal type 2 : Quick change type (2 pieces type)	

Cube Mill and Cube Mill Couple are available by order made.



▶ Insert (R/L type)

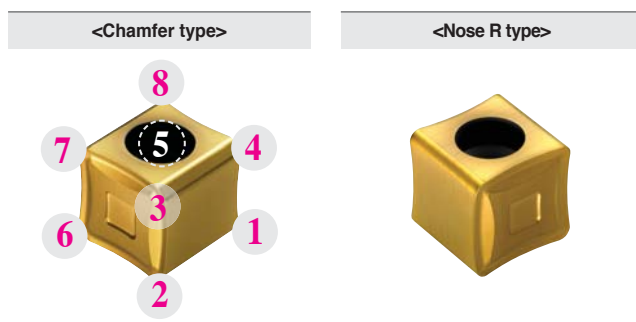

▶ Cutter body

	General	Quick change
Cutter diameter(Ø)	Ø80~315 mm	Ø200~450 mm
	3 1/4~12 1/2 Inch	8~18 Inch
AA : 88°, 85°, 75°, 65°, 45°		

▶ Cutter

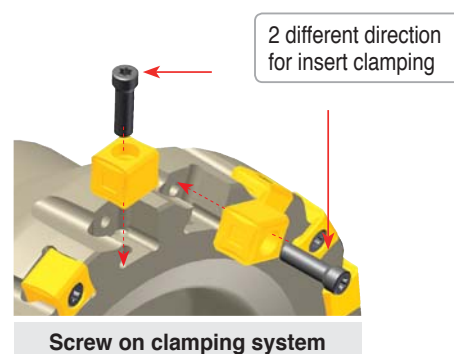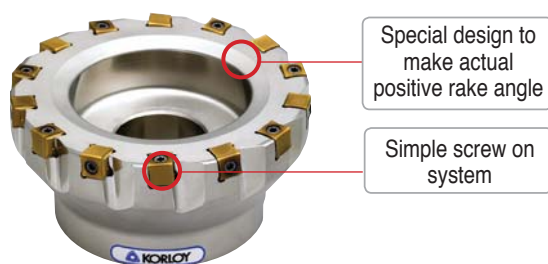

▶ Parts

Cube mill 3000	Screw	Wrench
	FTGA0417CBM	TW15 - 100
	ETGA0520CBM	TW20 - 100



Ideal combination of Aluminum body with cast iron high feed cutter

Couple Mill

- Ideal combination of Aluminum body with cast iron high feed cutter
- Since the weight of the cutter has been reduced 50% of a steel cutter it is very easy to handle and very effective in preventing loading accidents
- Applicable for Cube Mill, Storm Mill


▶ CUBE-COUPLE Code system

CBM	E	3	355	R	28Z	- CP
Cutter	AA	Inscribed circle of Insert	Cutter Dia	Hand	No. of tooth(Z)	Couple Mill
CBM : CUBE MILL	Q : 88° C : 65° F : 85° A : 45° E : 75°	3 : 9.525 4 : 12.7	Ø355	R : Right L : Left	28Z : 28	

▶ STORM-COUPLE Code system

S	Q	N	3	355	R	28Z	- CP
Cutter	AA	Relief angle of insert	Inscribed circle of Insert	Cutter Dia	Hand	No. of tooth(Z)	Couple Mill
S : STORM MILL	Q : 88° E : 75° F : 85° A : 45°	N : Negative(0°)	3 : 9.525 4 : 12.7	Ø355	R : Right L : Left	28Z : 28	


▶ Assembling structure

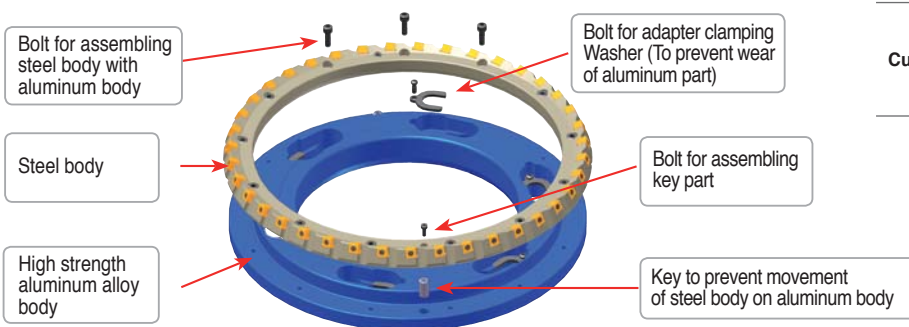

▶ Cutter body


Cutter diameter(Ø)	Quick change	
	Metric	Ø355~450mm
Inch	14 1/4~18 Inch	

▶ Parts

	Screw	Wrench	Wrench	Bolt for body	Bolt for key	Key for body
 CUBE-COUPLE 3000 Type	FTGA0417CBM	TW15-100	-	BHA0616	MHBO410	PN1019-DRV
	4000 Type	ETGA0520CBM		TW20-100		
STORM-COUPLE 3000 Type	FTNA0513	-	TW15S	-	-	-

E Technical Information for Couple Mill

▶ Application range of High feed Cutters for Cast iron

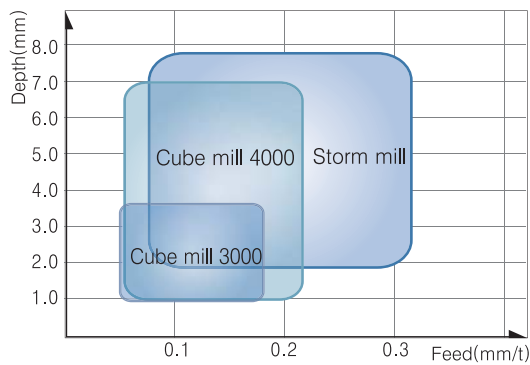

▶ Recommended cutting condition

CUBE MILL		Gray cast iron		Ductile cast iron	
		vc(m/min)	fz(mm/t)	vc(m/min)	fz(mm/t)
PVD	PC6510	150 ~ 300	0.08 ~ 0.18	100 ~ 200	0.08 ~ 0.18
	PC215K	120 ~ 210	0.05 ~ 0.18	80 ~ 150	0.05 ~ 0.18
Uncoated	G10E	90 ~ 120	0.05 ~ 0.18	60 ~ 130	0.05 ~ 0.18

▶ Available Arbors and Adaptors

Designation	Available Arbors and Adaptors		
	Arbors	General Arbor	Adaptor
CBMQ 3080R/L -00Z	BT□□-FMA25.4-□□	NT*□□(M/U)-FMA25.4-25	
(CBMF) 3100R/L -00Z	BT□□-FMA31.75-□□	NT*□□(M/U)-FMA31.75-□□	
(CBME) 3125R/L -00Z	BT□□-FMA38.1-□□	NT*□□(M/U)-FMA38.1-□□	
(CBMC) 3160R/L -00Z	BT□□-FMA50.8-□□	NT*□□(M/U)-FMA50.8-□□	
(CBMA) 3200R/L -00Z	BT□□-FMA47.625-□□	NT*□□(M/U)-FMA47.625-25, KCP-8***	
3250R/L -00Z	BT□□-FMA47.625-□□	KNT*□□(M/U)-FMA47.625-25, KCP-8***	
3315R/L -00Z		KCP-8***(Centering Plug)	
3200R/L2 -00Z			APR200
3250R/L2 -00Z			APR250
3315R/L2 -00Z			APR315
3355R/L2 -00Z			APR355
3400R/L2 -00Z			APR400
3450R/L2 -00Z			APR450
SQN 3080R/L -00Z	BT□□-FMA25.4-□□	NT*□□(M/U)-FMA25.4-25	
(SFN) 3100R/L -00Z	BT□□-FMA31.75-□□	NT*□□(M/U)-FMA31.75-□□	
(SEN) 3125R/L -00Z	BT□□-FMA38.1-□□	NT*□□(M/U)-FMA38.1-□□	
(SAN) 3160R/L -00Z	BT□□-FMA50.8-□□	NT*□□(M/U)-FMA50.8-□□	
3200R/L -00Z	BT□□-FMA47.625-□□	NT*□□(M/U)-FMA47.625-25, KCP-8***	
3250R/L -00Z	BT□□-FMA47.625-□□	NT*□□(M/U)-FMA47.625-25, KCP-8***	
3315R/L -00Z		KCP-8***(Centering Plug)	
3200R/L2 -00Z			APR200
3250R/L2 -00Z			APR250
3315R/L2 -00Z			APR315
3355R/L2 -00Z			APR355
3400R/L2 -00Z			APR400
3450R/L2 -00Z			APR450

*□□-NT number / **□□-BT number / ***Milling over 5
 (Arbors **add)
 ex) BT** □□



ANH4000




Fig. 1

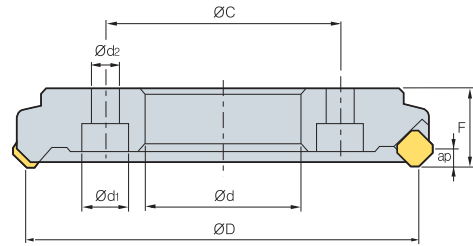


Fig. 2



AA
45°
• AR : 5°
• RR : -6°

Designation	Stock		ØD	Ød	Ød ₁	Ød ₂	a	b	E	F	ØC	ap	kg	Fig.
	R	L												
ANH 4100R/L			8	100	31.75	-	12.7	8	22	50	-	5.5	2.5	1
4125R/L			10	125	38.1	-	15.9	10	27	63	-	5.5	4.7	1
4160R/L			14	160	50.8	-	19.0	11	27	63	-	5.5	7.3	1
4200R/L			18	200	80	24	14	-	-	40	120	5.5	7	2
4250R/L			24	250	120	30	18	-	-	40	170	5.5	9.6	2
4315R/L			30	315	180	30	18	-	-	40	230	5.5	12.9	2
4355R/L			34	355	220	30	18	-	-	40	270	5.5	15.5	2
4400R/L			38	400	250	30	18	-	-	40	300	5.5	18.8	2
4450R/L			44	450	300	30	18	-	-	40	350	5.5	22.2	2

(mm)

● Stock item

▶ Available Inserts



SNCN



SNKN

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
SNCN 1204ENN															E17
SNKN 1204ENN															E18

▶ Available Arbors

Designation	Arbors	
ANH 100R/L	NT*□□(M/U)-FMA31.75-□□	-
125R/L	NT*□□(M/U)-FMA38.1-□□	-
160R/L	NT*□□(M/U)-FMA50.8-□□	-
200R/L	-	APR200
250R/L	-	APR250
315R/L	-	APR315
355R/L	-	APR355
400R/L	-	APR400
450R/L	-	APR450


▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
K	140 ~ 230	0.05 ~ 0.30	PC6510
	135 ~ 220	0.10 ~ 0.30	H01
	50 ~ 90	0.10 ~ 0.30	G10E

▶ Parts

Specification			
Ø100~Ø450	WANH4N	DHA0821F	HW40

Assembling



▶ Available Inserts E17, E18 ▶ Available Arbors and bolt E318~E320

ANH5000




Fig. 1

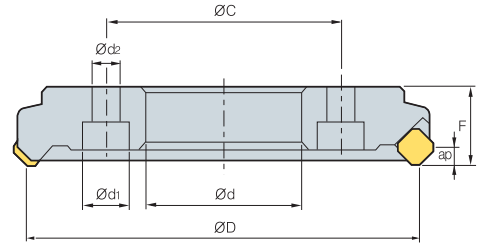


Fig. 2



AA
45°
• AR : 5°
• RR : -6°

(mm)

Designation	Stock		⊙	ØD	Ød	Ød ₁	Ød ₂	a	b	E	F	ØC	ap	⊙	Fig.
	R	L													
ANH 5100R/L			8	100	31.75	-	-	12.7	8	22	50	-	8	2.6	1
5125R/L			10	125	38.1	-	-	15.9	10	27	63	-	8	5	1
5160R/L			14	160	50.8	-	-	19.0	11	27	63	-	8	7.5	1
5200R/L			18	200	80	24	14	-	-	-	40a	120	8	7	2
5250R/L			24	250	120	30	18	-	-	-	40	170	8	9.6	2
5315R/L			30	315	180	30	18	-	-	-	40	230	8	12.9	2
5355R/L			34	355	220	30	18	-	-	-	40	270	8	15.5	2
5400R/L			38	400	250	30	18	-	-	-	40	300	8	18.8	2
5450R/L			44	450	300	30	18	-	-	-	40	350	8	22.2	2

● Stock item

Available Inserts



SNCN



SNKN

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30		G10E	H01
SNCN 1504ENN												●			E17
SNKN 1504ENN			●												E18

Available Arbors

Designation	Arbors
ANH 100R/L	NT*□□(M/U)-FMA31.75-□□
125R/L	NT*□□(M/U)-FMA38.1-□□
160R/L	NT*□□(M/U)-FMA50.8-□□
200R/L	-
250R/L	-
315R/L	-
355R/L	-
400R/L	-
450R/L	-


Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
K	140 ~ 230	0.05 ~ 0.30	PC6510
	135 ~ 220	0.10 ~ 0.30	H01
	50 ~ 90	0.10 ~ 0.30	G10E

Parts

Specification	Wedge	Wedge Screw	Wrench
Ø100~Ø450	WANH5N	DHA0821F	HW40

Assembling



Available Inserts E17, E18 Available Arbors and bolt E318~E320



CDH4000




Fig. 1

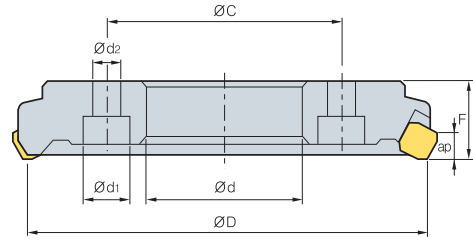


Fig. 2



AA
65°
• AR : 10°
• RR : 5°

Designation	Stock		⊙	ØD	Ød	Ød1	Ød2	a	b	E	F	ØC	ap	kg	Fig.
	R	L													
CDH 4100R/L			8	100	31.75	-	-	12.7	8	22	50	-	6	2.3	1
4125R/L			10	125	38.1	-	-	15.9	10	27	63	-	6	4.4	1
4160R/L			14	160	50.8	-	-	19.0	11	27	63	-	6	6.8	1
4200R/L			18	200	80	24	14	-	-	-	40	120	6	6.7	2
4250R/L			24	250	120	30	18	-	-	-	40	170	6	9.1	2
4315R/L			30	315	180	30	18	-	-	-	40	230	6	12.3	2
4355R/L			34	355	220	30	18	-	-	-	40	270	6	14.8	2
4400R/L			38	400	250	30	18	-	-	-	40	300	6	18.1	2
4450R/L			44	450	300	30	18	-	-	-	40	350	6	21.3	2

(mm)

● Stock item

Available Inserts



SDCN

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30	G10E		H01
SDCN 42R															E13
42L															




Available Arbors

Designation	Arbors
CDH 100R/L	NT*□□(M/U)-FMA31.75-□□ -
125R/L	NT*□□(M/U)-FMA38.1-□□ -
160R/L	NT*□□(M/U)-FMA50.8-□□ -
200R/L	- APR200
250R/L	- APR250
315R/L	- APR315
355R/L	- APR355
400R/L	- APR400
450R/L	- APR450


Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
K	140 ~ 230	0.05 ~ 0.30	PC6510
	135 ~ 220	0.10 ~ 0.30	H01
	50 ~ 90	0.10 ~ 0.30	G10E

Parts

Specification	 Wedge	 Wedge Screw	 Wrench
Ø100-Ø160	WCDH4R1L1	DHA0821F	HW40
Ø200-Ø450	WCDH4R/L		

Assembling



Available Inserts E13

Available Arbors and bolt E318-E320

CDH5000




Fig. 1

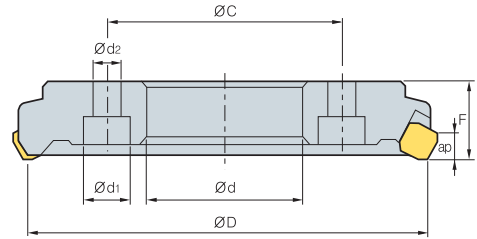


Fig. 2



AA
65°
• AR : 10°
• RR : 5°

(mm)

Designation	Stock			$\varnothing D$	$\varnothing d$	$\varnothing d_1$	$\varnothing d_2$	a	b	E	F	$\varnothing C$	ap		Fig.	
	R	L														
CDH	5100R/L			08	100	31.75	-	-	12.7	8	22	50	-	7	2.3	1
	5125R/L			10	125	38.1	-	-	15.9	10	27	63	-	7	4.4	1
	5160R/L			14	160	50.8	-	-	19.0	11	27	63	-	7	6.8	1
	5200R/L			18	200	80	24	14	-	-	-	40	120	7	6.6	2
	5250R/L			24	250	120	30	18	-	-	-	40	170	7	9.1	2
	5315R/L			30	315	180	30	18	-	-	-	40	230	7	12.2	2
	5355R/L			34	355	220	30	18	-	-	-	40	270	7	14.7	2
	5400R/L			38	400	250	30	18	-	-	-	40	300	7	18	2
	5450R/L			44	450	300	30	18	-	-	-	40	350	7	21.2	2

● Stock item

Available Inserts



SDCN

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30		G10E	H01
SDCN	53R														E13
	53L														

Available Arbors

Designation	Arbors		
CDH	100R/L	NT*□□(M/U)-FMA31.75-□□	-
	125R/L	NT*□□(M/U)-FMA38.1-□□	-
	160R/L	NT*□□(M/U)-FMA50.8-□□	-
	200R/L	-	APR200
	250R/L	-	APR250
	315R/L	-	APR315
	355R/L	-	APR355
	400R/L	-	APR400
	450R/L	-	APR450


Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
K	140 ~ 230	0.05 ~ 0.30	PC6510
	135 ~ 220	0.10 ~ 0.30	H01
	50 ~ 90	0.10 ~ 0.30	G10

Parts

Specification			
$\varnothing 100$ - $\varnothing 160$	WCDH5R1L1	DHA0821F	HW40
$\varnothing 200$ - $\varnothing 450$	WCDH5R/L		

Assembling



Available Inserts E13

Available Arbors and bolt E318-E320



DEH5000




Fig. 1

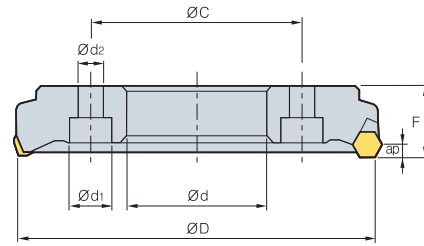


Fig. 2



AA
60°
• AR : 14°
• RR : 6°

Designation	Stock		⊙	ØD	Ød	Ød ₁	Ød ₂	a	b	E	F	ØC	ap	kg	Fig.
	R	L													
DEH 5100R/L			6	100	31.75	-	-	12.7	8	22	50	-	7	2.3	1
5125R/L			7	125	38.1	-	-	15.9	10	27	63	-	7	4.4	1
5160R/L			8	160	50.8	-	-	19.0	11	27	63	-	7	6.3	1
5200R/L			12	200	80	24	14	-	-	-	40	120	7	6.5	2
5250R/L			14	250	120	30	18	-	-	-	40	170	7	9.1	2
5315R/L			18	315	180	30	18	-	-	-	40	230	7	12.1	2
5355R/L			20	355	220	30	18	-	-	-	40	270	7	14.8	2
5400R/L			24	400	250	30	18	-	-	-	40	300	7	17.8	2
5450R/L			28	450	300	30	18	-	-	-	40	350	7	21	2

● Stock item

▶ Available Inserts



HECN

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
HECN 090408FN															E07
090408SN															
090408TN															

▶ Available Arbors

Designation	Arbors	
DEH 5100R/L	NT*□□(M/U)-FMA31.75-□□	-
5125R/L	NT*□□(M/U)-FMA38.1-□□	-
5160R/L	NT*□□(M/U)-FMA50.8-□□	-
5200R/L	-	APR200
5250R/L	-	APR250
5315R/L	-	APR315
5355R/L	-	APR355
5400R/L	-	APR400
5450R/L	-	APR450


▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
K	140 ~ 230	0.05 ~ 0.30	PC6510
	135 ~ 220	0.10 ~ 0.30	H01
	50 ~ 90	0.10 ~ 0.30	G10E

▶ Parts

Specification			
Ø100-Ø200	WDEHR-1/L-1	DHA0821F	HW40
Ø250-Ø450	WDEHR/L		

Assembling



▶ Available Inserts E07

▶ Available Arbors and bolt E318-E320

DPH5000




Fig. 1

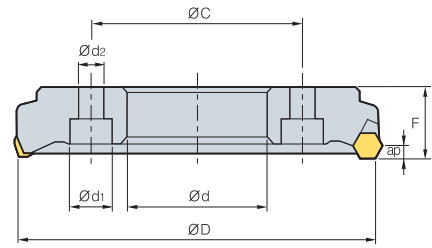


Fig. 2



AA
60°

• AR : 5°
• RR : -3°

(mm)

Designation	Stock		⊙	ØD	Ød	Ød1	Ød2	a	b	E	F	ØC	ap	kg	Fig.
	R	L													
DPH 5100R/L			8	100	31.75	-	-	12.7	8	22	50	-	7	2.3	1
5125R/L			10	125	38.1	-	-	15.9	10	27	63	-	7	4.4	1
5160R/L			14	160	50.8	-	-	19.0	11	27	63	-	7	6.7	1
5200R/L			18	200	80	24	14	-	-	-	40	120	7	6.5	2
5250R/L			24	250	120	30	18	-	-	-	40	170	7	9	2
5315R/L			30	315	180	30	18	-	-	-	40	230	7	12	2
5355R/L			34	355	220	30	18	-	-	-	40	270	7	14.5	2
5400R/L			38	400	250	30	18	-	-	-	40	300	7	17.7	2
5450R/L			44	450	300	30	18	-	-	-	40	350	7	21	2

● Stock item

▶ Available Inserts



HPEN



HPEN-WC

Designation	Cermet		Coated								Uncoated			Page	
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30	G10E		H01
HPEN 090408FN															E07
090408SN															
090408EN															
090408-WC															

▶ Available Arbors

Designation	Arbors	
DPH 5100R/L	NT*□□(M/U)-FMA31.75-□□	-
5125R/L	NT*□□(M/U)-FMA38.1-□□	-
5160R/L	NT*□□(M/U)-FMA50.8-□□	-
5200R/L	-	APR200
5250R/L	-	APR250
5315R/L	-	APR315
5355R/L	-	APR355
5400R/L	-	APR400
5450R/L	-	APR450


▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
K	140 ~ 230	0.05 ~ 0.30	PC6510
	135 ~ 220	0.10 ~ 0.30	H01
	50 ~ 90	0.10 ~ 0.30	G10E

▶ Parts

Specification			
Ø100~Ø450	WDPH5R/L	DHA0821F	HW40

Assembling



▶ Available Inserts E07

▶ Available Arbors and bolt E318~E320



PNH4000/5000




Fig. 1

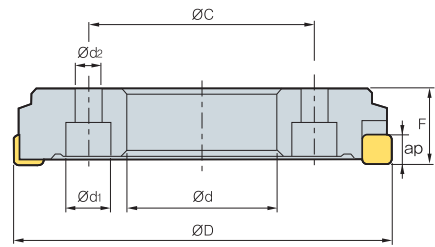


Fig. 2



• AR : -5°
• RR : -6°

Designation	Stock		ØD	Ød	Ød1	Ød2	a	b	E	F	ØC	ap	kg	Fig.	
	R	L													
PNH	4125R/L		10	125	38.1	-	-	15.9	10	27	63	-	Max 0.5	3.4	1
	4160R/L		14	160	50.8	-	-	19.0	11	27	63	-	Max 0.5	5.5	1
	4200R/L		18	200	80	24	14	-	-	-	40	120	Max 0.5	5.5	2
	4250R/L		24	250	120	30	18	-	-	-	40	170	Max 0.5	7.7	2
	4315R/L		30	315	180	30	18	-	-	-	40	230	Max 0.5	10.5	2
	4355R/L		34	355	220	30	18	-	-	-	40	270	Max 0.5	12.9	2
	4400R/L		38	400	250	30	18	-	-	-	40	300	Max 0.5	16.1	2
	4450R/L		44	450	300	30	18	-	-	-	40	350	Max 0.5	19.1	2
PNH	5125R/L		10	125	38.1	-	-	15.9	10	27	63	-	Max 0.5	3.4	1
	5160R/L		14	160	50.8	-	-	19.0	11	27	63	-	Max 0.5	5.3	1
	5200R/L		18	200	80	24	14	-	-	-	40	120	Max 0.5	5.4	2
	5250R/L		24	250	120	30	18	-	-	-	40	170	Max 0.5	7.6	2
	5315R/L		30	315	180	30	18	-	-	-	40	230	Max 0.5	10.4	2
	5355R/L		34	355	220	30	18	-	-	-	40	270	Max 0.5	12.8	2
	5400R/L		38	400	250	30	18	-	-	-	40	300	Max 0.5	15.9	2
	5450R/L		44	450	300	30	18	-	-	-	40	350	Max 0.5	18.9	2

● Stock item

▶ Available Inserts



SNEF

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SNEF 435															E17

▶ Available Arbors

Designation	Arbors	
PNH 125R/L	NT*□□(M/U)-FMA38.1-□□	-
160R/L	NT*□□(M/U)-FMA50.8-□□	-
200R/L	-	APR200
250R/L	-	APR250
315R/L	-	APR315
355R/L	-	APR355
400R/L	-	APR400
450R/L	-	APR450


▶ Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
K	140 ~ 230	0.05 ~ 0.30	PC6510
	135 ~ 220	0.10 ~ 0.30	H01
	50 ~ 90	0.10 ~ 0.30	G10E

▶ Parts

Specification			
Ø125-Ø450	WANH4N	DHA0821F	HW40
Ø125-Ø450	WANH5N		

Assembling



▶ Available Inserts E17

▶ Available Arbors and bolt E318-E320

PPH4000




Fig. 1

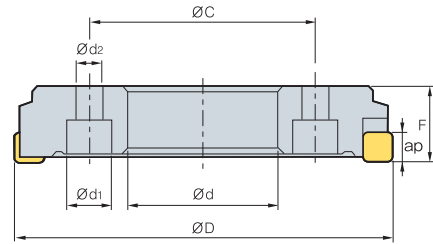


Fig. 2



AA
90°
• AR : 5°
• RR : -6°

(mm)

Designation	Stock			$\varnothing D$	$\varnothing d$	$\varnothing d_1$	$\varnothing d_2$	a	b	E	F	$\varnothing C$	ap		Fig.	
	R	L														
PPH 4125R/L				10	125	38.1	-	-	15.9	10	27	63	-	Max 0.5	3.4	1
4160R/L				14	160	50.8	-	-	19.0	11	27	63	-	Max 0.5	5.3	1
4200R/L				18	200	80	24	14	-	-	-	40	120	Max 0.5	5.5	2
4250R/L				24	250	120	24	14	-	-	-	40	170	Max 0.5	7.7	2
4315R/L				30	315	180	30	18	-	-	-	40	230	Max 0.5	10.5	2
4355R/L				34	355	220	30	18	-	-	-	40	270	Max 0.5	13	2
4400R/L				38	400	250	30	18	-	-	-	40	300	Max 0.5	16	2
4450R/L				44	450	300	30	18	-	-	-	40	350	Max 0.5	19	2
5450R/L				44	450	300	30	18	-	-	-	40	350	7	21	2

● Stock item

Available Inserts



SPEN-WC

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3630	PC6510	PC5300	PC5400	A30		G10E	H01
SPEN 120416-WC															E19

Available Arbors

Designation	Arbors
PPH 4125R/L	NT*□□(M/U)-FMA38.1-□□
4160R/L	NT*□□(M/U)-FMA50.8-□□
4200R/L	-
4250R/L	-
4315R/L	-
4355R/L	-
4400R/L	-
4450R/L	-


Recommended cutting condition

Workpiece	Cutting Condition		Grades
	vc(m/min)	fz(mm/t)	
K	140 ~ 230	0.05 ~ 0.30	PC6510
	135 ~ 220	0.10 ~ 0.30	H01
	50 ~ 90	0.10 ~ 0.30	G10E

Parts

Specification			
Wedge	WPPH4R/L	DHA0821F	HW40

Assembling




Available Inserts E19

Available Arbors and bolt E318~E320



SVM(M)4000

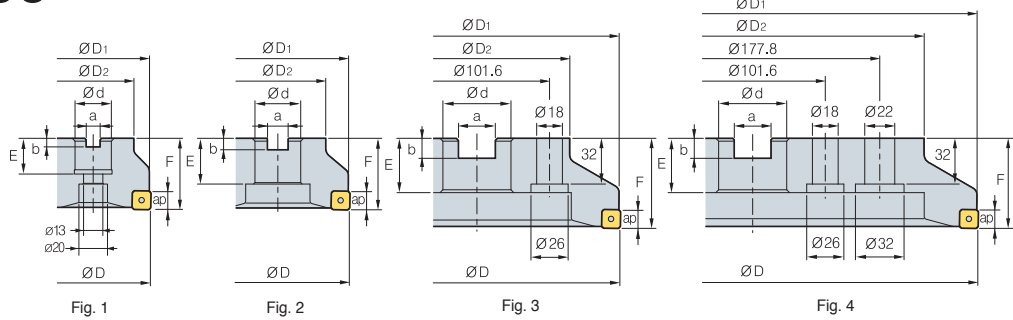

Designation	Stock		⊙	ØD	ØD ₁	ØD ₂	Ød	a	b	E	F	ap		Fig.
	R	L												
SVM	4080R/L-Z8		8	80	79	57	25.4	12.4	6	25	50	1.0	1.2	1
	4100R/L-Z12		12	100	99	67	31.75	14.4	8	32	63	1.0	2.3	1
	4125R/L-Z16		16	125	124	87	38.1	16.4	10	38	63	1.0	3.5	2
	4160R/L-Z20		20	160	159	107	50.8	16.4	11	38	63	1.0	5	2
	4200R/L-Z24		24	200	199	130	47.625	25.7	14	38	63	1.0	7.2	3
	4250R/L-Z30		30	250	249	180	47.625	25.7	14	38	63	1.0	12	3
4315R/L-Z36		36	315	314	240	47.625	25.7	14	38	63	1.0	19.5	4	
SVMM	4080R/L-Z8	●	8	80	79	57	27	12.4	7	22	50	1.0	1.2	1
	4100R/L-Z12		12	100	99	67	32	14.4	8	28	63	1.0	2.3	1
	4125R/L-Z16		16	125	124	87	40	16.4	9	30	63	1.0	3.5	2
	4160R/L-Z20		20	160	159	107	40	16.4	9	30	63	1.0	5	3
	4200R/L-Z24		24	200	199	130	60	25.7	14	38	63	1.0	7.2	3
	4250R/L-Z30		30	250	249	180	60	25.7	14	38	63	1.0	12	3
4315R/L-Z36		36	315	314	240	60	25.7	14	38	63	1.0	19.5	4	

● Stock item

▶ Available Inserts



SNEU-MF



SNEU1204ANN-MF



SNEU-WMF



SNEU-TBW

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM625	NCM635	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
SNEU	120420-MF								●						E17
	1204ANN-MF														
	1204R-WMF														
	1204-TBW														

▶ Parts

Specification				
Ø80-Ø315	WKAJ3	DTA0619	XTKA0412	TW15-100

▶ Available Inserts E17

SVUM6000




Fig. 1




Fig. 2




Fig. 3


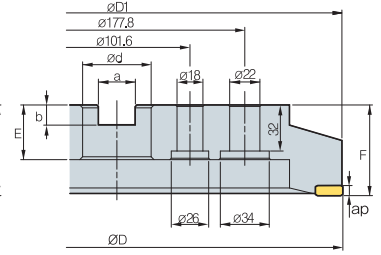


Fig. 4


Designation	Stock		⊗	ØD	ØD1	ØD2	Ød	a	b	E	F	ap	kg	Fig.
	R	L												
SVUM 6080R/L-Z4			4	80	79	57	27	12.4	7	22	50	0.5	1.2	1
6100R/L-Z4			4	100	100	67	32	14.4	8	28	63	0.5	2.3	1
6125R/L-Z4			4	125	125	87	40	16.4	9	30	63	0.5	3.5	2
6160R/L-Z4			4	160	160	107	40	16.4	9	30	63	0.5	5	3
6200R/L-Z6			6	200	200	130	60	25.7	14	38	63	0.5	7.2	3
6250R/L-Z6			6	250	250	180	60	25.7	14	38	63	0.5	12	3
6315R/L-Z8			8	315	315	240	60	25.7	14	38	63	0.5	19.5	4

● Stock item

Available Inserts





LNCS(R3.0)



LNCS(C1.5)

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC3530	PC6510	PC5300	PC5400	A30		G10E	H01
LNCS 1907-R3.0-WC															E09
1907-C1.5-WC															

Parts

Specification	 Screw	 Wrench
Ø80~Ø315	FTNA0513	TW20-100

Available Inserts E09



SVUM6000-B




Fig. 1




Fig. 2




Fig. 3

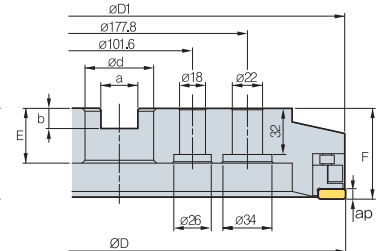



Fig. 4

Designation	Stock		⊙	ØD	ØD ₁	ØD ₂	Ød	a	b	E	F	ap	⊙ kg	Fig.
	R	L												
SVUM 6080R/L-Z4-B			4	80	79	57	27	12.4	7	22	50	0.5	1.2	1
6100R/L-Z4-B			4	100	99	67	32	14.4	8	28	63	0.5	2.3	1
6125R/L-Z4-B			4	125	124	87	40	16.4	9	30	63	0.5	3.5	2
6160R/L-Z4-B			4	160	160	107	40	16.4	9	30	63	0.5	5	3
6200R/L-Z6-B			6	200	200	130	60	25.7	14	38	63	0.5	7.2	3
6250R/L-Z6-B			6	250	250	180	60	25.7	14	38	63	0.5	12	3
6315R/L-Z8-B			8	315	315	240	60	25.7	14	38	63	0.5	19.5	4


(mm)

● Stock item

▶ Available Inserts









LNCS(R3.0)



LNCS(C1.5)

Designation	Cermet		Coated							Uncoated			Page		
	CN2000	CN30	NCM325	NCM335	PC3500	PC3600	PC3545	PC9530	PC6510	PC5300	PC5400	A30		G10E	H01
LNCS 1907-R3.0-WC															E09
1907-C1.5-WC															





▶ Parts

Specification	 Locator	 Wedge	 Wedge Screw	 Adjust Screw	 Contract Screw	 Wrench
Ø80~Ø315	LSH4R	WSH4	DHA0724F	AZ0619F-D	FTNA0512	TW20-100

▶ Available Inserts E09

Inch


Actual designations of milling cutter

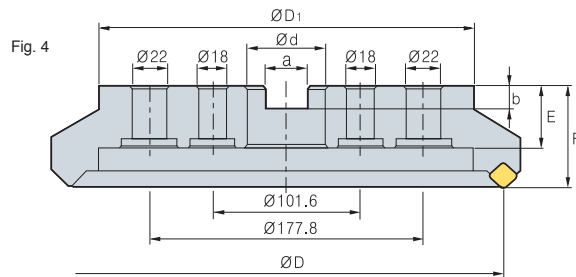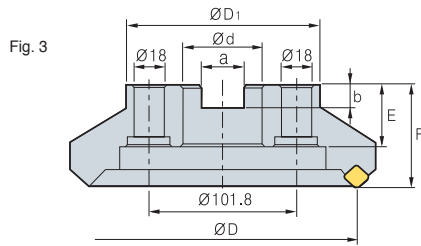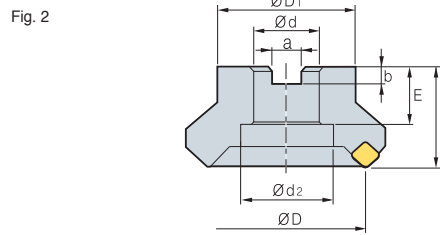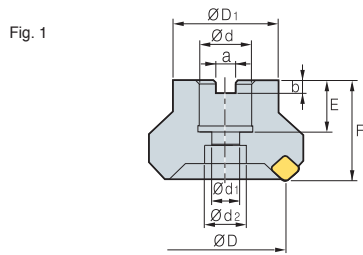

Inch type


Dimensions (inch)										Fig.	Available Arbors
ØD	Ød	a	b	E	F	ØD ₁	Ød ₁	Ød ₂			
40	16	8.4	5.6	18	40	34	9	14	1	FMC16, SMA16	
50	22	10.4	6.3	20	40	42	11	18	1	FMC22	
63	22	10.4	6.3	20	40	49	11	18	1	FMC22	
80	25.4	9.5	6	25	50	57	14	20	1	FMA25.4	
100	31.75	12.7	8	32	50	67	-	45	2	FMA31.75, SMB31.75	
125	38.1	15.9	10	38	63	87	-	56	2	FMA38.1	
160	50.8	19	11	38	63	107	-	-	2	FMA50.8	
200	47.625	25.4	14	38	63	130	-	-	3	FMA47.625	
250	47.625	25.4	14	38	63	180	-	-	3	FMA47.625	
315	47.625	25.4	14	38	63	240	-	-	4	-	

Wrench bolt

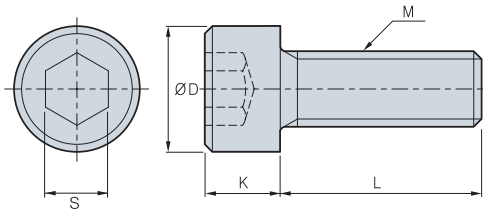

Designation	ØD	S	K	L	M	Cutter size
SB0825	13	6	8	25	M08 × 1.25	Ø40
SB1025	16	8	10	25	M10 × 1.50	Ø50, Ø63
SB1035	16	8	10	35	M10 × 1.50	Ø50, Ø63(HRM)
SB1230	18	10	12	30	M12 × 1.75	Ø80
SB1630	24	14	16	30	M16 × 2.0	Ø100
SB1645	24	14	16	45	M16 × 2.0	Ø80, Ø100(HRM)
SB2040	30	17	20	40	M20 × 2.5	Ø125

Clamp bolt


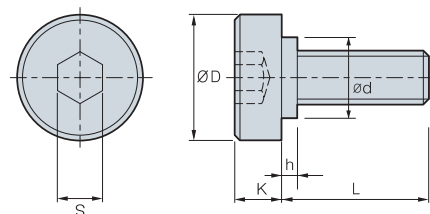


Specifications	Dimensions (inch)						Cutter size
	D	L	K	S	h	d	
M8 X 1.25	20	20	7	6	-	-	Ø40
M10 X 1.5	28	24	9	8	-	-	Ø50, Ø63
M12 X 1.75	33	28	10	10	2	23	Ø80
M16 X 2	40	32	10	14	5	23	Ø100
M20 X 2.5	50	40	14	17	5	27	Ø125
M24 X 3	64	46	14	19	9	37	Ø160



Metric - ISO6462, DIN138


▶ Clamping part of milling cutter

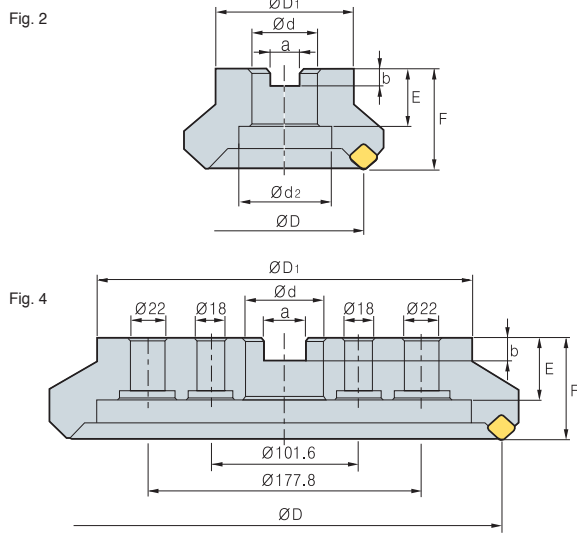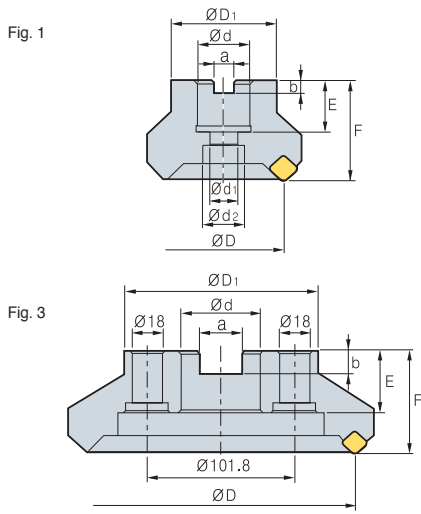

▶ Metric type(mm)


Dimensions (mm)										Fig.	Available Arbors
ØD	Ød	a	b	E	F	ØD1	Ød1	Ød2			
40	16	8.4	5.6	18	40	34	9	14	1	FMC16, SMA16	
50	22	10.4	6.3	20	40	42	11	18	1	FMC22	
63	22	10.4	6.3	20	40	49	11	18	1	FMC22	
80	27	12.4	7	22	50	57	14	20	1	FMC27	
100	32	14.4	8	28	50	67	-	45	2	FMC32	
125	40	16.4	9	32	63	87	-	56	2	FMB40	
160	40	16.4	9	32	63	107	-	-	2	FMB40	
200	60	25.7	14	38	63	130	-	-	3	FMB60	
250	60	25.7	14	38	63	180	-	-	3	FMB60	
315	60	25.7	14	38	63	240	-	-	4	-	

▶ Wrench bolt

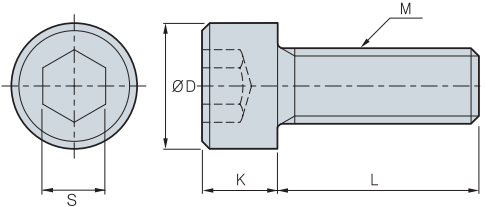

Designation	ØD	S	K	L	M	Cutter size
SB0825	13	6	8	25	M08 x 1.25	Ø40
SB1025	16	8	10	25	M10 x 1.50	Ø50, Ø63
SB1035	16	8	10	35	M10 x 1.50	Ø50, Ø63(HRM)
SB1230	18	10	12	30	M12 x 1.75	Ø80
SB1245	18	10	12	45	M12 x 1.75	Ø80(HRM)
SB1630	24	14	16	30	M16 x 2.0	Ø100
SB1645	24	14	16	45	M16 x 2.0	Ø100(HRM)
SB2040	30	17	20	40	M20 x 2.5	Ø125


▶ Clamp bolt

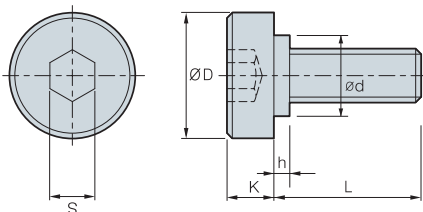

Specifications	Dimensions (mm)						Cutter size
	D	L	K	S	h	d	
M12 X1.75	33	28	10	10	2	23	Ø80
M16 X 2	40	32	10	14	5	23	Ø100
M20 X2.5	50	40	14	17	5	27	Ø125, Ø160

Clamping part of milling cutter(Oil-Hole)

▶ Clamping part of milling cutter

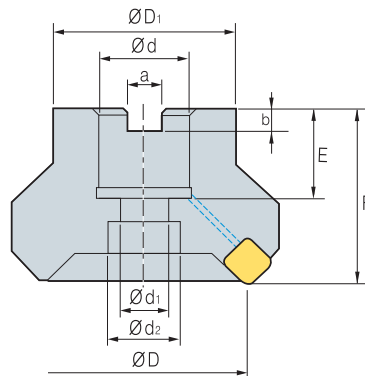


▶ Inch type

Dimensions (inch)									Available Arbors
ØD	Ød	a	b	E	F	ØD1	Ød1	Ød2	
40	16	8.4	5.6	19	40	34	9	14	FMC16,SMA16
50	22	10.4	6.3	21	40	42	11	18	FMC22
63	22	10.4	6.3	21	40	49	11	18	FMC22
80	25.4	9.5	6	24	50	57	14	20	FMA25.4,FMB25.4
100	31.75	12.7	8	32	63	67	18	26	FMA31.75, SMB31.75
125	38.1	15.9	10	35	63	87	22	32	FMA38.1,FMB38.1,FMC38.1

▶ Metric type

Dimensions (mm)									Available Arbors
ØD	Ød	a	b	E	F	ØD1	Ød1	Ød2	
40	16	8.4	5.6	19	40	34	9	14	FMC16,SMA16
50	22	10.4	6.3	21	40	42	11	18	FMC22
63	22	10.4	6.3	21	40	49	11	18	FMC22
80	27	12.4	7.0	23	50	57	14	20	FMC27
100	32	14.4	8.0	25	50	67	18	26	FMC32
125	40	16.4	9.0	29	63	87	22	32	FMB40 / FMC40

▶ Wrench bolt

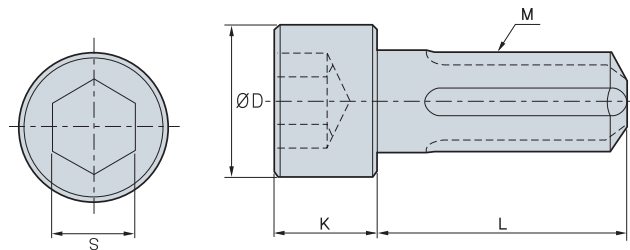







Designation	ØD	S	K	L	M	Cutter size
CB0825	13	6	8	25	M08×1.25	Ø40
CB1025	16	8	10	25	M10×1.50	Ø50, Ø63
CB1035	16	8	10	35	M10×1.50	Ø50, Ø63(HRM)
CB1230	18	10	12	30	M12×1.75	Ø80
CB1245	18	10	12	45	M12×1.75	Ø80(HRM)
CB1630	24	14	16	30	M16×2.0	Ø100
CB1645	24	14	16	45	M16×2.0	Ø100(HRM)
CB2040	30	17	20	40	M20×2.5	Ø125









Gear Cutter Applicable Example


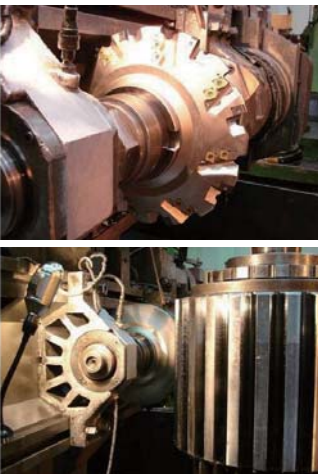
▶ Applicable Example-External tooth Gear

Finishing : M20	Semi-finishing	Roughing
 <ul style="list-style-type: none"> • Cutter Dia : $\varnothing 400$ • Tooth No : 20Tooth • External tooth gear : Formal cutter for gear processing which can be expected to KS 4 level accuracy • Cutter can simultaneously chamfer while milling. 	 <ul style="list-style-type: none"> • Cutter Dia : $\varnothing 280$ • Tooth No : 48Tooth • Designed for processing of external gear involute curve line shape • Possible to work for gear root portion R with optimal insert R design 	 <ul style="list-style-type: none"> • Cutter Dia : $\varnothing 300$ • Tooth No : 60Tooth • High feed rate with low cutting resistance due to V shape insert setting design
 M20XZ130-EX	 M20-M22-ROU	 LNE333-02-1 LNE434-02-1 KEL1906-C0.6-MF

















▶ Applicable Example-Internal tooth Gear

Finishing : M16	Semi-finishing	Roughing
 <ul style="list-style-type: none"> • Cutter Dia : $\varnothing 400$ • Tooth No : 20Tooth • Internal tooth gear : Formal cutter for gear processing which can be expected to KS 4 level accuracy • Cutter can simultaneously chamfer while milling. 	 <ul style="list-style-type: none"> • Cutter Dia : $\varnothing 280$ • Tooth No : 48Tooth • The semi-finishing cutter was designed for processing of external gear involute curb line shape. 	 <ul style="list-style-type: none"> • Cutter Dia : $\varnothing 560$ • Tooth No : 40Tooth • Possible to use for gear processing of all module due to step type of insert setting design
 M16XZ130	 M16-M18-ROU LNE433-R60	 KEL1906-C0.6-MF LNE434-02-1

▶ Gear Cutter Machining Example

 <ul style="list-style-type: none"> • Machine Gleason-PFAUTER CNC Hobbing Machine (Power : 52kW) • Cutting condition vc = 119.98 m/min (n=86.8 rpm) fz = 0.518 mm/t (vf=450 mm/min) ae = 36mm Dry • Tools M16-PT-RACK-KOR03 ($\varnothing 440 \times W90$) • Semi-finishing cutter (low cut, low resistance) 	 <ul style="list-style-type: none"> • Machine KARATS (30kw) • Cutting condition vc = 150 m/min, n=119rpm fz = 0.09mm/t, vf=81.6mm/min ae = 45mm Dry • Tools M24 Semi-finishing External type Applicable Insert M40-ROU(Main), CPE424-01(Flank)
--	--




E Gear Cutter Table

Type	Cutter Shape	Cutting edge Shape	Type	Figure
Roughing			Step Type	<ol style="list-style-type: none"> 1. Working for big sized gear tooth 2. Low cutting resistance with step type insert setting
			V shape Type	<ol style="list-style-type: none"> 1. Low cutting resistance with V shape cutting insert setting 2. Optimal cutting edge line setting according to Rach type & cutting edge shape
Semi-finishing			Low cutting resistance Type	<ol style="list-style-type: none"> 1. 4 Corner insert on Root portion 2. 3D chip breaker shape on flank 3. Optimal cutting edge line setting for low cutting resistance
			External gear high rigidity Type	<ol style="list-style-type: none"> 1. Optimal R type insert setting on Root portion 2. Superior Semi-finishing cutting with high rigidity shape of cutter & insert
			Internal gear high rigidity Type	<ol style="list-style-type: none"> 1. Exclusive semi-finishing Internal Gear insert 2. Optimal cutting edge line setting with Internal tooth shape
Finishing			External gear	<ol style="list-style-type: none"> 1. Concave shape of cutting edge line according to external gear type 2. Optimal cutting insert setting design according to a customer conditions
			Internal gear	<ol style="list-style-type: none"> 1. 2 corner insert setting on right & left side and chamfering insert setting 2. Adjustable chamfering cartridge use for chamfering control
			2STEP type	<ol style="list-style-type: none"> 1. Exclusive insert for machining the root part 2. 4-cornered insert

• Optimal cutting insert setting design according to customer condition






Gear Roughing Cutter (Step Type)

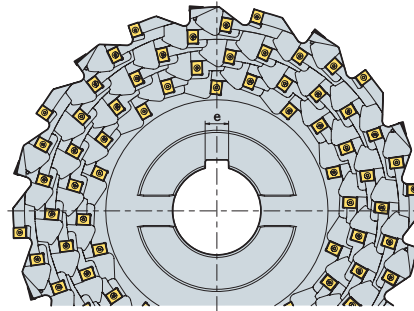

									(mm)
m		ØD	Ad	Ød	ØD ₁	a	e	F	
30	96	450	90	100	180	25	14	140	
	108	500	90	100	180	25	14	140	
	120	560	90	120	220	40	32	160	
40	112	450	105	100	180	25	14	140	
	126	500	105	100	180	25	14	140	
	140	560	105	120	220	40	32	160	
50	160	560	119	120	220	40	32	160	




Available Inserts

Picture	Designation	Coated				Uncoated		Dimensions (mm)					Configuration
		NC5330	PC9530	PC3500	PC5300	H01	G10E	l	d	t	d ₁	c	
 Reinforced cutting Edge	LNE 434-02-1			○	◎			19.05	14.29	6.35	5.4	0.6	(mm)
 Low cutting Resistance	KEL 1906-C0.6-MF			○	◎			19.05	14.29	6.35	5.4	0.6	
	KEL 190610-MR			○	◎			19.05	14.29	6.35	5.4	-	

※ The above specification is subject to change according to customer related condition & Korloy technical condition

◎ : 1st Rec ○ : 2nd Rec

Gear Roughing Cutter (V shape Type)

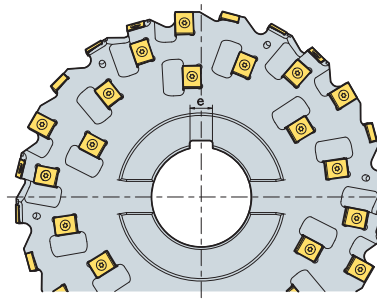

									(mm)
m	Type		ØD	Ød	ØD ₁	a	e	F	
20	rack	48	280	80	135	25	18	95	
22	rack	48	280	80	135	25	18	95	
24	rack	48	320	80	145	25	18	105	
26	rack	60	320	80	145	25	18	105	
28	rack	96	400	100	180	25	24	130	
30	rack	96	400	100	180	25	24	130	
32	rack	96	400	100	180	25	24	130	
34	rack	112	400	100	180	25	24	130	
36	rack	112	450	100	180	25	24	130	
38	rack	112	450	100	180	25	24	130	
40	rack	128	450	100	180	25	24	160	
42	rack	128	450	100	180	25	24	160	
44	rack	128	560	120	220	32	32	160	
46	rack	144	560	120	220	32	32	160	
48	rack	144	560	120	220	32	32	160	
50	rack	144	560	120	220	32	32	160	

Available Inserts




Picture	Designation	Coated				Uncoated		Dimensions (mm)					Configuration
		NC5330	PC9530	PC3500	PC5300	H01	G10E	l	d	t	d ₁	c	
 Reinforced cutting Edge	LNE 434-02-1			○	◎			19.05	14.29	6.35	5.4	0.6	
 Low cutting Resistance	LNE 1906-C0.6-MF 190610-MR			○	◎			19.05	14.29	6.35	5.4	0.6	
 Reinforced cutting Edge	KEL 333-02-1			○	◎			14.3	12.7	6.35	5.8	0.8	
 CNHQ	1005-C0.5							10	10	5.4	-	-	

※ The above specification is subject to change according to customer related condition & Korloy technical condition

◎ : 1st Rec ○ : 2nd Rec



Gear Semi-finishing Cutter (Low cutting resistance Type)

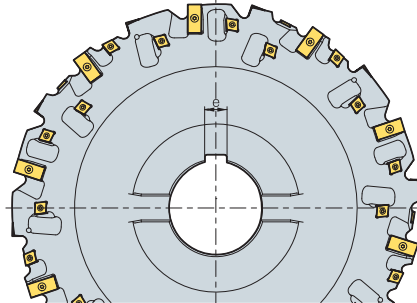

(mm)

m	No.of teeth		ØD	Ød	ØD ₁	a	e	F
6	30,60,120	18	250	80	100	25	18	70
8	30,60,120	18	250	80	100	25	18	80
10	30,60,120	24	250	80	100	25	18	80
12	30,60,120	24	250	80	100	25	18	90
14	30,60,120	24	280	100	135	25	24	95
16	30,60,120	32	280	100	135	25	24	100
18	30,60,120	32	320	100	145	25	24	105
20	30,60,120	64	400	100	180	25	24	110
22	30,60,120	64	400	100	180	25	24	110
24	30,60,120	64	400	100	180	25	24	120

Available Inserts




(mm)

Picture	Designation	Coated				Uncoated		Dimensions (mm)					Configuration
		NC5330	PC9530	PC3500	PC5300	H01	G10E	l	d	t	d ₁	c	
	M6-2ST			○	◎			19.05	11.6	3.8	4.4	2.25	
	M8-2ST			○	◎			19.05	11.6	4	4.4	3	
	M10-2ST			○	◎			19.05	11.6	4.76	4.4	3.75	
	M12-2ST			○	◎			19.05	14.3	6.35	5.5	4.5	
	M14-2ST			○	◎			25.4	14.3	6.35	5.5	5.25	
	M16-2ST			○	◎			31.8	14.3	7.14	5.5	6	
	M18-2ST			○	◎			31.8	14.3	7.14	5.5	6.75	
	M20-2ST			○	◎			31.8	14.3	9.52	5.5	7.5	
	M22-2ST			○	◎			31.8	14.3	9.52	5.5	8.25	
M24-2ST			○	◎			31.8	14.3	9.52	5.5	9		
	KEC			○	◎								
	120606-MX			○	◎			12	12.7	6.35	4.5	-	
	150708-MX			○	◎			15.15	15	7.6	5.8	-	

※ The above specification is subject to change according to customer related condition & Korloy technical condition

◎ : 1st Rec ○ : 2nd Rec

Gear Semi-finishing Cutter (High rigid edge Type, External Gear)



(mm)

m	No. of teeth		ØD	Ød	ØD1	a	e	F
12	30,60,120	24	250	60	100	25	14	70
14	30,60,120	36	250	60	100	25	14	80
16	30,60,120	36	250	60	100	25	14	80
18	30,60,120	36	250	60	100	25	14	90
20	30,60,120	48	280	80	135	25	18	95
22	30,60,120	48	280	80	135	25	18	100
24	30,60,120	48	320	80	145	25	18	105
26	30,60,120	72	400	100	180	25	24	110
28	30,60,120	72	400	100	180	25	24	110
30	30,60,120	72	400	100	180	25	24	120
32	30,60,120	84	400	100	180	25	24	130
34	30,60,120	84	400	100	180	25	24	130

Available Inserts

(mm)




Picture	Designation	Coated				Uncoated		Dimensions (mm)						Configuration
		NC5330	PC9530	PC3500	PC5300	H01	G10E	l	d	t	d ₁	R	c	
	M8-ROU			○	◎			15.875	11	4.76	4.6	4.6	-	
	M12-M14-ROU			○	◎			19.05	14.29	6.35	5.4	5.4	-	
	M16-M18-ROU			○	◎			19.05	14.29	7	5.4	5.4	-	
	M20-M22-ROU			○	◎			19.05	14.29	7.94	5.4	5.4	-	
	M40-ROU			○	◎			25.4	14.29	9.52	5.4	5.4	-	
	LNE 434-02-1			○	◎			19.05	14.29	6.35	5.4	-	0.6	
	KEL 1906-C0.6-MF			○	◎			19.05	14.29	6.35	5.4	-	0.6	
	190610-MR			○	◎			19.05	14.29	6.35	5.4	-	-	

※ The above specification is subject to change according to customer related condition & Korloy technical condition

◎ : 1st Rec ○ : 2nd Rec



Gear Semi-finishing Cutter (High rigid edge Type, Internal Gear)

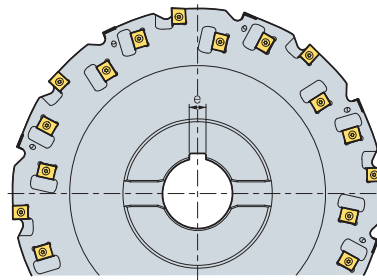

									(mm)
m	No.of teeth		ØD	Ød	ØD1	a	e	F	
12	30,60,120	24	250	60	100	25	14	70	
14	30,60,120	36	250	60	100	25	14	80	
16	30,60,120	36	250	60	100	25	14	80	
18	30,60,120	36	250	60	100	25	14	90	
20	30,60,120	48	280	80	135	25	18	95	
22	30,60,120	48	280	80	135	25	18	100	
24	30,60,120	48	320	80	145	25	18	105	
26	30,60,120	72	400	100	180	25	24	110	
28	30,60,120	72	400	100	180	25	24	110	
30	30,60,120	72	400	100	180	25	24	120	
32	30,60,120	84	400	100	180	25	24	130	
34	30,60,120	84	400	100	180	25	24	130	


Available Inserts

Picture	Designation	Coated				Uncoated		Dimensions (mm)					Configuration
		NC5330	PC9530	PC3500	PC5300	H01	G10E	l	d	t	d ₁	c	
	M8-ROU			○	◎			15.875	11	4.76	4.6	2	
	M12-M14-ROU			○	◎			19.05	14.29	6.35	5.4	3	
	M16-M18-ROU			○	◎			19.05	14.29	7	5.4	5	
	M20-M22-ROU			○	◎			19.05	14.29	7.94	5.4	7	
	M40-ROU			○	◎			25.4	14.29	9.52	5.4	10	
	LNE 433-R80			○	◎			19.05	14.29	5.56	5.4	2.5	

※ The above specification is subject to change according to customer related condition & Korloy technical condition

◎ : 1st Rec ○ : 2nd Rec

Gear Finishing Cutter (1 Step Type, External Gear)

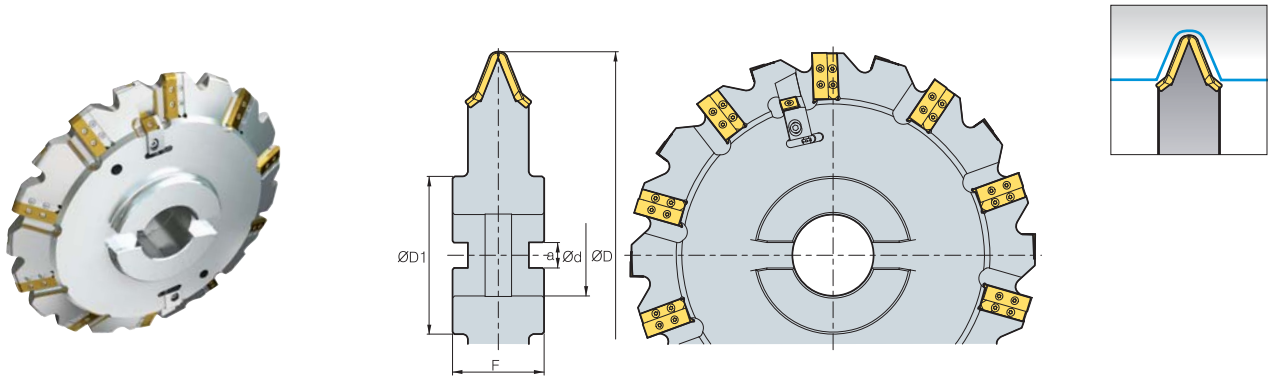

m		ØD	Ød	ØD1	a	F
6	20	400	80	155	25	90
8	20	400	80	155	25	90
10	20	400	80	155	25	90
12	20	400	80	155	25	90
14	20	400	80	155	25	90
16	20	400	80	155	25	90
18	20	400	80	155	25	90
20	20	400	80	155	25	90
22	20	400	80	155	25	90
24	20	400	80	155	25	90

(mm)

Available Inserts

Picture	Designation	Coated				Uncoated		Dimensions (mm)					Configuration
		NC5330	PC9530	PC3500	PC5300	H01	G10E	l	d	t	d1	R	
	M6			○	◎			19	14.3	5	5.5	2.25	
	M8			○	◎			27	14.3	5.4	5.5	3	
	M10			○	◎			29	14.3	6.35	5.5	3.75	
	M12			○	◎			33	14.3	6.35	5.5	4.5	
	M14			○	◎			39	14.3	6.35	5.5	5.25	
	M16			○	◎			43	14.3	7.94	5.5	6	
	M18			○	◎			50	14.3	7.94	5.5	6.75	
	M20			○	◎			54	14.3	9.53	5.5	7.5	
	M22			○	◎			57	14.3	9.53	5.5	8.25	
	M24			○	◎			64	14.3	9.53	5.5	9	
	SNEO 1507-C0.8			○	◎			15.875	15.875	7.94	-	-	




(mm)

※ The above specification is subject to change according to customer related condition & Korloy technical condition


◎ : 1st Rec ○ : 2nd Rec



Gear Finishing Cutter (1 Step Type, Internal Gear)

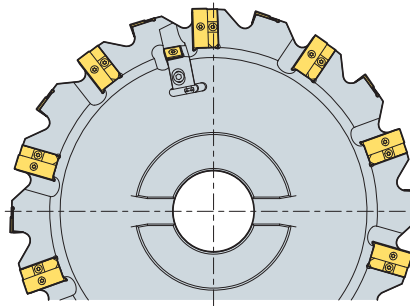





(mm)

m		ØD	Ød	ØD ₁	a	F
6	20	400	80	155	25	90
8	20	400	80	155	25	90
10	20	400	80	155	25	90
12	20	400	80	155	25	90
14	20	400	80	155	25	90
16	20	400	80	155	25	90
18	20	400	80	155	25	90
20	20	400	80	155	25	90
22	20	400	80	155	25	90
24	20	400	80	155	25	90

Available Inserts




(mm)

Picture	Designation	Coated				Uncoated		Dimensions (mm)					Configuration
		NC5330	PC9530	PC3500	PC5300	H01	G10E	l	d	t	d ₁	R	
	M6			○	◎			19	14.3	5	5.5	2.25	
	M8			○	◎			27	14.3	5.4	5.5	3	
	M10			○	◎			29	14.3	6.35	5.5	3.75	
	M12			○	◎			33	14.3	6.35	5.5	4.5	
	M14			○	◎			39	14.3	6.35	5.5	5.25	
	M16			○	◎			43	14.3	7.94	5.5	6	
	M18			○	◎			50	14.3	7.94	5.5	6.75	
	M20			○	◎			54	14.3	9.53	5.5	7.5	
	M22			○	◎			57	14.3	9.53	5.5	8.25	
	M24			○	◎			64	14.3	9.53	5.5	9	
	SNEQ 1507-C0.8			○	◎			15.875	15.875	7.94	-	-	

※ The above specification is subject to change according to customer related condition & Korloy technical condition

◎ : 1st Rec ○ : 2nd Rec

Gear Finishing Cutter (2 Step Type, Internal / External Gear)

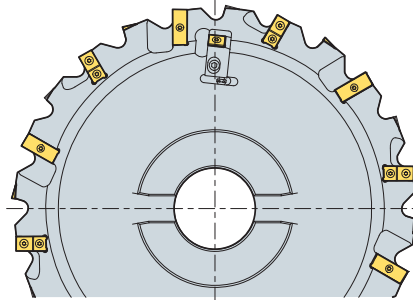

(mm)

m		ØD	Ød	ØD1	a	F
6	24	400	80	155	25	90
8	24	400	80	155	25	90
10	24	400	80	155	25	90
12	24	400	80	155	25	90
14	24	400	80	155	25	90
16	24	400	80	155	25	90
18	24	400	80	155	25	90
20	24	400	80	155	25	90
22	24	400	80	155	25	90
24	24	400	80	155	25	90

Available Inserts

(mm)


Picture	Designation	Coated				Uncoated		Dimensions (mm)					Configuration
		NC5330	PC9530	PC3500	PC5300	H01	G10E	l	d	t	d ₁	R	
	M6		○		◎			19	14.3	5	5	2.25	
	M8		○		◎			27	14.3	5.4	5.4	3	
	M10			○		◎		29	14.3	6.35	6.35	3.75	
	M12			○		◎		33	14.3	6.35	6.35	4.5	
	M14			○		◎		39	14.3	6.35	6.35	5.25	
	M16			○		◎		43	14.3	7.94	7.94	6	
	M18			○		◎		50	14.3	7.94	7.94	6.75	
	M20			○		◎		54	14.3	9.53	9.53	7.5	
	M22			○		◎		57	14.3	9.53	9.53	8.25	
	M24			○		◎		64	14.3	9.53	9.53	9	
	SNEQ 1507-C0.8		○		◎			15.875	15.875	7.94	-	-	
	M6-2ST							19.05	11.6	3.8	4.4	2.25	
	M8-2ST							19.05	11.6	4	4.4	3	
	M10-2ST							19.05	11.6	4.76	4.4	3.75	
	M12-2ST							19.05	14.3	6.35	5.5	4.5	
	M14-2ST							25.4	14.3	6.35	5.5	5.25	
	M16-2ST							31.8	14.3	7.14	5.5	6	
	M18-2ST							31.8	14.3	7.14	5.5	6.75	
	M20-2ST							31.8	14.3	9.52	5.5	7.5	
	M22-2ST							31.8	14.3	9.52	5.5	8.25	
M24-2ST							31.8	14.3	9.52	5.5	9		

※ The above specification is subject to change according to customer related condition & Korloy technical condition

◎ : 1st Rec ○ : 2nd Rec



▶ Gear Cutter Order Form

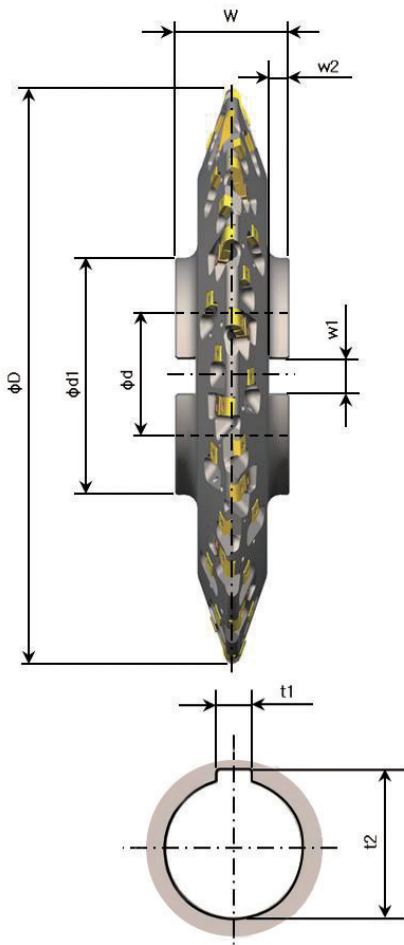

Cutter Type

- Roughing** **Semi-finishing** **Finishing**
 Step Low cutting resistance 1 Step
 V shape High rigid edge 2 Step

• Stock for finishing(one side) (mm) :

• Outside diameter D (mm) :

• Bore diameter d (mm) :

• Hub diameter $d1$ (mm) :

• Cutter width W (mm) :

• Radial keyway $w1$ (mm) :

• Radial keyway $w2$ (mm) :

• Axial keyway $t1$ (mm) :

• Axial keyway $t2$ (mm) :

▶ Involute Gear Data

- External Gear** **Internal Gear** **Rack Gear**

• Module M (mm) :

• No.of teeth Z (mm) :

• Pressure angle α (°) :

• Helix angle β (°) :

• Addendum modification coefficient x :

• Tip diameter d_a (mm) :

• Root diameter d_f (mm) :

• Root radius ρ_{fp} (mm)

• Base tangent length W_k (mm)


• No. of measuring teeth K :

• Dimensions / Dimension over balls M_d (mm) :

• Ball diameter D_M (mm) :

• Gear quality (DIN, JIS) :

Indexable HOB *New*

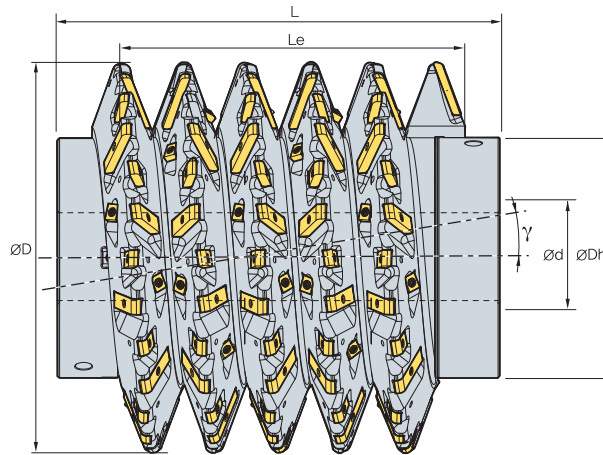


(mm)

Gear Module	$\varnothing D$	$\varnothing D_h$	$\varnothing d$	No.Segm. (Pitch)	L_e	Segment insert	Total insert	γ (Lead Ang.)
6	180	125	40	6	(113)	15	90	2.084
	210	125	50	6	(113)	17	102	1.763
	240	160	60	6	(113)	19	114	1.528
7	180	125	40	6	(132)	15	90	2.469
	210	125	50	6	(132)	17	102	2.084
	240	160	60	6	(132)	19	114	1.803
8	210	125	50	6	(151)	17	102	2.413
	240	160	60	6	(151)	19	114	2.084
	270	180	80	6	(151)	21	126	1.834
9	210	125	50	6	(169)	17	102	2.751
	240	160	60	6	(169)	19	114	2.372
	270	180	80	6	(169)	21	126	2.084
10	210	125	50	6	(189)	17	102	3.099
	240	160	60	6	(189)	19	114	2.666
	270	180	80	6	(189)	21	126	2.339
12	240	140	60	6	(226)	18	108	3.276
	270	180	80	6	(226)	22	132	2.866
	350	215	80	6	(226)	26	156	2.149
14	270	180	80	6	(264)	22	132	3.415
	350	215	80	6	(264)	26	156	2.547
16	270	160	80	6	(302)	22	132	3.989
	350	215	80	6	(302)	26	156	2.959
18	270	145	80	5	(283)	22	110	4.589
	350	215	80	5	(283)	26	130	3.383
20	350	215	80	5	(314)	26	130	3.823
	450	265	100	5	(314)	34	170	2.866



Indexable HOB

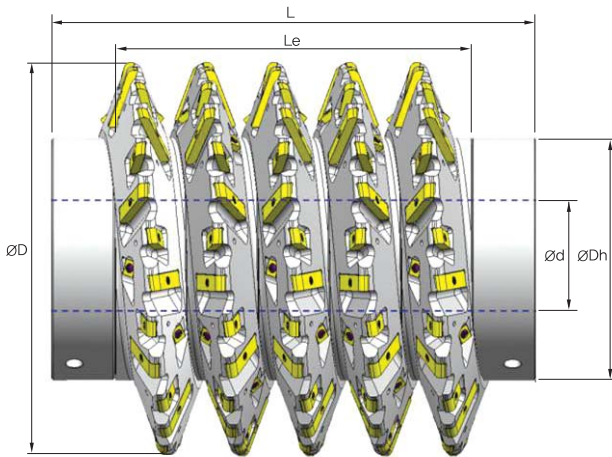

Tool SPEC.

■ Outside diameter $\varnothing D(\text{mm})$:

■ Bore diameter $\varnothing d(\text{mm})$:

■ Hub diameter $\varnothing Dh(\text{mm})$:


■ Hob length $L(\text{mm})$:

■ Cutting length $L_e(\text{mm})$:

■ Spiral direction RH/LH :

■ Quality class acc. to DIN 3968 :

Profile of Hob [Module m6 ~]

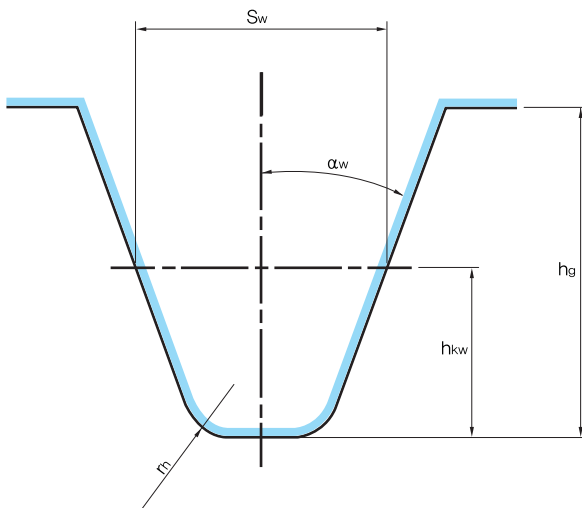


■ Module $M(\text{mm})$:

■ Addendum $h_{kw}(\text{mm})$:

■ Tooth thickness $S_w(\text{mm})$:

■ Tooth depth $h_g(\text{mm})$:

Profile of Roughing hob [Module m8 ~]

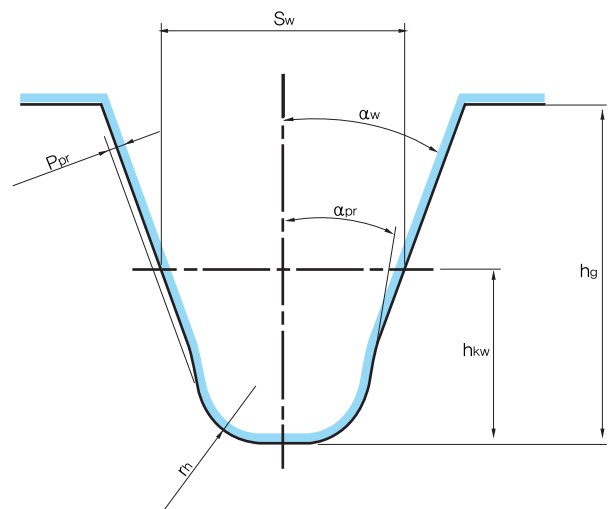

■ Pressure angle $\alpha_w(\text{mm})$:

■ Protuberance amount $P_{pr}(\text{mm})$:


■ Protuberance angle $\alpha_{pr}(\text{mm})$:

■ Tip radius $r_h(\text{mm})$:


E Special Boring Tool Order Form

Special drill holder for multi purpose


Drilling & Chamfering & Counter Boring

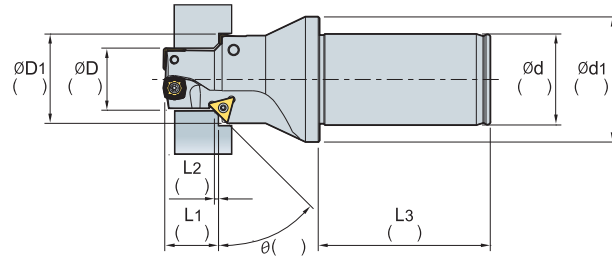

Drilling & Counter Boring

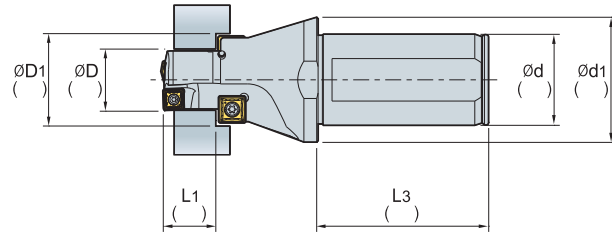

Drilling & Chamfering

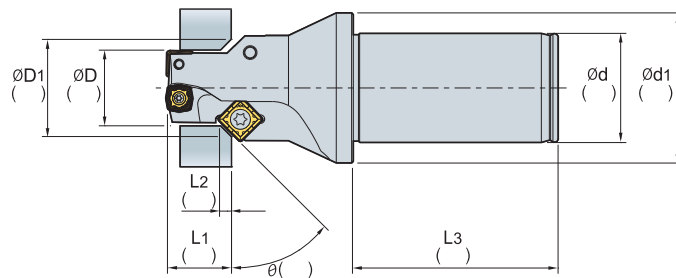

※ Order-made items available outer above configurations

Available Inserts


Picture	Designation	Coated		Dimensions (mm)					Available Screw	Configuration	
		PC5300	PC3600	l	d	t	r	d ₁			
	SPMT	050204-BC	●		4.2	5	2.48	0.4	2.25	FTNA0204	
	060204-BC	●		5.2	6	2.48	0.4	2.61	FTNA02205		
	07T308-BC	●		6.34	7.94	3.97	0.8	2.85	FTKA02565		
	090408-BC	●		7.9	9.525	4.3	0.8	4.05	FTNA03508		
	110408-BC	●		9.9	11.5	5	0.8	4.45	FTKA0408		
	120408-BC	●		11.1	12.7	5	0.8	4.45	FTKA0408		
	140512-BC	●		11.9	14.3	5.4	1.2	5.75	FTNA0510		
	TCMT	090204-HMP	●		8.6	5.56	2.38	0.4	2.50	FTKA02206	
	090208-HMP	●		7.6	5.56	2.38	0.8	2.50	FTKA02206		
	110202-HMP	●		10.5	6.35	2.38	0.2	2.80	FTKA2565		
	110204-HMP	●		10.0	6.35	2.38	0.4	2.80	FTKA2565		
	110208-HMP	●		9.0	6.35	2.38	0.8	2.80	FTKA2565		
	16T304-HMP	●		15.5	9.525	3.97	0.4	4.40	FTGA3512		
	16T308-HMP	●		14.5	9.525	3.97	0.8	4.40	FTGA3512		

● Stock item




▶ **Special boring holder for multi purpose**


Boring & Counter Boring

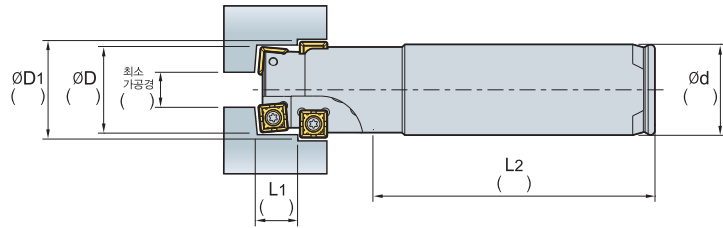

Boring & Chamfering

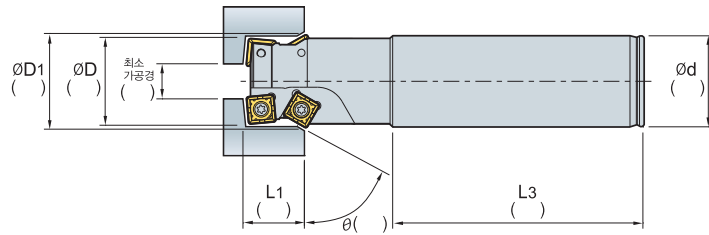

Boring & Chamfering & Counter Boring

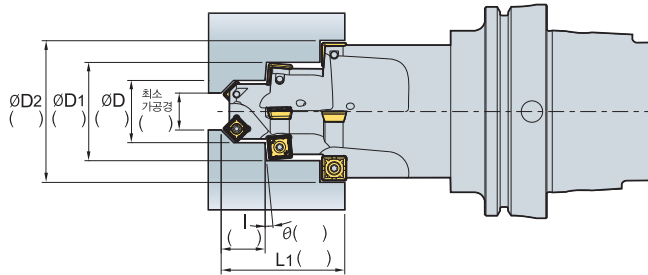

※ Order-made items available outer above configurations

▶ **Available Inserts**

Picture	Designation	Coated		Dimensions (mm)					Available Screw	Configuration
		PC5300	PC3600	l	d	t	r	d ₁		
	SPMT	050204-BC	●	4.2	5	2.48	0.4	2.25	FTNA0204	
	060204-BC	●	5.2	6	2.48	0.4	2.61	FTNA02205		
	07T308-BC	●	6.34	7.94	3.97	0.8	2.85	FTKA02565		
	090408-BC	●	7.9	9.525	4.3	0.8	4.05	FTNA03508		
	120408-BC	●	9.9	11.5	5	0.8	4.45	FTKA0408		
	140512-BC	●	11.1	12.7	5	0.8	4.45	FTKA0408		
	140512-BC	●	11.9	14.3	5.4	1.2	5.75	FTNA0510		
	TCMT	090204-HMP	●	8.6	5.56	2.38	0.4	2.50	FTKA02206	
	090208-HMP	●	7.6	5.56	2.38	0.8	2.50	FTKA02206		
	110202-HMP	●	10.5	6.35	2.38	0.2	2.80	FTKA2565		
	110204-HMP	●	10.0	6.35	2.38	0.4	2.80	FTKA2565		
	110208-HMP	●	9.0	6.35	2.38	0.8	2.80	FTKA2565		
	16T304-HMP	●	15.5	9.525	3.97	0.4	4.40	FTGA3512		
	16T308-HMP	●	14.5	9.525	3.97	0.8	4.40	FTGA3512		

● Stock item



F

ENDMILLS

Korloy Endmills, New technology and technical know-how, the best qualified for increasing productivity and machinability.



Technical Information for Endmills

- F02 Endmill Code System
- F04 KORLOY Endmills

Solid Endmills

- F08 Technical Information for H-MAX
- F11 H-MAX
- F13 Technical Information for H Endmill
- F16 H Endmill
- F18 Technical Information for V Endmill
- F20 V Endmill
- F21 Technical Information for I-MAX
- F26 I-MAX
- F44 Technical Information for Z Endmill
- F47 Z Endmill
- F51 Technical Information for I+ Endmill
- F54 I+ Endmill
- F66 Technical Information for F Endmill
- F68 F Endmill
- F69 Technical Information for Micro Endmill
- F70 Micro Endmill
- F71 Technical Information for Solid Endmill for Hard-to-cut material
- F73 Solid Endmills for Hard-to-cut material

Solid Endmills


- F74 Technical Information for S+ Endmill
- F76 S+ Endmill
- F77 Technical Information for Solid Endmill for Aluminum
- F78 Solid Endmill for Aluminum
- F80 Technical Information for A+ Endmill
- F82 A+ Endmill
- F85 Technical Information for C-Max
- F86 C-Max
- F89 Technical Information for D-Max
- F91 D-Max
- F92 Technical Information for PCD Endmill
- F93 PCD Endmill

Brazed Endmills

- F94 Technical Information for Brazed Endmill
- F95 Brazed Endmill

Special Endmill order Form

- F100 Special Endmill Order Form

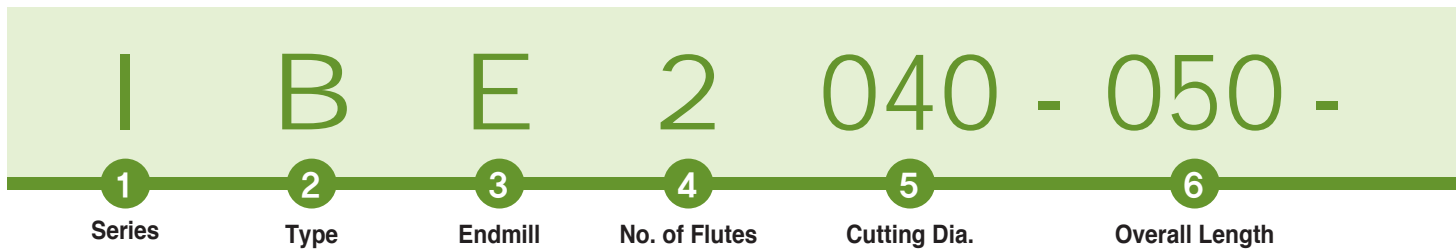

1 Series
I B E 2 040 - 050 - R T - V N S

I, IP, Z : Infinity-Max Endmill SSEA, AP : Aluminum Endmill
 HP, P : High performance-Max Endmill IFSE, SP : Stainless Endmill
 C : Copper-Max Endmill
 D : Dia coated-Max Endmill
 V : Variable Endmill
 FM : Feed-up Endmill

5 Cutting Dia
 I B E 2 **040** - 050 - R T - V N S

Notation	ØD(mm)
040	Ø4.0
060	Ø6.0
080	Ø8.0
100	Ø10.0

2 Type
 I **B** E 2 040 - 050 - R T - V N S

Flat type Ball type Radius type

F B R

3 Endmill
 I B **E** 2 040 - 050 - R T - V N S

6 Overall Length
 I B E 2 040 - **050** - R T - V N S

Overall Length	
Notation	L(mm)
050	50
080	80
100	100

4 No. of Flutes
 I B E **2** 040 - 050 - R T - V N S

2 Flutes 3 Flutes

4 Flutes 6 Flutes

2 3

4 6

※ The above code system is not applied for SSEA and ZSE.



R02 T00 - V05 N12 S06

7

Corner Radius

8

Taper Angle

9


Taper Length

10


Neck Length

11


Shank Diameter

7 Corner RadiusI B E 2 040 - 050 - **R** T - V N S

Corner Radius	
Notation	R(mm)
R02	r 0.2
R05	r 0.5
R10	r 1.0
R15	r 1.5

10 Neck LengthI B E 2 040 - 050 - R T - V **N** S

Long Neck




Taper Long Neck


 $l_2(\text{mm})$: Neck Length $T(\theta^\circ)$: Taper Angle

Long Neck	
Notation	$l_2(\text{mm})$
N05	5
N08	8
N10	10
N12	12

Taper Long Neck	
Notation	$l_2 + T(\theta^\circ)$
N0510	5+1°
N0815	8+1.5°
N1020	10+2°
N1225	12+2.5°

8 Taper AngleI B E 2 040 - 050 - R **T** - V N S $T(\theta^\circ)$: Taper Angle

Taper Angle	
Notation	$T(\theta^\circ)$
T10	1°
T15	1.5°
T20	2°

9 Taper LengthI B E 2 040 - 050 - R T - **V** N S

Taper Length	
Notation	l (mm)
V05	5
V10	10
V15	15

11 Shank DiameterI B E 2 040 - 050 - R T - V N **S**

Shank Diameter	
Notation	$\phi d(\text{mm})$
S06	$\phi 6$
S08	$\phi 8$
S10	$\phi 10$
S12	$\phi 12$
S16	$\phi 16$

※ This code system is also for special endmills.

F KORLOY Endmills

Type	Shape	Designation	Substrate	Figure	Coated	Used	No. of flute	Size		Workpiece						page
								Min	Max	P	M	K	N	S	H	
										Steel	Stainless steel	Cast iron	Non-ferrous metal	High resistant alloy, titanium alloy	Hardened steel	
H-Max	Ball	HPBE2000	PC203F		○	High speed High hardness	2	0.6	16	◎	◎	◎	○	◎	F11	
		HPBE2000T	PC203F		○	High speed High hardness	2	1	12	◎	◎	◎	○	◎	F11	
	Radius	HPRE2000	PC203F		○	High speed High hardness	2	2	2	◎	◎	◎	○	◎	F12	
		HPRE4000	PC203F		○	High speed High hardness	4	3	16	◎	◎	◎	○	◎	F12	
		HPRE2000T	PC203F		○	High speed High hardness	2	2	2	◎	◎	◎	○	◎	F12	
		HPRE4000T	PC203F		○	High speed High hardness	4	2	16	◎	◎	◎	○	◎	F12	
New H Endmill	Ball	PBE2000	PC303S		○	High speed High hardness	2	0.5	12	○	◎	◎	○	◎	F16	
	Radius	PRE4000	PC310U		○	High speed High hardness	4	3	12	○	◎	◎	○	◎	F17	
V Endmill	Flat	VFE4000	PC215F		○	General	4	2.5	16	◎	○	○	◎	○	F20	
I-Max	Ball	IBE2000	PC220		○	General	2	1	20	◎	○	○	◎	○	F31	
		IBE4000	PC220		○	General	2	3	20	◎	○	○	◎	○	F31	
	Long Ball	IBE2000	PC220		○	General	2	3	20	◎	○	○	◎	○	F32	
	Taper Ball	IBE2000-T	PC220		○	General	2	3	16	◎	○	○	◎	○	F32 F33	
	Flat	IFE2000	PC220		○	General	2	1	20	◎	○	○	◎	○	F26	
		IFE3000	PC220		○	General	3	2	16	◎	○	○	◎	○	F26	
		IFE4000	PC220		○	General	4	2.5	20	◎	○	○	◎	○	F27	
	Long Flat	IFE2000	PC220		○	General	2	3	20	◎	○	○	◎	○	F28	
		IFE4000	PC220		○	General	4	3	20	◎	○	○	◎	○	F28	
	Taper Flat	IFE2000-T	PC220		○	General	2	3	16	◎	○	○	◎	○	F29 F30	
Radius	IRE2000	PC220		○	General	2	3	20	◎	○	○	◎	○	F34		
	IRE4000	PC220		○	General	4	3	20	◎	○	○	◎	○	F35		

◎ : Excellent ○ : Good
























Type	Shape	Designation	Substrate	Figure	Coated	Used	No. of flute	Size		Workpiece						page
								Min	Max	P	M	K	N	S	H	
										Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel	
I-Max	Ball	BE2000	FA2		-	Cast iron, Steel	2	1	20	○	○	○	◎			F41
		BE4000	FA2		-	Cast iron, Steel	4	3	20	○	○	○	◎			F41
	Long Ball	BE2000	FA2		-	Cast iron, Steel	2	3	20	○	○	○	◎			F42
	Taper Ball	BE2000-T	FA2		-	Cast iron, Steel	2	3	16	○	○	○	◎			F42 F43
	Flat	FE2000	FA2		-	Cast iron, Steel	2	1	16	○	○	○	◎			F36
		FE3000	FA2		-	Cast iron, Steel	3	2	16	○	○	○	◎			F36
	Flat	FE4000	FA2		-	Cast iron, Steel	4	2.5	20	○	○	○	◎			F37
	Long Flat	FE2000	FA2		-	Cast iron, Steel	2	3	20	○	○	○	◎			F38
		FE4000	FA2		-	Cast iron, Steel	4	3	20	○	○	○	◎			F38
	Taper Flat	FE2000-T	FA2		-	Cast iron, Steel	2	3	16	○	○	○	◎			F39 F40
Z Endmill <i>New</i>	Flat	ZFE2000	PC315E		○	General	2	1	16	◎	○	◎		○		F47
		ZFE4000	PC315E		○	General	4	1	16	◎	○	◎		○		F48
	Short Flat	ZSFE2000	PC315E		○	General	2	1	12	◎	○	◎		○		F49
		ZSFE4000	PC315E		○	General	4	1	12	◎	○	◎		○		F49
	Ball	ZBE2000	PC315E		○	General	2	1	12	◎	○	◎		○		F50
I+ Endmill <i>New</i>	Flat	IPFE2000	PC320		○	General	2	1	20	◎	○	◎		○		F54
		IPFE4000	PC320		○	General	4	1	20	◎	○	◎		○		F56
	Long Flat	IPLFE2000	PC320		○	General	2	1	20	◎	○	◎		○		F55
		IPLFE4000	PC320		○	General	4	1	20	◎	○	◎		○		F57
	Ball	IPBE2000	PC320		○	General	2	1	20	◎	○	◎		○		F58
		IPBE4000	PC320		○	General	4	1	20	◎	○	◎		○		F60

◎ : Excellent ○ : Good























F KORLOY Endmills

Type	Shape	Designation	Substrate	Figure	Coated	Used	No. of flute	Size		Workpiece						page
								Min	Max	P	M	K	N	S	H	
										Steel	Stainless steel	Cast iron	Non-ferrous metal	High resistant alloy, titanium alloy	Hardened steel	
I+ Endmill	Long Ball	IPLBE2000	PC320		○	General	2	1	16	◎	○	◎	○			F59
	Radius	IPRE2000	PC320		○	General	2	1	12	◎	○	◎	○			F61 F62
		IPRE4000	PC320		○	General	4	2	12	◎	○	◎	○			F64
	Long Radius	IPLRE2000	PC320		○	General	2	3	12	◎	○	◎	○			F63
		IPLRE4000	PC320		○	General	4	3	12	◎	○	◎	○			F65
F Endmill	Standard	FME4000	PC203F		○	High speed	4	6	12	○	○	○	◎	◎		F68
	Long	FMLE4000	PC203F		○	High speed	4	6	12	○	○	○	◎	◎		F68
Micro Endmills	Flat	MSE2000	PC215F		○	High speed	2	0.2	1	○	○	○	◎	○		F70
	Ball	MSBE2000	PC215F		○	High speed	2	0.2	1	○	○	○	◎	○		F70
Solid Endmills for difficult to cut material	Flat	IFSE3000	PC210		-	STS	3	3	20	○	◎	○	◎			F73
S+ Endmill	Flat	SPFE4000	PC325		-	STS	4	1	12	○	◎	○	◎			F76
	Long Flat	SPLFE4000	PC325		-	STS	4	1	12	○	◎	○	◎			F76
Solid Endmills for aluminum	Flat	SSEA2000	H01 PD3000		- (○)	Aluminum	2	1	20	○	○	○	◎			F78
		SSEA3000	H01 PD3000		- (○)	Aluminum	3	2	16	○	○	○	◎			F78
	Ball	SSBEA2000	H01 PD3000		- (○)	Aluminum	2	1	20	○	○	○	◎			F79
A+ Endmill	Flat	APFE2000	H05S		-	Aluminum	2	2.5	20	○	○	○	◎			F82
		APFE3000	H05S		-	Aluminum	3	2.5	20	○	○	○	◎			F82
	Long Flat	APLFE2000	H05S		-	Aluminum	2	3	20	○	○	○	◎			F83
		APLFE3000	H05S		-	Aluminum	3	3	20	○	○	○	◎			F83
	Ball	APBE2000	H05S		-	Aluminum	2	1	12	○	○	○	◎			F84
	Roughing	APRE3000	H05S		-	Aluminum	3	4	25	○	○	○	◎			F84

◎ : Excellent ○ : Good



Type	Shape	Designation	Substrate	Figure	Coated	Used	No. of flute	Size		Workpiece						page
								Min	Max	P	M	K	N	S	H	
										Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant alloy, Titanium alloy	Hardened steel	
C-Max	Flat	CFE2000	PC210C		○	Copper, Copper alloy	2	1.0	12	○	○	○	○	○	○	F86
	Long Neck Flat	CFNE2000	PC210C		○	Copper, Copper alloy	2	0.5	4	○	○	○	○	○	○	F86
	Ball	CBE2000	PC210C		○	Copper, Copper alloy	2	1.0	12	○	○	○	○	○	○	F87
	Long Neck Ball	CBNE2000	PC210C		○	Copper, Copper alloy	2	0.5	4	○	○	○	○	○	○	F87
	Radius	CRE2000	PC210C		○	Copper, Copper alloy	2	2.0	12	○	○	○	○	○	○	F88
	Long Neck Radius	CRNE2000	PC210C		○	Copper, Copper alloy	2	1.0	4	○	○	○	○	○	○	F88
D-Max	Ball	DBE2000	ND3000		○	Graphite, Aluminum	2	4	8	○	○	○	○	○	○	F91
	Flat	DFE2000	ND3000		○	Graphite, Aluminum	2	3	8	○	○	○	○	○	○	F91
	Radius	DRE2000	ND3000		○	Graphite, Aluminum	2	4	8	○	○	○	○	○	○	F91
PCD Endmill	Flat	PDE1000	DP200		-	Nonferrous, High speed	1	4.6	6	○	○	○	○	○	○	F93
		PDE2000	DP200		-	Nonferrous, High speed	2	6.0	12	○	○	○	○	○	○	F93
Brazed Endmill	Flat	ZSE200	FCC PC221F		-	Cast iron, Steel	2	14	50	○	○	○	○	○	○	F95
		ZSE300	FCC PC221F		-	Cast iron, Steel	3	14	50	○	○	○	○	○	○	F95 F96
		ZSE400	FCC PC221F		-	Cast iron, Steel	4	14	50	○	○	○	○	○	○	F96
		ZSE600	FCC PC221F		-	Cast iron, Steel	6	34	50	○	○	○	○	○	○	F96
		ZSEA200	FCC		-	Aluminum, Copper	2	15	50	○	○	○	○	○	○	F97
	Long Flat	ZSEL200	FCC PC221F		-	Cast iron, Steel	2	14	50	○	○	○	○	○	○	F98
		ZSEL400	FCC PC221F		-	Cast iron, Steel	4	16	40	○	○	○	○	○	○	F98
		ZSEXL200	FCC PC221F		-	Cast iron, Steel	2	20	25	○	○	○	○	○	○	F98
	Ball	ZSBE200	FCC PC221F		-	Cast iron, Steel	2	13	50	○	○	○	○	○	○	F99


◎ : Excellent ○ : Good

F Technical Information for H-Max

New PVD coating technology for anti-corrosion and wear resistance


H-Max

- H-max can be used for pre-hardened steel and heat-treated steel
- H-max guarantees highly accurate machining (diameter and radius)
- New PVD coating technology improves anti-corrosion and wear resistance

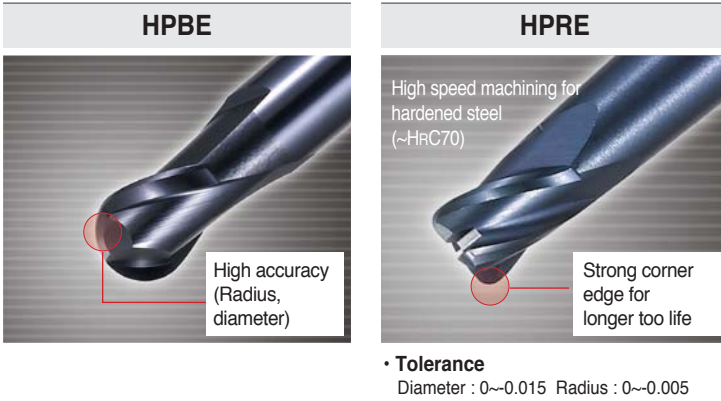

- ▶ Ultra fine grade for tougher edge and less chipping
- ▶ Combination of the new PVD coating and the hardened anti corrosion substrate guarantees excellent performance

Application area (Ball. Radius type)

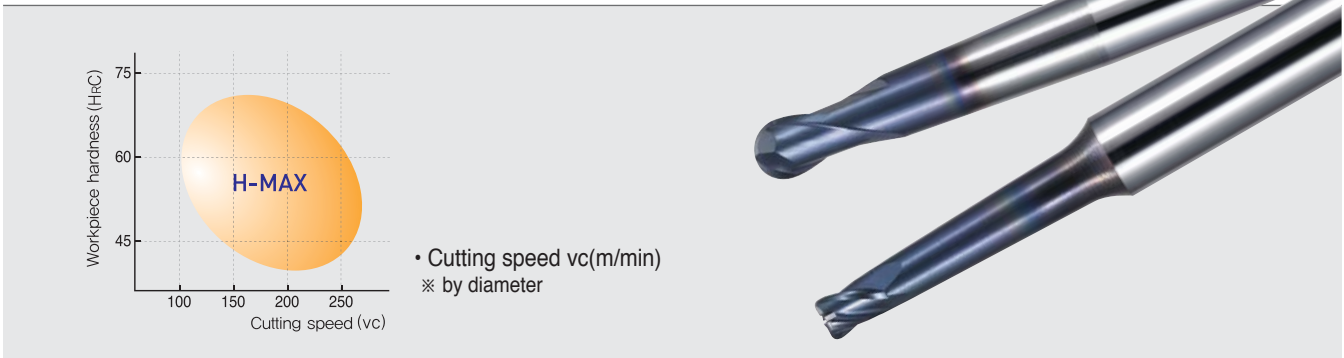

Test examples




Joint mold core machining (STD11 HRC54~59)

- Workpiece : STD11 HrC54~59
- Cutting condition : vc =170(m/min), vf=800(mm/min)
ap =0.2 ae=0.5, oil mist
- Tool : HPBE2080 PC203F
- Result : 130min cutting time (Roughing), long tool life, wear resistance, no chipping found

Test Result

	Point	Edge	Edge
H - Max			
Competitor			

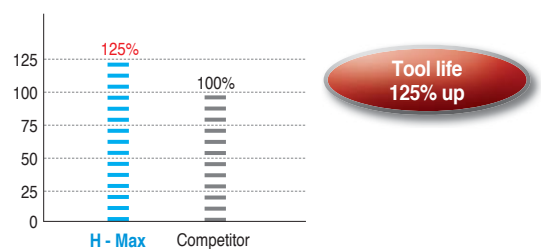

▶ Recommended Cutting Condition (HPBE)

Workpiece Condition Diameter(Ø)	NAK80, STD61 (~ HRC 50)			STD11, STS420 (HRC 50~60)			SKH (HRC 60~65)		
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	Axial depth ap(mm)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	Axial depth ap(mm)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	Axial depth ap(mm)
1	40,000	4,800	0.06	40,000	3,360	0.05	40,000	3,160	0.04
2	40,000	5,760	0.11	40,000	4,800	0.10	24,000	2,280	0.07
3	40,000	7,200	0.13	32,000	4,620	0.12	16,000	1,020	0.09
4	32,000	6,528	0.15	24,000	1,920	0.13	12,000	1,440	0.10
6	21,000	5,040	0.20	10,000	2,000	0.20	8,000	1,020	0.11
8	16,000	3,840	0.30	12,000	2,160	0.20	6,000	840	0.11
10	13,000	3,120	0.50	10,000	1,920	0.20	4,800	660	0.12
12	9,000	2,160	0.50	7,000	1,320	0.30	3,600	516	0.12
16	6,000	1,440	0.50	5,000	960	0.30	2,500	390	0.15

▶ Recommended Cutting Condition (HPRE)



Workpiece Condition Diameter(Ø)	NAK80, STD61 (~ HRC 50)			STD11, STS420 (HRC 50~60)			SKH (HRC 60~65)		
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	Axial depth ap(mm)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	Axial depth ap(mm)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	Axial depth ap(mm)
1	40,000	720	0.10	40,000	480	0.03	32,000	300	0.02
2	40,000	1,200	0.10	24,000	600	0.05	16,000	380	0.05
3	32,000	2,280	0.20	16,000	1,140	0.10	11,000	720	0.05
4	24,000	2,640	0.30	12,000	1,320	0.10	8,000	480	0.05
6	16,000	3,480	0.40	8,000	1,740	0.20	5,300	1,080	0.10
8	12,000	3,480	0.50	6,000	1,740	0.20	4,000	1,080	0.10
10	9,600	3,480	0.60	4,800	1,740	0.30	3,200	1,080	0.20
12	8,000	2,880	0.80	4,000	1,440	0.30	2,700	900	0.20
16	6,000	2,160	1.00	3,000	1,080	0.50	2,000	680	0.30
20	4,800	1,740	1.00	2,400	840	0.50	1,600	528	0.30

▶ Cutting speed formulas (Ball Endmills)

- ▶ Efficient cutting speed $V_{eff} = \pi \times Deff \times n / 1000$ (n=min⁻¹)
- ▶ Efficient diameter $Deff$ calculation formula : $Deff = (2\sqrt{ap(D-ap)}) \times \alpha$
D=Ø(Tool diameter), Deff=Efficient diameter
- ▶ Efficient cutting speed formulas : When slope Ø is 0° $V_{eff} = \pi \times Deff \times n / 1000$
Deff = Efficient, diameter Calculate Deff as ap with various ball endmills

α :	$\alpha = 1$	Slope angle $\theta = 0^\circ$
	$\alpha = 1.2$	Slope angle $\theta = 7^\circ$
	$\alpha = 1.5$	Slope angle $\theta = 15^\circ$
	$\alpha = 1.7$	Slope angle $\theta = 30^\circ$
	$\alpha = 2.17$	Slope angle $\theta = 45^\circ$
	$\alpha = 2.3$	Slope angle $\theta = 60^\circ$

▶ Cutting speed formulas (Ball Endmills, Slope angle = 0°)

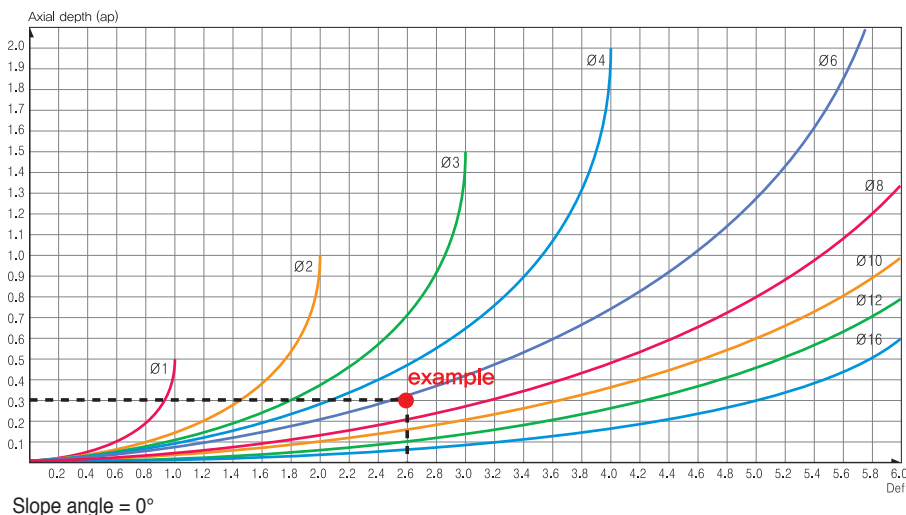

Ex) Diameter : 6mm, ap=0.3mm,
Deff=2.6mm, N=14,000(min⁻¹)
Slope angle 0° : $V_{eff} = 113.7$ (m/min)
Slope angle 15° :
 $V_{eff} = 113.7 \times 1.5 = 170.6$ (m/min)



⊕ Veff (efficient cutting speed) technical data as per depth and workpiece hardness (H-max, Ball Endmills)

Dimensions		HrC45~55 RPM	vc	Efficient cutting speed by depth (z-step=ap)														
Tool diameter	Ball R			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1	1.1	1.2	1.3	1.4	1.5
0.6	0.3	40,000	75	56	71	75	71	56										
0.8	0.4	37,000	93	61	80	90	93	90	80	61								
1	0.5	35,000	110	66	88	101	108	110	108	101	88	66						
1.5	0.75	32,000	151	75	102	121	133	142	148	150	150	148	142	133	121	102	75	0
2	1	30,000	188	82	113	135	151	163	173	180	185	187	188	187	285	180	173	163
2.5	1.25	28,000	220	86	119	143	161	176	188	197	205	211	215	218	220	220	218	215
3	1.5	26,000	245	88	122	147	167	183	196	207	217	224	231	236	240	243	244	245
4	2	22,000	276	86	120	146	166	183	197	210	221	231	239	247	253	259	264	268
5	2.5	20,000	314	88	123	149	170	188	204	218	230	241	251	260	268	275	282	288
6	3	18,000	339	87	122	148	169	187	203	218	231	242	253	262	271	279	287	294
7	3.5	15,000	330	78	110	134	153	170	185	198	210	221	231	240	249	256	264	271
8	4	13,500	339	75	106	129	148	164	179	192	203	214	224	234	242	250	258	265
9	4.5	12,000	339	71	100	122	140	155	169	182	193	203	213	222	231	238	246	253
10	5	11,000	345	69	97	118	135	151	164	176	187	198	207	216	224	232	240	247
11	5.5	10,000	345	66	92	113	129	144	157	169	179	189	199	207	215	223	230	237
12	6	9,200	347	63	89	108	124	139	151	162	173	183	192	200	208	215	223	229
13	6.5	8,500	347	61	85	104	120	133	146	157	167	176	185	193	201	208	215	222
14	7	7,900	347	58	82	101	116	129	141	151	161	170	179	187	194	202	208	215
15	7.5	7,400	349	57	80	98	112	125	137	147	157	166	174	182	189	196	203	209
16	8	6,900	347	55	77	94	108	121	132	142	151	160	168	175	183	189	196	202
17	8.5	6,500	347	53	75	91	105	117	128	138	147	155	163	171	178	184	191	197
18	9	6,100	345	51	72	88	102	113	124	133	142	150	158	165	172	178	185	191
19	9.5	5,800	346	50	71	86	99	111	121	130	139	147	155	162	168	175	181	187
20	10	5,500	345	49	69	84	97	108	118	127	135	143	151	157	164	170	176	182



Dimensions		HrC45~55 RPM	vc	Efficient cutting speed by depth (z-step=ap)														
Tool diameter	Ball R			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1	1.1	1.2	1.3	1.4	1.5
0.6	0.3	40,000	75	56	71	75	71	56										
0.8	0.4	37,000	93	61	80	90	93	90	80	61								
1	0.5	35,000	110	66	88	101	108	110	108	101	88	66						
1.5	0.75	28,000	132	66	90	106	117	124	129	132	132	129	124	117	106	90	66	
2	1	26,000	163	71	98	117	131	141	150	156	160	162	163	162	160	156	150	141
2.5	1.25	24,000	188	74	102	122	138	151	161	169	176	181	185	187	188	188	187	185
3	1.5	22,000	207	74	103	124	141	154	166	175	183	190	195	200	203	205	207	207
4	2	18,500	232	73	101	122	139	154	166	177	186	194	201	208	213	218	222	225
5	2.5	16,500	259	73	102	123	141	155	168	180	190	199	207	215	221	227	233	237
6	3	15,000	283	72	101	123	141	156	170	181	192	202	211	219	226	233	239	245
7	3.5	15,000	330	78	110	134	153	170	185	198	210	221	231	240	249	256	264	271
8	4	12,000	301	67	94	115	131	146	159	170	181	190	199	208	215	222	229	235
9	4.5	10,650	301	63	89	108	124	138	150	161	171	181	189	197	205	212	218	224
10	5	9,600	301	30	84	103	118	131	143	154	164	173	181	189	196	203	209	215
11	5.5	8,700	300	57	80	98	113	125	136	147	156	165	173	180	187	194	200	206
12	6	8,000	301	55	77	94	108	120	131	141	150	159	167	174	181	187	194	199
13	6.5	7,373	301	53	74	90	104	116	126	136	145	153	160	168	174	181	187	192
14	7	6,800	299	50	71	87	110	111	121	130	139	147	154	161	167	174	179	185
15	7.5	6,300	297	48	68	83	96	107	116	125	133	141	148	155	161	167	173	178
16	8	5,900	296	47	66	80	93	103	113	121	129	137	144	150	156	162	168	173
17	8.5	5,600	299	46	64	79	91	101	110	119	127	134	141	147	153	159	164	170
18	9	5,300	300	45	63	77	88	98	108	116	123	131	137	144	149	155	160	166
19	9.5	5,000	298	43	61	74	86	95	104	112	120	127	133	139	145	151	156	161
20	10	4,700	295	42	59	72	83	92	101	108	116	122	129	135	140	146	151	155



HPBE2000 (Ball) / 2000L (Long Ball)

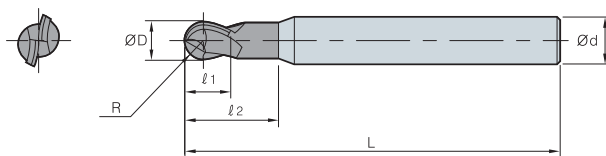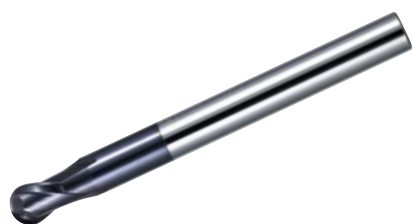

HPBE2000T (Taper Ball)

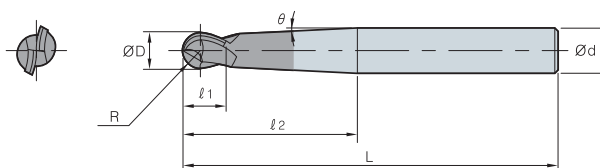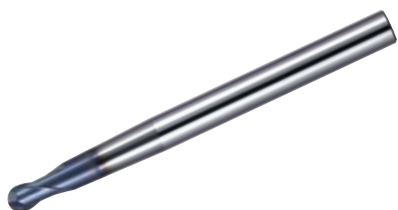


ØD	Tolerance	R Tolerance
Ø0.6~Ø6	0 ~ -0.02	±0.005
Ø7~Ø16	0 ~ -0.025	±0.010

(mm)

Designation	R	ØD	Ød	ℓ ₁	ℓ ₂	L	θ°
HPBE 2006	0.3	0.6	6	1.2	4	50	
HPBE 2008	0.4	0.8	6	1.6	4	50	
HPBE 2010	0.5	1	6	2	4	50	
HPBE 2020	1	2	6	3	6	50	
HPBE 2030	1.5	3	6	4	8	50	
HPBE 2040	2	4	6	5	10	60	
HPBE 2050	2.5	5	6	6	12	60	
HPBE 2060	3	6	6	7	14	60	
HPBE 2070	3.5	7	8	8	16	80	
HPBE 2080	4	8	8	9	18	80	
HPBE 2090	4.5	9	10	10	20	80	
HPBE 2100	5	10	10	11	22	80	
HPBE 2110	5.5	11	12	12	24	90	
HPBE 2120	6	12	12	13	26	90	
HPBE 2140	7	14	16	15	30	100	
HPBE 2160	8	16	16	17	34	100	
HPBE 2060L	3	6	6	7	14	90	
HPBE 2070L	3.5	7	8	8	16	90	
HPBE 2080L	4	8	8	9	18	100	
HPBE 2090L	4.5	9	10	10	20	100	
HPBE 2100L	5	10	10	11	22	100	
HPBE 2010-T2-26	0.5	1	6	2	26	55	1
HPBE 2010-T4-16	0.5	1	6	2	16	50	2
HPBE 2020-T2-41	1	2	6	3	41	70	1
HPBE 2020-T4-29	1	2	6	3	29	60	2
HPBE 2030-T2-51	1.5	3	6	4	51	80	1
HPBE 2030-T4-29	1.5	3	6	4	29	60	2
HPBE 2040-T2-61	2	4	6	5	61	90	1
HPBE 2040-T4-34	2	4	6	5	34	70	2
HPBE 2060-T2-63	3	6	6	7	63	90	1
HPBE 2060-T4-35	3	6	6	7	35	90	2
HPBE 2080-T2-67	4	8	8	11	67	100	1
HPBE 2080-T4-39	4	8	8	11	39	100	2
HPBE 2100-T2-69	5	10	10	13	69	120	1
HPBE 2100-T4-41	5	10	10	13	41	120	2
HPBE 2120-T2-71	6	12	12	15	71	130	1
HPBE 2120-T4-43	6	12	12	15	43	130	2



HPRE2000 / 4000 (Radius)


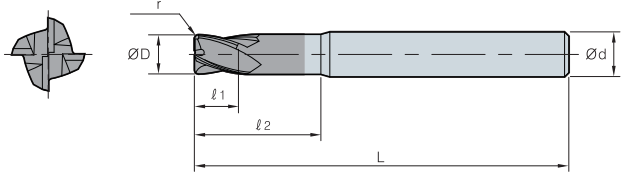


ØD	Tolerance	R Tolerance
Ø0.6~Ø6	0 ~ -0.02	±0.005
Ø7~Ø16	0 ~ -0.025	±0.010

(mm)

Designation	ØD	Ød	l ₁	l ₂	L	r
HPBE 2020-R0.5	2	6	3	12	60	0.5
HPRE 4030-R0.5 4040-R0.5 4060-R1.0 4080-R2.0 4100-R2.0 4120-R2.0 4160-R2.0	3	6	4	16	60	0.5
	4	6	5	20	60	0.5
	6	6	7	28	60	1
	8	8	9	31	80	2
	10	10	11	33	90	2
	12	12	13	39	100	2
	16	16	17	51	120	2

HPRE2000T / 4000T (Taper Radius)

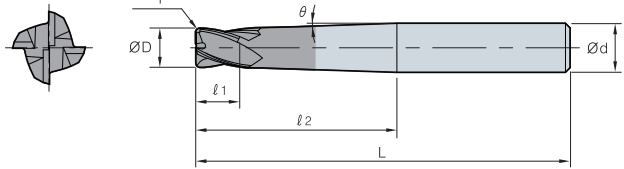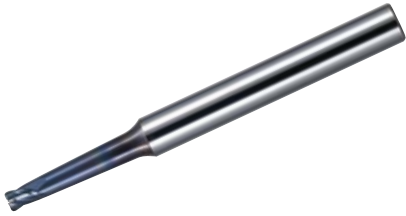

ØD	Tolerance	R Tolerance
Ø0.6~Ø6	0 ~ -0.02	±0.005
Ø7~Ø16	0 ~ -0.025	±0.010

(mm)

Designation	ØD	Ød	l ₁	l ₂	L	r	θ°
HPRE 2020-R0.5-T4-13 2020-R0.5-T2-18	2	6	3	13	70	0.5	2
	2	6	3	18	70	0.5	1
HPRE 4020-R0.5-T2-23 4020-R0.5-T4-18 4030-R0.5-T2-24 4030-R0.5-T4-19 4040-R0.5-T2-61 4040-R0.5-T4-34 4060-R1.0-T2-63 4060-R1.0-T4-36 4080-R2.0-T2-65 4080-R2.0-T4-37 4100-R2.0-T2-69 4100-R2.0-T4-40 4120-R2.0-T2-71 4120-R2.0-T4-42 4160-R2.0-T2-73 4160-R2.0-T4-45	2	6	3	23	70	0.5	1
	2	6	3	18	70	0.5	2
	3	6	4	24	90	0.5	1
	3	6	4	19	90	0.5	2
	4	8	5	61	100	0.5	1
	4	8	5	34	70	0.5	2
	6	10	7	63	100	1	1
	6	10	7	36	70	1	2
	8	12	9	65	110	2	1
	8	12	9	37	90	2	2
	10	14	11	69	110	2	1
	10	14	11	40	100	2	2
	12	16	13	71	110	2	1
	12	16	13	42	110	2	2
	16	20	17	73	130	2	1
16	20	17	45	130	2	2	




Endmill series for high speed machining for high hardened steel

H Endmill

- For cutting high hardened and heat-treated steel under HRC70
- New coating technology improves wear resistance
- A new shape improves machinability
- High speed and highly accurate machining available



Features



before




After special edge treatment

Improved stability

- **New grade(PC303S, PC310U)**
 - Ultra fine substrate and AlTiSiN coating guarantee excellent wear resistance
- **Special edge treatment**
 - Special cutting edge design was applied for less chipping and longer tool life
- **High accuracy with tolerance-h5**
 - High quality production system enables tolerance-h5 throughout the whole series.

PBE Series (Ball)



Cutting load is dispersed


S shape of ball

- The S shape of ball disperses cutting loads
- The tolerance of ball R is under $\pm 0.005\text{mm}$


PRE Series (Radius)



H Endmill radius



New shape of corner R




Measurement result of tolerance of corner R

High precision

- The new shape of corner R reduces cutting loads
- The tolerance of corner R is under $\pm 0.005\text{mm}$

- **Workpiece** D2(AISI) / X100CrMoV5 1(DIN) / SKD11(JIS), HRC60
- **Cutting conditions** Diameter= $\varnothing 8.0$, $n(\text{min}^{-1})=4,000$, $vc(\text{m}/\text{min})=100$
 $vf(\text{mm}/\text{min})=800$, $fz(\text{mm}/\text{t})=0.05$
 $ap(\text{mm})=8.0$, $ae(\text{mm})=0.25$, dry
- **Tools** PRE4080-100-R05

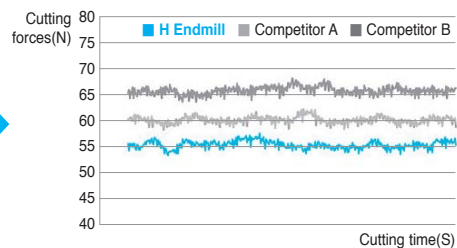


Reduced cutting loads

→ **Special cutting edge design reduces cutting loads and prolongs tool life.**

▶ Recommended cutting conditions(PRE4000 Radius)

Workpiece Conditions Diameter(Ø)	Pre hardened steel (HRC35~45)		Hardened steel (HRC45~55)		High hardened steel (HRC55~70)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
3	17,300	1,250	11,500	840	7,500	256
4	13,200	1,300	8,800	880	5,600	268
5	12,500	1,500	8,300	1,000	5,100	296
6	10,350	1,400	6,900	950	4,200	280
8	7,800	1,350	5,200	900	3,200	264
10	6,150	1,260	4,100	840	2,550	248
12	5,250	1,260	3,500	840	2,100	240

● Application tip




- Shouldering depth(ap) and radial depth(ae)
 - $ap = 0.1D$
 - $ae = 0.03D$
 - Workpiece should be clamped rigidly. In case of vibration, reduce R.P.M and feed rate by the same ratio

▶ Recommended cutting conditions(PRE4000 Radius)

Workpiece Conditions Diameter(Ø)	Pre hardened steel (HRC35~45)		Hardened steel (HRC45~55)		High hardened steel (HRC55~70)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
3	17,300	544	11,500	336	7,500	128
4	13,200	560	8,800	352	5,600	136
5	12,500	644	8,300	400	5,100	144
6	10,350	616	6,900	384	4,200	144
8	7,800	576	5,200	356	3,200	132
10	6,150	544	4,100	332	2,550	124
12	5,250	544	3,500	332	2,100	124


● Application tip



- Slotting depth(ap)
 - $ap = 0.05D$
 - $ae = 1.0D$
 - Workpiece should be clamped rigidly. In case of vibration, reduce R.P.M and feed rate by the same ratio

▶ Cutting condition by overhang

- Cutting conditions of the shank taper type in case of being clamped at neck.
 - When the overhang is increased by 1D, decrease R.P.M and feed 10%.
- In case of the straight type adjust conditions according to the overhang.
 - Ex) When the overhang is 3D and is increased by 1D, decrease R.P.M and feed 10%.




▶ Notice

- Cutting conditions are up to the machine's condition and the shape of cutting.
- Use cutting fluid that is proper to the workpiece and produces few temperature reaction.

▶ Recommended cutting conditions (PBE2000 Ball)

Workpiece Conditions Diameter(Ø)	Pre hardened steel (HRC35~45)		Hardened steel (HRC45~55)		High hardened Steel (HRC55~HRC70)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
0.5	35,000	1,470	31,500	1,330	28,000	1,050
1	35,000	2,940	31,500	2,660	28,000	2,000
1.2	33,600	3,010	30,100	2,695	26,600	2,100
1.5	33,600	3,150	30,100	2,800	25,900	2,150
2	33,460	3,360	28,000	2,800	24,500	2,200
2.5	25,900	3,710	22,400	2,800	17,500	2,200
3	22,260	3,710	18,550	2,800	16,500	2,200
4	16,730	3,710	14,000	2,800	13,000	2,200
5	17,800	4,900	15,000	3,750	12,500	2,100
6	13,400	4,100	11,000	3,100	10,000	2,500
8	10,700	3,500	9,000	2,700	8,000	2,150
10	8,900	3,100	7,500	2,400	6,600	1,900
12	6,680	2,500	5,600	1,900	5,000	1,550


● Application tip



- $a_p = 0.02D$
- $p_f = 0.05D$
- Workpiece should be clamped rigidly. In case of vibration, reduce RPM and feed rate by the same ratio

▶ Cutting condition by overhang

- Cutting conditions of the shank taper type in case of being clamped at neck.
 - When the overhang is increased by 1D, decrease R.P.M and feed 10%.
- In case of the straight type adjust conditions according to the overhang.
 - Ex) When the overhang is 3D and is increased by 1D, decrease R.P.M and feed 10%.



▶ Notice



- Cutting conditions are up to the machine's condition and the shape of cutting.
- Use cutting fluid that is proper to the workpiece and produces few temperature reaction.

▶ Cutting speed formulas (Ball Endmills)

- Efficient cutting speed $V_{eff} = (\pi \times Deff \times n)/1000$ ($n = \text{min}^{-1}$)
- Efficient diameter $Deff$ calculation formula $Deff = (2 \times \sqrt{ap(D-ap)}) \times \alpha$
 $D = \text{Tool diameter}$, $Deff = \text{Efficient diameter}$
- Efficient cutting speed formulas : When slope α is 0° $V_{eff} = (\pi \times Deff \times n)/1000$
 $Deff = \text{Efficient diameter}$ Calculate $Deff$ as a_p with various ball endmills


α	Slope angle θ
$\alpha = 1$	0°
$\alpha = 1.2$	7°
$\alpha = 1.5$	15°
$\alpha = 1.7$	30°
$\alpha = 2.17$	45°
$\alpha = 2.3$	60°

▶ Cutting speed formulas (Ball Endmills, Slope angle = 0°)

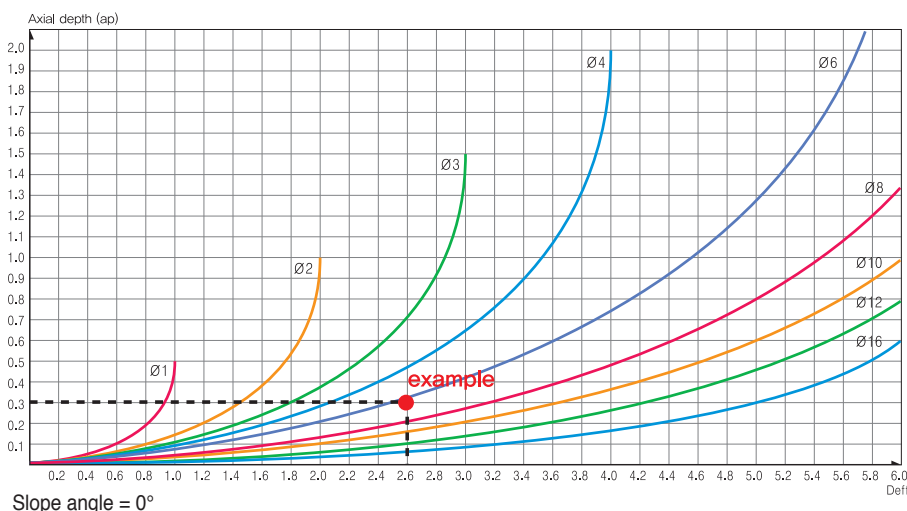

- Ex) Diameter : 6mm, $a_p = 0.3\text{mm}$,
 $Deff = 2.6\text{mm}$, $N = 14,000(\text{min}^{-1})$
 Slope angle 0° : $V_{eff} = 113.7(\text{m/min})$
 Slope angle 15° :
 $V_{eff} = 113.7 \times 1.5 = 170.6(\text{m/min})$

PBE2000 (Ball)

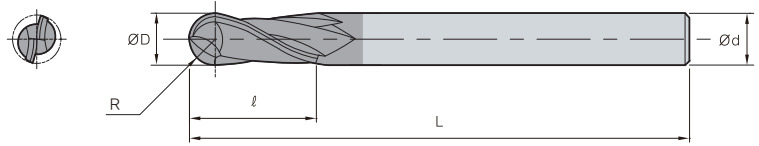

ØD	Tolerance
~ Ø5.9	0.00 ~ -0.015
Ø6.0 ~	0.00 ~ -0.025





(mm)


Designation		R	ØD	Ød	ℓ	L
PBE	PBE2005-040	0.25	0.5	6	1	40
	PBE2010-050	0.5	1	6	2.5	50
	PBE2012-050	0.6	1.2	6	3	50
	PBE2015-050	0.75	1.5	6	4	50
	PBE2020-050	1	2	6	5	50
	PBE2025-060	1.25	2.5	6	7	60
	PBE2030-060	1.5	3	6	8	60
	PBE2040-070	2	4	6	8	70
	PBE2050-080	2.5	5	6	10	80
	PBE2060-090	3	6	6	12	90
	PBE2080-100	4	8	8	14	100
	PBE2100-100	5	10	10	18	100
	PBE2120-110	6	12	12	22	110



PRE 4000 (Radius)

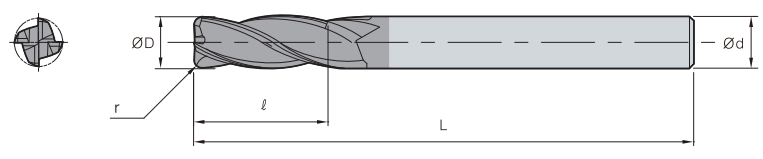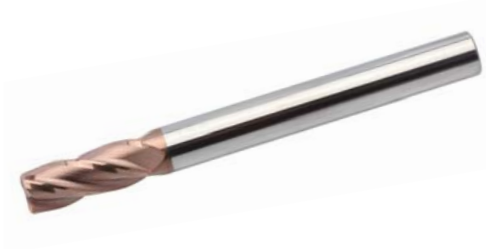

ØD	Tolerance
~ Ø5.9	0.00 ~ -0.015
Ø6.0 ~	0.00 ~ -0.025



(mm)

Designation	ØD	Ød	ℓ	L	r
PRE					
PRE4030-060-R01	3	6	8	60	0.1
PRE4030-060-R02	3	6	8	60	0.2
PRE4030-060-R03	3	6	8	60	0.3
PRE4030-060-R05	3	6	8	60	0.5
PRE4040-070-R01	4	6	10	70	0.1
PRE4040-070-R02	4	6	10	70	0.2
PRE4040-070-R03	4	6	10	70	0.3
PRE4040-070-R05	4	6	10	70	0.5
PRE4040-070-R10	4	6	10	70	1
PRE4060-090-R02	6	6	15	90	0.2
PRE4060-090-R03	6	6	15	90	0.3
PRE4060-090-R05	6	6	15	90	0.5
PRE4060-090-R10	6	6	15	90	1
PRE4080-100-R02	8	8	20	100	0.2
PRE4080-100-R03	8	8	20	100	0.3
PRE4080-100-R05	8	8	20	100	0.5
PRE4080-100-R10	8	8	20	100	1
PRE4100-100-R03	10	10	25	100	0.3
PRE4100-100-R05	10	10	25	100	0.5
PRE4100-100-R10	10	10	25	100	1
PRE4120-110-R03	12	12	30	110	0.3
PRE4120-110-R05	12	12	30	110	0.5
PRE4120-110-R10	12	12	30	110	1

F Technical Information for V Endmill


Improved productivity with effective machining due to less vibration

V Endmill



Variable Endmill

- Irregular helix angle
- Irregular indexing angle

※ Irregular flute spacing : Decreased vibration



▶ Performance(Vibration test)

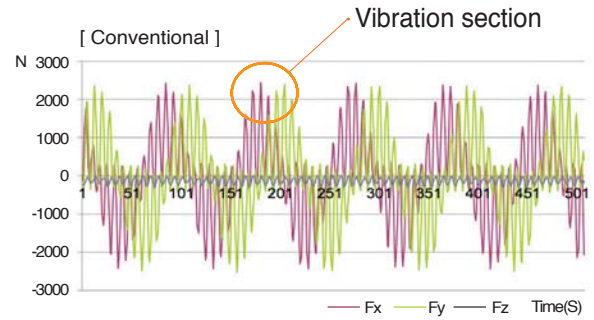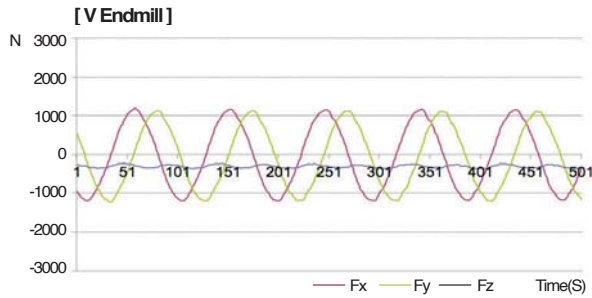


- **Workpiece** Alloy steel
- **Cutting condition** D=Ø8.0, n(min⁻¹)=3183, vc(m/min)=80, vf(mm/min)=713, fz(mm/t)=0.055, ap(mm)=8.0, ae(mm)=8.0, Dry
- **Tools** V Endmill VFE4080-060 · Conventional endmill

■ Advantage of V Endmill

Type	Cutting speed(vc)	Feed(vf)	Vibration	Quality
V Endmill	30% up	30% up	Minimize	Excellent

- Higher cutting speed and feed rate increase productivity.
- Less vibration realizes excellent surface finish and higher quality machining.



▶ Performance(Surface finish)

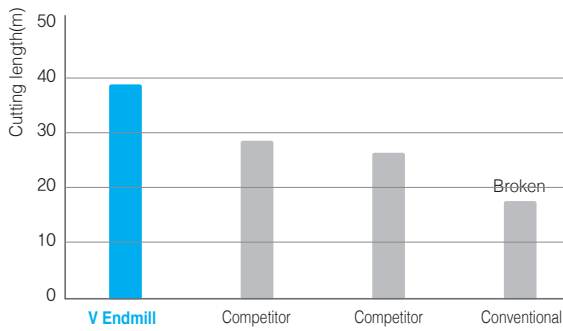

Edge			
Surface finish			
	V Endmill	• Competitor A Irregular flute spacing endmill	• Competitor B Irregular flute spacing endmill

- **Workpiece** Stainless steel
- **Cutting condition** D=Ø8.0, n(min⁻¹)=3979, vc(m/min)=100, vf(mm/min)=796, fz(mm/t)=0.05, ap(mm)=12, ae(mm)=0.8, Dry
- **Tools** VFE4080-060

▶ Machining example

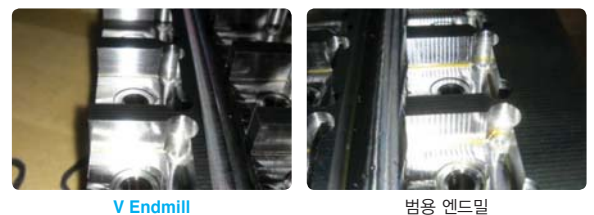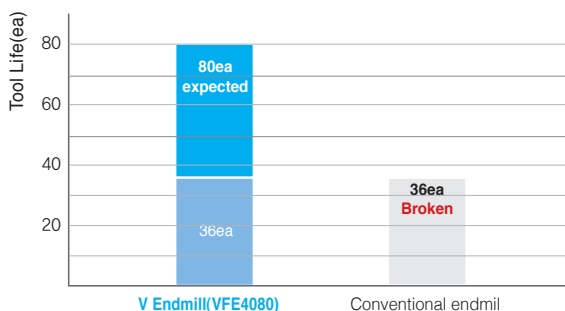

- **Workpiece** Alloy steel
- **Cutting condition** D=Ø8.0, n(m/min)=6000, vc(m/min)=150, vf(mm/min)=600, fz(mm/t)=0.025, ap(mm)=7, ae(mm)=0.8, Wet(Water-soluble)
- **Tools** VFE4080-060




▶ Cutting condition

■ Shouldering

Diameter (ØD)	Alloy & Carbon steel, HRC25 or less(SM, SCM)				Mold steel, HRC35~45(STS, KP4M)			
	R.P.M(min ⁻¹)	Feed(mm/min)	ap(mm)	ae(mm)	R.P.M(min ⁻¹)	Feed(mm/min)	ap(mm)	ae(mm)
2.5	15,915	1,241	3.8	0.7	12,732	891	0.3	0.3
3.0	13,263	1,241	4.5	0.8	10,610	891	0.3	0.3
3.5	11,368	1,241	5.3	0.9	9,095	891	0.4	0.4
4.0	9,947	1,241	6.0	1.1	7,958	891	0.4	0.4
5.0	7,958	1,241	7.5	1.4	6,366	891	0.5	0.5
6.0	6,631	1,241	9.0	1.6	5,305	891	0.6	0.6
7.0	5,684	1,241	10.5	1.9	4,547	891	0.7	0.7
8.0	4,974	1,194	12.0	2.2	3,979	891	0.8	0.8
9.0	4,421	1,194	13.5	2.4	3,537	891	0.9	0.9
10.0	3,979	1,194	15.0	2.7	3,183	891	1.0	1.0
12.0	3,316	1,194	18.0	3.2	2,653	891	1.2	1.2
14.0	2,842	1,194	21.0	3.8	2,274	891	1.4	1.4
16.0	2,487	1,194	24.0	4.3	1,989	891	1.6	1.6

● Application tip




※ Cutting condition by overhang

1. Standard overhang : Follow cutting condition above.
2. Long overhang : When the overhang is increased by 10mm, decrease feed 5% & ae 5%.

■ Slotting

Diameter (ØD)	Alloy & Carbon steel, HRC25 or less(SM, SCM)			Mold steel, HRC35~45(STS, KP4M)		
	R.P.M(min ⁻¹)	Feed(mm/min)	ap(mm)	R.P.M(min ⁻¹)	Feed(mm/min)	ap(mm)
2.5	15,915	1,035	2.8	12,732	700	2.5
3.0	13,263	1,035	3.3	10,610	700	3.0
3.5	11,268	1,035	3.9	9,095	700	3.5
4.0	9,947	1,035	4.4	7,958	700	4.0
5.0	7,958	1,035	5.5	6,366	700	5.0
6.0	6,631	1,035	6.6	5,305	700	6.0
7.0	5,687	1,035	7.7	4,549	700	7.0
8.0	4,974	1,035	8.8	3,979	700	8.0
9.0	4,421	1,035	9.9	3,537	700	9.0
10.0	3,979	1,035	11.0	3,183	700	10.0
12.0	3,316	1,035	13.2	2,653	700	12.0
14.0	2,842	1,035	15.4	2,274	700	14.0
16.0	2,487	1,035	17.6	1,989	700	16.0


● Application tip



※ Cutting condition by overhang

1. Standard overhang : Follow cutting condition above.
2. Long overhang : When the overhang is increased by 10mm, decrease feed 5% & ae 5%.

VFE4000 (Flat)

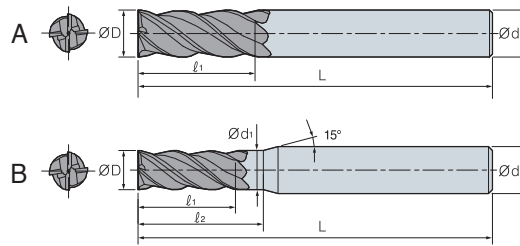

ØD	Tolerance
Ø3~Ø9	0.00 ~ -0.02
Ø10~Ø16	0.00 ~ -0.03



(mm)


Designation	ØD	Ød	d1	ℓ ₁	ℓ ₂	L	Type
VFE							
4025-045	2.5	6.0	2.48	6.0	8.0	45	B
4030-050	3.0	6.0	2.98	7.0	9.5	50	B
4035-050	3.5	6.0	3.48	8.0	11.0	50	B
4040-050	4.0	6.0	3.98	9.0	12.0	50	B
4050-050	5.0	6.0	4.98	12.0	16.0	50	B
4060-050	6.0	6.0	-	14.0	-	50	A
4070-060	7.0	8.0	6.97	16.0	21.0	60	B
4080-060	8.0	8.0	-	19.0	-	60	A
4090-070	9.0	10.0	8.97	20.0	27.0	70	B
4100-075	10.0	10.0	-	23.0	-	75	A
4120-080	12.0	12.0	-	27.0	-	80	A
4140-085	14.0	14.0	-	31.0	-	85	A
4160-090	16.0	16.0	-	36.0	-	90	A



I-Max is ideal for all kinds of milling operations due to the variety of available choices

I-Max




- Excellent wear resistance and anti chipping due to super ultra fine grain substrate and PVD coating
- Wide application from roughing to finishing
- Various workpieces can be machined (steel, alloy steel, cast iron, stainless steel, and aluminum)
- Long tool life under 150m/min(vc), CNC milling machine
- I-Max is ideal for various kinds of milling operations due to the variety of choices
- Multi-purpose machining (shouldering, grooving, ramping, etc.)

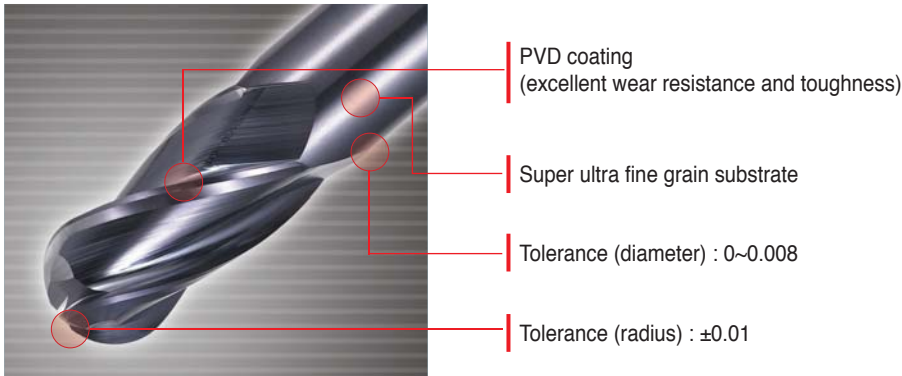

▶ Comparison

- **Workpiece** : NAK80(HRC40) Hexahedron, Climb milling-Air
- **Cutting condition** : $vc=70\text{m/min}$, $fz=0.04\text{mm/t}$, $n=3,700\text{min}^{-1}$, $vf=590\text{m/min}$, $ap=10\text{mm}$, $ae=1.0\text{mm}$
- **Tool** : IFE4060-050


I - Max	Competitor A	Competitor B	Competitor C
30m machining Edge is good	30m machining Chipping	24m machining Broken	28m machining Broken

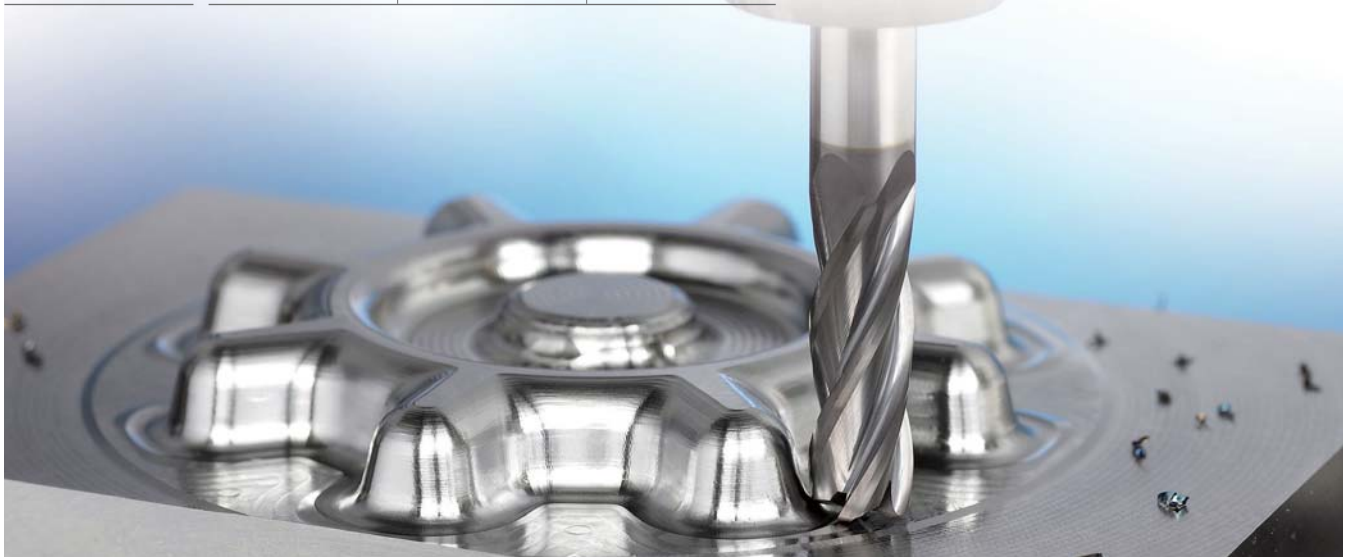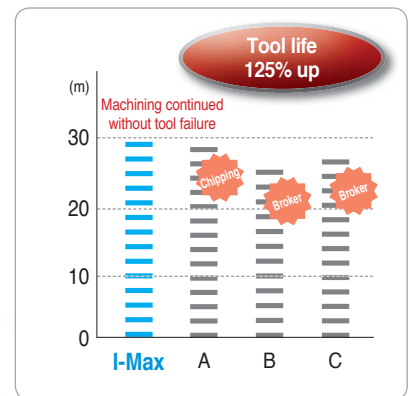

▶ Recommended Cutting Condition (IFE2000, Slotting)

Workpiece Condition Diameter(Ø)	Steel, Alloy steel (~ HRC20)		Steel, Alloy steel (HRC30~40)		Steel, Alloy steel (HRC40~)		Cast iron Graphite cast iron		Stainless steel Titanium alloy	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
1	37,500	185	25,400	130	19,500	80	39,700	370	16,000	45
2	18,800	190	12,700	180	9,700	80	19,800	450	8,000	65
3	12,600	310	8,200	190	6,400	80	12,900	450	5,300	65
4	9,500	310	6,400	190	4,800	80	9,800	450	4,000	65
5	7,500	310	5,400	190	3,900	80	7,600	450	3,200	65
6	6,500	310	4,100	190	3,000	80	7,800	660	2,600	65
8	4,800	310	3,200	190	2,500	80	6,000	710	2,000	65
10	3,700	310	2,600	190	1,900	80	4,800	740	1,600	65
12	3,100	310	2,100	190	1,600	80	3,700	780	1,300	65
14	2,700	310	1,800	190	1,400	80	3,400	820	1,100	65
16	2,400	340	1,500	240	1,200	90	3,000	830	1,000	75
18	2,000	340	1,400	240	1,000	100	2,600	890	880	80
20	1,900	340	1,300	240	900	100	2,400	890	800	80

● Application tip




■ Slotting depth(ap)

- $ap \leq 1.5D$
- Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio

▶ Recommended Cutting Condition (IFE4000, Shouldering)

Workpiece Condition Diameter(Ø)	Steel, Alloy steel (~ HRC20)		Steel, Alloy steel (HRC30~40)		Steel, Alloy steel (HRC40~)		Cast iron Graphite cast iron		Stainless steel Titanium alloy	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
3	12,600	920	8,200	580	6,400	220	12,900	1,370	5,300	200
4	9,500	920	6,400	580	4,800	220	9,800	1,370	4,000	200
5	7,500	920	5,400	580	3,900	220	7,600	1,370	3,200	200
6	6,500	920	4,100	580	3,000	220	7,800	2,000	2,600	200
8	4,800	920	3,200	580	2,500	220	6,000	2,120	2,000	200
10	3,700	920	2,600	580	1,900	220	4,800	2,230	1,600	200
12	3,100	920	2,100	580	1,600	220	3,700	2,340	1,300	200
14	2,700	920	1,800	580	1,400	220	3,400	2,450	1,100	200
16	2,400	1020	1,500	690	1,200	270	3,000	2,520	1,000	225
18	2,000	1020	1,400	690	1,000	340	2,600	2,680	880	240
20	1,900	1020	1,300	690	900	340	2,400	2,680	800	240

● Application tip




■ Shouldering depth (ap) and radial depth (ae)

- $ap = 1.5D$
- $ae = 0.1D$
- Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio

▶ Recommended Cutting Condition (IBE2000 Ball)

Workpiece Condition Diameter(Ø)	Steel, Alloy steel (~ HRC30)		Steel, Alloy steel (HRC30 ~)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
1	15,760	250	5,800	90
2	14,400	750	4,680	150
3	13,100	680	4,520	150
4	10,500	740	4,200	180
5	9,140	820	3,680	180
6	7,780	840	3,160	190
8	5,260	950	2,100	190
10	4,620	1,020	1,780	190
12	3,780	900	1,360	190
16	2,740	920	1,160	190
20	2,100	840	840	190

● Application tip




- $ap=0.3D$ • $pf=0.7D$
- Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio

▶ Recommended Cutting Condition (IBE4000 Ball)

Workpiece Condition Diameter(Ø)	Steel, Alloy steel (~ HRC30)		Steel, Alloy steel (HRC30 ~)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
1	15,760	380	5,800	130
2	15,760	800	4,840	160
3	13,100	1,020	4,520	220
4	10,500	1,110	4,200	270
5	9,140	1,230	3,680	270
6	7,780	1,260	3,160	280
8	5,260	1,430	2,100	280
10	4,620	1,530	1,780	280
12	3,780	1,350	1,360	280
16	2,740	1,380	1,160	280
20	2,100	1,260	840	280

● Application tip





- $ap=0.3D$ • $pf=0.7D$
- Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio

Recommended Cutting Condition (IRE2000 Radius)

Workpiece Condition Diameter(\varnothing)	Steel, Alloy steel (~ HRC30)		Steel, Alloy steel (HRC30 ~)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
3	4,410	70	2,200	30
4	3,570	85	1,790	35
5	3,050	105	1,580	40
6	2,630	125	1,370	50
8	2,000	135	1,050	50
10	1,680	135	840	50
12	1,370	105	700	40
16	1,160	95	560	35
20	840	70	420	25

Application tip





• Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio

- Shouldering depth (ap) and radial depth (ae)
 - ap=1.5D
 - ae=0.1D
- Slotting depth(ap)
 - ap≤1.5D

Recommended Cutting Condition (IRE4000 Radius)

Workpiece Condition Diameter(\varnothing)	Steel, Alloy steel (~ HRC30)		Steel, Alloy steel (HRC30 ~)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
3	4,410	115	2,200	55
4	3,570	140	1,790	60
5	3,050	180	1,580	70
6	2,630	215	1,370	85
8	2,000	230	1,050	85
10	1,680	230	840	85
12	1,370	180	700	70
16	1,160	160	560	60
20	840	115	420	45

Application tip




• Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio

- Shouldering depth (ap) and radial depth (ae)
 - ap=1.5D
 - ae=0.1D
- Slotting depth(ap)
 - ap≤1.5D

▶ Recommended Cutting Condition (FE2000, Slotting)

Workpiece Condition Diameter(Ø)	Steel, Alloy steel (HRC20 ~)		Steel, Alloy steel (HRC30~40)		Stainless steel Titanium alloy		Cast iron Graphite cast iron		Aluminum alloy		Copper Non-ferrous metal	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
1	11,000	55	8,000	40	16,000	45	13,000	120	32,000	300	24,000	240
2	5,500	80	4,000	55	8,000	65	6,500	150	16,000	320	12,000	240
3	3,700	90	2,600	60	5,300	65	4,200	150	11,000	320	8,000	240
4	2,800	90	2,000	60	4,000	65	3,200	150	8,000	320	6,000	240
5	2,200	90	1,600	60	3,200	65	2,500	150	6,400	320	4,800	240
6	1,800	90	1,000	60	2,600	65	2,100	180	5,300	340	4,000	260
8	1,400	90	1,000	60	1,300	65	1,600	190	4,000	340	3,000	260
10	1,100	90	800	60	2,000	65	1,300	200	3,200	340	2,400	260
12	900	90	660	60	1,600	65	1,000	210	2,600	340	2,000	260
14	800	90	570	60	1,100	65	900	220	2,300	340	1,700	260
16	700	100	500	75	1,000	75	800	225	2,000	340	1,500	260
18	600	100	440	75	880	80	700	240	1,800	340	1,300	260
20	550	100	400	75	800	80	640	240	1,600	340	1,200	260

● Application tip




■ Slotting depth(ap)

- $ap \leq 0.5D (D > \phi 3)$
- $ap \leq 1.0D (D < \phi 3)$
- Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio

▶ Recommended Cutting Condition (FE4000, Shouldering)

Workpiece Condition Diameter(Ø)	Steel, Alloy steel (HRC20 ~)		Steel, Alloy steel (HRC30~40)		Stainless steel Titanium alloy		Cast iron Graphite cast iron		Aluminum alloy		Copper Non-ferrous metal	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
3	3,700	270	2,600	180	5,300	200	4,200	450	11,000	960	8,000	720
4	2,800	270	2,000	180	4,000	200	3,200	450	8,000	960	6,000	720
5	2,200	270	1,600	180	3,200	200	2,500	450	6,400	960	4,800	720
6	1,800	270	1,000	180	2,600	200	2,100	540	5,300	1,020	4,000	780
8	1,400	270	1,000	180	1,300	200	1,600	570	4,000	1,020	3,000	780
10	1,100	270	800	180	2,000	200	1,300	600	3,200	1,020	2,400	780
12	900	270	660	180	1,600	200	1,000	630	2,600	1,020	2,000	780
14	800	270	570	180	1,100	200	900	660	2,300	1,020	1,700	780
16	700	300	500	220	1,000	225	800	680	2,000	1,020	1,500	780
18	600	300	440	220	880	240	700	720	1,800	1,020	1,300	780
20	550	300	400	220	800	240	640	720	1,600	1,020	1,200	780

● Application tip



■ Shouldering depth (ap) and radial depth (ae)

- $ap = 1.5D$
- $ae = 0.1D$
- Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio

IFE2000/3000 (Flat) Standard




Fig. 1






Fig. 2




ØD	Tolerance
Ø1.0~Ø8.0	0 ~ - 0.020
Ø8.5~Ø11.5	0 ~ - 0.025
Ø12.0~Ø20.0	0 ~ - 0.030

(mm)

Designation	ØD	Ød	ℓ	L	Fig.	
IFE 	2010-040	1	6	2.5	40	1
	2015-040	1.5	6	4	40	1
	2020-040	2	6	6	40	1
	2025-040	2.5	6	8	40	1
	2030-045	3	6	8	45	1
	2035-045	3.5	6	10	45	1
	2040-045	4	6	11	45	1
	2045-045	4.5	6	11	45	1
	2050-050	5	6	13	50	1
	2055-050	5.5	6	13	50	1
	2060-050	6	6	13	50	1
	2065-060	6.5	8	16	60	1
	2070-060	7	8	16	60	1
	2075-060	7.5	8	16	60	1
	2080-060	8	8	19	60	1
	2085-070	8.5	10	19	70	1
	2090-070	9	10	19	70	1
	2095-070	9.5	10	19	70	1
	2100-070	10	10	22	70	1
	2105-075	10.5	12	22	75	1
	2110-075	11	12	22	75	1
	2115-075	11.5	12	22	75	1
2120-075	12	12	26	75	1	
2130-085	13	16	26	85	1	
2140-085-S14	14	14	26	85	1	
2140-085	14	16	26	85	1	
2150-090	15	16	26	90	1	
2160-100	16	16	32	100	1	
2180-100-S18	18	18	32	100	1	
2180-100	18	20	32	100	1	
2200-105	20	20	38	105	1	
IFE 	3020-040	2	6	6	40	2
	3030-045	3	6	8	45	2
	3040-045	4	6	11	45	2
	3050-050	5	6	13	50	2
	3060-050	6	6	13	50	2
	3070-060	7	8	16	60	2
	3080-060	8	8	19	60	2
	3090-070	9	10	19	70	2
	3100-070	10	10	22	70	2
	3110-075	11	12	22	75	2
	3120-075	12	12	26	75	2
	3130-085	13	16	26	85	2
	3140-085-S14	14	14	26	85	2
	3140-085	14	16	26	85	2
	3150-090	15	16	26	90	2
	3160-100	16	16	32	100	2



IFE4000 (Flat) Standard



ØD	Tolerance
Ø1.0-Ø8.0	0 ~ - 0.020
Ø8.5-Ø11.5	0 ~ - 0.025
Ø12.0-Ø20.0	0 ~ - 0.030

(mm)

Designation	ØD	Ød	ℓ	L
IFE 4025-040	2.5	6	8	40
IFE 4030-045	3	6	8	45
IFE 4035-045	3.5	6	10	45
IFE 4040-045	4	6	11	45
IFE 4045-045	4.5	6	11	45
IFE 4050-050	5	6	13	50
IFE 4055-050	5.5	6	13	50
IFE 4060-050	6	6	13	60
IFE 4065-060	6.5	8	16	60
IFE 4070-060	7	8	16	60
IFE 4075-060	7.5	8	16	60
IFE 4080-060	8	8	19	60
IFE 4085-070	8.5	10	19	70
IFE 4090-070	9	10	19	70
IFE 4095-070	9.5	10	19	70
IFE 4100-070	10	10	22	70
IFE 4105-075	10.5	12	22	75
IFE 4110-075	11	12	22	75
IFE 4115-075	11.5	12	22	75
IFE 4120-075	12	12	26	75
IFE 4130-085	13	16	26	85
IFE 4140-085-S14	14	14	26	85
IFE 4140-085	14	16	26	85
IFE 4150-090	15	16	26	90
IFE 4160-100	16	16	32	100
IFE 4180-100-S18	18	18	32	100
IFE 4180-100	18	20	32	100
IFE 4200-105	20	20	38	105

IFE2000/4000 (Long Flat)

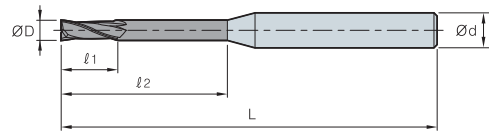


Fig. 1




Fig. 2




ØD	Tolerance
Ø1.0~Ø8.0	0 ~ - 0.020
Ø8.5~Ø11.5	0 ~ - 0.025
Ø12.0~Ø20.0	0 ~ - 0.030

(mm)

	Designation	ØD	Ød	ℓ ₁	ℓ ₂	L	Fig.
IFE 2	2030-050	3	6	12	15	50	1
	2040-050	4	6	15	20	50	1
	2050-060	5	6	20	25	60	1
	2060-060	6	6	20	-	60	1
	2080-070	8	8	25	-	70	1
	2100-090	10	10	30	-	90	1
	2120-090	12	12	30	-	90	1
	2140-110-S14	14	14	40	-	110	1
	2140-110	14	16	40	45	110	1
	2160-110	16	16	50	-	110	1
	2180-110-S18	18	18	50	-	110	1
	2180-110	18	20	50	55	110	1
	2200-110	20	20	55	-	110	1
IFE 4	4030-050	3	6	12	15	50	2
	4040-050	4	6	15	20	50	2
	4050-060	5	6	20	25	60	2
	4060-060	6	6	20	-	60	2
	4080-070	8	8	25	-	70	2
	4100-090	10	10	30	-	90	2
	4120-090	12	12	30	-	90	2
	4140-110-S14	14	14	40	-	110	2
	4140-110	14	16	40	45	110	2
	4160-110	16	16	50	-	110	2
	4180-110-S18	18	18	50	-	110	2
	4180-110	18	20	50	55	110	2
	4200-110	20	20	55	-	110	2



IFE2000-T (Taper Flat)

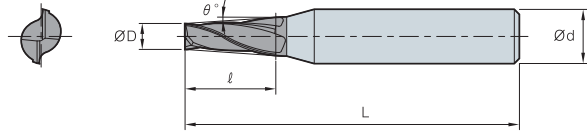


ØD	Tolerance
Ø1.0-Ø8.0	0 ~ - 0.020
Ø8.5-Ø11.5	0 ~ - 0.025
Ø12.0-Ø20.0	0 ~ - 0.030

		(mm)				
	Designation	ØD	Ød	L	ℓ	θ°
IFE	2030-045-T05	3	6	45	10	0.5°
	2030-045-T10	3	6	45	10	1°
	2030-045-T15	3	6	45	10	1.5°
	2030-045-T20	3	6	45	10	2°
	2030-045-T25	3	6	45	10	2.5°
	2030-045-T30	3	6	45	10	3°
	2040-045-T05	4	6	45	12	0.5°
	2040-045-T10	4	6	45	12	1°
	2040-045-T15	4	6	45	12	1.5°
	2040-045-T20	4	6	45	12	2°
	2040-045-T25	4	6	45	12	2.5°
	2040-045-T30	4	6	45	12	3°
	2050-050-T05	5	6	50	15	0.5°
	2050-050-T10	5	6	50	15	1°
	2050-050-T15	5	6	50	15	1.5°
	2050-050-T20	5	8	50	15	2°
	2050-050-T25	5	8	50	15	2.5°
	2050-050-T30	5	8	50	15	3°
	2060-050-T05	6	8	50	15	0.5°
	2060-050-T10	6	8	50	15	1°
	2060-050-T15	6	8	50	15	1.5°
	2060-050-T20	6	8	50	15	2°
	2060-050-T25	6	8	50	15	2.5°
	2060-050-T30	6	8	50	15	3°
	2080-060-T05	8	10	60	20	0.5°
	2080-060-T10	8	10	60	20	1°
	2080-060-T15	8	10	60	20	1.5°
	2080-060-T20	8	10	60	20	2°
	2080-060-T25	8	10	60	20	2.5°
	2080-060-T30	8	12	60	20	3°
	2100-070-T05	10	12	70	25	0.5°
	2100-070-T10	10	12	70	25	1°
	2100-070-T15	10	12	70	25	1.5°
2100-070-T20	10	12	70	25	2°	
2100-070-T25	10	14	70	25	2.5°	
2100-070-T30	10	14	70	25	3°	



IFE2000-T (Taper Flat)

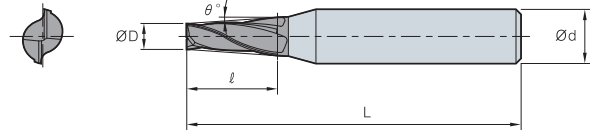



ØD	Tolerance
Ø1.0-Ø8.0	0 ~ -0.020
Ø8.5-Ø11.5	0 ~ -0.025
Ø12.0-Ø20.0	0 ~ -0.030

(mm)

Designation	ØD	Ød	L	ℓ	θ°	
IFE 2	2110-070-T05	11	12	70	25	0.5°
	2110-070-T10	11	12	70	25	1°
	2110-070-T15	11	14	70	25	1.5°
	2110-070-T20	11	14	70	25	2°
	2110-070-T25	11	14	70	25	2.5°
	2110-070-T30	11	14	70	25	3°
	2120-075-T05	12	14	75	30	0.5°
	2120-075-T10	12	14	75	30	1°
	2120-075-T15	12	14	75	30	1.5°
	2120-075-T20	12	16	75	30	2°
	2120-075-T25	12	16	75	30	2.5°
	2120-075-T30	12	16	75	30	3°
	2130-075-T05	13	14	75	30	0.5°
	2130-075-T10	13	14	75	30	1°
	2130-075-T15	13	16	75	30	1.5°
	2130-075-T20	13	16	75	30	2°
	2130-075-T25	13	16	75	30	2.5°
	2130-075-T30	13	18	75	30	3°
	2140-080-T05	14	16	80	35	0.5°
	2140-080-T10	14	16	80	35	1°
	2140-080-T15	14	16	80	35	1.5°
	2140-080-T20	14	18	80	35	2°
	2140-080-T25	14	18	80	35	2.5°
	2140-080-T30	14	18	80	35	3°
	2150-080-T05	15	18	80	35	0.5°
	2150-080-T10	15	18	80	35	1°
	2150-080-T15	15	18	80	35	1.5°
	2150-080-T20	15	18	80	35	2°
	2150-080-T25	15	20	80	35	2.5°
	2150-080-T30	15	20	80	35	3°
2160-090-T05	16	20	90	40	0.5°	
2160-090-T10	16	20	90	40	1°	
2160-090-T15	16	20	90	40	1.5°	
2160-090-T20	16	20	90	40	2°	
2160-090-T25	16	20	90	40	2.5°	
2160-090-T30	16	22	90	40	3°	



IBE2000 / 4000 (Ball) Standard

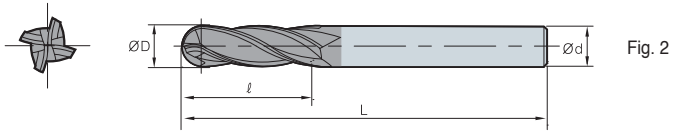
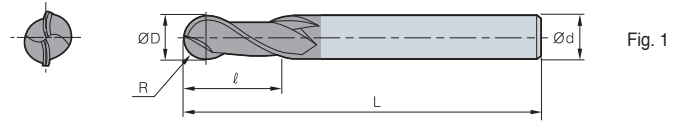


ØD	Tolerance	R Tolerance
Ø1.0~Ø8.0	0 ~ -0.020	±0.01
Ø9.0~Ø10.0	0 ~ -0.025	±0.01
Ø12.0~Ø20.0	0 ~ -0.030	±0.01

(mm)

	Designation	R	ØD	Ød	ℓ	L	Fig.
IBE	2010-050	0.5	1	6	2.5	50	1
	2015-050	0.75	1.5	6	4	50	1
	2020-050	1	2	6	5	50	1
	2025-060	1.25	2.5	6	6	60	1
	2030-060	1.5	3	6	8	60	1
	2035-070	1.75	3.5	6	8	70	1
	2040-070	2	4	6	8	70	1
	2050-080	2.5	5	6	10	80	1
	2060-090	3	6	6	12	90	1
	2070-090	3.5	7	8	14	90	1
	2080-100	4	8	8	14	100	1
	2090-100	4.5	9	10	18	100	1
	2100-100	5	10	10	18	100	1
	2120-110	6	12	12	22	110	1
	2140-110-S14	7	14	14	26	110	1
	2140-110	7	14	16	26	110	1
	2160-140	8	16	16	30	140	1
	2180-140-S18	9	18	18	34	140	1
	2180-140	9	18	20	34	140	1
	2200-160	10	20	20	38	160	1
IBE	4030-060	1.5	3	6	8	60	2
	4040-070	2	4	6	8	70	2
	4050-080	2.5	5	6	10	80	2
	4060-090	3	6	6	12	90	2
	4070-090	3.5	7	8	14	90	2
	4080-100	4	8	8	14	100	2
	4100-100	5	10	10	18	100	2
	4120-110	6	12	12	22	110	2
	4160-140	8	16	16	30	140	2
	4200-160	10	20	20	38	160	2

IBE2000 (Long Ball)

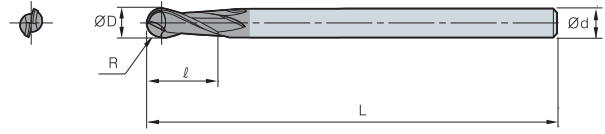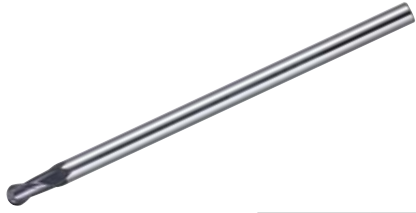


ØD	Tolerance	R Tolerance
Ø1.0~Ø8.0	0 ~ - 0.020	±0.01
Ø9.0~Ø10.0	0 ~ - 0.025	±0.01
Ø12.0~Ø20.0	0 ~ - 0.030	±0.01

(mm)

Designation	R	ØD	Ød	ℓ	L
IBE 2030-100	1.5	3	6	7	100
2040-100	2	4	6	9	100
2060-115	3	6	6	12	115
2080-140	4	8	8	16	140
2100-180	5	10	10	20	180
2120-200	6	12	12	23	200
2160-250	8	16	16	30	250
2200-250	10	20	20	38	250

IBE2000-T (Taper Ball)

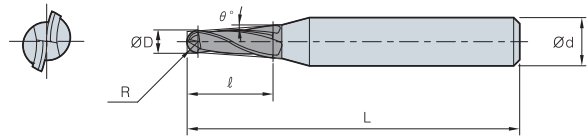


ØD	Tolerance	R Tolerance
Ø1.0~Ø8.0	0 ~ - 0.020	±0.01
Ø9.0~Ø10.0	0 ~ - 0.025	±0.01
Ø12.0~Ø20.0	0 ~ - 0.030	±0.01

(mm)

Designation	R	ØD	Ød	ℓ	L	θ°
IBE 2030-045-T05	1.5	3	6	10	45	0.5°
2030-045-T10	1.5	3	6	10	45	1°
2030-045-T15	1.5	3	6	10	45	1.5°
2030-045-T20	1.5	3	6	10	45	2°
2030-045-T25	1.5	3	6	10	45	2.5°
2030-045-T30	1.5	3	6	10	45	3°
2040-045-T05	2	4	6	12	45	0.5°
2040-045-T10	2	4	6	12	45	1°
2040-045-T15	2	4	6	12	45	1.5°
2040-045-T20	2	4	6	12	45	2°
2040-045-T25	2	4	6	12	45	2.5°
2040-045-T30	2	4	6	12	45	3°
2050-050-T05	2.5	5	6	15	50	0.5°
2050-050-T10	2.5	5	6	15	50	1°
2050-050-T15	2.5	5	6	15	50	1.5°
2050-050-T20	2.5	5	6	15	50	2°
2050-050-T25	2.5	5	8	15	50	2.5°
2050-050-T30	2.5	5	8	15	50	3°
2060-050-T05	3	6	8	15	50	0.5°
2060-050-T10	3	6	8	15	50	1°
2060-050-T15	3	6	8	15	50	1.5°
2060-050-T20	3	6	8	15	50	2°
2060-050-T25	3	6	8	15	50	2.5°



IBE2000-T (Taper Ball)

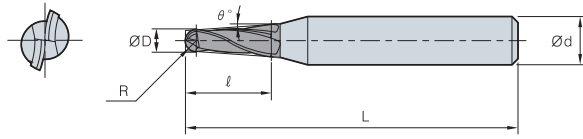


ØD	Tolerance	R Tolerance
Ø1.0~Ø8.0	0 ~ - 0.020	±0.01
Ø9.0~Ø10.0	0 ~ - 0.025	±0.01
Ø12.0~Ø20.0	0 ~ - 0.030	±0.01

Designation		R	ØD	Ød	ℓ	L	θ°
IBE	2060-050-T30	3	6	8	15	50	3°
	2080-060-T05	4	8	10	20	60	0.5°
	2080-060-T10	4	8	10	20	60	1°
	2080-060-T15	4	8	10	20	60	1.5°
	2080-060-T20	4	8	10	20	60	2°
	2080-060-T25	4	8	10	20	60	2.5°
	2080-060-T30	4	8	10	20	60	3°
	2100-070-T05	5	10	12	25	70	0.5°
	2100-070-T10	5	10	12	25	70	1°
	2100-070-T15	5	10	12	25	70	1.5°
	2100-070-T20	5	10	12	25	70	2°
	2100-070-T25	5	10	12	25	70	2.5°
	2100-070-T30	5	10	14	25	70	3°
	2110-070-T05	5.5	11	12	25	70	0.5°
	2110-070-T10	5.5	11	12	25	70	1°
	2110-070-T15	5.5	11	14	25	70	1.5°
	2110-070-T20	5.5	11	14	25	70	2°
	2110-070-T25	5.5	11	14	25	70	2.5°
	2110-070-T30	5.5	11	14	25	70	3°
	2120-075-T05	6	12	14	30	75	0.5°
	2120-075-T10	6	12	14	30	75	1°
	2120-075-T15	6	12	14	30	75	1.5°
	2120-075-T20	6	12	14	30	75	2°
	2120-075-T25	6	12	16	30	75	2.5°
	2120-075-T30	6	12	16	30	75	3°
	2130-075-T05	6.5	13	14	30	75	0.5°
	2130-075-T10	6.5	13	14	30	75	1°
	2130-075-T15	6.5	13	16	30	75	1.5°
	2130-075-T20	6.5	13	16	30	75	2°
	2130-075-T25	6.5	13	16	30	75	2.5°
	2130-075-T30	6.5	13	16	30	75	3°
	2140-080-T05	7	14	16	35	80	0.5°
	2140-080-T10	7	14	16	35	80	1°
	2140-080-T15	7	14	16	35	80	1.5°
	2140-080-T20	7	14	18	35	80	2°
	2140-080-T25	7	14	18	35	80	2.5°
	2140-080-T30	7	14	18	35	80	3°
	2150-080-T05	7.5	15	18	35	80	0.5°
	2150-080-T10	7.5	15	18	35	80	1°
	2150-080-T15	7.5	15	18	35	80	1.5°
	2150-080-T20	7.5	15	18	35	80	2°
	2150-080-T25	7.5	15	20	35	80	2.5°
	2150-080-T30	7.5	15	20	35	80	3°
	2160-090-T05	8	16	20	40	90	0.5°
	2160-090-T10	8	16	20	40	90	1°
	2160-090-T15	8	16	20	40	90	1.5°
	2160-090-T20	8	16	20	40	90	2°
	2160-090-T25	8	16	20	40	90	2.5°
	2160-090-T30	8	16	20	40	90	3°



IRE2000 (Radius)




ØD	Tolerance
Ø1.0-Ø8.0	0 ~ -0.020
Ø8.5-Ø10.5	0 ~ -0.025
Ø12.0-Ø20.0	0 ~ -0.030

(mm)

Designation	ØD	Ød	ℓ ₁	ℓ ₂	L	r
IRE 2030-050-R03	3	6	12	14	50	0.3
2040-050-R03	4	6	15	16	50	0.3
2040-050-R05	4	6	15	16	50	0.5
2050-060-R03	5	6	15	16	60	0.3
2050-060-R05	5	6	15	16	60	0.5
2060-060-R03	6	6	20	-	60	0.3
2060-060-R05	6	6	20	-	60	0.5
2060-060-R10	6	6	20	-	60	1
2080-070-R03	8	8	25	-	70	0.3
2080-070-R05	8	8	25	-	70	0.5
2080-070-R10	8	8	25	-	70	1
2080-070-R15	8	8	25	-	70	1.5
2080-070-R20	8	8	25	-	70	2
2100-090-R03	10	10	30	-	90	0.3
2100-090-R05	10	10	30	-	90	0.5
2100-090-R10	10	10	30	-	90	1
2100-090-R15	10	10	30	-	90	1.5
2100-090-R20	10	10	30	-	90	2
2120-090-R05	12	12	30	-	90	0.5
2120-090-R10	12	12	30	-	90	1
2120-090-R15	12	12	30	-	90	1.5
2120-090-R20	12	12	30	-	90	2
2160-110-R05	16	16	50	-	110	0.5
2160-110-R10	16	16	50	-	110	1
2160-110-R15	16	16	50	-	110	1.5
2160-110-R20	16	16	50	-	110	2
2200-110-R05	20	20	55	-	110	0.5
2200-110-R10	20	20	55	-	110	1
2200-110-R15	20	20	55	-	110	1.5
2200-110-R20	20	20	55	-	110	2





IRE4000 (Radius)

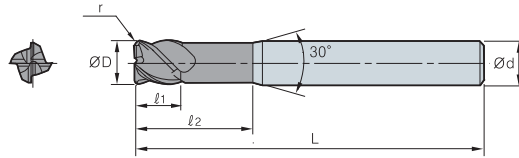

ØD	Tolerance
Ø1.0-Ø8.0	0 ~ - 0.020
Ø8.5-Ø10.5	0 ~ - 0.025
Ø12.0-Ø20.0	0 ~ - 0.030

Designation		ØD	Ød	ℓ ₁	ℓ ₂	L	r
IRE	4030-050-R03	3	6	12	14	50	0.3
	4040-050-R03	4	6	15	16	50	0.3
	4040-050-R05	4	6	15	16	50	0.5
	4050-060-R03	5	6	15	16	60	0.3
	4050-060-R05	5	6	15	16	60	0.5
	4060-060-R03	6	6	20	-	60	0.3
	4060-060-R05	6	6	20	-	60	0.5
	4060-060-R10	6	6	20	-	60	1
	4080-070-R03	8	8	25	-	70	0.3
	4080-070-R05	8	8	25	-	70	0.5
	4080-070-R10	8	8	25	-	70	1
	4080-070-R15	8	8	25	-	70	1.5
	4080-070-R20	8	8	25	-	70	2
	4100-090-R03	10	10	30	-	90	0.3
	4100-090-R05	10	10	30	-	90	0.5
	4100-090-R10	10	10	30	-	90	1
	4100-090-R15	10	10	30	-	90	1.5
	4100-090-R20	10	10	30	-	90	2
	4120-090-R05	12	12	30	-	90	0.5
	4120-090-R10	12	12	30	-	90	1
	4120-090-R15	12	12	30	-	90	1.5
	4120-090-R20	12	12	30	-	90	2
	4160-110-R05	16	16	50	-	110	0.5
	4160-110-R10	16	16	50	-	110	1
4160-110-R15	16	16	50	-	110	1.5	
4160-110-R20	16	16	50	-	110	2	
4200-110-R05	20	20	55	-	110	0.5	
4200-110-R10	20	20	55	-	110	1	
4200-110-R15	20	20	55	-	110	1.5	
4200-110-R20	20	20	55	-	110	2	

FE2000/3000 (Flat) Standard




ØD	Tolerance
Ø1.0~Ø8.0	0 ~ - 0.020
Ø8.5~Ø11.5	0 ~ - 0.025
Ø12.0~Ø20.0	0 ~ - 0.030

(mm)

Designation	ØD	Ød	ℓ	L	Fig.	
FE	2010-040	1	6	2.5	40	1
	2015-040	1.5	6	4	40	1
	2020-040	2	6	6	40	1
	2025-040	2.5	6	8	40	1
	2030-045	3	6	8	45	1
	2035-045	3.5	6	10	45	1
	2040-045	4	6	11	45	1
	2045-045	4.5	6	11	45	1
	2050-050	5	6	13	50	1
	2055-050	5.5	6	13	50	1
	2060-050	6	6	13	50	1
	2065-060	6.5	8	16	60	1
	2070-060	7	8	16	60	1
	2075-060	7.5	8	16	60	1
	2080-060	8	8	19	60	1
	2085-070	8.5	10	19	70	1
	2090-070	9	10	19	70	1
	2095-070	9.5	10	19	70	1
	2100-070	10	10	22	70	1
	2105-075	10.5	12	22	75	1
	2110-075	11	12	22	75	1
	2115-075	11.5	12	22	75	1
	2120-075	12	12	26	75	1
	2130-085	13	16	26	85	1
	2140-085-S14	14	14	26	85	1
	2140-085	14	16	26	85	1
2150-090	15	16	26	90	1	
2160-100	16	16	32	100	1	
2180-100-S18	18	18	32	100	1	
2180-100	18	20	32	100	1	
2200-105	20	20	38	105	1	
FE	3020-040	2	6	6	40	2
	3030-045	3	6	8	45	2
	3040-045	4	6	11	45	2
	3050-050	5	6	13	50	2
	3060-050	6	6	13	50	2
	3070-060	7	8	16	60	2
	3080-060	8	8	19	60	2
	3090-070	9	10	19	70	2
	3100-070	10	10	22	70	2
	3110-075	11	12	22	75	2
	3120-075	12	12	26	75	2
	3130-085	13	16	26	85	2
	3140-085-S14	14	14	26	85	2
	3140-085	14	16	26	85	2
	3150-090	15	16	26	90	2
	3160-100	16	16	32	100	2



FE 4000 (Flat) Standard





ØD	Tolerance
Ø1.0-Ø8.0	0 ~ - 0.020
Ø8.5-Ø11.5	0 ~ - 0.025
Ø12.0-Ø20.0	0 ~ - 0.030

Designation		ØD	Ød	ℓ	L
FE	4025-040	2.5	6	8	40
	4030-045	3	6	8	45
	4035-045	3.5	6	10	45
	4040-045	4	6	11	45
	4045-045	4.5	6	11	45
	4050-050	5	6	13	50
	4055-050	5.5	6	13	50
	4060-050	6	6	13	50
	4065-060	6.5	8	16	60
	4070-060	7	8	16	60
	4075-060	7.5	8	16	60
	4080-060	8	8	19	60
	4085-070	8.5	10	19	70
	4090-070	9	10	19	70
	4095-070	9.5	10	19	70
	4100-070	10	10	22	70
	4105-075	10.5	12	22	75
	4110-075	11	12	22	75
	4115-075	11.5	12	22	75
	4120-075	12	12	26	75
4130-085	13	16	26	85	
4140-085-S14	14	14	26	85	
4140-085	14	16	26	85	
4150-090	15	16	26	90	
4160-100	16	16	32	100	
4180-100-S18	18	18	32	100	
4180-100	18	20	32	100	
4200-105	20	20	38	105	

(mm)



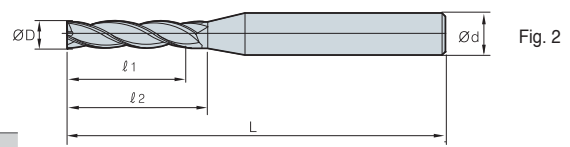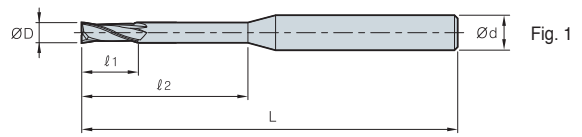

FE2000/4000 (Long Flat)




ØD	Tolerance
Ø1.0~Ø8.0	0 ~ - 0.020
Ø8.5~Ø11.5	0 ~ - 0.025
Ø12.0~Ø20.0	0 ~ - 0.030

(mm)

	Designation	ØD	Ød	l ₁	l ₂	L	Fig.
FE 	2030-050	3	6	12	15	50	1
	2040-050	4	6	15	20	50	1
	2050-060	5	6	20	25	60	1
	2060-060	6	6	20	-	60	1
	2080-070	8	8	25	-	70	1
	2100-090	10	10	30	-	90	1
	2120-090	12	12	30	-	90	1
	2140-110-S14	14	14	40	-	110	1
	2140-110	14	16	40	45	110	1
	2160-110	16	16	50	-	110	1
	2180-110-S18	18	18	50	-	110	1
	2180-110	18	20	50	55	110	1
	2200-110	20	20	55	-	110	1
FE 	4030-050	3	6	12	15	50	2
	4040-050	4	6	15	20	50	2
	4050-060	5	6	20	25	60	2
	4060-060	6	6	20	-	60	2
	4080-070	8	8	25	-	70	2
	4100-090	10	10	30	-	90	2
	4120-090	12	12	30	-	90	2
	4140-110-S14	14	14	40	-	110	2
	4140-110	14	16	40	45	110	2
	4160-110	16	16	50	-	110	2
	4180-110-S18	18	18	50	-	110	2
	4180-110	18	20	50	55	110	2
	4200-110	20	20	55	-	110	2



FE2000-T (Taper Flat)

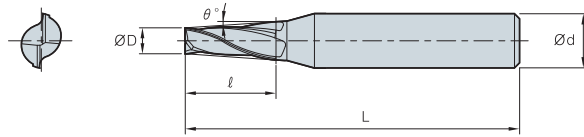


ØD	Tolerance
Ø1.0-Ø8.0	0 ~ - 0.020
Ø8.5-Ø11.5	0 ~ - 0.025
Ø12.0-Ø20.0	0 ~ - 0.030

		(mm)				
	Designation	ØD	Ød	l	L	θ°
FE	2030-045-T05	3	6	10	45	0.5°
	2030-045-T10	3	6	10	45	1°
	2030-045-T15	3	6	10	45	1.5°
	2030-045-T20	3	6	10	45	2°
	2030-045-T25	3	6	10	45	2.5°
	2030-045-T30	3	6	10	45	3°
	2040-045-T05	4	6	12	45	0.5°
	2040-045-T10	4	6	12	45	1°
	2040-045-T15	4	6	12	45	1.5°
	2040-045-T20	4	6	12	45	2°
	2040-045-T25	4	6	12	45	2.5°
	2040-045-T30	4	6	12	45	3°
	2050-050-T05	5	6	15	50	0.5°
	2050-050-T10	5	6	15	50	1°
	2050-050-T15	5	6	15	50	1.5°
	2050-050-T20	5	8	15	50	2°
	2050-050-T25	5	8	15	50	2.5°
	2050-050-T30	5	8	15	50	3°
	2060-050-T05	6	8	15	50	0.5°
	2060-050-T10	6	8	15	50	1°
	2060-050-T15	6	8	15	50	1.5°
	2060-050-T20	6	8	15	50	2°
	2060-050-T25	6	8	15	50	2.5°
	2060-050-T30	6	8	15	50	3°
	2080-060-T05	8	10	20	60	0.5°
	2080-060-T10	8	10	20	60	1°
	2080-060-T15	8	10	20	60	1.5°
	2080-060-T20	8	10	20	60	2°
	2080-060-T25	8	10	20	60	2.5°
	2080-060-T30	8	12	20	60	3°
	2100-070-T05	10	12	25	70	0.5°
	2100-070-T10	10	12	25	70	1°
	2100-070-T15	10	12	25	70	1.5°
2100-070-T20	10	12	25	70	2°	
2100-070-T25	10	14	25	70	2.5°	
2100-070-T30	10	14	25	70	3°	



FE2000-T (Taper Flat)

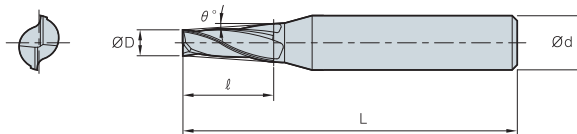



ØD	Tolerance
Ø1.0-Ø8.0	0 ~ -0.020
Ø8.5-Ø11.5	0 ~ -0.025
Ø12.0-Ø20.0	0 ~ -0.030

(mm)

Designation	ØD	Ød	l	L	θ°
FE 2110-070-T05	11	12	25	70	0.5°
2110-070-T10	11	12	25	70	1°
2110-070-T15	11	14	25	70	1.5°
2110-070-T20	11	14	25	70	2°
2110-070-T25	11	14	25	70	2.5°
2110-070-T30	11	14	25	70	3°
2120-075-T05	12	14	30	75	0.5°
2120-075-T10	12	14	30	75	1°
2120-075-T15	12	14	30	75	1.5°
2120-075-T20	12	16	30	75	2°
2120-075-T25	12	16	30	75	2.5°
2120-075-T30	12	16	30	75	3°
2130-075-T05	13	14	30	75	0.5°
2130-075-T10	13	14	30	75	1°
2130-075-T15	13	16	30	75	1.5°
2130-075-T20	13	16	30	75	2°
2130-075-T25	13	16	30	75	2.5°
2130-075-T30	13	18	30	75	3°
2140-080-T05	14	16	35	80	0.5°
2140-080-T10	14	16	35	80	1°
2140-080-T15	14	16	35	80	1.5°
2140-080-T20	14	18	35	80	2°
2140-080-T25	14	18	35	80	2.5°
2140-080-T30	14	18	35	80	3°
2150-080-T05	15	18	35	80	0.5°
2150-080-T10	15	18	35	80	1°
2150-080-T15	15	18	35	80	1.5°
2150-080-T20	15	18	35	80	2°
2150-080-T25	15	20	35	80	2.5°
2150-080-T30	15	20	35	80	3°
2160-090-T05	16	20	40	90	0.5°
2160-090-T10	16	20	40	90	1°
2160-090-T15	16	20	40	90	1.5°
2160-090-T20	16	20	40	90	2°
2160-090-T25	16	20	40	90	2.5°
2160-090-T30	16	22	40	90	3°



BE2000/4000 (Ball)

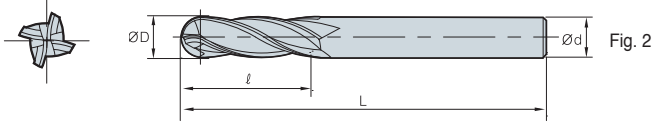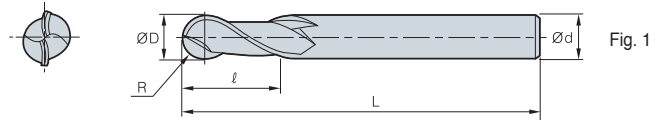


ØD	Tolerance	R Tolerance
Ø1.0~Ø8.0	0 ~ - 0.020	±0.01
Ø9.0~Ø10.0	0 ~ - 0.025	±0.01
Ø12.0~Ø20.0	0 ~ - 0.030	±0.01

(mm)

Designation	R	ØD	Ød	ℓ	L	Fig.
BE 2010-050	0.5	1	6	2.5	50	1
2015-050	0.75	1.5	6	4	50	1
2020-050	1	2	6	5	50	1
2025-060	1.25	2.5	6	6	60	1
2030-060	1.5	3	6	8	60	1
2035-070	1.75	3.5	6	8	70	1
2040-070	2	4	6	8	70	1
2050-080	2.5	5	6	10	80	1
2060-090	3	6	6	12	90	1
2070-090	3.5	7	8	14	90	1
2080-100	4	8	8	14	100	1
2090-100	4.5	9	10	18	100	1
2100-100	5	10	10	18	100	1
2120-110	6	12	12	22	110	1
2140-110-S14	7	14	14	26	110	1
2140-110	7	14	16	26	110	1
2160-140	8	16	16	30	140	1
2180-140-S18	9	18	18	34	140	1
2180-140	9	18	20	34	140	1
2200-160	10	20	20	38	160	1
BE 4030-060	1.5	3	6	8	60	2
4040-070	2	4	6	8	70	2
4050-080	2.5	5	6	10	80	2
4060-090	3	6	6	12	90	2
4070-090	3.5	7	8	14	90	2
4080-100	4	8	8	14	100	2
4100-100	5	10	10	18	100	2
4120-110	6	12	12	22	110	2
4160-140	8	16	16	30	140	2
4200-160	10	20	20	38	160	2

BE2000 (Long Ball)

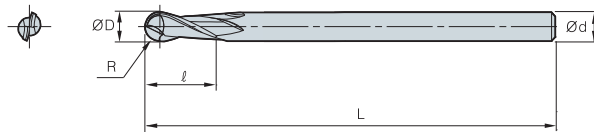


ØD	Tolerance	R Tolerance
Ø1.0-Ø8.0	0 ~ - 0.020	±0.01
Ø9.0-Ø10.0	0 ~ - 0.025	±0.01
Ø12.0-Ø20.0	0 ~ - 0.030	±0.01

(mm)

Designation	R	ØD	Ød	ℓ	L
BE 2030-100	1.5	3	3	7	100
2040-100	2	4	4	9	100
2060-115	3	6	6	12	115
2080-140	4	8	8	16	140
2100-180	5	10	10	20	180
2120-200	6	12	12	23	200
2160-250	8	16	16	30	250
2200-250	10	20	20	38	250

BE2000-T (Taper Ball)

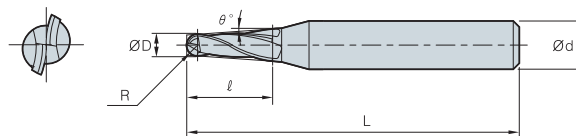


ØD	Tolerance	R Tolerance
Ø1.0-Ø8.0	0 ~ - 0.020	±0.01
Ø9.0-Ø10.0	0 ~ - 0.025	±0.01
Ø12.0-Ø20.0	0 ~ - 0.030	±0.01

(mm)

Designation	R	ØD	Ød	ℓ	L	θ°
BE 2030-045-T05	1.5	3	6	10	45	0.5°
2030-045-T10	1.5	3	6	10	45	1°
2030-045-T15	1.5	3	6	10	45	1.5°
2030-045-T20	1.5	3	6	10	45	2°
2030-045-T25	1.5	3	6	10	45	2.5°
2030-045-T30	1.5	3	6	10	45	3°
2040-045-T05	2	4	6	12	45	0.5°
2040-045-T10	2	4	6	12	45	1°
2040-045-T15	2	4	6	12	45	1.5°
2040-045-T20	2	4	6	12	45	2°
2040-045-T25	2	4	6	12	45	2.5°
2040-045-T30	2	4	6	12	45	3°
2050-050-T05	2.5	5	6	15	50	0.5°
2050-050-T10	2.5	5	6	15	50	1°
2050-050-T15	2.5	5	6	15	50	1.5°
2050-050-T20	2.5	5	6	15	50	2°
2050-050-T25	2.5	5	8	15	50	2.5°
2050-050-T30	2.5	5	8	15	50	3°
2060-050-T05	3	6	8	15	50	0.5°
2060-050-T10	3	6	8	15	50	1°
2060-050-T15	3	6	8	15	50	1.5°
2060-050-T20	3	6	8	15	50	2°
2060-050-T25	3	6	8	15	50	2.5°
2060-050-T30	3	6	8	15	50	3°



BE2000-T (Taper Ball)

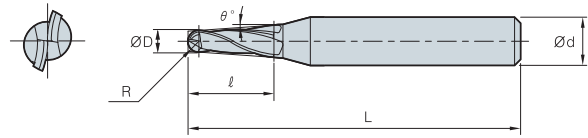

ØD	Tolerance	R Tolerance
Ø1.0~Ø8.0	0 ~ - 0.020	±0.01
Ø9.0~Ø10.0	0 ~ - 0.025	±0.01
Ø12.0~Ø20.0	0 ~ - 0.030	±0.01

(mm)

Designation	R	ØD	Ød	ℓ	L	θ°
BE 2080-060-T05	4	8	10	20	60	0.5°
2080-060-T10	4	8	10	20	60	1°
2080-060-T15	4	8	10	20	60	1.5°
2080-060-T20	4	8	10	20	60	2°
2080-060-T25	4	8	10	20	60	2.5°
2080-060-T30	4	8	10	20	60	3°
2100-070-T05	5	10	12	25	70	0.5°
2100-070-T10	5	10	12	25	70	1°
2100-070-T15	5	10	12	25	70	1.5°
2100-070-T20	5	10	12	25	70	2°
2100-070-T25	5	10	12	25	70	2.5°
2100-070-T30	5	10	14	25	70	3°
2110-070-T05	5.5	11	12	25	70	0.5°
2110-070-T10	5.5	11	12	25	70	1°
2110-070-T15	5.5	11	14	25	70	1.5°
2110-070-T20	5.5	11	14	25	70	2°
2110-070-T25	5.5	11	14	25	70	2.5°
2110-070-T30	5.5	11	14	25	70	3°
2120-075-T05	6	12	14	30	75	0.5°
2120-075-T10	6	12	14	30	75	1°
2120-075-T15	6	12	14	30	75	1.5°
2120-075-T20	6	12	14	30	75	2°
2120-075-T25	6	12	16	30	75	2.5°
2120-075-T30	6	12	16	30	75	3°
2130-075-T05	6.5	13	14	30	75	0.5°
2130-075-T10	6.5	13	14	30	75	1°
2130-075-T15	6.5	13	16	30	75	1.5°
2130-075-T20	6.5	13	16	30	75	2°
2130-075-T25	6.5	13	16	30	75	2.5°
2130-075-T30	6.5	13	16	30	75	3°
2140-080-T05	7	14	16	35	80	0.5°
2140-080-T10	7	14	16	35	80	1°
2140-080-T15	7	14	16	35	80	1.5°
2140-080-T20	7	14	18	35	80	2°
2140-080-T25	7	14	18	35	80	2.5°
2140-080-T30	7	14	18	35	80	3°
2150-080-T05	7.5	15	18	35	80	0.5°
2150-080-T10	7.5	15	18	35	80	1°
2150-080-T15	7.5	15	18	35	80	1.5°
2150-080-T20	7.5	15	18	35	80	2°
2150-080-T25	7.5	15	20	35	80	2.5°
2150-080-T30	7.5	15	20	35	80	3°
2160-090-T05	8	16	20	40	90	0.5°
2160-090-T10	8	16	20	40	90	1°
2160-090-T15	8	16	20	40	90	1.5°
2160-090-T20	8	16	20	40	90	2°
2160-090-T25	8	16	20	40	90	2.5°
2160-090-T30	8	16	20	40	90	3°



F Technical Information for Z Endmill

Endmill series for general cutting

Z Endmill

- Endmill for general cutting of various workpieces under HRC45 (carbon steel, alloy steel, cast iron, pre hardened steel, etc.)
- New shape and coating improves performance and tool life
- Optimized blade design for less chipping and stable machining



▶ Features



before





After special edge treatment

Improved stability

- **New grade(PC315E)**
 - Fine substrate and lubricative coating guarantee excellent performance at high speed and high temperature.
- **Special edge treatment**
 - Special cutting edge design was applied for less chipping and longer tool life
- **High accuracy with tolerance-h5**
 - High quality production system enables tolerance-h5 throughout the whole series.


▶ ZFE Series (Flat)



$\alpha_1 \neq \alpha_2, \beta_1 \neq \beta_2$ Irregular indexing & helix

- Irregular indexing & helix prevent chattering and improve surface


▶ ZBE Series (Ball)



Cutting load is dispersed

S shape of ball



- The S shape of ball disperses cutting loads
- The tolerance of ball R is under $\pm 0.005\text{mm}$

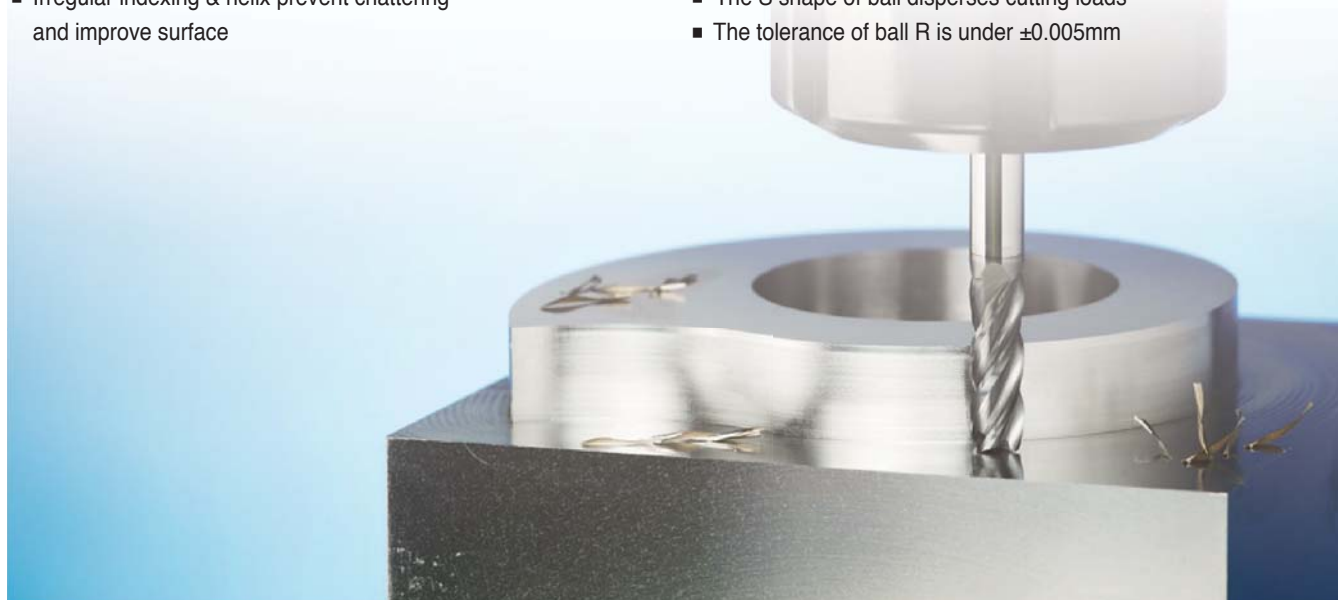

▶ Cutting performance

Carbon steel [1045(AISI) / C45(DIN) / S45C(JIS), HRC20]

- **Cutting conditions**
 - Diameter = Ø8.0
 - $n(\text{min}^{-1}) = 7,165$
 - $vc(\text{m}/\text{min}) = 180$
 - $vf(\text{mm}/\text{min}) = 1,433$
 - $fz(\text{mm}/\text{t}) = 0.05$
 - $ap(\text{mm}) = 8$
 - $ae(\text{mm}) = 0.8$
 - dry

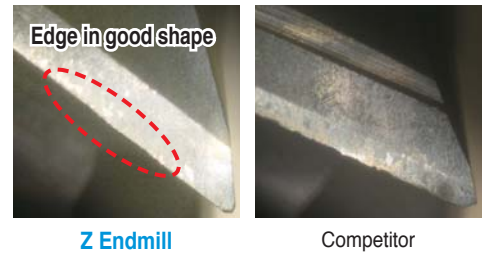
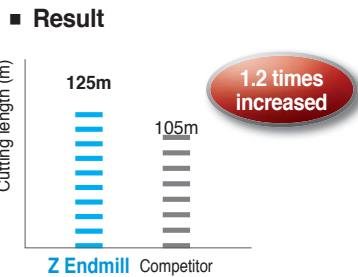


- **Tools** ZFE4080-070

- Cutting edge treatment for less chipping

Carbon steel [1045(AISI) / C45(DIN) / S45C(JIS), HRC20]

- **Cutting conditions**
 - Diameter = Ø8.0
 - $n(\text{min}^{-1}) = 5,175$
 - $vc(\text{m}/\text{min}) = 130$
 - $vf(\text{mm}/\text{min}) = 1,035$
 - $fz(\text{mm}/\text{t}) = 0.1$
 - $ap(\text{mm}) = 0.5$
 - $ae(\text{mm}) = 1.6$
 - dry

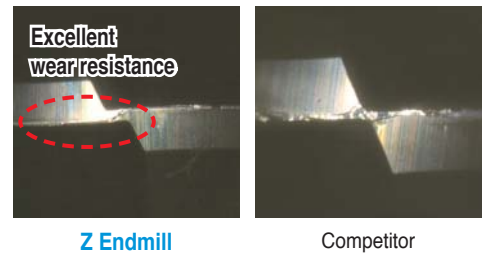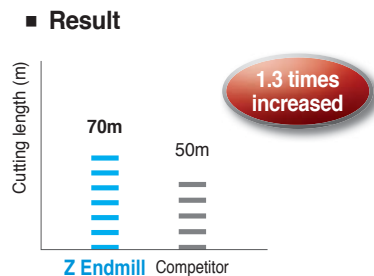


- **Tools** ZBE2080-100

- New grade improves wear resistance

▶ Recommended cutting conditions (ZFE2000 / ZSFE2000 Flat)

Workpiece Condition Diameter(Ø)	Alloy steel and carbon steel (under HRC30)		Pre hardened steel (HRC30~45)		Stainless steel	
	R.P.M $n(\text{min}^{-1})$	Feed $vf(\text{mm}/\text{min})$	R.P.M $n(\text{min}^{-1})$	Feed $vf(\text{mm}/\text{min})$	R.P.M $n(\text{min}^{-1})$	Feed $vf(\text{mm}/\text{min})$
1	19,745	175	13,057	100	10,500	70
2	11,560	190	7,560	120	6,300	90
3	8,920	210	5,560	140	4,620	120
4	7,560	300	4,620	180	3,880	150
5	6,300	320	3,780	190	3,160	160
6	5,560	350	3,360	220	2,840	180
8	4,200	380	2,520	200	2,100	180
10	3,260	330	2,000	160	1,680	160
12	2,740	280	1,680	130	1,360	130
16	2,200	220	1,360	110	1,060	110

● Application tip




■ Slotting depth(ap)

- $\text{Ø}3 \geq D$ ($ap 0.2D$)
- $D > \text{Ø}3$ ($ap 0.5D$)
- Workpiece should be clamped rigidly. In case of vibration, reduce R.P.M and feed rate by the same ratio

▶ Recommended cutting conditions (ZFE4000 / ZSFE4000 Flat)

Workpiece Condition Diameter(Ø)	Alloy steel and carbon steel (under HRC30)		Pre hardened steel (HRC30~45)		Stainless steel	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
2	11,560	280	7,560	170	6,300	140
3	8,920	320	5,560	200	4,620	170
4	7,560	570	4,620	350	3,880	280
5	6,300	600	3,780	360	3,160	300
6	5,560	660	3,360	410	2,840	330
8	4,200	710	2,520	380	2,100	350
10	3,260	610	2,000	300	1,680	300
12	2,740	520	1,680	250	1,360	240
16	2,200	410	1,360	200	1,100	200

● Application tip




■ Shouldering depth(ap) and radial depth(ae)

- $a_p = 1.0D$
- $a_e = 0.05D$
- Workpiece should be clamped rigidly. In case of vibration, reduce R.P.M and feed rate by the same ratio

▶ Recommended cutting conditions (ZBE2000 Ball)

Workpiece Condition Diameter(Ø)	Alloy steel and carbon steel (under HRC30)		Pre hardened steel (HRC30~45)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
1	30,000	2,880	30,000	2,520
1.2	30,000	3,060	28,800	2,580
1.5	30,000	3,240	28,800	2,700
2	29,820	3,420	28,680	2,880
3	19,860	3,600	19,080	3,180
4	14,940	3,600	14,340	3,180
5	11,160	3,480	10,680	2,940
6	8,340	2,910	8,040	2,460
8	6,660	2,520	6,420	2,100
10	5,580	2,220	5,340	1,860
12	4,170	1,770	4,008	1,500


● Application tip



- $a_p = 0.03D$
- $p_f = 0.05D$
- Workpiece should be clamped rigidly. In case of vibration, reduce R.P.M and feed rate by the same ratio

▶ Cutting condition by overhang

- Cutting conditions of the shank taper type in case of being clamped at neck.
 - When the overhang is increased by 1D, decrease R.P.M and feed 10%.
- In case of the straight type adjust conditions according to the overhang.
 - Ex) When the overhang is 3D and is increased by 1D, decrease R.P.M and feed 10%.




▶ Notice

- Cutting conditions are up to the machine's condition and the shape of cutting.
- Use cutting fluid that is proper to the workpiece and produces few temperature reaction.



ZFE2000 (Flat)

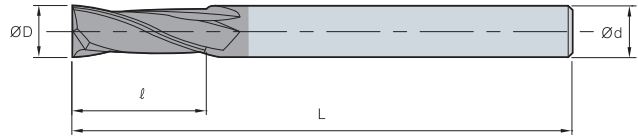


ØD	Tolerance
~ Ø5.9	0.00 ~ -0.015
Ø6.0 ~	0.00 ~ -0.025



(mm)

Designation	ØD	Ød	ℓ	L
ZFE				
ZFE2010-050-S4	1	4	2.5	50
ZFE2010-050-S6	1	6	2.5	50
ZFE2012-050-S4	1.2	4	3	50
ZFE2012-050-S6	1.2	6	3	50
ZFE2015-050-S4	1.5	4	4	50
ZFE2015-050-S6	1.5	6	4	50
ZFE2020-050-S4	2	4	6	50
ZFE2020-050-S6	2	6	6	50
ZFE2025-050-S4	2.5	4	7.5	50
ZFE2025-050-S6	2.5	6	7.5	50
ZFE2030-050-S4	3	4	9	50
ZFE2030-050-S6	3	6	9	50
ZFE2035-050	3.5	6	10	50
ZFE2040-050-S4	4	4	11	50
ZFE2040-050-S6	4	6	11	50
ZFE2045-050	4.5	6	14	50
ZFE2050-060	5	6	15	60
ZFE2055-060	5.5	6	15	60
ZFE2060-060	6	6	15	60
ZFE2065-060	6.5	8	18	60
ZFE2070-060	7	8	20	60
ZFE2075-060	7.5	8	20	60
ZFE2080-070	8	8	20	70
ZFE2085-070	8.5	10	22	70
ZFE2090-070	9	10	22	70
ZFE2095-070	9.5	10	24	70
ZFE2100-075	10	10	25	75
ZFE2120-080	12	12	30	80
ZFE2140-100	14	14	35	100
ZFE2160-100	16	16	40	100

ZFE 4000 (Flat)

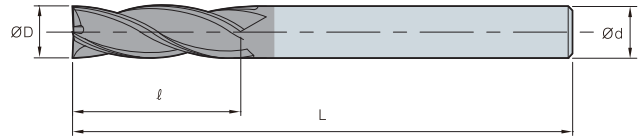

ØD	Tolerance
~ Ø5.9	0.00 ~ -0.015
Ø6.0 ~	0.00 ~ -0.025




(mm)


Designation		ØD	Ød	ℓ	L
ZFE	ZFE4010-050-S4	1	4	2.5	50
	ZFE4010-050-S6	1	6	2.5	50
	ZFE4012-050-S4	1.2	4	3	50
	ZFE4012-050-S6	1.2	6	3	50
	ZFE4015-050-S4	1.5	4	4	50
	ZFE4015-050-S6	1.5	6	4	50
	ZFE4020-050-S4	2	4	6	50
	ZFE4020-050-S6	2	6	6	50
	ZFE4025-050-S4	2.5	4	7.5	50
	ZFE4025-050-S6	2.5	6	7.5	50
	ZFE4030-050-S4	3	4	9	50
	ZFE4030-050-S6	3	6	9	50
	ZFE4035-050	3.5	6	10	50
	ZFE4040-050-S4	4	4	11	50
	ZFE4040-050-S6	4	6	11	50
	ZFE4045-050	4.5	6	14	50
	ZFE4050-060	5	6	15	60
	ZFE4055-060	5.5	6	15	60
	ZFE4060-060	6	6	15	60
	ZFE4065-060	6.5	8	18	60
	ZFE4070-060	7	8	20	60
	ZFE4075-060	7.5	8	20	60
	ZFE4080-070	8	8	20	70
	ZFE4085-070	8.5	10	22	70
	ZFE4090-070	9	10	22	70
	ZFE4095-070	9.5	10	24	70
	ZFE4100-075	10	10	25	75
	ZFE4120-080	12	12	30	80
ZFE4140-100	14	14	35	100	
ZFE4160-100	16	16	40	100	



ZSFE2000/4000 (Short Flat)

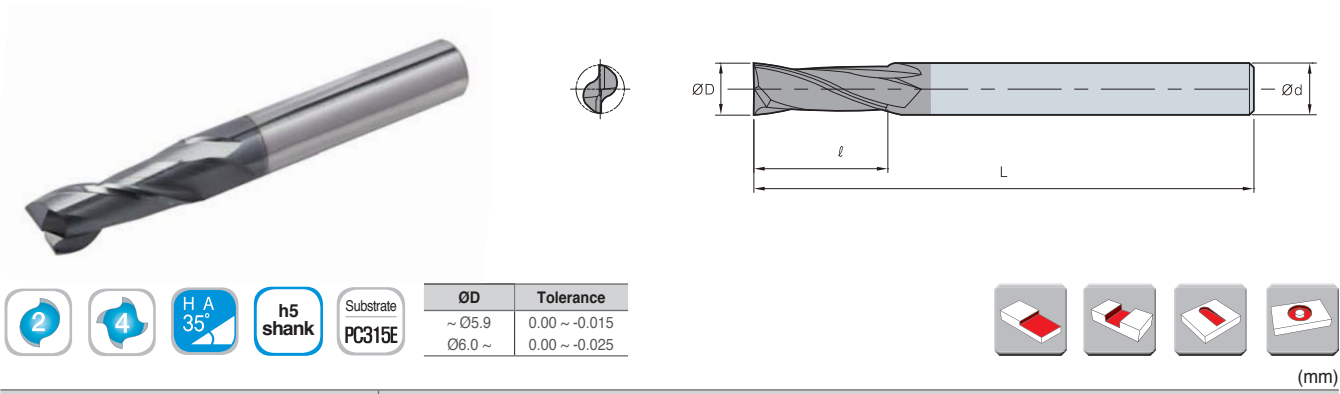


				Substrate PC315E						
<table border="1"> <thead> <tr> <th>ØD</th> <th>Tolerance</th> </tr> </thead> <tbody> <tr> <td>~ Ø5.9</td> <td>0.00 ~ -0.015</td> </tr> <tr> <td>Ø6.0 ~</td> <td>0.00 ~ -0.025</td> </tr> </tbody> </table>		ØD	Tolerance	~ Ø5.9	0.00 ~ -0.015	Ø6.0 ~	0.00 ~ -0.025			
ØD	Tolerance									
~ Ø5.9	0.00 ~ -0.015									
Ø6.0 ~	0.00 ~ -0.025									



(mm)

Designation		ØD	Ød	ℓ	L
ZSFE 	ZSFE2010-040-S4	1	4	1.5	40
	ZSFE2010-040-S6	1	6	1.5	40
	ZSFE2012-040-S4	1.2	4	1.5	40
	ZSFE2012-040-S6	1.2	6	1.5	40
	ZSFE2015-040-S4	1.5	4	2.2	40
	ZSFE2015-040-S6	1.5	6	2.2	40
	ZSFE2020-040-S4	2	4	3	40
	ZSFE2020-040-S6	2	6	3	40
	ZSFE2025-040-S4	2.5	4	4	40
	ZSFE2025-040-S6	2.5	6	4	40
	ZSFE2030-045-S4	3	4	4.5	45
	ZSFE2030-045-S6	3	6	4.5	45
	ZSFE2040-045-S4	4	4	6	45
	ZSFE2040-045-S6	4	6	6	45
	ZSFE2060-050	6	6	9	50
	ZSFE2080-060	8	8	12	60
	ZSFE2100-065	10	10	15	65
	ZSFE2120-070	12	12	18	70
ZSFE 	ZSFE4010-040-S4	1	4	1.5	40
	ZSFE4010-040-S6	1	6	1.5	40
	ZSFE4012-040-S4	1.2	4	1.5	40
	ZSFE4012-040-S6	1.2	6	1.5	40
	ZSFE4015-040-S4	1.5	4	2.2	40
	ZSFE4015-040-S6	1.5	6	2.2	40
	ZSFE4020-040-S4	2	4	3	40
	ZSFE4020-040-S6	2	6	3	40
	ZSFE4025-040-S4	2.5	4	4	40
	ZSFE4025-040-S6	2.5	6	4	40
	ZSFE4030-045-S4	3	4	4.5	45
	ZSFE4030-045-S6	3	6	4.5	45
	ZSFE4040-045-S4	4	4	6	45
	ZSFE4040-045-S6	4	6	6	45
	ZSFE4060-050	6	6	9	50
	ZSFE4080-060	8	8	12	60
	ZSFE4100-065	10	10	15	65
	ZSFE4120-070	12	12	18	70

ZBE2000 (Ball)

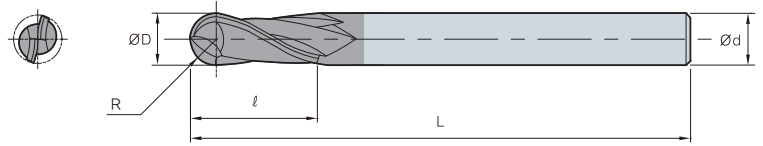

ØD	Tolerance
~ Ø5.9	0.00 ~ -0.015
Ø6.0 ~	0.00 ~ -0.025



(mm)


Designation	R	ØD	Ød	ℓ	L
ZBE					
ZBE2010-050-S4	0.5	1	4	2.5	50
ZBE2010-050-S6	0.5	1	6	2.5	50
ZBE2012-050-S4	0.6	1.2	4	3	50
ZBE2012-050-S6	0.6	1.2	6	3	50
ZBE2015-050-S4	0.75	1.5	4	4	50
ZBE2015-050-S6	0.75	1.5	6	4	50
ZBE2020-050-S4	1	2	4	5	50
ZBE2020-050-S6	1	2	6	5	50
ZBE2025-060-S4	1.25	2.5	4	6	60
ZBE2025-060-S6	1.25	2.5	6	6	60
ZBE2030-060-S4	1.5	3	4	8	60
ZBE2030-060-S6	1.5	3	6	8	60
ZBE2035-070	1.75	3.5	6	8	70
ZBE2040-070-S4	2	4	4	8	70
ZBE2040-070-S6	2	4	6	8	70
ZBE2045-080	2.25	4.5	6	9	80
ZBE2050-080	2.5	5	6	10	80
ZBE2055-090	2.75	5.5	6	11	90
ZBE2060-090	3	6	6	12	90
ZBE2065-090	3.25	6.5	8	13	90
ZBE2070-090	3.5	7	8	14	90
ZBE2080-100	4	8	8	14	100
ZBE2085-100	4.25	8.5	10	16	100
ZBE2090-100	4.5	9	10	18	100
ZBE2100-100	5	10	10	18	100
ZBE2120-110	6	12	12	22	110



Stable performance guaranteed for workpiece which is under HRC45

I⁺ Endmill *New*

- Tough substrate & wear-resisting coating technology applied
- Wide application range in general use
 - Stable performance guaranteed for workpiece which is under 45 HRC
- Saving cost by higher productivity




PC320


▶ Product line-up

- IPBE : I Plus Ball Endmill (Ø1~Ø20)
- IPFE : I Plus Flat Endmill (Ø1~Ø20)
- IPRE : I Plus Radius Endmill (Ø1~Ø12)

▶ Application area

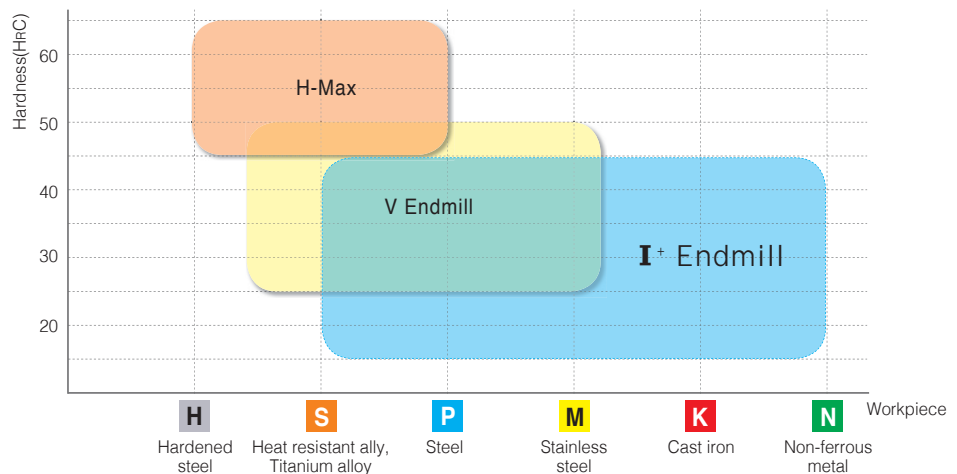

▶ Comparison

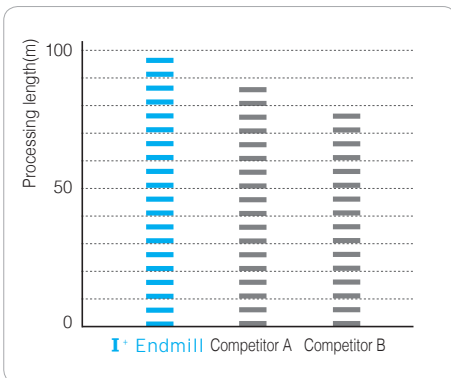

I⁺ Endmill

Competitor A

Competitor B


- **Workpiece** : SM45C
- **Curring condition** : Cutting Diameter=Ø8.0 n(min⁻¹)=5173 vc(m/min)=130.0 vf(mm/min)=1034 fz(mm/t)=0.1
ap(mm)=0.5 ae(mm)=1.6 Dry
- **Tool** : IPBE2080-060

▶ Recommended Cutting Condition (Flat)

■ IPFE2000


Diameter (ØD)	Carbon steel, Alloy steel ~ HRC30 (SM50C, SCM, GC250, Cast iron)			Alloy steel, High speed steel HRC30~45 (Pre hardened steels, STD61, NAK)			Stainless steel (STS304, STS316)		
	R.P.M (min ⁻¹)	Feed (mm/min)		R.P.M (min ⁻¹)	Feed (mm/min)		R.P.M (min ⁻¹)	Feed (mm/min)	
		Shouldering	Slotting		Shouldering	Slotting		Shouldering	Slotting
1.0	30,000	600	480	20,000	400	320	12,600	300	180
1.5	20,000	600	480	14,000	400	320	8,400	300	180
2.0	15,000	600	480	10,000	400	400	6,300	300	180
2.5	12,000	600	480	8,200	400	320	5,100	300	180
3.0	10,000	600	480	7,000	400	320	4,200	300	180
4.0	7,500	600	480	5,200	400	320	3,100	300	180
5.0	6,000	600	480	4,200	400	320	2,500	300	180
6.0	5,000	600	480	3,500	400	320	2,100	300	180
8.0	4,000	520	410	2,800	350	280	1,600	260	150
10.0	3,200	450	360	2,200	300	240	1,300	230	130
12.0	2,700	410	320	1,900	270	210	1,100	210	120
16.0	2,000	240	190	1,400	210	160	840	160	100
20.0	1,600	200	160	1,100	170	130	680	140	80

● Application tip



■ Shouldering depth (ap) and radial depth (ae)

- ap : $\leq 0.1D$ ($D \leq \varnothing 3$)
 $\leq 0.2D$ ($D > \varnothing 3$)
- ae : $\leq 0.1D$ ($D \leq \varnothing 2$)
 $\leq 0.2D$ ($D > \varnothing 2$)




■ Slotting depth (ap)

- ap : $\leq 0.1D$ ($D \leq \varnothing 2$)
 $\leq 0.2D$ ($D > \varnothing 2$)

■ IPFE4000


Diameter (ØD)	Carbon steel, Alloy steel ~ HRC30 (SM50C, SCM, GC250, Cast iron)			Alloy steel, High speed steel HRC30~45 (Pre hardened steels, STD61, NAK)			Stainless steel (STS304, STS316)		
	R.P.M (min ⁻¹)	Feed (mm/min)		R.P.M (min ⁻¹)	Feed (mm/min)		R.P.M (min ⁻¹)	Feed (mm/min)	
		Shouldering	Slotting		Shouldering	Slotting		Shouldering	Slotting
1.0	30,000	900	720	20,000	600	480	12,600	450	270
1.5	20,000	900	720	14,000	600	480	8,400	450	270
2.0	15,000	900	720	10,000	600	480	6,300	450	270
2.5	12,000	900	720	8,200	600	480	5,100	450	270
3.0	10,000	900	720	7,000	600	480	4,200	450	270
4.0	7,500	900	720	5,200	600	480	3,100	450	270
5.0	6,000	900	720	4,200	600	480	2,500	450	270
6.0	5,000	900	720	3,500	600	480	2,100	450	270
8.0	4,000	780	620	2,800	520	410	1,600	390	230
10.0	3,200	680	540	2,200	450	360	1,300	340	200
12.0	2,700	620	490	1,900	410	320	1,100	310	180
16.0	2,000	360	280	1,400	310	240	840	240	140
20.0	1,600	300	240	1,100	250	200	680	210	120

● Application tip



■ Shouldering depth (ap) and radial depth (ae)

- ap : $\leq 1.5D$ (All diameter)
- ae : $\leq 0.1D$ ($D \leq \varnothing 3$)
 $\leq 0.2D$ ($D > \varnothing 3$)



■ Slotting depth (ap)


- ap : $\leq 0.1D$ ($D \leq \varnothing 2$)
 $\leq 0.2D$ ($D > \varnothing 2$)

▶ Recommended Cutting Condition (Ball)


■ IPBE2000

Diameter (ØD)	Carbon steel (SM50C)		Alloy steel (SCM, STD, STS, KP4M, NAK)		Mold steel ~HRC45 (STD61)		Non-ferrous metal (Aluminum)	
	R.P.M (min ⁻¹)	Feed (mm/min)	R.P.M (min ⁻¹)	Feed (mm/min)	R.P.M (min ⁻¹)	Feed (mm/min)	R.P.M (min ⁻¹)	Feed (mm/min)
1.0	40,000	1,200	38,000	1,200	29,000	900	40,000	1,000
1.5	30,000	1,270	25,500	1,100	19,000	700	40,000	1,360
2.0	24,000	1,160	19,000	800	14,300	600	40,000	2,000
2.5	19,000	1,000	15,300	670	11,500	510	38,000	2,400
3.0	16,000	930	13,000	600	9,600	460	32,000	2,400
3.5	13,700	930	11,400	580	8,200	450	27,300	2,400
4.0	12,000	930	10,000	570	7,200	450	24,000	2,400
5.0	9,600	930	8,000	560	5,700	450	19,000	2,400
6.0	8,000	930	6,400	540	4,800	450	16,000	2,400
8.0	6,000	900	4,800	540	3,600	450	12,000	2,400
10.0	4,800	900	3,800	540	2,900	450	9,600	2,300
12.0	4,000	900	3,200	540	2,400	450	8,000	2,100
14.0	3,400	900	2,750	540	2,050	450	6,800	2,000
16.0	3,000	900	2,400	540	1,800	450	6,000	2,000
20.0	2,400	900	1,900	520	1,450	450	4,800	2,000

● Application tip



- Slotting depth (ap)
 - ap : 0.1×R (~45HRC)
 - 0.08×R (~50HRC)




- Shouldering depth (ap) and radial depth (ae)
 - ~0.16×R R≤0.3 (~45HRC)
 - ~0.25×R R≤3 (~45HRC)
 - ~0.17×R R≤4 (~45HRC)
 - ~0.05×R (~50HRC)

▶ Recommended Cutting Condition (Radius)


■ IPRE2000

Diameter (ØD)	Carbon steel, Alloy steel ~ HRC30 (SM50C, SCM, GC250, Cast iron)			Alloy steel, High speed steel HRC30~45 (Pre hardened steels, STD61, NAK)			Stainless steel (STS304, STS316)		
	R.P.M (min ⁻¹)	Feed (mm/min)		R.P.M (min ⁻¹)	Feed (mm/min)		R.P.M (min ⁻¹)	Feed (mm/min)	
		Shouldering	Slotting		Shouldering	Slotting		Shouldering	Slotting
2.0	11,000	180	180	7,200	110	110	6,000	90	90
3.0	8,500	200	160	5,300	130	100	4,400	110	66
4.0	7,200	360	290	4,400	220	180	3,000	180	110
5.0	6,000	380	300	3,600	230	180	2,400	190	110
6.0	5,300	420	340	3,200	240	190	2,200	210	130
8.0	4,000	450	360	2,400	240	190	1,600	220	130
10.0	3,200	390	310	1,900	190	150	1,300	190	110
12.0	2,700	330	260	1,600	160	130	1,000	150	90

● Application tip




- Shouldering depth (ap) and radial depth (ae)
 - ap : ≤1.5D
 - ap : ≤0.1D



- Slotting depth (ap)
 - ap : ≤0.3D

IPFE2000(Standard Flat)



ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02
Ø12.1~Ø20	0.00 ~ -0.03




(mm)

Designation	ØD	Ød	ℓ	L
IPFE 2	2010-050-S3	1	3	50
	2010-050-S4	1	4	50
	2010-050	1	6	50
	2015-050-S3	1.5	3	50
	2015-050-S4	1.5	4	50
	2015-050	1.5	6	50
	2020-050-S3	2	3	50
	2020-050-S4	2	4	50
	2020-050	2	6	50
	2025-050-S3	2.5	3	50
	2025-050-S4	2.5	4	50
	2025-050	2.5	6	50
	2030-050-S3	3	3	50
	2030-050-S4	3	4	50
	2030-050	3	6	50
	2035-050-S4	3.5	4	50
	2035-050	3.5	6	50
	2040-050-S4	4	4	50
	2040-050	4	6	50
	2045-050	4.5	6	50
2050-050	5	6	50	
2055-050	5.5	6	50	
2060-050	6	6	50	
2065-060	6.5	8	60	
2070-060	7	8	60	
2075-060	7.5	8	60	
2080-060	8	8	60	
2085-075	8.5	10	75	
2090-075	9	10	75	
2095-075	9.5	10	75	
2100-075	10	10	75	
2105-075	10.5	12	75	
2110-075	11	12	75	
2115-075	11.5	12	75	
2120-075	12	12	75	
2140-100	14	16	100	
2160-100	16	16	100	
2180-100	18	20	100	
2200-100	20	20	100	



IPLFE2000 (Long Flat)



ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02
Ø12.1~Ø20	0.00 ~ -0.03



▶ Long Shank Type

(mm)


Designation	ØD	Ød	ℓ	L
IPLFE 2060-075	6	6	16	75
2060-100	6	6	16	100
2080-075	8	8	20	75
2080-100	8	8	20	100
2100-100	10	10	25	100
2100-150	10	10	25	150
2120-100	12	12	32	100
2120-150	12	12	32	150

▶ Long Flute Type

(mm)

Designation	ØD	Ød	ℓ	L
IPLFE 2010-050-V7S4	1	4	7	50
2015-050-V9S4	1.5	4	9	50
2020-050-V12S4	2	4	12	50
2025-050-V12S4	2.5	4	12	50
2030-060-V15S6	3	6	15	60
2035-060-V15S6	3.5	6	15	60
2040-075-V20S6	4	6	20	75
2045-075-V20S6	4.5	6	20	75
2050-075-V25S6	5	6	25	75
2055-075-V25S6	5.5	6	25	75
2060-075-V30S6	6	6	30	75
2070-100-V30S8	7	8	30	100
2080-100-V40S8	8	8	40	100
2090-100-V40S10	9	10	40	100
2100-100-V40S10	10	10	40	100
2110-100-V40S12	11	12	40	100
2120-100-V50S12	12	12	50	100
2140-150-V50S16	14	16	50	150
2160-150-V60S16	16	16	60	150
2200-200-V90S20	20	20	90	200

IPFE4000 (Standard Flat)



ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02
Ø12.1~Ø20	0.00 ~ -0.03




(mm)

Designation	ØD	Ød	ℓ	L
IPFE 4	4010-050-S3	1	3	50
	4010-050-S4	1	4	50
	4010-050	1	6	50
	4015-050-S3	1.5	3	50
	4015-050-S4	1.5	4	50
	4015-050	1.5	6	50
	4020-050-S3	2	3	50
	4020-050-S4	2	4	50
	4020-050	2	6	50
	4025-050-S3	2.5	3	50
	4025-050-S4	2.5	4	50
	4025-050	2.5	6	50
	4030-050-S3	3	3	50
	4030-050-S4	3	4	50
	4030-050	3	6	50
	4035-050-S4	3.5	4	50
	4035-050	3.5	6	50
	4040-050-S4	4	4	50
	4040-050	4	6	50
	4045-050	4.5	6	50
4050-050	5	6	50	
4055-050	5.5	6	50	
4060-050	6	6	50	
4065-060	6.5	8	60	
4070-060	7	8	60	
4075-060	7.5	8	60	
4080-060	8	8	60	
4085-075	8.5	10	75	
4090-075	9	10	75	
4095-075	9.5	10	75	
4100-075	10	10	75	
4105-075	10.5	12	75	
4110-075	11	12	75	
4115-075	11.5	12	75	
4120-075	12	12	75	
4140-100	14	16	100	
4160-100	16	16	100	
4180-100	18	20	100	
4200-100	20	20	100	



IPLFE4000 (Long Flat)



ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02
Ø12.1~Ø20	0.00 ~ -0.03



▶ Long Shank Type

(mm)



Designation	ØD	Ød	ℓ	L
IPLFE 4060-075	6	6	16	75
4060-100	6	6	16	100
4080-075	8	8	20	75
4080-100	8	8	20	100
4100-100	10	10	30	100
4100-150	10	10	30	150
4120-100	12	12	32	100
4120-150	12	12	32	150

▶ Long Flute Type

(mm)

Designation	ØD	Ød	ℓ	L
IPLFE 4010-050-V6S4	1	4	6	50
4015-050-V9S4	1.5	4	9	50
4020-050-V12S4	2	4	12	50
4025-050-V12S4	2.5	4	12	50
4030-060-V15S6	3	6	15	60
4035-060-V15S6	3.5	6	15	60
4040-075-V20S6	4	6	20	75
4045-075-V20S6	4.5	6	20	75
4050-075-V25S6	5	6	25	75
4055-075-V25S6	5.5	6	25	75
4060-075-V30S6	6	6	30	75
4070-100-V30S8	7	8	30	100
4080-100-V40S8	8	8	40	100
4090-100-V40S10	9	10	40	100
4100-100-V40S10	10	10	40	100
4110-100-V40S12	11	12	40	100
4120-100-V50S12	12	12	50	100
4140-150-V50S16	14	16	50	150
4160-150-V60S16	16	16	60	150
4200-200-V90S20	20	20	90	200


IPBE2000 (Standard Ball)

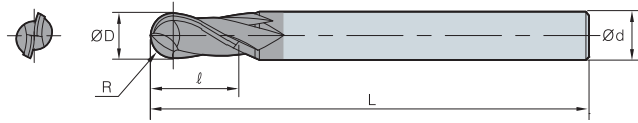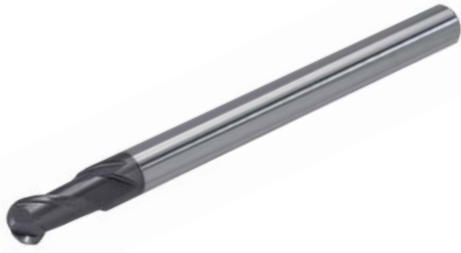

ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02
Ø12.1~Ø20	0.00 ~ -0.03




(mm)

Designation	R	ØD	Ød	ℓ	L	
IPBE 	2010-050-S3	0.5	1	3	2	50
	2010-050-S4	0.5	1	4	2	50
	2010-050	0.5	1	6	2	50
	2015-050-S3	0.75	1.5	3	3	50
	2015-050-S4	0.75	1.5	4	3	50
	2015-050	0.75	1.5	6	3	50
	2020-050-S3	1	2	3	4	50
	2020-050-S4	1	2	4	4	50
	2020-050	1	2	6	4	50
	2025-050-S3	1.25	2.5	3	5	50
	2025-050-S4	1.25	2.5	4	5	50
	2025-050	1.25	2.5	6	5	50
	2030-050-S3	1.5	3	3	6	50
	2030-050-S4	1.5	3	4	6	50
	2030-050	1.5	3	6	6	50
	2035-050-S4	1.75	3.5	4	7	50
	2035-050	1.75	3.5	6	7	50
	2040-050-S4	2	4	4	8	50
	2040-050	2	4	6	8	50
	2045-050	2.25	4.5	6	9	50
	2050-050	2.5	5	6	10	50
	2060-050	3	6	6	12	50
	2070-060	3.5	7	8	14	60
	2080-060	4	8	8	16	60
	2090-075	4.5	9	10	18	75
	2100-075	5	10	10	20	75
	2120-075	6	12	12	24	75
	2140-100	7	14	16	28	100
2160-100	8	16	16	32	100	
2180-100	9	18	20	36	100	
2200-100	10	20	20	40	100	



IPLBE2000 (Long Ball)

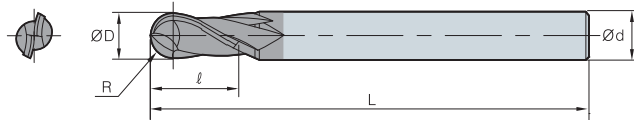


ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02
Ø12.1~Ø16	0.00 ~ -0.03



(mm)

Designation	R	ØD	Ød	ℓ	L
IPLBE 2010-075	0.5	1	6	2	75
2010-100	0.5	1	6	2	100
2015-075	0.75	1.5	6	3	75
2015-100	0.75	1.5	6	3	100
2020-075	1	2	6	4	75
2020-100	1	2	6	4	100
2025-075	1.25	2.5	6	5	75
2025-100	1.25	2.5	6	5	100
2030-075	1.5	3	6	6	75
2030-100	1.5	3	6	6	100
2035-100	1.75	3.5	6	7	100
2040-075	2	4	6	8	75
2040-100	2	4	6	8	100
2050-075	2.5	5	6	10	75
2050-100	2.5	5	6	10	100
2060-075	3	6	6	12	75
2060-100	3	6	6	12	100
2060-150	3	6	6	12	150
2080-075	4	8	8	16	75
2080-100	4	8	8	16	100
2080-150	4	8	8	16	150
2100-100	5	10	10	20	100
2100-150	5	10	10	20	150
2100-200	5	10	10	20	200
2120-100	6	12	12	24	100
2120-150	6	12	12	24	150
2120-200	6	12	12	24	200
2160-150	8	16	16	32	150
2160-200	8	16	16	32	200

IPBE4000 (Standard Ball)

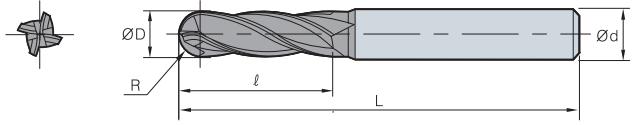

ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02
Ø12.1~Ø20	0.00 ~ -0.03




(mm)

Designation	R	ØD	Ød	ℓ	L	
IPBE 4	4010-050-S4	0.5	1	4	2	50
	4010-050	0.5	1	6	2	50
	4015-050-S4	0.75	1.5	4	3	50
	4015-050	0.75	1.5	6	3	50
	4020-050-S4	1	2	4	4	50
	4020-050	1	2	6	4	50
	4025-050-S4	1.25	2.5	4	5	50
	4025-050	1.25	2.5	6	5	50
	4030-050-S3	1.5	3	3	6	50
	4030-050-S4	1.5	3	4	6	50
	4030-050	1.5	3	6	6	50
	4035-050-S4	1.75	3.5	4	7	50
	4035-050	1.75	3.5	6	7	50
	4040-050-S4	2	4	4	8	50
	4040-050	2	4	6	8	50
	4045-050	2.25	4.5	6	9	50
	4050-050	2.5	5	6	10	50
	4060-050	3	6	6	12	50
	4070-060	3.5	7	8	14	60
	4080-060	4	8	8	16	60
4090-075	4.5	9	10	18	75	
4100-075	5	10	10	20	75	
4120-075	6	12	12	24	75	
4140-100	7	14	16	28	100	
4160-100	8	16	16	32	100	
4180-100	9	18	20	36	100	
4200-100	10	20	20	40	100	



IPRE2000 (Standard Radius)




ØD	Tolerance
Ø1-Ø12	0.00 -- -0.02



(mm)

Designation	ØD	Ød	ℓ	L	r
IPRE					
2010-050-R01	1	4	3	50	0.1
2010-050-R02	1	4	3	50	0.2
2010-050-R03	1	4	3	50	0.3
2015-050-R02	1.5	4	4	50	0.2
2015-050-R03	1.5	4	4	50	0.3
2020-050-R02	2	4	6	50	0.2
2020-050-R03	2	4	6	50	0.3
2020-050-R05	2	4	6	50	0.5
2025-050-R02	2.5	4	8	50	0.2
2030-050-R02-S3	3	3	8	50	0.2
2030-050-R03-S3	3	3	8	50	0.3
2030-050-R05-S3	3	3	8	50	0.5
2030-050-R10-S3	3	3	8	50	1
2030-050-R02	3	4	8	50	0.2
2030-050-R03	3	4	8	50	0.3
2030-050-R05	3	4	8	50	0.5
2030-050-R10	3	4	8	50	1
2040-050-R02	4	4	10	50	0.2
2040-050-R03	4	4	10	50	0.3
2040-050-R05	4	4	10	50	0.5
2040-050-R10	4	4	10	50	1
2040-050-R15	4	4	10	50	1.5
2050-050-R02	5	6	13	50	0.2
2050-050-R03	5	6	13	50	0.3
2050-050-R05	5	6	13	50	0.5
2050-050-R10	5	6	13	50	1
2060-050-R02	6	6	15	50	0.2
2060-050-R03	6	6	15	50	0.3
2060-050-R05	6	6	15	50	0.5
2060-050-R10	6	6	15	50	1
2060-050-R15	6	6	15	50	1.5
2060-050-R20	6	6	15	50	2

IPRE2000 (Standard Radius)



ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02




(mm)

Designation		ØD	Ød	l	L	r
IPRE	2080-060-R03	8	8	20	60	0.3
	2080-060-R05	8	8	20	60	0.5
	2080-060-R10	8	8	20	60	1
	2080-060-R15	8	8	20	60	1.5
	2080-060-R20	8	8	20	60	2
	2080-060-R25	8	8	20	60	2.5
	2080-060-R30	8	8	20	60	3
	2100-075-R03	10	10	25	75	0.3
	2100-075-R05	10	10	25	75	0.5
	2100-075-R10	10	10	25	75	1
	2100-075-R15	10	10	25	75	1.5
	2100-075-R20	10	10	25	75	2
	2100-075-R25	10	10	25	75	2.5
	2100-075-R30	10	10	25	75	3
	2120-075-R03	12	12	30	75	0.3
	2120-075-R05	12	12	30	75	0.5
	2120-075-R10	12	12	30	75	1
	2120-075-R15	12	12	30	75	1.5
	2120-075-R20	12	12	30	75	2
	2120-075-R25	12	12	30	75	2.5
2120-075-R30	12	12	30	75	3	



IPLRE2000 (Long Radius)




ØD	Tolerance
Ø3-Ø12	0.00 ~ -0.02



(mm)

Designation	ØD	Ød	ℓ	L	r
IPLRE 2030-075-R03	3	3	8	75	0.3
2030-075-R05	3	3	8	75	0.5
2030-075-R10	3	3	8	75	1
2040-075-R03	4	4	10	75	0.3
2040-075-R05	4	4	10	75	0.5
2040-075-R10	4	4	10	75	1
2040-075-R15	4	4	10	75	1.5
2060-100-R03	6	6	15	100	0.3
2060-100-R05	6	6	15	100	0.5
2060-100-R10	6	6	15	100	1
2060-100-R15	6	6	15	100	1.5
2060-100-R20	6	6	15	100	2
2080-100-R03	8	8	20	100	0.3
2080-100-R05	8	8	20	100	0.5
2080-100-R10	8	8	20	100	1
2080-100-R15	8	8	20	100	1.5
2080-100-R20	8	8	20	100	2
2080-100-R25	8	8	20	100	2.5
2080-100-R30	8	8	20	100	3
2100-100-R03	10	10	25	100	0.3
2100-100-R05	10	10	25	100	0.5
2100-100-R10	10	10	25	100	1
2100-100-R15	10	10	25	100	1.5
2100-100-R20	10	10	25	100	2
2100-100-R25	10	10	25	100	2.5
2100-100-R30	10	10	25	100	3
2120-100-R03	12	12	30	100	0.3
2120-100-R05	12	12	30	100	0.5
2120-100-R10	12	12	30	100	1
2120-100-R15	12	12	30	100	1.5
2120-100-R20	12	12	30	100	2
2120-100-R25	12	12	30	100	2.5
2120-100-R30	12	12	30	100	3

IPRE4000 (Standard Radius)



ØD	Tolerance
Ø2-Ø12	0.00 ~ -0.02




(mm)

Designation	ØD	Ød	ℓ	L	r
IPRE 4020-050-R02	2	4	6	50	0.2
4020-050-R03	2	4	6	50	0.3
4020-050-R05	2	4	6	50	0.5
4025-050-R02	2.5	4	8	50	0.2
4030-050-R02-S3	3	3	8	50	0.2
4030-050-R03-S3	3	3	8	50	0.3
4030-050-R05-S3	3	3	8	50	0.5
4030-050-R10-S3	3	3	8	50	1
4030-050-R02	3	4	8	50	0.2
4030-050-R03	3	4	8	50	0.3
4030-050-R05	3	4	8	50	0.5
4030-050-R10	3	4	8	50	1
4040-050-R02	4	4	10	50	0.2
4040-050-R03	4	4	10	50	0.3
4040-050-R05	4	4	10	50	0.5
4040-050-R10	4	4	10	50	1
4040-050-R15	4	4	10	50	1.5
4050-050-R02	5	6	13	50	0.2
4050-050-R03	5	6	13	50	0.3
4050-050-R05	5	6	13	50	0.5
4050-050-R10	5	6	13	50	1
4060-050-R02	6	6	15	50	0.2
4060-050-R03	6	6	15	50	0.3
4060-050-R05	6	6	15	50	0.5
4060-050-R10	6	6	15	50	1
4060-050-R15	6	6	15	50	1.5
4060-050-R20	6	6	15	50	2
4080-060-R03	8	8	20	60	0.3
4080-060-R05	8	8	20	60	0.5
4080-060-R10	8	8	20	60	1
4080-060-R15	8	8	20	60	1.5
4080-060-R20	8	8	20	60	2
4080-060-R25	8	8	20	60	2.5
4080-060-R30	8	8	20	60	3
4100-075-R03	10	10	25	75	0.3
4100-075-R05	10	10	25	75	0.5
4100-075-R10	10	10	25	75	1
4100-075-R15	10	10	25	75	1.5
4100-075-R20	10	10	25	75	2
4100-075-R25	10	10	25	75	2.5
4100-075-R30	10	10	25	75	3
4120-075-R03	12	12	30	75	0.3
4120-075-R05	12	12	30	75	0.5
4120-075-R10	12	12	30	75	1
4120-075-R15	12	12	30	75	1.5
4120-075-R20	12	12	30	75	2
4120-075-R25	12	12	30	75	2.5
4120-075-R30	12	12	30	75	3



IPLRE4000 (Long Radius)



ØD	Tolerance
Ø3-Ø12	0.00 - -0.02



(mm)

Designation	ØD	Ød	ℓ	L	r
IPLRE 4030-075-R03	3	3	8	75	0.3
4030-075-R05	3	3	8	75	0.5
4030-075-R10	3	3	8	75	1
4040-075-R03	4	4	10	75	0.3
4040-075-R05	4	4	10	75	0.5
4040-075-R10	4	4	10	75	1
4040-075-R15	4	4	10	75	1.5
4060-100-R03	6	6	15	100	0.3
4060-100-R05	6	6	15	100	0.5
4060-100-R10	6	6	15	100	1
4060-100-R15	6	6	15	100	1.5
4060-100-R20	6	6	15	100	2
4080-100-R03	8	8	20	100	0.3
4080-100-R05	8	8	20	100	0.5
4080-100-R10	8	8	20	100	1
4080-100-R15	8	8	20	100	1.5
4080-100-R20	8	8	20	100	2
4080-100-R25	8	8	20	100	2.5
4080-100-R30	8	8	20	100	3
4100-100-R03	10	10	25	100	0.3
4100-100-R05	10	10	25	100	0.5
4100-100-R10	10	10	25	100	1
4100-100-R15	10	10	25	100	1.5
4100-100-R20	10	10	25	100	2
4100-100-R25	10	10	25	100	2.5
4100-100-R30	10	10	25	100	3
4120-100-R03	12	12	30	100	0.3
4120-100-R05	12	12	30	100	0.5
4120-100-R10	12	12	30	100	1
4120-100-R15	12	12	30	100	1.5
4120-100-R20	12	12	30	100	2
4120-100-R25	12	12	30	100	2.5
4120-100-R30	12	12	30	100	3

F Technical Information for F Endmill

High efficiency and high feed in machining

F Endmill


Feed-up Endmill

▶ Feature




- Wider chip pocket area Highly efficient operation
- High feed machining possible by dispersing cutting forces

■ Application by workpiece

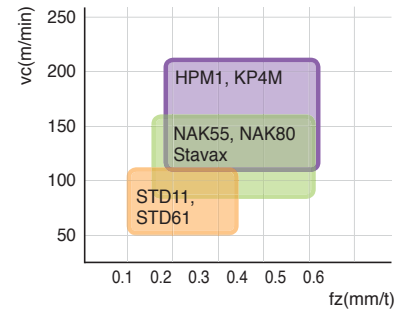

▶ Productivity example

■ Productivity comparison

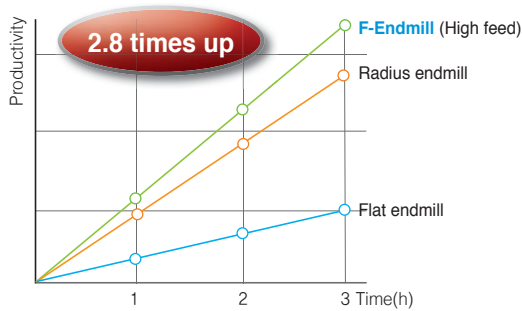


Type	Speed (vc)	Feed (fz)	D.O.C		Machining volume (mm ³ /min)
			ap	ae	
F-Endmill (High feed)	180	0.30	0.5	5.0	135,000
Radius Endmill	200	0.09	1.0	5.0	90,000
Flat Endmill	120	0.05	8.0	0.2	48,000

Higher productivity by feed increase. **2.8 times**


▶ Programing information

■ Ramping

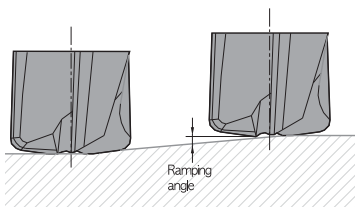

Ramping angle	Feed
1°	100%
2°	80%
3°	60%
4°	50%


■ Helical ramping



Diameter (ØD)	Min. diameter	Max. diameter
6	7.8	12
8	10.2	16
10	12.4	20
12	14.9	24

*ØDc : Feed (Tool center)
*ØDh : Machining area


■ CAM program information



Diameter(ØD)	Endmill-R	CAM-Radius	Un-cut part
6	0.5	0.7	0.21
8	0.5	0.8	0.32
10	1.0	1.3	0.36
12	1.2	1.6	1.45



▶ Machining example

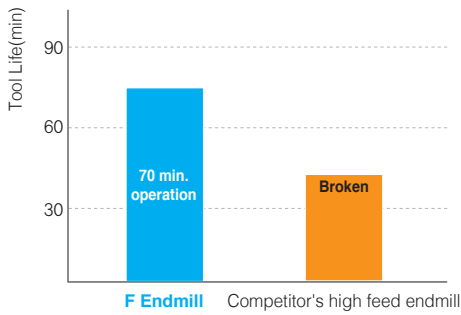


- **Workpiece** STD61+SKT4(HrC 45~50)
- **Cutting condition** D=Ø12, n(min⁻¹)=4,000, vc(m/min)=150.8, vf(mm/min)=4,000, fz(mm/t)=0.25, ap(mm)=3.6, ae(mm)=6.0, Dry
- **Tools** FME4120-075-R12

▶ Cutting condition

■ Cusp height by radial depth of cut

Diameter (ØD)	Radial depth ae(mm)					
	0.1XD	0.2XD	0.3XD	0.4XD	0.5XD	0.6XD
6	0	0	0	0.02	0.06	0.11
8	0	0	0	0.04	0.10	0.15
10	0	0	0.01	0.07	0.14	0.21
12	0	0	0.01	0.08	0.17	0.25

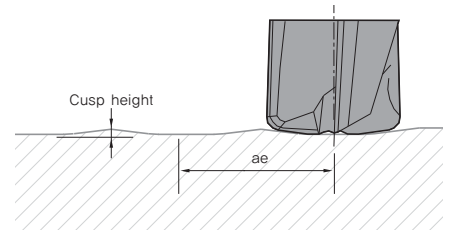

■ Medium cut

Diameter (ØD)	Mold steel HrC35~45(HPM1, KP4M)				Mold steel HrC45~55(NAK55, NAK80, STAVAX)				Heat treated HrC55(SKD11, STD61)			
	RPM n(min ⁻¹)	Feed (mm/min)	ap(mm)	ae(mm)	RPM n(min ⁻¹)	Feed (mm/min)	ap(mm)	ae(mm)	RPM n(min ⁻¹)	Feed (mm/min)	ap(mm)	ae(mm)
6	11,600	11,200	0.24	1.6	9,000	7,570	0.21	1.6	5,800	3,500	0.18	1.6
8	8,700		0.32	2.2	6,700		0.28	2.2	4,300		0.24	2.2
10	7,000		0.40	2.7	5,400		0.35	2.7	3,500		0.30	2.7
12	5,800		0.48	3.3	4,500		0.42	3.3	2,900		0.36	3.3



■ Roughing cut

Diameter (ØD)	Mold steel HrC35~45(HPM1, KP4M)				Mold steel HrC45~55(NAK55, NAK80, STAVAX)				Heat treated HrC55(SKD11, STD61)			
	RPM n(min ⁻¹)	Feed (mm/min)	ap(mm)	ae(mm)	RPM n(min ⁻¹)	Feed (mm/min)	ap(mm)	ae(mm)	RPM n(min ⁻¹)	Feed (mm/min)	ap(mm)	ae(mm)
6	8,488	9,167	0.27	3.0	6,366	6,112	0.24	3.0	4,244	2,546	0.21	3.0
8	6,366		0.36	4.0	4,775		0.32	4.0	3,183		0.28	4.0
10	5,093		0.45	5.0	3,820		0.40	5.0	2,546		0.35	5.0
12	4,244		0.54	6.0	3,183		0.48	6.0	2,122		0.42	6.0

* Cutting condition by overhang

1. Standard overhang : Follow cutting conditions above.
2. Long type : Apply 80% feed & 80% ae.
3. Long overhang : When the overhang is increased by 10mm, decrease feed 5% & ae 5%.

FME4000 (Standard)

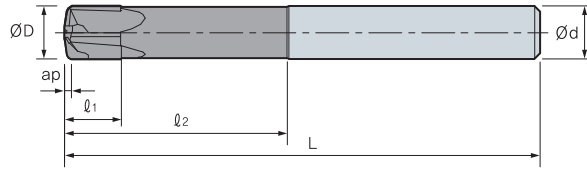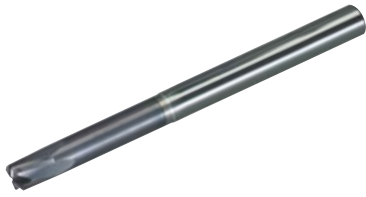



ØD	Tolerance
Ø6-Ø12	-0.01 ~ -0.03



(mm)

Designation	R	ØD	Ød	l ₁	l ₂	L	Max. ap (mm)	CAM-Radius	
FME	4060-050-R05	0.5	6	6	4.5	18	50	0.35	0.7
	4080-060-R05	0.5	8	8	6	24	60	0.45	0.8
	4100-070-R10	1.0	10	10	7.5	30	70	0.65	1.3
	4120-075-R12	1.2	12	12	9	36	75	0.78	1.6

FMLE4000 (Long)

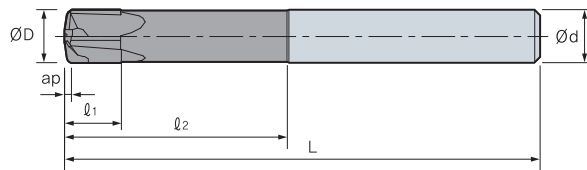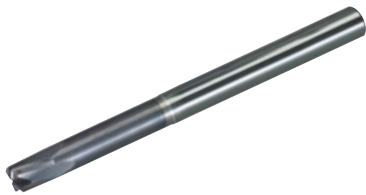

ØD	Tolerance
Ø6-Ø12	-0.01 ~ -0.03



(mm)

Designation	R	ØD	Ød	l ₁	l ₂	L	Max. ap (mm)	CAM-Radius	
FMLE	4060-090-R05	0.5	6	6	4.5	30	90	0.35	0.7
	4080-090-R05	0.5	8	8	6	40	90	0.45	0.8
	4100-100-R10	1.0	10	10	7.5	50	100	0.65	1.3
	4120-110-R12	1.2	12	12	9	60	110	0.78	1.6

Ideal Endmill for ultra precision geometry machining

Micro Endmills


- Enhanced rigidity of neck eliminates braking of the tool
- It is ideal for ultra precision geometry machining
- Slotting, Die-sinking, Profiling, Miniature, Finishing
- Camera, Watch, Precision mold





※ Notice

Users should operate high precision machine and clamp tool with its' best rigidity and accuracy
Anti vibration system is required for stable cutting. Watch operation for chip evacuation

▶ Micro Endmills Code System

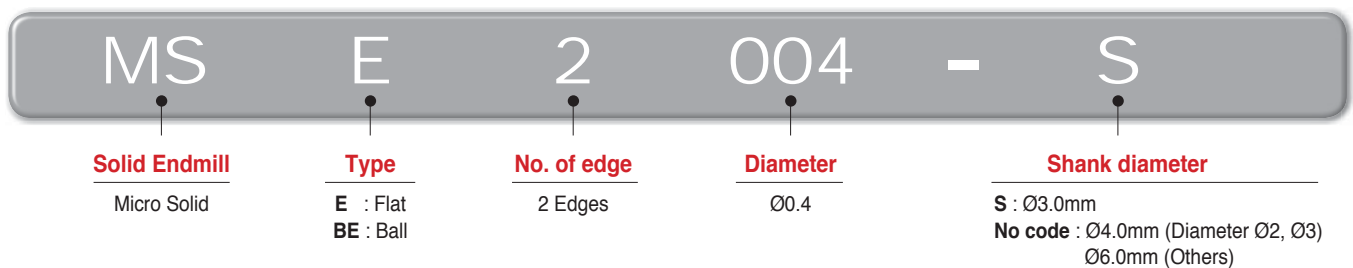

▶ Product shape

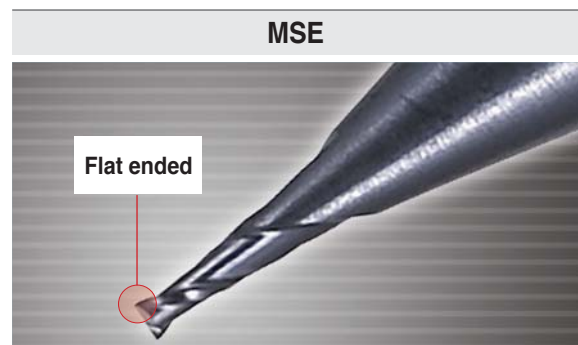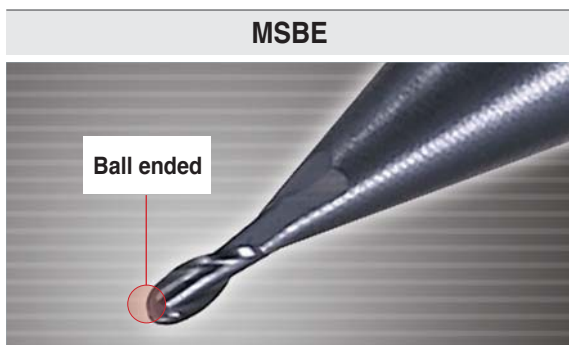


▶ Recommended Cutting Condition - MSE2000


Workpiece	Carbon steel, Alloy steel, Cast iron			Alloy steel, High speed steel		
	HRC45 ~			HRC45~55		
Condition	SM50C,SCM,STD			STD61,STAVAX		
Diameter(Ø)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	Radial depth ae(mm)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	Radial depth ae(mm)
0.4	40,000	640	0.01	40,000	640	0.01
0.5	40,000	800	0.02	40,000	800	0.015
0.6	40,000	960	0.02	40,000	960	0.02
0.7	40,000	1,120	0.02	40,000	1,120	0.02
0.8	40,000	1,280	0.03	40,000	1,280	0.03
0.9	40,000	1,440	0.04	40,000	1,280	0.04
1.0	40,000	1,600	0.06	40,000	1,280	0.06

- Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio
- 1. Workpiece should be clamped rigidly. In case of vibration, reduce RPM and feed rate by the same ratio
- 2. In case of shouldering, reduce feed rate to 1/3

● Application tip




• $ap \leq ae$



- $D \geq 3$: increase RPM 50~70%
reduce feed rate 40~60%
- Slotting : $ap \leq ae$

MSE2000 (Flat)

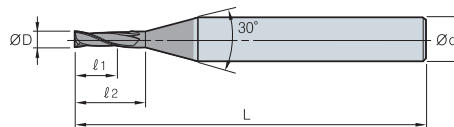







ØD	Tolerance
Ø0.2~Ø1.0	0 ~ -0.02

(mm)

Designation		ØD	Ød	l ₁	l ₂	L
MSE	2002	0.2	4	0.4	0.6	40
	2003	0.3	4	0.6	0.9	40
	2004	0.4	6	0.8	1.2	50
	2004-S	0.4	3	0.8	1.2	45
	2005	0.5	6	1	1.5	50
	2005-S	0.5	3	1	1.5	45
	2006	0.6	6	1.2	1.8	50
	2006-S	0.6	3	1.2	1.8	45
	2007	0.7	6	1.4	2.1	50
	2007-S	0.7	3	1.4	2.1	45
	2008	0.8	6	1.6	2.4	50
	2008-S	0.8	3	1.6	2.4	45
	2009	0.9	6	1.8	2.7	50
	2009-S	0.9	3	1.8	2.7	45
	2010	1	6	2	3	50
2010-S	1	3	2	3	45	

MSBE2000 (Ball)

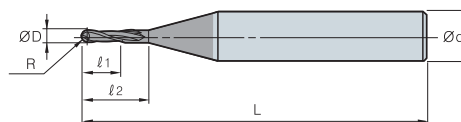






ØD	Tolerance
Ø0.2~Ø1.0	0 ~ -0.02

(mm)

Designation		R	ØD	Ød	l ₁	l ₂	L
MSBE	2002	0.1	0.2	4	0.2	0.4	40
	2003	0.15	0.3	4	0.3	0.6	40
	2004	0.2	0.4	6	0.8	1.2	50
	2004-S	0.2	0.4	3	0.8	1.2	45
	2005	0.25	0.5	6	1	1.5	50
	2005-S	0.25	0.5	3	1	1.5	45
	2006	0.3	0.6	6	1.2	1.8	50
	2006-S	0.3	0.6	3	1.2	1.8	45
	2007	0.35	0.7	6	1.4	2.1	50
	2007-S	0.35	0.7	3	1.4	2.1	45
	2008	0.4	0.8	6	1.6	2.4	50
	2008-S	0.4	0.8	3	1.6	2.4	45
	2009	0.45	0.9	6	1.8	2.7	50
	2009-S	0.45	0.9	3	1.8	2.7	45
	2010	0.5	1	6	2	3	50
2010-S	0.5	1	3	2	3	45	

Special endmills order - MSE : MSE2000-I-L / MSBE : MSBE2000-I-L

EX.1) Diameter : 0.45, l : 1.2, L : 50 MSE20045 1.2-55L

EX.2) Ball R0.225(Ø0.45), l : 1.2, L : 55 MSBE0045 1.2-55L


The diameter should be smaller than Ø1.0 for MSE, MSBE. In case of above Ø1.0, please refer to SSE-Q and SSBE-Q.




Optimal design for stainless steel machining

Solid Endmills for Hard-to-cut material


- High rake angle and curvilinear designed pocket for improved chip evacuation.
- Special edge for work hardening
- Optimized for stainless steel machining (Stainless steel, Titanium alloy, Inconel, Steel, Alloy steel)
- Multi applications (Shouldering, Slotting, Ramping)

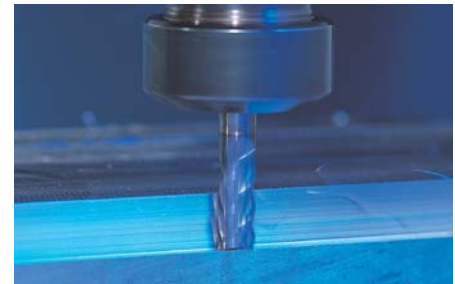

▶ Endmills for Hard-to-cut materials Code System

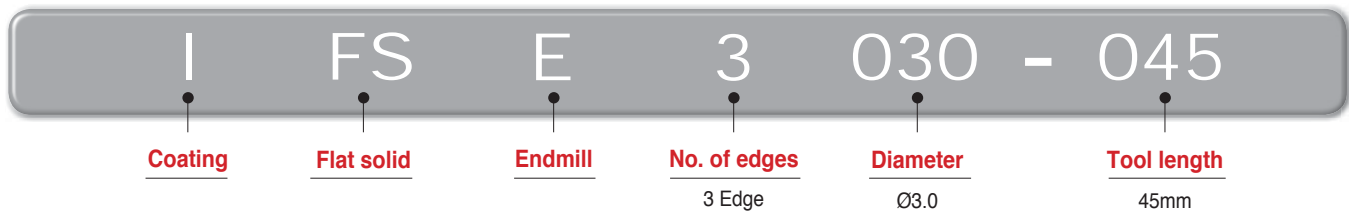

▶ Product shape

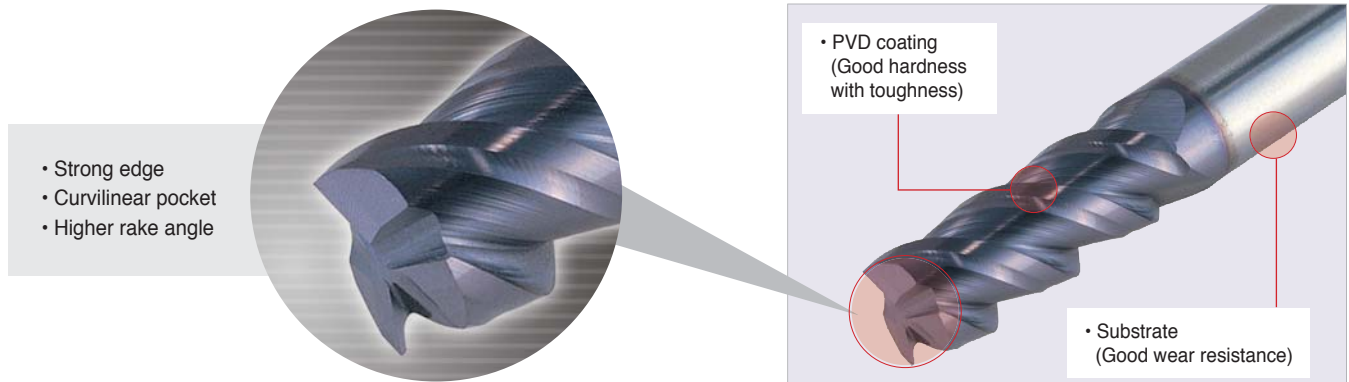

▶ Trouble shooting for Stainless steel machining

Stainless steel machining Work hardening

- Poor surface finish
- High temperature on cutting edge
- Built-up edge
- Shear strength in high temperature
- Difficult chip breaking and controlling

Stainless steel machining Trouble shooting

- Low cutting speed
- Sharp cutting edge
- Coolant for low temperature
- Air blow or coolant for better chip evacuation
- Higher hardness of substrates and coating


Comparison Stainless steel to Carbon steel

Classifications		KS grade	Tensile strength (kgf/mm ²)	Thermal expansion coefficient (10 ⁻⁶ /°C)	Thermal expansion Rate (10 ⁻² cal/cm.s.°C)	Magnetic	Annealing hardening	Hardness (HB)	Machine Ability rate (%)
Carbon steel		SS34 SS41 SM10C SM15C	38~65	11.4	11.2	○	○	110~180	50~70
Stainless steel	Martensite series	STS403 STS410 STS431	~55	9.9~11.7	5.9	○	○	215	50~60
	Ferrite series	STS405 STS430	50~60	10.4	6.4	○	×	183	50~60
	Austenite series	STS301 STS304 STS316	55~65	14.4~16.9	3.8	×	×	187	35~45


Recommended Cutting Condition

Workpiece Condition Diameter(Ø)	Stainless steel STS		Titanium alloy / Inconel		Normal steel (SS, SM) (Under HRC25)		Alloy steel (SCM) (HRC25~35)		Hardened steel (STD) (HRC40~50)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
2	5,500	240	2,600	90	9,000	540	6,000	320	4,000	240
4	4,000	260	2,000	90	6,600	600	4,500	340	3,000	280
6	3,000	360	1,200	90	4,800	720	3,000	360	2,500	280
8	2,000	390	1,000	100	3,600	750	2,200	460	2,000	300
10	1,700	410	800	120	2,800	750	1,800	460	1,500	300
12	1,500	380	700	100	2,400	710	1,500	410	1,200	280
14	1,200	320	600	95	2,200	660	1,300	370	1,000	270
16	1,000	270	500	90	1,800	490	1,100	320	800	230
20	750	250	400	85	900	270	900	270	600	200

Application tip




- Shouldering depth (ap) and radial depth (ae)
 - Normal steel, Alloy steel, Stainless steel
 - Titanium alloy, Inconel, Hardened steel



- Slotting depth(ap)
 - Normal steel, Alloy steel
 - Stainless steel
 - Titanium alloy, Inconel, Hardened steel

IFSE3000 (Flat)

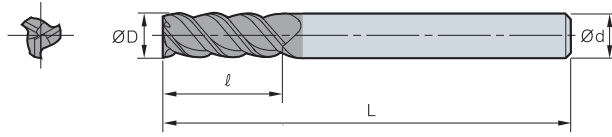

ØD	Tolerance
Ø1 ~ Ø6	-0.01 ~ -0.030
Ø7 ~ Ø10	-0.015 ~ -0.040
Ø11 ~ Ø20	-0.020 ~ -0.050

Designation		ØD	Ød	ℓ	L
IFSE	3030-045	3	6	10	45
	3035-045	3.5	6	10	45
	3040-045	4	6	12	45
	3045-045	4.5	6	12	45
	3050-050	5	6	15	50
	3055-050	5.5	6	15	50
	3060-050	6	6	15	50
	3065-060	6.5	8	20	60
	3070-060	7	8	20	60
	3075-060	7.5	8	20	60
	3080-060	8	8	20	60
	3085-070	8.5	10	20	70
	3090-070	9	10	20	70
	3095-070	9.5	10	20	70
	3100-070	10	10	25	70
	3110-075	11	12	25	75
	3120-075	12	12	30	75
	3130-090	13	16	30	90
	3140-090	14	16	35	90
	3150-090	15	16	40	90
3160-090	16	16	40	90	
3170-100	17	20	40	100	
3180-100	18	20	45	100	
3190-110	19	20	45	110	
3200-110	20	20	45	110	

(mm)

IFSE3000-L-I(V00)

Ex.1) 3 flutes, diameter : 6.3, ℓ : 17, L : 60 - IFSE3063-060-V17

F Technical Information for S⁺ Endmill


Stainless Endmill Series

S⁺ Endmill *New*


- Strong cutting edge ensures long tool life.
- Special coating with high oxidation resistance
- High rake angle and curvilinear chip pocket allow chip evacuation.
- Special cutting edge prevents hardening of tools.
- Optimal machinability in stainless steel machining
- Available for steel, alloy steel and hardening steel machining
- Available for multiple operations
(Shouldering, slotting and ramping etc.)



▶ Application area

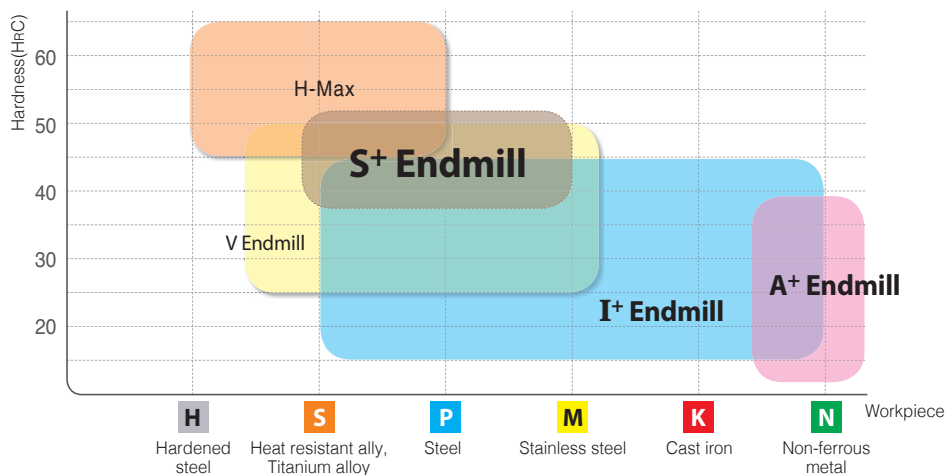

▶ Comparison

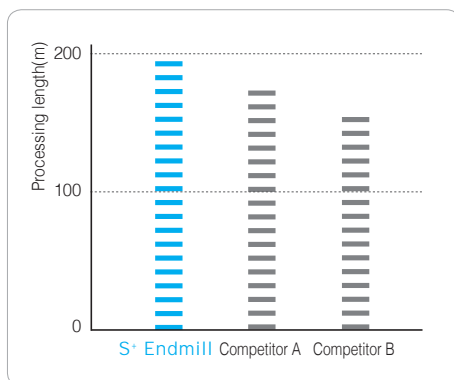

S+ Endmill

Competitor A

Competitor B


- **Workpiece** : STS304
- **Curring condition** : diameter=Ø8.0, n(min⁻¹)=4000, vc(m/min)=100, vf(mm/min)=480, fz(mm/t)=0.04
ap(mm)=8, ae(mm)=0.8, dry
- **Tool** : SPFE4080-060



▶ Recommend Cutting Conditions


Workpiece Condition Diameter(Ø)	Stainless steel STS		Titanium alloy / Inconel		Normal steel(SS, SM) (Under HRC 25)		Alloy steel(SCM) (HRC 25~35)		Hardened steel(STD) (HRC 40~50)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
2	5,500	240	2,600	90	9,000	540	6,000	320	4,000	240
4	4,000	260	2,000	90	6,600	600	4,500	340	3,000	280
6	3,000	360	1,200	90	4,800	720	3,000	360	2,500	280
8	2,000	390	1,000	100	3,600	750	2,200	460	2,000	300
10	1,700	410	800	120	2,800	750	1,800	460	1,500	300
12	1,500	380	700	100	2,400	710	1,500	410	1,200	280
14	1,200	320	600	95	2,200	660	1,300	370	1,000	270
16	1,000	270	500	90	1,800	490	1,100	320	800	230
20	750	250	400	85	900	270	900	270	600	200

● Application tip



■ Shouldering depth (ap) and radial depth (ae)

- Normal steel, Alloy steel, Stainless steel
- Titanium alloy, Inconel, Hardened steel



■ Slotting depth(ap)

- Normal steel, Alloy steel
- Stainless steel
- Titanium alloy, Inconel, Hardened steel

▶ Stainless steel machining


- Low thermal conductivity of stainless steel alloy causes conducting heat to the tool and fracture and chipping.
- Stainless steel alloy machining gets easily wear and high cutting resistance.
- High temperature in stainless steel alloy machining lowers cutting conditions and decrease the quality of surface roughness.

▶ Trouble shooting for stainless steel

- Get low cutting conditions.
- Get deeper ap than the work hardened layer and use tools with sharp cutting edge.
- Use coolant.



SPFE4000 (Standard Flat)

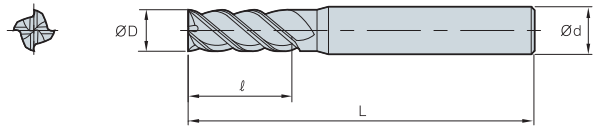


ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02

(mm)

Designation	ØD	Ød	ℓ	L	
SPFE	4010-050	1.0	4	3	50
	4015-050	1.5	4	4	50
	4020-050	2.0	4	6	50
	4025-050	2.5	4	8	50
	4030-050	3.0	4	9	50
	4030-050-S6	3.0	6	9	50
	4040-050	4.0	4	11	50
	4040-050-S6	4.0	6	11	50
	4050-050	5.0	6	13	50
	4060-050	6.0	6	16	50
	4080-060	8.0	8	20	60
	4100-075	10.0	10	30	75
	4120-075	12.0	12	32	75

SPLFE4000 (Long Flat)

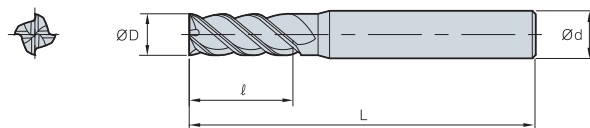

ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02

(mm)

Designation	ØD	Ød	ℓ	L	
SPLFE	4010-050	1.0	4	4	50
	4015-050	1.5	4	6	50
	4020-050	2.0	4	8	50
	4025-050	2.5	4	10	50
	4030-050-S6	3.0	6	12	50
	4040-050-S6	4.0	6	16	50
	4050-060	5.0	6	20	60
	4060-060	6.0	6	24	60
	4080-075	8.0	8	35	75
	4100-100	10.0	10	45	100
	4120-100	12.0	12	45	100




Good chip evacuation

Solid Endmills for Aluminum

- Minimum cutting load and built-up edge
- Good surface finish
- DLC coating
 - Higher hardness(Hv3000-7000), longer tool life comparing uncoated endmill
 - Excellent lubrication by low friction co-efficient ($\mu < 0.1$)
 - Good chip evacuation
- Superior in Aluminum, Aluminum alloys, Copper and Copper alloys




▶ Endmills for Aluminum Code System

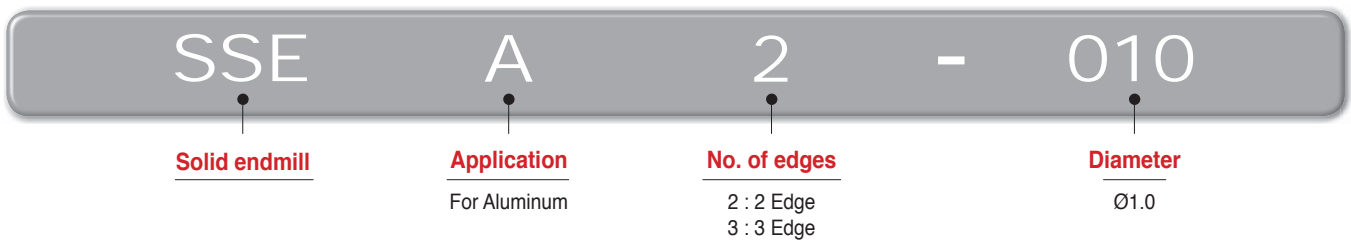


▶ Recommended Cutting Condition (SSEA2000)

Workpiece Condition Diameter(Ø)	Shouldering				Slotting			
	Aluminum alloy (A7075)		Aluminum alloy (cast) (AC4B)		Aluminum alloy (A7075)		Aluminum alloy (cast) (AC4B)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
1	40,000	480	40,000	368	40,000	368	40,000	280
2	40,000	880	38,000	680	38,000	680	32,000	440
3	32,000	1,120	25,000	760	25,000	760	21,000	480
4	24,000	1,200	19,000	800	19,000	800	13,000	520
5	19,000	1,280	15,000	880	15,000	800	13,000	560
6	16,000	1,520	13,000	960	13,000	880	11,000	600
8	12,000	1,520	9,500	960	9,500	960	8,000	640
10	9,500	1,520	7,600	960	7,600	960	6,400	640
12	8,000	1,520	6,400	960	6,400	960	5,300	640
16	6,000	1,520	4,800	960	4,800	800	4,000	576
20	4,800	1,200	3,800	800	3,800	776	3,200	528

● Application tip



- Shouldering depth (ap) and radial depth (ae)
 - $ae \leq 0.2D (D < 3)$
 - $ae \leq 0.5D (D \geq 3)$



- Slotting depth(ap)
 - $ap \leq D (\text{max: } 12\text{mm})$

* Workpiece should be clamped rigidly In case of vibration, reduce RPM and feed rate by the same ratio



▶ Copper & Aluminum machining

1. Built-up edge
2. Low heat resistance could create unnecessary stress or accuracy problem after machining
3. Scratch due to low hardness
4. Low tool life due to flank wear

▶ Trouble shooting for Copper & Aluminum machining

1. Use a higher rake, sharp edge, oil (MQL) mist to decrease cutting load and built-up edge
2. Increase Vc and reduce the depth of cut for a better surface finish

SSEA2000/3000 (Flat)



ØD	Tolerance
Ø1 ~ Ø6	- 0.010 ~ - 0.030
Ø7 ~ Ø10	- 0.015 ~ - 0.040
Ø11 ~ Ø20	- 0.020 ~ - 0.050

(mm)

Designation	ØD	Ød	ℓ	L	Fig.	
SSEA 2	2010	1	6	3	40	1
	2015	1.5	6	4	40	1
	2020	2	6	6	40	1
	2025	2.5	6	7	40	1
	2030	3	6	10	45	1
	2035	3.5	6	10	45	1
	2040	4	6	12	45	1
	2050	5	6	15	50	1
	2060	6	6	15	50	1
	2070	7	8	20	60	1
	2080	8	8	20	60	1
	2090	9	10	20	70	1
	2100	10	10	25	70	1
	2110	11	12	25	75	1
	2120	12	12	30	75	1
	2130	13	16	30	90	1
	2140	14	16	35	90	1
	2150	15	16	40	90	1
	2160	16	16	40	90	1
	SSEA 3	3020	2	6	6	40
3030		3	6	10	45	2
3035		3.5	6	10	45	2
3040		4	6	12	45	2
3050		5	6	15	50	2
3060		6	6	15	50	2
3070		7	8	20	60	2
3080		8	8	20	60	2
3090		9	10	20	70	2
3100		10	10	25	70	2
3110		11	12	25	75	2
3120		12	12	30	75	2
3130		13	16	30	90	2
3140		14	16	35	90	2
3150		15	16	40	90	2
3160		16	16	40	90	2


Special endmills order : SSEA◎◎◎◎-L

Ex.1) 3 flutes, diameter : 6.3.I:17, L : 60 SSEA3063 17-60L

Ex.2) 3 flutes, diameter : 6.3.standard type SSEA3063



SSBEA2000 (Ball)

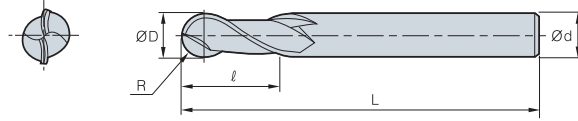

ØD	Tolerance
All	0 ~ -0.03

(mm)

Designation	R	ØD	Ød	ℓ	L
SSBEA 2010	0.5	1	6	3	70
2015	0.75	1.5	6	4	70
2020	1	2	6	6	70
2025	1.25	2.5	6	8	70
2030	1.5	3	6	10	70
2035	1.75	3.5	6	10	70
2040	2	4	6	12	70
2045	2.25	4.5	6	15	80
2050	2.5	5	6	15	80
2055	2.75	5.5	6	15	80
2060	3	6	6	15	80
2065	3.25	6.5	8	20	90
2070	3.5	7	8	20	90
2075	3.75	7.5	8	20	90
2080	4	8	8	20	90
2085	4.25	8.5	10	25	100
2090	4.5	9	10	25	100
2100	5	10	10	25	100
2110	5.5	11	12	30	110
2120	6	12	12	30	110
2130	6.5	13	16	35	120
2140	7	14	16	35	120
2150	7.5	15	16	40	120
2160	8	16	16	40	120
2170	8.5	17	20	40	130
2180	9	18	20	45	130
2190	9.5	19	20	45	130
2200	10	20	20	45	130

Special endmills order : SSBEA2◎◎◎L

Ex.1) 2 flutes, diameter : 6.3.I :17, L : 60 SSBEA3063 17-60L

Ex.2) 2 flutes, diameter : 6.3.standard type SSBEA3063



• Technique of machining Copper/Aluminum steel

1. With high rake angle cutting edge, sharp tools and oil mist, able to minimize cutting load and built-up-edge
2. Applying higher cutting speed and shallower depth, able to make surface finishing and productivity improved

F Technical Information for A⁺ Endmill


Aluminum Endmill Series

A⁺ Endmill *New*


- Exclusive U shaped flute
 - Excellent chip evacuation even in high feed machining
 - U shaped and buffed flute reduces built-up-edge.
- Double relief angle
 - High rigidity of cutting edge ensures high productivity.
- Sharp cutting edge
 - For both roughing and finishing
(Shouldering, slotting and ramping etc.)



▶ Application area

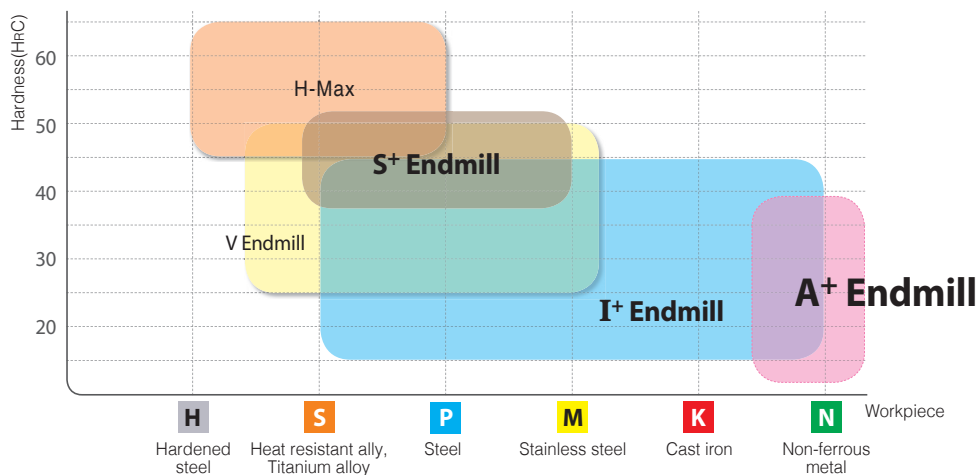

▶ Comparison

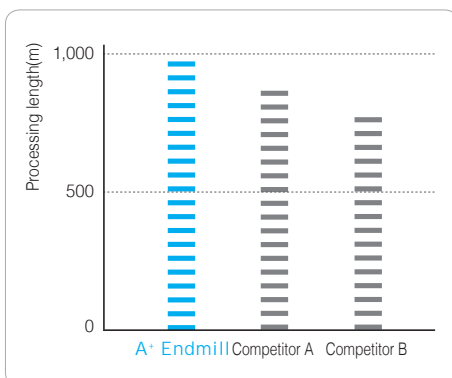

A+ Endmill

Competitor A

Competitor B


- **Workpiece** : A7075
- **Cutting condition** : diameter=Ø8.0, n(min⁻¹)=8000, vc(m/min)=200, vf(mm/min)=1200, fz(mm/t)=0.05
ap(mm)=8, ae(mm)=2.0, wet
- **Tool** : APFE3080-060




▶ Recommend Cutting Conditions

Workpiece Condition Diameter(Ø)	Shouldering				Slotting			
	Aluminum alloy (A7075)		Aluminum alloy (cast) (AC4B)		Aluminum alloy (A7075)		Aluminum alloy (cast) (AC4B)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
1	40,000	480	40,000	368	40,000	368	40,000	280
2	40,000	880	38,000	680	38,000	680	32,000	440
3	32,000	1,120	25,000	760	25,000	760	21,000	480
4	24,000	1,200	19,000	800	19,000	800	13,000	520
5	19,000	1,280	15,000	880	15,000	800	13,000	560
6	16,000	1,520	13,000	960	13,000	880	11,000	600
8	12,000	1,520	9,500	960	9,500	960	8,000	640
10	9,500	1,520	7,600	960	7,600	960	6,400	640
12	8,000	1,520	6,400	960	6,400	960	5,300	640
16	6,000	1,520	4,800	960	4,800	800	4,000	576
20	4,800	1,200	3,800	800	3,800	776	3,200	528

● Application tip



- Shouldering depth (ap) and radial depth (ae)
 - $ae \leq 0.2D (D < 3)$
 - $ae \leq 0.5D (D \geq 3)$



- Slotting depth (ap)
 - $ae \leq 0.2D (D < 3)$
 - $ae \leq 0.5D (D \geq 3)$

- Clamp the workpiece rigidly. In case of vibration, reduce RPM and feed rate by the same ratio.

▶ Aluminum machining

- Built-up edge
- Low heat resistance could create residual stress or inaccuracy after machining.
- Scratch due to low hardness
- Low tool life due to flank wear

▶ Trouble shooting for Aluminum machining

- Use a higher rake, sharp edge and oil (MQL) mist to decrease cutting load and built-up edge.
- Increase Vc and reduce the depth of cut for better surface finish.



APFE2000 / 3000 (Flat) Standard




Fig. 1




Fig. 2



ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02
Ø12.1~Ø20	0.00 ~ -0.03

(mm)

Designation		ØD	Ød	ℓ	L	Fig.
APFE	2025-050	2.5	6	8	50	1
	2030-050	3.0	6	9	50	1
	2040-050	4.0	6	12	50	1
	2050-050	5.0	6	15	50	1
	2060-050	6.0	6	18	50	1
	2080-060	8.0	8	20	60	1
	2100-075	10.0	10	30	75	1
	2120-075	12.0	12	32	75	1
	2160-100	16.0	16	45	100	1
	2200-100	20.0	20	45	100	1
APFE	3025-050	2.5	6	8	50	2
	3030-050	3.0	6	9	50	2
	3040-050	4.0	6	12	50	2
	3050-050	5.0	6	15	50	2
	3060-050	6.0	6	18	50	2
	3080-060	8.0	8	20	60	2
	3100-075	10.0	10	30	75	2
	3120-075	12.0	12	32	75	2
	3160-100	16.0	16	45	100	2
	3200-100	20.0	20	45	100	2



APLFE2000 / 3000 (Long Flat)




Fig. 1

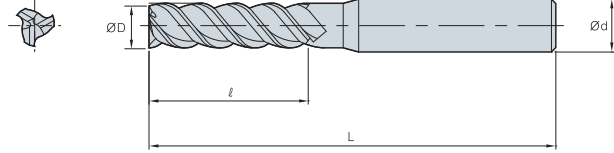


Fig. 2




ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02
Ø12.1~Ø20	0.00 ~ -0.03

(mm)

Designation		ØD	Ød	ℓ	L	Fig.
APLFE 	2030-060	3.0	6	12	60	1
	2040-060	4.0	6	16	60	1
	2050-060	5.0	6	20	60	1
	2060-075	6.0	6	25	75	1
	2080-075	8.0	8	32	75	1
	2100-100	10.0	10	45	100	1
	2120-100	12.0	12	45	100	1
	2160-150	16.0	16	65	150	1
	2200-150	20.0	20	75	150	1
APLFE 	3030-060	3.0	6	12	60	2
	3040-060	4.0	6	16	60	2
	3050-060	5.0	6	20	60	2
	3060-075	6.0	6	25	75	2
	3080-075	8.0	8	32	75	2
	3100-100	10.0	10	45	100	2
	3120-100	12.0	12	45	100	2
	3160-150	16.0	16	65	150	2
	3200-150	20.0	20	75	150	2



APBE2000 (Ball) Standard

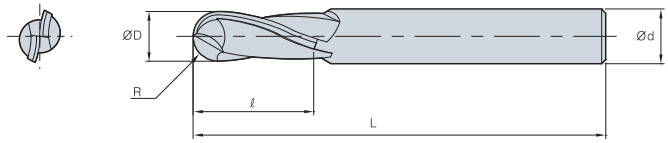


ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02

(mm)

Designation	ØD	Ød	l	L
APBE 2010-050	1.0	4	2	50
2015-050	1.5	4	3	50
2020-050	2.0	4	4	50
2025-050	2.5	4	5	50
2030-050	3.0	4	6	50
2035-050	3.5	4	7	50
2040-050	4.0	4	8	50
2045-050	4.5	6	9	50
2050-050	5.0	6	10	50
2055-050	5.5	6	11	50
2060-050	6.0	6	12	50
2080-060	8.0	8	16	60
2100-075	10.0	10	20	75
2120-075	12.0	12	24	75

APRE3000 (Roughing)

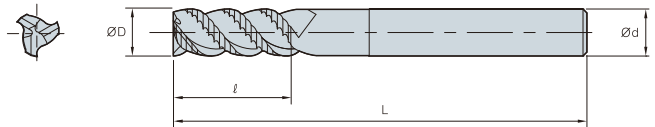

ØD	Tolerance
Ø1~Ø12	0.00 ~ -0.02

(mm)

Designation	ØD	Ød	l	L
APRE 3040-050	4.0	6	8	50
3050-050	5.0	6	13	50
3060-050	6.0	6	15	50
3065-060	6.5	8	16	60
3070-060	7.0	8	16	60
3075-060	7.5	8	20	60
3080-060	8.0	8	20	60
3085-075	8.5	10	20	75
3090-075	9.0	10	20	75
3095-075	9.5	10	22	75
3100-075	10.0	10	25	75
3110-075	11.0	12	30	75
3120-075	12.0	12	30	75
3130-075	13.0	14	30	75
3140-075	14.0	16	32	75
3150-075	15.0	16	32	75
3160-100	16.0	16	35	100
3170-100	17.0	20	35	100
3180-100	18.0	20	35	100
3200-100	20.0	20	45	100
3250-105	25.0	25	50	105




Long tool life and good surface roughness for electrode machining

C-Max (Copper)


- Superior lubricity, wear resistance & chipping resistance due to the K-Silver coating layer and optimal substrate
- Optimal for copper and nonferrous metal machining
- Various line up (ball, flat, radius & long neck type)
- Long tool life and good surface roughness for electrode machining

Optimal cutting edge for copper and nonferrous metals machining



Good quality due to high precision cutting edge

PC210C



► **Coating layer(K-Silver)**
: Enhancing wear resistance and lubrication

► **Substrate**
: Optimal for wear and chipping resistance

▶ Machining example


• Electrode machining

Workpiece : Cu

Cutting condition : $vc=70(m/min)$, $fz=0.083(mm/t)$, $ae=3.0$, $ap=0.6$

Designation : CRE4100-070-R10


• Test result

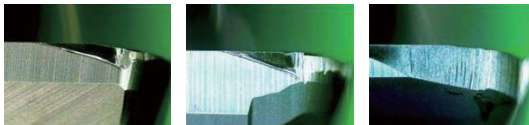

CRE

Competitor A


Competitor B

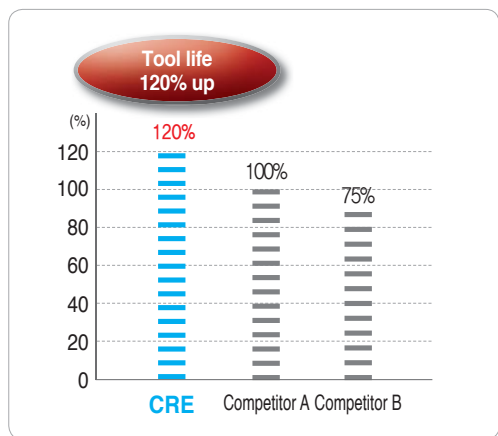


▶ Recommended Cutting Condition

Workpiece	CBE/CBNE		CFE/CFNE		CRE/CRNE	
	Copper Alloys					
Condition Diameter(Ø)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
0.5	40,000	2,600	40,000	1,800		
1	40,000	2,800	40,000	2,000	40,000	2,000
1.5	40,000	3,200	40,000	2,400	30,000	2,400
2	40,000	3,600	30,000	1,800	30,000	1,800
3	40,000	4,000	23,000	1,380	20,000	1,380
4	32,000	3,200	15,000	900	15,000	900
5	25,000	2,500	12,000	750	12,000	750
6	21,000	2,100	10,000	600	10,000	600
8	16,000	1,600	8,000	480	8,000	480
10	13,000	1,300	6,400	384	6,400	384
12	9,000	900	5,400	324	5,400	324


• Application tip



• $ap=0.1D$, $pf=0.2D$




• $ap=1.5D$, $ae=0.1D$



• $ap \leq 1.5D$

• If vibration occurs, please reduce R.P.M and feed rate at the same rate

CFE2000 (Flat)




ØD	Tolerance
Ø0.5-Ø6	0 ~ 0.01
Ø8-Ø12	0 ~ 0.02

(mm)

Designation	ØD	Ød	ℓ	L
CFE 2010-040	1	4	2.5	40
2015-040	1.5	4	4	40
2020-045	2	4	5	45
2030-045	3	6	8	45
2040-050	4	6	11	50
2050-060	5	6	13	60
2060-060	6	6	13	60
2080-060	8	8	19	60
2100-070	10	10	22	70
2120-075	12	12	26	75

CFNE2000 (Long Neck Flat)




ØD	Tolerance
Ø0.5-Ø6	0 ~ 0.01
Ø8-Ø12	0 ~ 0.02

(mm)

Designation	ØD	Ød	ℓ ₁	ℓ ₂	L
CFNE 2005-045-N2	0.5	4	0.8	2	45
2005-045-N4	0.5	4	0.8	4	45
2005-045-N6	0.5	4	0.8	6	45
2005-050-N8	0.5	4	0.8	8	50
2010-045-N4	1	4	1.5	4	45
2010-045-N6	1	4	1.5	6	45
2010-050-N8	1	4	1.5	8	50
2010-050-N10	1	4	1.5	10	50
2015-045-N6	1.5	4	2.3	6	45
2015-050-N8	1.5	4	2.3	8	50
2015-050-N10	1.5	4	2.3	10	50
2015-050-N12	1.5	4	2.3	12	50
2020-045-N6	2	4	3	6	45
2020-050-N8	2	4	3	8	50
2020-050-N10	2	4	3	10	50
2020-050-N12	2	4	3	12	50
2030-050-N10	3	4	4.5	10	50
2030-050-N12	3	4	4.5	12	50
2030-060-N14	3	4	4.5	14	60
2030-060-N16	3	4	4.5	16	60
2040-050-N12	4	6	6	12	50
2040-050-N16	4	6	6	16	50
2040-060-N20	4	6	6	20	60



CBE2000 (Ball)




ØD	Tolerance	R Tolerance
Ø0.5~Ø6	0 ~ 0.01	±0.005
Ø8~Ø12	0 ~ 0.02	±0.005

(mm)

Designation	R	ØD	Ød	ℓ	L
CBE 2010-050	0.5	1	1	4	50
2015-050	0.75	1.5	1.5	4	50
2020-050	1	2	2	4	50
2030-060	1.5	3	3	6	60
2040-070	2	4	4	6	70
2050-080	2.5	5	5	6	80
2060-080	3	6	6	6	80
2080-090	4	8	8	8	90
2100-100	5	10	10	10	100
2120-110	6	12	12	12	110

CBNE2000 (Long Neck Ball)




ØD	Tolerance
Ø0.5~Ø6	0 ~ 0.01
Ø8~Ø12	0 ~ 0.02

(mm)

Designation	R	ØD	Ød	ℓ ₁	ℓ ₂	L
CBNE 2005-045-N2	0.25	0.5	4	0.5	2	45
2005-045-N4	0.25	0.5	4	0.5	4	45
2005-045-N6	0.25	0.5	4	0.5	6	45
2005-050-N8	0.25	0.5	4	0.5	8	50
2010-045-N4	0.5	1	4	1	4	45
2010-045-N6	0.5	1	4	1	6	45
2010-050-N8	0.5	1	4	1	8	50
2010-050-N10	0.5	1	4	1	10	50
2015-050-N8	0.75	1.5	4	1.5	8	50
2015-050-N10	0.75	1.5	4	1.5	10	50
2015-050-N12	0.75	1.5	4	1.5	12	50
2015-055-N14	0.75	1.5	4	1.5	14	55
2020-050-N8	1	2	4	2	8	50
2020-050-N10	1	2	4	2	10	50
2020-050-N12	1	2	4	2	12	50
2020-055-N14	1	2	4	2	14	55
2030-050-N10	1.5	3	4	3	10	50
2030-050-N12	1.5	3	4	3	12	50
2030-055-N14	1.5	3	4	3	14	55
2030-055-N16	1.5	3	4	3	16	55
2040-060-N16	2	4	6	4	16	60
2040-060-N20	2	4	6	4	20	60
2040-070-N25	2	4	6	4	25	70
2040-070-N30	2	4	6	4	30	70



CRE2000 (Radius)




ØD	Tolerance	R Tolerance
Ø0.5-Ø6	0 ~ 0.01	±0.005
Ø8-Ø12	0 ~ 0.02	±0.005

(mm)

Designation		r	ØD	Ød	ℓ	L
CRE	2020-045-R05	0.5	2	4	5	45
	2030-045-R05	0.5	3	6	8	45
	2040-050-R05	0.5	4	6	11	50
	2050-060-R05	0.5	5	6	13	60
	2060-060-R05	0.5	6	6	13	60
	2080-060-R10	1	8	8	19	60
	2100-070-R10	1	10	10	22	70
	2120-075-R10	1	12	12	26	75

CRNE2000 (Long Neck Radius)



ØD	Tolerance	R Tolerance
Ø0.5-Ø6	0 ~ 0.01	±0.005
Ø8-Ø12	0 ~ 0.02	±0.005

(mm)


Designation		r	ØD	Ød	ℓ ₁	ℓ ₂	L
CRNE	2010-045-R02N4	0.2	1	4	1.5	4	45
	2010-045-R02N6	0.2	1	4	1.5	6	45
	2010-050-R02N8	0.2	1	4	1.5	8	50
	2010-050-R02N10	0.2	1	4	1.5	10	50
	2015-045-R02N6	0.2	1.5	4	2.3	6	45
	2015-050-R02N8	0.2	1.5	4	2.3	8	50
	2015-050-R02N10	0.2	1.5	4	2.3	10	50
	2015-050-R02N12	0.2	1.5	4	2.3	12	50
	2020-045-R05N6	0.5	2	4	3	6	45
	2020-050-R05N8	0.5	2	4	3	8	50
	2020-050-R05N10	0.5	2	4	3	10	50
	2020-050-R05N12	0.5	2	4	3	12	50
	2030-050-R05N10	0.5	3	4	4.5	10	50
	2030-050-R05N12	0.5	3	4	4.5	12	50
	2030-060-R05N14	0.5	3	4	4.5	14	60
	2030-060-R05N16	0.5	3	4	4.5	16	60
	2040-050-R05N12	0.5	4	6	6	12	50
	2040-050-R05N16	0.5	4	6	6	16	50
	2040-060-R05N20	0.5	4	6	6	20	60




Unique diamond coating technology

D-Max


- Unique diamond coating technology
- Good surface roughness through improved endmill geometry and ultra fine substrate
- Wide cutting area from intermittent cutting to high precision cutting
- 10~20 times longer tool life than uncoated carbide endmill

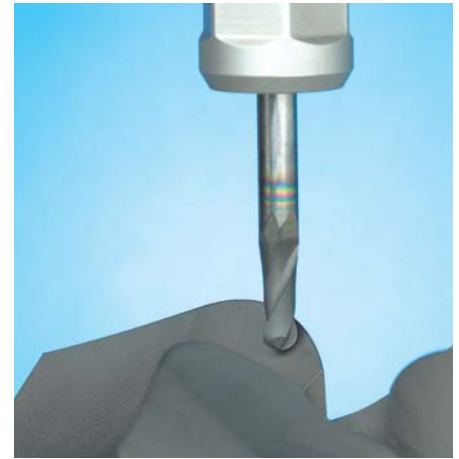

Coating and Endmill geometry

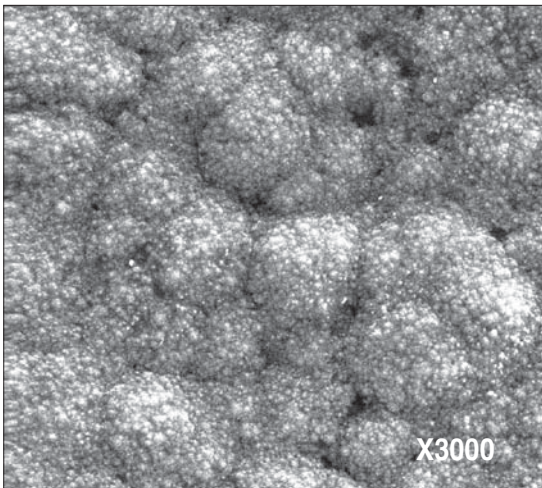

ND3000 Coated


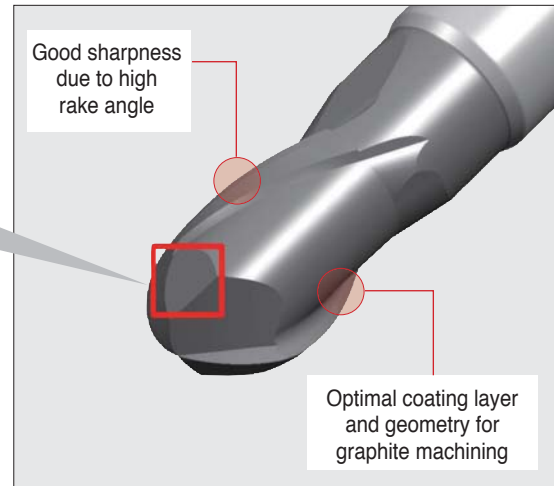


Machining example

• Test result

Workpiece: graphite

Cutting condition : $n=16,000(\text{mim}^{-1})$ $vf=2,6000(\text{mm}/\text{min})$ $ap=1.5\text{mm}$ $ae=0.6\text{mm}$

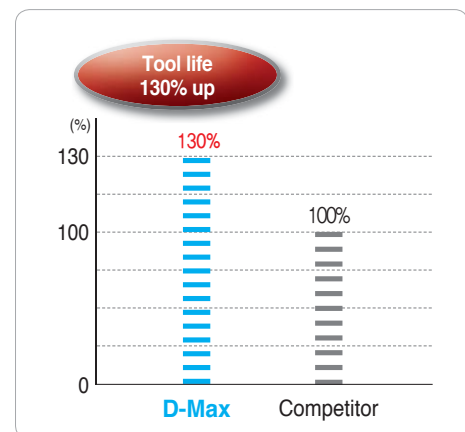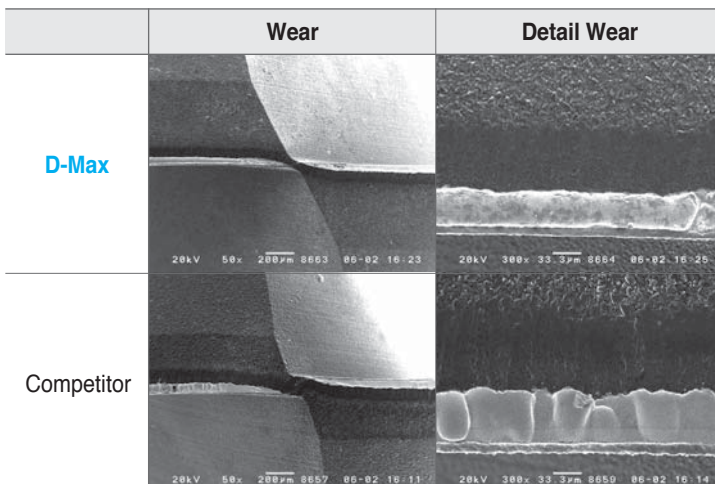

▶ Recommended Cutting Condition (DFE2000 Flat)

Workpiece Condition Diameter(Ø)	Graphite		Aluminum alloys		Copper alloys	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
3	21,000	1,280	21,000	670	21,000	640
4	16,000	1,180	16,000	670	16,000	640
6	10,500	1,180	10,500	670	10,500	560
8	8,000	1,080	8,000	600	8,000	540


▶ Recommended Cutting Condition (DBE2000 Ball)

Workpiece Condition Diameter(Ø)	Graphite		Aluminum alloys		Copper alloys	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
4	15,000	1,900	15,900	1,550	11,900	1,150
6	15,000	1,900	10,500	1,550	7,950	1,150
8	13,900	1,900	7,950	1,550	5,950	1,150


▶ Recommended Cutting Condition (DRE2000 Radius)

Workpiece Condition Diameter(Ø)	Graphite		Aluminum alloys		Copper alloys	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
4	13,990	1,180	15,900	670	11,990	640
6	13,900	1,180	10,500	670	7,950	560
8	10,000	1,080	7,950	600	5,950	540


● Application tip



- **Graphite**
ap=1.5D, ae=0.1D
- **Aluminum alloys**
ap=1.5D, pf=0.1D
- **Copper alloys**
ap=1.5D, pf=0.1D




- **Graphite**
ap=0.5D, pf=0.1D
- **Aluminum alloys**
ap=0.5D, pf=0.1D
- **Copper alloys**
ap=0.5D, pf=0.1D



- **Graphite**
ap=0.1D
- **Aluminum alloys**
ap=0.1D
- **Copper alloys**
ap=0.1D


DBE2000 (Ball)

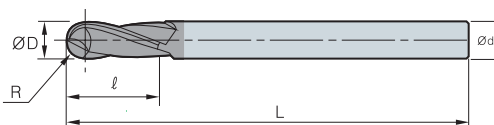

Designation		R	ØD	Ød	ℓ	L
DBE	2040-070	2	4	6	12	70
	2060-080	3	6	6	15	80
	2080-090	4	8	8	20	90

(mm)


DFE2000 (Flat)



Designation		ØD	Ød	ℓ	L
DFE	2030-045	3	6	10	45
	2040-045	4	6	12	45
	2060-050	6	6	15	50
	2080-060	8	8	20	60

(mm)

DRE2000 (Radius)

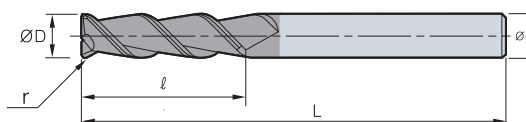

Designation		r	ØD	Ød	ℓ	L
DRE	2040-045-R05	0.5	4	6	5	45
	2060-050-R05	0.5	6	6	7	50
	2080-060-R10	1	8	8	9	60

(mm)

F Technical Information for PCD Endmill


Longer tool life and good surface finishes

PCD Endmills

- Longer tool life and good surface roughness
- Reducing burrs at nonferrous metals machining
- 1000 series : Ultra finishing for nonferrous metals
- 2000 series : Optimal for aluminum alloy, carbon steel, graphite and reinforced Plastic machining



▶ PCD Endmill Code System

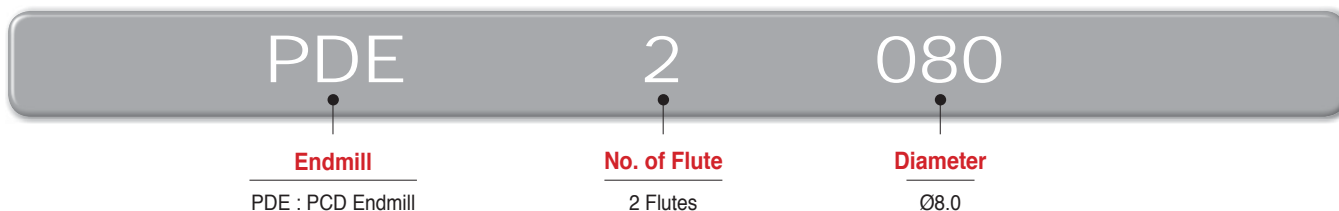

▶ Recommended Cutting Condition

Work piece	vc(m/min)	n(min ⁻¹)	fz(mm/t)
Aluminum Alloy, Copper	30~300	2,000~12,000	0.02~0.07
Reinforced Plastic	35~300	2,800~16,000	0.04~0.12
Carbon steel, Graphite	10~100	5,300~16,000	0.04~0.2

Special Endmill Order Form

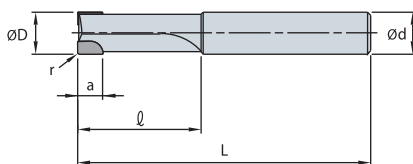


Fig.1

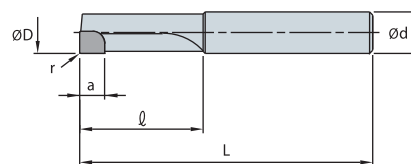



Fig.2

Designation	Fig.	No. of Flute	Dimension (mm)					
			ØD	Ød	r	a	ℓ	L
PDES								

※ Depending on customer requests, we can make special Endmill



PDE 1000/2000 (Flat)



1

2



PCD

Substrate
DP200

(mm)

	Designation	ØD	Ød	ℓ	L
PDE	1040	4	6	15	45
1	1050	5	6	15	50
	1060	6	6	20	60
2	2060	6	8	20	60
	2070	7	8	20	60
	2080	8	8	20	60
	2090	9	10	25	70
	2100	10	10	25	70
	2120	12	12	25	75


F Technical Information for Brazed Endmill

High precision machining with our high stiffness design

Brazed Endmills


- Possible to machine with high precision due to high stiffness design
- High speed cutting by increasing wear resistance, decreasing frictional resistance through PVD coating and substrate
- Long tool life due to absorbing impact through brazed body in heavy interruption
- General steel, Alloy steel, mild steel, dice steel, stainless steel, cast iron, ductile cast iron
- ZSEA: Aluminum, Aluminum alloy, Cooper, Cooper alloy, Non-ferrous materials
- Coating brazed endmills (special)
Guaranteed long tool life due to high new-concept hardness and oxidation resistant coating

▶ PC221F Coating

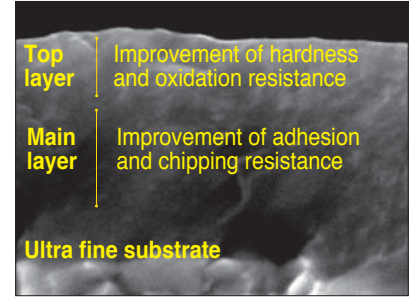


New PVD films
New hardness and oxidation resistance coating

▶ Brazed Endmills Code System

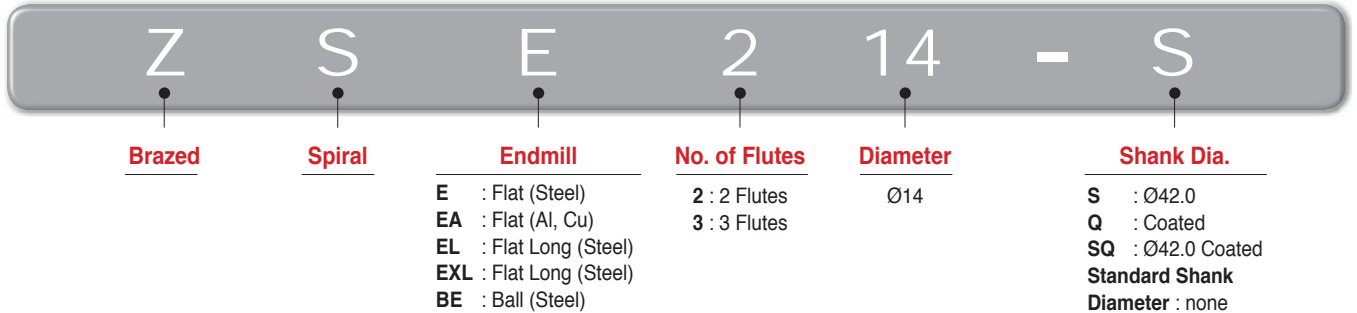

▶ Wear resistance test (W.P:STD61)

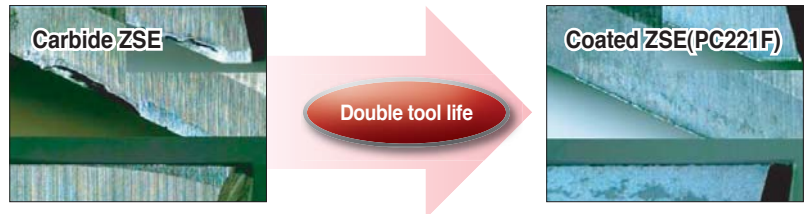


▶ Recommended Cutting Condition (ZSE200 Flat)

Workpiece Condition Diameter(Ø)	SM50C,SCM,GC (~HRC30)		STD61,STD11 (HRC30~45)		STD61 (HRC45~55)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
20	1,600	152	950	88	560	44
25	1,300	136	750	72	450	36
30	1,100	120	650	64	370	32
40	800	96	500	56	280	24
50	650	88	400	48	220	20


▶ Recommended Cutting Condition (ZSE400 Flat)

Workpiece Condition Diameter(Ø)	SM50C,SCM,GC (~HRC30)		STD61,STD11 (HRC30~45)		STD61 (HRC45~55)	
	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)	R.P.M n(min ⁻¹)	Feed vf(mm/min)
20	1,600	230	950	133	560	66
25	1,300	205	750	109	450	54
30	1,100	180	650	96	370	48
40	800	145	500	85	280	36
50	650	135	400	72	220	30

• Application tip



- Side milling (under HRC45)
· ap ≤ 1.5D · ae ≤ 0.1D





- Side milling (over HRC45)
· ap ≤ 1D(Max : 1mm)

- Above table based on side milling, when it enters to ae direction, you should apply reduced cutting condition
- When it enters to ae direction, for finishing you should increase revolution speed and feed in the table



ZSE200/300 (Flat)

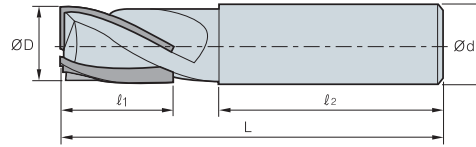

ØD	Tolerance
All	0 ~ - 0.050

(mm)



Designation	ØD	Ød	l ₁	l ₂	L
ZSE 214	14	16	28	57	95
215	15	16	28	57	95
216(Q)	16	16	28	55	95
217	17	20	30	70	115
218	18	20	30	70	115
219	19	20	30	70	115
220(Q)	20	20	30	70	115
221	21	20	35	65	115
222	22	20	35	65	115
223	23	25	35	75	125
224	24	25	35	75	125
225	25	25	35	75	125
226(Q)	26	25	35	75	125
227	27	25	35	75	125
228	28	25	35	75	125
229	29	32	40	95	150
230(Q)	30	32	40	95	150
231	31	32	40	95	150
232	32	32	45	90	150
233	33	32	45	90	150
234	34	32	50	85	150
235	35	32	50	85	150
236	36	32	50	85	150
237	37	32	55	80	150
238	38	32	55	80	150
238S	38	42	55	80	150
240(Q)	40	32	60	75	150
240S	40	42	60	75	150
242	42	32	60	75	150
244	44	32	65	80	160
245	45	32	65	80	160
245S	45	42	65	80	160
247	47	32	65	80	160
248	48	32	65	80	160
248S	48	42	65	80	160
250	50	32	65	80	160
250S	50	42	65	80	160
ZSE 314	14	16	28	57	95
315	15	16	28	57	95
316	16	16	28	55	95
317	17	20	30	70	115
318	18	20	30	70	115
319	19	20	30	70	115
320	20	20	30	70	115
322	22	20	35	65	115
325	25	25	35	75	125
326	26	25	35	75	125
328	28	25	35	75	125
330	30	32	40	95	150
331	31	32	40	95	150

Special Endmills order : ZSE○○○○○-L

Ex.1) 2 flutes, diameter : 6.3, l : 10, L : 60 ZSBE2063 10-60L




Ex.2) 2 flutes, diameter : 6.3, standard type ZSE2063

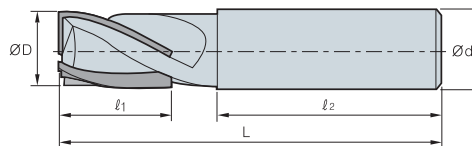ZSE 300/400/600 (Flat)



ØD	Tolerance
All	0 ~ -0.050

(mm)

	Designation	ØD	Ød	l ₁	l ₂	L
ZSE 	332	32	32	45	90	150
	333	33	32	45	90	150
	334	34	32	50	85	150
	335	35	32	50	85	150
	338	38	32	55	80	150
	338S	38	42	55	80	150
	340	40	32	60	75	150
	340S	40	42	60	75	150
	342	42	32	60	75	150
	345	45	32	65	80	160
	345S	45	42	65	80	160
	350	50	32	65	80	160
	350S	50	42	65	80	160
	ZSE 	414	14	16	28	57
415		15	16	28	57	95
416(Q)		16	16	28	55	95
417		17	20	30	70	115
418		18	20	30	70	115
419		19	20	30	70	115
420(Q)		20	20	30	70	115
421		21	20	35	65	115
422		22	20	35	65	115
423		23	25	35	75	125
424		24	25	35	75	125
425(Q)		25	25	35	75	125
426		26	25	35	75	125
427		27	25	35	75	125
428		28	25	35	75	125
429		29	32	40	95	150
430		30	32	40	95	150
432(Q)		32	32	45	90	150
435		35	32	50	80	150
438		38	32	55	85	150
438S		38	42	55	85	150
440(Q)	40	32	60	75	150	
440S	40	42	60	75	150	
445	45	32	65	80	160	
445S	45	42	65	80	160	
450	50	32	65	80	160	
450S	50	42	65	80	160	
ZSE 	634	34	32	50	85	150
	635	35	32	50	85	150
	638	38	32	55	80	150
	638S	38	42	55	80	150
	640	40	32	60	75	150
	640S	40	42	60	75	150
	645	45	32	65	80	160
	645S	45	42	65	80	160
	650	50	32	65	80	160
	650S	50	42	65	80	160


Special Endmills order : ZSE○○○○○L

Ex.1) 2 flutes, diameter : 6.3, l : 10, L : 60 ZSBE2063 10-60L

Ex.2) 2 flutes, diameter : 6.3, standard type ZSE2063



ZSEA200 (Flat)

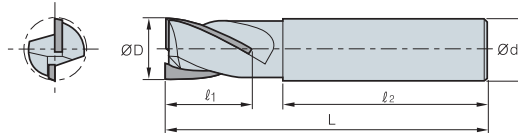


ØD	Tolerance
All	0 ~ - 0.050

(mm)

Designation	ØD	Ød	l ₁	l ₂	L
ZSEA 215	15	16	28	57	95
216	16	16	28	55	95
218	18	20	30	70	115
219	19	20	30	70	115
220	20	20	30	70	115
221	21	20	35	65	115
222	22	20	35	65	115
223	23	25	35	75	125
224	24	25	35	75	125
225	25	25	35	75	125
228	28	25	35	75	125
230	30	32	40	95	150
232	32	32	45	90	150
238	38	32	55	80	150
240	40	32	60	75	150
250	50	32	65	80	160

ZSEL, ZSEXL (Flat)

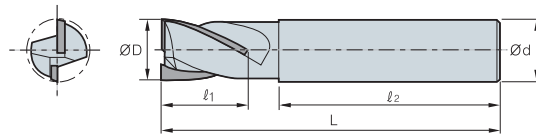


ØD	Tolerance
All	0 ~ - 0.050

(mm)

Designation		ØD	Ød	l ₁	l ₂	L
ZSEL 2	214	14	16	50	55	120
	216	16	16	50	55	120
	218	18	20	60	65	140
	220	20	20	60	65	140
	222	22	20	60	65	140
	225	25	25	70	65	150
	230	30	32	80	85	180
	232	32	32	90	85	190
	235	35	32	100	85	200
	240	40	42	100	105	220
ZSEL 4	245	45	42	120	95	230
	250	50	42	120	95	230
	416	16	16	50	55	120
	420	20	20	60	65	140
	425	25	25	70	65	150
	430	30	32	80	85	180
	435	35	32	100	85	200
ZSEXL 2	440	40	42	100	105	220
	220	20	20	120	65	200
	222	22	20	120	65	200
	225	25	25	140	65	220



ZSBE200 (Ball)

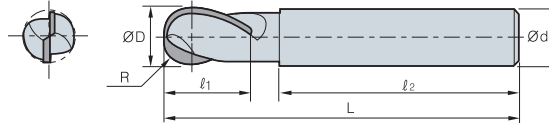

ØD	Tolerance
All	0 ~ - 0.050

Designation		R	ØD	Ød	l ₁	l ₂	L
ZSBE	213	6.5	13	16	30	60	100
	214	7	14	16	30	65	100
	215	7.5	15	16	35	55	100
	216Q	8	16	16	35	55	100
	217	8.5	17	20	35	65	110
	218	9	18	20	35	65	110
	219	9.5	19	20	35	65	110
	220Q	10	20	20	35	65	110
	221	10.5	21	20	35	65	110
	222	11	22	20	35	65	110
	223	11.5	23	25	40	65	120
	224	12	24	25	40	70	120
	225	12.5	25	25	40	70	120
	230	15	30	32	40	70	130
	231	15.5	31	32	40	80	130
	232	16	32	32	50	75	140
	233	16.5	33	32	50	75	140
	234	17	34	32	50	85	150
	235	17.5	35	32	50	85	150
	235S	17.5	35	42	50	85	150
	236	18	36	32	50	85	150
	236S	18	36	42	50	85	150
	237	18.5	37	32	50	95	160
	237S	18.5	37	42	50	95	160
	238	19	38	32	50	95	160
	238S	19	38	42	50	95	160
	239	19.5	39	32	50	95	160
	239S	19.5	39	42	50	95	160
	240	20	40	32	50	95	160
	240S	20	40	42	50	95	160
	245	22.5	45	32	50	105	170
	245S	22.5	45	42	50	105	170
250	25	50	32	50	105	170	
250S	25	50	42	50	105	170	

• **ZSBE200**

Special Endmills order : ZSBE200-I-L
 Ex.1) 2 flutes diameter : 6.3 l: 10 L: 60 ZSBE 206310-60L
 Ex.2) 2 flutes, diameter : 6.3, standard type ZSBE2063

• **ZSEA200**


Special Endmills order : ZSEA200-I-L
 Ex.1) 2 flutes, diameter : 16.3, l:28, L:95 ZSEA2163 28-95L
 Ex.2) 2 flutes, diameter : 17.0, standard type ZSEA2170

• **ZSEL200/400, ZSEXL200**


Special Endmills order : ZSEL200-I-L




F Special Endmill order form

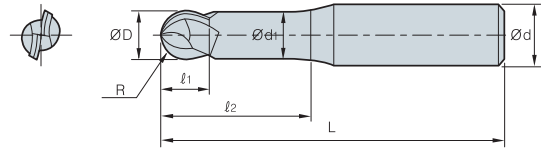


Designation	Flute	R	ØD	Ød	Ød ₁	l ₁	l ₂	L
-------------	-------	---	----	----	-----------------	----------------	----------------	---

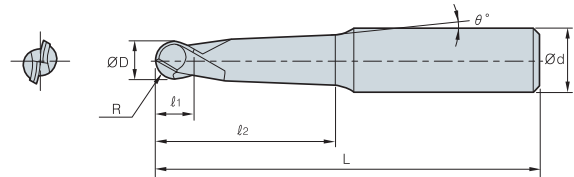


Designation	Flute	R	ØD	Ød	l ₁	l ₂	L	θ°
-------------	-------	---	----	----	----------------	----------------	---	----

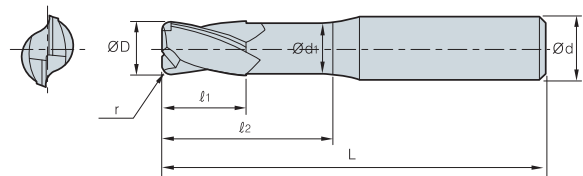

Designation	Flute	ØD	Ød	Ød ₁	r	l ₁	l ₂	L
-------------	-------	----	----	-----------------	---	----------------	----------------	---

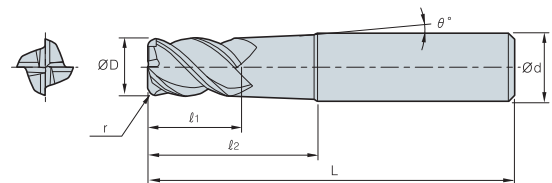

Designation	Flute	ØD	r	Ød	l ₁	l ₂	L	θ°
-------------	-------	----	---	----	----------------	----------------	---	----

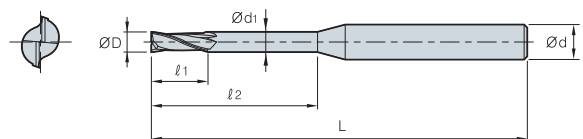

Designation	Flute	ØD	Ød	Ød ₁	l ₁	l ₂	L
-------------	-------	----	----	-----------------	----------------	----------------	---





G

DRILLS

Korloy drills provides total solutions in hole making based on development, research and tooling know-how.



Technical Information for Drills

- G02 KRLOY Drills
- G04 Available Insert

Indexable Drills
















- G06 Technical Information for KING DRILL
- G12 KING DRILL
- G21 Technical information of KING DRILL
(for through coolant system with a lathe)
- G22 King drill(for through coolant system with a lathe)
- G25 Technical Information for KING DRILL
(for large diameter drilling)
- G26 King Drill for large diameter drilling
- G27 Technical Information for TPDC
- G31 TPDC
- G30 TPDC Available Insert
- G32 Technical Information for TPDB
- G35 TPDB Available Insert
- G36 TPDB
- G39 Technical Information for WPDC
- G42 Center Drill
- G43 WPDC

Solid Drills
















- G45 Technical Information for Mach Drill plus
- G47 Mach Drill plus
- G52 Technical Information for Mach Drill
- G56 Mach Drill
- G64 Technical Information for Mach long Drill plus
- G66 Mach long Drill plus
- G69 Technical Information for Mach long Drill
- G71 Mach long Drill
- G72 Mach step Drills Order Form
- G73 Technical Information for Vulcan Drill
- G74 Vulcan Drill
- G76 Technical Information for Carbide Drill
- G77 Carbide Drill
- G79 Burnishing Drill
- G80 Top solid Drill
- G81 PCD Drill
- G82 Technical Information for Gun Drill
- G86 Gun Drill

Reamer





















- G88 Technical Information for Indexable Reamer
- G91 Available Insert for Indexable Reamer
- G92 Indexable Reamer
- G94 Chucking / Machine Reamer
- G97 PCD Reamer
- G98 Cermet Reamer
- G99 Broach Reamer

Type	Designation		Shape	Drills Dia.	Aspect ratio	Page
Indexable Drills	KING-DRILL <i>New</i>	K□D	 Available Insert : SP□T, XO□T	Ø12.0~Ø60.5	2D~5D	G12 ~ G20
	KING-DRILL HP <i>New</i>	K□D..HP	 Available Insert : SP□T, XO□T	Ø12.0~Ø60.5	2D~5D	G22 ~ G24
	KING-DRILL <i>New</i> (for large diameter drilling)	K□D	 Available Insert : SP□T, XO□T	Ø61.0~Ø100.0	2D~4D	G26
	TPDC <i>New</i>	TPDC	 Available Insert : TP□□□□CP	Ø12.0~Ø19.99	3D~8D	G27 ~ G31
	TPDB	TPDB	 Available Insert : TP□□□□B	Ø61.0~Ø100.0	3D~8D	G36 ~ G38
	Indexable Drills & Drill with center	WPDC	 Available Insert : WC□T	Ø25.0~Ø80.0	5D~8D	G43 ~ G44
Solid Drills	Mach Drill Plus <i>New</i>	MSDP		Ø1.0~Ø20.0	3D~7D	G47
		MSDP(H)		Ø2.5~Ø20.0	3D~7D	G48 ~ G51
	Mach Drill	MSD		Ø2.5~Ø20.0	3D~7D	G56 ~ G59
		MSDH		Ø2.5~Ø20.0	3D~7D	G60 ~ G63
	Mach long Drill Plus <i>New</i>	MLD□□□□N		Ø3.0~Ø10.0	10D~25D	G66 ~ G68
	Mach long Drill	MLDP		Ø3.0~Ø10.0	-	G71
		MLD		Ø3.0~Ø10.0	10D~25D	G71
	Vulcan Drill	VZD		Ø12.6~Ø40.5	2.5D, 5D	G74 ~ G75
	Carbide Drill	SSD		Ø1.0~Ø15.0	-	G77 ~ G78



Type	Designation		Shape	Drills Dia.	Aspect ratio	Page
Solid Drills	Burnishing Drill	BDS		Ø4.0~Ø16.0	5D~7D	G79
		BDT		Ø4.2~Ø10.3	2D~4D	G79
	Top solid Drill	TSDM		Ø8.0~Ø25.0	5D~8D	G80
	PCD Drill	PDD		Ø5.0~Ø12.0	5D	G81
	Gun Drill	KGDS		Ø2.0~Ø33.0	50D~100D	G86
		KGDT		Ø6.0~Ø26.5	50D~100D	G87
Reamer	Indexable Reamer	IRT	 Available Insert : RI	Ø10.0~Ø31.0	3D~5D	G92
		IRB	 Available Insert : RI	Ø10.0~Ø31.0	3D~5D	G93
	Chucking / Machine Reamer	SCRS		Ø5.0~Ø20.0	2D~3D	G95
		SCRH		Ø5.0~Ø20.0	2D~3D	G95
		TCRS		Ø7.0~Ø30.0	2D~3D	G96
		TMRS		Ø7.0~Ø30.0	3D~5D	G96
	PCD Reamer	PDR		Ø5.0~Ø20.0	3D~5D	G97
	Cermet Reamer ^{New}	KCR		Ø6.0~Ø30.0	3D~7D	G98
	Broach Reamer ^{New}	HBRE		Ø3.0~Ø25.0	3D~7D	G99

















Available Insert

Picture	Designation	Coated										Uncoated		Dimensions (mm)					Geometry	Page
		NC3120	NC3030	NC5330	PC5300	PC3530	PC3535	PC3500	NCM325	PC9530	NCM335	PC6510	H01	G10E	l	d	t	r		
	040203-DF													6.2	4.7	2.4	0.3	2.3		
	222408-DA													8.3	8.2	2.5	0.8	2.8		
	252808-DA													9.3	9.2	3.3	0.8	3.4		
	293208-DA													10.3	10.2	3.3	0.8	3.4		
	334008-DA													13	12.9	3.97	0.8	4.0		
	415008-DA													15.3	15.2	4.76	0.8	4.5		
	516012-DA													18.3	18.2	5.18	1.2	5.5		
	222408-DR													8.3	8.2	2.5	0.8	2.8		
	252808-DR													9.3	9.2	3.3	0.8	3.4		
	293208-DR													10.3	10.2	3.3	0.8	3.4		
	334008-DR													13	12.9	3.97	0.8	4.0		
	415008-DR													15.3	15.2	4.76	0.8	4.5		
	516012-DR													18.3	18.2	5.18	1.2	5.5		
	222408-DM													8.3	8.2	2.5	0.8	2.8		
	252808-DM													9.3	9.2	3.3	0.8	3.4		
	293208-DM													10.3	10.2	3.3	0.8	3.4		
	334008-DM													13	12.9	3.97	0.8	4.0		
	415008-DM													15.3	15.2	4.76	0.8	4.5		
	516012-DM													18.3	18.2	5.18	1.2	5.5		
	222408-DS													8.3	8.2	2.5	0.8	2.8		
	252808-DS													9.3	9.2	3.3	0.8	3.4		
	293208-DS													10.3	10.2	3.3	0.8	3.4		
	334008-DS													13	12.9	3.97	0.8	4.0		
	415008-DS													15.3	15.2	4.76	0.8	4.5		
	516012-DS													18.3	18.2	5.18	1.2	5.5		
	050203-DA													5.3	-	2.4	0.3	2.3		
	060204-DA													6.2	-	2.5	0.4	2.5		
	070204-DA													7.2	-	2.5	0.4	2.8		
	050203-DF													5.3	-	2.4	0.3	2.3		
	060204-DF													6.2	-	2.5	0.4	2.5		
	070204-DF													7.2	-	2.5	0.4	2.8		
	050203-DM													5.3	-	2.4	0.3	2.3		
	060204-DM													6.2	-	2.5	0.4	2.5		
	070204-DM													7.2	-	2.5	0.4	2.8		
	050203-DS													5.3	-	2.4	0.3	2.3		
	060204-DS													6.2	-	2.5	0.4	2.5		
	070204-DS													7.2	-	2.5	0.4	2.8		
	040204-ND											●		4.7	-	2.4	0.4	2.3		G12 ~ G24
	050204-ND											●		5.1	-	2.4	0.4	2.3		
	060205-ND											●		6.2	-	2.5	0.5	2.5		
	07T208-ND											●		7.5	-	2.8	0.7	2.8		
	090308-ND											●		9.2	-	3.3	0.8	3.4		
	11T308-ND											●		11.0	-	4.0	0.8	4.0		
	130410-ND											●		13.0	-	4.5	1.0	4.5		
	15M510-ND											●		15.2	-	5.0	1.0	5.5		
	180510-ND											●		18.2	-	5.5	1.0	6.0		

● : Stock Item



▶ Available Insert

Picture	Designation	Coated										Uncoated		Dimensions (mm)					Geometry	Page	
		NC3120	NC3220	NC3030	NC5330	PC5300	PC5335	PC3530	PC3500	NCM325	PC9530	NCM335	PC6510	H01	G10E	l	d	t			r
	060205-LD						●								6.2	-	2.5	0.5	2.5		G12 ~ G24
	07T208-LD						●								7.5	-	2.8	0.7	2.8		
	090308-LD						●								9.2	-	3.3	0.8	3.4		
	11T308-LD						●								11.0	-	4.0	0.8	4.0		
	130410-LD						●								13.0	-	4.5	1.0	4.5		
	15M510-LD						●								15.2	-	5.0	1.0	5.5		
	180510-LD						●								18.2	-	5.5	1.0	6.0		
	040204-PD			●	●			●				●		4.7	-	2.4	0.4	2.3		G12 ~ G24	
	050204-PD			●	●			●				●		5.1	-	2.4	0.4	2.3			
	060205-PD			●	●			●				●		6.2	-	2.5	0.5	2.5			
	07T208-PD			●	●			●				●		7.5	-	2.8	0.7	2.8			
	090308-PD			●	●			●				●		9.2	-	3.3	0.8	3.4			
	11T308-PD			●	●			●				●		11.0	-	4.0	0.8	4.0			
	130410-PD			●	●			●				●		13.0	-	4.5	1.0	4.5			
	15M510-PD			●	●			●				●		15.2	-	5.0	1.0	5.5			
	180510-PD			●	●			●				●		18.2	-	5.5	1.0	6.0			
	030204-C21													3.8	5.56	2.38	0.4	2.5		G43 G44	
	040204-C21													4.3	6.35	2.38	0.4	2.8			
	050308-C21													5.4	7.94	3.18	0.8	3.4			
	06T308-C21													6.5	9.525	3.97	0.8	4.4			
	080408-C21													8.7	12.7	4.76	0.8	5.5			
	030208-C20N						●							3.8	5.56	2.38	0.8	2.8		-	
	040208-C20N						●							4.3	6.35	2.38	0.8	3.0			
	050308-C20N						●							5.4	7.94	3.18	0.8	3.4			
	06T308-C20N						●							6.5	9.525	3.97	0.8	3.7			
	080408-C20N						●							8.7	12.7	4.76	0.8	4.3			
	080412-C20N						●							8.7	12.7	4.76	1.2	4.3			
	030204-C21N						●							3.8	5.56	2.38	0.4	2.55		G43 G44	
	040204-C21N						●							4.3	6.35	2.38	0.4	2.8			
	040208-C21N						●							4.3	6.35	2.38	0.8	2.8			
	050308-C21N						●							5.4	7.94	3.18	0.8	3.4			
	06T308-C21N						●							6.5	9.525	3.97	0.8	4.4			
	080408-C21N						●							8.7	12.7	4.76	0.8	5.5			
	040204-ND											●		4.3	4.9	2.4	0.4	2.3		-	
	050204-ND											●		4.8	5.4	2.4	0.4	2.3			
	060204-ND											●		5.8	6.6	2.5	0.4	2.5			
	07T205-ND											●		6.9	7.8	2.8	0.5	2.8			
	090305-ND											●		8.4	9.6	3.3	0.5	3.4			
	11T306-ND											●		10.0	11.4	4.0	0.6	4.0			
	130406-ND											●		11.9	13.6	4.5	0.6	4.5			
	15M508-ND											●		13.9	15.9	5.0	0.8	5.5			
	180508-ND											●		16.5	18.9	5.5	0.8	6.0			
	060204-LD						●							5.8	6.6	2.5	0.4	2.5		G12 ~ G24	
	07T205-LD						●							6.9	7.8	2.8	0.5	2.8			
	090305-LD						●							8.4	9.6	3.3	0.5	3.4			
	11T306-LD						●							10.0	11.4	4.0	0.6	4.0			
	130406-LD						●							11.9	13.6	4.5	0.6	4.5			
	15M508-LD						●							13.9	15.9	5.0	0.8	5.5			
	040204-PD						●							4.3	4.9	2.4	0.4	2.3		G12 ~ G24	
	050204-PD						●							4.8	5.4	2.4	0.4	2.3			
	060204-PD						●							5.8	6.6	2.5	0.4	2.5			
	07T205-PD						●							6.9	7.8	2.8	0.5	2.8			
	090305-PD						●							8.4	9.6	3.3	0.5	3.4			
	11T306-PD						●							10.0	11.4	4.0	0.6	4.0			
	130406-PD						●							11.9	13.6	4.5	0.6	4.5			
	15M508-PD						●							13.9	15.9	5.0	0.8	5.5			
	180508-PD						●							16.5	18.9	5.5	0.8	6.0			

● : Stock Item



Optimized insert design for maximum drilling efficiency

KING DRILL *New*





▶ Code system of holder

K	5D	200	25	□	-	07
KING / KORLOY	Aspect ratio(L/D)	Drill Dia.	One decimal place marked	Shank shape		Inscribed circle of insert
	2D, 2.5D, 3D, 3.5D, 4D, 4.5D, 5D	Ø20.0 (One decimal place marked)	Ø20, Ø25 Ø32, Ø40	No mark : Flange Shank, Weldone HP : Flange Shank, Weldon, PT Tap F1 : Flange Shank, Whistle Notch F2 : Flange Shank, Without Side Lock S : Straight Shank, Weldone S1 : Straight Shank, Whistle Notch S2 : Straight Shank, Without Side Lock M0, M1, M2, M3... : MT0, MT1, MT2, MT3... H63, H100 : HSK63, HSK100 B30, B40, B50 : BT30, BT40, BT50		05, 06, 07, 09 11 13, 15, 18


▶ Features of Insert

Optimized design of inserts for maximum drilling efficiency

- ▶ Excellent cutting performance and chip control due to the optimized geometry and chip breaker of both inserts, central & peripheral.
- ▶ Different inserts, optimized for the central and peripheral insert locations in order to maximize cutting tool life.

Chip breaker	PD		LD	
Features	- Universal - At medium speed and medium feed		- Superior chip control for machining mild steel and stainless steel - Light cutting(at low ~ medium speed and low feed)	
Insert	Peripheral insert	Central insert	Peripheral insert	Central insert
Shape				
Grades for workpiece	NC5330 : P, M, K PC3500 : P PC5300 : P, M, K, S PC6510 : K	PC5300 : P, M, K, S	PC5335 : P, M	PC5335 : P, M


Optimized flute system - 2 coolant holes applied

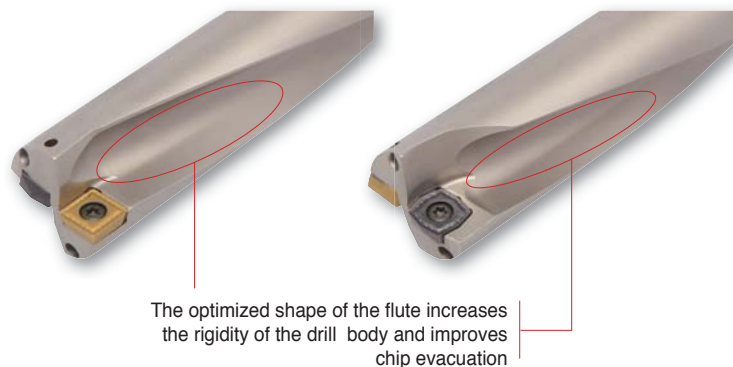

▶ Application examples


Track link bush

- **Cutting condition** : $vc(m/min)=120$, $fn(mm/rev)=0.1$
Through coolant system
- **Tools : Applicable inserts** SPMT07T208-PD(PC3500)
XOMT07T205-PD(PC5300)
Holder K5D20025-07
- **Machine** : drilling machine

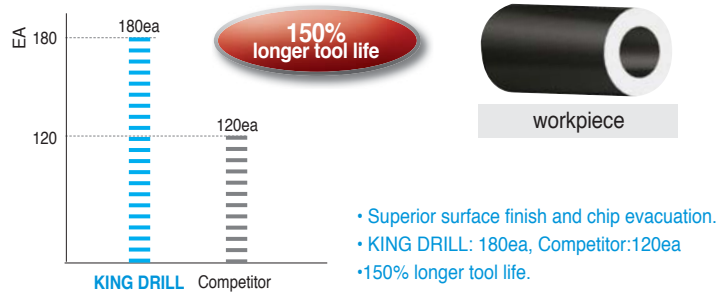

Track link bush

- **Workpiece** : SCM415H
- **Cutting condition** : Competitor's $vc(m/min)=125$, $fn(mm/rev)=0.1$
Korloy's $vc(m/min)=140$, $fn(mm/rev)=0.12$
- **Tools : Applicable inserts** SPMT090308-PD(PC3500)
XOMT090305-PD(PC5300)
Holder K3D27032-09
- **Machine** : MCT

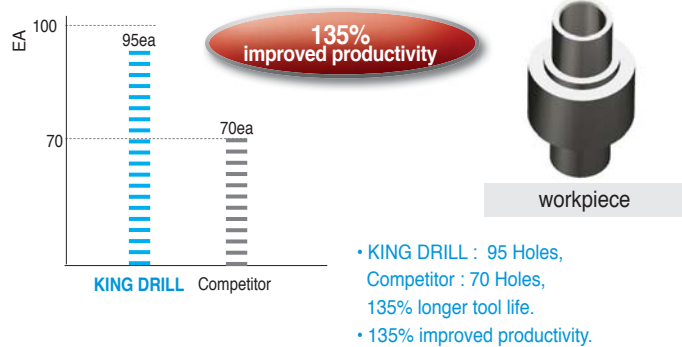

▶ Recommended cutting condition

Workpiece			Insert			vc(m/min)	Depth of cut = 2D, 3D, 4D Feed rate (mm/rev) per drill dia.(mm)						
ISO	Workpiece	Hardness (HB)	Chip Breaker	Grade			Ø12~Ø16	Ø17~Ø23	Ø24~Ø29	Ø30~Ø42	Ø43~Ø60		
				Central	Peripheral								
P	Carbon steel	Low carbon steel	80~180	LD	PC5335	PC5335	120(60~170)	0.04~0.08	0.04~0.08	0.04~0.08	0.04~0.08	0.04~0.08	
				PD	PC5300	PC3500	150(120~180)						
				NC5330	180(140~220)								
		High carbon steel	180~280	PD	PC5300	PC3500	120(90~150)	0.04~0.10	0.04~0.12	0.05~0.16	0.06~0.16	0.06~0.18	
					NC5330	150(110~190)	0.04~0.06	0.04~0.07	0.04~0.08	0.04~0.08	0.04~0.08		
		Alloy steel	Low alloy steel	140~260	LD	PC5335	PC5335	120(60~160)	0.06~0.10	0.06~0.10	0.06~0.12	0.06~0.14	0.06~0.14
	PD				PC5300	PC3500	150(120~170)	0.06~0.12	0.06~0.12	0.06~0.14	0.06~0.16	0.06~0.16	
			NC5330	180(140~210)	0.06~0.08	0.06~0.08	0.06~0.10	0.06~0.12	0.06~0.12	0.06~0.12			
	Hardened low alloy steel		200~400	PD	PC5300	PC5300	100(50~150)	0.04~0.10	0.06~0.10	0.06~0.12	0.06~0.14	0.06~0.14	
	High alloy steel	260~320	PD	PC5300	PC3500	100(50~160)	0.05~0.11	0.05~0.11	0.05~0.13	0.05~0.15	0.05~0.15		
	Hardened high alloy steel	300~450	PD	PC5300	PC5300	70(30~120)	0.04~0.08	0.06~0.08	0.06~0.10	0.06~0.12	0.06~0.12		
M	Stainless steel	Stainless steel	135-275	LD	PD5335	PC5335	120(80~140)	0.04~0.07	0.04~0.07	0.04~0.07	0.04~0.08	0.04~0.08	
				PD	PC5300	PC5300	130(100~160)	0.04~0.07	0.04~0.07	0.04~0.07	0.04~0.08	0.04~0.08	
K	Cast iron	Gray cast iron	150~230	PD	PC5300	PC6510	190(150~250)	0.04~0.12	0.05~0.14	0.06~0.18	0.10~0.22	0.10~0.26	
		Ductile cast iron	150~230	PD	PC5300	PC6510	130(100~160)	0.04~0.07	0.04~0.08	0.04~0.10	0.05~0.12	0.05~0.12	
S	Heat resisting alloy	Ni-heat resisting alloy	130~400	PD	PC5300	PC5300	50(30~100)	0.04~0.10	0.04~0.10	0.04~0.10	0.04~0.10	0.04~0.10	
		Ti-heat resisting alloy	130~400	LD	PC5335	PC5335	60(40~80)	0.04~0.08	0.04~0.10	0.06~0.12	0.06~0.14	0.06~0.16	
				PD	PC5300	PC5300	60(40~80)	0.04~0.08	0.04~0.10	0.06~0.12	0.06~0.14	0.06~0.16	
		High hardened steel	400~	PD	PC5300	PC5300	40(20~80)	0.04~0.05	0.04~0.06	0.04~0.08	0.04~0.08	0.04~0.08	

- The Max. feed of 5D holders is 70%~80% of the max. conditions of 2D/3D/4D holders
- In interrupted machining part, reduce 30~50% of feed from the above machining around interrupted part.

Required machine power




- ▶ The graphs below show the cutting force required in drilling.
- ▶ Machining with the KING DRILL and a machine with high rigidity and power.

• Workpiece : SCM440(240HB) • Cutting condition : $vc(m/min)=100$
 • Through coolant system


$f_n(mm/rev)=0.13$

$f_n(mm/rev)=0.10$

$f_n(mm/rev)=0.07$

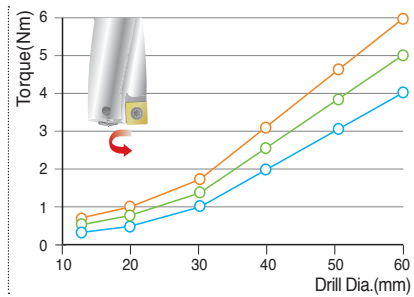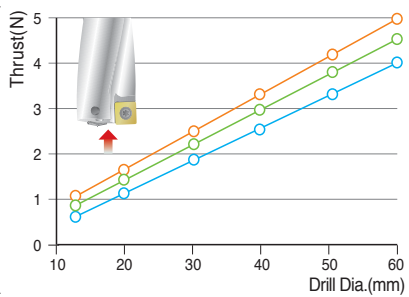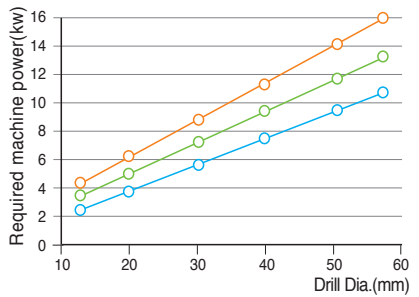

Cutting oil quantity

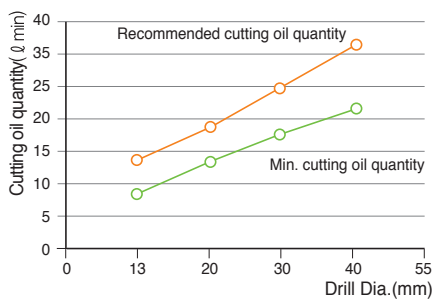


• Workpiece : SCM440(240HB)
 • Cutting condition : $vc(m/min)=100$
 • Through coolant system

• The data of the graph above could be changed depending on workpiece and cutting condition.





Drill tolerance and hole tolerance

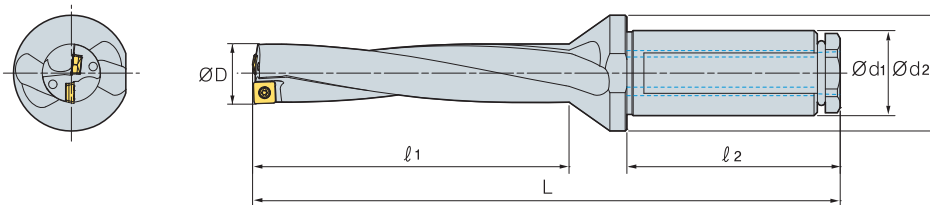

(mm)


Drill Dia.		Ø12 ~ Ø29	Ø30 ~ Ø45	Ø46 ~ Ø60.5
2D~3D	Drill tolerance(ØD)	0 ~ -0.15	0 ~ -0.15	0 ~ -0.15
	Hole tolerance	+0.2 ~ -0.1	+0.25 ~ -0.1	+0.28 ~ -0.1
4D~5D	Drill tolerance(ØD)	0 ~ -0.15	0 ~ -0.15	0 ~ -0.15
	Hole tolerance	+0.25 ~ -0.05	+0.3 ~ -0.05	+0.33 ~ -0.05

Notice for setting the drill in the lathe

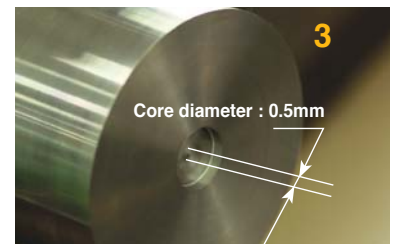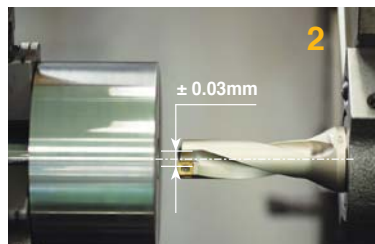

- Set the peripheral insert parallel to the X axis. (based on the side lock)
- If the machined core is 0.5mm after machining 5mm, that is the proper setting.
- ※ Please make sure that the location of the side lock could be different depending on manufacturers of machine.

▶ Range of adjusting machining diameter in the lathe

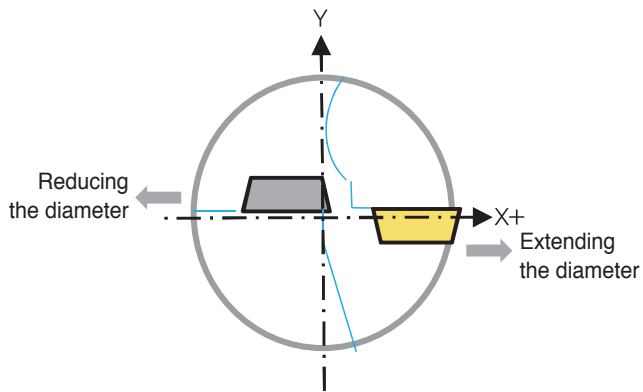

- In machining in the lathe, the King Drill can extend and reduce the machining diameter with moving to the x axis. Please refer to the table showing the range of adjusting drilling diameter below.
- The more the drilling diameter is extended or reduced, the more the drill loses drilling balance. In this case, reduce the feed or cutting speed in machining.
- Reducing the machining diameter excessively could damage the holder.

Drill dia.	Range of adjusting drilling diameter(Ø)	Drill dia.	Range of adjusting drilling diameter(Ø)	Drill dia.	Range of adjusting drilling diameter(Ø)	Drill dia.	Range of adjusting drilling diameter(Ø)
12.0	11.7 ~12.4	24.5	23.9 ~25.1	37.0	36.3 ~37.7	49.5	48.7 ~50.2
12.5	12.2 ~12.9	25.0	24.4 ~25.6	37.5	36.8 ~38.2	50.0	49.2 ~50.7
13.0	12.7 ~13.4	25.5	24.9 ~26.1	38.0	37.3 ~38.7	50.5	49.7 ~51.2
13.5	13.2 ~13.9	26.0	25.4 ~26.6	38.5	37.8 ~39.2	51.0	50.2 ~51.7
14.0	13.6 ~14.5	26.5	25.9 ~27.1	39.0	38.3 ~39.7	51.5	50.7 ~52.2
14.5	14.1 ~15.0	27.0	26.4 ~27.6	39.5	38.8 ~40.2	52.0	51.2 ~52.7
15.0	14.6 ~15.5	27.5	26.9 ~28.1	40.0	39.3 ~40.7	52.5	51.7 ~53.2
15.5	15.1 ~16.0	27.8	27.4 ~28.6	40.5	39.8 ~41.2	53.0	52.2 ~53.7
16.0	15.6 ~16.5	28.5	27.9 ~29.1	41.0	40.3 ~41.7	53.5	52.7 ~54.2
16.5	16.0 ~17.0	29.0	28.4 ~29.6	41.5	40.8 ~42.2	54.0	53.2 ~54.7
17.0	16.5 ~17.5	29.5	28.9 ~30.1	42.0	41.3 ~42.7	54.5	53.7 ~55.2
17.5	17.0 ~18.0	30.0	29.3 ~30.7	42.5	41.8 ~43.2	55.0	54.2 ~55.7
18.0	17.5 ~18.5	30.5	29.8 ~31.2	43.0	42.2 ~43.7	55.5	54.7 ~56.2
18.5	18.0 ~19.0	31.0	30.3 ~31.7	43.5	42.7 ~44.2	56.0	55.2 ~56.7
19.0	18.5 ~19.5	31.5	30.8 ~32.2	44.0	43.2 ~44.7	56.5	55.7 ~57.2
19.5	19.0 ~20.0	32.0	31.3 ~32.7	44.5	43.7 ~45.2	57.0	56.2 ~57.7
20.0	19.4 ~20.6	32.5	31.8 ~33.2	45.0	44.2 ~45.7	57.5	56.7 ~58.2
20.5	19.9 ~21.1	33.0	32.3 ~33.7	45.5	44.7 ~46.2	58.0	57.2 ~58.7
21.0	20.4 ~21.6	33.5	32.8 ~34.2	46.0	45.2 ~46.7	58.5	57.7 ~59.2
21.5	20.9 ~22.1	34.0	33.3 ~34.7	46.5	45.7 ~47.2	59.0	58.2 ~59.7
22.0	21.4 ~22.6	34.5	33.8 ~35.2	47.0	46.2 ~47.7	59.5	58.7 ~60.2
22.5	21.9 ~23.1	35.0	34.3 ~35.7	47.5	46.7 ~48.2	60.0	59.2 ~60.7
23.0	22.4 ~23.6	35.5	34.8 ~36.2	48.0	47.2 ~48.7	60.5	59.7 ~61.2
23.5	22.9 ~24.1	36.0	35.3 ~36.7	48.5	47.7 ~49.2		
24.0	23.4 ~24.6	36.5	35.8 ~37.2	49.0	48.2 ~49.7		


▶ Insert and parts

Drill dia.	Peripheral insert	Central insert	Screw	Wrench	Torque(Nm)
Ø12.0~Ø13.5	SPMT040204-□□	XOMT040204-□□	FTNA0204	TW06P	0.4
Ø13.6~Ø16.0	SPMT050204-□□	XOMT050204-□□	FTNA0204	TW06P	0.4
Ø16.1~Ø19.5	SPMT060205-□□	XOMT060204-□□	FTKA02206S	TW07P	0.8
Ø19.6~Ø23.5	SPMT07T208-□□	XOMT07T205-□□	FTKA02565	TW07S	0.8
Ø23.6~Ø29.5	SPMT090308-□□	XOMT090305-□□	FTKA0307	TW09S	1.2
Ø29.6~Ø35.5	SPMT11T308-□□	XOMT11T306-□□	FTKA03508	TW15S	3
Ø35.6~Ø42.5	SPMT130410-□□	XOMT130406-□□	FTKA0410	TW15S	3
Ø42.6~Ø50.5	SPMT15M510-□□	XOMT15M508-□□	FTNC04511	TW20S	5
Ø50.6~Ø60.5	SPMT180510-□□	XOMT180508-□□	FTNA0511	TW20-100	5

- In clamping an insert, please clean the tip seat and apply CASMOLY1000 on the screw.
- Please make sure to use a Korloy-produced wrench and screw only.


▶ KING DRILL - for machining a tap foundation hole

• There are two types of specifications of tap, metric and inch. The King drill is available for machining both thru tap and blind tap.





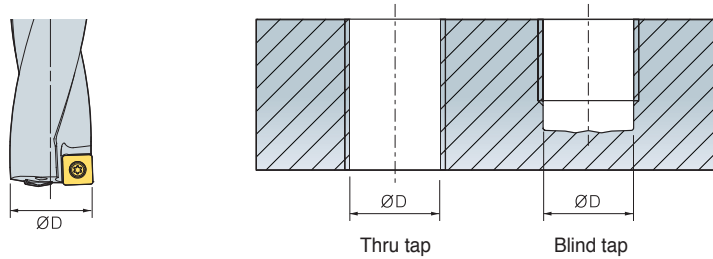


(mm)

Tap type	Thread	ØD	Designation	Reference
Metric	M14 x 2.0	12.0	K3D12020-04	G14
	M16 x 2.0	14.0	K3D14020-05	G14
	M18 x 2.5	15.5	K3D15520-05	G14
	M20 x 2.5	17.5	K3D17525-06	G14
	M22 x 2.5	19.5	K3D19525-06	G14
	M24 x 3.0	21.0	K3D21025-07	G14
	M27 x 3.0	24.0	K3D24032-09	G14
	M30 x 3.5	26.5	K3D26532-09	G14
	M33 x 4.0	29.0	K3D29032-09	G14
	M36 x 4.0	32.0	K3D32032-11	G14
	M39 x 4.0	35.0	K3D35032-11	G14
Inch	9/16-12 UNC	12.2	K3D12220-04	G14
	5/8-11 UNC	13.5	K3D13520-04	G14
	3/4-10 UNC	16.5	K3D16525-06	G14
	7/8-9 UNC	19.5	K3D19525-06	G14
	9/16-18 UNF	12.9	K3D12920-04	G14
	5/8-18 UNF	14.5	K3D14520-05	G14
	3/4-16 UNF	17.5	K3D17525-06	G14

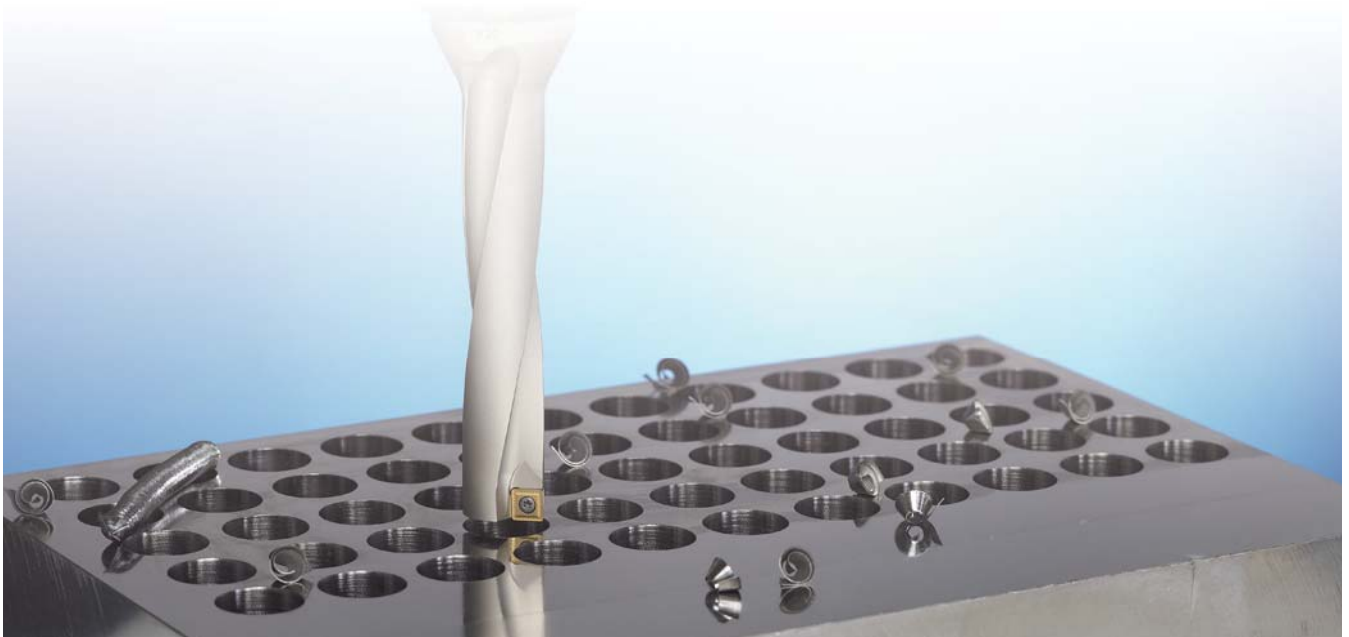


Special drill order form

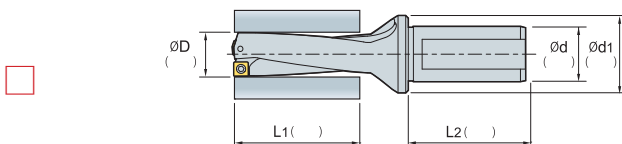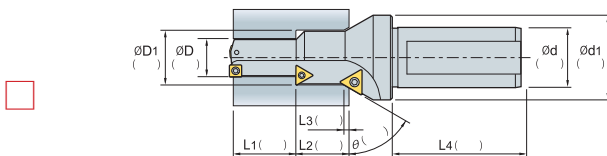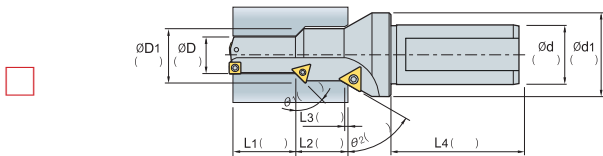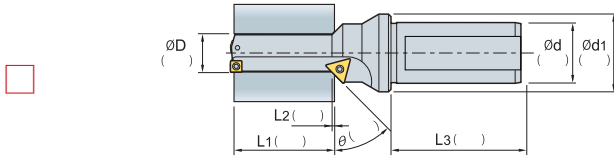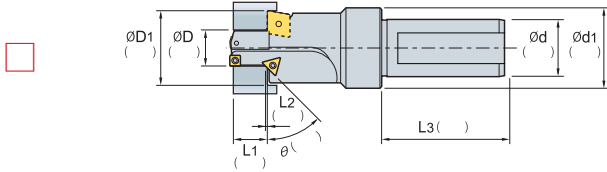

Coolant type

- Through coolant Plug Type(Standard)
 Through coolant Non Plug Type
 No coolant



Hole type

- Blind hole
 Thru hole

Types of shank

- Flat Type
 Weldon Type
 Whistle Notch Type



Location of side lock

- Parallel to peripheral insert(standard)
 90° angle to peripheral insert(standard)
 180° angle to peripheral insert(standard)
 270° angle to peripheral insert(standard)



Note


- Currently using tool :
- Current cutting condition
 - RPM or vc(m/min) :
 - vf(mm/min) or fn(mm/rev) :
 - Depth of cut(mm) :
- Standard of measuring tool life :
- Currently using machine
 - Machining center :
 - General lathe :
 - CNC lathe :

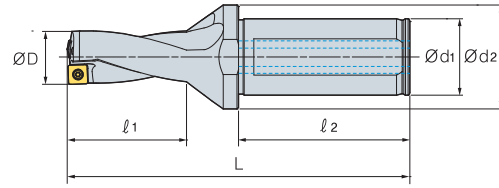KING DRILL-2D *New*





(mm)



Designation	ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw 	Wrench 
K2D	12020-04	12.0	20	25	27	50	SPMT040204-PD XOMT040204-PD	FTNA0204	TW06P
	12520-04	12.5	20	25	27	50			
	13020-04	13.0	20	25	29	50			
	13520-04	13.5	20	25	29	50			
	14020-05	14.0	20	25	31	50			
	14520-05	14.5	20	25	31	50			
	15020-05	15.0	20	25	33	50	SPMT050204-PD XOMT050204-PD	FTNA0204	TW06P
	15520-05	15.5	20	25	33	50			
	16020-05	16.0	20	25	35	50			
	16525-06	16.5	25	34	35	56			
	17025-06	17.0	25	34	37	56			
	17525-06	17.5	25	34	37	56			
	18025-06	18.0	25	34	39	56	SPMT060205-PD XOMT060204-PD	FTKA02206S	TW07P
	18525-06	18.5	25	34	39	56			
	19025-06	19.0	25	34	41	56			
	19525-06	19.5	25	34	41	56			
	20025-07	20.0	25	34	43	56			
	20525-07	20.5	25	34	43	56			
	21025-07	21.0	25	34	45	56	SPMT07T208-PD XOMT07T205-PD	FTKA02565	TW07S
	21525-07	21.5	25	34	45	56			
	22025-07	22.0	25	34	47	56			
	22525-07	22.5	25	34	47	56			
	23025-07	23.0	25	34	49	56			
	23525-07	23.5	25	34	49	56			
	24032-09	24.0	32	44	51	60	SPMT090308-PD XOMT090305-PD	FTKA0307	TW09S
	24532-09	24.5	32	44	51	60			
	25032-09	25.0	32	44	53	60			
	25532-09	25.5	32	44	53	60			
	26032-09	26.0	32	44	55	60			
	26532-09	26.5	32	44	55	60			
	27032-09	27.0	32	44	57	60			
	27532-09	27.5	32	44	57	60			
	28032-09	28.0	32	44	59	60			
	28532-09	28.5	32	44	59	60			
	29032-09	29.0	32	44	61	60			
	29532-09	29.5	32	44	61	60			
30032-11	30.0	32	44	63	60	SPMT11T308-PD XOMT11T306-PD	FTKA03508	TW15S	
30532-11	30.5	32	44	63	60				
31032-11	31.0	32	44	65	60				
31532-11	31.5	32	44	65	60				
32032-11	32.0	32	44	67	60				
32532-11	32.5	32	44	67	60				
33032-11	33.0	32	44	69	60				
33532-11	33.5	32	44	69	60				
34032-11	34.0	32	44	71	60				
34532-11	34.5	32	44	71	60				
35032-11	35.0	32	44	73	60				
35532-11	35.5	32	44	73	60				


 Applicable inserts **G06**

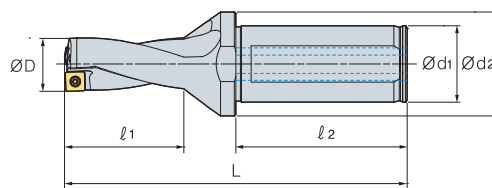
KING DRILL-2D *New*





(mm)



Designation	ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw	Wrench
									
K2D	36040-13	36.0	40	48	76	70	SPMT130410-PD XOMT130406-PD	FTKA0410	TW15S
	36540-13	36.5	40	48	76	70			
	37040-13	37.0	40	48	78	70			
	37540-13	37.5	40	48	78	70			
	38040-13	38.0	40	48	80	70			
	38540-13	38.5	40	48	80	70			
	39040-13	39.0	40	48	82	70			
	39540-13	39.5	40	48	82	70			
	40040-13	40.0	40	48	84	70			
	40540-13	40.5	40	48	84	70			
	41040-13	41.0	40	48	86	70			
	41540-13	41.5	40	48	86	70			
	42040-13	42.0	40	48	88	70			
	42540-13	42.5	40	48	88	70			
	43040-15	43.0	40	58	91	70			
	43540-15	43.5	40	58	91	70			
	44040-15	44.0	40	58	93	70			
	44540-15	44.5	40	58	93	70			
	45040-15	45.0	40	58	95	70			
	45540-15	45.5	40	58	95	70			
	46040-15	46.0	40	58	97	70			
	46540-15	46.5	40	58	97	70			
	47040-15	47.0	40	58	99	70			
	47540-15	47.5	40	58	99	70			
48040-15	48.0	40	58	101	70				
48540-15	48.5	40	58	101	70				
49040-15	49.0	40	58	103	70				
49540-15	49.5	40	58	103	70				
50040-15	50.0	40	58	105	70				
50540-15	50.5	40	58	105	70				
51040-18	51.0	40	68	108	70				
51540-18	51.5	40	68	108	70				
52040-18	52.0	40	68	110	70				
52540-18	52.5	40	68	110	70				
53040-18	53.0	40	68	112	70				
53540-18	53.5	40	68	112	70				
54040-18	54.0	40	68	114	70				
54540-18	54.5	40	68	114	70				
55040-18	55.0	40	68	116	70				
55540-18	55.5	40	68	116	70				
56040-18	56.0	40	68	118	70				
56540-18	56.5	40	68	118	70				
57040-18	57.0	40	68	121	70				
57540-18	57.5	40	68	121	70				
58040-18	58.0	40	68	124	70				
58540-18	58.5	40	68	124	70				
59040-18	59.0	40	68	127	70				
59540-18	59.5	40	68	127	70				
60040-18	60.0	40	68	130	70				
60540-18	60.5	40	68	130	70				


 Applicable inserts G06

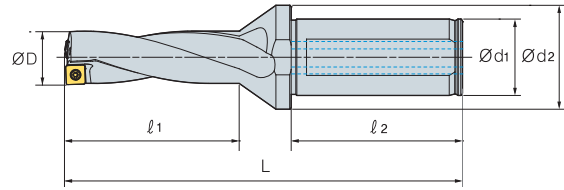KING DRILL-3D *New*



(mm)



Designation		ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw 	Wrench 
K3D	12020-04*	12.0	20	25	39	50	103	SPMT040204-PD XOMT040204-PD	FTNA0204	TW06P
	12220-04	12.2	20	25	39	50	103			
	12520-04	12.5	20	25	39	50	103			
	12920-04	12.9	20	25	42	50	106			
	13020-04	13.0	20	25	42	50	106			
	13520-04	13.5	20	25	42	50	106			
	14020-05*	14.0	20	25	45	50	110	SPMT050204-PD XOMT050204-PD	FTNA0204	TW06P
	14520-05	14.5	20	25	45	50	110			
	15020-05	15.0	20	25	48	50	114			
	15520-05*	15.5	20	25	48	50	114			
	16020-05	16.0	20	25	51	50	117			
	16525-06	16.5	25	34	51	56	123			
	17025-06	17.0	25	34	54	56	126			
	17525-06*	17.5	25	34	54	56	126			
	18025-06	18.0	25	34	57	56	130			
	18525-06	18.5	25	34	57	56	130			
	19025-06	19.0	25	34	60	56	133			
	19525-06*	19.5	25	34	60	56	133	SPMT07T208-PD XOMT07T205-PD	FTKA02565	TW07S
	20025-07	20.0	25	34	63	56	138			
	20525-07	20.5	25	34	63	56	138			
	21025-07*	21.0	25	34	66	56	141			
	21525-07	21.5	25	34	66	56	141			
	22025-07	22.0	25	34	69	56	144			
	22525-07	22.5	25	34	69	56	144	SPMT090308-PD XOMT090305-PD	FTKA0307	TW09S
	23025-07	23	25	34	72	56	149			
	23525-07	23.5	25	34	72	56	149			
	24032-09*	24.0	32	44	75	60	157			
	24532-09	24.5	32	44	75	60	157			
	25032-09	25.0	32	44	78	60	160			
	25532-09	25.5	32	44	78	60	160			
	26032-09	26.0	32	44	81	60	163			
	26532-09*	26.5	32	44	81	60	163			
27032-09	27.0	32	44	84	60	167				
27532-09	27.5	32	44	84	60	167				
28032-09	28.0	32	44	87	60	171				
28532-09	28.5	32	44	87	60	171				
29032-09*	29.0	32	44	90	60	174				
29532-09	29.5	32	44	90	60	174				



 Applicable inserts **G06**


The items marked * can machine a tap foundation hole.

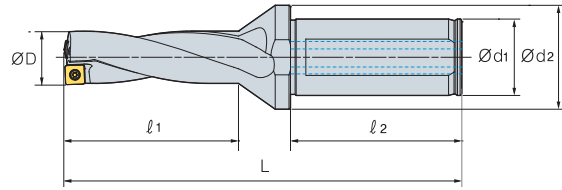

KING DRILL-3D *New*





Designation		ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw 	Wrench 
K3D	30032-11*	30.0	32	44	93	60	180	SPMT11T308-PD XOMT11T306-PD	FTKA03508	TW15S
	30532-11	30.5	32	44	93	60	180			
	31032-11	31.0	32	44	96	60	183			
	31532-11	31.5	32	44	96	60	183			
	32032-11	32.0	32	44	99	60	186			
	32532-11	32.5	32	44	99	60	186			
	33032-11	33.0	32	44	102	60	190			
	33532-11	33.5	32	44	102	60	190			
	34032-11	34.0	32	44	105	60	193			
	34532-11	34.5	32	44	105	60	193			
	35032-11*	35.0	32	44	108	60	196			
	35532-11	35.5	32	44	108	60	196			
	36040-13	36.0	40	48	112	70	212			
	36540-13	36.5	40	48	112	70	212			
	37040-13	37.0	40	48	115	70	215			
	37540-13	37.5	40	48	115	70	215			
	38040-13	38.0	40	48	118	70	219			
	38540-13	38.5	40	48	118	70	219			
	39040-13	39.0	40	48	121	70	222			
	39540-13	39.5	40	48	121	70	222			
	40040-13	40.0	40	48	124	70	226			
	40540-13	40.5	40	48	124	70	226			
	41040-13	41.0	40	48	127	70	229			
	41540-13	41.5	40	48	127	70	229			
	42040-13	42.0	40	48	130	70	233			
	42540-13	42.5	40	48	130	70	233			
	43040-15	43.0	40	58	134	70	239			
	43540-15	43.5	40	58	134	70	239			
	44040-15	44.0	40	58	137	70	242			
	44540-15	44.5	40	58	137	70	242			
	45040-15	45.0	40	58	140	70	246			
	45540-15	45.5	40	58	140	70	246			
	46040-15	46.0	40	58	143	70	249			
46540-15	46.5	40	58	143	70	249				
47040-15	47.0	40	58	146	70	253				
47540-15	47.5	40	58	146	70	253				
48040-15	48.0	40	58	149	70	256				
48540-15	48.5	40	58	149	70	256				
49040-15	49.0	40	58	152	70	259				
49540-15	49.5	40	58	152	70	259				
50040-15	50.0	40	58	155	70	262				
50540-15	50.5	40	58	155	70	262				
							SPMT130410-PD XOMT130406-PD	FTKA0410	TW15S	
							SPMT15M510-PD XOMT15M508-PD	FTNC04511	TW20S	

 Applicable inserts **G06**

The items marked * can machine a tap foundation hole.

KING DRILL-3D *New*

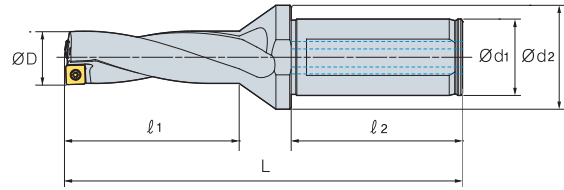


(mm)

Designation	ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw	Wrench
K3D 51040-18	51.0	40	68	159	70	269	SPMT180510-PD XOMT180508-PD	FTNA0511	TW20-100
51540-18	51.5	40	68	159	70	269			
52040-18	52.0	40	68	162	70	272			
52540-18	52.5	40	68	162	70	272			
53040-18	53.0	40	68	165	70	275			
53540-18	53.5	40	68	165	70	275			
54040-18	54.0	40	68	168	70	278			
54540-18	54.5	40	68	168	70	278			
55040-18	55.0	40	68	171	70	281			
55540-18	55.5	40	68	171	70	281			
56040-18	56.0	40	68	174	70	286			
56540-18	56.5	40	68	174	70	286			
57040-18	57.0	40	68	178	70	290			
57540-18	57.5	40	68	178	70	290			
58040-18	58.0	40	68	182	70	294			
58540-18	58.5	40	68	182	70	294			
59040-18	59.0	40	68	186	70	298			
59540-18	59.5	40	68	186	70	298			
60040-18	60.0	40	68	190	70	302			
60540-18	60.5	40	68	190	70	302			

↻ Applicable inserts **G06**

KING DRILL-4D *New*


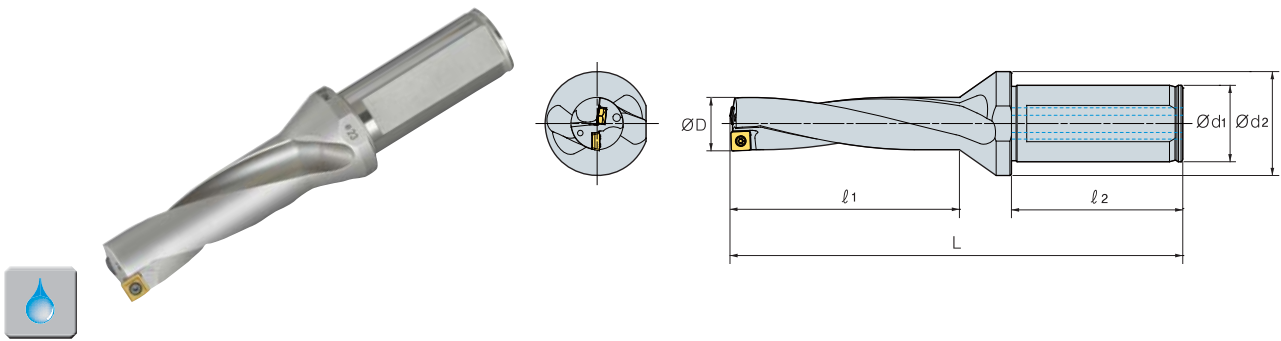


Designation		ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw	Wrench
K4D	12020-04	12.0	20	25	51	50	115	SPMT040204-PD XOMT040204-PD	FTNA0204	TW06P
	12520-04	12.5	20	25	51	50	115			
	13020-04	13.0	20	25	55	50	119			
	13520-04	13.5	20	25	55	50	119			
	14020-05	14.0	20	25	59	50	124	SPMT050204-PD XOMT050204-PD	FTNA0204	TW06P
	14520-05	14.5	20	25	59	50	124			
	15020-05	15.0	20	25	63	50	129			
	15520-05	15.5	20	25	63	50	129			
	16020-05	16.0	20	25	67	50	133	SPMT060205-PD XOMT060204-PD	FTKA02206S	TW07P
	16525-06	16.5	25	34	67	56	139			
	17025-06	17.0	25	34	71	56	143			
	17525-06	17.5	25	34	71	56	143			
	18025-06	18.0	25	34	75	56	148			
	18525-06	18.5	25	34	75	56	148			
	19025-06	19.0	25	34	79	56	152	SPMT07T208-PD XOMT07T205-PD	FTKA02565	TW07S
	19525-06	19.5	25	34	79	56	152			
	20025-07	20.0	25	34	83	56	158			
	20525-07	20.5	25	34	83	56	158			
	21025-07	21.0	25	34	87	56	162			
	21525-07	21.5	25	34	87	56	162			
	22025-07	22.0	25	34	91	56	166	SPMT090308-PD XOMT090305-PD	FTKA0307	TW09S
	22525-07	22.5	25	34	91	56	166			
	23025-07	23.0	25	34	95	56	172			
	23525-07	23.5	25	34	95	56	172			
	24032-09	24.0	32	44	99	60	181			
	24532-09	24.5	32	44	99	60	181			
	25032-09	25.0	32	44	103	60	185			
	25532-09	25.5	32	44	103	60	185			
	26032-09	26.0	32	44	107	60	189			
	26532-09	26.5	32	44	107	60	189			
	27032-09	27.0	32	44	111	60	194			
	27532-09	27.5	32	44	111	60	194			
	28032-09	28.0	32	44	115	60	199	SPMT11T308-PD XOMT11T306-PD	FTKA03508	TW15S
	28532-09	28.5	32	44	115	60	199			
	29032-09	29.0	32	44	119	60	203			
	29532-09	29.5	32	44	119	60	203			
30032-11	30.0	32	44	123	60	210				
30532-11	30.5	32	44	123	60	210				
31032-11	31.0	32	44	127	60	214				
31532-11	31.5	32	44	127	60	214				
32032-11	32.0	32	44	131	60	218				
32532-11	32.5	32	44	131	60	218				
33032-11	33.0	32	44	135	60	223				
33532-11	33.5	32	44	135	60	223				
34032-11	34.0	32	44	139	60	227				
34532-11	34.5	32	44	139	60	227				
35032-11	35.0	32	44	143	60	231				
35532-11	35.5	32	44	143	60	231				



→ Applicable inserts G06

KING DRILL-4D

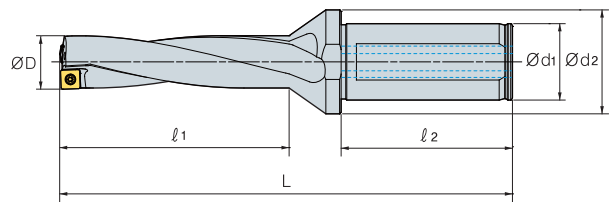New





(mm)

Designation	ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw 	Wrench 			
K4D	36040-13	36.0	40	48	148	70	SPMT130410-PD XOMT130406-PD	FTKA0410	TW15S			
	36540-13	36.5	40	48	148	70						
	37040-13	37.0	40	48	152	70						
	37540-13	37.5	40	48	152	70						
	38040-13	38.0	40	48	156	70						
	38540-13	38.5	40	48	156	70						
	39040-13	39.0	40	48	160	70						
	39540-13	39.5	40	48	160	70						
	40040-13	40.0	40	48	164	70						
	40540-13	40.5	40	48	164	70						
	41040-13	41.0	40	48	168	70						
	41540-13	41.5	40	48	168	70						
	42040-13	42.0	40	48	172	70						
	42540-13	42.5	40	48	172	70						
	43040-15	43.0	40	58	177	70				SPMT15M510-PD XOMT15M508-PD	FTNC04511	TW20S
	43540-15	43.5	40	58	177	70						
	44040-15	44.0	40	58	181	70						
	44540-15	44.5	40	58	181	70						
	45040-15	45.0	40	58	185	70						
	45540-15	45.5	40	58	185	70						
46040-15	46.0	40	58	189	70							
46540-15	46.5	40	58	189	70							
47040-15	47.0	40	58	193	70							
47540-15	47.5	40	58	193	70							
48040-15	48.0	40	58	197	70	SPMT180510-PD XOMT180508-PD	FTNA0511	TW20-100				
48540-15	48.5	40	58	197	70							
49040-15	49.0	40	58	201	70							
49540-15	49.5	40	58	201	70							
50040-15	50.0	40	58	205	70							
50540-15	50.5	40	58	205	70							
51040-18	51.0	40	68	210	70							
51540-18	51.5	40	68	210	70							
52040-18	52.0	40	68	214	70							
52540-18	52.5	40	68	214	70							
53040-18	53.0	40	68	218	70							
53540-18	53.5	40	68	218	70							
54040-18	54.0	40	68	222	70							
54540-18	54.5	40	68	222	70							
55040-18	55.0	40	68	226	70							
55540-18	55.5	40	68	226	70							
56040-18	56.0	40	68	230	70							
56540-18	56.5	40	68	230	70							
57040-18	57.0	40	68	235	70							
57540-18	57.5	40	68	235	70							
58040-18	58.0	40	68	240	70							
58540-18	58.5	40	68	240	70							
59040-18	59.0	40	68	245	70							
59540-18	59.5	40	68	245	70							
60040-18	60.0	40	68	250	70							
60540-18	60.5	40	68	250	70							

↻ Applicable inserts **G06**



KING DRILL-5D *New*

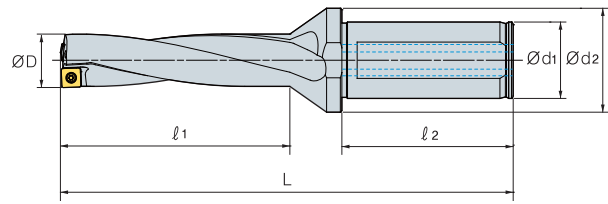



(mm)

Designation	ØD	Ød1	Ød2	l ₁	l ₂	L	Insert	Screw	Wrench
K5D	12020-04	12.0	20	25	63	50	SPMT040204-PD XOMT040204-PD	FTNA0204	TW06P
	12520-04	12.5	20	25	63	50			
	13020-04	13.0	20	25	68	50			
	13520-04	13.5	20	25	68	50			
	14020-05	14.0	20	25	73	50			
	14520-05	14.5	20	25	73	50	SPMT050204-PD XOMT050204-PD	FTNA0204	TW06P
	15020-05	15.0	20	25	78	50			
	15520-05	15.5	20	25	78	50			
	16020-05	16.0	20	25	83	50			
	16525-06	16.5	25	34	83	56			
	17025-06	17.0	25	34	88	56			
	17525-06	17.5	25	34	88	56			
	18025-06	18.0	25	34	93	56			
	18525-06	18.5	25	34	93	56			
	19025-06	19.0	25	34	98	56	SPMT07T208-PD XOMT07T205-PD	FTKA02565	TW07S
	19525-06	19.5	25	34	98	56			
	20025-07	20.0	25	34	103	56			
	20525-07	20.5	25	34	103	56			
	21025-07	21.0	25	34	108	56			
	21525-07	21.5	25	34	108	56	SPMT090308-PD XOMT090305-PD	FTKA0307	TW09S
	22025-07	22.0	25	34	113	56			
	22525-07	22.5	25	34	113	56			
	23025-07	23.0	25	34	118	56			
	23525-07	23.5	25	34	118	56			
	24032-09	24.0	32	44	123	60	SPMT11T308-PD XOMT11T306-PD	FTKA03508	TW15S
	24532-09	24.5	32	44	123	60			
	25032-09	25.0	32	44	128	60			
	25532-09	25.5	32	44	128	60			
	26032-09	26.0	32	44	133	60			
	26532-09	26.5	32	44	133	60	SPMT11T308-PD XOMT11T306-PD	FTKA03508	TW15S
	27032-09	27.0	32	44	138	60			
	27532-09	27.5	32	44	138	60			
	28032-09	28.0	32	44	143	60			
	28532-09	28.5	32	44	143	60			
	29032-09	29.0	32	44	148	60	SPMT11T308-PD XOMT11T306-PD	FTKA03508	TW15S
29532-09	29.5	32	44	148	60				
30032-11	30.0	32	44	153	60				
30532-11	30.5	32	44	153	60				
31032-11	31.0	32	44	158	60				
31532-11	31.5	32	44	158	60	SPMT11T308-PD XOMT11T306-PD	FTKA03508	TW15S	
32032-11	32.0	32	44	163	60				
32532-11	32.5	32	44	163	60				
33032-11	33.0	32	44	168	60				
33532-11	33.5	32	44	168	60				
34032-11	34.0	32	44	173	60	SPMT11T308-PD XOMT11T306-PD	FTKA03508	TW15S	
34532-11	34.5	32	44	173	60				
35032-11	35.0	32	44	178	60				
35532-11	35.5	32	44	178	60				



↻ Applicable inserts G06

KING DRILL-5D

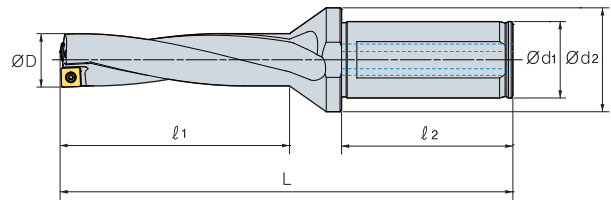New



(mm)

Designation	ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw 	Wrench 			
K5D	36040-13	36.0	40	48	184	70	SPMT130410-PD XOMT130406-PD	FTKA0410	TW15S			
	36540-13	36.5	40	48	184	70						
	37040-13	37.0	40	48	189	70						
	37540-13	37.5	40	48	189	70						
	38040-13	38.0	40	48	194	70						
	38540-13	38.5	40	48	194	70						
	39040-13	39.0	40	48	199	70						
	39540-13	39.5	40	48	199	70						
	40040-13	40.0	40	48	204	70						
	40540-13	40.5	40	48	204	70						
	41040-13	41.0	40	48	209	70						
	41540-13	41.5	40	48	209	70						
	42040-13	42.0	40	48	214	70						
	42540-13	42.5	40	48	214	70						
	43040-15	43.0	40	58	220	70				SPMT15M510-PD XOMT15M508-PD	FTNC04511	TW20S
	43540-15	43.5	40	58	221	70						
	44040-15	44.0	40	58	225	70						
	44540-15	44.5	40	58	225	70						
	45040-15	45.0	40	58	230	70						
	45540-15	45.5	40	58	230	70						
46040-15	46.0	40	58	235	70							
46540-15	46.5	40	58	235	70							
47040-15	47.0	40	58	240	70							
47540-15	47.5	40	58	240	70							
48040-15	48.0	40	58	245	70	SPMT180510-PD XOMT180508-PD	FTNA0511	TW20-100				
48540-15	48.5	40	58	245	70							
49040-15	49.0	40	58	250	70							
49540-15	49.5	40	58	250	70							
50040-15	50.0	40	58	255	70							
50540-15	50.5	40	58	255	70							
51040-18	51.0	40	68	261	70							
51540-18	51.5	40	68	261	70							
52040-18	52.0	40	68	266	70							
52540-18	52.5	40	68	266	70							
53040-18	53.0	40	68	271	70							
53540-18	53.5	40	68	271	70							
54040-18	54.0	40	68	276	70							
54540-18	54.5	40	68	276	70							
55040-18	55.0	40	68	281	70							
55540-18	55.5	40	68	281	70							
56040-18	56.0	40	68	286	70							
56540-18	56.5	40	68	286	70							
57040-18	57.0	40	68	292	70							
57540-18	57.5	40	68	292	70							
58040-18	58.0	40	68	298	70							
58540-18	58.5	40	68	298	70							
59040-18	59.0	40	68	304	70							
59540-18	59.5	40	68	304	70							
60040-18	60.0	40	68	310	70							
60540-18	60.5	40	68	310	70							


↻ Applicable inserts **G06**



Drill with through coolant system for general lathe and CNC lathe without through coolant system


KING DRILL *New* (for through coolant system with a lathe)

- Through coolant system with drill holder, plug, oil-hole hose and oil-hole pump
- NPT TAP in the plug is combined to NPT TAP connected to oil hose.
- Available to use the drill without a plug in milling machine

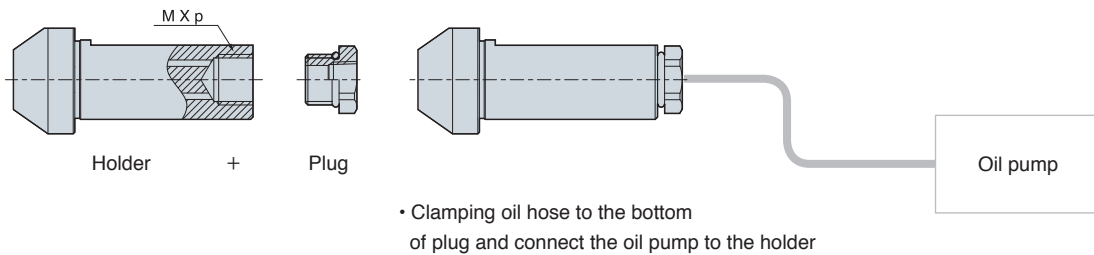

(mm)



Tap type	Diameter	Shank Dia.	M x p	Plug
K□D120~16020HP-□□	Ø12.0 ~ Ø16.0	Ø20	M12 x 1.5	PLG12PT18
K□D161~23525HP-□□	Ø16.1 ~ Ø23.5	Ø25	M16 x 1.5	PLG16PT18
K□D236~35532HP-□□	Ø23.6 ~ Ø35.5	Ø32	M20 x 2.0	PLG20PT14
K□D356~60940HP-□□	Ø35.6 ~ Ø60.5	Ø40	M27 x 2.0	PLG27PT38

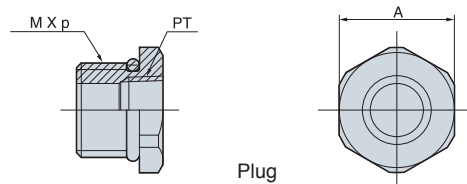

• Plug is assembled.

Plug Type	M x p	PT Tap	A
PLG12PT18	M12 x 1.5	1/8	16
PLG16PT18	M16 x 1.5	1/8	19
PLG20PT14	M20 x 2.0	1/4	26
PLG27PT38	M27 x 2.0	3/8	35

KING DRILL (for through coolant system with a lathe)-2D New

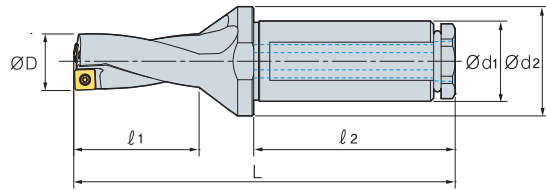


(mm)

Designation		ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw	Wrench
K2D	13020HP-04	13.0	20	25	29	50	93	SPMT040204-PD XOMT040204-PD	FTNA0204	TW06P
	14020HP-05	14.0	20	25	31	50	96	SPMT050204-PD XOMT050204-PD	FTNA0204	TW06P
	15020HP-05	15.0	20	25	33	50	99			
	16020HP-05	16.0	20	25	35	50	101			
	17025HP-06	17.0	25	34	37	56	109	SPMT060205-PD XOMT060204-PD	FTKA02206S	TW07P
	18025HP-06	18.0	25	34	39	56	112			
	19025HP-06	19.0	25	34	41	56	114			
	20025HP-07	20.0	25	34	43	56	118	SPMT07T208-PD XOMT07T205-PD	FTKA02565	TW07S
	21025HP-07	21.0	25	34	45	56	120			
	22025HP-07	22.0	25	34	47	56	122			
	23025HP-07	23.0	25	34	49	56	126			
	24032HP-09	24.0	32	44	51	60	133	SPMT090308-PD XOMT090305-PD	FTKA0307	TW09S
	25032HP-09	25.0	32	44	53	60	135			
	26032HP-09	26.0	32	44	55	60	137			
	27032HP-09	27.0	32	44	57	60	140			
	28032HP-09	28.0	32	44	59	60	143			
29032HP-09	29.0	32	44	61	60	145				

↻ Applicable inserts **G06**

KING DRILL(for through coolant system with a lathe)- 3D **New**


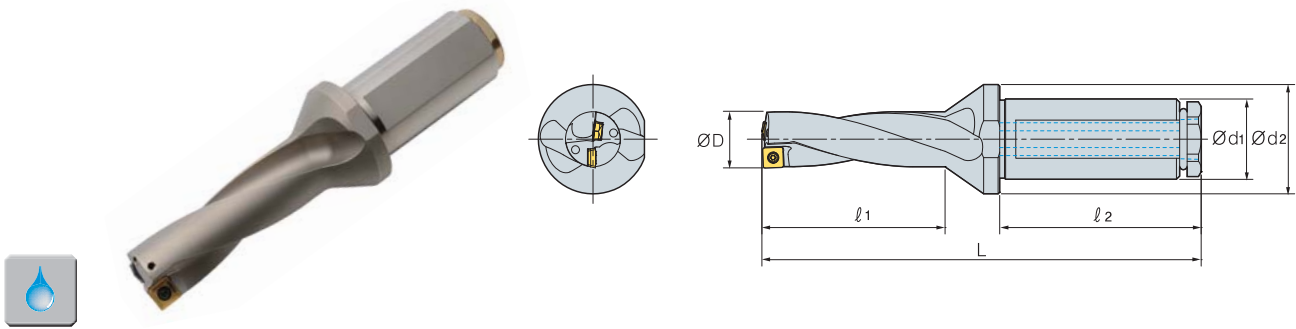


Designation		ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw	Wrench
K3D	13020HP-04	13.0	20	25	42	50	106	SPMT040204-PD XOMT040204-PD	FTNA0204	TW06P
	13520HP-04	13.5	20	25	42	50	106			
	14020HP-05	14.0	20	25	45	50	110			
	14520HP-05	14.5	20	25	45	50	110			
	15020HP-05	15.0	20	25	48	50	114	SPMT050204-PD XOMT050204-PD	FTNA0204	TW06P
	15520HP-05	15.5	20	25	48	50	114			
	16020HP-05	16.0	20	25	51	50	117			
	16525HP-06	16.5	25	34	51	56	123			
	17025HP-06	17.0	25	34	54	56	126			
	17525HP-06	17.5	25	34	54	56	126			
	18025HP-06	18.0	25	34	57	56	130	SPMT060205-PD XOMT060204-PD	FTKA02206S	TW07P
	18525HP-06	18.5	25	34	57	56	130			
	19025HP-06	19.0	25	34	60	56	133			
	19525HP-06	19.5	25	34	60	56	133			
	20025HP-07	20.0	25	34	63	56	138			
	20525HP-07	20.5	25	34	63	56	138			
	21025HP-07	21.0	25	34	66	56	141			
	21525HP-07	21.5	25	34	66	56	141	SPMT07T208-PD XOMT07T205-PD	FTKA02565	TW07S
	22025HP-07	22.0	25	34	69	56	144			
	22525HP-07	22.5	25	34	69	56	144			
	23025HP-07	23.0	25	34	72	56	149			
	23525HP-07	23.5	25	34	72	56	149			
	24032HP-09	24.0	32	44	75	60	157			
	24532HP-09	24.5	32	44	75	60	157			
	25032HP-09	25.0	32	44	78	60	160			
	25532HP-09	25.5	32	44	78	60	160			
	26032HP-09	26.0	32	44	81	60	163			
	26532HP-09	26.5	32	44	81	60	163	SPMT090308-PD XOMT090305-PD	FTKA0307	TW09S
	27032HP-09	27.0	32	44	84	60	167			
	27532HP-09	27.5	32	44	84	60	167			
	28032HP-09	28.0	32	44	87	60	171			
	28532HP-09	28.5	32	44	87	60	171			
29032HP-09	29.0	32	44	90	60	174				
29532HP-09	29.5	32	44	90	60	174				

↪ Applicable inserts **G06**

KING DRILL (for through coolant system with a lathe)-4D

New

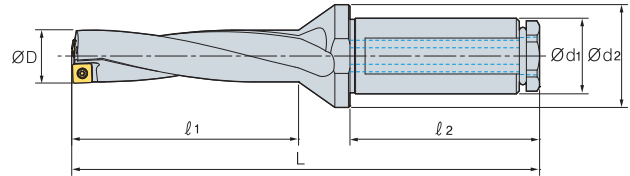

(mm)


Designation		ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert	Screw	Wrench
K4D	13020HP-04	13.0	20	25	29	50	93	SPMT040204-PD XOMT040204-PD	FTNA0204	TW06P
	14020HP-05	14.0	20	25	59	50	124	SPMT050204-PD XOMT050204-PD	FTNA0204	TW06P
	15020HP-05	15.0	20	25	63	50	129			
	16020HP-05	16.0	20	25	67	50	133			
	17025HP-06	17.0	25	34	71	56	143	SPMT060205-PD XOMT060204-PD	FTKA02206S	TW07P
	18025HP-06	18.0	25	34	75	56	148			
	19025HP-06	19.0	25	34	79	56	152			
	20025HP-07	20.0	25	34	83	56	158	SPMT07T208-PD XOMT07T205-PD	FTKA02565	TW07S
	21025HP-07	21.0	25	34	87	56	162			
	22025HP-07	22.0	25	34	91	56	166			
	23025HP-07	23.0	25	34	95	56	172			
	24032HP-09	24.0	32	44	99	60	181	SPMT090308-PD XOMT090305-PD	FTKA0307	TW09S
	25032HP-09	25.0	32	44	103	60	185			
	26032HP-09	26.0	32	44	107	60	189			
	27032HP-09	27.0	32	44	111	60	194			
	28032HP-09	28.0	32	44	115	60	199			
29032HP-09	29.0	32	44	119	60	203				

↪ Applicable inserts **G06**


High rigidity drill produces cost efficiency due to cartridge replacement.

KING DRILL (for large diameter drilling) *New*

- Cartridge type for $\varnothing 61 \sim \varnothing 100$ drilling.
- Peripheral cartridge can adjust the drilling diameter within 5mm.
- Easy to adjust drilling diameter with adjusting bolt.

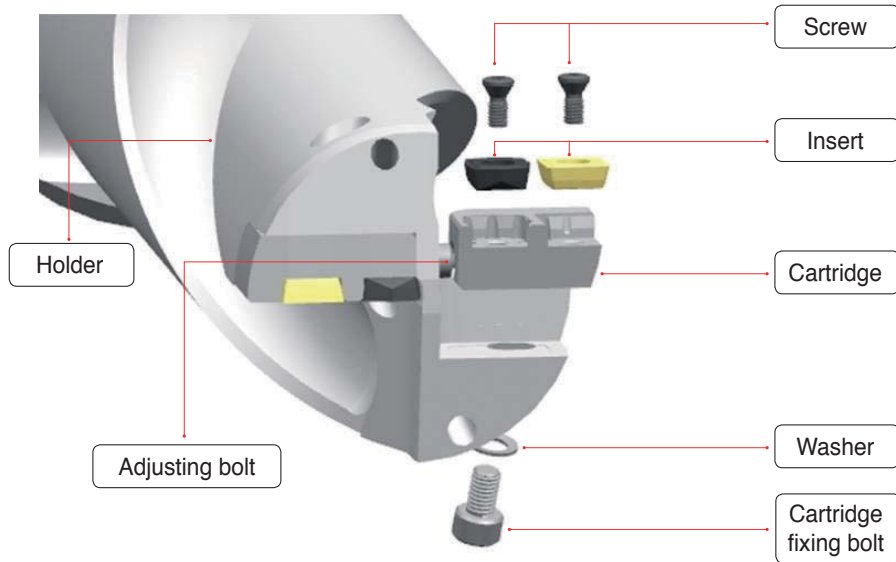

▶ Adjustment of drill diameter

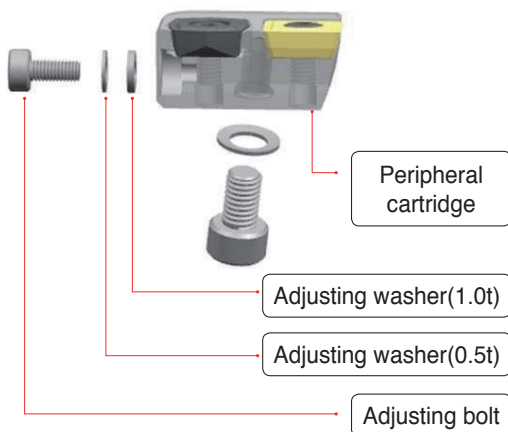


Adjustment \varnothing (mm)	Adjusting Washer	
	Designation	Width(mm)
1	WA0305	0.5
2	WA0310	1.0
3	WA0305 + WA0310	1.5
4	WA0310 x 2	2.0
5	WA0305 + WA0310 x 2	2.5

※ Adjusting washer adjusts the drilling diameter within 5mm.



KING DRILL (for large diameter drilling) New

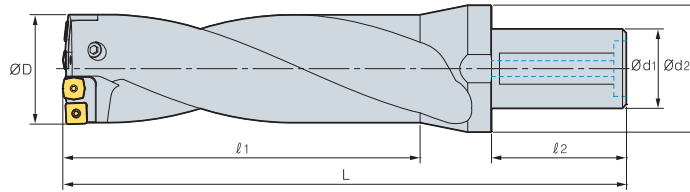

(mm)

Designation	ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Cartridge		Screw	Wrench	
							Internal	External			
K2D	616550-11	61~65	50	80	130	80	255	KDC6165C	KDC6165P	FTKA03508	TW15S
	657050-13	65~70	50	88	140	80	265	KDC6570C	KDC6570P	FTKA0410	TW15S
	707550-13	70~75	50	88	150	80	275	KDC7075C	KDC7075P	FTKA0410	TW15S
	758050-13	75~80	50	88	160	80	285	KDC7580C	KDC7580P	FTKA0410	TW15S
	808550-15	80~85	50	88	170	80	295	KDC8085C	KDC8085P	FTNC04511	TW20S
	859050-15	85~90	50	95	180	80	305	KDC8590C	KDC8590P	FTNC04511	TW20S
	909550-15	90~95	50	95	190	80	315	KDC9095C	KDC9095P	FTNC04511	TW20S
	9510050-18	95~100	50	95	200	80	325	KDC95100C	KDC95100P	FTNA0511	TW20-100
K3D	616550-11	61~65	50	80	195	80	320	KDC6165C	KDC6165P	FTKA03508	TW15S
	657050-13	65~70	50	88	210	80	335	KDC6570C	KDC6570P	FTKA0410	TW15S
	707550-13	70~75	50	88	225	80	350	KDC7075C	KDC7075P	FTKA0410	TW15S
	758050-13	75~80	50	88	240	80	365	KDC7580C	KDC7580P	FTKA0410	TW15S
	808550-15	80~85	50	88	255	80	380	KDC8085C	KDC8085P	FTNC04511	TW20S
	859050-15	85~90	50	95	270	80	395	KDC8590C	KDC8590P	FTNC04511	TW20S
	909550-15	90~95	50	95	285	80	410	KDC9095C	KDC9095P	FTNC04511	TW20S
	9510050-18	95~100	50	95	300	80	425	KDC95100C	KDC95100P	FTNA0511	TW20-100
K4D	616550-11	61~65	50	80	260	80	385	KDC6165C	KDC6165P	FTKA03508	TW15S
	657050-13	65~70	50	88	280	80	405	KDC6570C	KDC6570P	FTKA0410	TW15S
	707550-13	70~75	50	88	300	80	425	KDC7075C	KDC7075P	FTKA0410	TW15S
	758050-13	75~80	50	88	320	80	445	KDC7580C	KDC7580P	FTKA0410	TW15S
	808550-15	80~85	50	88	340	80	465	KDC8085C	KDC8085P	FTNC04511	TW20S
	859050-15	85~90	50	95	360	80	485	KDC8590C	KDC8590P	FTNC04511	TW20S
	909550-15	90~95	50	95	380	80	505	KDC9095C	KDC9095P	FTNC04511	TW20S
	9510050-18	95~100	50	95	400	80	525	KDC95100C	KDC95100P	FTNA0511	TW20-100

Applicable inserts **G06**

Parts


Cartridge		Range (Ø)	Insert				Screw	Wrench
Internal	External		Designation	Quantity	Designation	Quantity		
KDC6165C	KDC6165P	61 ~ 65	XOM(E)T11T306-□□	2	SPM(E)T11T308-□□	2	FTKA03508	TW15S
KDC6570C	KDC6570P	65 ~ 70	XOM(E)T130406-□□	2	SPM(E)T130410-□□	2	FTKA0410	TW15S
KDC7075C	KDC7075P	70 ~ 75	XOM(E)T130406-□□	2	SPM(E)T130410-□□	2	FTKA0410	TW15S
KDC7580C	KDC7580P	75 ~ 80	XOM(E)T130406-□□	2	SPM(E)T130410-□□	2	FTKA0410	TW15S
KDC8085C	KDC8085P	80 ~ 85	XOM(E)T15M508-□□	2	SPM(E)T15M510-□□	2	FTNC04511	TW20S
KDC8590C	KDC8590P	85 ~ 90	XOM(E)T15M508-□□	2	SPM(E)T15M510-□□	2	FTNC04511	TW20S
KDC9095C	KDC9095P	90 ~ 95	XOM(E)T15M508-□□	2	SPM(E)T15M510-□□	2	FTNC04511	TW20S
KDC95100C	KDC95100P	95 ~ 100	XOM(E)T180508-□□	2	SPM(E)T180510-□□	2	FTNA0511	TW20-100




Cone Shaped Head Indexable Drill

TPDC *New*


- Clamping design
 - One step clamp system → Increased stability
 - Clamping system allowing to change inserts while the holder is attached on the machine → Shortened setting time
- Optimized blade design
 - Excellent chip control → Possibility to use for various types of workpieces
- Helical shaped coolant hole system
 - Wide chip pocket area secured → Better lubrication + chip flow improved
- Material technology
 - Ultra fine substrate + Multi layer coating applied → Excellent anti chipping & wear resistance

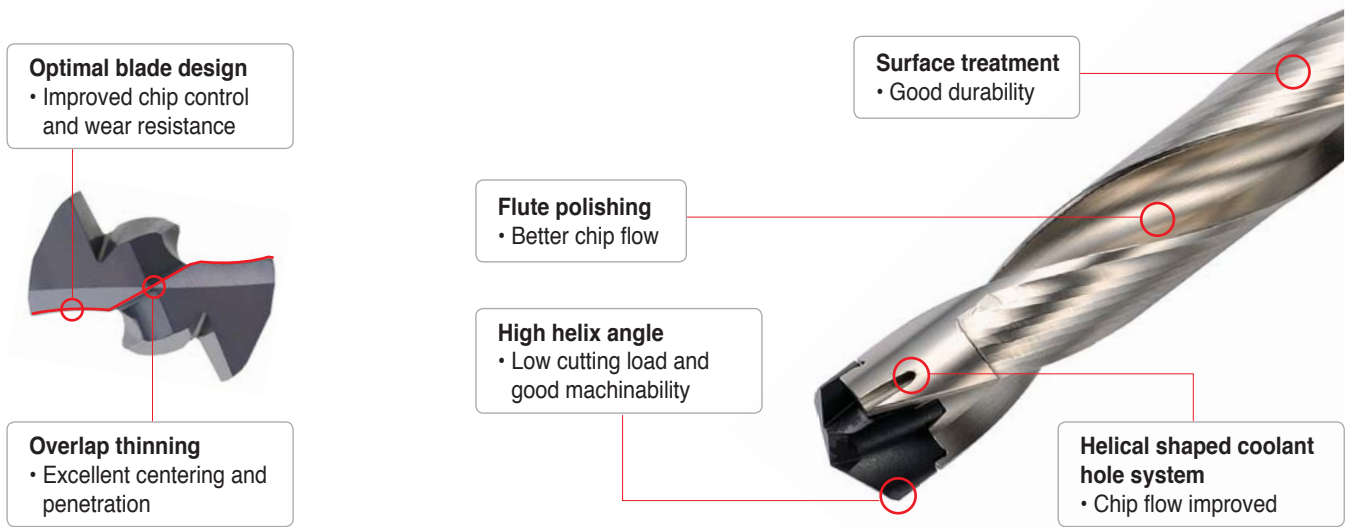

▶ Code system of holder

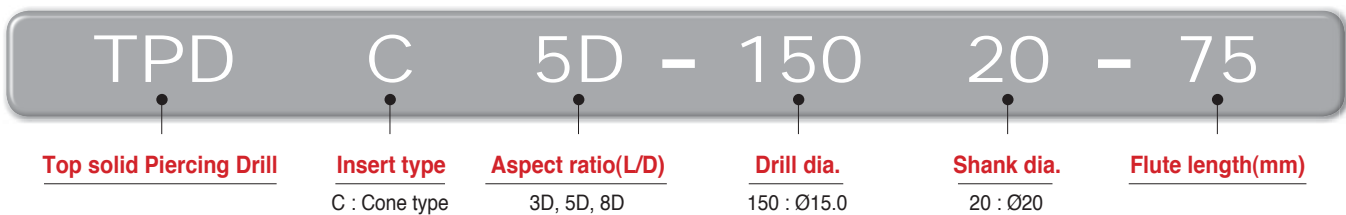


▶ Code system of insert

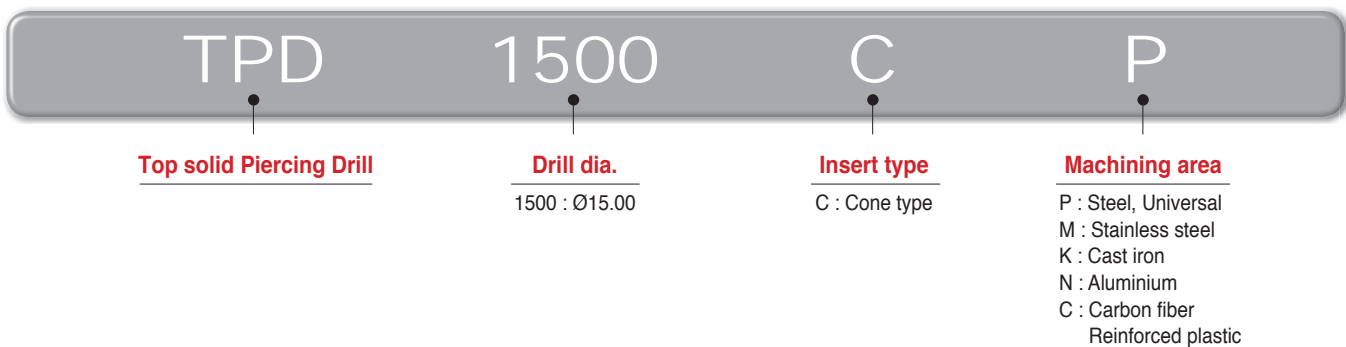

Features of Clamping System

▶ **One Step Clamp System** → Easy and quick tool change with good repeatability

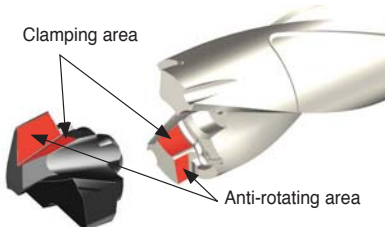


- **Clamping area** : Easy and fast tool change
- **Anti-rotating area** : Performs as a stopper
- Clamping and anti-rotating area make an acute angle to prevent insert rotation while machining

Durability test

- **Workpiece** : SCM440(HRC22)
- **Cutting condition** : Drill dia.(mm) = $\varnothing 15.0$
vc(m/min) = 90
fn(mm/rev) = 0.25, ap(mm) = 60
wet
- **Tools** : **Insert** TPD1500CP(PC5335)
Holder TPDC5D-15020-75

→ After using 40 inserts, the setting run-out remains below $15\mu\text{m}$

Sustainability test

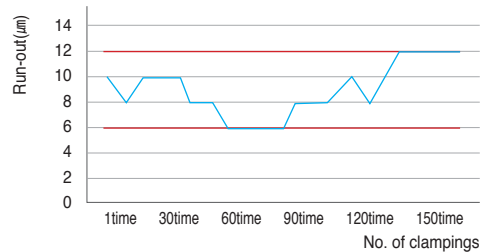


Excellent Sustainability

→ After clamping 150 times, the drill run-out remains

Cutting Performance

Part of machine

- **Workpiece** : Alloy steel (SCM440, HRC22)
- **Cutting condition** : Drill dia.(mm) = $\varnothing 19.0$
vc(m/min) = 100
fn(mm/rev) = 0.3
ap(mm) = 90
wet
- **Tools** : **Insert** TPD1900CP (PC5335)
Holder TPDC5D-19025-95

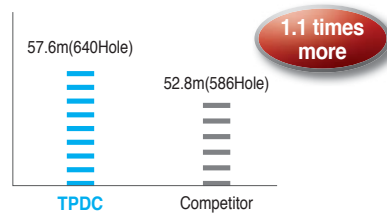

1.1 times more

→ Lubricative multi layer coating prevents chipping on cutting edges.




TPDC



Competitor

Part of machine

- **Workpiece** : Carbon steel (SM45C, HRC40)
- **Cutting condition** : Drill dia.(mm) = $\varnothing 18.0$
vc(m/min) = 60
fn(mm/rev) = 0.15
ap(mm) = 65
wet
- **Tools** : **Insert** TPD1800CP (PC5335)
Holder TPDC5D-18025-90

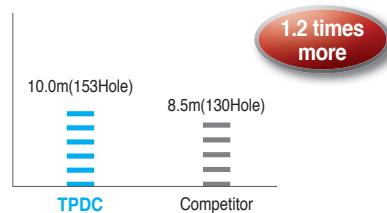

1.2 times more

→ Lubricative multi layer coating enhances wear resistance.




Recommended Cutting Condition

Workpiece			Grade	vc	Depth of cut = 3D, 5D		
ISO	Workpiece	HB			Feed rate (mm/rev) per drill dia.(mm)		
				m/min	$\varnothing 12.00\sim\varnothing 15.99$	$\varnothing 16.00\sim\varnothing 19.99$	
P	Carbon steel	Low carbon steel	80~120	PC5335	110(80~140)	0.15~0.30	0.20~0.35
		High carbon steel	180~280	PC5335	100(70~130)	0.15~0.30	0.20~0.35
	Alloy steel	Low alloy steel	140~260	PC5335	110(80~140)	0.18~0.35	0.23~0.38
		Low pre-hardened steel	200~400	PC5335	75(50~100)	0.18~0.35	0.23~0.38
		High alloy steel	260~320	PC5335	70(50~90)	0.18~0.30	0.20~0.35
	High pre-hardened steel	300~450	PC5335	60(40~80)	0.18~0.30	0.20~0.35	

- In case of 8D, reduce the cutting condition 40~50% lower than above after machining the beginning of hole(1.5D).
- In case of interrupted machining, reduce the feed to 0.1~0.15 around the interrupted part.


▶ How to Make Good Insert Clamping

1




① Clean the mounting seat with air or cloth.

2




② Put an insert on the holder.

3





③ A part of wrench and B part of insert must be parallel to each other before clamp the insert.
Turn the wrench clockwise to finish clamping.




Clamped state

▶ Coolant Tip


- Workpiece : SCM440(HRC22)
- Cutting condition : $vc(m/min) = 100$, wet

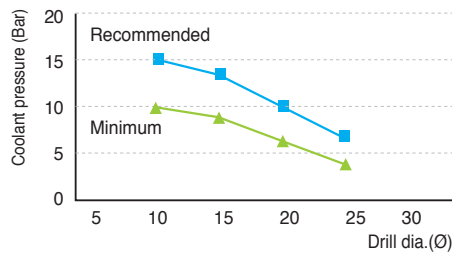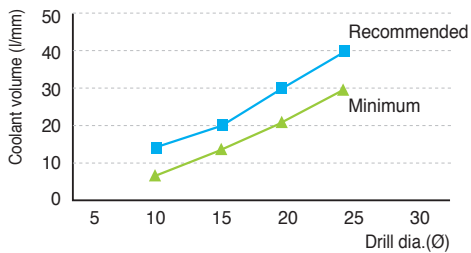

▶ Precautions When Setting

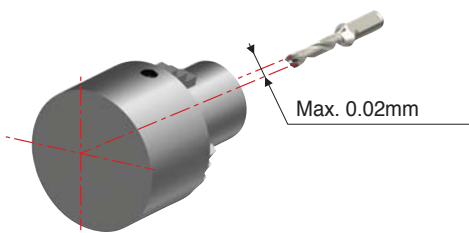



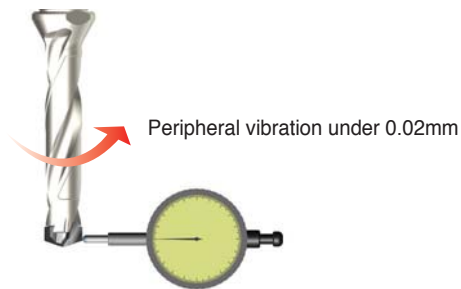

Setting of the horizontal equipment






Setting of the vertical equipment

▶ Precautions When Drilling

Ramping	Machining verlapped panels	Plunging	Boring
			
<p>1. A slope inclined more than 6° is not allowed.</p> <p>2. When entering, reduce the feed to 30~50%.</p>	<p>1. Space between panels affects chip evacuation problem.</p> <p>2. Do not make space between panels.</p>	<p>Not allowed</p>	<p>Not allowed</p>

TPDC Insert *New*



(mm)

Designation	Drill dia. (ØD)	W	Grade	Holder	Wrench
TPD	1200CP	12.0	PC5335	TPDC(3, 5, 8)D-12016-(36, 60, 96)	TPDC-W12
	1220CP	12.2			
	1250CP	12.5		TPDC(3, 5, 8)D-12516-(38, 63, 100)	
	1260CP	12.6			
	1300CP	13.0	PC5335	TPDC(3, 5, 8)D-13016-(39, 65, 104)	TPDC-W13
	1350CP	13.5			
	1400CP	14.0	PC5335	TPDC(3, 5, 8)D-14020-(42, 70, 112)	TPDC-W14
	1420CP	14.2			
	1430CP	14.3			
	1450CP	14.5	PC5335	TPDC(3, 5, 8)D-14520-(44, 73, 116)	TPDC-W15
	1500CP	15.0			
	1550CP	15.5	PC5335	TPDC(3, 5, 8)D-15020-(45, 75, 120)	TPDC-W16
	1600CP	16.0			
	1630CP	16.3			
	1650CP	16.5			
	1670CP	16.7	PC5335	TPDC(3, 5, 8)D-16020-(48, 80, 128)	TPDC-W17
	1700CP	17.0			
	1750CP	17.5			
	1770CP	17.7	PC5335	TPDC(3, 5, 8)D-17020-(51, 85, 136)	TPDC-W18
	1800CP	18.0			
1810CP	18.1				
1850CP	18.5				
1860CP	18.6	PC5335	TPDC(3, 5, 8)D-18025-(54, 90, 144)	TPDC-W19	
1870CP	18.7				
1900CP	19.0				
1920CP	19.2	PC5335	TPDC(3, 5, 8)D-19025-(57, 95, 152)	TPDC-W19	
1950CP	19.5				
1970CP	19.7				

※ Order made items available

▶ Recommended Torque per Wrench

(mm)

Designation	Drill dia.(ØD)	Torque(Nm)
TPDC-W12	12.0 ~ 12.9	2.5
TPDC-W13	13.0 ~ 13.9	2.5
TPDC-W14	14.0 ~ 14.9	2.5
TPDC-W15	15.0 ~ 15.9	2.5
TPDC-W16	16.0 ~ 16.9	2.5
TPDC-W17	17.0 ~ 17.9	3.5
TPDC-W18	18.0 ~ 18.9	3.5
TPDC-W19	19.0 ~ 19.9	3.5



TPDC3D/5D/8D *New*

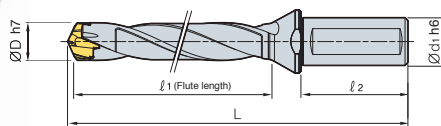


Fig.1

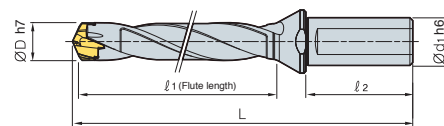


Fig.2



(mm)

Designation	ØD	Ød	Ød ₁	ℓ ₁	ℓ ₂	L	Insert	Fig.
TPDC 3D-12016-36	12.00~12.49	16	20	36	48	99	TPD1200C□-1249C□	1
3D-12516-38	12.50~12.99	16	20	38	48	101	TPD1250C□-1299C□	1
3D-13016-39	13.00~13.49	16	20	39	48	103	TPD1300C□-1349C□	1
3D-13516-41	13.50~13.99	16	20	41	48	105	TPD1350C□-1399C□	1
3D-14016-42	14.00~14.49	16	20	42	48	106	TPD1400C□-1449C□	1
3D-14516-44	14.50~14.99	16	20	44	48	107	TPD1450C□-1499C□	1
3D-15020-45	15.00~15.99	20	25	45	50	113	TPD1500C□-1599C□	2
3D-16020-48	16.00~16.99	20	25	48	50	117	TPD1600C□-1699C□	2
3D-17020-51	17.00~17.99	20	25	51	50	120	TPD1700C□-1799C□	2
3D-18025-54	18.00~18.99	25	33	54	56	132	TPD1800C□-1899C□	2
3D-19025-57	19.00~19.99	25	33	57	56	135	TPD1900C□-1999C□	2
5D-12016-60	12.00~12.49	16	20	60	48	123	TPD1200C□-1249C□	1
5D-12516-63	12.50~12.99	16	20	63	48	126	TPD1250C□-1299C□	1
5D-13016-65	13.00~13.49	16	20	65	48	129	TPD1300C□-1349C□	1
5D-13516-68	13.50~13.99	16	20	68	48	132	TPD1350C□-1399C□	1
5D-14016-70	14.00~14.49	16	20	70	48	134	TPD1400C□-1449C□	1
5D-14516-73	14.50~14.99	16	20	73	48	136	TPD1450C□-1499C□	1
5D-15020-75	15.00~15.99	20	25	75	50	143	TPD1500C□-1599C□	2
5D-16020-80	16.00~16.99	20	25	80	50	149	TPD1600C□-1699C□	2
5D-17020-85	17.00~17.99	20	25	85	50	154	TPD1700C□-1799C□	2
5D-18025-90	18.00~18.99	25	33	90	56	168	TPD1800C□-1899C□	2
5D-19025-95	19.00~19.99	25	33	95	56	173	TPD1900C□-1999C□	2
8D-12016-96	12.00~12.49	16	20	96	48	159	TPD1200C□-1249C□	1
8D-12516-100	12.50~12.99	16	20	100	48	163	TPD1250C□-1299C□	1
8D-13016-104	13.00~13.49	16	20	104	48	168	TPD1300C□-1349C□	1
8D-13516-108	13.50~13.99	16	20	108	48	173	TPD1350C□-1399C□	1
8D-14016-112	14.00~14.49	16	20	112	48	176	TPD1400C□-1449C□	1
8D-14516-116	14.50~14.99	16	20	116	48	180	TPD1450C□-1499C□	1
8D-15020-120	15.00~15.99	20	25	120	50	188	TPD1500C□-1599C□	2
8D-16020-128	16.00~16.99	20	25	128	50	197	TPD1600C□-1699C□	2
8D-17020-136	17.00~17.99	20	25	136	50	205	TPD1700C□-1799C□	2
8D-18025-144	18.00~18.99	25	33	144	56	222	TPD1800C□-1899C□	2
8D-19025-152	19.00~19.99	25	33	152	56	230	TPD1900C□-1999C□	2


※ The shank is based on DIN6535 and ISO9677.

High precision grinding and superior clamping precision with auto-centering system

TPDB *New*

- High precision clamping system - High precision grinding and superior clamping precision with auto-centering system.
- Screw on clamping system - Easy clamping system of TPDB insert.
- Sharp cutting edge - Improved chip evacuation, low cutting load, longer tool life with ultra-fine substrate and exclusive coating layer.
- Holder with excellent durability - Holder with high rigidity and superb wear resistance due to special surface treatment.



▶ Code system of holder

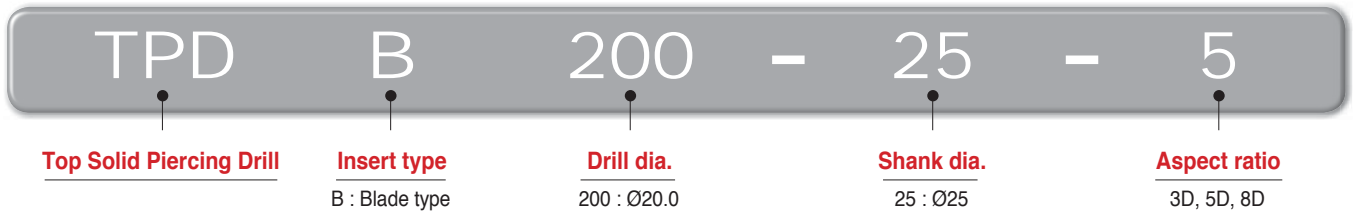

▶ Code system of Insert




▶ Features

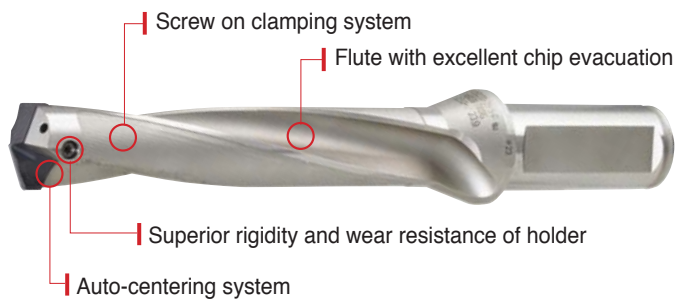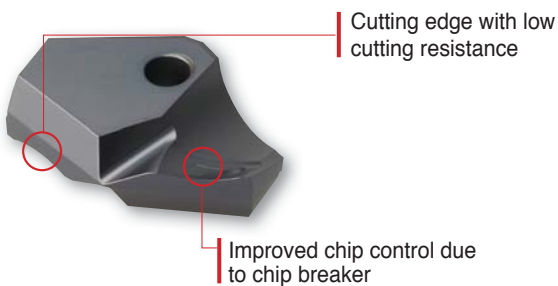


▶ Tool Cost

Comparison of 1 insert tool life

- Exclusive coating and substrate
- Usable till the end of wear (no need regrinding)

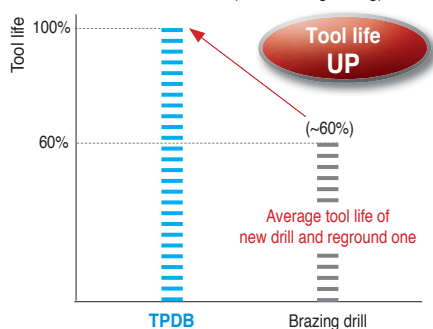


Comparison of tool cost when machining 1000PCS of workpiece

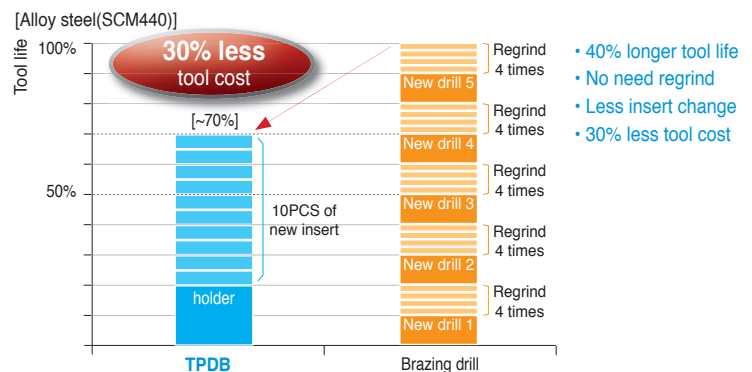

▶ Application example


Part of automobile

- **Workpiece** : GCD 500
- **Cutting condition** : $vc(m/min)=98$
 $fn(mm/rev)=0.31$
 $ap(mm)=40$
 Inner coolant system
- **Tools** : Insert TPD195B(PC5300)
 Holder TPDB195-25-3
- **Machine** : MCT (vertical)

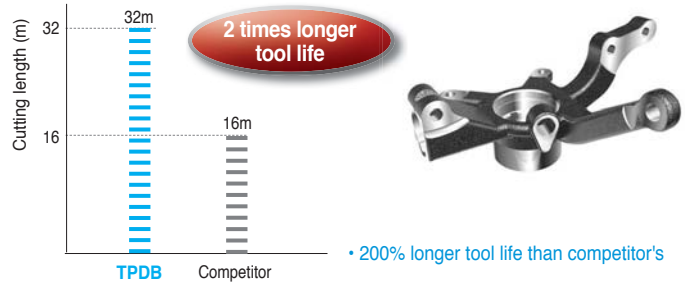

Part of heavy equipment

- **Workpiece** : Hot Forged Steel
- **Cutting condition** : $vc(m/min)=85$
 $fn(mm/rev)=0.2$
 $ap(mm)=20$
 Inner coolant system
- **Tools** : Insert TPD210B(PC5300)
 Holder TPDB210-25-3
- **Machine** : MCT (vertical)

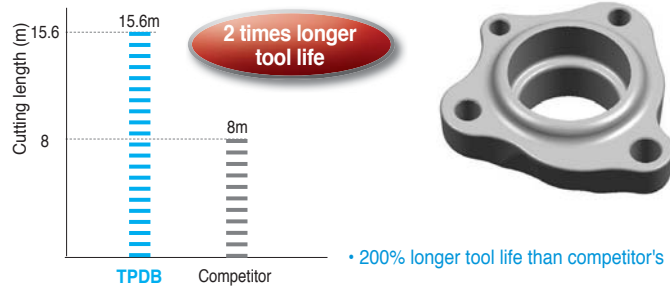


▶ Recommended Cutting Condition

Workpiece			Grade	vc	Depth of cut = 3D~5D Feed rate (mm/rev) per drill dia.(mm)			
ISO	Workpiece	HB			m/min	10~15.9	16~24.9	25~32.9
P	Carbon steel	Low carbon steel	80~120	PC5300, PC5335	110(80~140)	0.15~0.30	0.20~0.35	0.25~0.40
		High carbon steel	180~280	PC5300, PC5335	100(70~130)	0.15~0.30	0.20~0.35	0.25~0.40
	Alloy steel	Low alloy steel	140~260	PC5300	110(80~140)	0.18~0.35	0.23~0.38	0.28~0.43
		Low pre-hardened steel	200~400	PC5300	75(50~100)	0.18~0.35	0.23~0.38	0.28~0.43
		High alloy steel	260~320	PC5300	70(50~90)	0.18~0.30	0.20~0.35	0.25~0.40
	High pre-hardened steel	300~450	PC5300	60(40~80)	0.18~0.30	0.20~0.35	0.25~0.40	
M	Stainless Steel	Austenite series	135~275	PC5300	50(30~70)	0.13~0.25	0.15~0.30	0.17~0.33
		Ferrite series Martensite series	13~275	PC5300	55(40~70)	0.13~0.25	0.15~0.30	0.17~0.33
K	Cast Iron	Gray cast iron	150~230	PC5300	110(80~140)	0.18~0.35	0.20~0.40	0.25~0.45
		Ductile cast iron	160~260	PC5300	100(70~130)	0.18~0.35	0.20~0.40	0.25~0.45
S	Heat Resisting Steel	Ni-heat resisting alloy	130~400	PC5300	40(20~60)	0.10~0.20	0.12~0.22	0.13~0.25
		Ti-heat resisting alloy	130~400	PC5300	40(20~60)	0.10~0.20	0.12~0.22	0.13~0.25
		High hardened steel	400~	PC5300	35(20~50)	0.10~0.20	0.12~0.22	0.13~0.25


- In case of 8D, reduce the cutting conditions to 40~50% or machine the beginning of hole first.(1.5D)
- In case of interrupted machining, reduce the feed to 30~50% machining around the interrupted part.

▶ Technical information


Cutting oil quantity

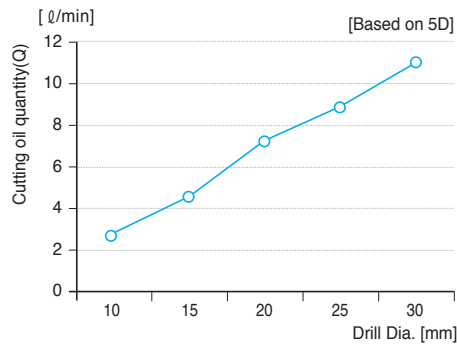


Pressure of cutting oil

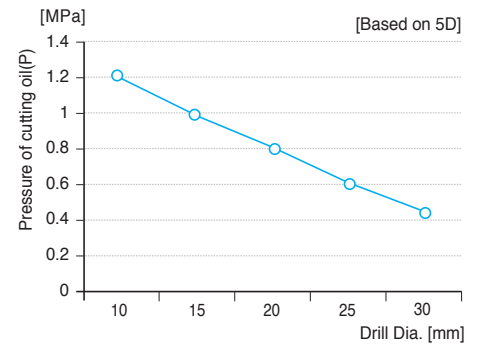

Cutting power

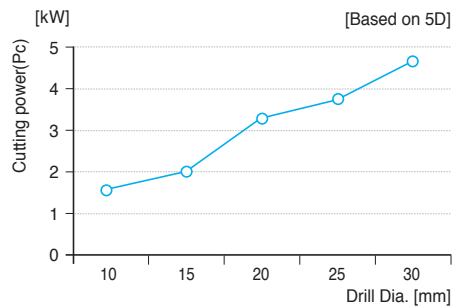

Feed

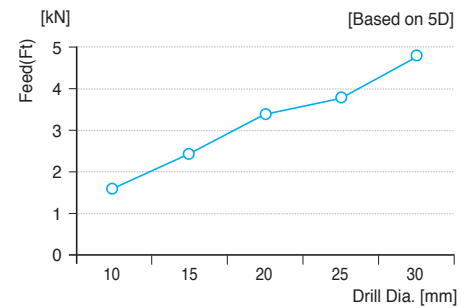


▶ How to clamp a TPDB insert

Clamping an insert on a holder




- Put an insert in the holder.
- As the Fig.1, clamp the insert while pushing it to the V shaped groove of the holder.
- Screw the insert.

Changing an insert on the machine

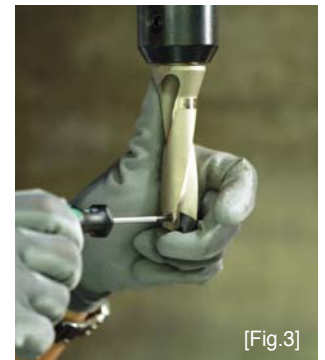

- Separate the insert from the holder.
- As the Fig.2, clean the insert seat
- Place the insert to the mounting seat.
- As the Fig.3, clamp the insert while pushing it to the V shaped groove of the holder.

TPDB Insert *New*

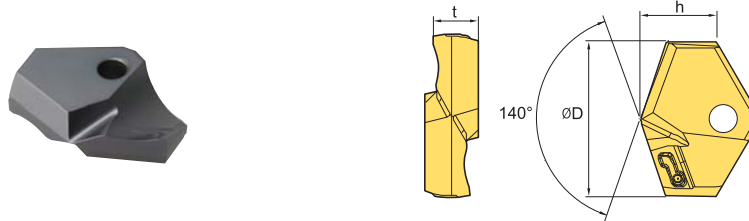


(mm)					
Designation	Grade	ØD	h	t	
TPD	100B-109B	PC5300	10.0 ~ 10.9	5.5	3.5
	110B-119B	PC5300	11.0 ~ 11.9	5.8	3.5
	120B-129B	PC5300	12.0 ~ 12.9	6.3	3.5
	130B-139B	PC5300	13.0 ~ 13.9	6.5	4.0
	140B-149B	PC5300	14.0 ~ 14.9	6.8	4.0
	150B-159B	PC5300	15.0 ~ 15.9	7.0	4.0
	160B-169B	PC5300	16.0 ~ 16.9	7.7	5.5
	170B-179B	PC5300	17.0 ~ 17.9	7.9	5.5
	180B-189B	PC5300	18.0 ~ 18.9	8.1	6.0
	190B-199B	PC5300	19.0 ~ 19.9	8.3	6.0
	200B-209B	PC5300	20.0 ~ 20.9	9.7	6.5
	210B-219B	PC5300	21.0 ~ 21.9	9.4	6.5
	220B-229B	PC5300	22.0 ~ 22.9	9.6	7.0
	230B-239B	PC5300	23.0 ~ 23.9	9.8	7.0
	240B-249B	PC5300	24.0 ~ 24.9	10.7	7.5
	250B-259B	PC5300	25.0 ~ 25.9	10.9	7.5
	260B-269B	PC5300	26.0 ~ 26.9	11.0	8.5
	270B-279B	PC5300	27.0 ~ 27.9	11.8	8.5
	280B-289B	PC5300	28.0 ~ 28.9	12.6	9.5
	290B-299B	PC5300	29.0 ~ 29.9	12.9	9.5
300B-309B	PC5300	30.0 ~ 30.9	13	10	
310B-319B	PC5300	31.0 ~ 31.9	13.3	10	
320B-329B	PC5300	32.0 ~ 32.9	13.5	10	

Parts

(mm)					
Designation	Drill Dia.	Screw 	Wrench 	Torque (NM)	
TPD	100B-129B	10.0 ~ 12.9	FTNB0209	TW06P	0.4
	130B-149B	13.0 ~ 14.9	FTNB02512	TW07S	0.8
	150B-179B	15.0 ~ 17.9	FTNB02514	TW07S	0.8
	180B-199B	18.0 ~ 19.9	FTNB0316	TW09S	1.2
	200B-239B	20.0 ~ 23.9	FTNB0319	TW09S	1.2
	240B-259B	24.0 ~ 25.9	FTNB03522	TW15S	3
	260B-279B	26.0 ~ 27.9	FTNB03524	TW15S	3
	280B-299B	28.0 ~ 29.9	FTNB0426	TW15S	3
	300B-329B	30.0 ~ 32.9	FTNB0528	TW20-100	4

TPDB-3D *New*

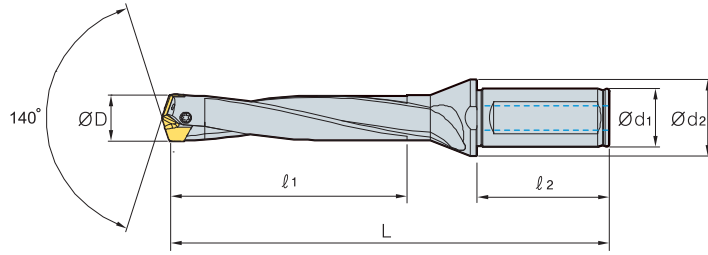


(mm)

Designation	ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert
TPDB 100-16-3	10.0 ~ 10.4	16	20	30.0	48	95	TPD100B ~ 104B
105-16-3	10.5 ~ 10.9	16	20	31.5	48	96	TPD105B ~ 109B
110-16-3	11.0 ~ 11.4	16	20	33.0	48	98	TPD110B ~ 114B
115-16-3	11.5 ~ 11.9	16	20	34.5	48	99	TPD115B ~ 119B
120-16-3	12.0 ~ 12.4	16	20	36.0	48	102	TPD120B ~ 124B
125-16-3	12.5 ~ 12.9	16	20	37.5	48	104	TPD125B ~ 129B
130-16-3	13.0 ~ 13.4	16	20	39.0	48	107	TPD130B ~ 134B
135-16-3	13.5 ~ 13.9	16	20	40.5	48	109	TPD135B ~ 139B
140-16-3	14.0 ~ 14.4	16	20	42.0	48	111	TPD140B ~ 144B
145-16-3	14.5 ~ 14.9	16	20	43.5	48	114	TPD145B ~ 149B
150-20-3	15.0 ~ 15.4	20	25	45.0	50	118	TPD150B ~ 154B
155-20-3	15.5 ~ 15.9	20	25	46.5	50	120	TPD155B ~ 159B
160-20-3	16.0 ~ 16.4	20	25	48.0	50	122	TPD160B ~ 164B
165-20-3	16.5 ~ 16.9	20	25	49.5	50	124	TPD165B ~ 169B
170-20-3	17.0 ~ 17.4	20	25	51.0	50	127	TPD170B ~ 174B
175-20-3	17.5 ~ 17.9	20	25	52.5	50	129	TPD175B ~ 179B
180-25-3	18.0 ~ 18.4	25	33	54.0	56	137	TPD180B ~ 184B
185-25-3	18.5 ~ 18.9	25	33	55.5	56	139	TPD185B ~ 189B
190-25-3	19.0 ~ 19.4	25	33	57.0	56	142	TPD190B ~ 194B
195-25-3	19.5 ~ 19.9	25	33	58.5	56	144	TPD195B ~ 199B
200-25-3	20.0 ~ 20.4	25	33	60.0	56	146	TPD200B ~ 204B
205-25-3	20.5 ~ 20.9	25	33	61.5	56	148	TPD205B ~ 209B
210-25-3	21.0 ~ 21.4	25	33	63.0	60	151	TPD210B ~ 214B
215-25-3	21.5 ~ 21.9	25	33	64.5	60	153	TPD215B ~ 219B
220-25-3	22.0 ~ 22.4	25	33	66.0	60	155	TPD220B ~ 224B
225-25-3	22.5 ~ 22.9	25	33	67.5	60	157	TPD225B ~ 229B
230-25-3	23.0 ~ 23.4	25	33	69.0	60	160	TPD230B ~ 234B
235-25-3	23.5 ~ 23.9	25	33	70.5	60	162	TPD235B ~ 239B
240-32-3	24.0 ~ 24.4	32	43	72.0	60	168	TPD240B ~ 244B
245-32-3	24.5 ~ 24.9	32	43	73.5	60	170	TPD245B ~ 249B
250-32-3	25.0 ~ 25.4	32	43	75.0	60	173	TPD250B ~ 254B
255-32-3	25.5 ~ 25.9	32	43	76.5	60	175	TPD255B ~ 259B
260-32-3	26.0 ~ 26.9	32	43	78.0	60	177	TPD260B ~ 269B
270-32-3	27.0 ~ 27.9	32	43	81.0	60	182	TPD270B ~ 279B
280-32-3	28.0 ~ 28.9	32	43	84.0	60	186	TPD280B ~ 289B
290-32-3	29.0 ~ 29.9	32	43	87.0	60	191	TPD290B ~ 299B
300-32-3	30.0 ~ 30.9	32	43	90.0	60	194	TPD300B ~ 309B
310-32-3	31.0 ~ 31.9	32	43	93.0	60	199	TPD310B ~ 319B
320-32-3	32.0 ~ 32.9	32	43	96.0	60	201	TPD320B ~ 329B

↪ Applicable inserts **G35**



TPDB-5D *New*

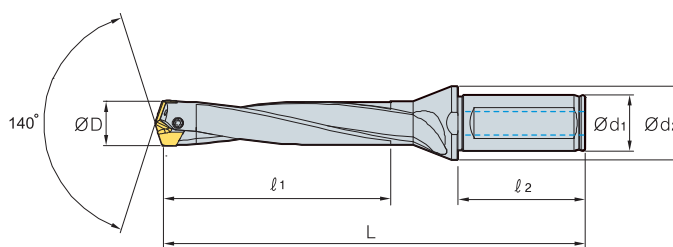


(mm)

Designation	ØD	Ød ₁	Ød ₂	ℓ ₁	ℓ ₂	L	Insert
TPDB 100-16-5	10.0 ~ 10.4	16	20	50.0	48	115	TPD100B ~ 104B
105-16-5	10.5 ~ 10.9	16	20	52.5	48	117	TPD105B ~ 109B
110-16-5	11.0 ~ 11.4	16	20	55.0	48	120	TPD110B ~ 114B
115-16-5	11.5 ~ 11.9	16	20	57.5	48	123	TPD115B ~ 119B
120-16-5	12.0 ~ 12.4	16	20	60.0	48	126	TPD120B ~ 124B
125-16-5	12.5 ~ 12.9	16	20	62.5	48	129	TPD125B ~ 129B
130-16-5	13.0 ~ 13.4	16	20	65.0	48	133	TPD130B ~ 134B
135-16-5	13.5 ~ 13.9	16	20	67.5	48	136	TPD135B ~ 139B
140-16-5	14.0 ~ 14.4	16	20	70.0	48	139	TPD140B ~ 144B
145-16-5	14.5 ~ 14.9	16	20	72.5	48	143	TPD145B ~ 149B
150-20-5	15.0 ~ 15.4	20	25	75.0	50	148	TPD150B ~ 154B
155-20-5	15.5 ~ 15.9	20	25	77.5	50	151	TPD155B ~ 159B
160-20-5	16.0 ~ 16.4	20	25	80.0	50	154	TPD160B ~ 164B
165-20-5	16.5 ~ 16.9	20	25	82.5	50	157	TPD165B ~ 169B
170-20-5	17.0 ~ 17.4	20	25	85.0	50	161	TPD170B ~ 174B
175-20-5	17.5 ~ 17.9	20	25	87.5	50	164	TPD175B ~ 179B
180-25-5	18.0 ~ 18.4	25	33	90.0	56	173	TPD180B ~ 184B
185-25-5	18.5 ~ 18.9	25	33	92.5	56	176	TPD185B ~ 189B
190-25-5	19.0 ~ 19.4	25	33	95.0	56	180	TPD190B ~ 194B
195-25-5	19.5 ~ 19.9	25	33	97.5	56	183	TPD195B ~ 199B
200-25-5	20.0 ~ 20.4	25	33	100.0	56	186	TPD200B ~ 204B
205-25-5	20.5 ~ 20.9	25	33	102.5	56	189	TPD205B ~ 209B
210-25-5	21.0 ~ 21.4	25	33	105.0	60	193	TPD210B ~ 214B
215-25-5	21.5 ~ 21.9	25	33	107.5	60	196	TPD215B ~ 219B
220-25-5	22.0 ~ 22.4	25	33	110.0	60	199	TPD220B ~ 224B
225-25-5	22.5 ~ 22.9	25	33	112.5	60	202	TPD225B ~ 229B
230-25-5	23.0 ~ 23.4	25	33	115.0	60	206	TPD230B ~ 234B
235-25-5	23.5 ~ 23.9	25	33	117.5	60	209	TPD235B ~ 239B
240-32-5	24.0 ~ 24.4	32	43	120.0	60	216	TPD240B ~ 244B
245-32-5	24.5 ~ 24.9	32	43	122.5	60	219	TPD245B ~ 249B
250-32-5	25.0 ~ 25.4	32	43	125.0	60	223	TPD250B ~ 254B
255-32-5	25.5 ~ 25.9	32	43	127.5	60	226	TPD255B ~ 259B
260-32-5	26.0 ~ 26.9	32	43	130.0	60	229	TPD260B ~ 269B
270-32-5	27.0 ~ 27.9	32	43	135.0	60	236	TPD270B ~ 279B
280-32-5	28.0 ~ 28.9	32	43	140.0	60	242	TPD280B ~ 289B
290-32-5	29.0 ~ 29.9	32	43	145.0	60	249	TPD290B ~ 299B
300-32-5	30.0 ~ 30.9	32	43	150.0	60	254	TPD300B ~ 309B
310-32-5	31.0 ~ 31.9	32	43	155.0	60	261	TPD310B ~ 319B
320-32-5	32.0 ~ 32.9	32	43	160.0	60	265	TPD320B ~ 329B

↻ Applicable inserts **G35**

TPDB-8D *New*

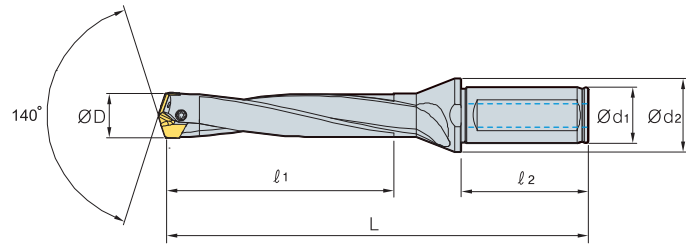

(mm)

Designation	ØD	Ød ₁	Ød ₂	l ₁	l ₂	L	Insert
TPDB 100-16-8	10.0 ~ 10.4	16	20	80	48	145.0	TPD100B ~ 104B
105-16-8	10.5 ~ 10.9	16	20	84	48	149.0	TPD105B ~ 109B
110-16-8	11.0 ~ 11.4	16	20	88	48	153.0	TPD110B ~ 114B
115-16-8	11.5 ~ 11.9	16	20	92	48	157.0	TPD115B ~ 119B
120-16-8	12.0 ~ 12.4	16	20	96	48	162.0	TPD120B ~ 124B
125-16-8	12.5 ~ 12.9	16	20	100	48	166.5	TPD125B ~ 129B
130-16-8	13.0 ~ 13.4	16	20	104	48	172.0	TPD130B ~ 134B
135-16-8	13.5 ~ 13.9	16	20	108	48	176.5	TPD135B ~ 139B
140-16-8	14.0 ~ 14.4	16	20	112	48	181.0	TPD140B ~ 144B
145-16-8	14.5 ~ 14.9	16	20	116	48	186.5	TPD145B ~ 149B
150-20-8	15.0 ~ 15.4	20	25	120	50	193.0	TPD150B ~ 154B
155-20-8	15.5 ~ 15.9	20	25	124	50	197.5	TPD155B ~ 159B
160-20-8	16.0 ~ 16.4	20	25	128	50	202.0	TPD160B ~ 164B
165-20-8	16.5 ~ 16.9	20	25	132	50	206.5	TPD165B ~ 169B
170-20-8	17.0 ~ 17.4	20	25	136	50	212.0	TPD170B ~ 174B
175-20-8	17.5 ~ 17.9	20	25	140	50	216.5	TPD175B ~ 179B
180-25-8	18.0 ~ 18.4	25	33	144	56	227.0	TPD180B ~ 184B
185-25-8	18.5 ~ 18.9	25	33	148	56	231.5	TPD185B ~ 189B
190-25-8	19.0 ~ 19.4	25	33	152	56	237.0	TPD190B ~ 194B
195-25-8	19.5 ~ 19.9	25	33	156	56	241.5	TPD195B ~ 199B
200-25-8	20.0 ~ 20.4	25	33	160	56	246.0	TPD200B ~ 204B
205-25-8	20.5 ~ 20.9	25	33	164	56	250.5	TPD205B ~ 209B
210-25-8	21.0 ~ 21.4	25	33	168	60	256.0	TPD210B ~ 214B
215-25-8	21.5 ~ 21.9	25	33	172	60	260.5	TPD215B ~ 219B
220-25-8	22.0 ~ 22.4	25	33	176	60	265.0	TPD220B ~ 224B
225-25-8	22.5 ~ 22.9	25	33	180	60	269.5	TPD225B ~ 229B
230-25-8	23.0 ~ 23.4	25	33	184	60	275.0	TPD230B ~ 234B
235-25-8	23.5 ~ 23.9	25	33	188	60	279.5	TPD235B ~ 239B
240-32-8	24.0 ~ 24.4	32	43	192	60	288.0	TPD240B ~ 244B
245-32-8	24.5 ~ 24.9	32	43	196	60	292.5	TPD245B ~ 249B
250-32-8	25.0 ~ 25.4	32	43	200	60	298.0	TPD250B ~ 254B
255-32-8	25.5 ~ 25.9	32	43	204	60	302.5	TPD255B ~ 259B
260-32-8	26.0 ~ 26.9	32	43	208	60	307.0	TPD260B ~ 269B
270-32-8	27.0 ~ 27.9	32	43	216	60	317.0	TPD270B ~ 279B
280-32-8	28.0 ~ 28.9	32	43	224	60	326.0	TPD280B ~ 289B
290-32-8	29.0 ~ 29.9	32	43	232	60	336.0	TPD290B ~ 299B
300-32-8	30.0 ~ 30.9	32	43	240	60	344.0	TPD300B ~ 309B
310-32-8	31.0 ~ 31.9	32	43	248	60	354.0	TPD310B ~ 319B
320-32-8	32.0 ~ 32.9	32	43	256	60	361.0	TPD320B ~ 329B

→ Applicable inserts **G35**




Convenient and quickly adjustable drill height


WPDC

Indexable drill clamped with center drill


▶ Code System for Drill

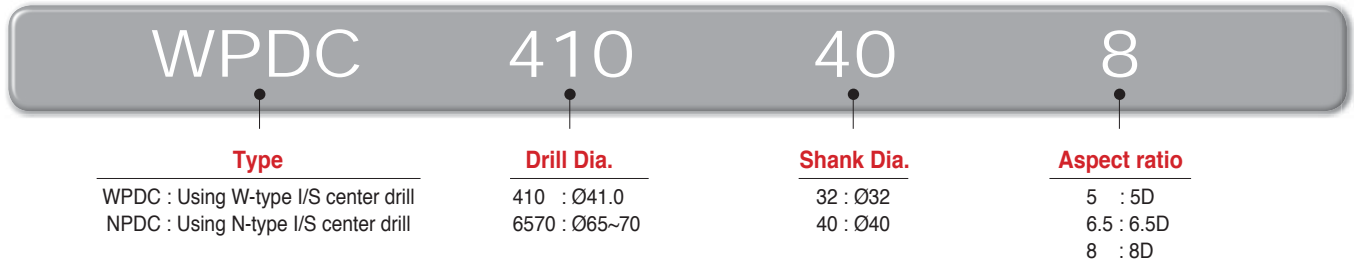


▶ Code System for Cartridge

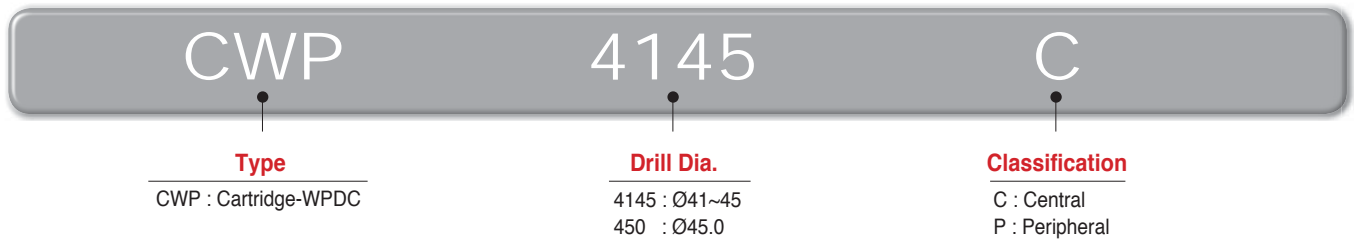

▶ Code System for Center Drill

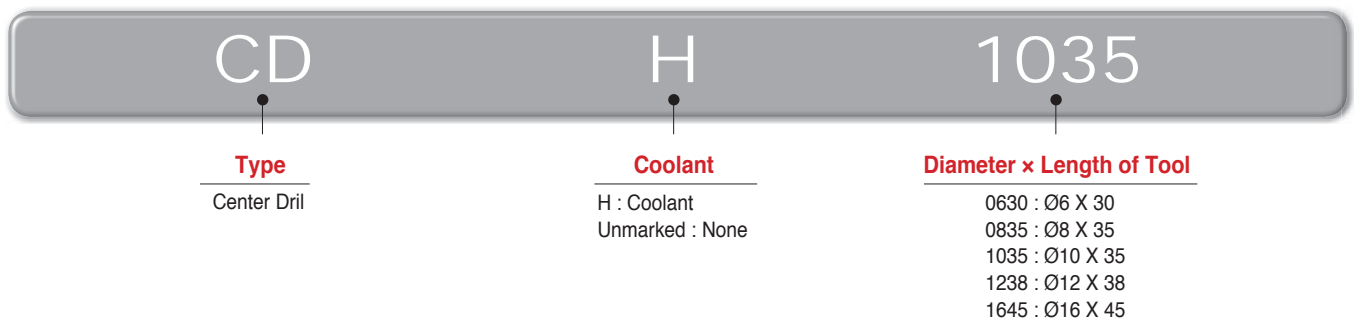


▶ Grade of Center Drill

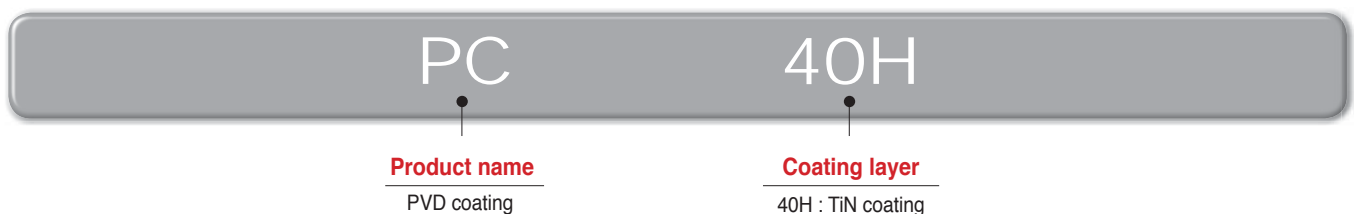

▶ How to clamp the drills

Feature of corn-point system

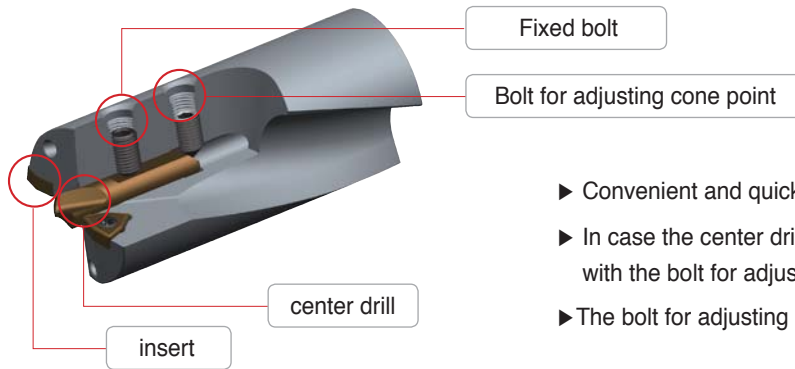

- ▶ Convenient and quick adjustable heights when inserting the center drill
- ▶ In case the center drill brakes while in usage, it can be replaced with the bolt for adjusting cone point.
- ▶ The bolt for adjusting cone point prevents chattering on the center drill.


Clamping

1



Place a center drill.

2



Clamp insert and cartridge.

3



Adjust the center drill with the bolt for adjusting cone point.

4



Clamp the center drill firmly with fixing bolt.

5




Reassure the clamp with bolt for adjusting cone point.

- ※ **Caution**
- (1) Use safety covers for your safety when clamping the center drill and insert.
 - (2) When machining, be careful of the drill disk.

Length of the 'a' part of center drill


The length of 'a' being too short can cause bad surface finish or high cutting load. On the other hand, the length of 'a' being too long can make tool failure and chattering while drilling.

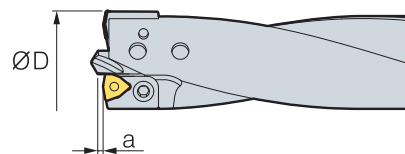

Diameter (ØD)	Length of the 'a' part of center drill		
	Steel	Alloy steel	Non-ferrous metal
25~30	1.2	1.0	1.5
31~40	1.5	1.3	1.8
41~50	1.8	1.5	2.2
51~59	2.2	1.8	2.5
60~75	2.5	2.0	2.8
76~80	3.0	2.5	3.5



▶ Adjusting diameter of cartridge type drill

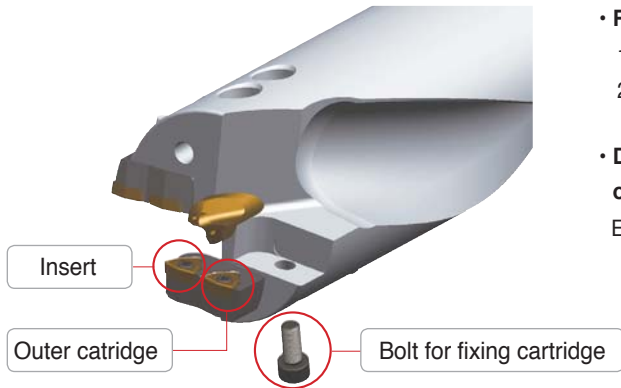

• Range of adjustable drill diameter

1. Single cartridge type(Drill diameter $\varnothing 41\sim\varnothing 59$) \rightsquigarrow -1.0mm
2. Dual cartridge type(Drill diameter $\varnothing 60\sim\varnothing 80$) \rightsquigarrow -5.0mm

• Diameter of the standard drills is provided with maximum size of standards.

Ex) WPDC6570-40-6.5 \rightsquigarrow Drill diameter 70.0mm

- Disassemble a cartridge from the holder by loosening the bolt fixed for outer cartridge.
- Machine after calculating the hole size on the side of the outer cartridge.
- Trim the sharp part after machining.
- Clamp the bolt for fixing cartridge without any gap in between the holder and the machined outer cartridge.

Ex) How to adjust drill diameter to $\varnothing 66.0$ machining with WPDC6570-40-8

\rightsquigarrow To make the drill diameter of outer cartridge to $\varnothing 66.0$, machine 2.0mm. ($\varnothing 70.0 - \varnothing 66.0 = 4 \rightsquigarrow 4 \div 2 = 2(\text{radius})$)

▶ Recommended Cutting Condition


Workpiece			Chip Breaker	Grade	vc m/min	Depth of cut = 5D, 6.5D, 8D Feed rate (mm/rev) per drill dia.(mm)						
ISO	Workpiece	HB				$\sim\varnothing 30$	$\varnothing 31\sim\varnothing 40$	$\varnothing 41\sim\varnothing 50$	$\varnothing 51\sim\varnothing 59$	$\varnothing 60\sim\varnothing 75$	$\varnothing 76\sim\varnothing 80$	
P	Carbon steel	Low carbon steel (~0.25%)	80~180	C21N	PC5335	190(160~220)	0.07~0.11	0.08~0.12	0.10~0.14	0.12~0.16	0.12~0.16	0.12~0.16
		High carbon steel (0.25%~)	180~280	C21N	PC5335	140(110~170)	0.07~0.11	0.08~0.12	0.10~0.14	0.12~0.16	0.12~0.16	0.12~0.16
	Alloy steel	Low alloy steel	140~260	C21N	PC5335	130(100~160)	0.08~0.12	0.08~0.12	0.10~0.14	0.12~0.18	0.12~0.18	0.12~0.18
		High alloy steel	50~260	C21N	PC5335	100(70~130)	0.06~0.10	0.08~0.12	0.08~0.12	0.10~0.16	0.10~0.16	0.10~0.16
M	Stainless steel	Stainless steel	135~275	C21N	PC5335	100(70~130)	0.06~0.10	0.08~0.12	0.10~0.12	0.12~0.14	0.12~0.14	0.12~0.14
K	Cast iron	Gray cast iron	150~220	C21N	PC5335	160(130~190)	0.09~0.15	0.10~0.16	0.12~0.2	0.14~0.22	0.14~0.22	0.14~0.22
		Ductile cast iron	200~300	C21N	PC5335	140(170~110)	0.09~0.15	0.10~0.16	0.12~0.2	0.14~0.22	0.14~0.22	0.14~0.22
		Malleable cast iron	130~230	C21N	PC5335	150(180~120)	0.09~0.15	0.10~0.16	0.12~0.2	0.14~0.22	0.14~0.22	0.14~0.22
N	Alloyed aluminum	Alloyed aluminum	30~150	C21N	PC5335	300(250~350)	0.08~0.12	0.10~0.14	0.12~0.16	0.14~0.18	0.14~0.18	0.14~0.18
	Alloyed copper	Alloyed copper	150~160	C21N	PC5335	250(200~300)	0.08~0.12	0.10~0.14	0.12~0.16	0.14~0.18	0.14~0.18	0.14~0.18
S	Heat resisting alloy	Heat resisting alloy	130~400	C21N	PC5335	50(70~30)	0.05~0.08	0.05~0.08	0.06~0.10	0.06~0.10	0.06~0.10	0.06~0.10

Parts of WPDC type indexable drills

Deaignation	ØD	Insert			Center drill			Cartridge							
		Insert	Screw	Wrench	Center drill	fixed bolt	cone point bolt	Inner	Outer	Fixed bolt					
WPDC250-32-□	25	WC□T030204-C21N	FTKA02206	TW06S	CD0630	KHA0508	KHC0510								
WPDC260~280-32-□	26~28	WC□T040204-C21N	FTNA02555	TW07S		KHA0510									
WPDC290~300-32-□	29~30					WC□T050308-C21N	FTKA0307				TW09S	KHA0610	KHC0610		
WPDC310~350-32-□	31~35	KHA0612													
WPDC360~400-32-□	36~40	WC□T06T308-C21N	FTKA03508	TW15S	CDH1035							KHA0812	KHC0812	CWP410P	BHA0510
WPDC410-40-□	41					CWP420P									
WPDC420-40-□	42					CWP430P									
WPDC430-40-□	43					CWP440P									
WPDC440-40-□	44					CWP450P									
WPDC450-40-□	45					CDH1238	KHA0815				KHC1016			CWP460P	
WPDC460-40-□	46				CWP470P										
WPDC470-40-□	47				CWP480P										
WPDC480-40-□	48				CWP490P										
WPDC490-40-□	49				CWP500P										
WPDC500-40-□	50				WC□T080408-C21N			FTKA0411K	TW15S	KHA1015		KHC1016	CWP510P	BHA0612	
WPDC510-40-□	51												CWP520P		
WPDC520-40-□	52												CWP530P		
WPDC530-40-□	53					CWP540P									
WPDC540-40-□	54	CWP550P													
WPDC550-40-□	55	WC□T050308-C21N	FTKA0307	TW09S		KHA1020	KHA1020				CWP560P		BHA0614		
WPDC560-40-□	56				CWP570P										
WPDC570-40-□	57				CWP580P										
WPDC580-40-□	58				CWP590P										
WPDC590-40-□	59				WC□T06T308-C21N			FTKA03508	TW15S	CDH1645	KHA1020	CWP6065C		CWP6065P	BHA0510
WPDC6065-40-□	60~65	CWP6570C	CWP6570P												
WPDC6570-40-□	65~70	CWP7075C	CWP7075P												
WPDC7075-40-□	70~75	WC□T06T308-C21N	FTKA03508	TW15S	CDH1645	KHA1020	CWP7580C	CWP7580T	BHA0612						
WPDC7580-40-□	75~80														

Applicable inserts **G06**

Center drill



(mm)


Designation	Grade	ØD	L	Oil-hole
CD 0630	PC40H	6	30	×
CD 0835	PC40H	8	35	×
CDH 1035	PC40H	10	35	○
CDH 1238	PC40H	12	38	○
CDH 1645	PC40H	16	45	○

• This is HSS with Tin coating



WPDC-5D/6.5D/8D

Standard type

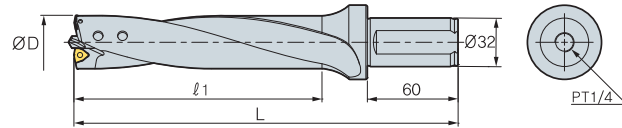


(mm)

Designation	ØD	5D		6.5D		8D		Insert	Center drill	
		ℓ ₁	L	ℓ ₁	L	ℓ ₁	L			
WPDC	250-32-□	25	150	240	185	275	220	310	WC□T030204-C21N	CD0630
	260-32-□	26	150	240	185	275	220	310		
	270-32-□	27	150	240	185	275	220	310		
	280-32-□	28	150	240	185	275	220	310		
	290-32-□	29	150	240	185	275	220	310		
	300-32-□	30	150	240	185	275	220	310		
	310-32-□	31	175	265	218	308	260	350	WC□T050308-C21N	CD0835
	320-32-□	32	175	265	218	308	260	350		
	330-32-□	33	175	265	218	308	260	350		
	340-32-□	34	175	265	218	308	260	350		
	350-32-□	35	175	265	218	308	260	350		
	360-32-□	36	200	290	250	340	300	390		
	370-32-□	37	200	290	250	340	300	390		
	380-32-□	38	200	290	250	340	300	390		
	390-32-□	39	200	290	250	340	300	390		
	400-32-□	40	200	290	250	340	300	390		


↪ Applicable inserts **G06**

* We can provide if you order exact diameter
Ex) machining hole 32.5mm + 6.5D → WPDC325-32-6.5

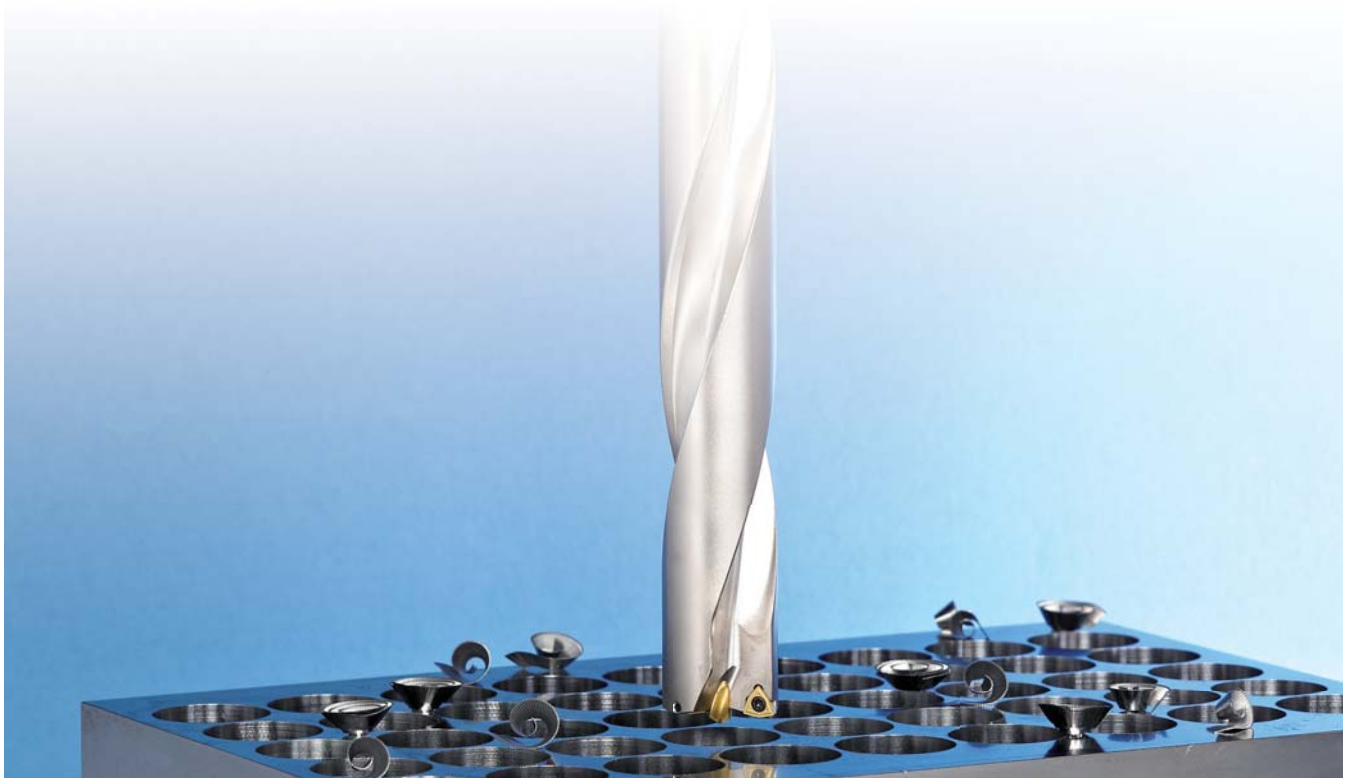

WPDC-5D/6.5D/8D

Single insert cartridge type

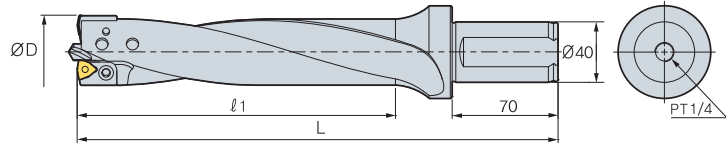

(mm)


Designation	ØD	5D		6.5D		8D		Insert	Center drill	Cartridge				
		l ₁	L	l ₁	L	l ₁	L			Inner	Outer			
WPDC	410-40-□	41	225	330	283	388	340	445	WC□T06T308-C21N	CDH1035	CWP4145C	CWP410P		
	420-40-□	42	225	330	283	388	340	445				CWP420P		
	430-40-□	43	225	330	283	388	340	445				CWP430P		
	440-40-□	44	225	330	283	388	340	445				CWP440P		
	450-40-□	45	225	330	283	388	340	445				CWP450P		
	460-40-□	46	250	355	315	420	380	485			CWP4650C	CWP460P		
	470-40-□	47	250	355	315	420	380	485				CWP470P		
	480-40-□	48	250	355	315	420	380	485				CWP480P		
	490-40-□	49	250	355	315	420	380	485				CWP490P		
	500-40-□	50	250	355	315	420	380	485				CWP500P		
	510-40-□	51	275	380	348	453	420	525			WC□T080408-C21N	CDH1238	CWP5155C	CWP510P
	520-40-□	52	275	380	348	453	420	525						CWP520P
	530-40-□	53	275	380	348	453	420	525						CWP530P
	540-40-□	54	275	380	348	453	420	525						CWP540P
	550-40-□	55	275	380	348	453	420	525						CWP550P
	560-40-□	56	300	405	380	485	460	565			WC□T080408-C21N	CDH1238	CWP5659C	CWP560P
	570-40-□	57	300	405	380	485	460	565						CWP570P
	580-40-□	58	300	405	380	485	460	565						CWP580P
	590-40-□	59	300	405	380	485	460	565						CWP590P

↻ Applicable inserts **G06**

* We can provide if you order exact diameter
Ex) machining hole 47.5mm * 5D -> WPDC475-40-5

WPDC-5D/6.5D/8D

Dual insert cartridge type

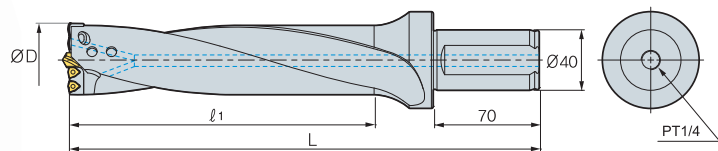

(mm)

Designation	ØD	5D		6.5D		8D		Insert	Center drill	Cartridge		
		l ₁	L	l ₁	L	l ₁	L			Inner	Outer	
WPDC	6065-40-□	60~65	325	430	423	528	520	625	WC□T050308-C21N	CDH1238	CWP6065C	CWP6065P
	6570-40-□	65~70	350	455	455	560	560	665			CWP6570C	CWP6570P
	7075-40-□	70~75	375	480	488	593	600	705			CWP7075C	CWP7075P
	7580-40-□	75~80	400	505	520	625	640	745			WC□T06T308-C21N	CDH1645

↻ Applicable inserts **G06**

* We can provide if you order exact diameter
Ex) machining hole 70.5mm * 6.5D -> WPDC705-40-6.5



Highly efficient hole making for various workpieces including automobile components

MSD Plus *New* Mach Solid Drill Plus



Code System

040 : Ø4.0
Aspect ratio(L/D) 3D, 5D, 7D
Flute length 100 : 100mm

Drill Dia.(ØD) **Standard type** **Special type**

MSDP(H) 040 - 5 P - 100L - 5S

Oil hole
None : MSDP
With oil hole : MSDPH

Machining area
P : Carbon steel, alloy steel
M : Stainless steel
K : Cast iron
N : Aluminum, copper alloy


Overall length
100L : 100mm

Shank Dia.
5S : Ø5

Features


New grade (PC325U)

- Lubricative coating layer improves welding resistance at middle to high speed.
- Increase wear resistance in machining carbon steel

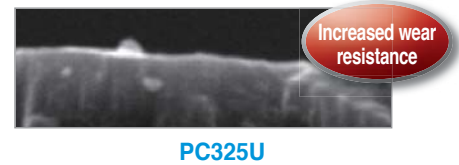


Surface of coating layer

- Increased welding resistance and lower cutting load
- Reduced frictional resistance at cutting edges and on the flute

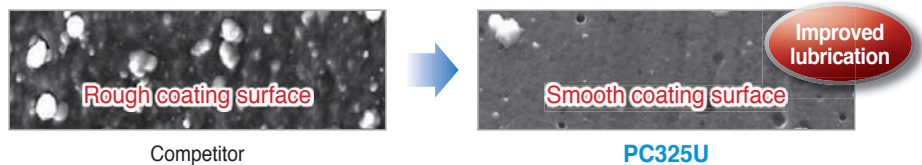


Chip control

- **Workpiece** : STS304
- **Cutting condition** : vc(m/min)=90
fn(mm/rev)=0.2
ap(mm)=30, wet
- **Tools** : MSDP(H)060-5M(PC325U)

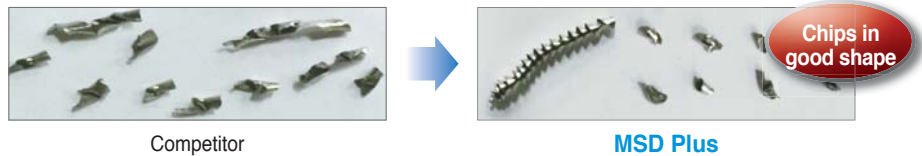


Application area

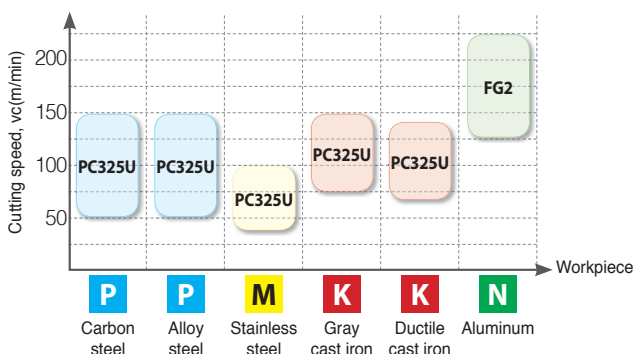

Flute shape



- Improved chip evacuation thanks to wider chip pocket

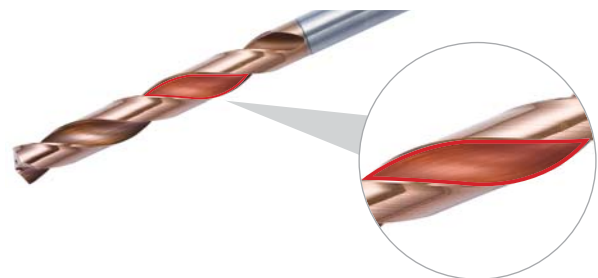

▶ Cutting Performance

Part of automobile

- **Workpiece** : SM45C
- **Cutting condition** : vc(m/min)=124
fn(mm/rev)=0.15
ap(mm)=30
Through coolant
- **Tools** : MSDPH060-5P(PC325U)

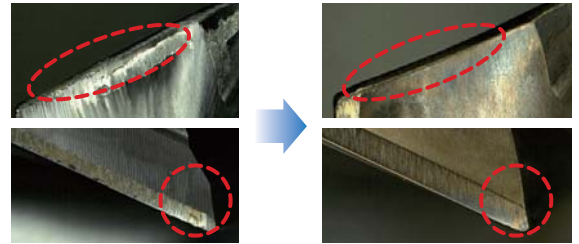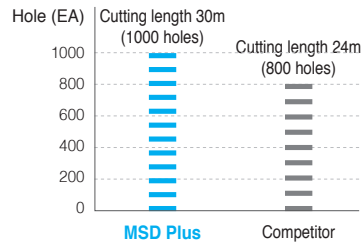


→ Lubricative coating layer of the new grade PC325U maximizes wear resistance.

MSD Plus

Part of automobile

- **Workpiece** : SM53C
- **Cutting condition** : vc(m/min)=60
fn(mm/rev)=0.25
ap(mm)=30
External coolant
- **Tools** : MSDP120-5P(PC325U)

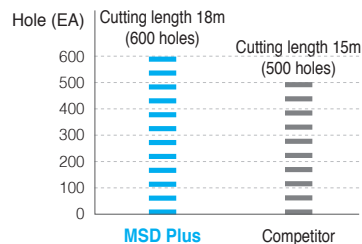

→ Special treatment on coating surface minimized frictional resistance.


▶ Recommended Cutting Conditions

Workpiece			Grade	vc(m/min)	Depth of cut = 10D~25D Feed rate (mm/rev) per drill dia.(mm)					
ISO	Workpiece	HB			Ø2.5~Ø4.0	Ø4.1~Ø8.0	Ø8.1~Ø12.0	Ø12.1~Ø16.0	Ø16.1~Ø20.0	
P	Carbon steel	Low carbon steel	80~120	PC325U	90(80~150)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
		High carbon steel	250 over	PC325U	50(40~80)	0.08~0.20	0.08~0.20	0.10~0.25	0.15~0.25	0.15~0.30
	Alloy steel	Low alloy steel	140~260	PC325U	90(80~150)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
		Hardened low alloy steel	200~400	PC325U	60(50~100)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
		High alloy steel	50~260	PC325U	50(40~80)	0.08~0.20	0.08~0.20	0.10~0.25	0.15~0.25	0.15~0.30
	Hardened high alloy steel	250 over	PC325U	50(40~80)	0.08~0.20	0.08~0.20	0.10~0.25	0.15~0.25	0.15~0.30	
M	Stainless steel	Austenite series	135~275	PC325U	45(25~80)	0.05~0.20	0.05~0.20	0.10~0.25	0.10~0.25	0.15~0.30
		Ferrite series Martensite series	135~275	PC325U	50(30~80)	0.05~0.20	0.05~0.20	0.10~0.25	0.10~0.25	0.15~0.30
K	Cast iron	Gray cast iron	150~230	PC325U	100(80~150)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
		Ductile cast iron	160~260	PC325U	90(70~140)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
N	Aluminum	Aluminum alloy	30~150	FG2	150(125~220)	0.24~0.38	0.38~0.53	0.53~0.75	0.61~0.85	0.68~0.98
	Copper alloy	Copper alloy	150~160	FG2	150(125~220)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40

- Cutting conditions above are for the case of less than 5D depth of cut and through coolant system applied.
- In case of external coolant system, reduce the above feed values by 20%.



MSDP-□ (P/M/K/N) *New*

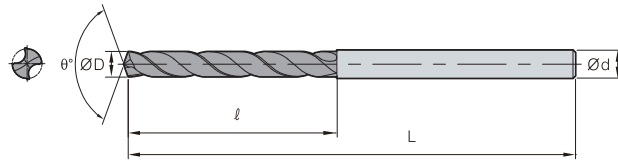


Terminology	P	M	K	N
Grade	PC325U			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°		135°	
Twist angle	30°			
Thinning	X type			
Coolant	External system			

P Steel M Stainless steel K Cast iron N Non-ferrous metal

Designation		ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
				ℓ	L	ℓ	L	ℓ	L
MSDP	010 - □ P,M,K,N	1.0	3.0	6	45	12	66	-	-
	011 - □ P,M,K,N	1.1	3.0	7	45	12	66	-	-
	012 - □ P,M,K,N	1.2	3.0	8	45	12	66	-	-
	013 - □ P,M,K,N	1.3	3.0	8	45	12	66	-	-
	014 - □ P,M,K,N	1.4	3.0	9	45	12	66	-	-
	015 - □ P,M,K,N	1.5	3.0	9	45	12	66	-	-
	016 - □ P,M,K,N	1.6	3.0	10	45	15	66	-	-
	017 - □ P,M,K,N	1.7	3.0	10	45	15	66	-	-
	018 - □ P,M,K,N	1.8	3.0	11	45	15	66	-	-
	019 - □ P,M,K,N	1.9	3.0	11	45	15	66	-	-
	020 - □ P,M,K,N	2.0	3.0	14	53	20	66	-	-
	021 - □ P,M,K,N	2.1	3.0	14	53	20	66	-	-
	022 - □ P,M,K,N	2.2	3.0	14	53	20	66	-	-
	023 - □ P,M,K,N	2.3	3.0	14	53	20	66	-	-
	024 - □ P,M,K,N	2.4	3.0	14	53	20	66	-	-

MSDP(H)-□ (P/M/K/N) *New*

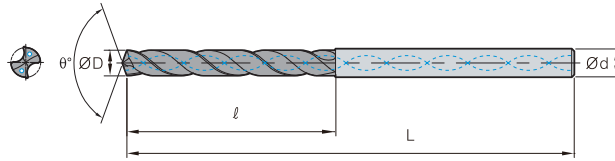

Terminology	P	M	K	N
Grade	PC325U			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°		135°	
Twist angle	30°			
Thinning	X type			
Coolant	Through / External			


P Steel M Stainless steel K Cast iron N Non-ferrous metal

(mm)

Designation	ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
			ℓ	L	ℓ	L	ℓ	L
MSDP(H) 025 - □ P,M,K,N	2.5	3.0	14	53	20	66	30	70
026 - □ P,M,K,N	2.6	3.0	17	53	20	66	30	70
027 - □ P,M,K,N	2.7	3.0	17	53	20	66	30	70
028 - □ P,M,K,N	2.8	3.0	17	53	20	66	30	70
029 - □ P,M,K,N	2.9	3.0	17	53	20	66	30	70
030 - □ P,M,K,N	3.0	3.0	17	53	20	66	30	70
031 - □ P,M,K,N	3.1	4.0	20	58	28	74	30	70
032 - □ P,M,K,N	3.2	4.0	20	58	28	74	30	70
033 - □ P,M,K,N	3.3	4.0	20	58	28	74	30	70
034 - □ P,M,K,N	3.4	4.0	20	58	28	74	37.5	75
035 - □ P,M,K,N	3.5	4.0	20	58	28	74	37.5	75
036 - □ P,M,K,N	3.6	4.0	22	58	32	74	37.5	75
037 - □ P,M,K,N	3.7	4.0	22	58	32	74	37.5	75
038 - □ P,M,K,N	3.8	4.0	22	58	32	74	37.5	75
039 - □ P,M,K,N	3.9	4.0	22	58	32	74	37.5	75
040 - □ P,M,K,N	4.0	4.0	22	58	32	74	37.5	75
041 - □ P,M,K,N	4.1	5.0	24	62	36	82	37.5	75
042 - □ P,M,K,N	4.2	5.0	24	62	36	82	37.5	75
043 - □ P,M,K,N	4.3	5.0	24	62	36	82	45	85
044 - □ P,M,K,N	4.4	5.0	24	62	36	82	45	85
045 - □ P,M,K,N	4.5	5.0	24	62	36	82	45	85
046 - □ P,M,K,N	4.6	5.0	26	62	38	82	45	85
047 - □ P,M,K,N	4.7	5.0	26	62	38	82	45	85
048 - □ P,M,K,N	4.8	5.0	26	62	38	82	50	90
049 - □ P,M,K,N	4.9	5.0	26	62	38	82	50	90
050 - □ P,M,K,N	5.0	5.0	26	62	38	82	50	90
051 - □ P,M,K,N	5.1	6.0	28	66	44	82	50	90
052 - □ P,M,K,N	5.2	6.0	28	66	44	82	50	90
053 - □ P,M,K,N	5.3	6.0	28	66	44	82	50	90
054 - □ P,M,K,N	5.4	6.0	28	66	44	82	50	90
055 - □ P,M,K,N	5.5	6.0	28	66	44	82	57	97
056 - □ P,M,K,N	5.6	6.0	28	66	44	82	57	97
057 - □ P,M,K,N	5.7	6.0	28	66	44	82	57	97
058 - □ P,M,K,N	5.8	6.0	28	66	44	82	57	97
059 - □ P,M,K,N	5.9	6.0	28	66	44	82	57	97
060 - □ P,M,K,N	6.0	6.0	28	66	44	82	57	97
061 - □ P,M,K,N	6.1	7.0	34	74	50	91	66	106
062 - □ P,M,K,N	6.2	7.0	34	74	50	91	66	106
063 - □ P,M,K,N	6.3	7.0	34	74	50	91	66	106
064 - □ P,M,K,N	6.4	7.0	34	74	50	91	66	106
065 - □ P,M,K,N	6.5	7.0	34	74	50	91	66	106
066 - □ P,M,K,N	6.6	7.0	34	74	50	91	66	106
067 - □ P,M,K,N	6.7	7.0	34	74	50	91	66	106
068 - □ P,M,K,N	6.8	7.0	34	74	50	91	66	106
069 - □ P,M,K,N	6.9	7.0	34	74	50	91	76	116
070 - □ P,M,K,N	7.0	7.0	34	74	50	91	76	116
071 - □ P,M,K,N	7.1	8.0	41	79	53	91	76	116
072 - □ P,M,K,N	7.2	8.0	41	79	53	91	76	116



MSDP(H)-□ (P/M/K/N) *New*

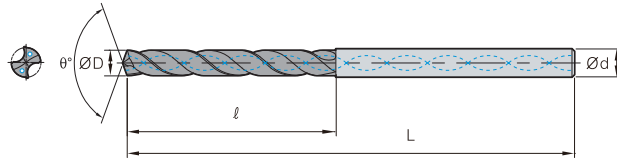


Terminology	P	M	K	N
Grade	PC325U			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°		135°	
Twist angle	30°			
Thinning	X type			
Coolant	Through / External			

P Steel M Stainless steel K Cast iron N Non-ferrous metal

Designation	ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
			ℓ	L	ℓ	L	ℓ	L
MSDP(H) 073 - □ P,M,K,N	7.3	8.0	41	79	53	91	76	116
074 - □ P,M,K,N	7.4	8.0	41	79	53	91	76	116
075 - □ P,M,K,N	7.5	8.0	41	79	53	91	76	116
076 - □ P,M,K,N	7.6	8.0	41	79	53	91	76	116
077 - □ P,M,K,N	7.7	8.0	41	79	53	91	76	116
078 - □ P,M,K,N	7.8	8.0	41	79	53	91	76	116
079 - □ P,M,K,N	7.9	8.0	41	79	53	91	76	116
080 - □ P,M,K,N	8.0	8.0	43	84	58	98	87	131
081 - □ P,M,K,N	8.1	9.0	43	84	58	98	87	131
082 - □ P,M,K,N	8.2	9.0	43	84	58	98	87	131
083 - □ P,M,K,N	8.3	9.0	43	84	58	98	87	131
084 - □ P,M,K,N	8.4	9.0	43	84	58	98	87	131
085 - □ P,M,K,N	8.5	9.0	43	84	58	98	87	131
086 - □ P,M,K,N	8.6	9.0	43	84	58	98	87	131
087 - □ P,M,K,N	8.7	9.0	43	84	58	98	87	131
088 - □ P,M,K,N	8.8	9.0	43	84	58	98	87	131
089 - □ P,M,K,N	8.9	9.0	43	84	58	98	87	131
090 - □ P,M,K,N	9.0	9.0	43	84	58	98	87	131
091 - □ P,M,K,N	9.1	10.0	47	89	61	105	95	139
092 - □ P,M,K,N	9.2	10.0	47	89	61	105	95	139
093 - □ P,M,K,N	9.3	10.0	47	89	61	105	95	139
094 - □ P,M,K,N	9.4	10.0	47	89	61	105	95	139
095 - □ P,M,K,N	9.5	10.0	47	89	61	105	95	139
096 - □ P,M,K,N	9.6	10.0	47	89	61	105	95	139
097 - □ P,M,K,N	9.7	10.0	47	89	61	105	95	139
098 - □ P,M,K,N	9.8	10.0	47	89	61	105	95	139
099 - □ P,M,K,N	9.9	10.0	47	89	61	105	95	139
100 - □ P,M,K,N	10.0	10.0	47	89	61	105	95	139
101 - □ P,M,K,N	10.1	11.0	55	95	68	114	106	155
102 - □ P,M,K,N	10.2	11.0	55	95	68	114	106	155
103 - □ P,M,K,N	10.3	11.0	55	95	68	114	106	155
104 - □ P,M,K,N	10.4	11.0	55	95	68	114	106	155
105 - □ P,M,K,N	10.5	11.0	55	95	68	114	106	155
106 - □ P,M,K,N	10.6	11.0	55	95	68	114	106	155
107 - □ P,M,K,N	10.7	11.0	55	95	68	114	106	155
108 - □ P,M,K,N	10.8	11.0	55	95	68	114	106	155
109 - □ P,M,K,N	10.9	11.0	55	95	68	114	106	155
110 - □ P,M,K,N	11.0	11.0	55	95	68	114	106	155
111 - □ P,M,K,N	11.1	12.0	55	102	71	120	114	163
112 - □ P,M,K,N	11.2	12.0	55	102	71	120	114	163
113 - □ P,M,K,N	11.3	12.0	55	102	71	120	114	163
114 - □ P,M,K,N	11.4	12.0	55	102	71	120	114	163
115 - □ P,M,K,N	11.5	12.0	55	102	71	120	114	163
116 - □ P,M,K,N	11.6	12.0	55	102	71	120	114	163
117 - □ P,M,K,N	11.7	12.0	55	102	71	120	114	163
118 - □ P,M,K,N	11.8	12.0	55	102	71	120	114	163
119 - □ P,M,K,N	11.9	12.0	55	102	71	120	114	163
120 - □ P,M,K,N	12.0	12.0	55	102	71	120	114	163

MSDP(H)-□ (P/M/K/N) *New*

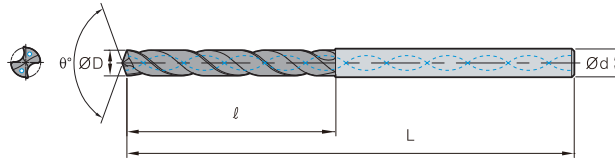

Terminology	P	M	K	N
Grade	PC325U			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°	135°		
Twist angle	30°			
Thinning	X type			
Coolant	Through / External			


P Steel M Stainless steel K Cast iron N Non-ferrous metal

(mm)

Designation	ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
			ℓ	L	ℓ	L	ℓ	L
MSDP(H) 121 - □ P,M,K,N	12.1	13.0	60	107	77	124	133	182
122 - □ P,M,K,N	12.2	13.0	60	107	77	124	133	182
123 - □ P,M,K,N	12.3	13.0	60	107	77	124	133	182
124 - □ P,M,K,N	12.4	13.0	60	107	77	124	133	182
125 - □ P,M,K,N	12.5	13.0	60	107	77	124	133	182
126 - □ P,M,K,N	12.6	13.0	60	107	77	124	133	182
127 - □ P,M,K,N	12.7	13.0	60	107	77	124	133	182
128 - □ P,M,K,N	12.8	13.0	60	107	77	124	133	182
129 - □ P,M,K,N	12.9	13.0	60	107	77	124	133	182
130 - □ P,M,K,N	13.0	13.0	60	107	77	124	133	182
131 - □ P,M,K,N	13.1	14.0	62	107	80	133	133	182
132 - □ P,M,K,N	13.2	14.0	62	107	80	133	133	182
133 - □ P,M,K,N	13.3	14.0	62	107	80	133	133	182
134 - □ P,M,K,N	13.4	14.0	62	107	80	133	133	182
135 - □ P,M,K,N	13.5	14.0	62	107	80	133	133	182
136 - □ P,M,K,N	13.6	14.0	62	107	80	133	133	182
137 - □ P,M,K,N	13.7	14.0	62	107	80	133	133	182
138 - □ P,M,K,N	13.8	14.0	62	107	80	133	133	182
139 - □ P,M,K,N	13.9	14.0	62	107	80	133	133	182
140 - □ P,M,K,N	14.0	14.0	62	107	80	133	133	182
141 - □ P,M,K,N	14.1	15.0	65	115	85	143	152	204
142 - □ P,M,K,N	14.2	15.0	65	115	85	143	152	204
143 - □ P,M,K,N	14.3	15.0	65	115	85	143	152	204
144 - □ P,M,K,N	14.4	15.0	65	115	85	143	152	204
145 - □ P,M,K,N	14.5	15.0	65	115	85	143	152	204
146 - □ P,M,K,N	14.6	15.0	65	115	85	143	152	204
147 - □ P,M,K,N	14.7	15.0	65	115	85	143	152	204
148 - □ P,M,K,N	14.8	15.0	65	115	85	143	152	204
149 - □ P,M,K,N	14.9	15.0	65	115	85	143	152	204
150 - □ P,M,K,N	15.0	15.0	65	115	85	143	152	204
151 - □ P,M,K,N	15.1	16.0	68	115	88	143	152	204
152 - □ P,M,K,N	15.2	16.0	68	115	88	143	152	204
153 - □ P,M,K,N	15.3	16.0	68	115	88	143	152	204
154 - □ P,M,K,N	15.4	16.0	68	115	88	143	152	204
155 - □ P,M,K,N	15.5	16.0	68	115	88	143	152	204
156 - □ P,M,K,N	15.6	16.0	68	115	88	143	152	204
157 - □ P,M,K,N	15.7	16.0	68	115	88	143	152	204
158 - □ P,M,K,N	15.8	16.0	68	115	88	143	152	204
159 - □ P,M,K,N	15.9	16.0	68	115	88	143	152	204
160 - □ P,M,K,N	16.0	16.0	68	115	88	143	152	204
161 - □ P,M,K,N	16.1	17.0	73	123	93	153	171	223
162 - □ P,M,K,N	16.2	17.0	73	123	93	153	171	223
163 - □ P,M,K,N	16.3	17.0	73	123	93	153	171	223
164 - □ P,M,K,N	16.4	17.0	73	123	93	153	171	223
165 - □ P,M,K,N	16.5	17.0	73	123	93	153	171	223
166 - □ P,M,K,N	16.6	17.0	73	123	93	153	171	223
167 - □ P,M,K,N	16.7	17.0	73	123	93	153	171	223
168 - □ P,M,K,N	16.8	17.0	73	123	93	153	171	223



MSDP(H)-□ (P/M/K/N) *New*

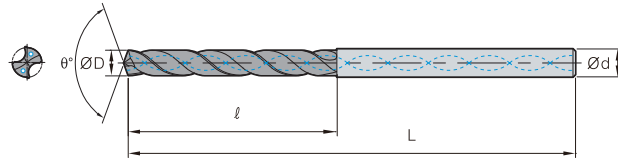

Terminology	P	M	K	N
Grade	PC325U		FG2	
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°		135°	
Twist angle	30°			
Thinning	X type			
Coolant	Through / External			


P Steel M Stainless steel K Cast iron N Non-ferrous metal

Designation	ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
			ℓ	L	ℓ	L	ℓ	L
MSDP(H) 169 - □ P,M,K,N	16.9	17.0	73	123	93	153	171	223
170 - □ P,M,K,N	17.0	17.0	73	123	93	153	171	223
171 - □ P,M,K,N	17.1	18.0	73	123	98	153	171	223
172 - □ P,M,K,N	17.2	18.0	73	123	98	153	171	223
173 - □ P,M,K,N	17.3	18.0	73	123	98	153	171	223
174 - □ P,M,K,N	17.4	18.0	73	123	98	153	171	223
175 - □ P,M,K,N	17.5	18.0	73	123	98	153	171	223
176 - □ P,M,K,N	17.6	18.0	73	123	98	153	171	223
177 - □ P,M,K,N	17.7	18.0	73	123	98	153	171	223
178 - □ P,M,K,N	17.8	18.0	73	123	98	153	171	223
179 - □ P,M,K,N	17.9	18.0	73	123	98	153	171	223
180 - □ P,M,K,N	18.0	18.0	73	123	98	153	171	223
181 - □ P,M,K,N	18.1	19.0	79	131	103	153	190	244
182 - □ P,M,K,N	18.2	19.0	79	131	103	153	190	244
183 - □ P,M,K,N	18.3	19.0	79	131	103	153	190	244
184 - □ P,M,K,N	18.4	19.0	79	131	103	153	190	244
185 - □ P,M,K,N	18.5	19.0	79	131	103	153	190	244
186 - □ P,M,K,N	18.6	19.0	79	131	103	153	190	244
187 - □ P,M,K,N	18.7	19.0	79	131	103	153	190	244
188 - □ P,M,K,N	18.8	19.0	79	131	103	153	190	244
189 - □ P,M,K,N	18.9	19.0	79	131	103	153	190	244
190 - □ P,M,K,N	19.0	19.0	79	131	103	153	190	244
191 - □ P,M,K,N	19.1	20.0	79	131	107	153	190	244
192 - □ P,M,K,N	19.2	20.0	79	131	107	153	190	244
193 - □ P,M,K,N	19.3	20.0	79	131	107	153	190	244
194 - □ P,M,K,N	19.4	20.0	79	131	107	153	190	244
195 - □ P,M,K,N	19.5	20.0	79	131	107	153	190	244
196 - □ P,M,K,N	19.6	20.0	79	131	107	153	190	244
197 - □ P,M,K,N	19.7	20.0	79	131	107	153	190	244
198 - □ P,M,K,N	19.8	20.0	79	131	107	153	190	244
199 - □ P,M,K,N	19.9	20.0	79	131	107	153	190	244
200 - □ P,M,K,N	20.0	20.0	79	131	107	153	190	244

Various designations of MSD & MSDH enable to do any drilling

Mach solid drill

▶ Code system

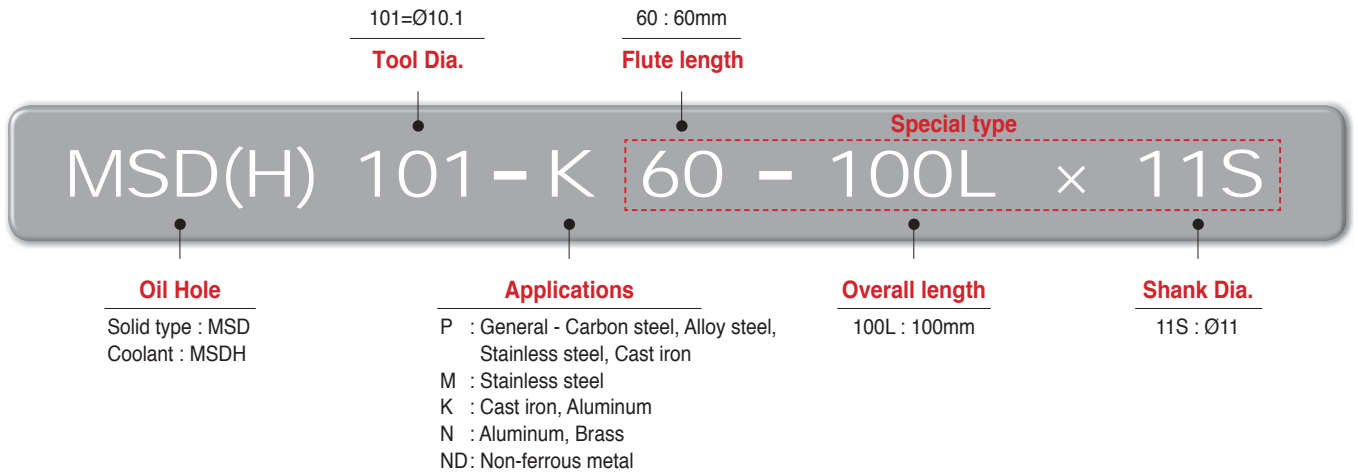

▶ Features

▶ Optimally designed chip pocket

- Wide and deep chip pocket improve chip control to minimizing friction during an operation

▶ A curvilinear edge

- A curvilinear edge offers excellent wear resistance and shock resistance by dispersing the cutting load

▶ 3D, 5D, 7D Standardization

- For example) diameter Ø10mm and depth 30mm and outer coolant system, Take MSD100-3P!

▶ MSD : Solid Type & MSDH : Through oil-hole type

- Various designations of MSD & MSDH enable to do any drilling

▶ Low cutting resistance edge

- The MSD & MSDH low cutting resistance edge guarantees a better surface roughness and chip control while allowing the drill to center itself

▶ Rigid neck of drill

- The new design of this drill has an increased rigidity at neck.
This prevents breakage of neck on the drill

▶ Line-up as per workpiece

- P : Steel (Carbon steel, Alloy steel)
General - Carbon steel, Alloy steel, Stainless steel, Cast iron Low cutting resistance edge, Ultra micro grain substrate, K-Black coating
- K : Cast iron, Die casting, Ductile cast iron
Coolant system : Through / Outer(MQL)
- M : Stainless steel, Reduced built-up edge and cutting resistance
Coolant system : Through / Outer(MQL)
- N : Aluminum(Carbide drills), Medium & Low speed cutting performance
Coolant system : Through / Outer(MQL)
- ND : Non-ferrous metal, High speed, High efficiency performance
Improved welding resistance due to applied DLC coating
Coolant system : Through / Outer(MQL)



▶ Features

▶ Low cutting resistance edge

- Uniformity in cutting edge treatment : Reinforces equalized quality in every machined part
- Protecting workpiece : Low cutting resistance edge operates well in medium to finishing machining, workpiece protection and good surface roughness
- Better chip breaking : Based on our cutting processes studies, our drills assure better chip breaking in high or low speeds

▶ Features of TiAlN Coating

- Decreasing of micro particle → Chipping free from macro particle
- Better hardness and toughness → Covering wide cutting speed and feed rate range
- Special coating layer at most-outer edge → Special TiAlN with better lubrication guarantees welding resistance
- Pre-treatment before coating process → Higher adhesion by pre-treatment



▶ Specification line-up

Line-up as per aspect ratio (L:Overall length, D:Tool Dia.)



MSD□□□-7P



MSD□□□-5P



MSD□□□-3P

Line-up as per aspect ratio (Mach Drills : Ø2.5mm~Ø20mm)

Various choices as per aspect ratio (3D,5D,7D)

• For example) Solid, Ø10.2mm, 50mm

Piercing = $50 \div 10.2 \approx 5 \rightarrow$ MSD102-5P

Line-up as per coolant type



MSD Type



MSDH Type

Wide choices for coolant type

- For example) Solid type : MSD,
Through coolant type : MSDH

▶ Line-up as per workpiece

P	General - Carbon steel, Alloy steel, Stainless steel, Cast iron
M	Stainless steel
K	Cast iron, Aluminum
N	Aluminum, Brass
ND	Non-ferrous metal

▶ Cutting condition formula

$$vc = \frac{\pi \times D \times n}{1000} \text{ (m/min)}, \quad fn = \frac{vf}{n} \text{ (mm/rev)} \left[n = \frac{vc \times 1000}{\pi \times D} \text{ (min}^{-1}\text{)}, \quad vf = fn \times n \text{ (mm/min)} \right]$$

n : Revolution per minute(min⁻¹)

vf : Feed per minute(mm/min)

D : Drill Dia.(mm)

vc : Cutting speed(m/min)

fn : Feed per revolution(mm/rev)

π : 3.1416

Recommended cutting condition

Mach Drill : Solid Type [MSD ○○○-□ P,M,K]

Tool Dia.		Ø2.5 ~ Ø5.0		Ø5.1 ~ Ø8.0		Ø8.1 ~ Ø10.0		Ø10.1 ~ Ø12.0		Ø12.1 ~ Ø14.0		Ø14.1 ~ Ø20.0	
		vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)
Mild steel, Alloy steel, General steel (Under H _r C25)	SCM440	40~70 (55)	0.15 ~0.25	50~110 (65)	0.20 ~0.35	50~110 (70)	0.20 ~0.35	50~120 (75)	0.25 ~0.35	50~120 (75)	0.25 ~0.35	60~120 (80)	0.25 ~0.40
	SM45C	40~80 (60)	0.15 ~0.25	50~120 (70)	0.20 ~0.30	50~120 (75)	0.20 ~0.30	60~120 (80)	0.20 ~0.30	60~120 (80)	0.25 ~0.35	70~120 (90)	0.30 ~0.40
High alloy steel, High carbon steel (Over H _r C25)	STD11	15~35 (30)	0.08 ~0.15	20~40 (30)	0.10 ~0.20	20~50 (35)	0.10 ~0.20	20~60 (35)	0.15 ~0.25	20~60 (40)	0.15 ~0.25	30~65 (40)	0.15 ~0.25
Stainless steel	STS	15~30 (25)	0.05 ~0.10	15~45 (25)	0.10 ~0.20	15~50 (30)	0.10 ~0.20	20~60 (35)	0.10 ~0.20	20~65 (35)	0.10 ~0.20	20~70 (40)	0.10 ~0.20
Cast iron	GC	40~90 (70)	0.15 ~0.30	50~120 (80)	0.20 ~0.35	50~120 (80)	0.20 ~0.35	60~130 (90)	0.25 ~0.35	60~130 (95)	0.25 ~0.40	60~140 (95)	0.25 ~0.40
	GCD	40~80 (60)	0.10 ~0.25	50~110 (75)	0.20 ~0.35	50~110 (80)	0.20 ~0.35	50~130 (80)	0.25 ~0.35	50~130 (85)	0.25 ~0.35	60~130 (90)	0.25 ~0.40

Mach Drill : Through oil-hole Type [MSDH ○○○-□ P,M,K]

Tool Dia.		vc(m/min)	Ø2.5~ Ø4.0	Ø4.1~ Ø8.0	Ø8.1~ Ø12.0	Ø12.1~ Ø16.0	Ø16.1~ Ø20.0
			fn(mm/rev)	fn(mm/rev)	fn(mm/rev)	fn(mm/rev)	fn(mm/rev)
Mild steel, Alloy steel, General steel (Under H _r C25)	SCM440	60~140	0.15~0.35	0.15~0.35	0.20~0.35	0.25~0.40	0.30~0.40
	SM45C	60~140	0.15~0.30	0.15~0.30	0.20~0.30	0.25~0.35	0.30~0.40
High alloy steel, High carbon steel (Over H _r C25)	STD11	40~80	0.08~0.20	0.08~0.20	0.10~0.25	0.15~0.25	0.15~0.30
Stainless steel	STS	25~80	0.05~0.20	0.05~0.20	0.10~0.25	0.10~0.25	0.15~0.30
Cast iron	GC	55~155	0.15~0.35	0.15~0.35	0.20~0.35	0.25~0.40	0.25~0.40
	GCD	55~145	0.10~0.35	0.10~0.35	0.20~0.35	0.25~0.35	0.25~0.40

- Note) 1. Decrease cutting speed 30%~40% contrast with recommended condition when machining forged steel
 2. Decrease cutting condition considering the overhang of drill, machined rigidity, precision of spindle, clamping and surface of workpiece, etc.
 3. For longer tool life, Please apply to step feed at every 1.5D
 4. Put the drill clamping between edge groove and shank boundary part in order to be located in the suitable position
 5. Coolant pressure for through hole type = 3~5kg/cm², volume = 2~5l/min
 6. Cutting formula :

Mach Drills : Through coolant type [MSD(H) ○○○-□ N] cemented carbide

Tool Dia.		Ø2.5~ Ø4.0		Ø5.1~ Ø10.0		Ø10.1~ Ø16.0		Ø16.1~ Ø20.0	
		vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)
Aluminum	Alloy steel (Al6061)	60~100	0.20~0.35	90~100	0.30~0.40	100~120	0.30~0.40	100~120	0.30~0.45
	Die-casting (AC,ADC)	60~100	0.20~0.35	90~100	0.30~0.40	100~120	0.30~0.40	100~120	0.30~0.45
Copper alloy(CI100)		60~80	0.08~0.15	60~100	0.10~0.20	80~100	0.10~0.25	80~100	0.10~0.25


Mach Drills : Through coolant type [MSDH ○○○-□ ND] DLC coated

Tool Dia.		Ø2.5~ Ø4.0		Ø5.1~ Ø10.0		Ø10.1~ Ø16.0		Ø16.1~ Ø20.0	
		vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)
Aluminum	Alloy steel (Al6061)	80~160	0.08~0.30	80~180	0.12~0.35	80~180	0.15~0.40	80~200	0.15~0.45
	Die-casting (AC,ADC)	80~180	0.08~0.30	80~200	0.12~0.35	80~200	0.15~0.40	80~200	0.15~0.45
Copper alloy(CI100)		80~160	0.08~0.15	80~180	0.10~0.20	80~180	0.10~0.25	80~200	0.10~0.25


- Note) Recommended cutting speed is one of the important factors for the drill performance. In case of using further cutting speed or feed rate than recommended conditions to improve the productivity, please apply it after enough tests because it could be occurred some problems like early wear, built-up edge, chipping, fracture, etc.



▶ Recommended cutting condition by series

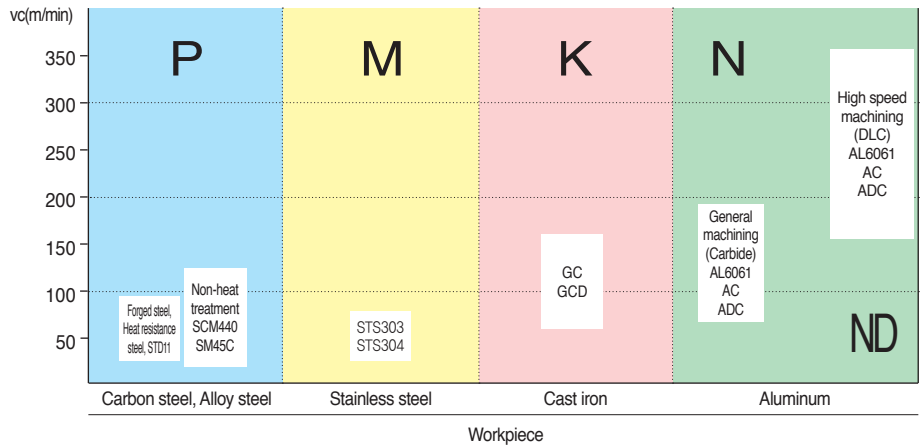


▶ Setting of drills

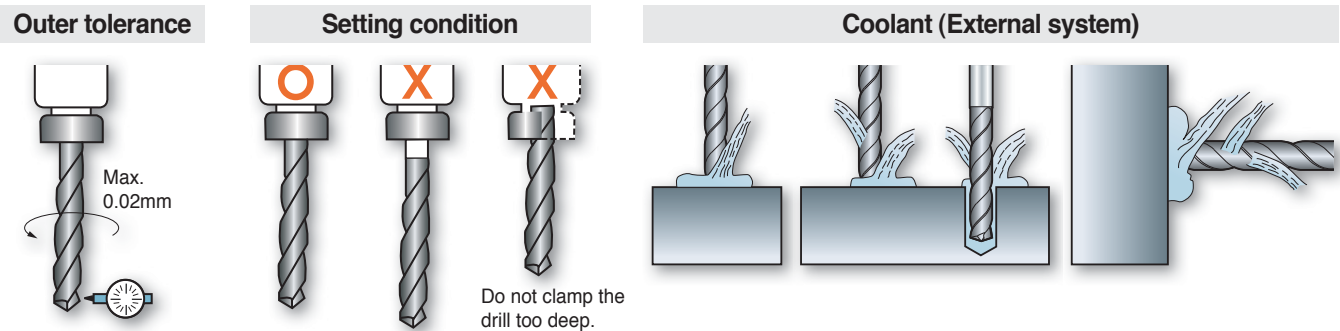


▶ To improve machining method


Machining for strength of wheel

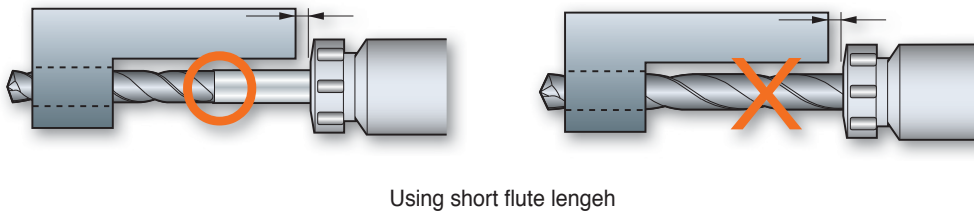

Improvement of drilling

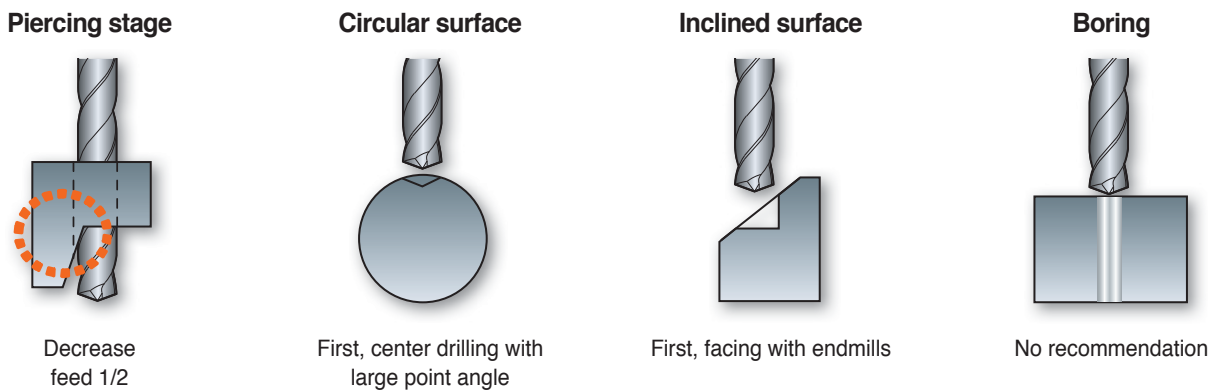

MSD-□ (P/M/K/N)

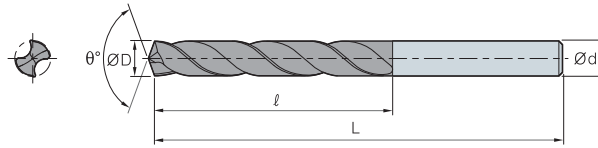

Terminology	P	M	K	N
Grade	PC205F			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°		135°	
Twist angle	30°			
Thinning	X type			
Coolant	External system			

P Steel M Stainless steel K Cast iron N Non-ferrous metal

(mm)

Designation	ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N		
			ℓ	L	ℓ	L	ℓ	L	
MSD	O25-□P,M,K,N	2.5	3.0	20	65	25	70	30	75
	O26-□P,M,K,N	2.6	3.0	20	65	25	70	30	75
	O27-□P,M,K,N	2.7	3.0	20	65	25	70	30	75
	O28-□P,M,K,N	2.8	3.0	20	65	25	70	30	75
	O29-□P,M,K,N	2.9	3.0	20	65	25	70	30	75
	O30-□P,M,K,N	3.0	3.0	20	65	25	70	30	75
	O31-□P,M,K,N	3.1	4.0	25	71	34	80	40	86
	O32-□P,M,K,N	3.2	4.0	25	71	34	80	40	86
	O33-□P,M,K,N	3.3	4.0	25	71	34	80	40	86
	O34-□P,M,K,N	3.4	4.0	25	71	34	80	40	86
	O35-□P,M,K,N	3.5	4.0	25	71	34	80	40	86
	O36-□P,M,K,N	3.6	4.0	25	71	34	80	40	86
	O37-□P,M,K,N	3.7	4.0	25	71	34	80	40	86
	O38-□P,M,K,N	3.8	4.0	25	71	34	80	40	86
	O39-□P,M,K,N	3.9	4.0	25	71	34	80	40	86
	O40-□P,M,K,N	4.0	4.0	25	71	34	80	40	86
	O41-□P,M,K,N	4.1	5.0	30	77	43	90	50	97
	O42-□P,M,K,N	4.2	5.0	30	77	43	90	50	97
	O43-□P,M,K,N	4.3	5.0	30	77	43	90	50	97
	O44-□P,M,K,N	4.4	5.0	30	77	43	90	50	97
	O45-□P,M,K,N	4.5	5.0	30	77	43	90	50	97
	O46-□P,M,K,N	4.6	5.0	30	77	43	90	50	97
	O47-□P,M,K,N	4.7	5.0	30	77	43	90	50	97
	O48-□P,M,K,N	4.8	5.0	30	77	43	90	50	97
	O49-□P,M,K,N	4.9	5.0	30	77	43	90	50	97
	O50-□P,M,K,N	5.0	5.0	30	77	43	90	50	97
	O51-□P,M,K,N	5.1	6.0	35	81	48	96	60	108
	O52-□P,M,K,N	5.2	6.0	35	81	48	96	60	108
	O53-□P,M,K,N	5.3	6.0	35	81	48	96	60	108
	O54-□P,M,K,N	5.4	6.0	35	81	48	96	60	108
	O55-□P,M,K,N	5.5	6.0	35	81	48	96	60	108
	O56-□P,M,K,N	5.6	6.0	35	81	48	96	60	108
	O57-□P,M,K,N	5.7	6.0	35	81	48	96	60	108
	O58-□P,M,K,N	5.8	6.0	35	81	48	96	60	108
	O59-□P,M,K,N	5.9	6.0	35	81	48	96	60	108
	O60-□P,M,K,N	6.0	6.0	35	81	48	96	60	108
	O61-□P,M,K,N	6.1	7.0	40	84	56	105	70	120
	O62-□P,M,K,N	6.2	7.0	40	84	56	105	70	120
	O63-□P,M,K,N	6.3	7.0	40	84	56	105	70	120
	O64-□P,M,K,N	6.4	7.0	40	84	56	105	70	120
	O65-□P,M,K,N	6.5	7.0	40	84	56	105	70	120
	O66-□P,M,K,N	6.6	7.0	40	84	56	105	70	120
	O67-□P,M,K,N	6.7	7.0	40	84	56	105	70	120
	O68-□P,M,K,N	6.8	7.0	40	84	56	105	70	120


※ Order made items : MSD□□□-Material (P,M,K,N) × Flute length - Total length L × Shank diameter S

Ex.1)Workpiece : SM45C, Machined diameter : Ø10.1mm, Flute length : 60mm, Total length : 80mm, Shank diameter : Ø11 → MSD101-P × 60 - 80L × 11S

Ex.2)Workpiece : STS303, Machined diameter : Ø10.12mm, Flute length : Flute length:60mm, Total length : 80mm, Shank diameter : Ø11 → MSD1012 - M × 60 - 80L × 11S



MSD-□ (P/M/K/N)

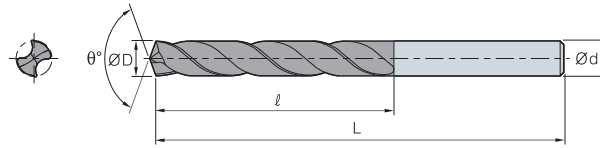

Terminology	P	M	K	N
Grade	PC205F		FG2	
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°		135°	
Twist angle	30°			
Thinning	X type			
Coolant	External system			

P Steel M Stainless steel K Cast iron N Non-ferrous metal


Designation	ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
			ℓ	L	ℓ	L	ℓ	L
MSD 069-□P,M,K,N	6.9	7.0	40	84	56	105	70	120
070-□P,M,K,N	7.0	7.0	40	84	56	105	70	120
071-□P,M,K,N	7.1	8.0	45	90	60	105	80	120
072-□P,M,K,N	7.2	8.0	45	90	60	110	80	130
073-□P,M,K,N	7.3	8.0	45	90	60	110	80	130
074-□P,M,K,N	7.4	8.0	45	90	60	110	80	130
075-□P,M,K,N	7.5	8.0	45	90	60	110	80	130
076-□P,M,K,N	7.6	8.0	45	90	60	110	80	130
077-□P,M,K,N	7.7	8.0	45	90	60	110	80	130
078-□P,M,K,N	7.8	8.0	45	90	60	110	80	130
079-□P,M,K,N	7.9	8.0	45	90	60	110	80	130
080-□P,M,K,N	8.0	8.0	45	90	60	110	80	130
081-□P,M,K,N	8.1	9.0	48	97	72	125	90	143
082-□P,M,K,N	8.2	9.0	48	97	72	125	90	143
083-□P,M,K,N	8.3	9.0	48	97	72	125	90	143
084-□P,M,K,N	8.4	9.0	48	97	72	125	90	143
085-□P,M,K,N	8.5	9.0	48	97	72	125	90	143
086-□P,M,K,N	8.6	9.0	48	97	72	125	90	143
087-□P,M,K,N	8.7	9.0	48	97	72	125	90	143
088-□P,M,K,N	8.8	9.0	48	97	72	125	90	143
089-□P,M,K,N	8.9	9.0	48	97	72	125	90	143
090-□P,M,K,N	9.0	9.0	48	97	72	125	90	143
091-□P,M,K,N	9.1	10.0	52	106	75	129	95	150
092-□P,M,K,N	9.2	10.0	52	106	75	129	95	150
093-□P,M,K,N	9.3	10.0	52	106	75	129	95	150
094-□P,M,K,N	9.4	10.0	52	106	75	129	95	150
095-□P,M,K,N	9.5	10.0	52	106	75	129	95	150
096-□P,M,K,N	9.6	10.0	52	106	75	129	95	150
097-□P,M,K,N	9.7	10.0	52	106	75	129	95	150
098-□P,M,K,N	9.8	10.0	52	106	75	129	95	150
099-□P,M,K,N	9.9	10.0	52	106	75	129	95	150
100-□P,M,K,N	10.0	10.0	52	106	75	129	95	150
101-□P,M,K,N	10.1	11.0	56	111	83	140	105	160
102-□P,M,K,N	10.2	11.0	56	111	83	140	105	160
103-□P,M,K,N	10.3	11.0	56	111	83	140	105	160
104-□P,M,K,N	10.4	11.0	56	111	83	140	105	160
105-□P,M,K,N	10.5	11.0	56	111	83	140	105	160
106-□P,M,K,N	10.6	11.0	56	111	83	140	105	160
107-□P,M,K,N	10.7	11.0	56	111	83	140	105	160
108-□P,M,K,N	10.8	11.0	56	111	83	140	105	160
109-□P,M,K,N	10.9	11.0	56	111	83	140	105	160
110-□P,M,K,N	11.0	11.0	56	111	83	140	105	160
111-□P,M,K,N	11.1	12.0	60	118	90	148	114	172
112-□P,M,K,N	11.2	12.0	60	118	90	148	114	172

※ Order made items : MSD□□□-Material (P,M,K,N) × Flute length - Total length L × Shank diameter S

Ex.1)Workpiece : SM45C, Machined diameter : Ø10.1mm, Flute length : 60mm, Total length : 80mm, Shank diameter : Ø11 → MSD101-P × 60 - 80L × 11S

Ex.2)Workpiece : STS303, Machined diameter : Ø10.12mm, Flute length : Flute length:60mm, Total length : 80mm, Shank diameter : Ø11 → MSD1012 - M × 60 - 80L × 11S

MSD-□ (P/M/K/N)

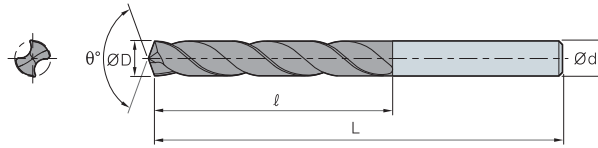

Terminology	P	M	K	N
Grade	PC205F			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°		135°	
Twist angle	30°			
Thinning	X type			
Coolant	External system			

P Steel M Stainless steel K Cast iron N Non-ferrous metal

(mm)

Designation	ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
			ℓ	L	ℓ	L	ℓ	L
MSD 113-□P,M,K,N	11.3	12.0	60	118	90	148	114	172
114-□P,M,K,N	11.4	12.0	60	118	90	148	114	172
115-□P,M,K,N	11.5	12.0	60	118	90	148	114	172
116-□P,M,K,N	11.6	12.0	60	118	90	148	114	172
117-□P,M,K,N	11.7	12.0	60	118	90	148	114	172
118-□P,M,K,N	11.8	12.0	60	118	90	148	114	172
119-□P,M,K,N	11.9	12.0	60	118	90	148	114	172
120-□P,M,K,N	12.0	12.0	60	118	90	148	114	172
121-□P,M,K,N	12.1	13.0	65	125	98	158	124	184
122-□P,M,K,N	12.2	13.0	65	125	98	158	124	184
123-□P,M,K,N	12.3	13.0	65	125	98	158	124	184
124-□P,M,K,N	12.4	13.0	65	125	98	158	124	184
125-□P,M,K,N	12.5	13.0	65	125	98	158	124	184
126-□P,M,K,N	12.6	13.0	65	125	98	158	124	184
127-□P,M,K,N	12.7	13.0	65	125	98	158	124	184
128-□P,M,K,N	12.8	13.0	65	125	98	158	124	184
129-□P,M,K,N	12.9	13.0	65	125	98	158	124	184
130-□P,M,K,N	13.0	13.0	65	125	98	158	124	184
131-□P,M,K,N	13.1	14.0	70	132	105	167	133	195
132-□P,M,K,N	13.2	14.0	70	132	105	167	133	195
133-□P,M,K,N	13.3	14.0	70	132	105	167	133	195
134-□P,M,K,N	13.4	14.0	70	132	105	167	133	195
135-□P,M,K,N	13.5	14.0	70	132	105	167	133	195
136-□P,M,K,N	13.6	14.0	70	132	105	167	133	195
137-□P,M,K,N	13.7	14.0	70	132	105	167	133	195
138-□P,M,K,N	13.8	14.0	70	132	105	167	133	195
139-□P,M,K,N	13.9	14.0	70	132	105	167	133	195
140-□P,M,K,N	14.0	14.0	70	132	105	167	133	195
141-□P,M,K,N	14.1	15.0	75	139	108	172	138	202
142-□P,M,K,N	14.2	15.0	75	139	108	172	138	202
143-□P,M,K,N	14.3	15.0	75	139	108	172	138	202
144-□P,M,K,N	14.4	15.0	75	139	108	172	138	202
145-□P,M,K,N	14.5	15.0	75	139	108	172	138	202
146-□P,M,K,N	14.6	15.0	75	139	108	172	138	202
147-□P,M,K,N	14.7	15.0	75	139	108	172	138	202
148-□P,M,K,N	14.8	15.0	75	139	108	172	138	202
149-□P,M,K,N	14.9	15.0	75	139	108	172	138	202
150-□P,M,K,N	15.0	15.0	75	139	108	172	138	202
151-□P,M,K,N	15.1	16.0	80	146	112	178	144	210
152-□P,M,K,N	15.2	16.0	80	146	112	178	144	210
153-□P,M,K,N	15.3	16.0	80	146	112	178	144	210
154-□P,M,K,N	15.4	16.0	80	146	112	178	144	210
155-□P,M,K,N	15.5	16.0	80	146	112	178	144	210
156-□P,M,K,N	15.6	16.0	80	146	112	178	144	210


※ Order made items : MSD□□□-Material (P,M,K,N) × Flute length - Total length L × Shank diameter S

Ex.1)Workpiece : SM45C, Machined diameter : Ø10.1mm, Flute length : 60mm, Total length : 80mm, Shank diameter : Ø11 → MSD101-P × 60 - 80L × 11S

Ex.2)Workpiece : STS303, Machined diameter : Ø10.12mm, Flute length : Flute length:60mm, Total length : 80mm, Shank diameter : Ø11 → MSD1012 - M × 60 - 80L × 11S



MSD-□ (P/M/K/N)

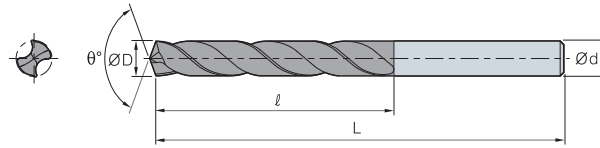

Terminology	P	M	K	N
Grade	PC205F		FG2	
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°		135°	
Twist angle	30°			
Thinning	X type			
Coolant	External system			

P Steel M Stainless steel K Cast iron N Non-ferrous metal


Designation	ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
			ℓ	L	ℓ	L	ℓ	L
MSD 157-□P,M,K,N	15.7	16.0	80	146	112	178	144	210
158-□P,M,K,N	15.8	16.0	80	146	112	178	144	210
159-□P,M,K,N	15.9	16.0	80	146	112	178	144	210
160-□P,M,K,N	16.0	16.0	80	146	112	178	144	210
161-□P,M,K,N	16.1	17.0	85	151	120	186	153	220
162-□P,M,K,N	16.2	17.0	85	151	120	186	153	220
163-□P,M,K,N	16.3	17.0	85	151	120	186	153	220
164-□P,M,K,N	16.4	17.0	85	151	120	186	153	220
165-□P,M,K,N	16.5	17.0	85	151	120	186	153	220
166-□P,M,K,N	16.6	17.0	85	151	120	186	153	220
167-□P,M,K,N	16.7	17.0	85	151	120	186	153	220
168-□P,M,K,N	16.8	17.0	85	151	120	186	153	220
169-□P,M,K,N	16.9	17.0	85	151	120	186	153	220
170-□P,M,K,N	17.0	17.0	85	151	120	186	153	220
171-□P,M,K,N	17.1	18.0	85	153	120	188	162	230
172-□P,M,K,N	17.2	18.0	85	153	120	188	162	230
173-□P,M,K,N	17.3	18.0	85	153	120	188	162	230
174-□P,M,K,N	17.4	18.0	85	153	120	188	162	230
175-□P,M,K,N	17.5	18.0	85	153	120	188	162	230
176-□P,M,K,N	17.6	18.0	85	153	120	188	162	230
177-□P,M,K,N	17.7	18.0	85	153	120	188	162	230
178-□P,M,K,N	17.8	18.0	85	153	120	188	162	230
179-□P,M,K,N	17.9	18.0	85	153	120	188	162	230
180-□P,M,K,N	18.0	18.0	85	153	120	188	162	230
181-□P,M,K,N	18.1	19.0	88	157	124	193	171	240
182-□P,M,K,N	18.2	19.0	88	157	124	193	171	240
183-□P,M,K,N	18.3	19.0	88	157	124	193	171	240
184-□P,M,K,N	18.4	19.0	88	157	124	193	171	240
185-□P,M,K,N	18.5	19.0	88	157	124	193	171	240
186-□P,M,K,N	18.6	19.0	88	157	124	193	171	240
187-□P,M,K,N	18.7	19.0	88	157	124	193	171	240
188-□P,M,K,N	18.8	19.0	88	157	124	193	171	240
189-□P,M,K,N	18.9	19.0	88	157	124	193	171	240
190-□P,M,K,N	19.0	19.0	88	157	124	193	171	240
191-□P,M,K,N	19.1	20.0	90	160	130	200	180	250
192-□P,M,K,N	19.2	20.0	90	160	130	200	180	250
193-□P,M,K,N	19.3	20.0	90	160	130	200	180	250
194-□P,M,K,N	19.4	20.0	90	160	130	200	180	250
195-□P,M,K,N	19.5	20.0	90	160	130	200	180	250
196-□P,M,K,N	19.6	20.0	90	160	130	200	180	250
197-□P,M,K,N	19.7	20.0	90	160	130	200	180	250
198-□P,M,K,N	19.8	20.0	90	160	130	200	180	250
199-□P,M,K,N	19.9	20.0	90	160	130	200	180	250
200-□P,M,K,N	20.0	20.0	90	160	130	200	180	250

※ Order made items : MSD□□□-Material (P,M,K,N) × Flute length - Total length L × Shank diameter S

Ex.1)Workpiece : SM45C, Machined diameter : Ø10.1mm, Flute length : 60mm, Total length : 80mm, Shank diameter : Ø11 → MSD101-P × 60 - 80L × 11S

Ex.2)Workpiece : STS303, Machined diameter : Ø10.12mm, Flute length : Flute length:60mm, Total length : 80mm, Shank diameter : Ø11 → MSD1012 - M × 60 - 80L × 11S

MSDH-□ (P/M/K/N)

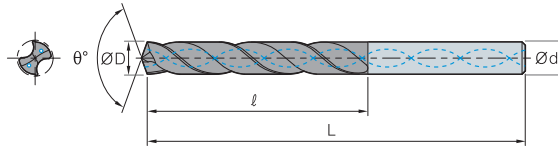

Terminology	P	M	K	N	ND
Grade	PC205F			FG2	PD3000-1
Tolerance(drill Dia.)	h7				
Tolerance(shank Dia.)	h6				
Point angle	140°		135°		140°
Twist angle	30°				
Thinning	X type			N type	
Coolant	Through system				

P Steel M Stainless steel K Cast iron N Non-ferrous metal ND Aluminum alloy



(mm)

Designation	ØD	Ød	3P,M,K,N,ND		5P,M,K,N,ND		7P,M,K,N,ND	
			ℓ	L	ℓ	L	ℓ	L
MSDH 025-□P,M,K,N	2.5	3.0	20	65	25	70	30	75
026-□P,M,K,N	2.6	3.0	20	65	25	70	30	75
027-□P,M,K,N	2.7	3.0	20	65	25	70	30	75
028-□P,M,K,N	2.8	3.0	20	65	25	70	30	75
029-□P,M,K,N	2.9	3.0	20	65	25	70	30	75
030-□P,M,K,N	3.0	3.0	20	65	25	70	30	75
031-□P,M,K,N	3.1	4.0	25	71	34	80	40	86
032-□P,M,K,N	3.2	4.0	25	71	34	80	40	86
033-□P,M,K,N	3.3	4.0	25	71	34	80	40	86
034-□P,M,K,N	3.4	4.0	25	71	34	80	40	86
035-□P,M,K,N	3.5	4.0	25	71	34	80	40	86
036-□P,M,K,N	3.6	4.0	25	71	34	80	40	86
037-□P,M,K,N	3.7	4.0	25	71	34	80	40	86
038-□P,M,K,N	3.8	4.0	25	71	34	80	40	86
039-□P,M,K,N	3.9	4.0	25	71	34	80	40	86
040-□P,M,K,N	4.0	4.0	25	71	34	80	40	86
041-□P,M,K,N	4.1	5.0	30	77	43	90	50	97
042-□P,M,K,N	4.2	5.0	30	77	43	90	50	97
043-□P,M,K,N	4.3	5.0	30	77	43	90	50	97
044-□P,M,K,N	4.4	5.0	30	77	43	90	50	97
045-□P,M,K,N	4.5	5.0	30	77	43	90	50	97
046-□P,M,K,N	4.6	5.0	30	77	43	90	50	97
047-□P,M,K,N	4.7	5.0	30	77	43	90	50	97
048-□P,M,K,N	4.8	5.0	30	77	43	90	50	97
049-□P,M,K,N	4.9	5.0	30	77	43	90	50	97
050-□P,M,K,N	5.0	5.0	30	77	43	90	50	97
051-□P,M,K,N	5.1	6.0	35	81	48	96	60	108
052-□P,M,K,N	5.2	6.0	35	81	48	96	60	108
053-□P,M,K,N	5.3	6.0	35	81	48	96	60	108
054-□P,M,K,N	5.4	6.0	35	81	48	96	60	108
055-□P,M,K,N	5.5	6.0	35	81	48	96	60	108
056-□P,M,K,N	5.6	6.0	35	81	48	96	60	108
057-□P,M,K,N	5.7	6.0	35	81	48	96	60	108
058-□P,M,K,N	5.8	6.0	35	81	48	96	60	108
059-□P,M,K,N	5.9	6.0	35	81	48	96	60	108
060-□P,M,K,N	6.0	6.0	35	81	48	96	60	108
061-□P,M,K,N	6.1	7.0	40	84	56	105	70	120
062-□P,M,K,N	6.2	7.0	40	84	56	105	70	120
063-□P,M,K,N	6.3	7.0	40	84	56	105	70	120
064-□P,M,K,N	6.4	7.0	40	84	56	105	70	120
065-□P,M,K,N	6.5	7.0	40	84	56	105	70	120
066-□P,M,K,N	6.6	7.0	40	84	56	105	70	120
067-□P,M,K,N	6.7	7.0	40	84	56	105	70	120
068-□P,M,K,N	6.8	7.0	40	84	56	105	70	120


※ Order made items : MSD□□□-Material (P,M,K,N) × Flute length - Total length L × Shank diameter S

Ex.1)Workpiece : SM45C, Machined diameter : Ø10.1mm, Flute length : 60mm, Total length : 80mm, Shank diameter : Ø11 → MSD101-P × 60 - 80L × 11S

Ex.2)Workpiece : STS303, Machined diameter : Ø10.12mm, Flute length : Flute length:60mm, Total length : 80mm, Shank diameter : Ø11 → MSD1012 - M × 60 - 80L × 11S



MSDH-□ (P/M/K/N)

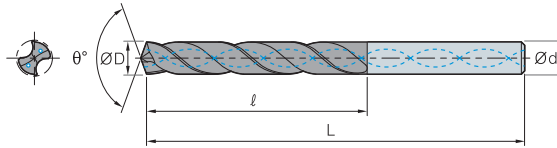

Terminology	P	M	K	N	ND
Grade	PC205F			FG2	PD3000-1
Tolerance(drill Dia.)	h7				
Tolerance(shank Dia.)	h6				
Point angle	140°		135°		140°
Twist angle	30°				
Thinning	X type			N type	
Coolant	Through system				

P Steel M Stainless steel K Cast iron N Non-ferrous metal ND Aluminum alloy




Designation	ØD	Ød	3P,M,K,N,ND		5P,M,K,N,ND		7P,M,K,N,ND	
			ℓ	L	ℓ	L	ℓ	L
			MSDH					
069-□P,M,K,N	6.9	7.0	40	84	56	105	70	120
070-□P,M,K,N	7.0	7.0	40	84	56	105	70	120
071-□P,M,K,N	7.1	8.0	45	90	60	105	80	120
072-□P,M,K,N	7.2	8.0	45	90	60	110	80	130
073-□P,M,K,N	7.3	8.0	45	90	60	110	80	130
074-□P,M,K,N	7.4	8.0	45	90	60	110	80	130
075-□P,M,K,N	7.5	8.0	45	90	60	110	80	130
076-□P,M,K,N	7.6	8.0	45	90	60	110	80	130
077-□P,M,K,N	7.7	8.0	45	90	60	110	80	130
078-□P,M,K,N	7.8	8.0	45	90	60	110	80	130
079-□P,M,K,N	7.9	8.0	45	90	60	110	80	130
080-□P,M,K,N	8.0	8.0	45	90	60	110	80	130
081-□P,M,K,N	8.1	9.0	48	97	72	125	90	143
082-□P,M,K,N	8.2	9.0	48	97	72	125	90	143
083-□P,M,K,N	8.3	9.0	48	97	72	125	90	143
084-□P,M,K,N	8.4	9.0	48	97	72	125	90	143
085-□P,M,K,N	8.5	9.0	48	97	72	125	90	143
086-□P,M,K,N	8.6	9.0	48	97	72	125	90	143
087-□P,M,K,N	8.7	9.0	48	97	72	125	90	143
088-□P,M,K,N	8.8	9.0	48	97	72	125	90	143
089-□P,M,K,N	8.9	9.0	48	97	72	125	90	143
090-□P,M,K,N	9.0	9.0	48	97	72	125	90	143
091-□P,M,K,N	9.1	10.0	52	106	75	129	95	150
092-□P,M,K,N	9.2	10.0	52	106	75	129	95	150
093-□P,M,K,N	9.3	10.0	52	106	75	129	95	150
094-□P,M,K,N	9.4	10.0	52	106	75	129	95	150
095-□P,M,K,N	9.5	10.0	52	106	75	129	95	150
096-□P,M,K,N	9.6	10.0	52	106	75	129	95	150
097-□P,M,K,N	9.7	10.0	52	106	75	129	95	150
098-□P,M,K,N	9.8	10.0	52	106	75	129	95	150
099-□P,M,K,N	9.9	10.0	52	106	75	129	95	150
100-□P,M,K,N	10.0	10.0	52	106	75	129	95	150
101-□P,M,K,N	10.1	11.0	56	111	83	140	105	160
102-□P,M,K,N	10.2	11.0	56	111	83	140	105	160
103-□P,M,K,N	10.3	11.0	56	111	83	140	105	160
104-□P,M,K,N	10.4	11.0	56	111	83	140	105	160
105-□P,M,K,N	10.5	11.0	56	111	83	140	105	160
106-□P,M,K,N	10.6	11.0	56	111	83	140	105	160
107-□P,M,K,N	10.7	11.0	56	111	83	140	105	160
108-□P,M,K,N	10.8	11.0	56	111	83	140	105	160
109-□P,M,K,N	10.9	11.0	56	111	83	140	105	160
110-□P,M,K,N	11.0	11.0	56	111	83	140	105	160
111-□P,M,K,N	11.1	12.0	60	118	90	148	114	172
112-□P,M,K,N	11.2	12.0	60	118	90	148	114	172

※ Order made items : MSD□□□-Material (P,M,K,N) × Flute length - Total length L × Shank diameter S

Ex.1)Workpiece : SM45C, Machined diameter : Ø10.1mm, Flute length : 60mm, Total length : 80mm, Shank diameter : Ø11 → MSD101-P × 60 - 80L × 11S

Ex.2)Workpiece : STS303, Machined diameter : Ø10.12mm, Flute length : Flute length:60mm, Total length : 80mm, Shank diameter : Ø11 → MSD1012 - M × 60 - 80L × 11S

MSDH-□ (P/M/K/N)

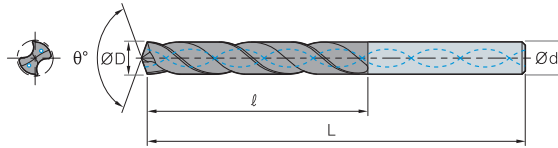

Terminology	P	M	K	N	ND
Grade	PC205F			FG2	PD3000-1
Tolerance(drill Dia.)	h7				
Tolerance(shank Dia.)	h6				
Point angle	140°		135°		140°
Twist angle	30°				
Thinning	X type			N type	
Coolant	Through system				

P Steel M Stainless steel K Cast iron N Non-ferrous metal ND Aluminum alloy



(mm)

Designation	ØD	Ød	3P,M,K,N,ND		5P,M,K,N,ND		7P,M,K,N,ND	
			ℓ	L	ℓ	L	ℓ	L
MSDH 113-□P,M,K,N	11.3	12.0	60	118	90	148	114	172
MSDH 114-□P,M,K,N	11.4	12.0	60	118	90	148	114	172
MSDH 115-□P,M,K,N	11.5	12.0	60	118	90	148	114	172
MSDH 116-□P,M,K,N	11.6	12.0	60	118	90	148	114	172
MSDH 117-□P,M,K,N	11.7	12.0	60	118	90	148	114	172
MSDH 118-□P,M,K,N	11.8	12.0	60	118	90	148	114	172
MSDH 119-□P,M,K,N	11.9	12.0	60	118	90	148	114	172
MSDH 120-□P,M,K,N	12.0	12.0	60	118	90	148	114	172
MSDH 121-□P,M,K,N	12.1	13.0	65	125	98	158	124	184
MSDH 122-□P,M,K,N	12.2	13.0	65	125	98	158	124	184
MSDH 123-□P,M,K,N	12.3	13.0	65	125	98	158	124	184
MSDH 124-□P,M,K,N	12.4	13.0	65	125	98	158	124	184
MSDH 125-□P,M,K,N	12.5	13.0	65	125	98	158	124	184
MSDH 126-□P,M,K,N	12.6	13.0	65	125	98	158	124	184
MSDH 127-□P,M,K,N	12.7	13.0	65	125	98	158	124	184
MSDH 128-□P,M,K,N	12.8	13.0	65	125	98	158	124	184
MSDH 129-□P,M,K,N	12.9	13.0	65	125	98	158	124	184
MSDH 130-□P,M,K,N	13.0	13.0	65	125	98	158	124	184
MSDH 131-□P,M,K,N	13.1	14.0	70	132	105	167	133	195
MSDH 132-□P,M,K,N	13.2	14.0	70	132	105	167	133	195
MSDH 133-□P,M,K,N	13.3	14.0	70	132	105	167	133	195
MSDH 134-□P,M,K,N	13.4	14.0	70	132	105	167	133	195
MSDH 135-□P,M,K,N	13.5	14.0	70	132	105	167	133	195
MSDH 136-□P,M,K,N	13.6	14.0	70	132	105	167	133	195
MSDH 137-□P,M,K,N	13.7	14.0	70	132	105	167	133	195
MSDH 138-□P,M,K,N	13.8	14.0	70	132	105	167	133	195
MSDH 139-□P,M,K,N	13.9	14.0	70	132	105	167	133	195
MSDH 140-□P,M,K,N	14.0	14.0	70	132	105	167	133	195
MSDH 141-□P,M,K,N	14.1	15.0	75	139	108	172	138	202
MSDH 142-□P,M,K,N	14.2	15.0	75	139	108	172	138	202
MSDH 143-□P,M,K,N	14.3	15.0	75	139	108	172	138	202
MSDH 144-□P,M,K,N	14.4	15.0	75	139	108	172	138	202
MSDH 145-□P,M,K,N	14.5	15.0	75	139	108	172	138	202
MSDH 146-□P,M,K,N	14.6	15.0	75	139	108	172	138	202
MSDH 147-□P,M,K,N	14.7	15.0	75	139	108	172	138	202
MSDH 148-□P,M,K,N	14.8	15.0	75	139	108	172	138	202
MSDH 149-□P,M,K,N	14.9	15.0	75	139	108	172	138	202
MSDH 150-□P,M,K,N	15.0	15.0	75	139	108	172	138	202
MSDH 151-□P,M,K,N	15.1	16.0	80	146	112	178	144	210
MSDH 152-□P,M,K,N	15.2	16.0	80	146	112	178	144	210
MSDH 153-□P,M,K,N	15.3	16.0	80	146	112	178	144	210
MSDH 154-□P,M,K,N	15.4	16.0	80	146	112	178	144	210
MSDH 155-□P,M,K,N	15.5	16.0	80	146	112	178	144	210
MSDH 156-□P,M,K,N	15.6	16.0	80	146	112	178	144	210


※ Order made items : MSD□□□-Material (P,M,K,N) × Flute length - Total length L × Shank diameter S

Ex.1)Workpiece : SM45C, Machined diameter : Ø10.1mm, Flute length : 60mm, Total length : 80mm, Shank diameter : Ø11 → MSD101-P × 60 - 80L × 11S

Ex.2)Workpiece : STS303, Machined diameter : Ø10.12mm, Flute length : 60mm, Total length : 80mm, Shank diameter : Ø11 → MSD1012 - M × 60 - 80L × 11S



MSDH-□ (P/M/K/N)

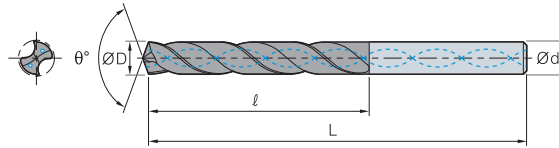

Terminology	P	M	K	N	ND
Grade	PC205F			FG2	PD3000-1
Tolerance(drill Dia.)	h7				
Tolerance(shank Dia.)	h6				
Point angle	140°		135°		140°
Twist angle	30°				
Thinning	X type			N type	
Coolant	Through system				

P Steel M Stainless steel K Cast iron N Non-ferrous metal ND Aluminum alloy



Designation	ØD	Ød	3P,M,K,N,ND		5P,M,K,N,ND		7P,M,K,N,ND		
			ℓ	L	ℓ	L	ℓ	L	
			MSDH	157-□P,M,K,N	15.7	16.0	80	146	112
	158-□P,M,K,N	15.8	16.0	80	146	112	178	144	210
	159-□P,M,K,N	15.9	16.0	80	146	112	178	144	210
	160-□P,M,K,N	16.0	16.0	80	146	112	178	144	210
	161-□P,M,K,N	16.1	17.0	85	151	120	186	153	220
	162-□P,M,K,N	16.2	17.0	85	151	120	186	153	220
	163-□P,M,K,N	16.3	17.0	85	151	120	186	153	220
	164-□P,M,K,N	16.4	17.0	85	151	120	186	153	220
	165-□P,M,K,N	16.5	17.0	85	151	120	186	153	220
	166-□P,M,K,N	16.6	17.0	85	151	120	186	153	220
	167-□P,M,K,N	16.7	17.0	85	151	120	186	153	220
	168-□P,M,K,N	16.8	17.0	85	151	120	186	153	220
	169-□P,M,K,N	16.9	17.0	85	151	120	186	153	220
	170-□P,M,K,N	17.0	17.0	85	151	120	186	153	220
	171-□P,M,K,N	17.1	18.0	85	153	120	188	162	230
	172-□P,M,K,N	17.2	18.0	85	153	120	188	162	230
	173-□P,M,K,N	17.3	18.0	85	153	120	188	162	230
	174-□P,M,K,N	17.4	18.0	85	153	120	188	162	230
	175-□P,M,K,N	17.5	18.0	85	153	120	188	162	230
	176-□P,M,K,N	17.6	18.0	85	153	120	188	162	230
	177-□P,M,K,N	17.7	18.0	85	153	120	188	162	230
	178-□P,M,K,N	17.8	18.0	85	153	120	188	162	230
	179-□P,M,K,N	17.9	18.0	85	153	120	188	162	230
	180-□P,M,K,N	18.0	18.0	85	153	120	188	162	230
	181-□P,M,K,N	18.1	19.0	88	157	124	193	171	240
	182-□P,M,K,N	18.2	19.0	88	157	124	193	171	240
	183-□P,M,K,N	18.3	19.0	88	157	124	193	171	240
	184-□P,M,K,N	18.4	19.0	88	157	124	193	171	240
	185-□P,M,K,N	18.5	19.0	88	157	124	193	171	240
	186-□P,M,K,N	18.6	19.0	88	157	124	193	171	240
	187-□P,M,K,N	18.7	19.0	88	157	124	193	171	240
	188-□P,M,K,N	18.8	19.0	88	157	124	193	171	240
	189-□P,M,K,N	18.9	19.0	88	157	124	193	171	240
	190-□P,M,K,N	19.0	19.0	88	157	124	193	171	240
	191-□P,M,K,N	19.1	20.0	90	160	130	200	180	250
	192-□P,M,K,N	19.2	20.0	90	160	130	200	180	250
	193-□P,M,K,N	19.3	20.0	90	160	130	200	180	250
	194-□P,M,K,N	19.4	20.0	90	160	130	200	180	250
	195-□P,M,K,N	19.5	20.0	90	160	130	200	180	250
	196-□P,M,K,N	19.6	20.0	90	160	130	200	180	250
	197-□P,M,K,N	19.7	20.0	90	160	130	200	180	250
	198-□P,M,K,N	19.8	20.0	90	160	130	200	180	250
	199-□P,M,K,N	19.9	20.0	90	160	130	200	180	250
	200-□P,M,K,N	20.0	20.0	90	160	130	200	180	250

※ Order made items : MSD□□□-Material (P,M,K,N) × Flute length - Total length L × Shank diameter S

Ex.1)Workpiece : SM45C, Machined diameter : Ø10.1mm, Flute length : 60mm, Total length : 80mm, Shank diameter : Ø11 → MSD101-P × 60 - 80L × 11S

Ex.2)Workpiece : STS303, Machined diameter : Ø10.12mm, Flute length : Flute length:60mm, Total length : 80mm, Shank diameter : Ø11 → MSD1012 - M × 60 - 80L × 11S

G Technical Information for Mach Long Solid Drill Plus

High precision results when machining deep holes

MLD Plus *New*

Mach Long Solid Drill Plus



Code System

0600 : Ø6.00 Drill Dia.(ØD)	Aspect ratio(L/D) 10D, 15D, 20D, 25D Standard type	Flute length 100 : 100mm Special type
---------------------------------------	--	--


MLD 0600N - 10 P - 100L - 10S

Mach Long Solid Drill Plus (MLD Plus)	Machining area P : Carbon steel, alloy steel K : Cast iron N : Aluminum, copper alloy	Overall length 100L : 100mm	Shank Dia. 10S : Ø10
--	---	---------------------------------------	--------------------------------

Features

Cutting edge and flute shape


- Straight cutting edge provides better rigidity.
- Excellent chip evacuation due to wider chip pocket and improved flute surface roughness
- Double margin secures machining stability.

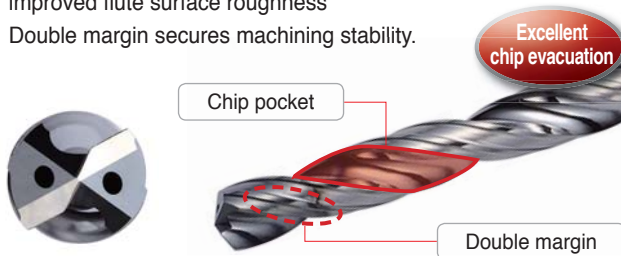

Cutting edge shape

New grade(PC315G)


- Ultra fine substrate and new coating applied
- Lubricative coating layer improves chip evacuation with lower frictional resistance.
- Longer tool life due to higher wear resistance

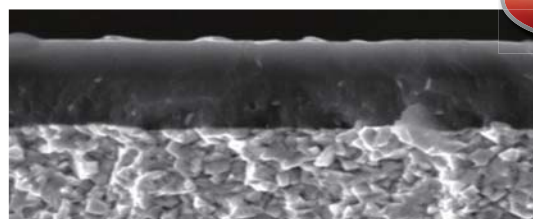

PC315G

Degree of machining precision


- Improved machining precision
 - Bent holes reduced
 - Inside hole surface roughness improved
 - Hole size uniformity increased
- Improved point shape
 - Precise location secured

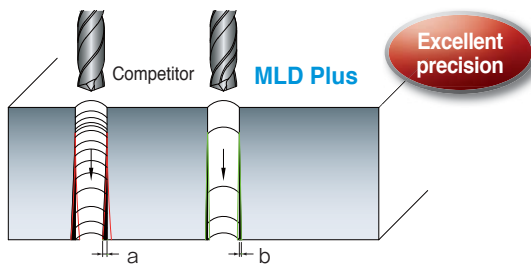

Reduced bent holes compared to competitors (a > b)

Cutting load


- **Workpiece** : SM45C
- **Cutting condition** : Drill Dia.(m) = Ø6.0, vc(m/min) = 70
fn(mm/rev)=0.12, ap(mm)=60, wet
- **Tools** : MLD0600N-20P

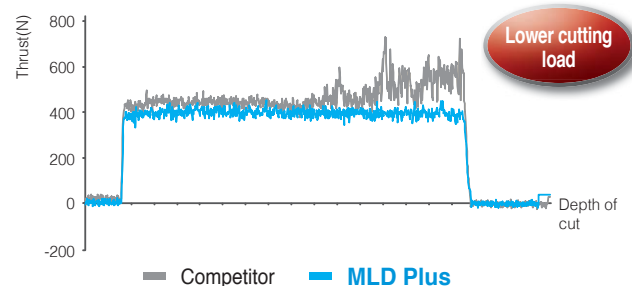

▶ Cutting Performance

Part of automobile


- **Workpiece** : SM45C
- **Cutting condition** : $vc(m/min)=70$
 $fn(mm/rev) = 0.12$
 $ap(mm) = 60$
 Through coolant
- **Tools** : MLD0400N-20P (PC315G)

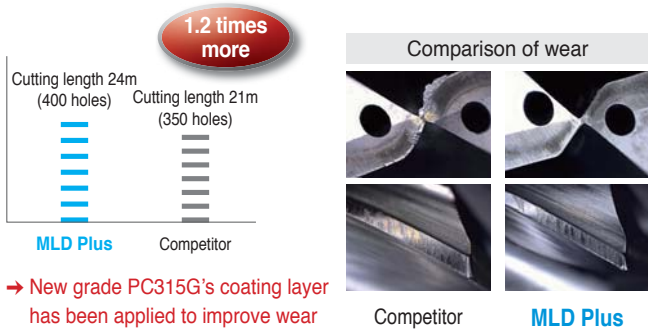

→ New grade PC315G's coating layer has been applied to improve wear resistance when machining carbon steel materials.

Part of automobile


- **Workpiece** : SCM440H
- **Cutting condition** : $vc(m/min)=70$
 $fn(mm/rev) = 0.12$
 $ap(mm) = 55$
 Through coolant(MQL)
- **Tools** : MLD0570N-15P (PC315G)



→ Double margin has been applied to improve stability and machining precision.

▶ Application Area


- ▶ **PC215G** – Excellent performance when machining cast iron and alloy steel at high speed
- ▶ **PC315G** – Universal grade excellent when machining carbon steel, cast iron, etc. at middle to low cutting speed

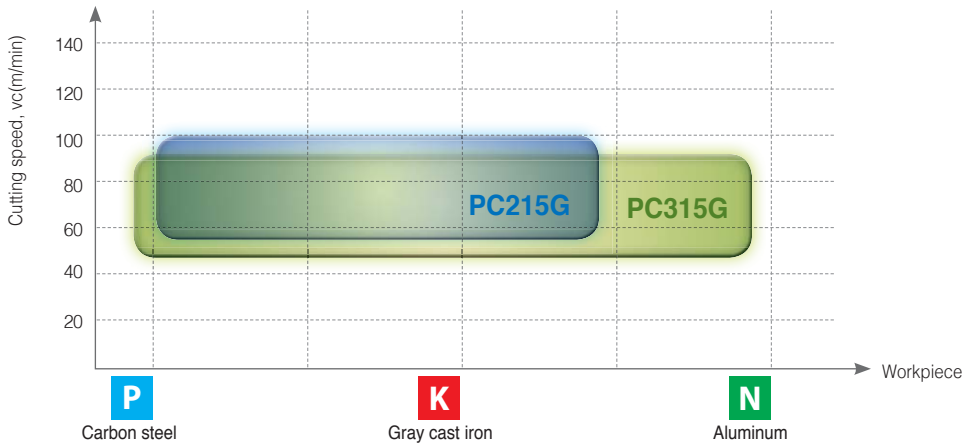

▶ Recommended Cutting Condition

Workpiece			Grade	Cutting speed $vc(m/min)$	Depth of cut = 10D~25D Feed rate (mm/rev) per drill dia.(mm)			
ISO	Workpiece	HB	Recommended		Ø3.0~Ø5.0	Ø5.1~Ø8.0	Ø8.1~Ø10.0	
P	Carbon steel	Low carbon steel	80~120	PC315G	80(60~90)	0.10~0.15	0.15~0.20	0.20~0.25
		High carbon steel	180~280	PC315G	70(60~80)	0.10~0.15	0.15~0.20	0.20~0.25
	Alloy steel	Low alloy steel	140~260	PC215G	80(60~90)	0.10~0.15	0.12~0.17	0.15~0.20
		Low carbon steel	50-260	PC215G	70(60~80)	0.08~0.15	0.10~0.15	0.15~0.20
K	Cast iron	Gray cast iron	150-230	PC215G	80(60~100)	0.10~0.20	0.15~0.20	0.15~0.20
		Ductile cast iron	160-260	PC215G	70(60~80)	0.10~0.20	0.15~0.20	0.15~0.20
N	Aluminum	Aluminum alloy	30-150	FG2	120(100~150)	0.12~0.17	0.15~0.20	0.20~0.25
	Copper alloy	Copper alloy	150-160	FG2	120(100~150)	0.12~0.17	0.15~0.20	0.20~0.25

MLD-□□ (P/K/N) *New*

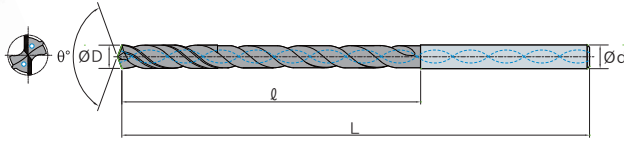

Terminology	P	K	N
Grade	PC215G		FG2
Tolerance(drill Dia.)	h7		
Tolerance(shank Dia.)	h6		
Point angle	135°		
Twist angle	30°		
Thinning	X type		
Coolant	Through system		


P Steel K Cast iron N Non-ferrous metal

(mm)

Designation	ØD	Ød	10D		15D		20D		25D	
			ℓ	L	ℓ	L	ℓ	L	ℓ	L
MLD 0300N-□□P,K,N	3.0	3.0	40	90	55	105	70	120	-	-
0310N-□□P,K,N	3.1	4.0	45	100	60	125	80	140	-	-
0320N-□□P,K,N	3.2	4.0	45	100	60	125	80	140	-	-
0330N-□□P,K,N	3.3	4.0	45	100	60	125	80	140	-	-
0340N-□□P,K,N	3.4	4.0	50	100	65	125	85	140	-	-
0350N-□□P,K,N	3.5	4.0	50	100	65	125	85	140	-	-
0360N-□□P,K,N	3.6	4.0	50	100	65	125	85	140	-	-
0370N-□□P,K,N	3.7	4.0	50	100	65	125	85	140	-	-
0380N-□□P,K,N	3.8	4.0	50	100	75	125	90	140	-	-
0390N-□□P,K,N	3.9	4.0	50	100	75	125	90	140	-	-
0400N-□□P,K,N	4.0	4.0	50	100	75	125	90	140	115	165
0410N-□□P,K,N	4.1	5.0	55	115	75	140	100	165	120	190
0420N-□□P,K,N	4.2	5.0	55	115	75	140	100	165	120	190
0430N-□□P,K,N	4.3	5.0	60	115	85	140	110	165	135	190
0440N-□□P,K,N	4.4	5.0	60	115	85	140	110	165	135	190
0450N-□□P,K,N	4.5	5.0	60	115	85	140	110	165	135	190
0460N-□□P,K,N	4.6	5.0	60	115	85	140	110	165	135	190
0470N-□□P,K,N	4.7	5.0	60	115	85	140	110	165	135	190
0480N-□□P,K,N	4.8	5.0	65	115	90	140	115	165	140	190
0490N-□□P,K,N	4.9	5.0	65	115	90	140	115	165	140	190



MLD-□□ (P/K/N) *New*

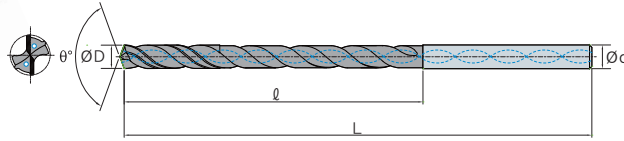


Terminology	P	K	N
Grade	PC215G	PC315G	FG2
Tolerance(drill Dia.)	h7		
Tolerance(shank Dia.)	h6		
Point angle	135°		
Twist angle	30°		
Thinning	X type		
Coolant	Through system		

P Steel K Cast iron N Non-ferrous metal

		(mm)									
Designation	ØD	Ød	10D		15D		20D		25D		
			ℓ	L	ℓ	L	ℓ	L	ℓ	L	
MLD 0500N-□□P,K,N	5.0	5.0	65	115	90	140	115	165	140	190	
0510N-□□P,K,N	5.1	6.0	70	128	95	160	120	190	150	220	
0520N-□□P,K,N	5.2	6.0	70	128	95	160	120	190	150	220	
0530N-□□P,K,N	5.3	6.0	70	128	95	160	120	190	150	220	
0540N-□□P,K,N	5.4	6.0	78	128	110	160	140	190	170	220	
0550N-□□P,K,N	5.5	6.0	78	128	110	160	140	190	170	220	
0560N-□□P,K,N	5.6	6.0	78	128	110	160	140	190	170	220	
0570N-□□P,K,N	5.7	6.0	78	128	110	160	140	190	170	220	
0580N-□□P,K,N	5.8	6.0	78	128	110	160	140	190	170	220	
0590N-□□P,K,N	5.9	6.0	78	128	110	160	140	190	170	220	
0600N-□□P,K,N	6.0	6.0	78	128	110	160	140	190	170	220	
0610N-□□P,K,N	6.1	7.0	87	140	120	175	155	210	190	250	
0620N-□□P,K,N	6.2	7.0	87	140	120	175	155	210	190	250	
0630N-□□P,K,N	6.3	7.0	87	140	120	175	155	210	190	250	
0640N-□□P,K,N	6.4	7.0	87	140	120	175	155	210	190	250	
0650N-□□P,K,N	6.5	7.0	87	140	120	175	155	210	190	250	
0660N-□□P,K,N	6.6	7.0	87	140	120	175	155	210	190	250	
0670N-□□P,K,N	6.7	7.0	87	140	120	175	155	210	190	250	
0680N-□□P,K,N	6.8	7.0	90	140	125	175	160	210	200	250	
0690N-□□P,K,N	6.9	7.0	90	140	125	175	160	210	200	250	

MLD-□□ (P/K/N) *New*

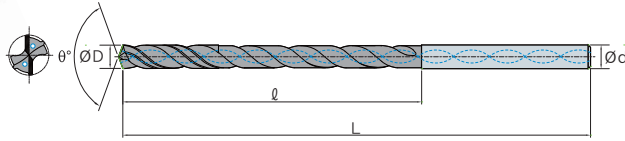

Terminology	P	K	N
Grade	PC215G	PC315G	FG2
Tolerance(drill Dia.)	h7		
Tolerance(shank Dia.)	h6		
Point angle	135°		
Twist angle	30°		
Thinning	X type		
Coolant	Through system		

P Steel K Cast iron N Non-ferrous metal

(mm)

Designation	ØD	Ød	10D		15D		20D		25D	
			ℓ	L	ℓ	L	ℓ	L	ℓ	L
MLD 0700N-□□P,K,N	7.0	7.0	90	140	125	175	160	210	200	250
0710N-□□P,K,N	7.1	8.0	100	155	135	195	170	230	-	-
0720N-□□P,K,N	7.2	8.0	100	155	135	195	170	230	-	-
0730N-□□P,K,N	7.3	8.0	100	155	135	195	170	230	-	-
0740N-□□P,K,N	7.4	8.0	100	155	135	195	170	230	-	-
0750N-□□P,K,N	7.5	8.0	100	155	135	195	170	230	-	-
0760N-□□P,K,N	7.6	8.0	105	155	145	195	180	230	-	-
0770N-□□P,K,N	7.7	8.0	105	155	145	195	180	230	-	-
0780N-□□P,K,N	7.8	8.0	105	155	145	195	180	230	-	-
0790N-□□P,K,N	7.9	8.0	105	155	145	195	180	230	-	-
0800N-□□P,K,N	8.0	8.0	105	155	145	195	180	230	-	-
0810N-□□P,K,N	8.1	9.0	110	165	155	210	195	260	-	-
0820N-□□P,K,N	8.2	9.0	110	165	155	210	195	260	-	-
0830N-□□P,K,N	8.3	9.0	110	165	155	210	195	260	-	-
0840N-□□P,K,N	8.4	9.0	110	165	155	210	195	260	-	-
0850N-□□P,K,N	8.5	9.0	110	165	155	210	195	260	-	-
0860N-□□P,K,N	8.6	9.0	115	165	160	210	210	260	-	-
0870N-□□P,K,N	8.7	9.0	115	165	160	210	210	260	-	-
0880N-□□P,K,N	8.8	9.0	115	165	160	210	210	260	-	-
0890N-□□P,K,N	8.9	9.0	115	165	160	210	210	260	-	-
0900N-□□P,K,N	9.0	9.0	115	165	160	210	210	260	-	-
0910N-□□P,K,N	9.1	10.0	125	190	170	240	-	-	-	-
0920N-□□P,K,N	9.2	10.0	125	190	170	240	-	-	-	-
0930N-□□P,K,N	9.3	10.0	125	190	170	240	-	-	-	-
0940N-□□P,K,N	9.4	10.0	125	190	170	240	-	-	-	-
0950N-□□P,K,N	9.5	10.0	125	190	170	240	-	-	-	-
0960N-□□P,K,N	9.6	10.0	130	190	180	240	-	-	-	-
0970N-□□P,K,N	9.7	10.0	130	190	180	240	-	-	-	-
0980N-□□P,K,N	9.8	10.0	130	190	180	240	-	-	-	-
0990N-□□P,K,N	9.9	10.0	130	190	180	240	-	-	-	-
1000N-□□P,K,N	10.0	10.0	130	190	180	240	-	-	-	-



Stable deep hole drilling with specially designed low cutting resistance

Mach Long Solid Drill

- Over 20D deep hole drilling is possible without step drilling
- The stable hole drilling due to specially designed low cutting resistance
- Special chip pocket has designed for effective chip evacuation
- Optimized design for drill rigidity to prevent the bending of the drill when entering operation
- The lubrication & thermal resistance of coating has been increased by adapting new TiAlN




▶ Code system

Special type

MLD(P) 1200 - 10 - 100L × 11S

Type	Tool Dia.	MLDP	Overall length	Shank Dia.
Mach Long Drill : MLD Pilot Drills For MLD : MLDP	1200=Ø12.00	FLUTE length 10 = 10mm MLD Depth of drilling 10 = D X 10	100L : 100mm	11S : Ø11

▶ Mach Long Drills - Deep hole drilling

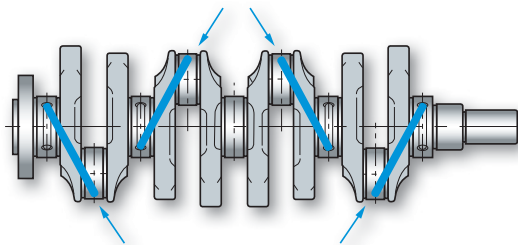

Application example (Oil hole for crank shaft, 20D)

Mach Long Drills are ideal for.....

- ▶ Deep and inclined hole drilling of crank shaft
- ▶ Deep hole drilling of cam shaft
- ▶ Deep hole drilling of mold and machinery
→ Deep hole drilling aspect ratio over 15D


Advantages of MLD

- ▶ Shorting cycle time for better productivity
- ▶ Tool guide bush is not required
- ▶ Reduce idle time by prolonged tool life
- ▶ Green coolant solutions(MQL) to protect environment

▶ MLD productivity : MLD0680-20 (Ø6.8mm x 140 x 170L x 7S)

Tool	vc(m/min)	fn(mm/rev)	n(min ⁻¹)	vf(mm/min)	Coolant	Step operation
Gun Drills (Carbide)	100	0.04	4,683	187	Through coolant oil	No required
High Speed Steel Long Drills	15	0.10	703	70	Outer coolant oil	15mm / 9times
Mach Long Drills	80	0.14	3,747	525	MQL- Air 0.5MPa, Oil 20cc/h	No required

▶ Cycle time

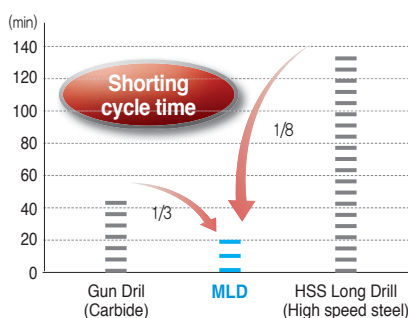


Advantages of MLD against conventional drills


- ▶ Decreasing cycle time up to 1/3 ~ 1/8 times
- ▶ Increasing productivity by process reduction
- ▶ It is easy to reduce running cost
- ▶ Improving of effective working condition
- ▶ Drill guide bush is not required

Function of MLD & MLDP

Relationship of point angle between MLD & MLDP

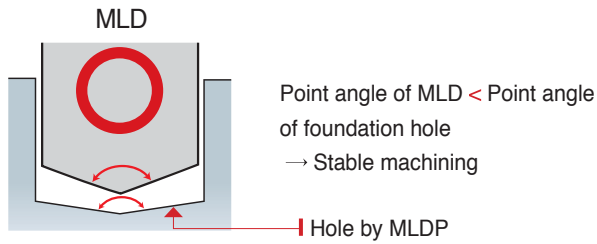


Large point angle of Pilot Drill : **Stable condition**

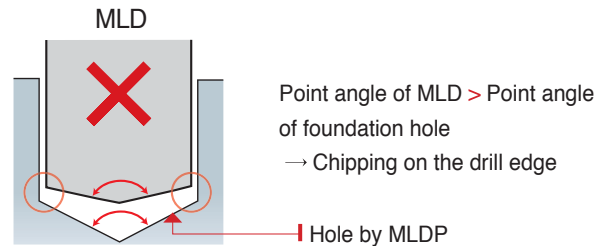

Small point angle of Pilot Drill : **Unstable condition**

To make the optimal of MLD

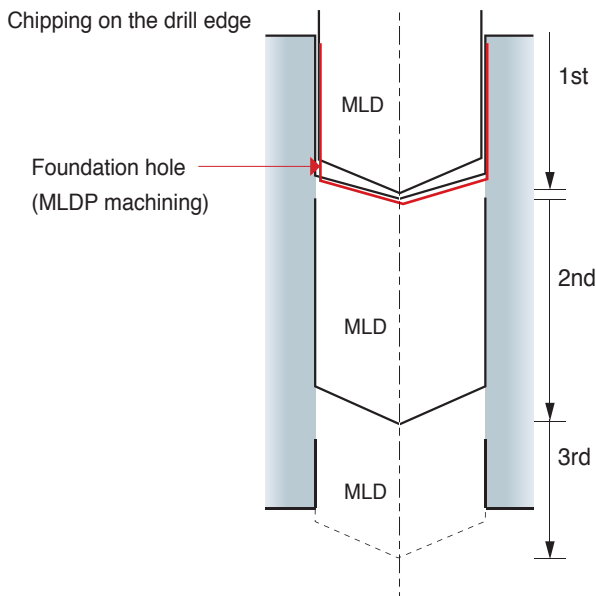

1st. Pilot drilling

- $vc(m/min)$ = Normal
- $fn(mm/rev)$ = Normal

2nd. Deep drilling by MLD

Approach the drill 1mm less than the depth of MLDP drilling.

- $vc(m/min)$ = 15
- $fn(mm/rev)$ = 0.5

2nd MLD drilling (Machining stage)

- $vc(m/min)$ = Normal
- $fn(mm/rev)$ = Normal


3rd MLD drilling (Piercing stage)

- $vc(m/min)$ = Normal
- $fn(mm/rev)$ = Normal feed / 2

Application example


Part of automobile

- **Workpiece** SCM440H, HB255~330
- **Cutting condition** $vc(m/min)$ = 70
 $fn(mm/rev)$ = 0.18
MQL(30cc/hour)
 $Air(MPa)$ = 0.7
- **Designation** MLD0600-22A (Ø6mm, Aspect ratio 18D)
- **Machine** Horizontal milling machine
- **Tool life** 1000 holes

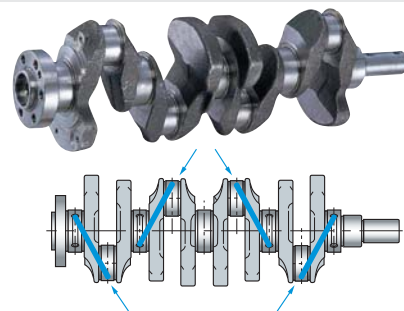


Part of automobile

- **Workpiece** GC250
- **Cutting condition** $vc(m/min)$ = 63
 $fn(mm/rev)$ = 0.1
water-soluble cutting fluid(3kg/cm², 2 l/min)
- **Designation** MLD0400-25A (Ø4mm, Aspect ratio 16D)
- **Machine** Rotary milling machine
- **Tool life** 440 holes

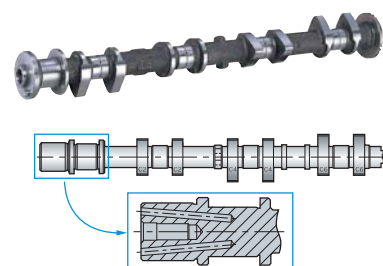

MLDP(Mach Pilot Drills with oil hole)

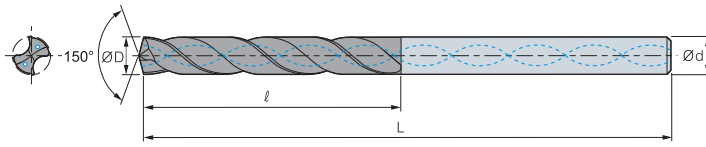

Grade	PC205F
Tolerance(drill Dia.)	x6
Twist angle	h6
Tolerance	150°
Point angle	30°
Thinning	X type
Coolant	Through system




(mm)

Designation	ØD	Ød	5 (ℓ / ØD = 5)		7 (ℓ / ØD = 7)		
			ℓ	L	ℓ	L	
MLDP	0300-□	3.0	3.0	25	70	30	75
	0400-□	4.0	4.0	34	80	40	86
	0500-□	5.0	5.0	43	90	50	97
	0600-□	6.0	6.0	48	96	60	108
	0700-□	7.0	7.0	56	105	70	120
	0800-□	8.0	8.0	60	110	80	130
	0900-□	9.0	9.0	72	125	90	143
	1000-□	10.0	10.0	75	129	95	150

- ※ Order made items : MLDP□□□□ × Flute length - Total length L × Shank diameter S
Ex.1) Machined diameter : Ø5.8mm, Flute length : 50mm, Total length : 100mm, MLDP0580 × 50-100L × 6S
- ※ Precautions needed by tooling as NMLD and MLDP are one set.

MLD(Mach long Drills)

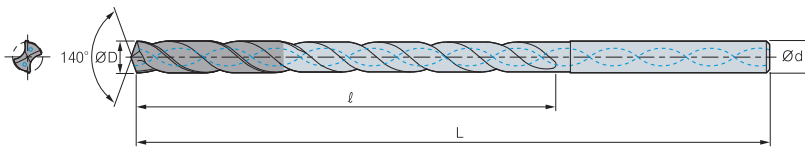

Grade	PC205F
Tolerance(drill Dia.)	h7
Twist angle	h6
Tolerance	140°
Point angle	30°
Thinning	X type
Coolant	Through system



(mm)




Designation	ØD	Ød	20 (ℓ / ØD = 20)		25 (ℓ / ØD = 25)		
			ℓ	L	ℓ	L	
MLD	0300-□	3.0	3.0	60	110	75	120
	0400-□	4.0	4.0	80	130	100	150
	0500-□	5.0	5.0	100	150	125	175
	0600-□	6.0	6.0	120	170	150	200
	0700-□	7.0	7.0	140	190	175	225
	0800-□	8.0	8.0	160	210	200	250
	0900-□	9.0	9.0	180	230	-	-
	1000-□	10.0	10.0	200	250	-	-

- ※ Order made items : MLD□□□□ -Aspect ratio
Ex.1) Machined diameter : Ø5.3mm, Flute length : 120mm, Total length : 180mm, MLD0530-22(Aspect ratio)
- ※ The last alphabet of the code refers to whether the product has been upgraded.


Tolerance code

Drill Dia. (ØD)		h6	h7	x6
Over	Under			
-	3	0 ~ -0.006	0 ~ -0.010	+ 0.020 ~ + 0.026
3	6	0 ~ -0.008	0 ~ -0.012	+ 0.028 ~ + 0.036
6	10	0 ~ -0.009	0 ~ -0.015	+ 0.034 ~ + 0.043
10	14	0 ~ -0.011	0 ~ -0.018	+ 0.040 ~ + 0.051
14	18	0 ~ -0.011	0 ~ -0.018	+ 0.045 ~ + 0.056
18	24	0 ~ -0.013	0 ~ -0.021	+ 0.054 ~ + 0.067


Code system for mach step drill

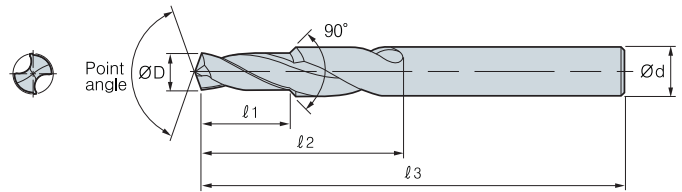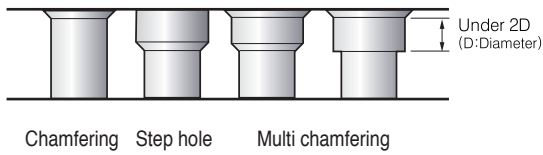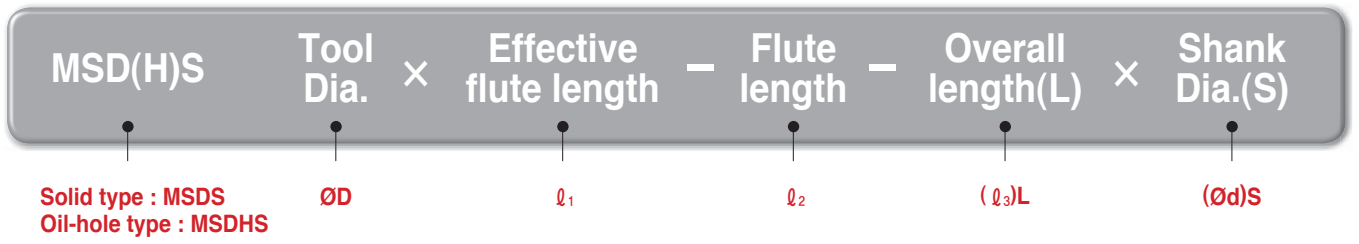


Multi chamfering
(Coolant : Through system External system)

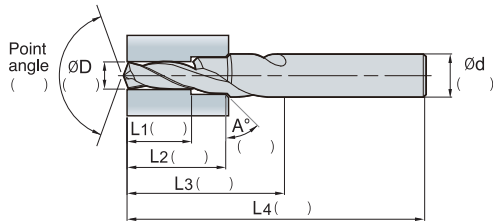


Multi chamfering
(Coolant : Through system External system)

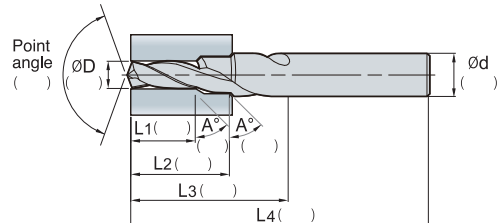


Step hole
(Coolant : Through system External system)

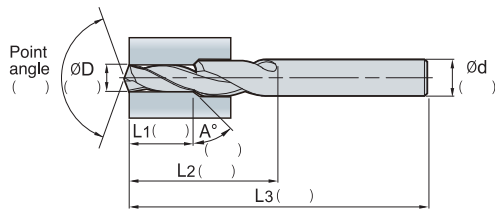

Chamfering
(Coolant : Through system External system)

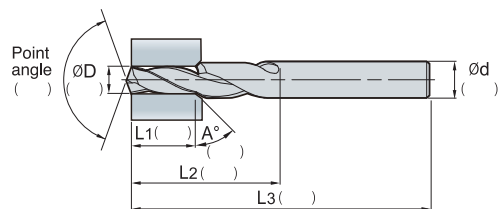

Drilling
(Coolant : Through system External system)

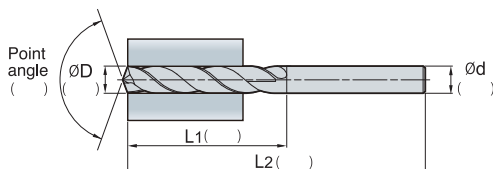


High feed and precision machining with our specially designed point edge

Vulcan Drill

- High feed and precision machining due to specially designed point edge
- Vulcan drills ensure longer tool life under high speed condition because of increased thermal & wear resistance. It also uses a PVD coating with an exclusive substrate to help maintain reduced frictional resistance
- Low cutting resistance by the best design of clearance angle is possible to increase feed
- Smoother chip control due to improved chip breakage
- Rmax: 6~25s, Hole tolerance: IT8 ~ 10
- Strong shock resistance ensures long tool life under the heavy interrupted machining



▶ Code system

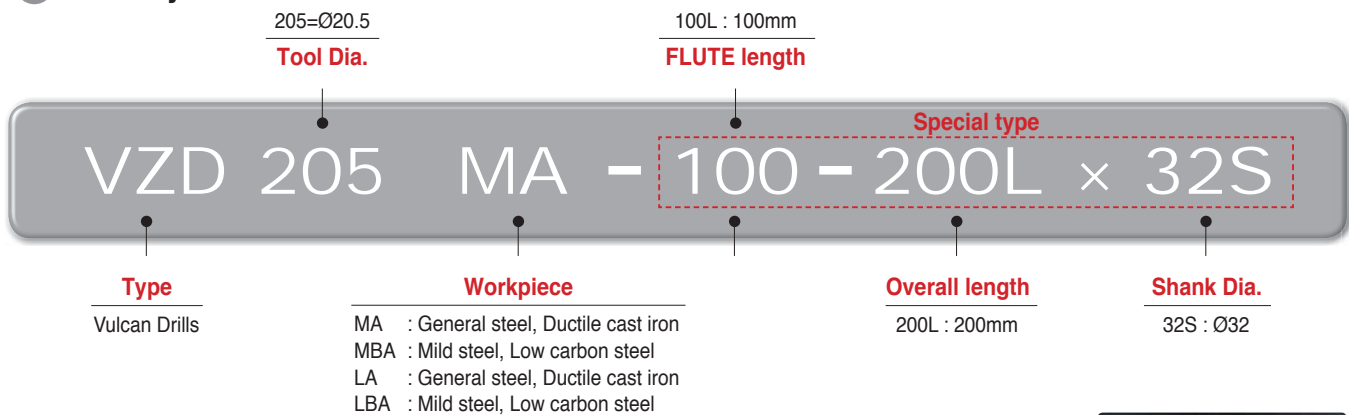

▶ Application for Vulcan Drill

Workpiece - General steel, Alloy steel, Mild steel, Dice steel, Stainless steel, Cast iron, Ductile cast iron, Non-ferrous metal, etc



▶ Notice

Unsuitable drilling

- Avoid the inclination or unevenness of entering and piercing section of hole as possible
- Reduce the feed 0.1 ~ 0.15mm/rev when drilling at inclined and unevenness

Clamping of workpiece


- In case of wide flat panel or rotation by horizontal component, please clamp to be prevented bending of central part of workpiece for high efficiency

▶ Recommended cutting condition

Form	Workpiece	Hardness	~Ø15		~Ø20		~Ø40	
			vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)	vc(m/min)	fn(mm/rev)
MA LA	Mild steel, General steel, Alloy steel	Under HB250	40~90 (65)	0.15~0.30 (0.20)	40~90 (65)	0.20~0.40 (0.30)	40~90 (70)	0.20~0.45 (0.35)
	General steel, Alloy steel	Under HB320	40~90 (60)	0.10~0.25 (0.20)	40~90 (60)	0.15~0.35 (0.25)	40~90 (65)	0.20~0.40 (0.30)
	Mold steel	HB250	40~70 (50)	0.10~0.25 (0.20)	40~70 (50)	0.15~0.30 (0.25)	40~70 (50)	0.20~0.35 (0.30)
	Stainless steel	HB250	30~50 (45)	0.10~0.20 (0.15)	30~50 (45)	0.15~0.25 (0.20)	30~50 (45)	0.20~0.30 (0.25)
	Ductile cast iron	-	50~100 (70)	0.20~0.35 (0.30)	50~100 (70)	0.20~0.40 (0.35)	50~100 (70)	0.25~0.50 (0.40)
MBA LBA	Mild steel, General steel, Alloy steel	Under HB250	40~90 (75)	0.20~0.40 (0.30)	40~90 (75)	0.20~0.40 (0.30)	40~90 (80)	0.20~0.45 (0.35)
	General steel, Alloy steel	Under HB320	35~80 (55)	0.15~0.30 (0.25)	35~80 (55)	0.15~0.30 (0.25)	40~80 (60)	0.15~0.40 (0.30)

Vulcan Drill(VZD)-MA, MBA

Type	MA	MBA
Grade	PC230F	
Tolerance(drill Dia.)	h7	
Tolerance(shank Dia.)	h7	
Point angle	140°	150°
Twist angle	25°	20°
Type	X type	
Coolant	Through system	

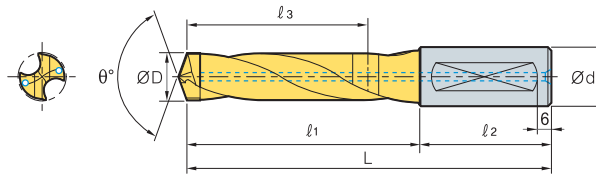

(mm)

Designation	ØD	Ød	L	ℓ ₁	ℓ ₂	ℓ ₃
VZD 126~135MA, MBA	12.6~13.5	16	110	62	48	44
136~145MA, MBA	13.6~14.5	16	115	67	48	48
146~155MA, MBA	14.6~15.5	20	125	75	50	55
156~165MA, MBA	15.6~16.5	20	130	80	50	59
166~175MA, MBA	16.6~17.5	20	135	85	50	63
176~185MA, MBA	17.6~18.5	20	140	90	50	66
186~195MA, MBA	18.6~19.5	25	155	99	56	74
196~205MA, MBA	19.6~20.5	25	155	99	56	73
206~215MA, MBA	20.6~21.5	25	155	99	56	72
216~225MA, MBA	21.6~22.5	25	160	104	56	76
226~235MA, MBA	22.6~23.5	25	160	104	56	74
236~245MA, MBA	23.6~24.5	32	170	110	60	79
246~255MA, MBA	24.6~25.5	32	170	110	60	78
256~265MA, MBA	25.6~26.5	32	175	115	60	82
266~275MA, MBA	26.6~27.5	32	175	115	60	80
276~285MA, MBA	27.6~28.5	32	180	120	60	84
286~295MA, MBA	28.6~29.5	32	185	125	60	88
296~305MA, MBA	29.6~30.5	32	185	125	60	87
306~315MA, MBA	30.6~31.5	40	205	135	70	95
316~325MA, MBA	31.6~32.5	40	210	140	70	98
326~335MA, MBA	32.6~33.5	40	215	145	70	101
336~345MA, MBA	33.6~34.5	40	220	150	70	104
346~355MA, MBA	34.6~35.5	40	225	155	70	107
356~365MA, MBA	35.6~36.5	40	225	155	70	110
366~375MA, MBA	36.6~37.5	40	230	160	70	113
376~385MA, MBA	37.6~38.5	40	235	165	70	116
386~395MA, MBA	38.6~39.5	40	240	170	70	119
396~405MA, MBA	39.6~40.5	40	245	175	70	122

※ VZD□□□MA : For General steel, Ductile cast iron
MBA : For Mild steel, Low carbon steel

※ Order made items : VZD□□□□□ × Flute length - Total length L

Ex.1) MA Type, Machined diameter : Ø18.6mm, Flute length : 110mm, Total length : 200mm
--- VZD186MA × 110-200L


Ex.2) MA Type, Machined diameter : Ø18.63, Flute length : 110mm, Total length : 200mm
--- VZD1863MA × 110-200L

Ex.3) MA Type, Machined diameter : Ø18.6, Standard
--- VZD186MA



Vulcan Drill(VZD) - LA, LBA

Type	LA	LBA
Grade	PC230F	
Tolerance(drill Dia.)	h7	
Tolerance(shank Dia.)	h7	
Point angle	140°	150°
Twist angle	25°	20°
Type	X type	
Coolant	Through system	

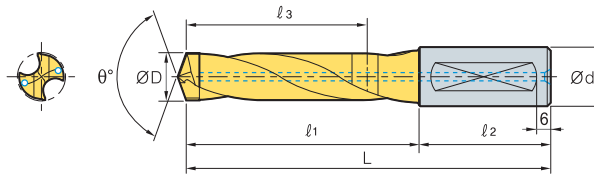

		(mm)					
Designation	ØD	Ød	L	l ₁	l ₂	l ₃	
VZD	126~135LA, LBA	12.6~13.5	16	140	92	48	74
	136~145LA, LBA	13.6~14.5	16	145	97	48	78
	146~155LA, LBA	14.6~15.5	20	155	105	50	85
	156~165LA, LBA	15.6~16.5	20	165	115	50	94
	166~175LA, LBA	16.6~17.5	20	170	120	50	98
	176~185LA, LBA	17.6~18.5	20	175	125	50	101
	186~195LA, LBA	18.6~19.5	25	190	134	56	109
	196~205LA, LBA	19.6~20.5	25	195	139	56	113
	206~215LA, LBA	20.6~21.5	25	195	139	56	112
	216~225LA, LBA	21.6~22.5	25	200	144	56	116
	226~235LA, LBA	22.6~23.5	25	210	154	56	124
	236~245LA, LBA	23.6~24.5	32	220	160	60	129
	246~255LA, LBA	24.6~25.5	32	225	165	60	133
	256~265LA, LBA	25.6~26.5	32	230	170	60	137
	266~275LA, LBA	26.6~27.5	32	235	175	60	141
	276~285LA, LBA	27.6~28.5	32	240	180	60	144
	286~295LA, LBA	28.6~29.5	32	245	185	60	148
	296~305LA, LBA	29.6~30.5	32	255	195	60	157
	306~315LA, LBA	30.6~31.5	40	275	205	70	166
	316~325LA, LBA	31.6~32.5	40	280	210	70	172
	326~335LA, LBA	32.6~33.5	40	280	215	70	173
	336~345LA, LBA	33.6~34.5	40	290	220	70	177
	346~355LA, LBA	34.6~35.5	40	295	225	70	181
	356~365LA, LBA	35.6~36.5	40	300	230	70	183
	366~375LA, LBA	36.6~37.5	40	305	235	70	188
	376~385LA, LBA	37.6~38.5	40	315	245	70	193
	386~395LA, LBA	38.6~39.5	40	320	250	70	198
	396~405LA, LBA	39.6~40.5	40	325	255	70	203

※ VZD□□□□LA : For General steel, Ductile cast iron
 LBA : For Mild steel, Low carbon steel

※ Order made items : VZD□□□□□ × Flute length - Total length L

Ex.1) LA Type, Machined diameter : Ø18.6mm, Flute length : 110mm, Total length : 200mm
 --- VZD186LA × 110-200L

Ex.2) LA Type, Machined diameter : Ø18.63, Flute length : 110mm, Total length : 200mm
 --- VZD1863LA × 110-200L

Ex.3) LA Type, Machined diameter : Ø18.6, Standard
 --- VZD186LA


Guarantees excellent chip evacuation and surface roughness by specially designed flute and high rigidity of drill

Carbide Drill

One of the most important aspects of hole-drilling is hole precision and the tool life of the drill. These carbide drills are produced with a super fine exclusive substrate from Korloy designed to meet stress, hardness, and resistance to plastic deformation requirements of today's machining

- Long tool life by improving wear resistance and toughness for small hole drilling(Ø1mm~ Ø4mm)
- Increment of productivity by come true high feed because of specially designed cutting edge to low cutting resistance.(Ø4~ Ø15)
- Available to various workpiece as cast iron, non-ferrous metal, etc.
- Guarantees excellent chip evacuation and surface roughness by specially designed flute and high rigidity of drill

▶ Code system

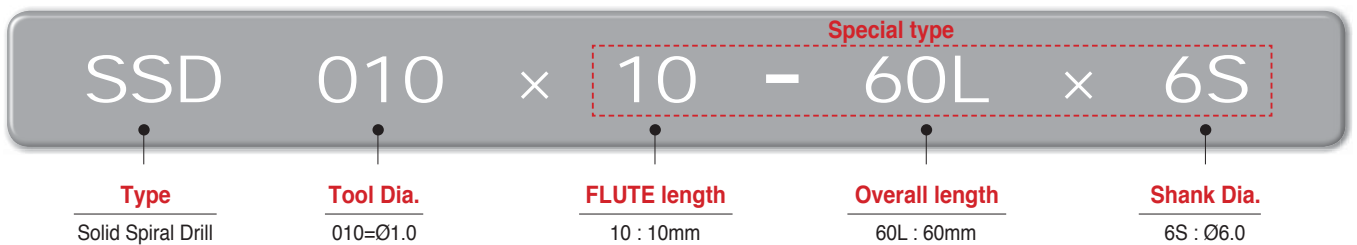


▶ Recommended cutting condition

Workpiece	Strength	Revolution as per drill Dia.(min ⁻¹)							Feed rate (mm/rev) per drill dia.(mm)		Coolant
		Ø5	Ø10	Ø15	Ø20	Ø25	Ø30	Ø40	Ø5~Ø12	Ø15~Ø40	
SM10C~SM45C	50	2900	1600	1100	1000	800	700	600	0.03~0.06	0.03~0.06	Cutting oil
SM55C	70	2300	1530	1050	920	765	640	560	0.03~0.06	0.06~0.12	Cutting oil
SM55C·Pre-hardened steel	100	2200	1500	1000	900	750	650	550	0.03	0.06	Cutting oil
Pre-hardened steel	150~180	700	340	250	190	160	140	120	0.02	0.04	Cutting oil
Cr-Ni steel	100	2200	1200	800	652	550	460	380	0.03	0.06	Cutting oil
Mn-steel	40~110	700	340	260	190	170	150	120	0.04	0.08	Dry
Casting	200~300	2000	1500	800	600	450	400	350	0.03	0.06	Dry
Malleable iron	200	2400	1500	900	650	500	420	380	0.03	0.06	Dry
Chiled casting	65Hs	350	200	150	100	80	70	55	0.01	0.02	Dry
Copper	60~80	6000	4000	2500	2000	1400	1000	800	0.06	0.12	Dry
Brass	80~120	5000	3500	2000	1500	1400	1200	1000	0.05	0.10	Dry
Bronze casting	60~120	3500	2500	1800	1500	1200	1000	900	0.04	0.08	Dry
Aluminum	60~120	16000	8500	5700	4500	3700	3100	2800	0.1	0.2	Dry
Al alloy (Si13%)	40	8000	4500	2800	2100	1750	1050	700	0.05	0.15	Dry
Synthetic resin	90~120	8000	5400	2800	2100	1750	1050	200	0.05	0.15	Dry



Carbide Drill-SSD

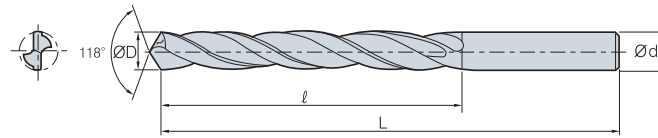

Coating	x
Tolerance(drill Dia.)	h8
Tolerance(shank Dia.)	h7
Point angle	118°
Twist angle	30°
Thinning	S type
Coolant	External system

				(mm)			
Designation	ØD = Ød	ℓ	L	Designation	ØD = Ød	ℓ	L
SSD 010	1.0	10	32	SSD 048	4.8	38	65
011	1.1	10	32	049	4.9	38	65
012	1.2	10	32	050	5.0	38	65
013	1.3	10	32	051	5.1	38	65
014	1.4	10	32	052	5.2	38	65
015	1.5	13	35	053	5.3	38	65
016	1.6	13	35	054	5.4	38	65
017	1.7	13	35	055	5.5	38	65
018	1.8	13	35	056	5.6	40	75
019	1.9	13	35	057	5.7	40	75
020	2.0	18	40	058	5.8	40	75
021	2.1	18	40	059	5.9	40	75
022	2.2	18	40	060	6.0	40	75
023	2.3	18	40	061	6.1	40	75
024	2.4	18	40	062	6.2	40	75
025	2.5	22	45	063	6.3	40	75
026	2.6	22	45	064	6.4	40	75
027	2.7	22	45	065	6.5	40	75
028	2.8	22	45	066	6.6	46	80
029	2.9	22	45	067	6.7	46	80
030	3.0	25	50	068	6.8	46	80
031	3.1	25	50	069	6.9	46	80
032	3.2	25	50	070	7.0	46	80
033	3.3	25	50	071	7.1	46	80
034	3.4	25	50	072	7.2	46	80
035	3.5	25	50	073	7.3	46	80
036	3.6	30	55	074	7.4	46	80
037	3.7	30	55	075	7.5	46	80
038	3.8	30	55	076	7.6	46	80
039	3.9	30	55	077	7.7	46	80
040	4.0	30	55	078	7.8	46	80
041	4.1	34	60	079	7.9	46	80
042	4.2	34	60	080	8.0	50	85
043	4.3	34	60	081	8.1	50	85
044	4.4	34	60	082	8.2	50	85
045	4.5	34	60	083	8.3	50	85
046	4.6	38	65	084	8.4	50	85
047	4.7	38	65	085	8.5	50	85


※ Drill diameter : Available from Ø0.6

※ Order made items : SSD□□□ × Flute length - Total length L

Ex.1) Genetal type, Machined diameter : Ø8.2mm, Flute length : 60mm, Total length : 90mm --- SSD082 × 60 - 90L

Ex.2) Genetal type, Machined diameter : Ø8.2mm --- SSD082

Carbide Drill-SSD

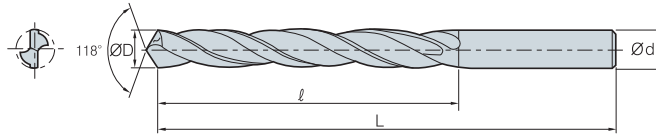

Coating	x
Tolerance(drill Dia.)	h8
Tolerance(shank Dia.)	h7
Point angle	118°
Twist angle	30°
Thinning	S type
Coolant	External system

(mm)

Designation	ØD = Ød	ℓ	L	Designation	ØD = Ød	ℓ	L
SSD 086	8.6	50	95	SSD 097	9.7	50	100
087	8.7	50	95	098	9.8	50	100
088	8.8	50	95	099	9.9	50	100
089	8.9	50	95	100	10.0	50	100
090	9.0	50	95	105	10.5	60	120
091	9.1	50	95	110	11.0	60	120
092	9.2	50	95	115	11.5	65	125
093	9.3	50	95	120	12.0	65	125
094	9.4	50	95	125	12.5	65	125
095	9.5	50	95	130	13.0	65	125
096	9.6	50	100	150	15.0	70	130

※ Drill diameter : Available from Ø0.6

※ Order made items : SSD□□□ × Flute length - Total length L

Ex.1) Genetal type, Machined diameter : Ø8.2mm, Flute length : 60mm, Total length : 90mm --- SSD082 × 60 - 90L

Ex.2) Genetal type, Machined diameter : Ø8.2mm --- SSD082



Burnishing Drill

▶ Recommended cutting condition

Workpiece	Cutting speed vc(m/min)	Feed rate (mm/rev) per drill dia.(mm)				
		Ø2.0~ 3.0	Ø3.5~ 5.0	Ø5.5~ 8.0	Ø8.5~ 12	Ø12.5~ 18
Aluminum alloy, Copper alloy	30~60	0.02~0.05	0.03~0.10	0.04~0.15	0.05~0.20	0.05~0.30
Aluminum alloy for die castings	50~80	0.02~0.05	0.03~0.10	0.04~0.15	0.05~0.20	0.05~0.30
Cast iron(GC) Ductile cast	25~60	0.01~0.04	0.02~0.08	0.05~0.12	0.05~0.20	0.05~0.30
iron(GCD)	20~50	0.01~0.03	0.02~0.05	0.03~0.08	0.04~0.12	0.05~0.15

Burnishing Drill - BDS

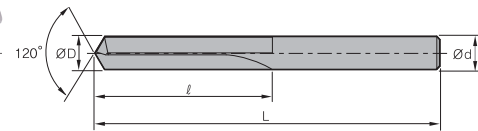


Fig.1

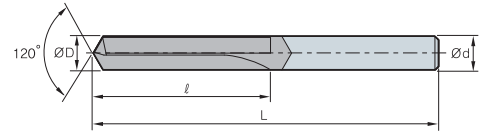




Fig.2

(mm)

Designation	ØD	Ød	ℓ	L	Fig.
BDS 040S	4.0	4.0	35	80	1
050S	5.0	5.0	40	85	1
060S	6.0	6.0	50	95	1
070S	7.0	7.0	55	100	1
080S	8.0	8.0	65	110	1
090S	9.0	9.0	70	120	1
100S	10.0	10.0	80	130	1
110S	11.0	11.0	90	140	1
120B	12.0	12.0	95	150	2
130B	13.0	16.0	105	160	2
140B	14.0	16.0	110	170	2
150B	15.0	16.0	120	185	2
160B	16.0	16.0	125	190	2

Step Burnishing Drill - BDT

For tapping a foundation hole

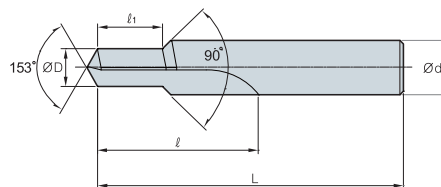

(mm)


Designation	ØD	Ød	ℓ	ℓ ₁	L	Tap
BDT M05080-ℓ 1	4.2	6.0	35	9~15	90	M5XP0.8
M06100-ℓ 1	5.0	7.0	40	11~18	95	M6XP1.0
M08125-ℓ 1	6.8	10.0	50	15~24	105	M8XP1.25
M10125-ℓ 1	8.8	12.0	55	17~30	110	M10XP1.25
M10150-ℓ 1	8.5	12.0	55	17~30	110	M10XP1.5
M12125-ℓ 1	10.8	14.0	60	19~36	120	M12XP1.25
M12150-ℓ 1	10.5	14.0	60	19~36	120	M12XP1.5
M12175-ℓ 1	10.3	14.0	60	19~36	120	M12XP1.75

Top Solid drill

▶ Recommended cutting condition

Diameter	Cutting condition	Ductile cast iron	Gray cast iron	Soft steel
Ø8~Ø10	vc(m/min)	30(20~35)	40(20~60)	100(50~150)
	fn(mm/rev)	0.30(0.20~0.40)	0.30(0.20~0.40)	0.15(0.10~0.20)
Ø10.1~Ø15	vc(m/min)	50(30~70)	60(30~80)	130(70~200)
	fn(mm/rev)	0.35(0.30~0.40)	0.35(0.30~0.40)	0.15(0.10~0.20)
Ø15.1~Ø25	vc(m/min)	60(50~60)	75(50~100)	150(100~250)
	fn(mm/rev)	0.35(0.30~0.45)	0.40(0.30~0.50)	0.15(0.10~0.20)

Top Solid Drill - TSDM

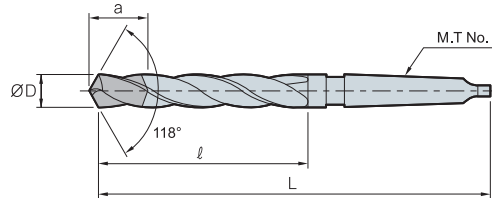

(mm)

Designation	ØD	L	ℓ	a	M.T No
TSDM 080-085	8.0~8.5	168	85	25	1
086-090	8.6~9.0	172	88	25	1
091-095	9.1~9.5	175	92	26	1
096-100	9.6~10.0	178	95	26	1
101-105	10.1~10.5	182	98	26	1
106-110	10.6~11.0	185	102	26	1
111-115	11.1~11.5	188	105	26	1
116-120	11.6~12.0	192	108	26	1
121-125	12.1~12.5	195	112	26	1
126-130	12.6~13.0	198	115	26	2
131-135	13.1~13.5	202	118	27	2
136-140	13.6~14.0	205	122	27	2
141-145	14.1~14.5	222	122	27	2
146-150	14.6~15.0	225	125	27	2
151-155	15.1~15.5	228	125	27	2
156-160	15.6~16.0	230	130	27	2
161-165	16.1~16.5	232	132	27	2
166-170	16.6~17.0	234	135	27	2
171-180	17.1~18.0	240	140	27	2
181-190	18.1~19.0	245	145	27	2
191-200	19.1~20.0	250	150	30	2
201-210	20.1~21.0	255	155	30	2
211-220	21.1~22.0	260	160	30	2
221-230	22.1~23.0	265	165	30	2
231-250	23.1~25.0	285	165	34	3

※ Order form : TSDM125



High accuracy hole machining for aluminum alloy

PCD Drill

- High accuracy hole machining for aluminum alloy
- Drilling tolerance : IT7~8class
- Recommendation with high accuracy and high spindle machine


▶ Code system



▶ Recommended cutting condition

Workpiece	vc(m/min)	fn(mm/rev)
Aluminum alloy	50 ~ 250	0.05 ~ 0.20 0.10 ~ 0.40

PDD

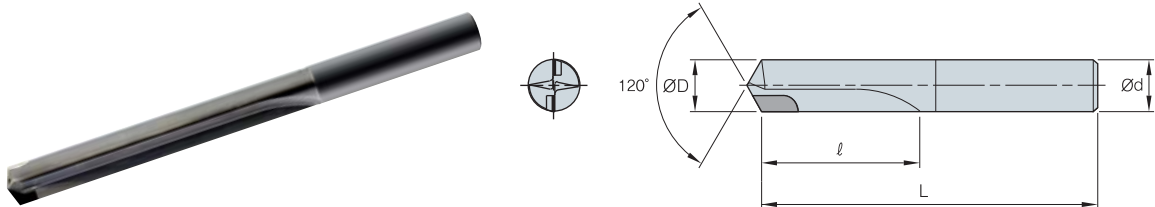



Designation		ØD	Ød	l	L
PDD	0500	5.0	5.0	30	80
	0550	5.5	5.5	30	80
	0600	6.0	6.0	30	80
	0650	6.5	6.5	40	95
	0700	7.0	7.0	40	95
	0750	7.5	7.5	45	100
	0800	8.0	8.0	45	100
	0850	8.5	8.5	50	110
	0900	9.0	9.0	50	110
	0950	9.5	9.5	55	115
	1000	10.0	10.0	55	115
	1050	10.5	10.5	60	120
	1100	11.0	11.0	60	120
	1150	11.5	11.5	65	125
	1200	12.0	12.0	65	125

Stable performance and hole quality with our unique cutting edge and guide pad
Available regrinding

Gun Drill


- High efficiency in deep hole machining
- High accuracy (Hole tolerance : IT9, surface finish : Ra0.1~3.0S)
- Stable Quality due to unique cutting edge and guide pad available regrinding
- Used drill can recycle as change part of carbide
- Depending on request, The drills can change geometry of cutting edge and drive specification
- For ordering, please check length of drill

Code system

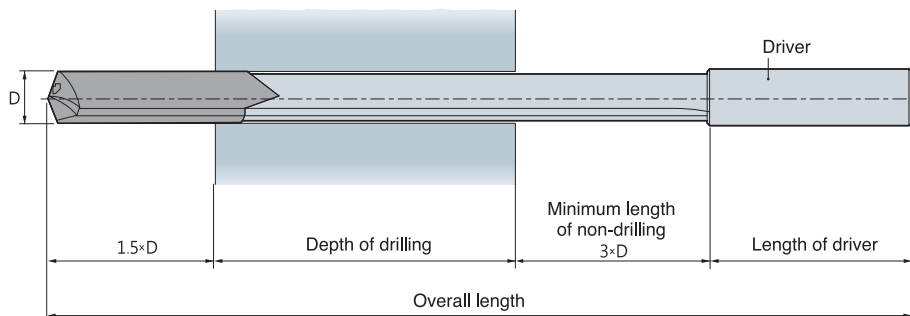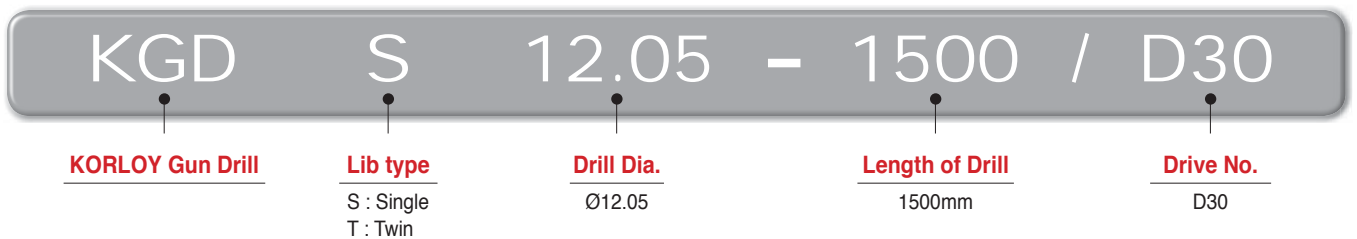

- Refer to the code system and the above drawing when ordering.
- Refer to the page 68 for the size of a driver.
- The overall length can be chosen by order.


Application of Gun Drill on exclusive machine

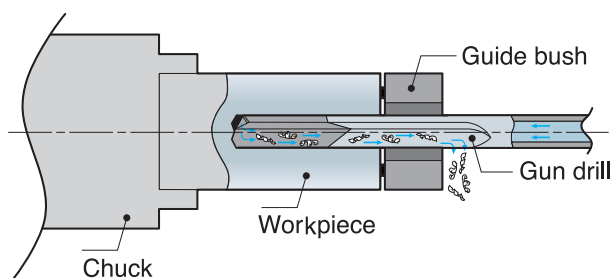

- The guide bush is necessary for centering before gun-drilling.

▶ Application of Gun Drill on machining center

1 Machining of a pilot hole

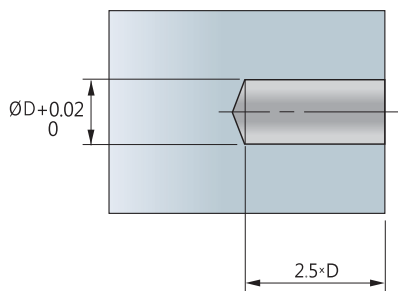


1. A pilot hole is necessary in machining on a machining center instead of a guide bush.
2. The diameter of the pilot hole should be 0.01~0.02(H7) larger bigger than one of the Gun Drill diameter and the depth of drilling should be about 2.5×D.
3. Use Mach Drill(MSD) for machining of a pilot hole.




MSD

2 Moving the Gun Drill to the pilot hole

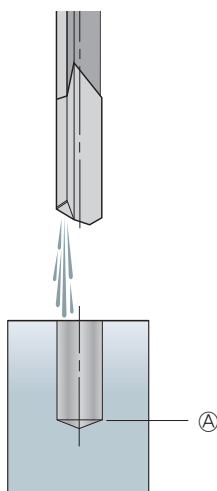


1. The Gun Drill should not drill before entering into the pilot hole.
2. Coolant is necessary for gun drilling.

3 Start Gun Drilling.



1. Rotate the spindle.
2. Machine with drilling to vertical axis.

4 After gun drilling

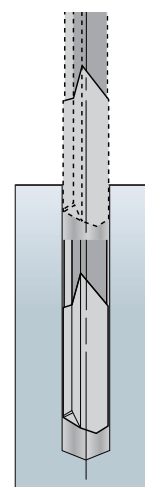

1. Return the drill.
2. Stop drilling and supplying coolant.
3. Remove the Gun Drill.

▶ Features

	Single Lip type	Twin Lip type
Shape		
Drill Dia.	Ø2.0 ~ Ø33.0	Ø6.0 ~ Ø26.5
Depth of drilling	≥ 2,000mm	≥ 1,000mm
Tolerance	IT9	IT10
Surface finish	Ra 0.1 ~ 3.0µm	Ra 1.0 ~ 4.0µm
Application	For all kinds of workpiece machining	<ul style="list-style-type: none"> • Workpieces with good chip evacuation • Machining of at higher feed than single lip type's

▶ Recommended cutting condition


Workpiece	Hardness (HB)	Cutting speed vc(m/min)	Feed rate (mm/rev) per drill dia.(mm)					
			~Ø4	~Ø6	~Ø10	~Ø14	~Ø24	Ø25~
Carbon steel Alloy steel	~150	100~150	0.005~0.015	0.010~0.025	0.015~0.035	0.020~0.050	0.030~0.070	0.040~0.080
	150~250	80~120	0.005~0.010	0.010~0.020	0.015~0.030	0.020~0.040	0.030~0.060	0.030~0.060
	250~350	50~100	0.005~0.010	0.005~0.010	0.010~0.020	0.015~0.030	0.020~0.040	0.020~0.040
	350~	~30	-	0.005~0.010	0.005~0.010	0.010~0.020	0.020~0.035	0.020~0.035
Stainless steel	~250	50~80	0.005~0.015	0.010~0.020	0.010~0.020	0.010~0.030	0.020~0.035	0.020~0.040
	250~350	40~50	-	0.005~0.015	0.010~0.015	0.010~0.020	0.010~0.020	0.010~0.020
Cast iron	~220	80~100	0.010~0.0120	0.020~0.040	0.030~0.050	0.040~0.080	0.080~0.120	0.100~0.150
	220~	40~80	0.005~0.010	0.005~0.015	0.010~0.020	0.015~0.030	0.020~0.050	0.025~0.070
Aluminum alloy	-	180~250	0.010~0.020	0.020~0.040	0.030~0.060	0.040~0.080	0.100~0.180	0.150~0.200
Light alloy	-	120~200	0.005~0.010	0.010~0.020	0.020~0.025	0.020~0.030	0.030~0.040	0.040~0.060

▶ Technical information


The factors below determines the straightness of hole.

- Drill diameter and depth of drilling
- Cutting condition and kind of application
- Kind of workpiece and machine
- Drill bush


Required machine power

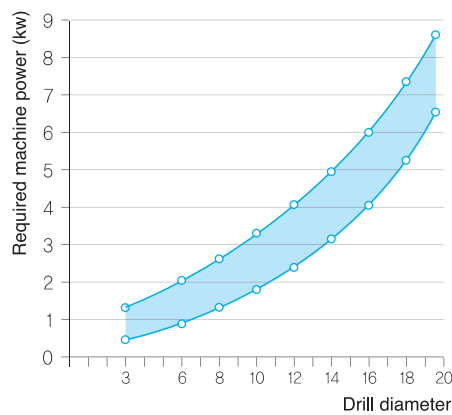


Straightness

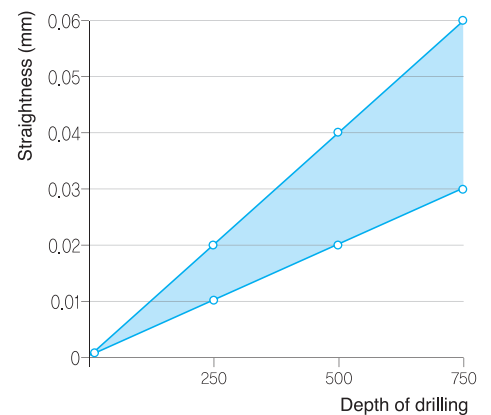

Quantity of coolant

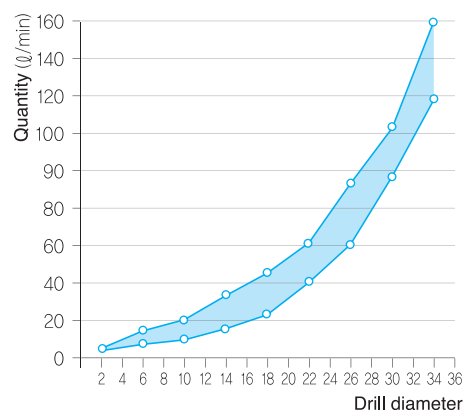

Pressure of coolant








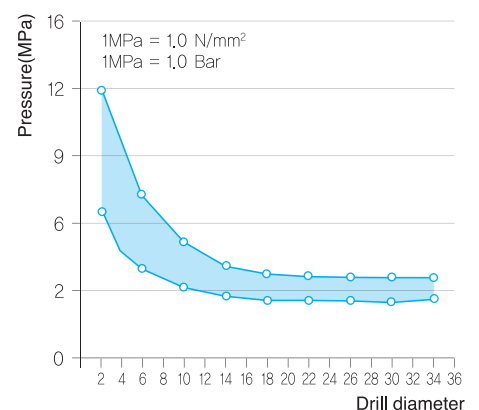


The above graph shows general information and it is changeable depending on kind of tool, workpieces, and cutting conditions etc.

- **Pressure and quantity of coolant** - High pressure of coolant ensures excellent chip evacuation and cooling the cutting edge.
- **Use a filter for removing impurities** - The diameter of a filter should be less than 20 μ m. Impurities could make bad flow of coolant, wear on a tool, and high load on the cooling pump.
- **Temperature of coolant** - Proper temperature of coolant : 20°C~ 22°C / Do not use coolant at 50°C above




▶ Driver standard

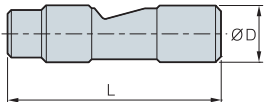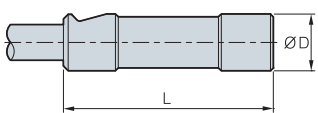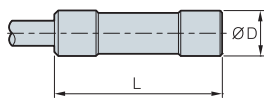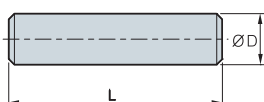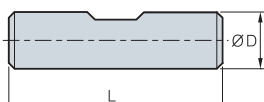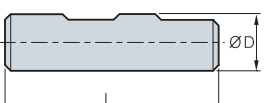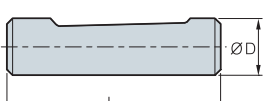Type	Shape	No.	ØD×L		Carbide Type	
			ØD×L	Thread	Tipped	Solid
Central Clamping Surface 15°		D01	10*40		●	●
		D02	16*45		●	
		D03	19.05*69.8		●	
		D04	25*70		●	
		D05	25.4*69.8		●	
Frontal Clamping Surface 15°		D06	16*50		●	
Central Clamping Tapered		D07	12.7*38.1		●	●
		D08	16*70			
		D09	19.05*69.8		●	
		D10	20*70			
Cylindrical DIN1835A DIN6535HA		D11	4*28		●	●
		D12	6*36		●	●
		D13	10*40		●	●
		D14	16*48		●	●
		D15	20*50		●	
		D16	25*56		●	
Weldon DIN1835B		D17	10*40		●	●
		D18	12*45		●	●
		D19	16*48		●	●
		D20	20*50		●	●
Weldon DIN6535HB		D21	25*56		●	
		D22	32*60		●	
		D23	40*70			
Whistle Notch DIN1835E		D24	10*40		●	●
		D25	12*45		●	●
		D26	16*48		●	●
		D27	20*50		●	●
		D28	25*56		●	
		D29	32*60		●	
Whistle Notch DIN6535HE		D30	10*40		●	●
		D31	12*45		●	●
		D32	16*48		●	●
		D33	20*50		●	●

* Special types are available for quotation with shape and size information.

Gun Drill-KGDS

Single Lip type

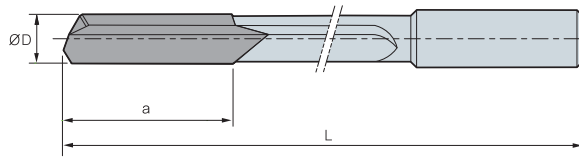

Designation discription	
○.○○	Diameter
□□□□	Length
D△△	Driver code no.

(mm)

Designation	ØD	L
KGDS ○.○○-□□□□ / D△△	2.00~2.49	18
○.○○-□□□□ / D△△	2.50~2.99	18
○.○○-□□□□ / D△△	3.00~3.49	19
○.○○-□□□□ / D△△	3.50~3.99	19
○.○○-□□□□ / D△△	4.00~4.49	23
○.○○-□□□□ / D△△	4.50~4.99	23
○.○○-□□□□ / D△△	5.00~5.49	24
○.○○-□□□□ / D△△	5.50~5.99	26
○.○○-□□□□ / D△△	6.00~6.49	27
○.○○-□□□□ / D△△	6.50~6.99	28
○.○○-□□□□ / D△△	7.00~7.49	29
○.○○-□□□□ / D△△	7.50~7.99	30
○.○○-□□□□ / D△△	8.00~8.49	31
○.○○-□□□□ / D△△	8.50~8.99	31
○.○○-□□□□ / D△△	9.00~8.49	31
○.○○-□□□□ / D△△	9.50~9.99	31
○.○○-□□□□ / D△△	10.00~10.49	31
○.○○-□□□□ / D△△	10.50~10.99	32
○.○○-□□□□ / D△△	11.00~11.49	35
○.○○-□□□□ / D△△	11.50~11.99	35
○.○○-□□□□ / D△△	12.00~12.49	38
○.○○-□□□□ / D△△	12.50~12.99	38
○.○○-□□□□ / D△△	13.00~13.99	38
○.○○-□□□□ / D△△	14.00~14.99	38
○.○○-□□□□ / D△△	15.00~15.99	39
○.○○-□□□□ / D△△	16.00~16.99	39
○.○○-□□□□ / D△△	17.00~17.99	40
○.○○-□□□□ / D△△	18.00~18.99	41
○.○○-□□□□ / D△△	19.00~19.99	41
○.○○-□□□□ / D△△	20.00~20.99	44
○.○○-□□□□ / D△△	21.00~21.99	46
○.○○-□□□□ / D△△	22.00~22.99	49
○.○○-□□□□ / D△△	23.00~23.99	51
○.○○-□□□□ / D△△	24.00~24.99	52
○.○○-□□□□ / D△△	25.00~25.99	54
○.○○-□□□□ / D△△	26.00~26.99	54
○.○○-□□□□ / D△△	27.00~27.99	54
○.○○-□□□□ / D△△	28.00~28.99	54
○.○○-□□□□ / D△△	29.00~29.99	56
○.○○-□□□□ / D△△	30.00~30.99	59
○.○○-□□□□ / D△△	31.00~31.99	61
○.○○-□□□□ / D△△	32.00~32.99	61

※ When ordering, please mark the overall length and driver number (or drawing).


▶ Available overall length

Designation	Drill Dia.	Overall length				
		250mm	500mm	1000mm	1500mm	2000mm
KGDS	2.00 ~ 2.99	○	○			
	3.00 ~ 3.49	○	○	○		
	3.50 ~ 32.99	○	○	○	○	○



Gun Drill-KGDT

Twin Lip type

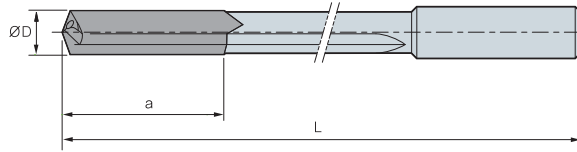

Designation discription	
○.○○	Diameter
□□□□	Length
D△△	Driver code no.



Designation		ØD	a
KGDT	○.○○-□□□□ / D△△	6.00~6.49	35
	○.○○-□□□□ / D△△	6.50~6.99	35
	○.○○-□□□□ / D△△	7.00~7.49	38
	○.○○-□□□□ / D△△	7.50~7.99	38
	○.○○-□□□□ / D△△	8.00~8.49	38
	○.○○-□□□□ / D△△	8.50~8.99	38
	○.○○-□□□□ / D△△	9.00~8.49	40
	○.○○-□□□□ / D△△	9.50~9.99	40
	○.○○-□□□□ / D△△	10.00~10.49	40
	○.○○-□□□□ / D△△	10.50~10.99	40
	○.○○-□□□□ / D△△	11.00~11.49	45
	○.○○-□□□□ / D△△	11.50~11.99	45
	○.○○-□□□□ / D△△	12.00~12.49	45
	○.○○-□□□□ / D△△	12.50~12.99	48
	○.○○-□□□□ / D△△	13.00~13.99	48
	○.○○-□□□□ / D△△	14.00~14.99	48
	○.○○-□□□□ / D△△	15.00~15.99	48
	○.○○-□□□□ / D△△	16.00~16.99	50
	○.○○-□□□□ / D△△	17.00~17.99	50
	○.○○-□□□□ / D△△	18.00~18.99	50
	○.○○-□□□□ / D△△	19.00~19.99	50
	○.○○-□□□□ / D△△	20.00~20.99	55
	○.○○-□□□□ / D△△	21.00~21.99	55
	○.○○-□□□□ / D△△	22.00~22.99	55
	○.○○-□□□□ / D△△	23.00~23.99	60
	○.○○-□□□□ / D△△	24.00~24.99	60
	○.○○-□□□□ / D△△	25.00~25.99	65
	○.○○-□□□□ / D△△	26.00~26.50	65

※ When ordering, please mark the overall length and driver number (or drawing).

▶ Available overall length

Designation	Drill Dia.	Overall length				
		250mm	500mm	1000mm	1500mm	2000mm
KGDT	6.00 ~ 26.50	○	○	○		



Mass production and High performance

Indexable Reamer

- Suitable for mass production and High performance
- Using PCD or coated insert for high speed machining
- Excellent high accuracy and adjustable machining hole
- Using accuracy chucking system(Hydraulic, rotating type arbor)
- Using inner coolant type machine to evacuate chips
- Using suitable holder and insert
- As insert setting , using setting fixture (KIRSD-210)

▶ Code system


IR	T	12.000	-	16	135	-	16
Type	Application	Reamer Dia.		Shank Dia.	length		Insert size
Indexable Reamer	T : Throughout hole machining B : Blind hole machining	12.000 : Ø12.0		16 : Ø16	135 : 135		15 : 15.0×3.0 16 : 16.0×3.5 17 : 17.0×4.5 22 : 22.0×6.5

▶ Insert code system


RI	16	-	B	06
Type	Insert size		Insert reed type	Angle of C/B
Reamer Insert	15 : 15.0×3.0 16 : 16.0×3.5 17 : 17.0×4.5 22 : 22.0×6.5		A : Excellent surface finish, low cutting condition B : General surface finish, high cutting condition C : Aluminum and copper alloy D : Blind hole, low feed	00 : 0°, Cast iron 06 : 6°, General steel 12 : 12°, Stainless, Al

▶ Application


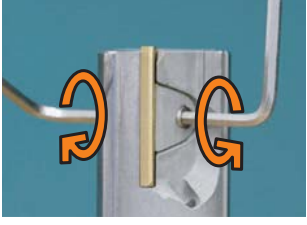
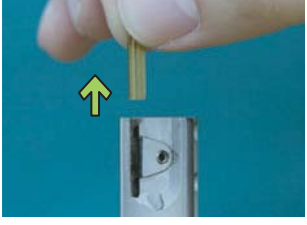
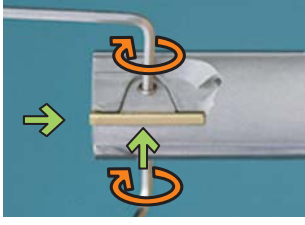
Throughout hole machining(IRT type)



Stuffed hole machining (IRB type)



▶ How to set an insert




			
<p>1. Screw the wedge screw counter clockwise with the exclusive wrench.</p>	<p>2. Screw the clamp screw. ① Top side : counter clockwise ② Lower side : clockwise</p>	<p>3. Remove the insert and clean the pocket.</p>	<p>4. Put the insert up to the edge stopper and clamp the insert. ① Top side : clockwise ② Lower side : counterclockwise</p>

▶ Exclusive fixture



- ▶ Designation : KIRSD-210
- ▶ Maximum diameter of reamer : $\text{Ø}60 \times 210\text{mm}$
- ▶ The fixture is also available for setting special reamer and mono tool.
- ▶ Special reamers (out of maximum setting range) are available quotation.

▶ How to set an insert with fixture

		
<p>1. Adjust the gauge to '0'.</p>	<p>2. Rotate the reamer for the insert to touch the gauge.</p>	<p>3. Set the back taper and adjust the insert height with screw the wedge screw. ① Top side of insert : $+0.015 \sim +0.020\text{mm}$ ② Bottom side of insert : $+0.005 \sim +0.010\text{mm}$ ③ Back taper : $0.010 \sim 0.015\text{mm}$</p>

▶ Back taper

- ▶ Ensures low cutting load and excellent surface finish with good chip evacuation.
- ▶ Inaccurate back taper could cause unstable machining with wear of insert.
- ▶ The size of back taper of insert down side should be less to $0.010 \sim 0.015\text{mm}$ than one of insert upper side.

▶ Insert setting with a micrometer



• Lathe with both centers or Bench center are also available.

Notice : The setting with a micrometer is not recommended due to chipping on the cutting edge.

▶ Recommended cutting condition


Workpiece	Insert Type		Feed rate (mm/rev) per drill dia.(mm)	Cutting speed v_c (m/min)		
	Rake angle	Leed type		Coated	Uncoated	Cermet
Carbon steel General steel	6	A	0.1~0.4	60~80	40~60	110~160
		B	0.1~0.3	80~120	60~80	
		D	0.05~0.2			
Mild steel Alloy steel	6	A	0.1~0.4	40~60	20~40	110~160
		B	0.1~0.3	80~120	60~80	
		D	0.05~0.2			
High alloy steel Tool steel	6	A	0.1~0.4	20~60	20~40	20~60
		B	0.1~0.3	40~80	40~60	40~80
		D	0.05~0.2			
Stainless steel	12	A	0.1~0.3	40~60	20~40	40~60
		B	0.1~0.2	60~80	40~60	60~80
		D	0.05~0.2			
Cast iron	0.6	A	0.1~0.3	60~100	40~60	
		B	0.1~0.25	80~120	60~80	
		D	0.05~0.2			
Alloyed aluminum	12	B	0.1~0.3		160~200	
		C	0.15~0.3		150~250	
		D	0.05~0.2		110~200	
Alloyed copper	0	B	0.1~0.2		80~100	
		D	0.05~0.2			
Non-ferrous alloy	0	B	0.1~0.3		10~70	

▶ Parts

Reamer Size	Clamp	Wedge	Clamp Screw	Wedge Screw (NYLOK)	Clamp Wrench	Wedge Wrench
10.0~11.9	CV 15	AW2430	DHA0308	HSO306	HW15L	HW15L
12.0~17.9	CV 16	AW2435				
18.0~27.9	CV 17	AW3240	DHA0409	HSO406	HW20L	HW20L
28.0~31.9	CV 22	AW3260				



Indexable Reamer Insert

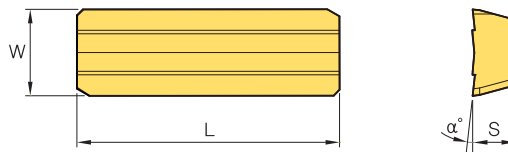

Designation	Grade			Dimensions			Reed type	Rake angle (α°)	
	K10(Uncoated)	BPK110(TiAlN)	BPK210(TiN)	L	W	S			
RI	15-A06		○	15	3.0	1.5	A	6°	
	15-A12	○		15	3.0	1.5	A	12°	
	15-B06		○	15	3.0	1.5	B	6°	
	15-B12		○	15	3.0	1.5	B	12°	
	16-A06			○	16	3.5	1.5	A	6°
	16-A12	○			16	3.5	1.5	A	12°
	16-B06		○	○	16	3.5	1.5	B	6°
	16-B12		○		16	3.5	1.5	B	12°
	17-A06			○	17	4.5	2.0	A	6°
	17-A12	○			17	4.5	2.0	A	12°
	17-B06		○	○	17	4.5	2.0	B	6°
	17-B12		○		17	4.5	2.0	B	12°
	22-A06			○	22	6.5	3.0	A	6°
	22-A12	○			22	6.5	3.0	A	12°
	22-B06		○	○	22	6.5	3.0	B	6°
	22-B12		○		22	6.5	3.0	B	12°

※ ○ This is recommended grade as for insert type

▶ Angle of chip breaker


	00	06	12
Shape			
Application	For cast iron machining	For general machining	For stainless and aluminum machining

▶ Insert lead type

Type	Shape	Working condition	Type	Shape	Working condition
A		For excellent surface, low cutting condition	C		For aluminum and copper alloy machining
B		For general application, high cutting condition	D		For blind hole machining, low feed

Indexable Reamer - IRT

Throughout hole

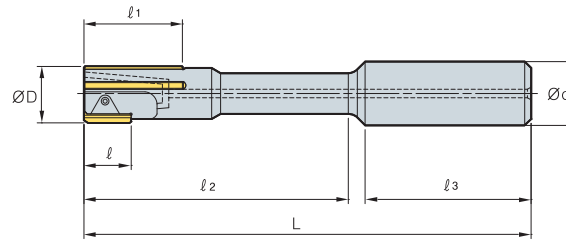

(mm)


	Designation	ØD	l	l ₁	l ₂	l ₃	L	Ød	Insert
IRT	10.000-16125-15	10	15	30	75	45	125	16	RI 15
	11.000-16125-15	11	15	30	75	45	125	16	RI 15
	12.000-16135-16	12	16	30	85	45	135	16	RI 16
	13.000-16135-16	13	16	30	85	45	135	16	RI 16
	14.000-16135-16	14	16	30	85	45	135	16	RI 16
	15.000-16135-16	15	16	30	85	45	135	16	RI 16
	16.000-20155-16	16	16	30	100	50	155	20	RI 16
	17.000-20155-16	17	16	30	100	50	155	20	RI 16
	18.000-20155-17	18	17	30	100	50	155	20	RI 17
	19.000-20155-17	19	17	30	100	50	155	20	RI 17
	20.000-25165-17	20	17	30	110	56	165	25	RI 17
	21.000-25165-17	21	17	30	110	56	165	25	RI 17
	22.000-25165-17	22	17	30	110	56	165	25	RI 17
	23.000-25165-17	23	17	30	110	56	165	25	RI 17
	24.000-25165-17	24	17	30	110	56	165	25	RI 17
	25.000-25165-17	25	17	30	110	56	165	25	RI 17
	26.000-25165-17	26	17	30	110	56	165	25	RI 17
	27.000-25165-17	27	17	30	110	56	165	25	RI 17
	28.000-32165-22	28	22	30	110	56	165	32	RI 22
	29.000-32165-22	29	22	30	110	56	165	32	RI 22
30.000-32165-22	30	22	30	110	56	165	32	RI 22	
31.000-32165-22	31	22	30	110	56	165	32	RI 22	

↻ Applicable inserts **G82**



Indexable Reamer - IRB

Stuffed hole

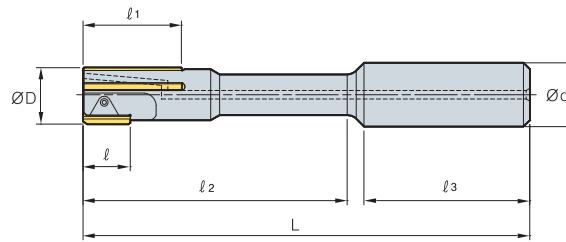

(mm)

	Designation	ØD	ℓ	ℓ ₁	ℓ ₂	ℓ ₃	L	Ød	Insert
IRB	10.000-16125-15	10	15	30	75	45	125	16	RI 15
	11.000-16125-15	11	15	30	75	45	125	16	RI 15
	12.000-16135-16	12	16	30	85	45	135	16	RI 16
	13.000-16135-16	13	16	30	85	45	135	16	RI 16
	14.000-16135-16	14	16	30	85	45	135	16	RI 16
	15.000-16135-16	15	16	30	85	45	135	16	RI 16
	16.000-20155-16	16	16	30	100	50	155	20	RI 16
	17.000-20155-16	17	16	30	100	50	155	20	RI 16
	18.000-20155-17	18	17	30	100	50	155	20	RI 17
	19.000-20155-17	19	17	30	100	50	155	20	RI 17
	20.000-25165-17	20	17	30	110	56	165	25	RI 17
	21.000-25165-17	21	17	30	110	56	165	25	RI 17
	22.000-25165-17	22	17	30	110	56	165	25	RI 17
	23.000-25165-17	23	17	30	110	56	165	25	RI 17
	24.000-25165-17	24	17	30	110	56	165	25	RI 17
	25.000-25165-17	25	17	30	110	56	165	25	RI 17
	26.000-25165-17	26	17	30	110	56	165	25	RI 17
	27.000-25165-17	27	17	30	110	56	165	25	RI 17
	28.000-32165-22	28	22	30	110	56	165	32	RI 22
	29.000-32165-22	29	22	30	110	56	165	32	RI 22
	30.000-32165-22	30	22	30	110	56	165	32	RI 22
	31.000-32165-22	31	22	30	110	56	165	32	RI 22

↻ Applicable inserts **G82**

Chucking / Machine Reamer

 Recommended cutting condition

Workpiece	Hardness (HB)	Cutting condition	Diameter		
			~Ø9	Ø10~25	Ø26~60
Steel	~100kg/mm ²	vc(m/min)	8~12	8~12	8~12
		fn(mm/rev)	0.15~0.25	0.20~0.40	0.30~0.50
	100~140kg/mm ²	vc(m/min)	5~10	5~10	5~10
		fn(mm/rev)	0.10~0.20	0.15~0.25	0.20~0.40
Cast iron	HB ~220	vc(m/min)	6~12	6~12	8~15
		fn(mm/rev)	0.15~0.30	0.30~0.50	0.40~0.80
	HB 220~	vc(m/min)	5~10	5~10	8~12
		fn(mm/rev)	0.10~0.20	0.20~0.35	0.30~0.50
Brass	HB 50~120	vc(m/min)	8~12	10~15	10~15
		fn(mm/rev)	0.10~0.15	0.15~0.25	0.25~0.40
Bronze	HB 60~100	vc(m/min)	8~12	10~15	10~15
		fn(mm/rev)	0.10~0.15	0.15~0.25	0.25~0.40
Alloyed aluminum	HB 90~120	vc(m/min)	15~25	15~25	20~30
		fn(mm/rev)	0.15~0.25	0.25~0.40	0.40~0.70
Synthetic resins	-	vc(m/min)	15~30	20~35	30~40
		fn(mm/rev)	0.15~0.25	0.25~0.40	0.40~0.50



Chucking Reamer - SCRS

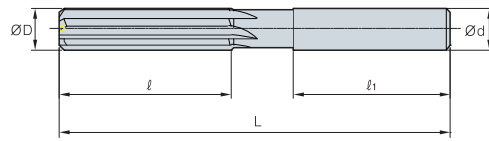


Fig.1

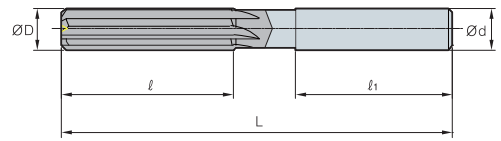


Fig.2

(mm)

Designation	No. of flute	ØD	Ød	ℓ	ℓ ₁	L	Fig.
SCRS 050S	4	5.0	6.0	20	40	100	1
060S	4	6.0	6.0	20	40	115	1
070S	4	7.0	8.0	20	40	125	1
080S	4	8.0	8.0	20	40	135	1
090S	4	9.0	10.0	20	45	140	1
100B	4	10.0	10.0	25	50	145	2
110B	4	11.0	12.0	25	50	150	2
120B	4	12.0	12.0	25	50	160	2
130B	4	13.0	16.0	25	50	165	2
140B	6	14.0	16.0	25	50	170	2
150B	6	15.0	16.0	30	50	180	2
160B	6	16.0	16.0	30	50	190	2
180B	6	18.0	20.0	30	55	210	2
200B	6	20.0	20.0	40	60	230	2

Chucking Reamer - SCRH

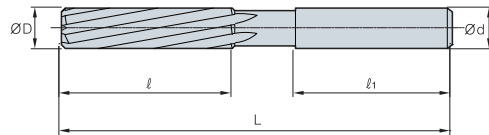


Fig. 1


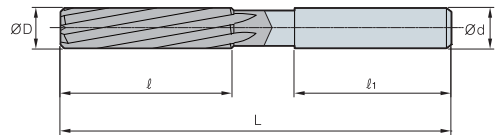


Fig. 2

(mm)

Designation	No. of flute	ØD	Ød	ℓ	ℓ ₁	L	Fig.
SCRS 050S	4	5.0	6.0	20	40	100	1
060S	4	6.0	6.0	20	40	115	1
070S	4	7.0	8.0	20	40	125	1
080S	4	8.0	8.0	20	40	135	1
090S	4	9.0	10.0	20	45	140	1
100B	4	10.0	10.0	25	50	145	2
110B	4	11.0	12.0	25	50	150	2
120B	4	12.0	12.0	25	50	160	2
130B	4	13.0	16.0	25	50	165	2
140B	6	14.0	16.0	25	50	170	2
150B	6	15.0	16.0	30	50	180	2
160B	6	16.0	16.0	30	50	190	2
180B	6	18.0	20.0	30	55	210	2
200B	6	20.0	20.0	40	60	230	2


Chucking Reamer - TCRS

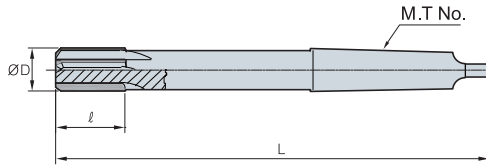

(mm)

Designation	No. of flute	ØD	ℓ	L	M.T No.
TCRS 070	4	7.0	20	150	1
080	4	8.0	20	150	1
090	4	9.0	20	160	1
100	4	10.0	25	160	1
110	4	11.0	25	170	1
120	4	12.0	25	170	1
130	4	13.0	25	180	1
140	6	14.0	25	190	1
150	6	15.0	30	200	2
160	6	16.0	30	200	2
180	6	18.0	30	220	2
200	6	20.0	40	230	2
250	6	25.0	40	260	3
280	8	28.0	40	270	3
300	8	30.0	50	290	3

Machine Reamer - TMRS

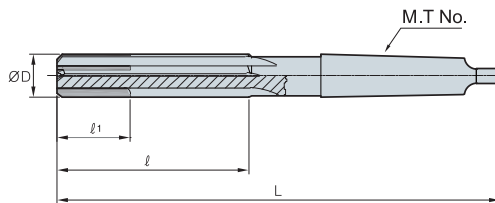


(mm)

Designation	No. of flute	ØD	ℓ	ℓ₁	L	M.T No.
TMRS 070	4	7.0	60	60	150	1
080	4	8.0	70	70	150	1
090	4	9.0	70	70	160	1
100	4	10.0	75	75	170	1
110	4	11.0	75	75	170	1
120	4	12.0	80	40	180	1
130	4	13.0	85	40	190	1
140	6	14.0	90	45	210	1
150	6	15.0	90	45	215	2
160	6	16.0	100	50	220	2
180	6	18.0	105	50	225	2
200	6	20.0	120	50	240	2
250	6	25.0	130	50	270	3
280	8	28.0	140	50	280	3
300	8	30.0	150	50	290	3



PCD Reamer


Code system

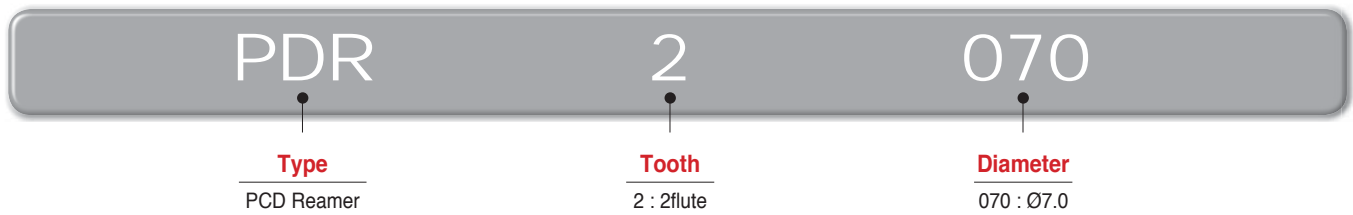

Recommended cutting condition (For high speed and high precision machining)

Workpiece	vc(m/min)	fn(mm/rev)
Aluminum alloy	50 ~ 250	0.05~0.20

PCD Reamer - PDR

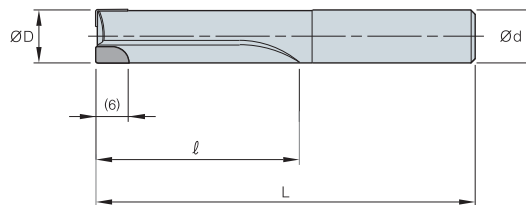


Designation		No. of flute	$\varnothing D$	$\varnothing d$	l	L
PDR	2050	2	5.0	6.0	30	65
	2060	2	6.0	6.0	40	75
	2070	2	7.0	8.0	40	75
	2080	2	8.0	8.0	40	75
	2090	2	9.0	10.0	40	85
	2100	2	10.0	10.0	40	85
	2120	2	12.0	12.0	50	95
	2140	2	14.0	16.0	50	95
	2150	2	15.0	16.0	50	100
	4160	4	16.0	16.0	50	100
	4180	4	18.0	20.0	60	110
	4200	4	20.0	20.0	60	110

Cermet Reamer *New*

- Cermet reamer realizes high performance in high hardness steel machining.
(lower performance in casting machining)
- High machinability and wear resistance extend the tool life.
- Over 30% higher productivity, surface roughness, tool life than carbide reamer

Code system

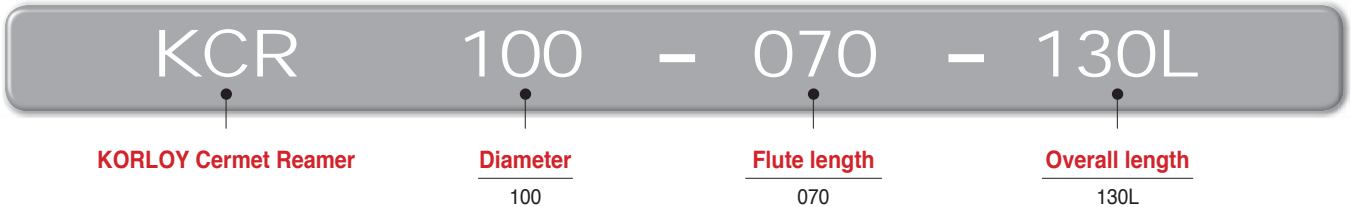

Recommended cutting condition

Workpiece	Hardness	fz(mm/t)	vc(m/min)
Carbon steel	Under 30HRC	0.1~0.4	50~80
High carbon steel, Alloy steel	30~40HRC	0.1~0.4	80~120
	40~50HRC	0.1~0.4	50~80
Alloy steel	More than 50HRC	0.05~0.2	30~60


Application example



- Cutting condition
- Workpiece : S55CR
 - Hardness : 23~30HRC
 - fn(mm/rev) : 0.4
 - vc(m/min) : 20

Cermet Reamer - KCR

Standard type

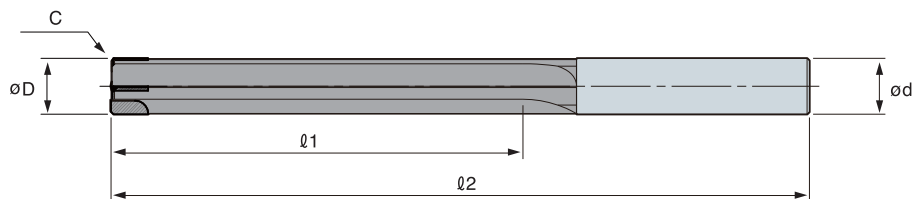


(mm)

Designation	Flute	ØD	Ød	l ₁	L
KCR 060-079-25-70L	2	6.0~7.9	8	25	70
080-099-035-90L	2	8.0~9.9	10	35	90
100-119-050-100L	4	10.0~11.9	12	50	100
120-159-060-110L	4	12.0~15.9	12	60	110
160-199-060-110L	4	16.0~19.9	16	60	110
200-259-060-110L	4	20.0~25.9	20	60	110
260-300-070-130L	4	26.0~30	25	70	130

• The length of flute and overhang length of reamer are available for quotation.
The maximum overhang length is 150mm.

Special type

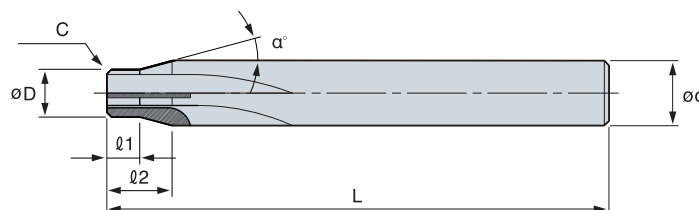


(mm)

Designation	Flute	ØD	Ød	l ₁	l ₂	L	α°
KCR □□□-□□□-□□□L	2~4	8.0~25.9	12~30	7~18	2~15	70	10°~60°

Broach Reamer *New*

- Optimal for thru hole machining with high precision with long tool life
- High helix angle (45 degree) improves machinability.
- Superior surface roughness and high precision
- Strong cutting edge and excellent chip evacuation
- Dia. $\varnothing 3.0 \sim \varnothing 25.0$

Broach Reamer - HBRE

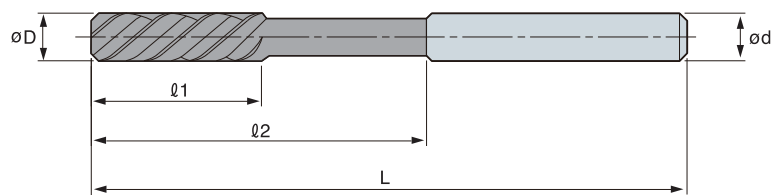

(mm)

Designation		Flute	$\varnothing D$	$\varnothing d$	l_1	l_2	L	Type
HBRE	030	3	3.0	3.0	20	40	70	Solid
	040	3	4.0	4.0	25	40	70	Solid
	060	4	6.0	6.0	30	50	80	Solid
	080	4	8.0	8.0	30	60	100	Solid
	100	4	10.0	10.0	30	60	100	Solid
	120	4	12.0	12.0	40	70	120	Top Solid
	160	6	16.0	16.0	40	80	130	Top Solid
	200	6	20.0	20.0	50	90	150	Top Solid
	250	6	25.0	25.0	50	90	150	Top Solid



BRAZED TOOLS

Technical Information for Braze Tools

- H02 KORLOY Ultra-Fine Grades : F-Series
- H02 Corrosion & Magnetism Proof Grade : IN-Series

General Cutting Tools

- H03 Cemented Carbide, Cermet Blank
- H04 Square Blank
- H06 Round bar Blank
- H06 Ring Blank
- H07 Helix Blank
- H08 Square Bits
- H09 Auto Tool Bits
- H10 Chuck Jaw

Mining & Construction Tools

- H11 Cemented Carbide Blank for Taper Bits
- H12 Cemented Carbide Blank for Cross Bits
- H12 Boring Crown Blank
- H12 Bits for Construction

Rotating Brazing Tools

- H13 Rotating Brazing Tool
- H14 Special Rotating Brazing Tools Order Form

HH

BRAZED TOOLS


KORLOY Ultra-Fine Grades "F-Series"

Features In general, when we compare cemented carbide to high speed steel, cemented carbide has higher hardness but is more brittle than high speed steel. To neutralize the difference, KORLOY has developed an ultra fine cemented carbide grade "F-Series" (WC size under $0.5\mu\text{m}$). It provides improved toughness and plastic deformation resistance against cemented carbide having coarse grain sizes. The main coverage for ultra fine cemented carbide is endmilling of difficult-to-cut materials like high temp alloys.


Micro Structure of "F-Series"



FA1
Since it is a grade focused on toughness, it is possible to make endmill, side cutter, gun drill, reamer etc. It has superior quality on toughness and anti built-up edge properties.

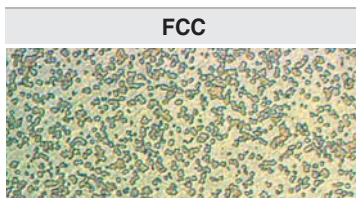


FCC
It has been modified from FA1 to increase thermal shock resistance, thus FCC has proper properties to machine stainless steel and hard to machine materials at medium to high speed milling.

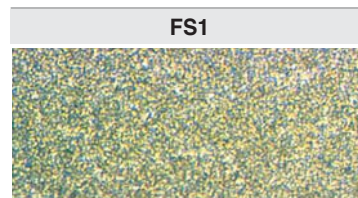


FS1
As a ultra fine grade having high hardness and superior toughness at the same time, it is the 1st recommended grade of KORLOY to make sharp cutting edge to cut difficult-to-cut material.

Cutting Performance

Chipping Resistance



Wear resistance

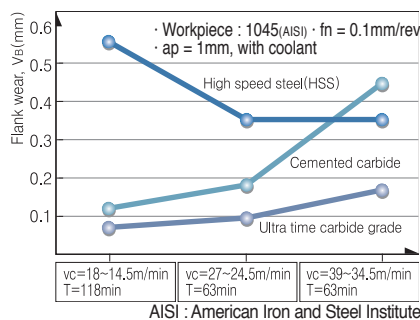

Special Features


Grade	Characteristics			ISO classification	Wear resistance	Toughness
	Specific Gravity	Hardness (HrA)	TRS (kgf/mm ²)			
FS1	14.4	92.4	250	Z10	⊙	○
FCC	12.6	91.5	250	Z10	⊙	○
FA1	14.1	91.2	300	Z20	○	⊙
FG2	14.3	92.7	350	Z10	⊙	○

Guide of Grade Selection

Workpiece	Non-ferrous metal Steel, Cast iron
1st Recommended Grade	FS1, FG2, FCC, FA1
Application tool	Drill, Endmill

Cutting condition

- Workpiece : SM55C(HrC20)
- Helix angle : 30°
- Tool : Ø10mm, 2 Flutes(SSE2100)
- RPM = 1,100min⁻¹
- Cutting speed = 35m/min
- Axial depth = 12mm
- Feed = 0.1mm/t
- Radial depth = 1mm
- Downward cutting, Without coolant

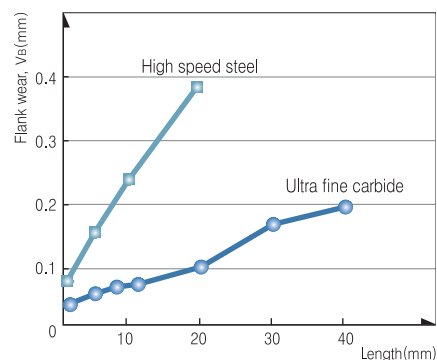

KORLOY Corrosion & Magnetism Proof Grades, "IN-Series"


Features

- Outstanding corrosion resistance : several hundred times better performance than general carbide grade. (Test have been performed at 30% NHO₃, comparing KORLOY G5 and IN-Series)
- Excellent hardness & toughness : Over (HRA) 85 hardness, Over (TRS) 200 toughness.
- Several grades : 3 different kind of grades for specific application, respectively.

Grade	Specific gravity (g/cm ³)	Hardness (HrA)	TRS (kgf/mm ²)	Magnetic saturation (Gauss-cm ³ /g)	Use
IN10	14.4	91.5	230	0	Mechanical Seal, Sliter Knife Anti-corrosive alloy, Magnetism proof alloy.
IN20	14.5	91.0	250	90	Mechanical Seal, Sliter Knife Anti-corrosive alloy.
IN40	13.5	85.5	280	0	Mold for magnetic powder. Anticorrosive-Magnetism proof alloy.


Use

For Anti-corrosive	For Magnetism proof
<ul style="list-style-type: none"> Parts for plant of corrosion-high pressure. Die / punch in high temperature. 	<ul style="list-style-type: none"> Parts for sea water pump. Mechanical seal. Tape sliter. Mold for magnetic powder. Parts for VTR.



Inserts	Designation	A	B	C	R	Uncoated								Cermet		Available blank																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
						ST10P	ST20E	A40	GR35	U2	H2	H01	G10E	CT10	CN20																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
	01- 0	10	6	3	4											31 Type 32 Type 45 Type 46 Type																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	1	13	9	3	5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	2	16	11	4	5	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
	3	19	13	5	5	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
	4	22	15	6	8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	5	25	17	7	8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	6	30	20	8	8													02- 0	10	6	3	-		●			●		●	●			41 Type 42 Type	1	13	9	3	-		●			●		●	●			2	16	11	4	-		●			●		●	●			3	19	13	5	-	●	●			●		●	●			4	22	15	6	-		●			●		●	●			5	25	17	7	-		●			●		●	●			6	30	20	8	-		●			●		●	●				03- 0	10	-	3	-											37 Type 38 Type 47 Type 48 Type	1	12	-	3	-											2	15	-	4	-											3	18	-	5	-											4	24	-	6	-											5	24	-	7	-											6	28	-	8	-												04- 0	10	6	3	4											33 Type 34 Type	1	13	9	3	5		●									2	16	11	4	5											3	19	13	5	5		●									4	22	15	6	8											5	25	17	7	8											6	30	20	8	8												05- 1	5	8	3	-		●			●						49 Type 50 Type 51 Type 52 Type	2	6	10	4	-		●			●						3	7	12	5	-		●			●						4	9	16	6	-		●									5	10	18	7	-											6	11	20	8	-																												06- 0	10	10	3	2		●			●		●	●			36 Type 39 Type 40 Type	1	13	13	3	2.5		●			●		●	●			2	16	16	4	3		●	●		●		●	●			3	19	19	5	4		●	●	●	●	●	●	●			4	22	22	6	4		●	●	●	●	●	●	●			5	25	25	7	5		●	●	●	●	●	●	●			6	30	30	8	6												07- 0	10	10	3	-											35 Type	1	13	13	3	-											2	16	16	4	-											3	19	19	5	-											4	25	20	6	-											5	25	22	7	-											6	30	25	8	-												08- 1	3	8	3	-		●			●						43 Type	3	4	13	4	-	●	●			●		●	●			4	5	15	5	-	●	●			●		●	●			5	6	17	6	-	●	●			●		●	●			6	8	20	8	-		●			●		●	●																																
	02- 0	10	6	3	-		●			●		●	●			41 Type 42 Type																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	1	13	9	3	-		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	2	16	11	4	-		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	3	19	13	5	-	●	●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	4	22	15	6	-		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	5	25	17	7	-		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	6	30	20	8	-		●			●		●	●					03- 0	10	-	3	-											37 Type 38 Type 47 Type 48 Type	1	12	-	3	-											2	15	-	4	-											3	18	-	5	-											4	24	-	6	-											5	24	-	7	-											6	28	-	8	-												04- 0	10	6	3	4											33 Type 34 Type	1	13	9	3	5		●									2	16	11	4	5											3	19	13	5	5		●									4	22	15	6	8											5	25	17	7	8											6	30	20	8	8												05- 1	5	8	3	-		●			●						49 Type 50 Type 51 Type 52 Type	2	6	10	4	-		●			●						3	7	12	5	-		●			●						4	9	16	6	-		●									5	10	18	7	-											6	11	20	8	-																												06- 0	10	10	3	2		●			●		●	●			36 Type 39 Type 40 Type	1	13	13	3	2.5		●			●		●	●			2	16	16	4	3		●	●		●		●	●			3	19	19	5	4		●	●	●	●	●	●	●			4	22	22	6	4		●	●	●	●	●	●	●			5	25	25	7	5		●	●	●	●	●	●	●			6	30	30	8	6												07- 0	10	10	3	-											35 Type	1	13	13	3	-											2	16	16	4	-											3	19	19	5	-											4	25	20	6	-											5	25	22	7	-											6	30	25	8	-												08- 1	3	8	3	-		●			●						43 Type	3	4	13	4	-	●	●			●		●	●			4	5	15	5	-	●	●			●		●	●			5	6	17	6	-	●	●			●		●	●			6	8	20	8	-		●			●		●	●																																																																																																																																											
	03- 0	10	-	3	-											37 Type 38 Type 47 Type 48 Type																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	1	12	-	3	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	2	15	-	4	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	3	18	-	5	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	4	24	-	6	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	5	24	-	7	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	6	28	-	8	-													04- 0	10	6	3	4											33 Type 34 Type	1	13	9	3	5		●									2	16	11	4	5											3	19	13	5	5		●									4	22	15	6	8											5	25	17	7	8											6	30	20	8	8												05- 1	5	8	3	-		●			●						49 Type 50 Type 51 Type 52 Type	2	6	10	4	-		●			●						3	7	12	5	-		●			●						4	9	16	6	-		●									5	10	18	7	-											6	11	20	8	-																												06- 0	10	10	3	2		●			●		●	●			36 Type 39 Type 40 Type	1	13	13	3	2.5		●			●		●	●			2	16	16	4	3		●	●		●		●	●			3	19	19	5	4		●	●	●	●	●	●	●			4	22	22	6	4		●	●	●	●	●	●	●			5	25	25	7	5		●	●	●	●	●	●	●			6	30	30	8	6												07- 0	10	10	3	-											35 Type	1	13	13	3	-											2	16	16	4	-											3	19	19	5	-											4	25	20	6	-											5	25	22	7	-											6	30	25	8	-												08- 1	3	8	3	-		●			●						43 Type	3	4	13	4	-	●	●			●		●	●			4	5	15	5	-	●	●			●		●	●			5	6	17	6	-	●	●			●		●	●			6	8	20	8	-		●			●		●	●																																																																																																																																																																																																																																																						
	04- 0	10	6	3	4											33 Type 34 Type																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	1	13	9	3	5		●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
	2	16	11	4	5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	3	19	13	5	5		●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
	4	22	15	6	8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	5	25	17	7	8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	6	30	20	8	8													05- 1	5	8	3	-		●			●						49 Type 50 Type 51 Type 52 Type	2	6	10	4	-		●			●						3	7	12	5	-		●			●						4	9	16	6	-		●									5	10	18	7	-											6	11	20	8	-																												06- 0	10	10	3	2		●			●		●	●			36 Type 39 Type 40 Type	1	13	13	3	2.5		●			●		●	●			2	16	16	4	3		●	●		●		●	●			3	19	19	5	4		●	●	●	●	●	●	●			4	22	22	6	4		●	●	●	●	●	●	●			5	25	25	7	5		●	●	●	●	●	●	●			6	30	30	8	6												07- 0	10	10	3	-											35 Type	1	13	13	3	-											2	16	16	4	-											3	19	19	5	-											4	25	20	6	-											5	25	22	7	-											6	30	25	8	-												08- 1	3	8	3	-		●			●						43 Type	3	4	13	4	-	●	●			●		●	●			4	5	15	5	-	●	●			●		●	●			5	6	17	6	-	●	●			●		●	●			6	8	20	8	-		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																	
	05- 1	5	8	3	-		●			●						49 Type 50 Type 51 Type 52 Type																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	2	6	10	4	-		●			●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	3	7	12	5	-		●			●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	4	9	16	6	-		●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
	5	10	18	7	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	6	11	20	8	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
																			06- 0	10	10	3	2		●			●		●	●			36 Type 39 Type 40 Type	1	13	13	3	2.5		●			●		●	●			2	16	16	4	3		●	●		●		●	●			3	19	19	5	4		●	●	●	●	●	●	●			4	22	22	6	4		●	●	●	●	●	●	●			5	25	25	7	5		●	●	●	●	●	●	●			6	30	30	8	6												07- 0	10	10	3	-											35 Type	1	13	13	3	-											2	16	16	4	-											3	19	19	5	-											4	25	20	6	-											5	25	22	7	-											6	30	25	8	-												08- 1	3	8	3	-		●			●						43 Type	3	4	13	4	-	●	●			●		●	●			4	5	15	5	-	●	●			●		●	●			5	6	17	6	-	●	●			●		●	●			6	8	20	8	-		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	06- 0	10	10	3	2		●			●		●	●			36 Type 39 Type 40 Type																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	1	13	13	3	2.5		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	2	16	16	4	3		●	●		●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	3	19	19	5	4		●	●	●	●	●	●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	4	22	22	6	4		●	●	●	●	●	●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	5	25	25	7	5		●	●	●	●	●	●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	6	30	30	8	6													07- 0	10	10	3	-											35 Type	1	13	13	3	-											2	16	16	4	-											3	19	19	5	-											4	25	20	6	-											5	25	22	7	-											6	30	25	8	-												08- 1	3	8	3	-		●			●						43 Type	3	4	13	4	-	●	●			●		●	●			4	5	15	5	-	●	●			●		●	●			5	6	17	6	-	●	●			●		●	●			6	8	20	8	-		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
	07- 0	10	10	3	-											35 Type																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	1	13	13	3	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	2	16	16	4	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	3	19	19	5	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	4	25	20	6	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	5	25	22	7	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	6	30	25	8	-													08- 1	3	8	3	-		●			●						43 Type	3	4	13	4	-	●	●			●		●	●			4	5	15	5	-	●	●			●		●	●			5	6	17	6	-	●	●			●		●	●			6	8	20	8	-		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	08- 1	3	8	3	-		●			●						43 Type																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	3	4	13	4	-	●	●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	4	5	15	5	-	●	●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	5	6	17	6	-	●	●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	6	8	20	8	-		●			●		●	●																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	

RB



L		F-max
Standard	Tolerance	
~30	+1.0 - 0	0.15
31~50	+1.5 - 0	0.25
51~100	+3.0 - 0	0.30


※ Code System **RB** **15** **04** □
 Length Width Thickness

Designation	L	W	T = □										Grades
			3	4	5	6	7	8	9	10	G10E		
RB 303□	3	3											
304□	3	4											
305□	3	5											
306□	3	6											
307□	3	7											
308□	3	8											
309□	3	9											
310□	3	10											
RB 403□	4	3											
404□	4	4											
405□	4	5											
406□	4	6											
407□	4	7											
408□	4	8											
409□	4	9											
410□	4	10											
RB 503□	5	3											
504□	5	4											
505□	5	5											
506□	5	6											
507□	5	7											
508□	5	8											
509□	5	9											
510□	5	10											
RB 603□	6	3											
604□	6	4											
605□	6	5											
606□	6	6											
607□	6	7											
608□	6	8											
609□	6	9											
610□	6	10											
RB 703□	7	3											
704□	7	4											
705□	7	5											

Designation	L	W	T = □										Grades
			3	4	5	6	7	8	9	10	G10E		
RB 706□	7	6											
707□	7	7											
708□	7	8											
709□	7	9											
710□	7	10											
RB 803□	8	3											
804□	8	4											
805□	8	5											
806□	8	6											
807□	8	7											
808□	8	8											
809□	8	9											
810□	8	10											
RB 903□	9	3											
904□	9	4											
905□	9	5											
906□	9	6											
907□	9	7											
908□	9	8											
909□	9	9											
910□	9	10											
RB 1003□	10	3											
1004□	10	4											
1005□	10	5											
1006□	10	6											
1007□	10	7											
1008□	10	8											
1009□	10	9											
1010□	10	10											
RB 1504□	15	4											
1505□	15	5											
RB 2003□	20	3											
2004□	20	4											
2005□	20	5											
2006□	20	6											



RB





Standard	L		F-max
	Tolerance		
~30	+1.0	-0	0.15
31~50	+1.5	-0	0.25
51~100	+3.0	-0	0.30

※ Code System **RB** **15** **04** □
 Length Width Thickness

Designation	L	W	T = □							Grades
			3	4	5	6	7	8	9	
RB 2007□	20	7								
RB 2008□	20	8								
RB 2009□	20	9								
RB 2010□	20	10								
RB 3003□	30	3								
RB 3004□	30	4								
RB 3005□	30	5								
RB 3006□	30	6								
RB 3007□	30	7								
RB 3008□	30	8								
RB 3009□	30	9								
RB 3010□	30	10								
RB 4003□	40	3								
RB 4004□	40	4								
RB 4005□	40	5								
RB 4006□	40	6								
RB 4007□	40	7								
RB 4008□	40	8								
RB 4009□	40	9								
RB 4010□	40	10								
RB 5003□	50	3								
RB 5004□	50	4								
RB 5005□	50	5								
RB 5006□	50	6								
RB 5007□	50	7								
RB 5008□	50	8								
RB 5009□	50	9								
RB 5010□	50	10								
RB 6003□	60	3								
RB 6004□	60	4								
RB 6005□	60	5								
RB 6006□	60	6								
RB 6007□	60	7								
RB 6008□	60	8								
RB 6009□	60	9								

Designation	L	W	T = □							Grades
			3	4	5	6	7	8	9	
RB 6010□	60	10								
RB 7003□	70	3								
RB 7004□	70	4								
RB 7005□	70	5								
RB 7006□	70	6								
RB 7007□	70	7								
RB 7008□	70	8								
RB 7009□	70	9								
RB 7010□	70	10								
RB 8003□	80	3								
RB 8004□	80	4								
RB 8005□	80	5								
RB 8006□	80	6								
RB 8007□	80	7								
RB 8008□	80	8								
RB 8009□	80	9								
RB 8010□	80	10								
RB 9003□	90	3								
RB 9004□	90	4								
RB 9005□	90	5								
RB 9006□	90	6								
RB 9007□	90	7								
RB 9008□	90	8								
RB 9009□	90	9								
RB 9010□	90	10								
RB 10003□	100	3								
RB 10004□	100	4								
RB 10005□	100	5								
RB 10006□	100	6								
RB 10007□	100	7								
RB 10008□	100	8								
RB 10009□	100	9								
RB 10010□	100	10								

SR Round bars blank

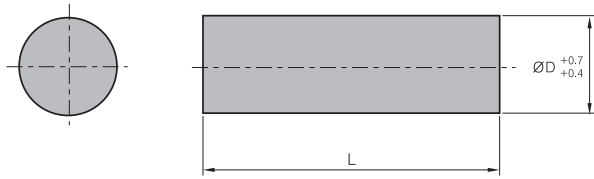


Standard	L		F-max
	Tolerance		
~30	+1.5 - 0		0.10
31~40	+1.5 - 0		0.15
41~50	+1.5 - 0		0.20
51~100	+2.5 - 0		0.25

※ Code System **SR** **03** □
 Diameter Length

Designation	ØD	T = □								Grades		(mm)
		30	40	50	60	70	80	90	100	ST20E	G10E	
		SR	03□	3								
	04□	4										
	05□	5										
	06□	6										
	07□	7										
	08□	8										
	09□	9										
	10□	10										
	11□	11										
	12□	12										


RT Ring blank

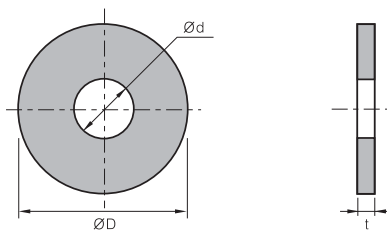

Designation	ØD	Ød	t	(mm)
ØD×Ød×t	Ø7.2~Ø200	Ø2.7~Ø150	0.8~10	



ST Helix blank

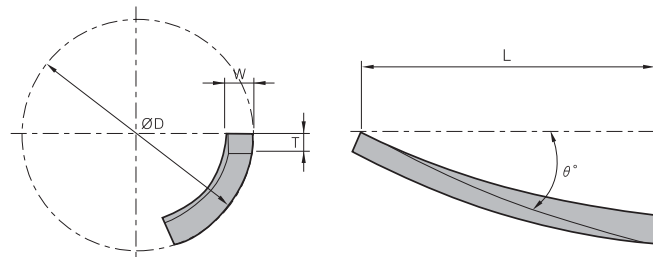

(mm)


Designation		Available Endmill (ØD)	L	T	W	θ°
ST	14	Ø13, 14	30	2.3	4.0	23° 44'
	15	Ø15	30	2.3	4.0	25° 13'
	18	Ø18	32	2.3	4.5	25° 13'
	20	Ø20	32	2.8	5.5	24° 09'
	24	Ø23, 24	37	2.8	5.5	25° 13'
	26	Ø26, 27	37	3.3	6.5	24° 24'
	30	Ø29, 30, 31	42	3.8	7.0	25° 13'
	32	Ø32, 33	47	3.8	7.0	26° 41'
	35	Ø34, 35, 36	52	3.8	7.0	24° 36'
	38	Ø37, 38	57	3.8	7.0	23° 51'
	40	Ø39, 40, 41, 42	62	4.3	7.5	24° 57'
	45	Ø43, 44, 45, 46, 47	67	4.3	7.5	25° 13'
	50	Ø48, 49, 50	67	4.3	7.5	24° 09'

H Square Bits

Feed direction	Figure	Designation	A	B	C	(R)	W	H	L	E	F	Available blank	
33Type(Right hand) / 34Type(Left hand)													
		33, 34 - 0	10	6	3	0.3	10	10	80	0		04-0	
		1	13	9	3	0.5	13	13	100	4			04-1
		2	16	11	4	0.5	16	16	120	4			04-2
		3	19	13	5	0.5	19	19	140	5			04-3
		4	22	15	6	1	25	25	160	5			04-4
		5	25	17	7	1	25	30	180	5			04-5
		6	30	20	8	1	35	35	200	6			04-6
35Type													
		35 - 0	10	10	3	0.3	10	10	80			07-0	
		1	13	13	3	0.5	13	13	100				07-1
		2	16	16	4	0.5	16	16	120				07-2
		3	18	19	5	0.5	19	19	140				07-3
		4	25	20	6	1	25	25	160				07-4
		5	25	22	7	1	25	30	180				07-5
		6	30	25	8	1	30	35	200				07-6
36Type													
		36 - 0	10	10	3	2	10	10	80			06-0	
		1	13	13	3	2.5	13	13	100				06-1
		2	16	16	4	3	16	16	120				06-2
		3	18	18	5	4	19	19	140				06-3
		4	22	22	6	4	25	25	160				06-4
		5	25	25	7	5	25	30	180				06-5
		6	30	30	8	6	30	35	200				06-6
39Type(Right hand) / 40Type(Left hand)													
		39, 40 - 0	10	10	3	2	10	10	80	5		06-0	
		1	13	13	3	2.5	13	13	100	7			06-1
		2	16	16	4	3	16	16	120	10			06-2
		3	19	19	5	4	19	19	140	12			06-3
		4	22	22	6	4	25	25	160	13			06-4
		5	25	25	7	5	25	30	180	15			06-5
		6	30	30	8	6	30	35	200	16			06-6
43Type													
		43 - 1	3	8	3		10	16	100		13	08-1	
		2	3	8	3		13	19	120		16		08-1
		3	4	13	4		16	22	140		20		08-3
		4	5	15	5		18	25	160		25		08-4
		5	6	17	6		22	32	180		30		08-5
		6	8	20	8		25	38	200		40		08-6
		49Type(Right hand) / 50Type(Left hand)											
		49, 50 - 1	5	8	3		13	13	100			05-1	
		2	6	10	4		16	16	120				05-2
		3	7	12	5		19	19	140				05-3
		4	9	16	6		25	25	160				05-4



PBX100

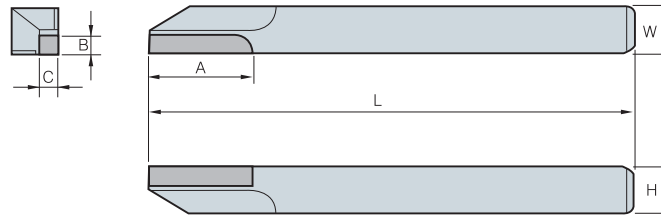


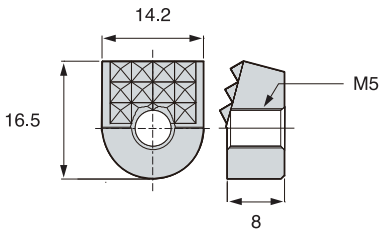





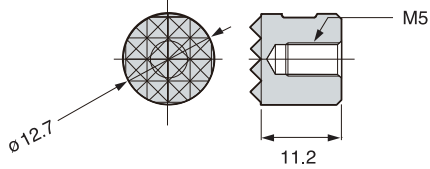




Designation		A	B	C	W	H	L
PBX -	105	20	2.0	2.0	5	5	125
	106	20	2.5	2.5	6	6	140
	107	20	3.0	3.0	7	7	150
	108	20	3.0	3.0	8	8	150
	109	20	3.5	3.5	9	9	150
	110	20	4.0	4.0	10	10	150
	112	20	4.0	4.0	12	12	150
	116	20	4.0	4.0	16	16	150

(mm)


Chuck Jaw *New*

- **Features**
- Chuck Jaw strongly clamps rough workpiece in turning and milling (including MCT)
 - Can chuck any types of workpiece

► **Stock information**

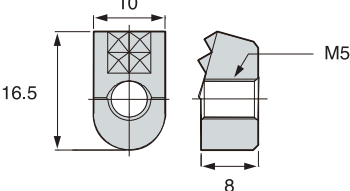Designation	Geometry	Dimension
CJ 04		
CJ 12		
CJ 21		
CJ 22		
CJ 23		
CJ 31		
CJ 32		
CJ 41		
CJ 42		

For taper bits (1000Type)

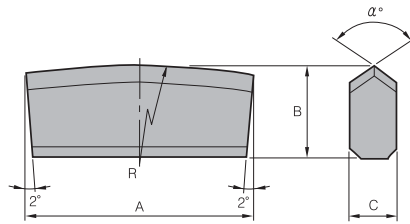


(mm)						
Designation	A	B	C	α°	R	
1000 - 124	24	10	6	100	80	
126	26	10	6	100	80	
128	28	10	6	100	80	
130	30	10	6	100	80	
132	32	10	6	100	80	
232	32	10	6	100	80	
234	34	12	8	110	120	
236	36	12	8	110	120	
238	38	12	8	110	120	
240	40	12	8	110	120	
242	42	12	8	110	120	
332	32	14	8	110	120	
334	34	14	8	110	120	
336	36	14	8	110	120	
338	38	14	8	110	120	
340	40	14	8	110	120	
342	42	14	8	110	120	
434	34	15	10	110	120	
436	36	15	10	110	120	
438	38	15	10	110	120	
440	40	15	10	110	120	
442	42	15	10	110	120	
444	44	15	10	110	120	
446	46	15	10	110	120	
534	34	18	10	110	120	
536	36	18	10	110	120	
538	38	18	10	110	120	
540	40	18	10	110	120	
542	42	18	10	110	120	
544	44	18	10	110	120	
546	46	18	10	110	120	



H Cemented Carbide Blank for Bits

For cross bits (2000Type)




(mm)

Designation	A	B	C	α°	R
2000 - 110	10	10	6	100	
111	11	10	6	100	
112	12	10	6	100	
113	13	10	6	100	
114	14	10	6	100	
115	15	12	6	100	
210	10	12	6	100	
211	11	12	6	100	
212	12	12	6	100	
213	13	12	6	100	
214	14	12	6	100	
215	15	14	8	100	
312	12	14	8	100	
313	13	14	8	100	
314	14	14	8	100	
315	15	14	8	100	
316	16	14	8	100	
317	17	14	8	100	
318	18	14	8	100	

When ordering special items, Please point out the designation, grades, quantity. Available for tailor made.


TB For taper bits

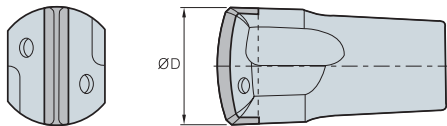

(mm)

Designation	ØD
TB 20	20
32	32
34	34
36	36
38	38
39	39
40	40

BT Boring Crown Blank

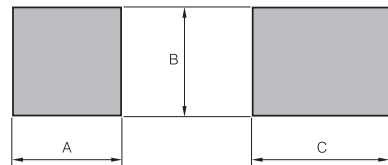

(mm)

Designation	A	B	C
BT 1	5	5	8
2	6	6	9
3	8	8	10
4	7	10	15

Bits for construction

Configuration	Dimensions	Configuration	Dimensions	Configuration	Dimensions
Earth Auger Bits		Casing Bits		Rod Bits	




Features


- ▶ For various applications
- ▶ Precise accuracy. Easy to order for special types.
- ▶ Suitable for small tools. Short delivery time.
- ▶ Reasonable tool cost. Reusable after sharpening.



Cutting Process Type

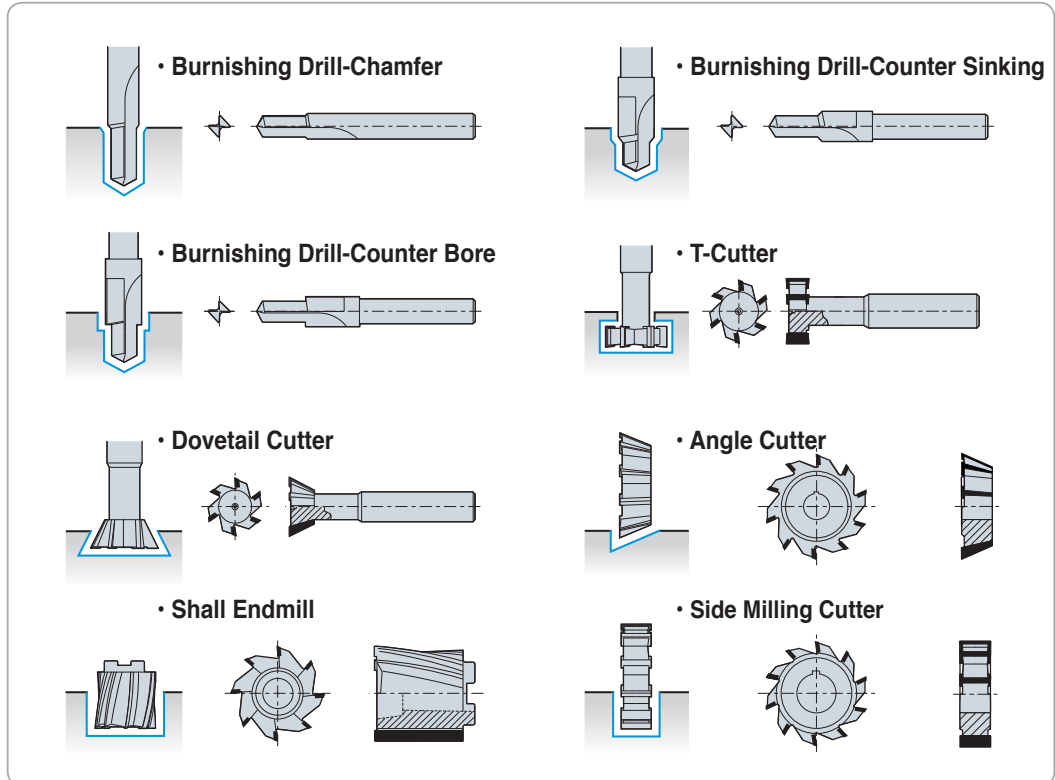


Cutting Processes and Types

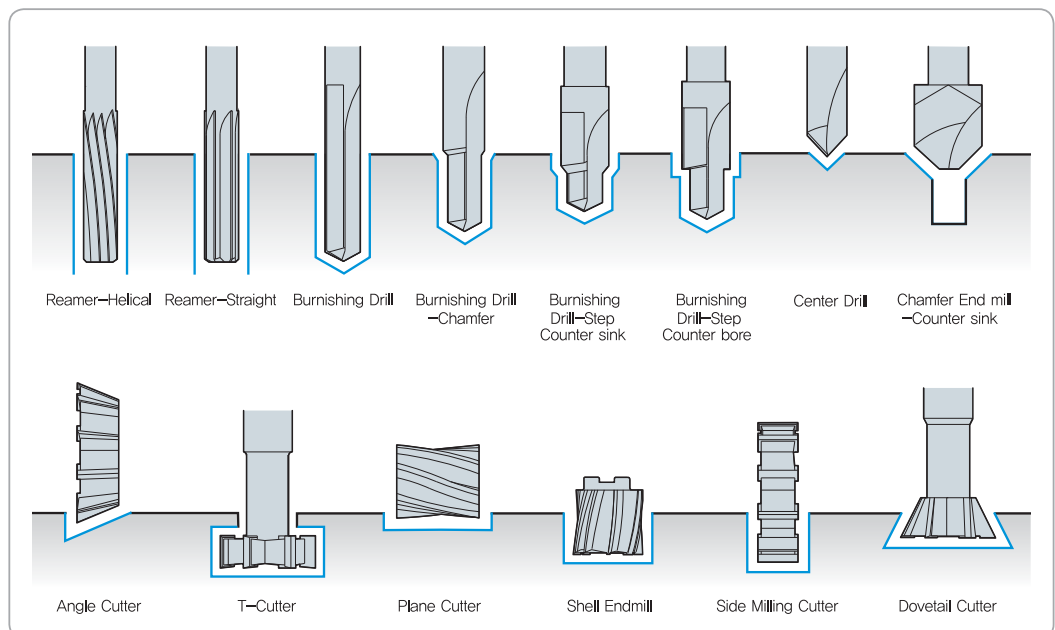

H Special Rotating Brazing Tools Order Form


Burnishing Drill-Chamfer

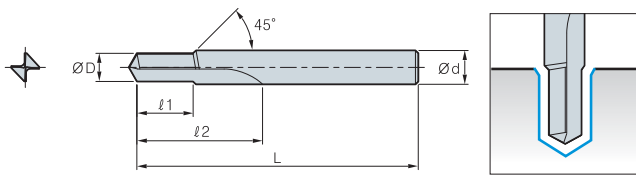

(mm)

Designation	ØD	Ød ₁	ℓ ₂	L	Ød
BDC					


Dovetail Cutter

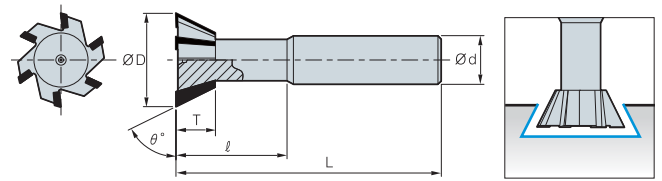

(mm)

Designation	ØD	ℓ	θ°	Ød ₁	L	Ød	No. of Flute
DC							


Burnishing Drill-Step

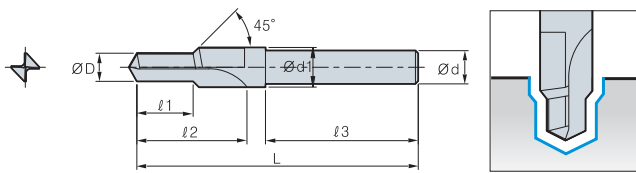

(mm)

Designation	ØD	Ød ₁	ℓ ₁	ℓ ₂	ℓ ₃	L	Ød
BDS							


Angle Cutter

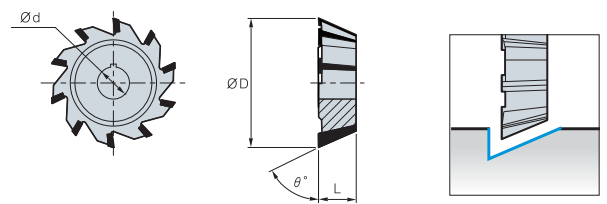

(mm)

Designation	ØD	θ°	Ød	L	No. of Flute
AC					


Burnishing Drill-Counter Bore

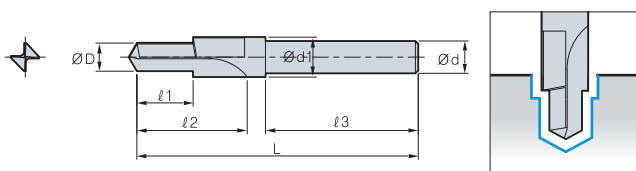

(mm)

Designation	ØD	Ød ₂	ℓ ₁	ℓ ₂	ℓ ₃	L	Ød
BDCB							


Shall Endmill

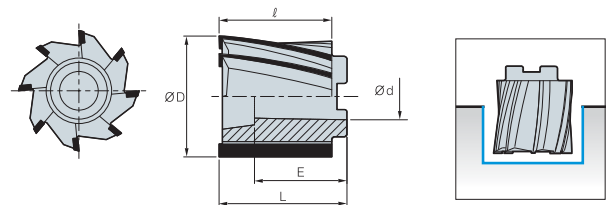

(mm)

Designation	ØD	Ød	ℓ	E	L	No. of Flute
SEM						


T-Cutter

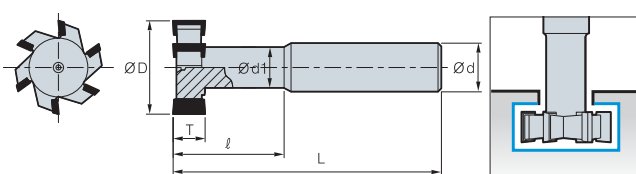

(mm)

Designation	ØD	Ød ₁	T	ℓ	L	Ød	No. of Flute
TC							

Side Milling Cutter

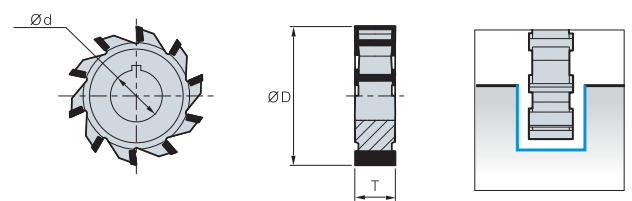

(mm)

Designation	ØD	Ød	T	No. of Flute
SMC				







TOOLING SYSTEM



Tooling System

- I 02 DBT Series
- I 03 HSK Tooling System
- I 04 Balancing System
- I 05 Tooling System Index
- I 06 DHE Series
- I 09 DSC Series
- I 17 CPM Series
- I 19 NPM Series
- I 21 DCS/DC/TC
- I 22 Collet Chuck Series
- I 23 SDC Series

Tooling System

- I 29 HPS Series
- I 31 GSK Series
- I 33 DSK Series
- I 36 GERC
- I 39 DST Series
- I 41 NPU
- I 42 DTN Series
- I 44 TCA Tap Adaptor
- I 45 TER Tap Collet
- I 46 Side Lock Arbor Series
- I 48 Face Mill Arbor Series
- I 51 Morse Taper Arbor Series

Tooling System

- I 52 Angular Head Series
- I 60 FBH Series
- I 64 TBC / FBC Series
- I 67 FBB
- I 68 DBC
- I 69 KMB
- I 70 SMB
- I 71 SMH
- I 72 Modular System
- I 73 Modular Arbor
- I 75 EXT Bar
- I 76 RDC Bar
- I 77 DAMPING PRO
- I 84 Others



TOOLING SYSTEM

For high speed machining

DBT Series


2 face constrained system of taper and shank face for excellent surface roughness and high quality finish in heavy cutting at high speed

Features of 2 face constrained system

- Stable machining can be possible at high speed
- Improvement of tool-life for machine spindle and cutting tool
- Prevention for corrosion of taper portion of both machine spindle and tool holder by heavy duty machining vibration
- Guarantee for the most suitable machining and high accuracy




BT type

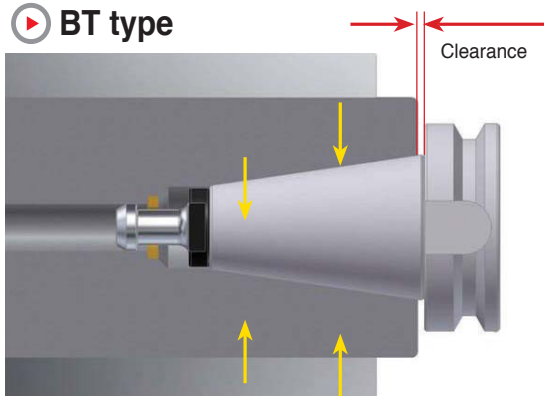

The clearance between spindle and face of shank

DBT type

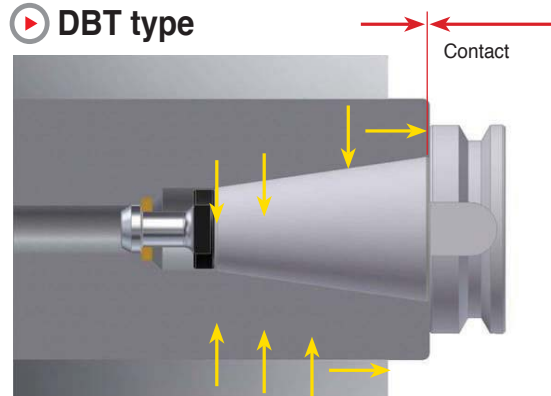


Perfect contact of both faces
Better precision / less vibration

Higher stability and precision

Stability and precision increase due to the close contact between taper face and wide external diameter of flange at DBT shank than at BT shank

Shank	Taper	Flange
BT30	Ø31.7 →	Ø46
BT40	Ø44.4 →	Ø63
BT50	Ø69.8 →	Ø100

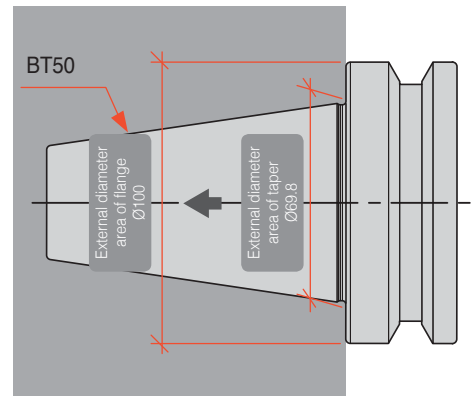

Difference between taper face contact and flange contact at its external diameter

Various models

Drilling/Endmilling		Milling		Face Milling	Angular Head
DBT-SDC	DBT-HPS	DBT-NPM	DBT-DHE	DBT-FMA	DBT-KAG




HSK Tooling System

▶ HSK 2 Face Constrained Toolholder

The 7/24 taper shank for multi-purpose has been pointed out that its performance is inappropriate in terms of repeatability, joint stiffness and high speed machining.



Drawbacks of 7/24 taper shank had been eliminated by using new two face contact.

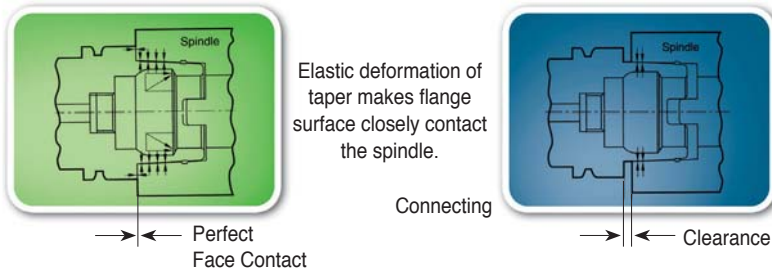


HSK shank -Perfect 2-surface constrained System

▶ Excellent Repeatability-Run out Accuracy

As taper of holder will deform elastically following the profile of the spindle shape, there is no eccentricity between the spindle and the other. Also, due to perfect face contact between flange surface of the holder and spindle face, bending strength of the holder is very high, which makes radial and axial and accuracy very high.

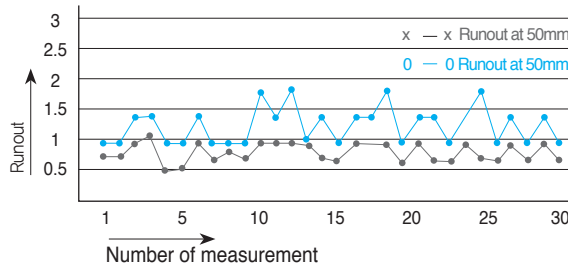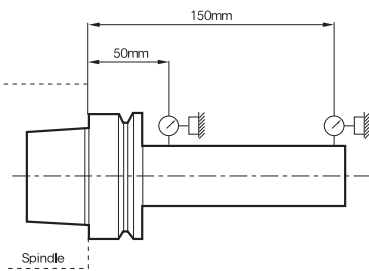


▶ High Rigidity Against Bending Load

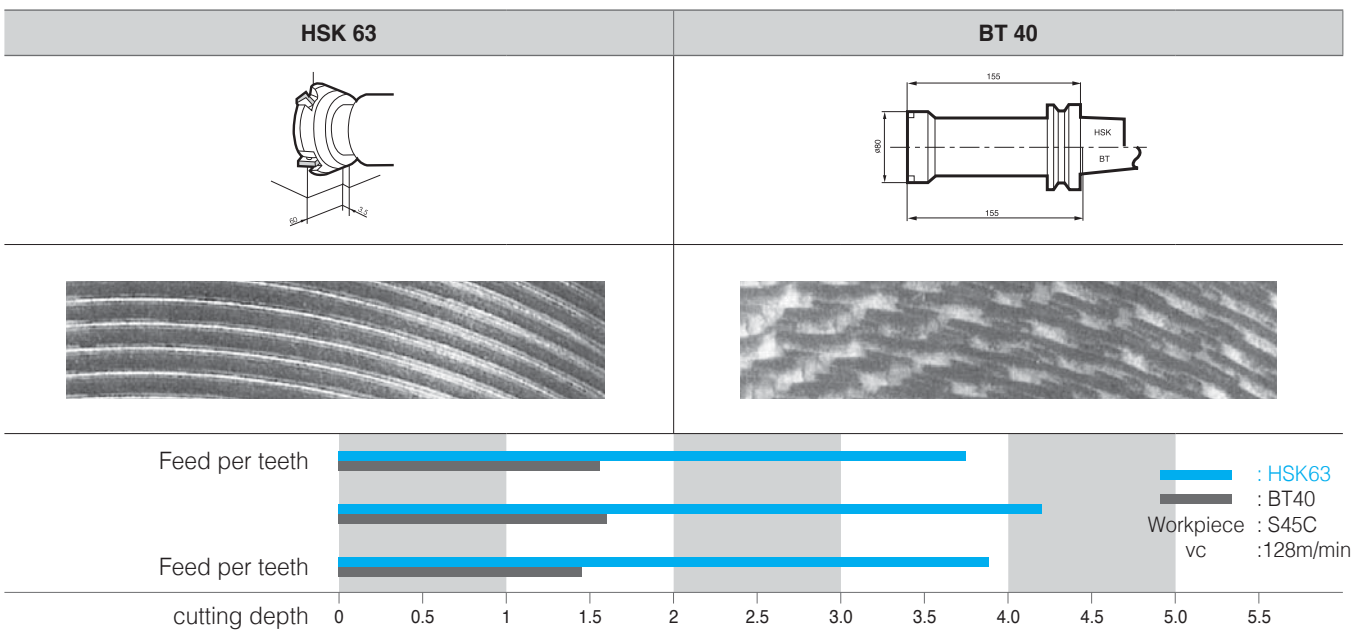

Balancing System

▶ Imbalance

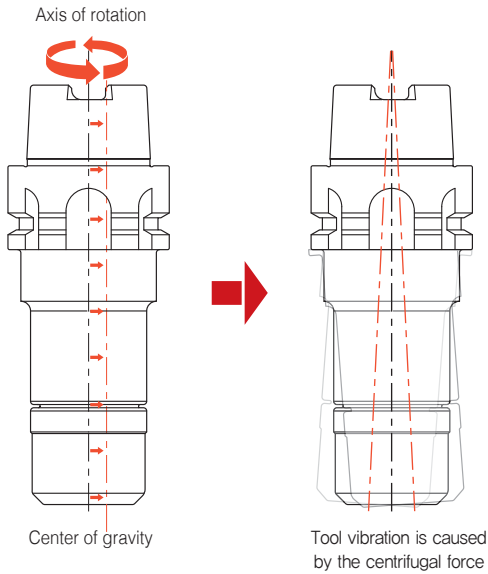


- ▶ **Cause of imbalance**
Imbalance occurs due to the asymmetry of tool geometries and spindle run-out
- ▶ **Difficulties of imbalance**
Shorter tool life, inferior surface roughness and noise are caused by vibration during rotation and damage on spindle bearing
- ▶ **Need for balancing**
Balancing is needed to prevent unbalance for better surface roughness, precision and tool life

※ A case that the tool's center of gravity deviates from the rotation axis

▶ The most optimal accuracy at high speed

1. Without bending from rotation of an unbalanced load, High accuracy and rigidity are maintained
2. Excellent Balance ($\leq G1.0$ or $0.5 \text{ g}\cdot\text{mm}/\text{kg}$)
3. Tool life, surface finish, dimension of accuracy and productivity can be realized at high speed

▶ Balancing grade standard

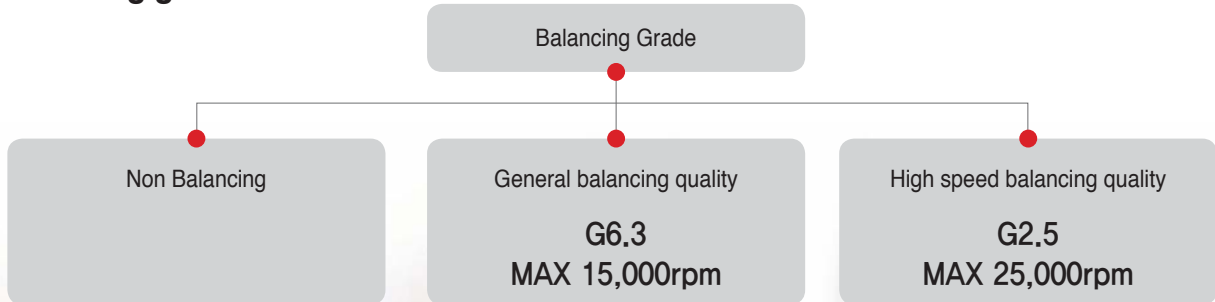

Various balancing quality available

BT, SK Shank,
HSK Shank

79.350,48
ø48 88 gmm
Whole balanced type 30.000 1/min



Hydraulic Expansion Chuck DHE  I 7	Shrinking Chuck DSC  I 10	Champion Milling Chuck CPM  I 17	Milling Chuck NPM  I 20
Collet Chuck SDC  I 24	Collet Chuck SDC/S  I 28	Collet Chuck HPS  I 29	High Speed Synchro Slim Chuck GSK  I 31
Collet Chuck DSK  I 34	High Speed Synchro Tapping Chuck DST  I 39	Drill Chuck NPU  I 41	Tap Chuck DTN  I 43
Side Lock Arbor SLA  I 46	Face Mill Arbor FMA, FMC  I 48	Morse Taper Arbor MTA  I 51	Angular Head Series MAH  I 54
Angular Head Series HRAG  I 55	Angular Head Series KHU  I 56	Angular Head Series KAG  I 57	Angular Head Series KAH  I 58
Angular Head Series KAC  I 59	Boring Tool FBHB  I 61	Boring Tool TBC, FBC  I 66	Boring Tool DBC  I 68
Boring Tool KMB  I 69	Boring Tool SMB  I 70	Boring Tool SMH  I 71	Modular System MD  I 73
Modular System Extension Bar EXT  I 75	Modular System Reducer Bar RDC  I 76	DAMPING PRO FMA/FMC FMA/FMC  I 79	

Hydraulic expansion chuck DHE Series

- Ideal for mold making and machining automobile components & precise parts due to high precision machining
- Improved surface roughness due to vibration proof by hydraulic chamber
- Reduced replacement time and tiredness of worker with the use of T wrench for removal
- Applicable shank diameter : D3-32




Code System



Features


High accuracy provides long tool life due to reduced wear and hydraulic room enhances a surface roughness by lessening vibrations.

- RUN OUT : under 5 μ m
- L = 3 x \varnothing D
- Shank : Tolerance of \varnothing D : h6



Internal sealing structure(Durability)

- Internal sealing system protects the chuck against dust, cutting oil, lubricant and chips getting into it.
- Maintaining clamping force and accuracy for a long time

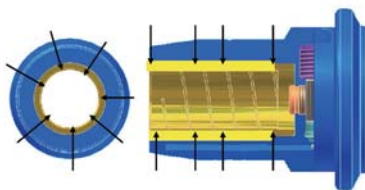

SHANK	Grade	Max.rpm
BT50, SK50, HSK100A	G6.3	10,000
BT40, SK40, HSK63A		15,000
BT30, HSK50A, SK30		20,000
HSK40A	-	25,000

With simple T-Wrench, very easy to change a tool

- Clamping structure for easy operation (Convenience)
- : Decrease of worker's fatigue
- : Improving machine capacity



Strong clamping

The clearance between holder and tool is fixed by hydraulic pressure



BT-DHE

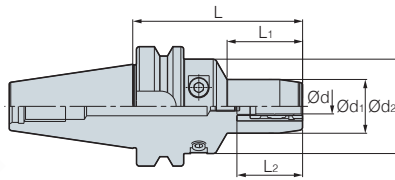


Fig. 1

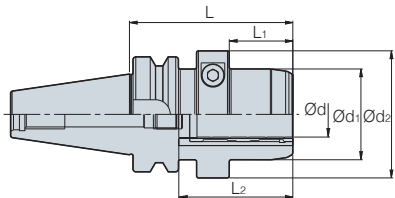


Fig. 2





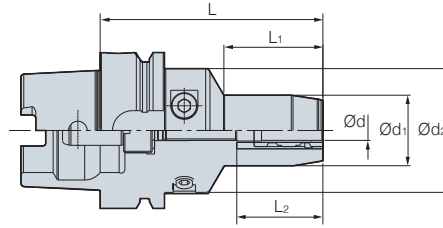
Fig. 3

(mm)


Designation	Ød	L	Ød1	Ød2	L1	L2	Screw	Fig.			
BT30 -	DHE 6 - 65	6	65	29	45	33	30~39.8	M5	1	0.7	
	DHE 8 - 65	8	65	31	45	33	30~39.8	M5	1	0.7	
	DHE 10 - 65	10	65	33	45	34	35~44.8	M10	1	0.7	
	DHE 12 - 65	12	65	35	45	34	41~50.8	M10	1	0.7	
	DHE 14 - 90	14	90	36	45	40	43~52.8	M10	1	0.9	
	DHE 16 - 90	16	90	40	45	45	46~55.8	M10	1	1.0	
	DHE 18 - 90	18	90	42	45	40	49~58.8	M10	1	1.0	
	DHE 20 - 90	20	90	44	45	45	49~58.8	M10	1	1.1	
BT40 -	DHE 6 - 90	6	90	29	50	40	30~39.8	M5	1	1.4	
	140	6	140	29	50	40	30~39.8	M5	1	2.2	
	DHE 8 - 90	8	90	31	50	40	30~39.8	M5	1	1.4	
	140	8	140	31	50	40	30~39.8	M5	1	2.2	
	DHE 10 - 90	10	90	33	50	40	35~44.8	M5	1	1.5	
	140	10	140	33	50	40	35~44.8	M5	1	2.2	
	DHE 12 - 90	12	90	35	50	40	41~50.8	M10	1	1.5	
	140	12	140	35	50	40	41~50.8	M10	1	2.3	
	DHE 14 - 90	14	90	36	50	40	43~52.8	M10	1	1.5	
	140	14	140	36	50	40	43~52.8	M10	1	2.3	
	DHE 16 - 90	16	90	40	50	45	46~55.8	M10	1	1.5	
	140	16	140	40	50	45	46~55.8	M10	1	2.3	
	DHE 18 - 90	18	90	42	50	45	49~58.8	M10	1	1.5	
	140	18	140	42	50	45	49~58.8	M10	1	2.3	
	DHE 20 - 90	20	90	44	50	47	49~58.8	M10	1	1.5	
	140	20	140	44	50	47	49~58.8	M10	1	2.3	
	DHE 25 - 90	25	90	50	70	35	58~67.8	M16	2	1.9	
	DHE 32 - 90	32	90	63	80	35	58~67.8	M16	2	2.0	
	BT50 -	DHE 6 - 90	6	90	29	50	34	30~39.8	M5	1	3.9
		140	6	140	29	50	34	30~39.8	M5	1	4.5
DHE 8 - 90		8	90	31	50	34	30~39.8	M5	1	3.9	
140		8	140	31	50	34	30~39.8	M5	1	4.5	
DHE 10 - 90		10	90	33	50	34	35~44.8	M5	1	3.9	
140		10	140	33	50	34	35~44.8	M5	1	4.5	
DHE 12 - 90		12	90	35	50	34	41~50.8	M10	1	4.0	
140		12	140	35	50	34	41~50.8	M10	1	4.6	
DHE 14 - 90		14	90	36	50	34	43~52.8	M10	1	4.0	
140		14	140	36	50	34	43~52.8	M10	1	4.6	
DHE 16 - 90		16	90	40	50	34	46~55.8	M10	1	4.1	
140		16	140	40	50	34	46~55.8	M10	1	4.7	
DHE 18 - 90		18	90	42	50	34	49~58.8	M10	1	4.1	
140		18	140	42	50	34	49~58.8	M10	1	4.7	
DHE 20 - 90		20	90	44	50	34	49~58.8	M10	1	4.2	
140		20	140	44	50	34	49~58.8	M10	1	4.7	
DHE 25 - 90		25	90	66	-	52	58~67.8	M16	3	4.7	
DHE 32 - 90		32	90	72	-	52	58~67.8	M16	3	4.8	

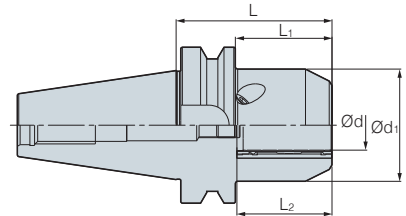

HSK-DHE




(mm)

Designation	Ød	L	Ød1	Ød2	L1	L2	Screw		
HSK63A -	DHE 6 - 75	6	75	29	50	34	30~39.8	M5	1.0
	DHE 8 - 75	8	75	31	50	34	30~39.8	M5	1.0
	DHE 10 - 85	10	85	33	50	34	35~44.8	M5	1.2
	DHE 12 - 90	12	90	35	50	40	41~50.8	M10	1.2
	DHE 16 - 95	16	95	40	50	45	46~55.8	M10	1.3
	DHE 20 - 100	20	100	44	50	50	49~58.8	M10	1.4
HSK100A -	DHE 20 - 150	20	150	44	50	50	49~58.8	M10	2.0
	DHE 20 - 105	20	105	44	50	50	49~58.8	M10	2.8
	DHE 25 - 115	25	90	50	63	62	58~67.8	M16	3.3
	DHE 32 - 115	32	90	63	75	62	58~67.8	M16	3.8


• L2 : Insertion depth of tool(Min.-max.) • Through coolant system is optional.

▶ DHC Collet (General type)

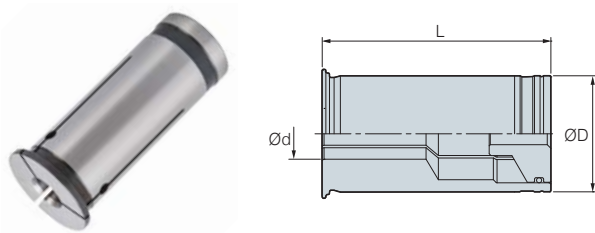




Designation	ØD	Ød	L
DHC12 - 3, 4, 5, 6, 8	12	3, 4, 5, 6, 8	47
DHC20 - 3, 4, 5, 6, 8, 10, 12, 14, 16	20	3, 4, 5, 6, 8, 10, 12, 14, 16	52
DHC32 - 6, 8, 10, 12, 14, 16, 18, 20, 25	32	6, 8, 10, 12, 14, 16, 18, 20, 25	63

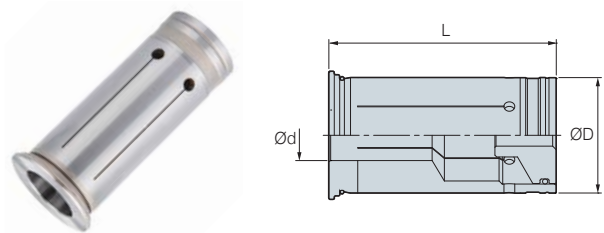▶ DHC Collet (Accuracy type)



Designation	ØD	Ød	L
DHC12 - 3(P), 4(P), 5(P), 6(P), 8(P)	12	3, 4, 5, 6, 8	47
DHC20 - 3(P), 4(P), 5(P), 6(P), 8(P), 10(P), 12(P), 14(P), 16(P)	20	3, 4, 5, 6, 8, 10, 12, 14, 16	52
DHC32 - 6(P), 8(P), 10(P), 12(P), 14(P), 16(P), 18(P), 20(P), 25(P)	32	6, 8, 10, 12, 14, 16, 18, 20, 25	63

▶ Parts

Spare Parts					
Chuck		Clamp Screw	Wrench	Chuck	Screw
Type				Type	
BT30 / SK30 / HSK50	DHE 6, 8, 10, 12	DHE-M8(C)	DHETW-4	DHE 6, 8, 10	DHE-M5 (ADJ)
BT30 / SK30 / HSK50	DHE 14, 16, 18, 20	DHE-M10(C)	DHETW-5		DHE 12, 16, 20
HSK63A / HSK100A / BT40 / BT50 / SK40 / SK50	DHE 6, 8, 10, 12, 14, 16, 18, 20			DHE-M12(C)	DHETW-6



Shrinking Chuck DSC

- Use of specially heat-treated steel
- High precision machining and clamping
- Increased precision and longer tool life due to minimized overhang when machining deep grooves
- Applicable shank diameter : D3-32




▶ Code System


BT50 - DSC		6	- S -	165	- S
Shank type	Holder type	Tool Dia.	Type	Length	Special
BT, HSK, SK, ST, CS, CM	DSC : Shrinking chuck SLK : 2piece holder Collet		S : Slim M : Middle NON : general		S : CURVE TYPE NON : general

▶ Mono Curve type

- Integral DSC with excellent precision and balancing
- Long but stable holder design

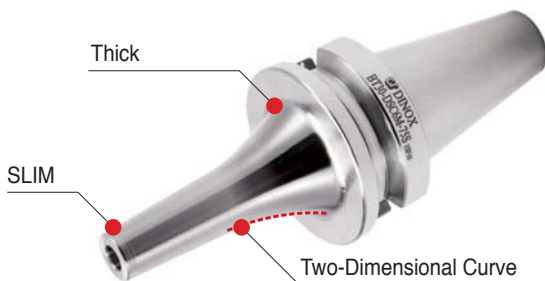

▶ High Clamping Force



- 30 % stronger Clamping Force
- Run-Out ($\leq 0.003\text{mm}$)
- Higher Power transmission Clamping Force by Inner-Size.

Shrinking chuck	Collet chuck
Fix the clearance between holder and tool by heat shrinking	Fix the tool by elasticity of collet
Thermal expansion ▶ Thermal shrinking Highly strong clamping	Elastic deformation Strong clamping


▶ Mono type

Figure	Accuracy
Slim type Middle type	


▶ 2-pieces type


Figure	Accuracy
Slim type Middle type	

BT-DSC

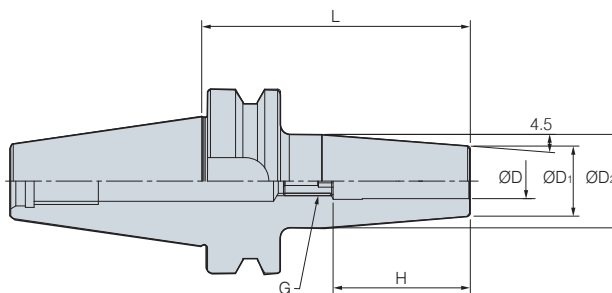

(mm)


Designation		ØD	L	ØD1	ØD2	H	G		
BT30 -	DSC3 - 60	3	60	11	18.5	82	-	0.6	
	DSC4 - 60	4	60	13	20.5	82	-	0.6	
BT40 -	DSC6 - 90	6	90	21	27	36	M5	1.2	
		120	6	120	21	27	M5	1.2	
		160	6	160	21	27	M5	1.4	
	DSC8 - 90	8	90	21	27	36	M5	1.2	
		120	8	120	21	27	M5	1.2	
		160	8	160	21	27	M5	1.4	
	DSC10 - 90	10	90	24	32	42	M8	1.2	
		120	10	120	24	32	42	M8	1.2
		160	10	160	24	32	42	M8	1.6
	DSC12 - 90	12	90	24	32	47	M8	1.2	
		120	12	120	24	32	48	M8	1.2
		160	12	160	24	32	49	M8	1.6
DSC16 - 90	16	90	27	34	50	M12	1.3		
	120	16	120	27	34	50	M12	1.3	
	160	16	160	27	34	50	M12	1.7	
DSC20 - 90	20	90	33	42	52	M12	1.3		
	120	20	120	33	42	52	M12	1.5	
	160	20	160	33	42	52	M12	2.1	

 Adjust screw I16


• Through coolant system available



BT-DSC/M Mono Curve type *New*

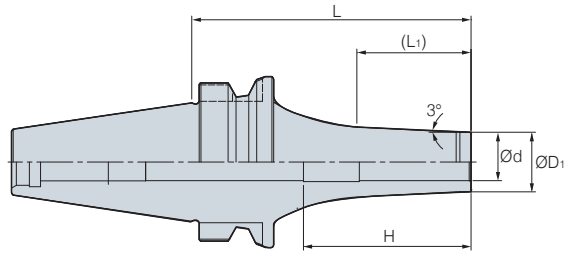


(mm)

Designation		ØD	L	L ₁	ØD ₁	ØC ₁	H	G	
BT30 -	DSC3M - 75S	3	75	29.8	8	25	97	-	0.6
	DSC4M - 75S	4	75	31.8	10	25	97	-	0.6
	DSC6M - 75S	6	75	28.9	12	30	97	-	0.6
	DSC8M - 75S	8	75	28.9	14	32	97	-	0.6
	DSC10M - 75S	10	75	30.66	16	32	45	-	0.6


• Not able to use the adjust screw • Through coolant system available




BT-DSC/M Mono type

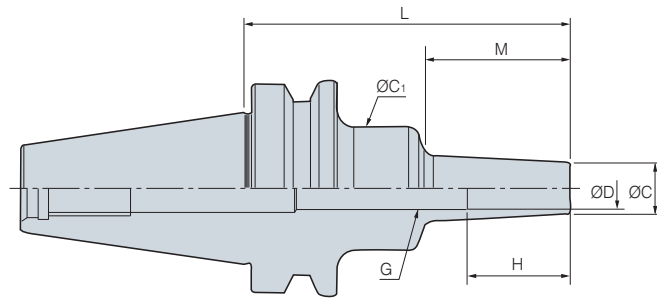

(mm)


Designation	ØD	L	ØD ₁	ØC ₁	M	H	G		
BT40 -	DSC6M - 95	6	95	10	26	42	18	M5	1.2
	120	6	120	10	26	67	18	M5	1.2
	160	6	160	10	36	97	18	M5	1.5
	DSC8M - 95	8	95	13	36	42	24	M5	1.2
	120	8	120	13	36	67	24	M5	1.2
	160	8	160	13	36	97	24	M5	1.5
	DSC10M -95	10	95	16	36	42	30	M8	1.2
	120	10	120	16	36	67	30	M8	1.2
	160	10	160	16	36	97	30	M8	1.5
	DSC12M -95	12	95	19	36	42	30	M8	1.2
	120	12	120	19	36	67	30	M8	1.2
	160	12	160	19	36	97	30	M8	1.5
DSC16M -95	16	95	24	50	42	32	M12	1.2	
120	16	120	24	50	67	32	M12	1.2	
160	16	160	24	50	97	32	M12	1.5	
DSC20M -95	20	95	29	50	42	40	M12	1.2	
120	20	120	29	50	67	40	M12	1.2	
160	20	160	29	50	97	40	M12	1.5	
BT50 -	DSC6M - 110	6	110	10	26	42	18	M5	3.5
	160	6	160	10	36	97	18	M5	4
	DSC8M - 110	8	110	13	36	42	24	M5	3.5
	160	8	160	13	36	97	24	M5	4
	DSC10M - 110	10	110	16	36	42	30	M8	3.5
	160	10	160	16	36	97	30	M8	4
	DSC12M - 110	12	110	19	36	42	30	M8	3.5
	160	12	160	19	50	97	30	M8	4
	DSC16M - 110	16	110	24	50	42	32	M12	3.5
	160	16	160	24	50	97	32	M12	4
	DSC20M - 110	20	110	29	50	42	40	M12	3.5
	160	20	160	29	50	97	40	M12	4

 Adjust screw I16

• Through coolant system available



BT-DSC/S Mono Slim type

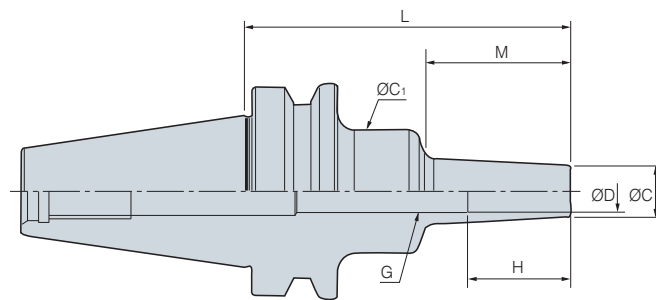


(mm)

Designation	ØD	L	ØD ₁	M	H	G	
BT30 - DSC6S -	60	60	9	20	22	18	
	80	80	9	20	42	18	
	120	120	9	25	67	18	
BT40 -	DSC6S - 95	6	95	9	26	42	18
	120	6	120	9	26	67	18
	160	6	160	9	36	97	18
	DSC8S - 95	8	95	11	36	42	24
	120	8	120	11	36	67	24
	160	8	160	11	36	97	24
	DSC10S - 95	10	95	13	36	42	30
	120	10	120	13	36	67	30
	160	10	160	13	36	97	30
	DSC12S - 95	12	95	15	36	42	30
	120	12	120	15	36	67	30
	160	12	160	15	36	97	30
BT50 -	DSC6S - 110	6	110	9	26	42	18
	160	6	160	9	36	97	18
	DSC8S - 110	8	110	11	36	42	24
	160	8	160	11	36	97	24
	DSC10S - 110	10	110	13	36	42	30
	160	10	160	13	36	97	30
	DSC12S - 110	12	110	15	36	42	30
	160	12	160	15	36	97	30

• Not able to use the adjust screw • Through coolant system available



BT-SLK 2-pieces type

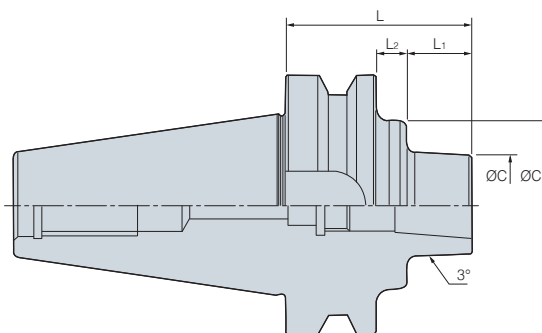

(mm)


Designation	L	ØC	L1	L2	ØC1	
BT30 - SLK12 - 35	35	38	13	-	-	
BT40 - SLK12 - 45	45	38	18	-	-	
	45F	41	18	-	-	
	75	38	48	-	-	
	75F	41	48	-	-	
	135F	135	41	108	-	-
BT50 - SLK12 - 75	75	38	25	12	65	
	75F	41	25	12	65	
	105F	105	41	55	12	65
	135F	135	41	85	12	65
	225	225	38	150	37	65
	315	315	38	150	127	90

➔ Spare Part I16

• Through coolant system available • PULL STUD BOLT is needed for BT30-SLK12-35



CS/CM 2-pieces type

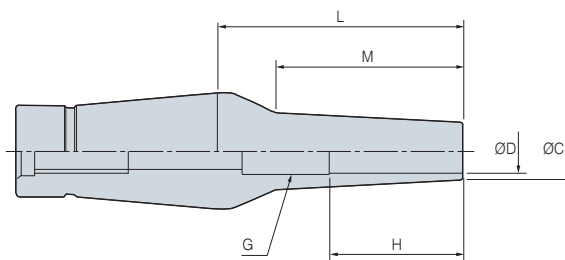

(mm)

Designation			ØD	ØC	L	M	H
CS12 -	6 -	36	6	9	35	22	18
		55	6	9	55	42	18
		80	6	9	80	67	18
		110	6	9	110	97	18
	8 -	35	8	11	35	22	24
		55	8	11	55	42	24
		80	8	11	80	67	24
		110	8	11	110	97	24
	10 -	35	10	13	35	22	30
		55	10	13	55	42	30
		80	10	13	80	67	30
		110	10	13	110	97	30
12 -	35	12	15	35	22	30	
	55	12	15	55	42	30	
	80	12	15	80	67	30	
	110	12	15	110	97	30	

• Not able to use the adjust screw • Through coolant system available

(mm)


Designation			ØD	ØC	L	M	H
CM12 -	6 -	35	6	12	35	22	18
		55	6	12	55	42	18
		80	6	12	80	67	18
	8 -	35	8	14	35	22	24
		55	8	14	55	42	24
		80	8	14	80	67	24
	10 -	35	10	16	35	22	30
		55	10	16	55	42	30
		80	10	16	80	67	30
	12 -	35	12	20	35	22	30
		55	12	20	55	42	30
		80	12	20	80	67	30

Adjust screw I16

• Through coolant system available



HSK-DSC/M Mono type

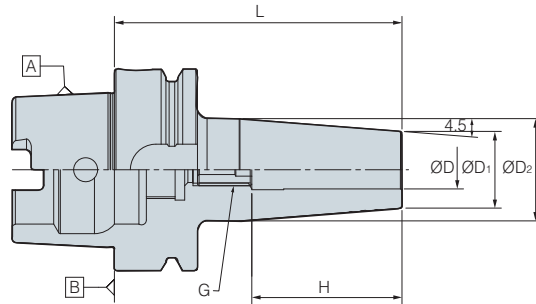


(mm)

Designation	ØD	L	ØD ₁	ØC ₁	M	H	G	
HSK63A -	DSC6M - 95	6	95	10	26	42	18	M5
	DSC8M - 95	8	95	13	36	42	24	M5
	DSC10M - 120	10	120	16	36	67	30	M8
	DSC12M - 120	12	120	19	36	67	30	M8
	DSC16M - 120	16	120	24	50	67	32	M12

• Not able to use the adjust screw • Through coolant system is optional.

HSK-DSC/S Mono type

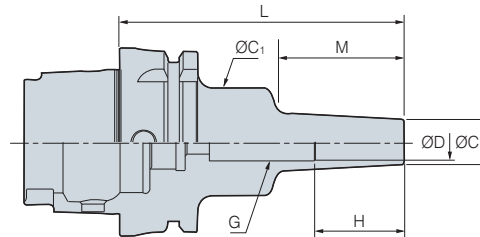


(mm)

Designation	ØD	L	ØD ₁	ØC ₁	M	H	
HSK63A -	DSC6S - 95	6	95	9	26	42	18
	120	6	120	9	26	67	18
DSC8S -	95	8	95	11	36	42	24
	160	8	160	11	36	97	24
DSC10S -	95	10	95	13	36	42	30
	160	10	160	13	36	97	30
DSC12S -	95	12	95	15	36	42	30
	160	12	160	15	36	97	30

• Not able to use the adjust screw • Through coolant system is optional.

Parts

Spare Parts										
Type	DSC6	DSC8	DSC10	DSC12	DSC14	DSC16	DSC18	DSC20	DSC25	DSC32
Screw 	M520C		M820C		M1230C					

Champion milling chuck

CPM

- Improved tool life by blocking dust and lubricant leaking with perfect sealing structure on O-ring and Nut
- Available through coolant system with CTC set
- Length regulator is inserted in CPM, user can adjust length conveniently.




▶ Code System





▶ Prevention of grease leak and dust proof

CPM has O-Ring on nuts to absorb cutting vibration for stable operation and prevents inflow of debris.

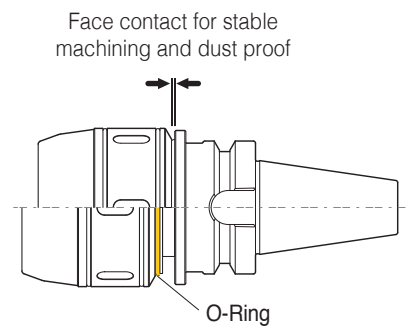


▶ Correlation of oil leaking and tool life


Obvious increase of tool life after applying dust proof system

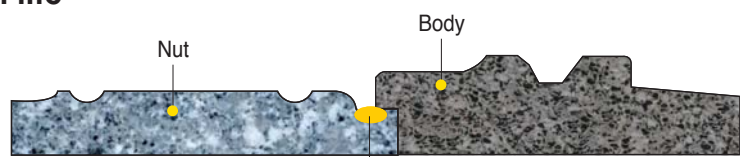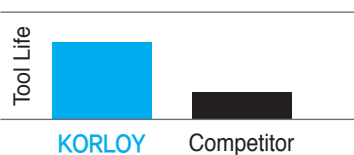


O-Ring : Blocking lubricant leakage and dust entry → Enhanced tool life




L/D=3 Runout accuracy = 15µm within

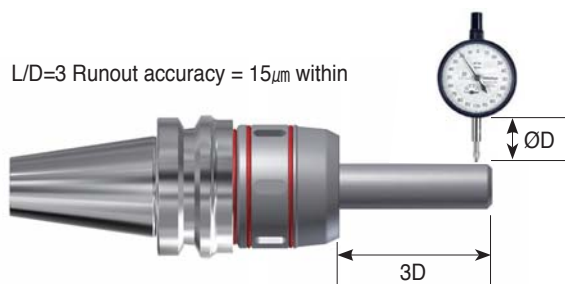

BT-CPM

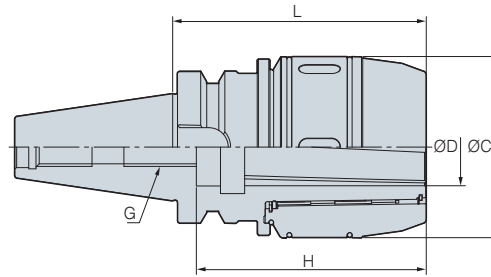

(mm)

Designation		ØD	L	ØC	H	G	Collet	
BT30 -	CPM20 - 80	20	80	54	85	M16	DC20, DSC20	1.1
BT40 -	CPM20 - 90	20	90	54	85	M16	DC20, DSC20	2.3
	CPM32 - 90	32	90	75	85	M16	DC32, DCS32	2.8
	105	32	105	75	95	M16	DC32, DCS32	2.9
BT50 -	CPM32 - 105	32	105	75	105	M24	DC32, DCS32	5.0
	135	32	135	75	105	M24	DC32, DCS32	5.8
	165	32	165	75	105	M24	DC32, DCS32	6.8

• Order-made sets available • Through coolant system is optional.



New power milling chuck

NPM


- Strong clamping over 500kgf-m(on NPM42 basis)
- DUST BLOCK functions for blocking foreign substance
- Jet coolant available
- High precision within 15 μ m at L/D=3
- Applicable shank diameter : D6-42




▶ Code System




▶ Improvement of Durability by preventing minute dust, chips and coolant

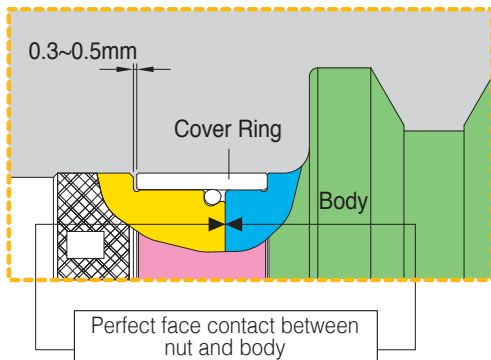

Adopted Stop Ring on Head parts
- Preventing minute dust by Shim&O-Ring

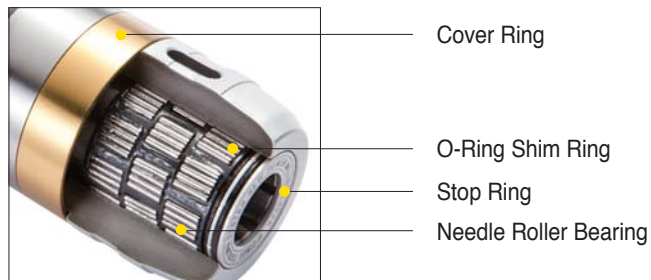


Needle Roller Bearing

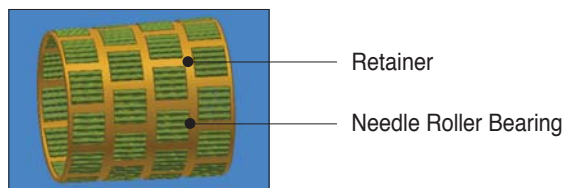

- Specially designed Steel Bearing for prevention of damage
- Strong Clamping by spreading the force

▶ Stable machining from Heavy to Fine


Perfect face contact and Powerful clamping force strengthen both Cutting force and Absorbion of vibration.

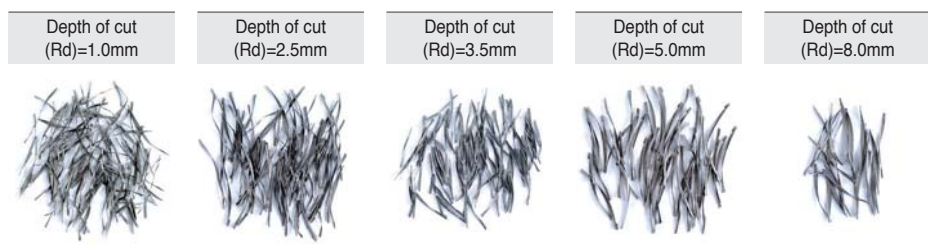


Possible machining from heavy milling to fine finishing



BT-NPM

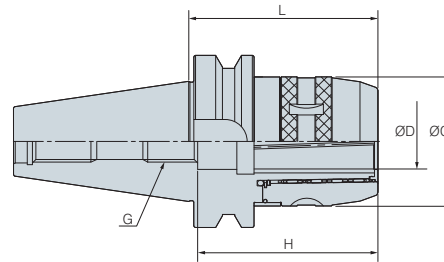

(mm)


Designation	ØD	L	ØC	H	G	Collet		
BT30 - NPM20 - 85	20	85	54	85	M16	DC20, DSC20	1.1	
BT40 -	85	20	54	85	M16	DC20, DSC20	2.3	
	100	20	54	85	M16	DC20, DSC20	2.3	
	NPM25 - 85	25	85	61	83.2	M16	DC25, DSC25	2.5
	NPM32 - 90	32	90	75	85	M16	DC32, DCS32	2.8
	110	32	110	75	95	M16	DC32, DCS32	2.9
BT50 -	135	32	75	95	M16	DC32, DCS32	3.5	
	NPM20 - 95	20	95	54	85	M24	DC20, DSC20	4.3
	125	20	125	54	85	M24	DC20, DSC20	4.8
	165	20	165	54	85	M24	DC20, DSC20	5.3
	NPM32 - 110	32	110	75	105	M24	DC32, DCS32	5.0
	135	32	135	75	105	M24	DC32, DCS32	5.8
	165	32	165	75	105	M24	DC32, DCS32	6.8
	NPM42 - 110	42	110	90	125	M24	DC42, DCS42	5.4
	135	42	135	90	125	M24	DC42, DCS42	6.6
	165	42	165	90	125	M24	DC42, DCS42	8.0

 Applicable collet I21


• Through coolant system available is optional

• In case of $L \leq 90$, chucks with over 90mm are recommended for medium cutting by short cap.

HSK-NPM

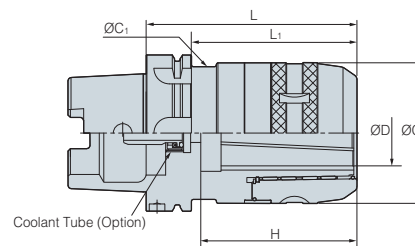




(mm)

Designation	ØD	L	L ₁	ØC	H	G	Collet		
HSK63A -	NPM20 - 100	20	85	54	85	M16	M16	DC20, DSC20	1.1
	NPM32 - 120	42	135	90	125	M24	M24	DC42, DCS42	6.6
HSK100A -	NPM32 - 130	42	165	90	125	M24	M24	DC42, DCS42	8.0

 Applicable collet I21


• Through coolant system is optional.

Parts

Division	Spare Parts		
	Option		
	Collet	Spanner	Through Coolant System
Type			
NPM20	DC20, DCS20	57-60	CTC20-20
NPM32	DC32, DCS32	75-79	CTC32-32
NPM42	DC42, DCS42	92-96	CTC42-42




DCS Straight Collet

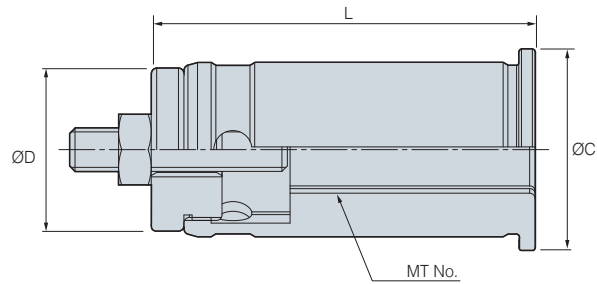

(mm)

Designation	ØD	Ød	ØC	L	kg
DCS20 - 6, 8, 10, 12, 16	20	6, 8, 10, 12, 16	26	55	0.2
DCS25 - 6, 8, 10, 12, 16, 20	25	6, 8, 10, 12, 16, 20	29	66.5	0.3
DCS32 - 6, 8, 10, 12, 14, 16, 19, 20, 25	32	6, 8, 10, 12, 14, 16, 19, 20, 25	38	70	0.4
DCS42 - 6, 8, 10, 12, 16, 20, 25, 32	42	6, 8, 10, 12, 16, 20, 25, 32	48	75	0.7


DC Straight Collet

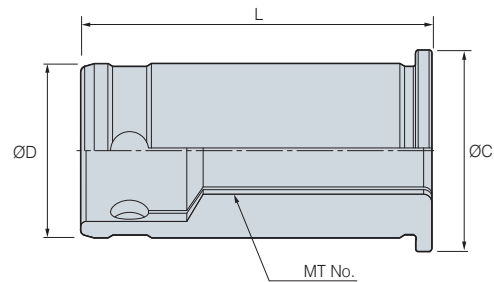

(mm)

Designation	ØD	Ød	ØC	L	kg
DC20 - 6, 8, 10, 12, 14, 16	20	6, 8, 10, 12, 14, 16	26	55	0.2
DC25 - 6, 8, 10, 12, 16, 20	25	6, 8, 10, 12, 16, 20	29	61.5	0.3
DC32 - 6, 8, 10, 12, 14, 16, 19, 20, 25	32	6, 8, 10, 12, 14, 16, 19, 20, 25	38	70	0.4
DC42 - 6, 8, 10, 12, 16, 20, 25, 32	42	6, 8, 10, 12, 16, 20, 25, 32	48	75	0.7

TC Taper Collet

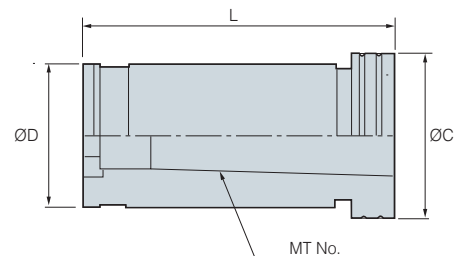

(mm)

Designation	MT No.	ØD	ØC	L
TC20 - 1	MT1	20	26	60
TC20 - 2	MT2	20	26	72
TC25 - 1	MT1	25	32	60
TC25 - 2	MT2	25	32	72
TC32 - 1	MT1	32	38	60
TC32 - 2	MT2	32	38	72

Designation	MT No.	ØD	ØC	L
TC32 - 3	MT3	32	38	90
TC42 - 1	MT1	42	48	60
TC42 - 2	MT2	42	48	72
TC42 - 3	MT3	42	48	90
TC42 - 4	MT4	42	48	112.5



Collet Chuck Series

- High Accuracy and Powerful clamping force
- Convenient tool change
- Various models
- Chucking Diameter $\varnothing 0.5 \sim \varnothing 34.0\text{mm}$



▶ Collet Chuck Series

Collet Chuck



SDC

- Max. Chucking dia. : $\varnothing 34.0\text{mm}$
- For use of Drilling, Reaming, Endmilling and Tapping etc.

Slim Collet Chuck



SDC/S

- Max. Chucking dia. : $\varnothing 16.0\text{mm}$
- For use of Drilling, Reaming, Endmilling of narrow and deep place

High Speed Collet Chuck



HPS

- Max. Chucking dia. : $\varnothing 20.0\text{mm}$
- Balanced G6.3
- Max. Revolution : 15,000rpm

High Speed Slim Collet Chuck



GSK

- Max. Chucking dia. : $\varnothing 25.0\text{mm}$
- Balanced G2.5
- Max. Revolution : 25,000rpm

High Precision Collet

- Accuracy type : $5\mu\text{m}$ (GER-B)
- High accuracy type : $2\mu\text{m}$ (GER-HP)
- Through Coolant type



- Accuracy type
- High accuracy type



- Through Coolant type



Collet chuck SDC

- ER collet chuck, standard type for general machining
- Applicable shank diameter : D0.5~34

▶ First-class nut (SWISS Made⁺)



Easy clamping of collets

Special hardening treatment




SDC
(For low speed machining)



High speed collet chuck HPS

- Available for machining at max.15,000RPM and balancing of G6.3
- ER collet chuck proper for high speed machining with its use of Swiss made sleeve nut and balancing
- Applicable shank diameter : D0.5~34

▶ First-class nut (SWISS Made⁺)

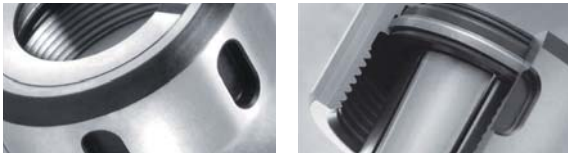

Specialized design for dust proof

Smooth sleeve bearing



HPS
(For high speed machining)

▶ Nuts can be differently used according to the purpose



Great speed slim collet chuck GSK


- Available for machining at max.25,000RPM and balancing of G2.5
- Increased productivity due to high speed machining
- Minimized tool vibration during operation by using collet 8°
- Swiss made high precision nut enhances stability by pressing collet uniformly.
- Applicable shank diameter : D0.5~34

▶ Original design

Fix on planar part

Nut ideal for high speed rotation


8° HC collet



Strong clamping by 8° collet and stable fixing with the use of planar part fixing

GSK

Chattering due to imbalance




Imbalance due to centrifugal force during high speed rotation


Competitor




BT-SDC

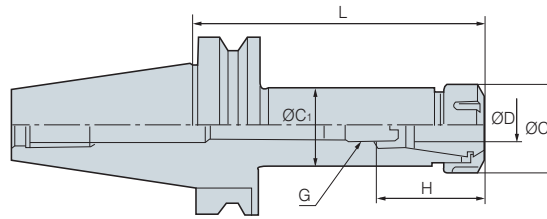

(mm)

Designation			ØD	L	H	Collet / Step	G	ØC	ØC1	
BT30 -	SDC7 -	50	1.0~7.0	50	50	GER11/0.5	M7	19	19	0.5
		75	1.0~7.0	75	75	GER11/0.5	M7	19	19	0.5
		105	1.0~7.0	105	105	GER11/0.5	M7	19	19	0.6
	SDC10 -	50	1.0~10.0	50	50	GER16/1.0	M10	28	28	0.5
		75	1.0~10.0	75	75	GER16/1.0	M10	28	28	0.5
		105	1.0~10.0	105	105	GER16/1.0	M10	28	28	0.6
	SDC13 -	50	1.0~13.0	50	50	GER20/1.0	M7	35	35	0.5
		75	1.0~13.0	75	75	GER20/1.0	M13	35	35	0.6
		105	1.0~13.0	105	105	GER20/1.0	M13	35	35	0.7
	SDC16 -	50	1.0~16.0	50	50	GER25/1.0	M7	42	42	0.6
		75	1.0~16.0	75	75	GER25/1.0	M18	42	42	0.7
		105	1.0~16.0	105	105	GER25/1.0	M18	42	42	0.8
SDC20 -	60	1.0~20.0	60	60	GER32/1.0	M7	50	44	0.5	
	90	1.0~20.0	90	90	GER32/1.0	M22	50	44	0.8	
	120	1.0~20.0	120	120	GER32/1.0	M22	50	44	1.0	
BT40 -	SDC7 -	60	1.0~7.0	60	60	GER11/0.5	M7	19	19	1.0
		90	1.0~7.0	90	90	GER11/0.5	M7	19	19	1.1
		135	1.0~7.0	135	135	GER11/0.5	M7	19	19	1.2
	SDC10 -	60	1.0~10.0	60	60	GER16/1.0	M10	28	28	1.1
		90	1.0~10.0	90	90	GER16/1.0	M10	28	28	1.2
		135	1.0~10.0	135	135	GER16/1.0	M10	28	28	1.4
	SDC13 -	60	1.0~13.0	60	60	GER20/1.0	M13	35	35	1.1
		90	1.0~13.0	90	90	GER20/1.0	M13	35	35	1.3
		120	1.0~13.0	120	120	GER20/1.0	M13	35	35	1.5
		150	1.0~13.0	150	150	GER20/1.0	M13	35	35	1.8
	SDC16 -	60	1.0~16.0	60	60	GER25/1.0	M18	42	42	1.2
		90	1.0~16.0	90	90	GER25/1.0	M18	42	42	1.4
		120	1.0~16.0	120	120	GER25/1.0	M18	42	42	1.6
	SDC20 -	60	1.0~20.0	60	60	GER32/1.0	M7	50	44	1.1
		90	1.0~20.0	90	90	GER32/1.0	M22	50	44	1.4
		120	1.0~20.0	120	120	GER32/1.0	M22	50	44	1.7
	SDC26 -	90	3.0~26.0	90	90	GER40/1.0	M28	63	54	2.4


 Spare Part 126


• Through coolant system is optional.

• Collets in the right size are recommended for oil hole type.



BT-SDC

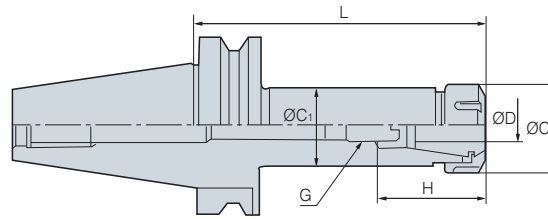


Designation		$\varnothing D$	L	H	Collet / Step	G	$\varnothing C$	$\varnothing C_1$	 (mm)
BT50 -	SDC10 - 90	1.0~10.0	90	44.5	GER16/1.0	M10	28	28	3.8
	120	1.0~10.0	120	44.5	GER16/1.0	M10	28	28	4.0
	165	1.0~10.0	165	44.5	GER16/1.0	M10	28	28	4.2
	SDC13 - 105	1.0~13.0	105	49	GER20/1.0	M13	35	35	3.9
	135	1.0~13.0	135	49	GER20/1.0	M13	35	35	4.1
	165	1.0~13.0	165	49	GER20/1.0	M13	35	35	4.5
	SDC16 - 105	1.0~16.0	105	50	GER25/1.0	M18	42	42	4.1
	165	1.0~16.0	165	50	GER25/1.0	M18	42	42	4.4
	SDC20 - 75	1.0~20.0	75	60	GER32/1.0	M7	50	44	4.0
	105	1.0~20.0	105	60	GER32/1.0	M22	50	44	4.3
	135	1.0~20.0	135	60	GER32/1.0	M22	50	44	4.9
	165	1.0~20.0	165	60	GER32/1.0	M22	50	44	5.0
SDC26 - 165	3.0~26.0	165	70	GER40/1.0	M28	63	54	6.0	

 Spare Part I26


• Through coolant system is optional. • Collets in the right size are recommended for oil hole type.




HSK-SDC

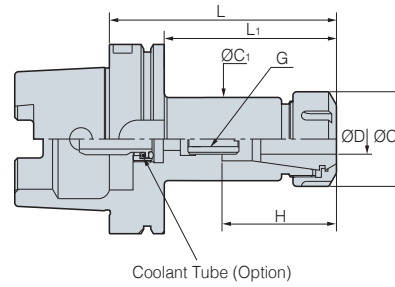




(mm)

Designation		ØD	L	H	Collet / Step	G	ØC	ØC ₁	
HSK63A -	SDC10 - 95	1.0~10.0	95	44.5	GER16/1.0	M10	28	28	1.0
	SDC13 - 95	1.0~13.0	95	49	GER20/1.0	M13	35	35	1.2
	SDC16 - 100	1.0~16.0	90	50	GER25/1.0	M18	42	42	1.3
	SDC20 - 110	1.0~20.0	110	60	GER32/1.0	M13	50	44	1.4
HSK100A -	SDC16 - 110	1.0~16.0	110	50	GER25/1.0	M18	42	42	3.2
	SDC20 - 120	2.0~20.0	120	60	GER32/1.0	M10	50	44	3.4

 Spare Part I26

• Through coolant system is optional. • Collets in the right size are recommended for oil hole type.


Parts

Division	Spare Parts					
	Basic			Option		
	Nut		Adjust screw	Spanner		(G)ER Collet
Type						
SDC7	R11	-	BN0716F	S-17	-	GER/ER 11-ØD
SDC10	R16	-	BN1025F	S-25	-	GER/ER 16-ØD
SDC13	-	RU20 - SDC13	BN1325F	-	35-38	GER/ER 20-ØD
SDC16	-	RU25 - SDC16	BN1830F	-	42-46	GER/ER 25-ØD
SDC20	-	RU32 - SDC20	BN2230F	-	48-52	GER/ER 32-ØD
SDC26	-	RU40 - SDC26	BN2838F	-	62-65	GER/ER 40-ØD
SDC34	-	RU50 - SDC34	BN3638F	-	75-79	GER/ER 50-ØD

• NOTES : In case of the RU20 nut, order a 35-38 spanner. In case of the R20 nut, a S-30 spanner.



S-SDC

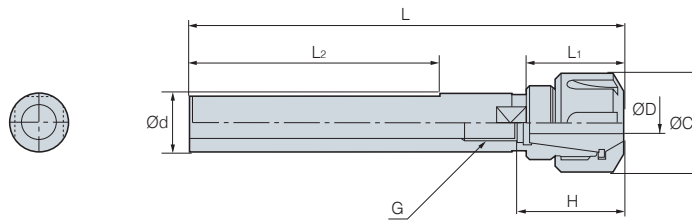


Designation		ØD	Ød	ØC	L	L1	L2	H	Collet / Step	G	(mm)
S16 -	SDC7 - 120M	1.0~7.0	16	19	120	-	-	33	GER11/0.5	M7	0.2
	120T	1.0~7.0	16	19	120	-	73	33	GER11/0.5	M7	0.2
S20 -	SDC10 - 150T	1.0~10.0	16	28	150	46.5	83	34.5	GER16/1.0	M10	0.2
	SDC10 - 150M	1.0~10.0	20	28	150	26.5	-	34.5	GER16/1.0	M10	0.3
	SDC13 - 150M	1.0~13.0	20	35	150	50	-	49	GER20/1.0	M13	0.3
	150T	1.0~13.0	20	35	150	50	83	49	GER20/1.0	M13	0.3
S25 -	SDC10 - 150M	1.0~10.0	25	28	150	-	-	34.5	GER16/1.0	M10	0.5
	150T	1.0~10.0	25	28	150	-	83	34.5	GER16/1.0	M10	0.5
	SDC13 - 150M	1.0~13.0	25	35	150	-	-	49	GER20/1.0	M13	0.5
	150T	1.0~13.0	25	35	150	-	83	49	GER20/1.0	M13	0.5
S32 -	SDC13 - 150M	1.0~13.0	32	35	150	-	-	49	GER20/1.0	M13	0.7
	150T	1.0~13.0	32	35	150	-	83	49	GER20/1.0	M13	0.7
	SDC20 - 165M	2.0~20.0	32	50	165	-	-	60	GER32/1.0	M22	0.7
	165T	2.0~20.0	32	50	165	-	83	60	GER32/1.0	M22	0.7

Spare Part I28

• Through coolant system is optional.

MT-SDC

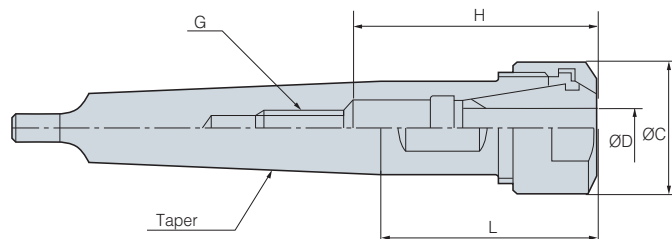



Designation		ØD	Taper	L	H	G	ØC	(mm)
MT4 -	SDC20 - 60	2.0~20.0	MT4	60	67	M22	50	1
MT5 -	SDC20 - 60	2.0~20.0	MT5	60	60	M22	60	1.6

Spare Part I28


• Through coolant system is optional. • Collets in the right size are recommended for oil hole type.
• Order made balanced type available



S-SDC/S

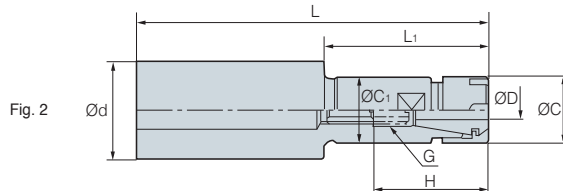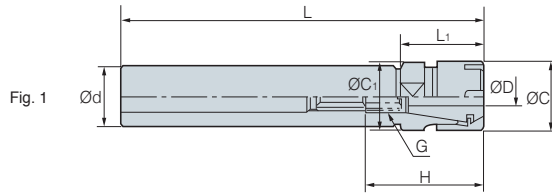



(mm)

Designation	ØD	Ød	ØC	L	L1	H	Collet/step	G		
S16 -	SDC7S - 100M	1.0~7.0	16	16	100	-	33	GER11/0.5	M7	0.2
	150M	1.0~7.0	16	16	150	-	33	GER11/0.5	M7	0.2
	SDC10S - 100M	1.0~10.0	16	22	100	50	44.5	GER16/1.0	M10	0.3
	150M	1.0~10.0	16	22	150	50	44.5	GER16/1.0	M10	0.3
S20 -	SDC7S - 100M	1.0~7.0	20	16	100	30	35	GER11/0.5	M7	0.3
	150M	1.0~7.0	20	16	150	80	35	GER11/0.5	M7	0.3
	SDC10S - 100M	1.0~10.0	20	22	100	50	44.5	GER16/1.0	M10	0.3
	150M	1.0~10.0	20	22	150	50	44.5	GER16/1.0	M10	0.3
	200M	1.0~10.0	20	22	200	50	44.5	GER16/1.0	M10	0.4
	SDC13S - 100M	1.0~13.0	20	28	100	50	49	GER20/1.0	M13	0.3
S25 -	SDC7S - 100M	1.0~7.0	25	16	100	30	33	GER11/0.5	M7	0.4
	150M	1.0~7.0	25	16	150	80	33	GER11/0.5	M7	0.4
	SDC10S - 100M	1.0~10.0	25	22	100	30	44.5	GER16/1.0	M10	0.4
	150M	1.0~10.0	25	22	150	80	44.5	GER16/1.0	M10	0.4
	SDC13S - 100M	1.0~13.0	25	28	100	-	49	GER20/1.0	M13	0.5
	150M	1.0~13.0	25	28	150	-	49	GER20/1.0	M13	0.5
	SDC16S - 100M	1.0~16.0	25	35	100	50	50	GER25/1.0	M18	0.5
	150M	1.0~16.0	25	35	150	50	50	GER25/1.0	M18	0.5
S32 -	SDC16S - 120M	1.0~16.0	32	35	120	-	50	GER25/1.0	M18	1
	150M	1.0~16.0	32	35	150	-	50	GER25/1.0	M18	1


• Through coolant system is optional.

Parts


Division	Spare Parts			
	Basic		Option	
	Nut	Adjust screw	Spanner	(G)ER Collet
Type				
SDC7S	R11M	BN0716F	M11M	(G)ER 11-ØD
SDC10S	R16M	BN1025F	M16M	(G)ER 16-ØD
SDC13S	R20M	BN1325F	M20M	(G)ER 20-ØD
SDC16S	R25M	BN1830F	M25M	(G)ER 25-ØD



BT-HPS

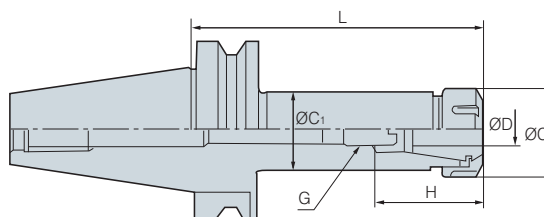

(mm)


Designation	$\varnothing D$	L	H	Collet / Step	G	$\varnothing C$	$\varnothing C_1$		MAX RPM		
BT30 -	HPS7 -	50	1.0~7.0	50	33	GER11/0.5	M7	19	19	0.5	15,000
		75	1.0~7.0	75	33	GER11/0.5	M7	19	19	0.5	15,000
		105	1.0~7.0	105	33	GER11/0.5	M7	19	19	0.6	15,000
	HPS10 -	50	1.0~10.0	50	44.5	GER16/1.0	M10	28	28	0.5	15,000
		75	1.0~10.0	75	44.5	GER16/1.0	M10	28	28	0.5	15,000
		105	1.0~10.0	105	44.5	GER16/1.0	M10	28	28	0.6	15,000
	HPS13 -	50	1.0~13.0	50	49	GER20/1.0	M7	35	35	0.5	15,000
		75	1.0~13.0	75	49	GER20/1.0	M13	35	35	0.6	15,000
		105	1.0~13.0	105	49	GER20/1.0	M13	35	35	0.7	15,000
	HPS16 -	50	1.0~16.0	50	50	GER25/1.0	M7	42	42	0.6	15,000
		75	1.0~16.0	75	50	GER25/1.0	M18	42	42	0.7	15,000
		105	1.0~16.0	105	50	GER25/1.0	M18	42	42	0.8	15,000
HPS20 -	60	1.0~20.0	60	60	GER32/1.0	M7	50	44	0.5	15,000	
	90	1.0~20.0	90	60	GER32/1.0	M22	50	44	0.8	15,000	
	120	1.0~20.0	120	60	GER32/1.0	M22	50	44	1.0	15,000	
BT40 -	HPS7 -	60	1.0~7.0	60	33	GER11/0.5	M7	19	19	1.0	10,000
		90	1.0~7.0	90	33	GER11/0.5	M7	19	19	1.1	10,000
		135	1.0~7.0	135	33	GER11/0.5	M7	19	19	1.2	10,000
	HPS10 -	60	1.0~10.0	60	44.5	GER16/1.0	M10	28	28	1.1	10,000
		90	1.0~10.0	90	44.5	GER16/1.0	M10	28	28	1.2	10,000
		135	1.0~10.0	135	44.5	GER16/1.0	M10	28	28	1.4	10,000
	HPS13 -	60	1.0~13.0	60	49	GER20/1.0	M13	35	35	1.1	10,000
		90	1.0~13.0	90	49	GER20/1.0	M13	35	35	1.3	10,000
		120	1.0~13.0	120	49	GER20/1.0	M13	35	35	1.5	10,000
		150	1.0~13.0	150	49	GER20/1.0	M13	35	35	1.8	10,000
	HPS16 -	60	1.0~16.0	60	50	GER25/1.0	M18	42	42	1.2	10,000
		90	1.0~16.0	90	50	GER25/1.0	M18	42	42	1.4	10,000
		120	1.0~16.0	120	50	GER25/1.0	M18	42	42	1.6	10,000
	HPS20 -	60	1.0~20.0	60	60	GER32/1.0	M7	50	44	1.1	10,000
		90	1.0~20.0	90	60	GER32/1.0	M22	50	44	1.4	10,000
		120	1.0~20.0	120	60	GER32/1.0	M22	50	44	1.7	10,000

 Spare Part I30


• Through coolant system is optional. • Collets in the right size are recommended for oil hole type.



BT-HPS

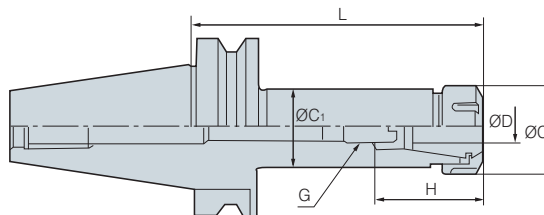





(mm)

Designation		ØD	L	H	Collet / Step	G	ØC	ØC ₁		MAX RPM
BT50 -	HPS10 - 90	1.0~10.0	90	44.5	GER16/1.0	M10	28	28	3.8	8,000
	120	1.0~10.0	120	44.5	GER16/1.0	M10	28	28	4.0	8,000
	165	1.0~10.0	165	44.5	GER16/1.0	M10	28	28	4.2	8,000
	HPS13 - 105	1.0~13.0	105	49	GER20/1.0	M13	35	35	3.9	8,000
	135	1.0~13.0	135	49	GER20/1.0	M13	35	35	4.1	8,000
	165	1.0~13.0	165	49	GER20/1.0	M13	35	35	4.5	8,000
	HPS16 - 105	1.0~16.0	105	50	GER25/1.0	M18	42	42	4.1	8,000
	165	1.0~16.0	165	50	GER25/1.0	M18	42	42	4.4	8,000
	HPS20 - 75	1.0~20.0	75	60	GER32/1.0	M7	50	44	4.0	8,000
105	1.0~20.0	105	60	GER32/1.0	M22	50	44	4.3	8,000	
165	1.0~20.0	165	60	GER32/1.0	M22	50	44	5.0	8,000	


• Through coolant system is optional. • Collets in the right size are recommended for oil hole type.


Parts

Division	Spare Parts			
	Basic		Option	
	Nut	Adjust screw	Spanner	(G)ER Collet
Type				
HPS7	RN11	BN0716F	20-22	GER 11-ØD
HPS10	RN16	BN1025F	32-35	GER 16-ØD
HPS13	RN20	BN1325F	35-38	GER 20-ØD
HPS16	RN25	BN1830F	42-46	GER 25-ØD
HPS20	RN32	BN2230F	48-52	GER 32-ØD



BT-GSK

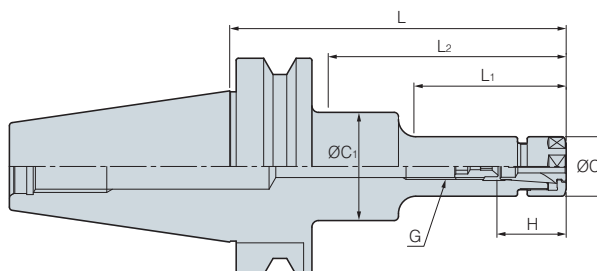


Designation		ØD	L	L ₁	L ₂	H	Collet / Step	G	ØC	ØC ₁	 kg	MAX RPM
BT30 -	GSK6 - 60	1.0~6.0	60	33	33	35	HC6/0.5	M8	19.5	19.5	0.7	25,000
	90	1.0~6.0	90	56	65	35	HC6/0.5	M8	19.5	32	0.8	25,000
	GSK10 - 60	2.0~10.0	60	35	35	50	HC10/0.5	M12	27.5	27.5	0.9	25,000
	90	2.0~10.0	90	65	65	50	HC10/0.5	M12	27.5	27.5	1.0	25,000
	GSK13 - 60	3.0~13.0	60	36	36	43	HC13/1.0	M12	33	33	0.6	25,000
	GSK16 - 60	3.0~16.0	60	37	37	60	HC16/0.5	M12	40	40	1.1	25,000
	90	3.0~16.0	90	67	67	60	HC16/0.5	M18	40	40	1.2	25,000
GSK25 - 90	16.0~25.0	90	67.5	67.5	63.5	HC25/0.5	M12	55	55	1.1	25,000	
BT40 -	GSK6 - 90	1.0~6.0	90	51	61	35	HC6/0.5	M8	19.5	32	1.1	20,000
	120	1.0~6.0	120	60	90	35	HC6/0.5	M8	19.5	32	1.4	20,000
	150	1.0~6.0	150	60	120	35	HC6/0.5	M8	19.5	25	1.5	20,000
	GSK10 - 90	2.0~6.0	90	48	60	50	HC10/0.5	M12	27.5	40	1.2	20,000
	120	2.0~6.0	120	73	90	50	HC10/0.5	M12	27.5	40	1.4	20,000
	150	2.0~6.0	150	73	118	50	HC10/0.5	M12	27.5	34.5	1.6	20,000
	GSK13 - 90	3.0~13.0	90	59	59	43	HC13/1.0	M15	33	33	1.4	20,000
	GSK16 - 90	3.0~16.0	90	58	58	60	HC16/0.5	M18	40	40	1.5	20,000
	120	3.0~16.0	120	88	88	60	HC16/0.5	M18	40	40	1.7	20,000
	150	3.0~16.0	150	118	118	60	HC16/0.5	M18	40	40	1.9	20,000
	GSK20 - 90	4.0~20.0	90	60	60	70	HC20/0.5	M22	48	48	1.6	20,000
	120	4.0~20.0	120	90	90	70	HC20/0.5	M22	48	48	2.0	20,000
	GSK25 - 90	16.0~25.0	90	61	61	75	HC25/0.5	M28	55	55	1.8	20,000
	120	16.0~25.0	120	91	91	85	HC25/0.5	M28	55	55	2.0	20,000
BT50 -	GSK6 - 105	1.0~6.0	105	55	64	35	HC6/0.5	M8	19.5	32	3.8	15,000
	135	1.0~6.0	135	60	92	35	HC6/0.5	M8	19.5	32	3.9	15,000
	165	1.0~6.0	165	60	114	35	HC6/0.5	M8	19.5	32	4.0	15,000
	GSK10 - 105	2.0~10.0	105	57	57	50	HC10/0.5	M12	27.5	27.5	3.8	15,000
	135	2.0~10.0	135	70	92	50	HC10/0.5	M12	27.5	32	4.0	15,000
	165	2.0~10.0	165	75	114	50	HC10/0.5	M12	27.5	36	4.2	15,000
	GSK13 - 135	3.0~13.0	135	92	92	43	HC13/1.0	M15	33	33	4.2	15,000
	GSK16 - 105	3.0~16.0	105	62	62	60	HC16/0.5	M18	40	40	4.1	15,000
	135	3.0~16.0	135	92	92	60	HC16/0.5	M18	40	40	4.3	15,000
	165	3.0~16.0	165	40	122	60	HC16/0.5	M18	40	50	4.5	15,000
	GSK20 - 105	4.0~20.0	105	62	62	70	HC20/0.5	M22	48	40	4.3	15,000
	135	4.0~20.0	135	92	92	70	HC20/0.5	M22	48	40	4.6	15,000
	165	4.0~20.0	165	122	122	70	HC20/0.5	M22	48	40	5.0	15,000
	GSK25 - 105	16.0~25.0	105	62	62	85	HC25/0.5	M28	55	55	4.8	15,000
135	16.0~25.0	135	92	92	85	HC25/0.5	M28	55	55	5.2	15,000	
165	16.0~25.0	165	122	122	85	HC25/0.5	M28	55	55	5.6	15,000	

 Spare Part I32

• Through coolant system is optional.
• Coolant collets are recommended when using the coolant system.



HSK-GSK

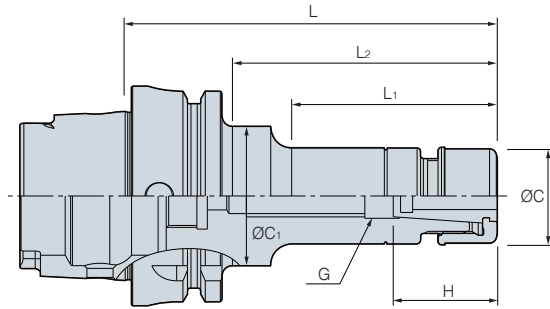


(mm)




Designation	ØD	L ₁	L ₂	H	Collet / Step	G	ØC	ØC ₁	MAX RPM	
HSK63A -	GSK6 - 100	1.0~6.0	51	61	35	HC6/0.5	M8	19.5	32	20,000
	GSK10 - 105	2.0~6.0	73	118	50	HC10/0.5	M12	27.5	34.5	20,000
	GSK16 - 120	3.0~16.0	58	58	60	HC16/0.5	M18	40	40	20,000
	GSK20 - 120	4.0~20.0	60	60	70	HC20/0.5	M22	48	48	20,000
HSK100A -	GSK6 - 120	1.0~6.0	55	64	35	HC6/0.5	M8	19.5	32	15,000
	GSK10 - 120	2.0~10.0	57	57	50	HC10/0.5	M12	27.5	27.5	15,000
	GSK16 - 140	3.0~16.0	62	62	60	HC16/0.5	M18	40	40	15,000
	GSK25 - 155	16.0~25.0	62	62	85	HC25/0.5	M28	55	55	15,000

• Through coolant system is optional. • Coolant collets are recommended when using the coolant system.

Parts

Division	Spare Parts		
	Basic		
	Nut	Adjust screw	Extractor
Type			
GSK6	GN6	M820C	GSK-6CE
GSK10	GN10	M1230C	GSK-10CE
GSK13	GN13	BN1530F	GSK-13CE
GSK16	GN16	BN1830F	GSK-16CE
GSK20	GN20	BN2230F	GSK-20CE
GSK25	GN25	BN2838F	GSK-25CE

Spanner(Optional)

Spanner	Head	Handle														
 <table border="1"> <thead> <tr> <th>Designation</th> <th>Type</th> </tr> </thead> <tbody> <tr> <td>GSK6 SPANNER</td> <td>GSK6</td> </tr> <tr> <td>GSK10 SPANNER</td> <td>GSK10</td> </tr> <tr> <td>GSK13 SPANNER</td> <td>GSK13</td> </tr> <tr> <td>GSK16 SPANNER</td> <td>GSK16</td> </tr> <tr> <td>GSK20 SPANNER</td> <td>GSK20</td> </tr> <tr> <td>GSK25 SPANNER</td> <td>GSK25</td> </tr> </tbody> </table>	Designation	Type	GSK6 SPANNER	GSK6	GSK10 SPANNER	GSK10	GSK13 SPANNER	GSK13	GSK16 SPANNER	GSK16	GSK20 SPANNER	GSK20	GSK25 SPANNER	GSK25	 <ul style="list-style-type: none"> GSKS06 GSKS10 GSKS13 GSKS16 GSKS20 GSKS25 <p>One-Way Clutch System. Replace the head to the right size.</p>	 <p>GSKS200HL</p> <p>Choose the proper length of handle to ease the effort. (In case of GSK25 : Less than 30kg)</p>
	Designation	Type														
GSK6 SPANNER	GSK6															
GSK10 SPANNER	GSK10															
GSK13 SPANNER	GSK13															
GSK16 SPANNER	GSK16															
GSK20 SPANNER	GSK20															
GSK25 SPANNER	GSK25															



Slim type collet chuck

DSK

- Balancing G6.3 available for machining at max. 15,000RPM
- Minimized tool vibration during operation by using collet 8°
- Swiss made high precision nut enhances stability
- Applicable shank diameter : D1.8~25



▶ Code System



▶ First-class nut (SWISS Made )




Easy clamping of collet




Special hardening treatment


▶ Multifunctional applications

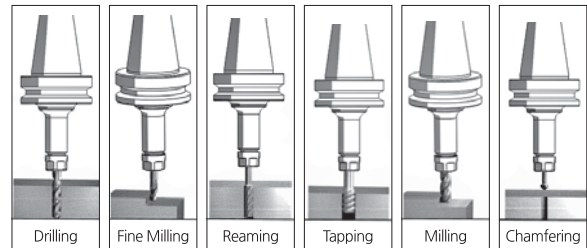

▶ Collet


Standard type & Precision type	Designation	Arbor	Max Chacking	Run-out
	HC6 - Ød	10.5	6.0	Standard type 5µm
	HC10 - Ød	15.5	10.0	
	HC13 - Ød	20.1	13.0	
	HC16 - Ød	24.6	16.0	Precision type 3µm
	HC20 - Ød	29.1	20.0	
	HC25 - Ød	35.6	25.0	


8° HC collet



Minimized tool vibration during operation


▶ Spanner

 Spanner	Designation	Chuck
	DSS - 6	DSK - 6
	DSS - 10	DSK - 10
	DSS - 16	DSK - 16
	DSS - 20	DSK - 20
	DSS - 25	DSK - 25


 Collet Extractor	Designation	Chuck
	DSS - 6	DSK - 6
	DSS - 10	DSK - 10
	DSS - 16	DSK - 16
	DSS - 20	DSK - 20
	DSS - 25	DSK - 25



BT-DSK

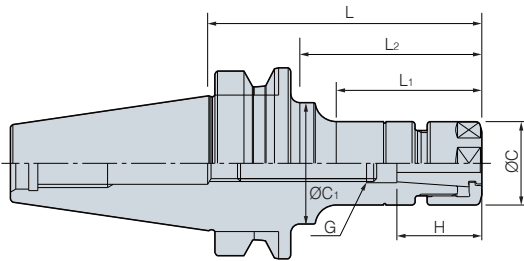

(mm)

Designation			ØD	L	L ₁	L ₂	H	Collet / Step	G	ØC	ØC ₁	 kg	MAX RPM
BT30 -	DSK6 -	60	1.0~6.0	60	33	33	35	HC6/0.5	M8	19.5	19.5	0.7	15,000
		90	1.0~6.0	90	56	65	35	HC6/0.5	M8	19.5	32	0.8	15,000
	DSK10 -	60	2.0~10.0	60	35	35	50	HC10/0.5	M12	27.5	27.5	0.9	15,000
		90	2.0~10.0	90	65	65	50	HC10/0.5	M12	27.5	27.5	1.0	15,000
	DSK13 -	60	3.0~13.0	60	36	36	43	HC13/0.5	M12	33	33	0.6	15,000
	DSK16 -	60	3.0~16.0	60	37	37	60	HC16/0.5	M12	40	40	1.1	15,000
		90	3.0~16.0	90	67	67	60	HC16/0.5	M18	40	40	1.2	15,000
DSK25 -	90	16.0~25.0	90	67.5	67.5	63.5	HC25/0.5	M12	55	55	1.1	15,000	
BT40 -	DSK6 -	90	1.0~6.0	90	51	61	35	HC6/0.5	M8	19.5	32	1.1	10,000
		120	1.0~6.0	120	60	90	35	HC6/0.5	M8	19.5	32	1.4	10,000
		150	1.0~6.0	150	60	120	35	HC6/0.5	M8	19.5	25	1.5	10,000
	DSK10 -	90	2.0~6.0	90	48	60	50	HC10/0.5	M12	27.5	40	1.2	10,000
		120	2.0~6.0	120	73	90	50	HC10/0.5	M12	27.5	40	1.4	10,000
		150	2.0~6.0	150	73	118	50	HC10/0.5	M12	27.5	34.5	1.6	10,000
	DSK13 -	90	3.0~13.0	90	59	59	43	HC13/1.0	M15	33	33	1.4	10,000
	DSK16 -	90	3.0~16.0	90	58	58	60	HC16/0.5	M18	40	40	1.5	10,000
		120	3.0~16.0	120	88	88	60	HC16/0.5	M18	40	40	1.7	10,000
		150	3.0~16.0	150	118	118	60	HC16/0.5	M18	40	40	1.9	10,000
	DSK20 -	90	4.0~20.0	90	60	60	70	HC20/0.5	M22	48	48	1.6	10,000
		120	4.0~20.0	120	90	90	70	HC20/0.5	M22	48	48	2.0	10,000
	DSK25 -	90	16.0~25.0	90	61	61	75	HC25/0.5	M28	55	55	1.8	10,000
		120	16.0~25.0	120	91	91	85	HC25/0.5	M28	55	55	2.0	10,000


 Spare Part I35

• Through coolant system is optional.

• Coolant collets are recommended when using the coolant system.



BT-DSK

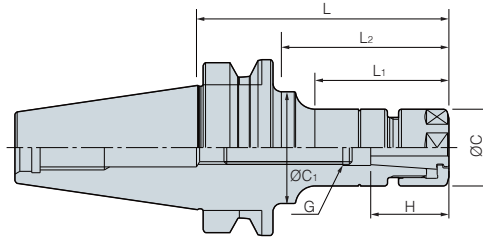

Designation		ØD	L	L ₁	L ₂	H	Collet / Step	G	ØC	ØC ₁	kg	MAX RPM
BT50 -	DSK6 - 105	1.0~6.0	105	55	64	35	HC6/0.5	M8	19.5	32	3.8	8,000
	135	1.0~6.0	135	60	92	35	HC6/0.5	M8	19.5	32	3.9	8,000
	165	1.0~6.0	165	60	114	35	HC6/0.5	M8	19.5	32	4.0	8,000
	DSK10 - 105	2.0~10.0	105	57	57	50	HC10/0.5	M12	27.5	27.5	3.8	8,000
	135	2.0~10.0	135	70	92	50	HC10/0.5	M12	27.5	32	4.0	8,000
	165	2.0~10.0	165	75	114	50	HC10/0.5	M12	27.5	36	4.2	8,000
	DSK13 - 135	3.0~13.0	135	92	92	43	HC13/1.0	M15	33	33	4.2	8,000
	DSK16 - 105	3.0~16.0	105	62	62	60	HC16/0.5	M18	40	40	4.1	8,000
	135	3.0~16.0	135	92	92	60	HC16/0.5	M18	40	40	4.3	8,000
	165	3.0~16.0	165	40	122	60	HC16/0.5	M18	40	50	4.5	8,000
	DSK20 - 105	4.0~20.0	105	62	62	70	HC20/0.5	M22	48	40	4.3	8,000
	135	4.0~20.0	135	92	92	70	HC20/0.5	M22	48	40	4.6	8,000
165	4.0~20.0	165	122	122	70	HC20/0.5	M22	48	40	5.0	8,000	
DSK25 - 105	16.0~25.0	105	62	62	85	HC25/0.5	M28	55	55	4.8	8,000	
135	16.0~25.0	135	92	92	85	HC25/0.5	M28	55	55	5.2	8,000	
165	16.0~25.0	165	122	122	85	HC25/0.5	M28	55	55	5.6	8,000	

• Through coolant system is optional. • Coolant collets are recommended when using the coolant system.

Parts

Division	Spare Parts		
	Option		
	Nut	Adjust screw	Spanner
Type			
DSK6	DN6	BN0825F	DSS-6
DSK10	DN10	BN1225F	DSS10
DSK16	DN16	BN1830F	DSS16
DSK20	DN20	BN2230F	DSS20
DSK25	DN25	BN2838F	DSS25



Technical Information for GERC


GER Collet_GER

GERC *New*

- Corrosion resistant collet to micro unit
- High tech coating for long lasting precision
- Longer tool life and higher productivity




Code System

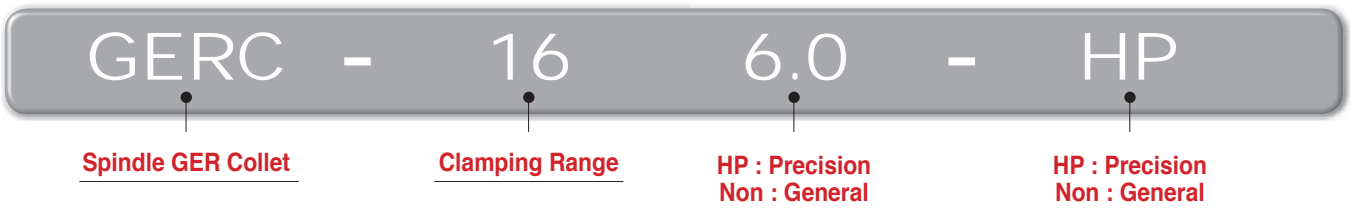

Special coating technology

Unlike GERC collets, Conventional non-coated collets have the following features :

Non-coated collets are affected by corrosion due to high humidity, cutting fluid, cleaner, salt, gas and many other factors, which in result deteriorates whole quality of machining.

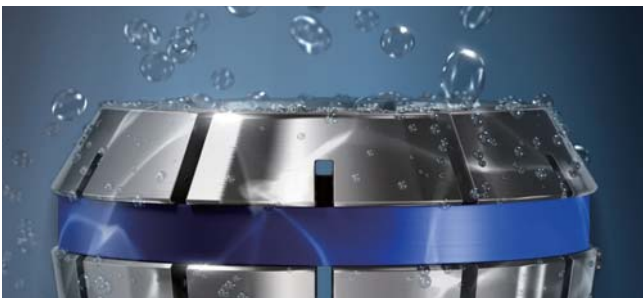

When a collet gets rusty, the tool life is shortened and precision considerably decreases. To prevent this problem, surface treatment by micro unit was applied to GERC collets for effective protection and long lasting precision




Two samples of collets after 4 months of use :
Left : Non-coated, Right : GERC collet

GERC-HP

A precision type collet chuck is expensive than standard one, but still it has more advantages in long term cost and efficiency. Using GERC-HP can minimize pricy reworking due to smaller tolerance with maximum precision.



Precision type collet 2 μ m

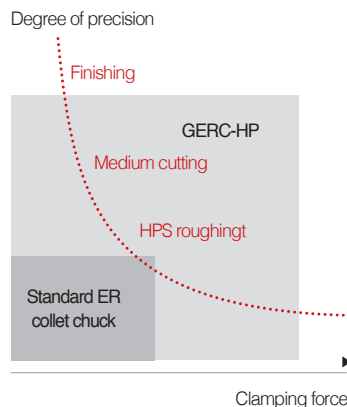


Optimized design

Remaining imbalance is minimized to ensure maximum symmetry and the nut's center is highly accurate due to double guide.




GERC Collet (Accuracy type / High Accuracy type)

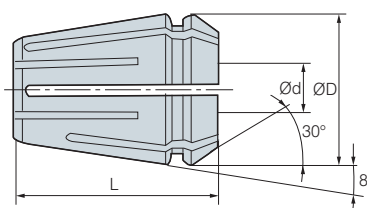

(mm)

Designation	ER Size	ØD	L	Ød (Max.)	Distance (mm)	Tolerance	
						Standard type	Precision type(HP)
GER11 - Ød(HP)	11	11.5	18.0	7.0	0.5	5 μ m	2 μ m
GER16 - Ød(HP)	16	17.0	27.5	10.0	1.0		
GER20 - Ød(HP)	20	21.0	31.5	13.0	1.0		
GER25 - Ød(HP)	25	26.0	34.0	16.0	1.0		
GER32 - Ød(HP)	32	33.0	40.0	20.0	1.0		
GER40 - Ød(HP)	40	41.0	46.0	26.0	1.0		


ER Collet (Trough coolant type)

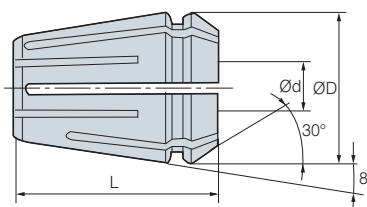

(mm)

Designation	ER Size	ØD	L	Ød (Max.)	Min. pi of water proof type	Distance (mm)	Tolerance
ER16 - Ød(C)	16	17.0	27.5	10.0	4.0	1.0	10 μ m
ER20 - Ød(C)	20	21.0	31.5	13.0	6.0	1.0	
ER25 - Ød(C)	25	26.0	34.0	16.0	6.0	1.0	
ER32 - Ød(C)	32	33.0	40.0	20.0	8.0	1.0	
ER40 - Ød(C)	40	41.0	46.0	26.0	10.0	1.0	

HC slim Collet (General & Accuracy type)

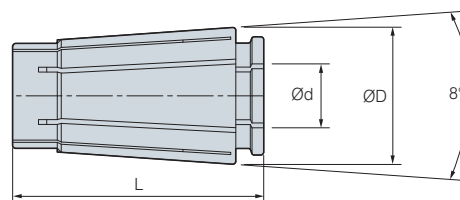

(mm)

Designation	ØD	L	Ød (Max.)	Distance (mm)	Tolerance	
					Standard type	Precision type(HP)
HC6 - Ød(P)	10.5	25.0	6.0	1.0	5 μ m	3 μ m
HC10 - Ød(P)	15.6	30.5	10.0	1.0		
HC13 - Ød(P)	20.1	39.0	13.0	1.0		
HC16 - Ød(P)	24.6	45.0	16.0	1.0		
HC20 - Ød(P)	29.2	54.3	20.0	1.0		
HC25 - Ød(P)	35.7	57.0	25.0	1.0		



GERC Collet (Accuracy type)



(mm)

Designation	Ød	Distance	Collet amount	Tolerance
GERC11 1.0 - 7.0mm / 0.5mm	1.0-7.0	0.5	13pcs	5µm
GERC16 1.0 - 10.0mm / 1.0mm	1.0-10.0	1.0	10pcs	5µm
GERC20 2.0 - 13.0mm / 1.0mm	2.0-13.0	1.0	12pcs	5µm
GERC25 2.0 - 16.0mm / 1.0mm	2.0-16.0	1.0	15pcs	5µm
GERC32 3.0 - 20.0mm / 1.0mm	3.0-20.0	1.0	18pcs	5µm
GERC40 4.0 - 26.0mm / 1.0mm	4.0-26.0	1.0	23pcs	5µm

ER Collet (General type)



(mm)

Designation	Ød	Distance	Collet amount	Tolerance
ER11(SET)	1.5-7.0	0.5	12pcs	10µm
ER16(SET)	2.0-10.0	1.0	10pcs	10µm
ER20(SET)	2.0-13.0	1.0	12pcs	10µm
ER25(SET)	2.0-16.0	1.0	15pcs	10µm
ER32(SET)	3.0-20.0	1.0	18pcs	10µm
ER40(SET)	6.0-26.0	1.0	21pcs	15µm



High speed synchro tapping chuck

DST *New*

- Tapping chuck for high speed machining
- Specially designed structure for absorbing thrust load and preventing damage on the tap
- Through coolant system available
- Applicable range : M1-M22



▶ Code System




▶ Excellent performance, precise machining

Expanded machining area





DST20
(vc=100 m/min)

Excellent cutting face

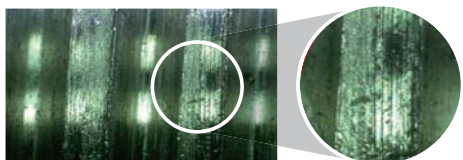



Conventional one

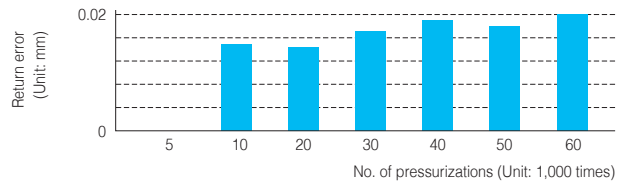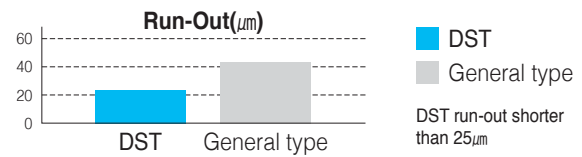

Exclusive collet for tapping

- At tapping work use of TER collet
- DST7: Use of ER11 collet

▶ Comparison of thread figures

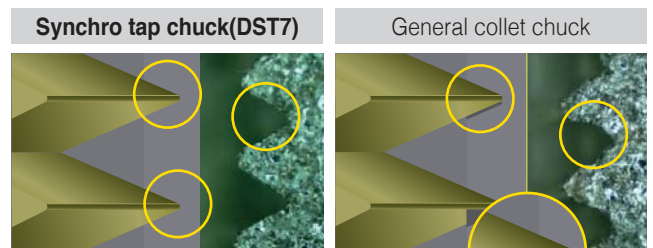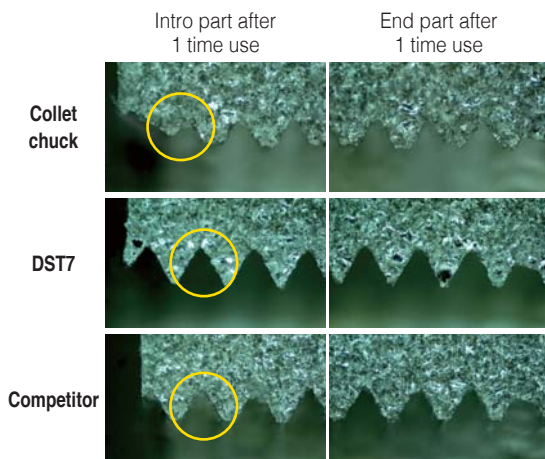


When tapping under the same cutting conditions, threads of general collet chuck seem to be damaged

The tread appears to be out of form due to synchronization error.

• Through coolant system is optional.



BT-DST

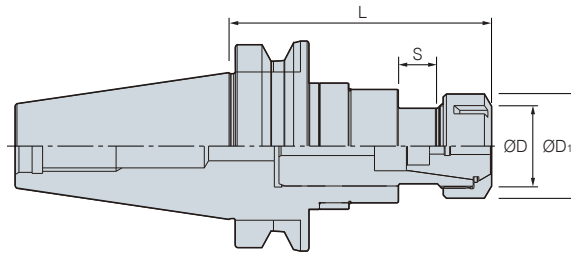


(mm)

Designation			ØD	ØD ₁	L	S	Collet	Tapping Range	F-	F+
BT30 -	DST3 -	70	26	19	70	6	ER11	M1~M3	0.5	0.5
	DST10 -	95	40.4	28	95	11	TER16	M3~M10	0.5	0.5
BT40 -	DST10 -	100	40.4	28	100	11	TER16	M3~M10	0.5	0.5
	DST22 -	110	60	49.5	110	18	TER32	M6~M22	0.7	0.7
BT50 -	DST10 -	110	60	49.5	110	11	TER16	M3~M10	0.5	0.5
	DST22 -	130	60	49.5	125	18	TER32	M6~M22	0.7	0.7

Applicable collet I37, 45

• Through coolant system is optional.

HSK-DST

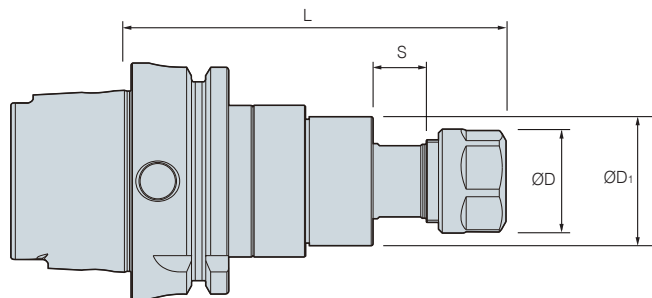

(mm)


Designation			ØD	ØD ₁	L	S	Collet	Tapping Range	F-	F+
HSK63A -	DST10 -	100	40.4	28	100	11	TER16	M3~M10	0.5	0.5
	DST22 -	130	60	49.5	130	18	TER32	M6~M22	0.7	0.7


Applicable collet I45

• Through coolant system is optional.



BT-NPU

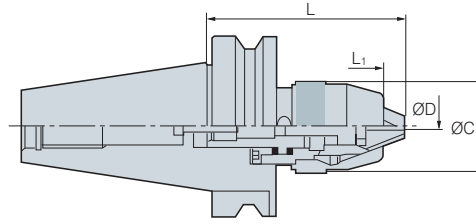




Designation		ØD (Clamping Range)	ØC	L	L ₁	
BT30 -	NPU8 - 97	0~8	38	97	8.5	0.8
	NPU13 - 125	1~13	50	125	12.5	1.5
BT40 -	NPU8 - 87	0~8	38	87	8.5	1.3
	NPU13 - 105	1~13	50	105	12.5	1.7
	NPU1a3 - 130	1~13	50	130	12.5	2.0
BT50 -	NPU13 - 115	1~13	50	115	12.5	4.4
	NPU13 - 130	1~13	50	130	12.5	4.6
	NPU13 - 190	1~13	50	190	12.5	5.4

(mm)

• Through coolant system not available

▶ Parts

Division	Spare Parts		
	Basic		Option
	Chuck	Bolt	Spanner
Type			
NPU08	NPU08	BX0820	NPU0836
NPU13	NPU13	BX0825	NPU1348



Tapping holder DTN

- Compact design and slim type
- Improvement of tapping force
- Tapping range M3 ~ M38




Code System



Easy exchange of TCA(Tap adaptor)


Convenient one-touch exchange type for high precision and longer tool life.
Contraction of length is possible by axial floating way.

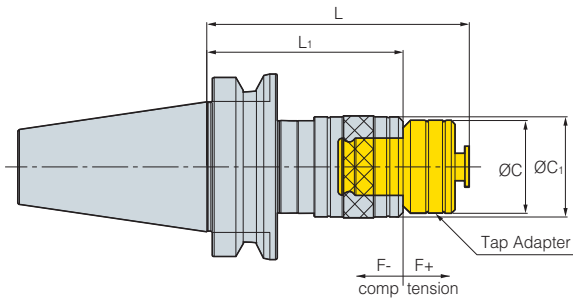


Improved cutting result



How to clamp TCA and a tap holder

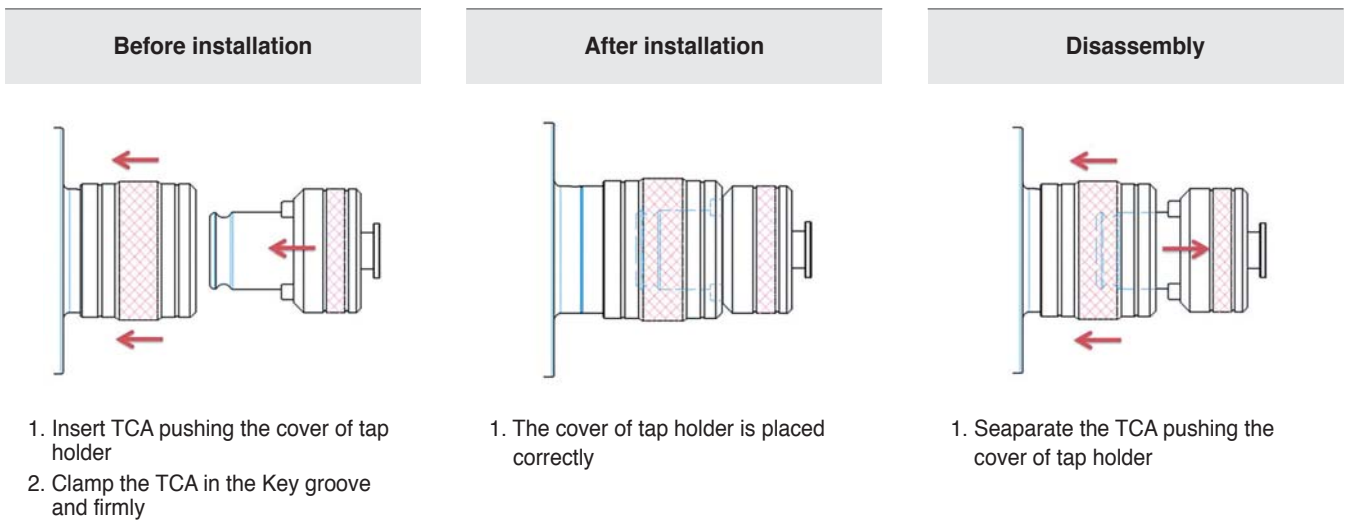

BT-DTN

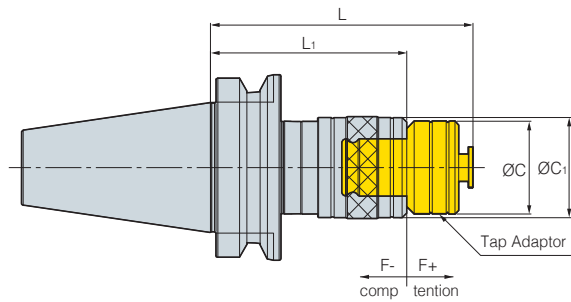


Designation		Tapping Range	L	L ₁	ØC	ØC ₁	Tap Adaptor	F-	F+	(mm)
BT30 -	DTN12 - 85	M3~M12	85	60	32	39	TCA1-M	4	10	0.7
	DTN12 - 90	M3~M12	90	65	32	39	TCA1-M	4	10	1.2
BT40 -	120	M3~M12	120	95	32	39	TCA1-M	4	10	1.4
	DTN22 - 130	M8~M22	130	96	50	56	TCA2-M	12.5	12.5	1.7
	160	M8~M22	160	126	50	56	TCA2-M	12.5	12.5	2.1
	BT50 -	DTN12 - 100	M3~M12	100	75	32	39	TCA1-M	4	10
130		M3~M12	130	105	32	39	TCA1-M	4	10	3.9
	DTN22 - 140	M8~M22	140	104	50	56	TCA2-M	12.5	12.5	4.2
	170	M8~M22	170	134	50	56	TCA2-M	12.5	12.5	4.7
	DTN38 - 185	M16~M38	185	140	72	81	TCA3-M	20	20	5.7
	215	M16~M38	215	170	72	81	TCA3-M	20	20	6.6

Tap Adapter(TCA) I44

• Through coolant system not available

S-DTN

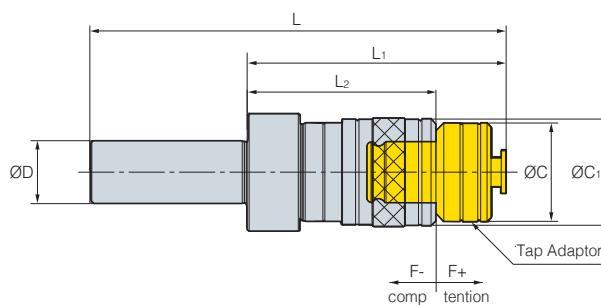


Designation		Tapping Range	ØD	L	L ₁	L ₂	ØD	ØD	F-	F+	Tap Adaptor
S32 -	DTN12 - 90	M3-M12	32	170	90	65	32	39	4	10	TCA1
S32 -	DTN22 - 130	M8-M24	32	210	130	96	50	56	12.5	12.5	TCA2

Spare Part I44

• Through coolant system not available



TCA Tap Adaptor

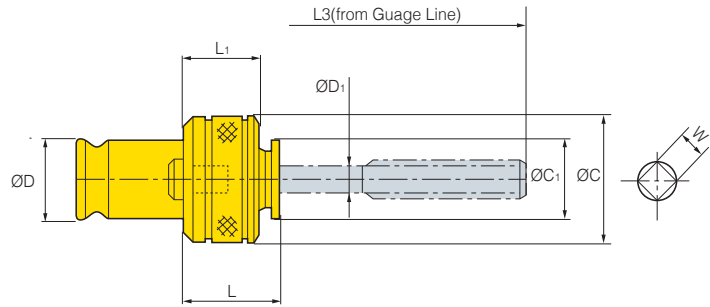



(mm)

Designation	ØD	ØC	L	L1		
TCA1 -	M3	3.2	24	22	0.2	
	M4	4	24	22	0.2	
	M5	5.5	4.5	24	22	0.2
	M6, 1/4U	6	4.5	24	22	0.2
	M8	6.2	5	25	22	0.2
	M10, 3/8U	7	5.5	25	22	0.2
	M11	8	6	39	22	0.2
	M12	8.5	6.5	26	22	0.2
TCA2 -	M8	6.2	38	28	0.6	
TCS2 -	M10	7	38	28	0.6	
TCA2 -	M12	8.5	39	28	0.6	
	M14, 3/4U	10.5	8	41	28	0.6
	P1/4	11	9	31	28	0.6
TCS2 -	M16	12.5	43	28	0.6	
TCA2 -	M18, P3/8	14	44	28	0.6	
	M20	15	45	28	0.6	
	M22	17	46	28	0.6	
	P1/2	18	36	28	0.6	
	M24	19	46	28	1.8	
TCA3 -	M16	12.5	35	37	1.8	
	M18	14	37	37	1.8	
	M20	15	37	37	1.8	
	M22	17	38	37	1.8	
	M24	19	44	37	1.8	
	M27, 1U	20	15	62	37	1.8
	M30, P3/4	23	17	62	37	1.8
	M33	25	19	66	37	1.8
M36, M38	28	21	68	37	1.8	

• DIN standard products can be ordered. • Through coolant system not available



TER Tap Collet

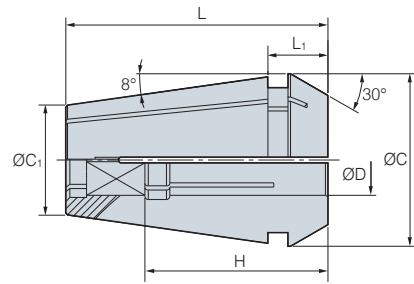


Designation		Tapping Range	ØD	W	ØC	ØC ₁	L	L ₁	H
TER16 -	4x3.2	M3	4	3.2	16.74	10.1	27.5	6.3	18
	5x4	M4	5	4	16.74	10.1	27.5	6.3	18
	5.5x4.5	M5	5.5	4.5	16.74	10.1	27.5	6.3	18
	6x4.5	M6,U1/4	6	4.5	16.74	10.1	27.5	6.3	18
	6.2x5	M7, M8	6.2	5	16.74	10.1	27.5	6.3	18
	7x5.5	M9, M10, U3/8	7	5.5	16.74	10.1	27.5	6.3	18
TER20 -	5x4	M4	5	4	20.74	13.2	31.5	7.2	18
	5.5x4.5	M5	5.5	4.5	20.74	13.2	31.5	7.2	18
	6x4.5	M6,U1/4	6	4.5	20.74	13.2	31.5	7.2	18
	6.2x5	M7, M8	6.2	5	20.74	13.2	31.5	7.2	18
	7x5.5	M9, M10, U3/8	7	5.5	20.74	13.2	31.5	7.2	18
	8x6	M11, U7/16, P1/8	8	6	20.74	-	-	-	-
	8.5x6.5	M12	8.5	6.5	20.74	13.2	31.5	7.2	22
TER25 -	5x4	M4	5	4	25.74	17.6	34	7.5	18
	5.5x4.5	M5	5.5	4.5	25.74	17.6	34	7.5	18
	6x4.5	M6	6	4.5	25.74	17.6	34	7.5	18
	6.2x5	M7, M8	6.2	5	25.74	17.6	34	7.5	18
	7x5.5	M9, M10, U3/8	7	5.5	25.74	17.6	34	7.5	18
	8.5x6.5	M12	8.5	6.5	25.74	17.6	34	7.5	22
TER32 -	6x4.5	M6,U1/4	6	4.5	32.74	23.1	40	8.2	18
	6.2x5	M7, M8	6.2	5	32.74	23.1	40	8.2	18
	7x5.5	M9, M10, U3/8	7	5.5	32.74	23.1	40	8.2	18
	8X6	M11, U7/16, P1/8	8	6	32.74	23.1	40	8.2	22
	8.5x6.5	M12	8.5	6.5	32.74	23.1	40	8.2	22
	10.5x8	M14, U9/16	10.5	8	32.74	23.1	40	8.2	25
	12.5x10	M16	12.5	10	32.74	23.1	40	8.2	25
	14x11	M18, P3/8	14	11	32.74	23.1	40	8.2	25
	15x12	M20	15	12	32.74	23.1	40	8.2	25
	17x13	M22, U7/8	17	13	32.74	23.1	40	8.2	25
	11x9	P1/4	11	9	32.74	23.1	40	8.2	25
	12x9	U5/8	12	9	32.74	23.1	40	8.2	25
	9x7	U1/2	9	7	32.74	23.1	40	8.2	22


• Water proof tapping is possible with the use of RTJW and nuts (limited to the right sizes)




BT-SLA

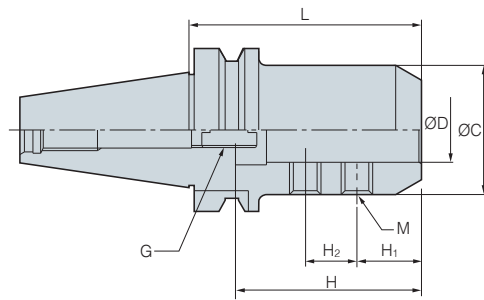

(mm)


Designation	ØD	L	ØC	H	H ₁	H ₂	M	G		
BT30 -	SLA16 - 90	16	90	40	70	25	20	M10	M12	1.1
	SLA20 - 90	20	90	50	70	25	20	M12	M12	1.2
	SLA25 - 90	25	90	50	70	25	20	M12	M12	1.2
BT40 -	SLA16 - 90	16	90	40	70	25	20	M10	M12	1.5
	SLA20 - 90	20	90	50	70	25	20	M12	M12	1.8
	SLA25 - 90	25	90	50	70	25	20	M12	M12	2.0
	SLA32 - 90	32	90	60	80	25	25	M14	M12	2.2
	105	32	105	60	80	25	25	M14	M12	2.4
	SLA40 - 105	40	105	80	80	25	25	M16	M12	2.4
BT50 -	SLA16 - 90	16	90	40	70	25	20	M10	M12	4.2
	SLA20 - 105	20	105	50	70	25	20	M12	M12	4.4
	SLA25 - 105	25	105	50	70	25	20	M12	M12	4.4
	135	25	135	50	70	25	20	M12	M12	4.7
	SLA32 - 105	32	105	60	80	25	25	M14	M12	4.8
	135	32	135	60	80	25	25	M14	M12	5.4
	165	32	165	60	80	25	25	M14	M12	6.2
	SLA40 - 105	40	105	90	80	25	25	M16	M12	5.2
	150	40	150	90	80	25	25	M16	M12	5.8
SLA42 - 105	42	105	90	80	25	25	M16	M12	5.8	

 Spare Part 147


• Through coolant system is optional.



HSK-SLA

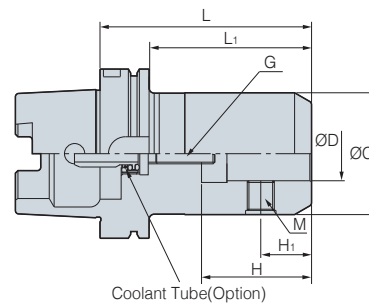




(mm)

Designation		ØD	L	ØC	H	H ₁	M	G	
HSK63A -	SLA20 - 100	20	100	52	51	25	M16	M12	2.0
	SLA25 - 105	25	105	65	59	25	M18	M12	2.7
	SLA32 - 105	32	105	72	63	30	M20	M12	2.9
HSK100A -	SLA20 - 105	20	105	52	51	25	M16	M12	3.9
	SLA25 - 110	25	110	65	59	25	M18	M12	4.0
	SLA32 - 125	32	125	72	63	30	M20	M12	4.3

• Through coolant system is optional.

▶ Parts

Arbor	Spare Parts				
	Basic		Option		
	Set Screw		Adjust Screw	Wrench	
Type					
	DBT / BT type	HSK / SK type			
SLA16	BTF1010	BTF1414-1.5	M1230C	LW-5	LW-6
SLA19	BTF1212-1.5	BTF1616-1.5		LW-6	LW-8
SLA20		BTF1818-1.5		LW-6	LW-10
SLA25		BTF1414-1.5		LW-8	
SLA32	BTF1624-1.5	BTF2020-1.5			
SLA40					
SLA42					



BT-FMA

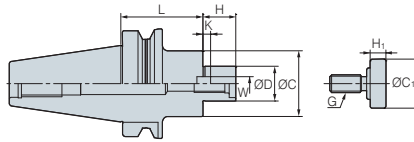


Fig. 1

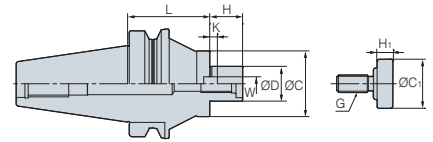


Fig. 2

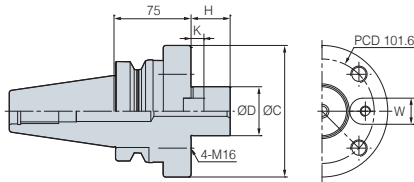


Fig. 3

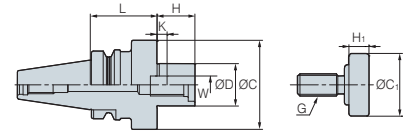








Fig. 4

(mm)

Designation	Cutter Dia.	ØD	L	ØC	H	W	K	G		Fig.	
BT30 - FMA25.4 - 45	80	25.4	45	50	22	9.5	5	M12	1.2	4	
BT40 -	FMA25.4 - 45	80	25.4	45	50	22	9.5	5	M12	1.4	1
	FMA25.4 - 90	80	25.4	90	50	22	9.5	5	M12	3.1	1
	FMA31.75 - 45	100	31.75	45	60	30	12.7	7	M16	1.6	1
	FMA31.75 - 90	100	31.75	90	60	30	12.7	7	M16	3.0	1
	FMA38.1 - 60	125	38.1	60	80	34	15.87	9	M20	2.9	4
BT50 -	FMA25.4 - 45	80	25.4	45	50	22	9.5	5	M12	3.8	1
	FMA25.4 - 90	80	25.4	90	50	22	9.5	5	M12	4.5	1
	FMA25.4 - 150	80	25.4	150	50	22	9.5	5	M12	5.5	2
	FMA31.75 - 45	100	31.75	45	60	30	12.7	7	M16	4.6	1
	FMA31.75 - 75	100	31.75	75	60	30	12.7	7	M16	5.2	1
	FMA31.75 - 105	100	31.75	105	60	30	12.7	7	M16	6.0	2
	FMA38.1 - 45	125	38.1	45	80	34	15.87	9	M20	4.3	1
	FMA38.1 - 75	125	38.1	75	80	34	15.87	9	M20	5.5	1
	FMA50.8 - 45	160	50.8	45	100	36	19.05	10	M24	4.8	1
	FMA50.8 - 75	160	50.8	75	100	36	19.05	10	M24	6.8	1
FMA47.625 - 75	200	47.625	75	128	38	25.4	12.5	-	7.5	3	

• Through coolant system is optional. • The weight above exclude the face cutter.

Parts

Arbor	Spare Parts				
	Basic				Option
	Key	Clamp Bolt	Key Bolt	Wrench Bolt	Wrench
Type					
FMA22	K8.0	MBA-M10	BX0310	-	LW-8
FMA22.225	K8.0	MBA-M10	BX0310	-	LW-8
FMA25.4	K9.5	MBA-M12	BX0412	BX1230	LW-10
FMA31.75	K12.7	MBA-M16	BX0516	-	LW-14
FMA38.1	K15.87	MBA-M20	BX0616	-	LW-17
FMA50.8	K19.05	MBA-M24	BX0820	-	LW-19
FMA47.625	K25.4	-	BX1020	BX1645	-
S-FMA25.4	-	-	-	-	LW-10
S-FMA31.75	-	-	-	-	LW-14



BT-FMC

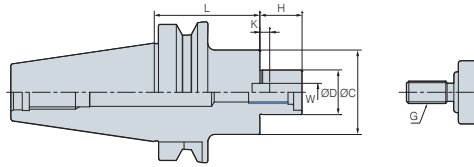


Fig. 1




Fig. 2

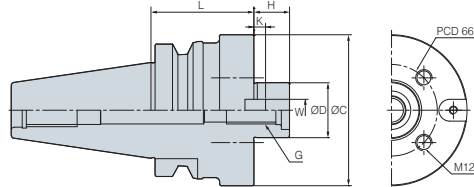


Fig. 3

												(mm)
Designation			Cutter Dia.	ØD	L	ØC	H	W	K	G		Fig.
BT30 -	FMC16 -	45	40	16	45	38	17	8	5.0	M8	0.7	1
	FMC22 -	45	50/63	22	45	48	19	10	5.6	M10	0.8	2
	FMC27 -	50	80	27	50	60	21	12	6.3	M12	1.2	2
BT40 -	FMC16 -	60	40	16	60	38	17	8	5.0	M8	1.2	1
	FMC22 -	45	50/63	22	45	48	19	10	5.6	M10	1.2	1
	FMC22 -	90	50/63	22	90	48	19	10	5.6	M10	1.2	1
	FMC27 -	60	80	27	60	60	21	12	6.3	M12	1.8	2
	FMC27 -	90	80	27	90	60	21	12	6.3	M12	3.2	2
	FMC32 -	60	100	32	60	78	24	14	7.0	M16	2.3	2
	FMC40 -	50	125/160	40	50	89	27	15.87	8.0	M20	3.3	3
BT50 -	FMC16 -	60	40	16	60	38	17	8	5.0	M8	3.9	1
	FMC22 -	60	50/63	22	60	48	19	10	5.6	M10	4.1	1
	FMC27 -	40	80	27	40	60	21	12	6.3	M12	4.1	1
	FMC27 -	90	80	27	90	60	21	12	6.3	M12	5.5	1
	FMC27 -	150	80	27	150	60	21	12	6.3	M12	6.1	1
	FMC32 -	45	100	32	45	78	24	14	7.0	M16	4.2	1
	FMC32 -	75	100	32	75	78	24	14	7.0	M16	4.2	1
	FMC32 -	105	100	32	105	78	24	14	7.0	M16	4.2	1
FMC40 -	50	125/160	40	50	89	27	15.87	8.0	M20	4.6	3	


• Through coolant system is optional. • The weight above exclude the face cutter.

▶ Parts


Arbor	Spare Parts				
	Basic				Option
	Key	Clamp Bolt	Key Bolt	Wrench Bolt	Wrench
Type					
FMC 16	K8.0	-	BX0310	BX0830	LW-6
FMC 22	K10.0	-	BX0412	BX1030	LW-8
FMC 25.4	K9.5	-	BX0516	BX1230	LW-10
FMC 27	K12.0	MBA-M12	BX0616	-	LW-10
FMC 32	K14.0	MBA-M16	BX0616	-	LW-14
FMC38.1	K15.87	MBA-M16	BX0616	-	LW-14
FMC40	K15.87	MBA-M20	BX0616	-	LW-17



HSK-FMC

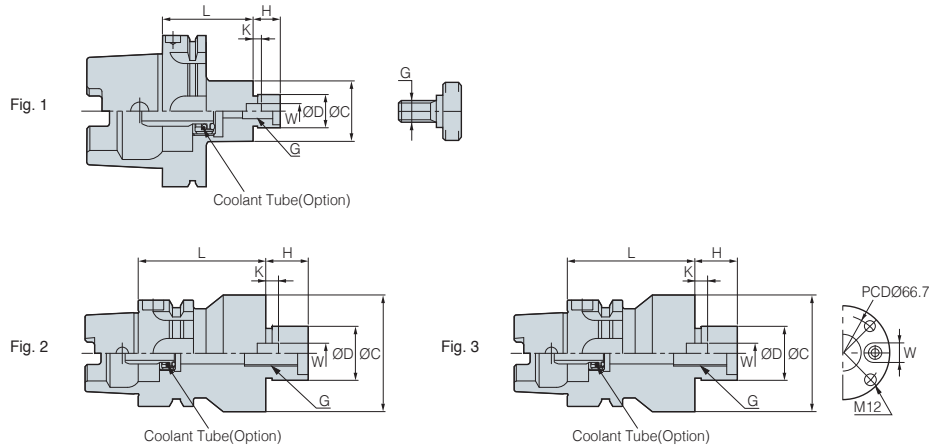






(mm)

Designation	Cuttter Dia.	ØD	L	ØC	H	W	K	G		Fig.	
HSK50A -	FMC16 - 40	40	16	40	38	17	8	5	M8	0.8	1
	FMC22 - 50	50/63	22	50	48	19	10	5.6	M10	0.9	1
HSK63A -	FMC16 - 50	40	16	50	38	17	8	5.0	M8	1.1	1
	FMC22 - 50	50/63	22	50	48	19	10	5.6	M10	1.2	1
	FMC27 - 60	80	27	60	60	21	12	6.3	M12	1.4	1
	FMC32 - 60	100	32	60	78	24	14	7.0	M16	1.8	2
	FMC40 - 60	125/160	40	60	89	27	15.87	8.0	M20	2	3

• Through coolant system is optional. • The weight above exclude the face cutter.

Parts

Arbor	Spare Parts				
	Basic				Option
	Key	Clamp Bolt	Key Bolt	Wrench Bolt	Wrench
Type					
FMC 16	K8.0	-	BX0310	BX0830	LW-6
FMC 22	K10.0	-	BX0412	BX1030	LW-8
FMC 25.4	K9.5	-	BX0516	BX1230	LW-10
FMC 27	K12.0	MBA-M12	BX0616	-	LW-10
FMC 32	K14.0	MBA-M16	BX0616	-	LW-14
FMC38.1	K15.87	MBA-M16	BX0616	-	LW-14
FMC40	K15.87	MBA-M20	BX0616	-	LW-17



BT-MTA




Fig. 1

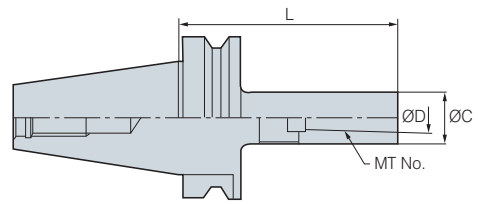



Fig. 2

Designation		MT No.	L	ØD	ØC		Fig.
BT40 -	MTA1 - 45	1	45	12.065	25	1.1	1
	MTA2 - 60	2	60	17.780	32	1.1	1
	MTA3 - 75	3	75	23.825	40	1.2	1
	MTA4 - 95	4	95	31.267	50	1.4	1
BT50 -	MTA1 - 45	1	45	12.065	25	3.9	1
	MTA1 - 120	1	120	12.065	25	4.2	2
	MTA1 - 180	1	180	12.065	25	4.3	2
	MTA2 - 45	2	45	17.780	32	3.9	1
	MTA2 - 135	2	135	17.780	32	4.3	2
	MTA2 - 180	2	180	17.780	32	4.6	2
	MTA3 - 45	3	45	23.825	40	3.8	1
	MTA3 - 150	3	150	23.825	40	4.6	2
	MTA3 - 180	3	180	23.825	40	4.9	2
	MTA4 - 75	4	75	31.267	50	3.9	1
	MTA4 - 180	4	180	31.267	50	5.4	2
	MTA5 - 105	5	105	44.399	65	4.5	1

(mm)

• Through coolant system not available



ANGULAR HEAD

ANGULAR HEAD

Features of solid type

- Doubled effect by one equipment
- Available for various angles
- Lighter aluminum body



Code System




Name of Angular head parts




Various applications


360-degree rotating angular head




Fixed 90-degree type angular head




Fixed 45-degree type angular head



Attachment type angular head



Components

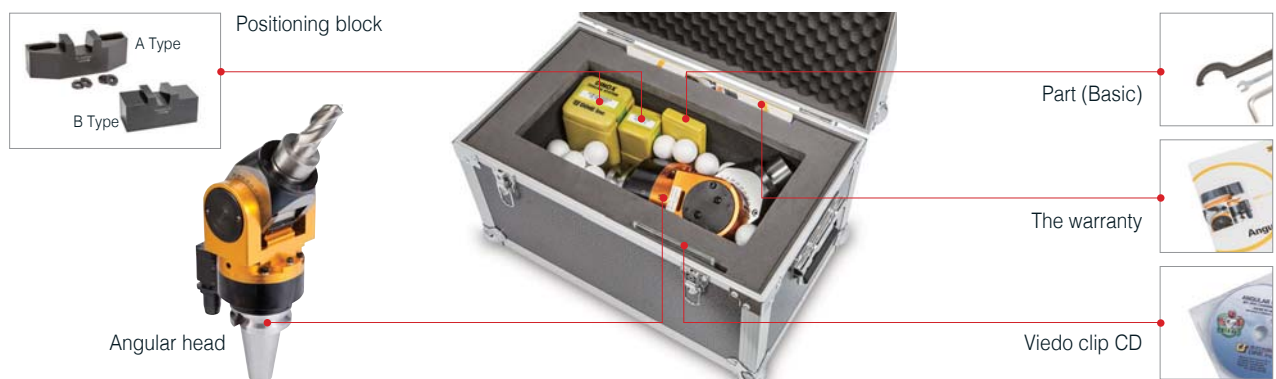

MAH

Universal type MAH(Reinforced series)

Reinforced type
Better performance by improving existing universal Angular head

1. Stability on large mold machining
2. Use 32mm Ball Endmill
3. Reinforced from KHU type



HRAG

Attachment type HRAG(Reinforced type)

HRAG : The reinforced bracket enhanced durability upto 200%

1. Stability on face milling machining
2. Reinforced stiffness from KAG type.




KHU

Universal type KHU(Freeangle)

Free angle adjusting up to 90°

1. Possible to use various tools of BT40 and BT30
2. HSK and SK type are order made.
3. Coolant type is optional.

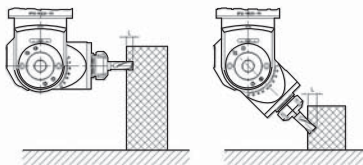


BT50-KHU20-195

KAG

Attachment type KHU(Universal type)

Free 360° angle adjusting from side to side

1. Possible to use various tools of BT40 and BT30
2. HSK and SK type are order made.
3. Coolant type is optional.

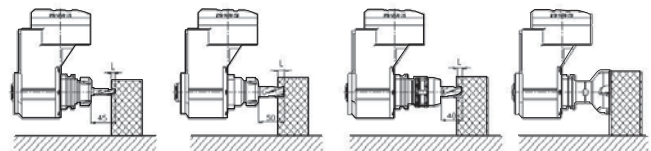

BT40-SDC20-60
(Ø12 E/M)

NT40-SDC20-60
(Ø20 E/M)

BT40-NPM20-85
(Ø20 E/M)


BT40-FMA25.4-45
(Ø80 Shoulder Mill)

KAH

Modular type KHU(90° type)

Free 360° angle adjusting from side to side

1. In case of using a tap collet, please contact us in advance.
2. HSK and SK type are order made.
3. Coolant type is optional.



BT50-KAH20-200

KAC

Modular type KAC(45° type)

Free 360° angle adjusting from side to side


1. HSK and SK type are order made.
2. Coolant type is optional.




Angular Head Series

MHA for mold(Free angle)_Reinforced type(0°~90°)

BT-MAH

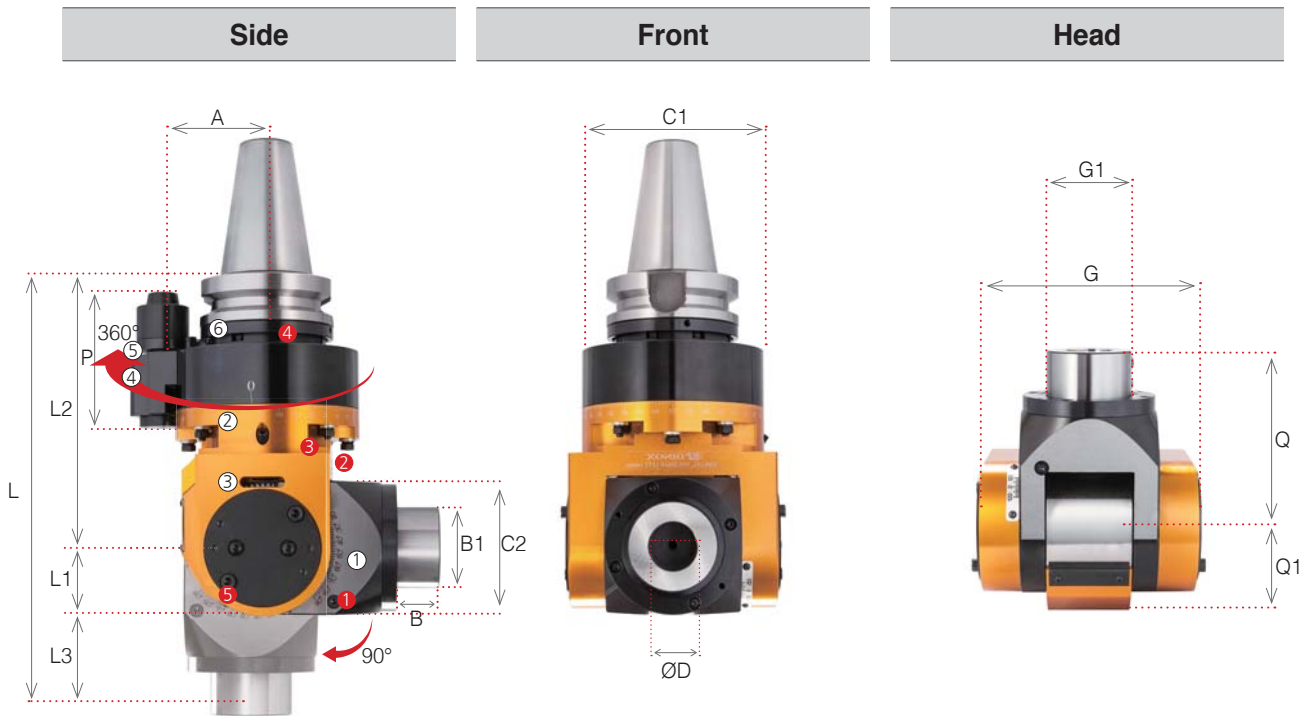

Positioning pin

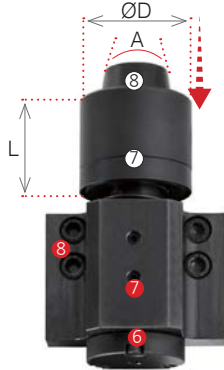

Shank Size	L	A	ØD
BT50	56.5	30°	ø40


NO	Name
①	Inclination angle gradation (Axial positioning in 0°~90°)
②	Rotating angle gradation (Free radius position in 360°)
③	Head
④	Positioning pin part
⑤	Jaw key
⑥	Positioning ring
⑦	Positioning pin cover
⑧	Positioning pin

NO	Part name	Designation
①	Inclination angle gradation Screw	BT1216
②	Head fixed bolts	BT0645
③	Rotating angle gradation screw	BT0640
④	Positioning ring set screw	MSST5-12
⑤	Tilt axes fixing bolts	BH0616
⑥	Positioning pin height control bolt	BT0516
⑦	Positioning pin set screw	BT0512
⑧	Body position block set screw	BX0516

Designation	ØD	L	L1	L2	L3	C	C1	G	C2	Q	Q1	B	B1	P	A	MAX RPM	kg	SIDE LOCK
BT50-MAH32-200	32	200	47	78	325	136	95	154	95	125	63	31	60	95	80	3,000	19	SIDE LOCK



HRAG(90° fixed)_Reinforced type BT-HRAG

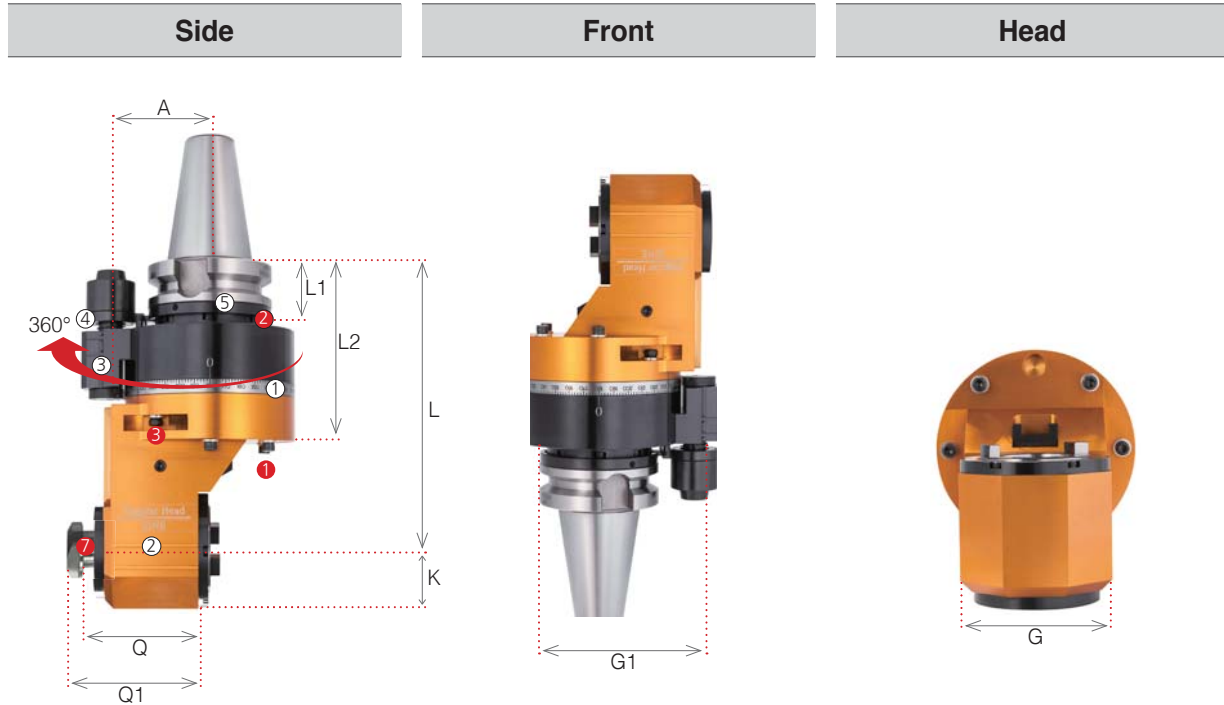

Positioning pin



Shank Size	L	A	ØD
BT50	56.5	30°	ø40

NO	Name
①	Rotating angle graduation (Free radius position in 360°)
②	Head
③	Positioning pin part
④	Jaw key
⑤	Positioning ring
⑥	Positioning pin cover
⑦	Positioning pin

NO	Part name	Designation
①	Head fixed bolts	BX0660
②	Positioning ring set screw	MSST5-12
③	Rotating angle graduation screw	BT0648
④	Positioning pin height control bolt	BT0516
⑤	Positioning pin set screw	BT0512
⑥	Body position block set screw	BX0516
⑦	BT / NT Bolt	


Designation	L	L1	L2	L3	L4	Q	Q1	A	G	G1	MAX RPM	Tool Shank	kg
BT50-HRAG40-230	230	56.5	145	46.5	276.5	89	101	80	93	136	3000	BT40 / NT40	15.75




Angular Head Series

KHU(Free angle)_Collet type(0°~90°)

BT-KHU

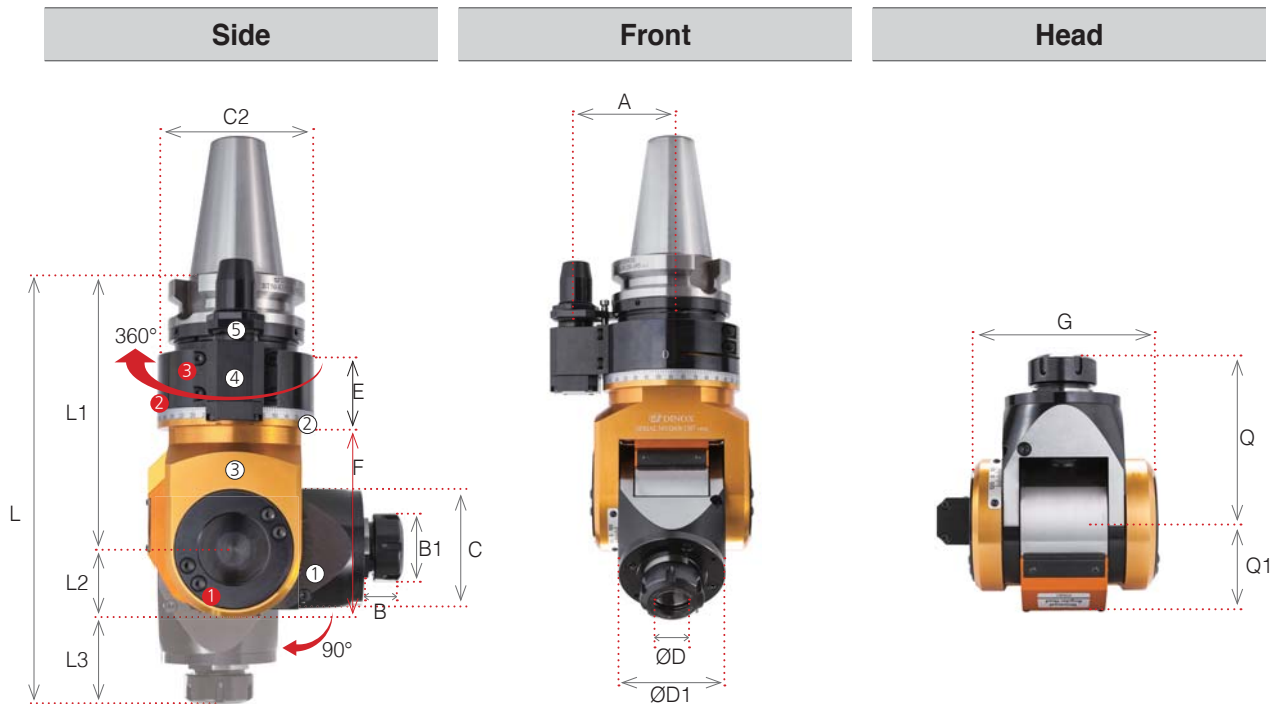

Positioning pin

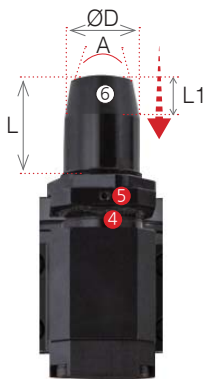

Shank Size	L	L1	A	ØD
BT40	Max : 32 Min : 26	10	20°	Ø19.6
BT50	Max : 35 Min : 29	15		


NO	Name
①	Inclination angle gradation (Axial positioning in 0°~90°)
②	Rotating angle gradation (Free radius position in 360°)
③	Head
④	Positioning pin part
⑤	Jaw key
⑥	Height control wrench hole

NO	Part name	Designation
①	Tilt Axes fixing bolts	BH0630
②	Bracket angle fixing bolt	BX0630
③	Position block fixing bolt	BX0512
④	Set screw	BT0404
⑤	Fixing bolts	BX05630

Designation	ØD	ØD1	L	L1	L2	L3	B	B1	E	F	C	A	G	Q	Q1	Torque rate (IN:OUT)	Direction of rotation (IN:OUT)	MAX RPM	Collet	kg
BT40-KHU10-160	1.0~10.0	58	160	33	54	247	22	28	51	98	96	65	90	87	40	1:2	CW:CW	6,000	GERC16	6.4
BT50-KHU10-180	1.0~10.0	58	180	33	54	267	22	28	53	103	114	80	90	87	40	1:2	CW:CW	6,000	GERC16	10.5
BT50-KHU20-195	2.0~20.0	84	195	47	73	315	29	50	53	132	114	80	124	120	63	1:1	CW:CW	3,000	GERC32	15.8



KAG(90° Fixed type)
BT-KAG

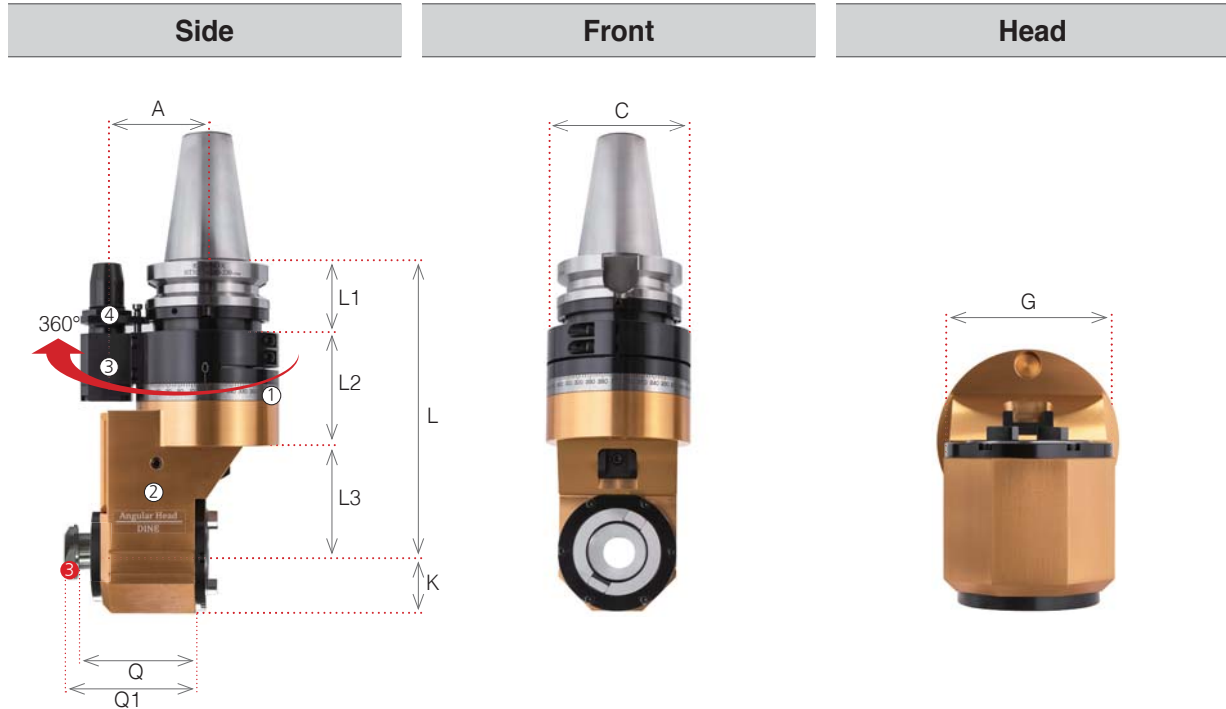

Positioning pin



NO	Name
①	Rotating angle graduation (Free radius position in 360°)
②	Head
③	Positioning pin part
④	Jaw key
⑤	Height control wrench hole

NO	Part name	Designation
①	Set screw	BT0404
②	Fixing bolts	BX50630
③	BT / NT Bolt	

Shank Size	L	L1	A	ØD
BT40	Max : 32 Min : 26	10	20°	Ø19.6
BT50	Max : 35 Min : 29	15		Ø28


Designation	L1	L2	L3	L4	L5	L6	Q	Q1	A	C	G	Torque rate (IN:OUT)	Direction of rotation (IN:OUT)	MAX RPM	Holder Shank	kg
BT40-KAG30-195	44	86	65	37.5	195	232.5	66	70	65	96	75	1:1	CW:CW	4,000	BT30/NT30	6.4
BT50-KAG40-230	57	88	85	46.5	230	276.5	89	94	80	114	93	1:1	CW:CW	3,000	BT40/NT40	10.5




Angular Head Series

HRAG(90° fixed)_Collet type

BT-KAH

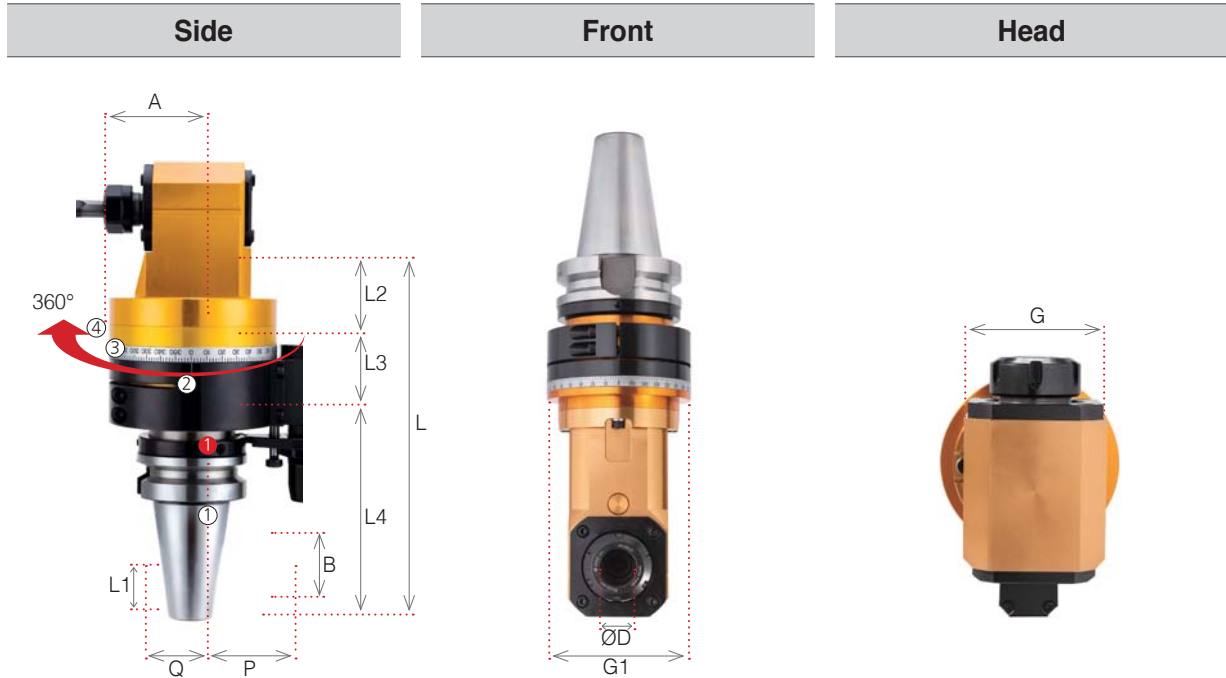

▶ Positioning pin

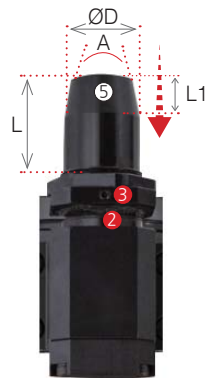

NO	Name
①	Head
②	Rotating angle graduation (Free radius position in 360°)
③	Positioning pin part
④	Jaw key
⑤	Height control wrench hole

NO	Part name	Designation
①	Head fixing bolts	BX0618
②	Set screw	BT0404
③	Fixing bolts	BX50630

Shank Size	L	L1	A	ØD
BT40	Max : 32 Min : 26	10	20°	Ø19.6
BT50	Max : 35 Min : 29	15		Ø28

Designation	ØD	L	L1	L2	L3	L4	B	A	P	Q	G	G1	Torque rate (IN:OUT)	MAX RPM	Collet	kg
BT40-KAH7-170	1.0~7.0	170	20	44	71	55	19	65	37	24.5	40	96	1:1	5,000	GERC11	4.6
BT40-KAH10-195	1.0~10.0	195	25	44	71	80	28	65	46	32	58	96	1:1	5,000	GERC16	5.8
BT40-KAH13-165	1.0~13.0	165	28	44	71	50	35	65	53	35	60	96	1:1	5,000	GERC20	5.7
BT40-KAH20-180	2.0~20.0	180	38	44	71	65	50	65	71	49	76	96	1:1	3,500	GERC32	6.7
BT50-KAH07-220	1.0~7.0	220	20	57	54	109	19	80	37	24.5	40	96	1:1	5,000	GERC11	9.8
BT50-KAH10-215	1.0~10.0	215	25	57	54	104	28	80	46	32	58	96	1:1	5,000	GERC16	10.7
BT50-KAH10-260	1.0~10.0	260	25	57	54	149	28	80	46	32	58	96	1:1	5,000	GERC16	11.0
BT50-KAH13-260	1.0~13.0	260	28	57	54	149	35	80	53	35	60	96	1:1	5,000	GERC20	11.2
BT50-KAH20-200	2.0~20.0	200	38	57	54	89	50	80	71	49	76	96	1:1	3,500	GERC32	11.6
BT50-KAH20-240	2.0~20.0	240	38	57	54	129	50	80	71	49	76	96	1:1	3,500	GERC32	12.4




KAC(45° fixed)_Collet type

BT-KAC



▶ Positioning pin

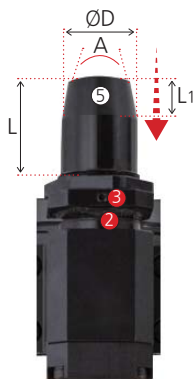

NO	Name
①	Head
②	Rotating angle graduation (Free radius position in 360°)
③	Positioning pin part
④	Jaw key
⑤	Height control wrench hole

NO	Part name	Designation
①	Head fixing bolts	BX0618
②	Set screw	BT0404
③	Fixing bolts	BX50630

Shank Size	L	L1	A	ØD
BT40	Max : 32 Min : 26	10	20°	Ø19.6
BT50	Max : 35 Min : 29	15		

Designation	ØD	L	L1	L2	L3	B	G	G1	P	Q	A	MAX RPM	Collet	kg
BT40-KAC10-220	1.0~10.0	220	44	71	105	28	60	96	25	54	65	5,000	GERC16	5.3
BT40-KAC13-220	1.0~13.0	220	44	71	105	28	60	96	25	54	65	5,000	GERC20	5.5
BT40-KAC20-230	2.0~20.0	230	44	71	115	50	72	96	30	60	65	3,500	GERC32	6.8
BT50-KAC10-240	1.0~10.0	240	57	54	129	28	60	96	25	54	80	5,000	GERC16	10.2
BT50-KAC13-240	1.0~13.0	240	57	54	129	28	60	96	25	54	80	5,000	GERC20	10.4
BT50-KAC20-250	2.0~20.0	250	57	54	139	50	72	96	30	60	80	3,500	GERC32	11.7




FBH back boring & balanced type

FBH


- High speed machining : G2.5
- Back Boring funtion
- Adjustment range: 1DIV=0.002mm




Code System

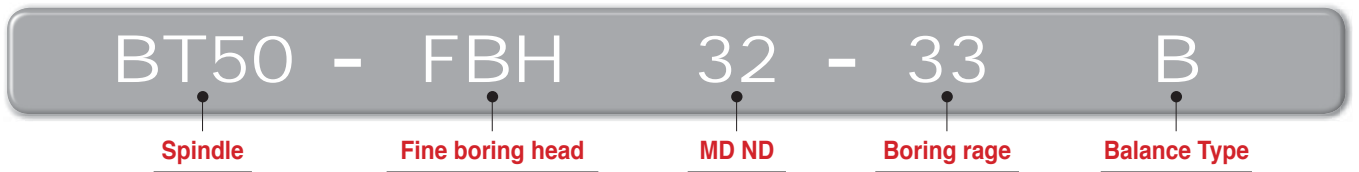


Working Permission Speed

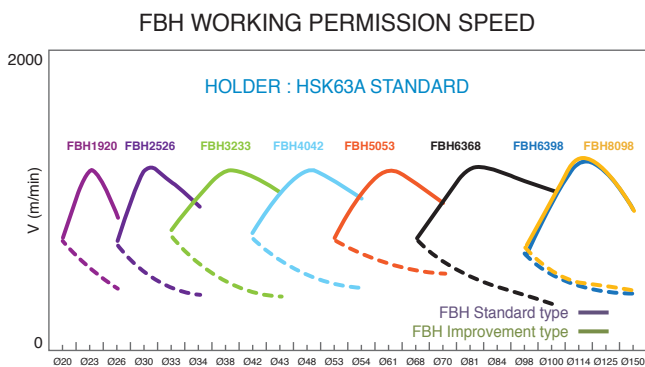

Boring range adjustment method

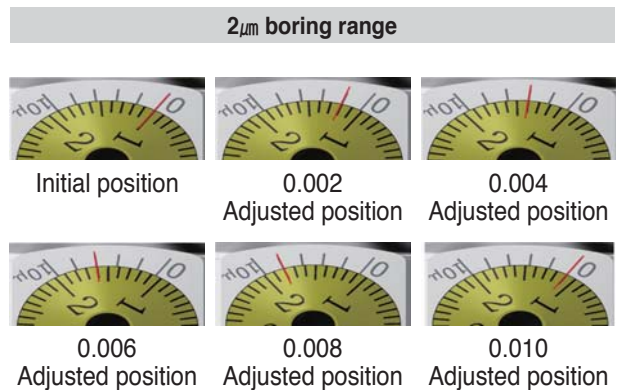

Back boring

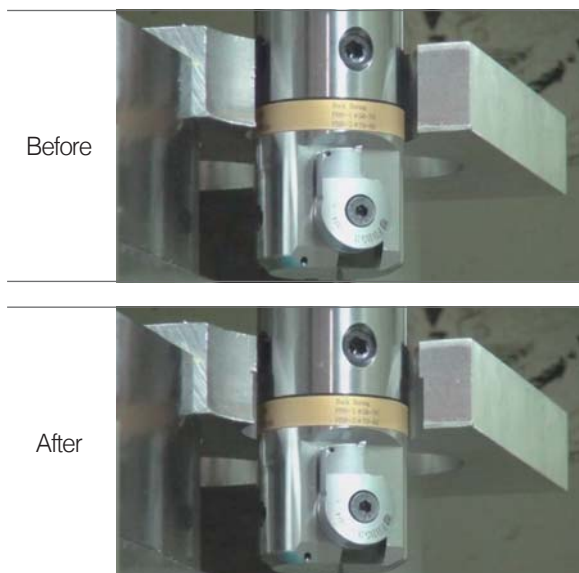

Adjusting machining direction available



Easy change of machining direction only by adjusting the bite



BT-FBHB Micro Boring Balance Type

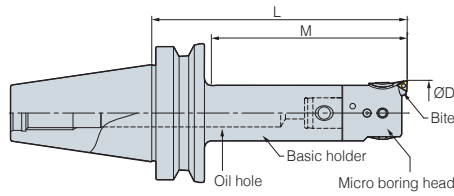


Fig. 1

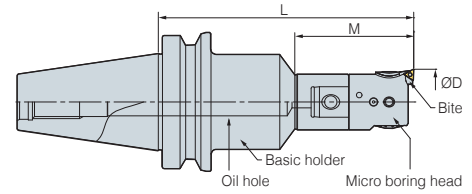


Fig. 2

Designation		Boring Range ØD		L	Max. Boring Depth	kg	Fig.		
Micro Boring Head	Bite	Body (Basic Holder)	Min					Max	
FBH1920B	FBB20N-□-□□	BT30 -	MD19F - 70R	20(24)	26(30)	103	60	0.5	2
FBH2526B	FBB26N-□-□□		MD25F - 90R	26(32)	34(40)	127	80	0.7	2
FBH3233B	FBB33N-□-□□		MD32F - 80R	33(40)	43(50)	121	80	0.8	2
FBH4042B	FBB42N-□-□□		MD40F - 80R	42(50)	54(62)	127	96	1.1	2
FBH5053B	FBB53N-□-□□		MD50F - 70	53(65)	70(82)	127	97	1.7	1
FBH1920B	FBB20N-□-□□	BT40 -	MD19F - 70R	20(24)	26(30)	103	45	1.9	2
FBH2526B	FBB26N-□-□□		MD25F - 95R	26(32)	34(40)	133	59	2	2
FBH3233B	FBB33N-□-□□		MD32F - 100R	33(40)	43(50)	141	77	2.5	2
FBH4042B	FBB42N-□-□□		MD40F - 115R	42(50)	54(62)	162	107	3.1	2
FBH5053B	FBB53N-□-□□		MD50F - 105	53(65)	70(82)	162	135	3.5	1
FBH6368B	FBB68N-□-□□	BT50 -	MD63F - 110	68(90)	100(122)	181	154	6.3	1
FBH6398B	FBB68N-□-□□		MD63F - 135	98(120)	150(172)	206	179	7.1	1
FBH8098B	FBB68N-□-□□		MD80F - 100	98(120)	150(172)	171	144	8.3	1
FBH1920B	FBB20N-□-□□	BT50 -	MD19F - 85	20(24)	26(30)	118	80	5.2	1
FBH2526B	FBB26N-□-□□		MD25F - 105R	26(32)	34(40)	142	59	5.8	2
FBH3233B	FBB33N-□-□□		MD32F - 110R	33(40)	43(50)	151	77	6	2
FBH4042B	FBB42N-□-□□		MD40F - 195R	42(50)	54(62)	242	130	6.3	2
FBH5053B	FBB53N-□-□□		MD50F - 225R	53(65)	70(82)	282	182	6.6	2
FBH6368B	FBB68N-□-□□	BT50 -	MD63F - 230R	68(90)	100(122)	301	220	7.2	2
FBH6398B	FBB68N-□-□□		MD63F - 195R	98(120)	150(172)	266	191	8.5	2
FBH8098B	FBB68N-□-□□		MD80F - 175	98(120)	150(172)	246	208	12.8	1

☞ Spare Part I63

• Through coolant system available

FBH Micro Boring Head

FBH1920B


New Type (mm)

Designation	Boring Range ØD		L	Scale Ring 1Rev. Adjustable range	MD No.	kg
	Min	Max				
FBH - 1920B	20	26(30)	33	Ø0.4mm	MD1911	0.06
2526B	26	34(40)	37	Ø0.4mm	MD2514	0.12
3233B	33	43(50)	41	Ø0.5mm	MD3218	0.24
4042B	42	54(62)	47	Ø0.5mm	MD4022	0.41
5053B	53	70(82)	57	Ø0.6mm	MD5028	0.8
6368B	68	100(122)	71	Ø0.8mm	MD6336	1.7
6398B	98	150(172)	71	Ø0.8mm	MD6336	2.35

• Stock of basic holders, heads and bites are separately managed.
• () : Max. boring diameter of extension type




S-FBH Small Micro Boring

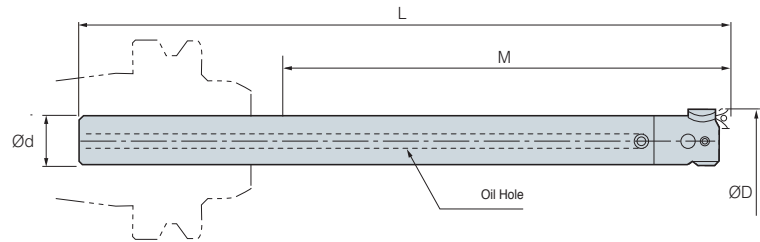

Designation	Shank dia $\varnothing d$	Boring Range $\varnothing D$		L	M	Designation			kg	
		Min	Max			Basic Shank	Boring Head	Bite		
S19W -	FBH20B - 120	19	20	26	190	120	S19W-MD19F-157	FBH1920B	FBB20N	0.6
		19	20	26	210	140	S19W-MD19F-177	FBH1920B	FBB20N	0.7
		19	20	26	230	160	S19W-MD19F-197	FBH1920B	FBB20N	0.8
S25W -	FBH26B - 150	25	26	34	235	150	S25W-MD25F-197.5	FBH2526B	FBB26N	1.4
		25	26	34	260	175	S25W-MD25F-222.5	FBH2526B	FBB26N	1.6
		25	26	34	285	200	S25W-MD25F-247.5	FBH2526B	FBB26N	2
S32W -	FBH33B - 180	32	33	43	280	180	S32W-MD32F-239	FBH3233B	FBB33N	2.8
		32	33	43	340	240	S32W-MD32F-299	FBH3233B	FBB33N	3.5
S19 -	FBH20B - 40	19	20	26	110	40	S19-MD19F-77	FBH1920B	FBB20N	0.1
		19	20	26	150	80	S19-MD19F-117	FBH1920B	FBB20N	0.2
S25 -	FBH26B - 50	25	26	34	135	50	S25-MD25F-97.5	FBH2526B	FBB26N	0.4
		25	26	34	185	100	S25-MD25F-147.5	FBH2526B	FBB26N	0.6
S32 -	FBH33B - 90	32	33	43	190	90	S32-MD32F-149	FBH3233B	FBB33N	1.1
		32	33	43	220	120	S32-MD32F-179	FBH3233B	FBB33N	1.2

• Through coolant system available

S-FBH Mini Small Micro Boring

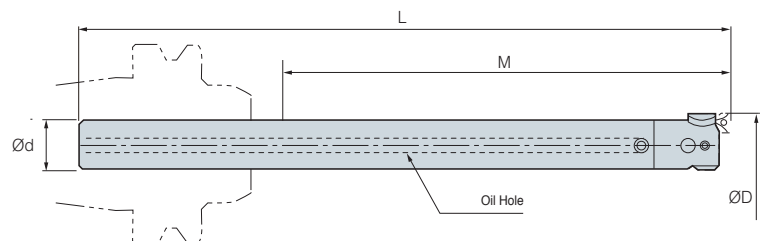

Designation	Shank dia $\varnothing d$	Boring Range $\varnothing D$		L	M	Designation			kg	
		Min	Max			Basic Shank	Boring Head	Bite		
S14W	FBH15 - 85	14	15	18	155	85	S14W-M6-123	FBH15	FBB15-C	0.2
		14	15	18	180	110	S14W-M6-148	FBH15	FBB15-C	0.3
S16W	FBH18 - 95	16	18	22	165	95	S16W-M8-128	FBH18	FBB15-C	0.3
		16	18	22	195	120	S16W-M8-158	FBH18	FBB15-C	0.4
S14	FBH15 - 40	14	15	18	110	40	S14-M6-78	FBH15	FBB15-C	0.1
S16	FBH18 - 45	16	18	22	115	45	S16-M8-78	FBH18	FBB15-C	0.1

• Through coolant system available



 **Parts**

Spare Parts		
Type(FBH)	Lock Screw	Clamp Screw
FBH1920B	BTF0404	BXC0304
FBH2526B	BTF0505	BXC0405
FBH3233B	BTF0606	BXC0506
FBH4042B	BTF0808	BXC0610
FBH5053B	BTF0812	BXC0610
FBH6368B	BTF1016	BXC0810
FBH6398B	BTF1012	BXC0810
FBH8098B	BTF1014	BXC0810

FBB Bite (New Type)

Designation	Boring Range	Insert Screw	Clamp Bolt
FBB15-C	Ø15 ~ Ø18mm	FTNA01633	BFTX02506N
	Ø18 ~ Ø22mm		
FBB20N	Ø20 ~ Ø26mm	BFTX0204A	BXC0304
FBB20N	Ø20 ~ Ø26mm	-	
FBB20N	-	1	
FBB20N	-	-	
FBB26N	Ø26 ~ Ø34mm	BFTX0204A	BXC0405
FBB26N		-	
FBB26N	-	1	
FBB26N	-	-	
FBB33N	Ø33 ~ Ø43mm	BFTX0204A	BXC0506
FBB33N		-	
FBB33N	-	1	
FBB33N	-	-	
FBB42N	Ø42~ Ø54mm	BFTX0204A	BXC0610
FBB42N	Ø42~ Ø54mm	-	
FBB42N	Ø42~ Ø54mm	-	
FBB42N	-	1	
FBB42N	-	-	
FBB42N	-	-	
FBB42N	-	-	
FBB53N	Ø53~ Ø70mm	BFTX0204A	BXC0610
FBB53N		-	
FBB53N	-	-	
FBB53N	-	-	
FBB53N	-	1	
FBB53N	-	-	
FBB53N	-	-	
FBB68N	Ø68~ Ø100mm Ø98~ Ø150mm	BFTX0204A	BXC0810
FBB68N		-	
FBB68N	-	-	
FBB68N	-	1	
FBB68N	-	-	
FBB68N	-	-	



Balance cut tool for Rough boring

TBC

- Wide boring range for big diameters - $\varnothing 130 \sim \varnothing 540\text{mm}$
- Stable structure against for cutting load - Assembly by dove-tail structure
- Interconvert with FBC
 - Common boring head and rail adopted, different cartridge
- Light-weight (5%~20% reduced)
- Various cartridge approach angle - $15^\circ, 45^\circ$
- Internal coolant pin - Easy assembly - Spray coolant to 6 directions



▶ Code System



Spindle

Balance cut tool for finish boring

Max. Chucking dia.

Length


Rail

Cartridge


Insert

▶ TBC Boring Tool structure & Features

TBC Compositions

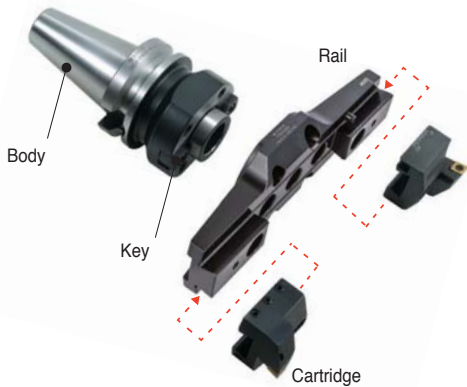

Cartridge : BCC1348
Insert : CCMT1204□□
CNMG1204□□



▶ TBC Boring Tool Cutting condition

Work-piece	Grade(HrC)	Cutting condition		
		Tip (Grade)	Cutting Speed (m/min.)	Feed per Revolution f(mm/rev.)
ALL	ADC12	"N"Material	"N"Material	0.1
Mild steel	SS41(HB160)	P Material	P Material	0.1
Steel	S45C(H250)	P Material	P Material	0.1
Stainless Steel	SUS304	M Material	M Material	0.1
Cast-iron	FC25(HB250)	K Material	K Material	0.1

▶ Boring range

Grade	Dia(Ø)		Body	Head Set	Insert
	min	max			
TBC130	130	180	FMD50	TBC130S	CCMT1204□□
TBC175	175	225	FMD50	TBC175S	CCMT1204□□
TBC220	220	270	FMD50	TBC220S	CCMT1204□□
TBC265	265	315	FMD50	TBC265S	CCMT1204□□
TBC310	310	390	FMD50	TBC310S	CCMT1204□□
TBC385	385	465	FMD50	TBC385S	CCMT1204□□
TBC460	460	540	FMD50	TBC460S	CCMT1204□□



Balance cut tool for Fine boring

FBC

- Wide boring range for big diameters - $\varnothing 130 \sim \varnothing 540\text{mm}$
- Interconvert with TBC
 - Common boring head and rail adopted, different cartridge [micro cartridge + balancing block]
- Various Insert according to bite
 - Applicable insert : CCMT09T3/1204, TPMT1103 (Cermet, cBN, PCD)




▶ Code System

BT50-FBC 50-85+TBR130-BCC1348+CCMT1204 □□

Spindle
Balance cut tool for finish boring
Max. Chucking dia.
Length
Rail
Cartridge
Insert

▶ FBC Boring Tool structure & Features

FBC Compositions

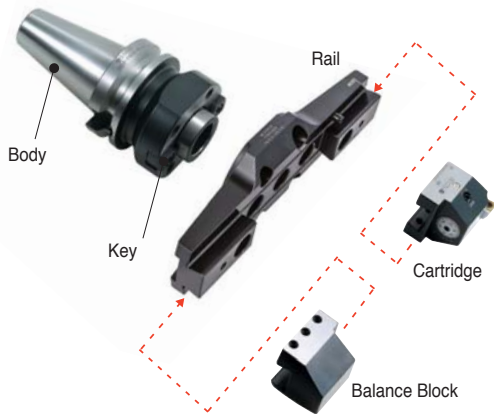


▶ FBC Boring Tool Cutting condition

Grade	Dia(Ø)		Head Set	Insert
	min	max		
FBC130	130	180	FBC130S(TBR130+FCC130+FCB130)	FBB130-C09 (CCMT09T3□□, CCGT09T3□□ FBB130-C12 (CCMT1204□□) FBB130-T11 (TPMT1103□□,TPGT1103□□L)
FBC175	175	225	FBC175S(TBR175+FCC130+FCB130)	
FBC220	220	270	FBC220S(TBR220+FCC130+FCB130)	
FBC265	265	315	FBC265S(TBR265+FCC130+FCB130)	
FBC310	310	390	FBC310S(TBR310+FCC310+FCB310)	
FBC385	385	465	FBC385S(TBR385+FCC310+FCB310)	
FBC460	460	540	FBC460S(TBR460+FCC310+FCB310)	



TBC, FBC

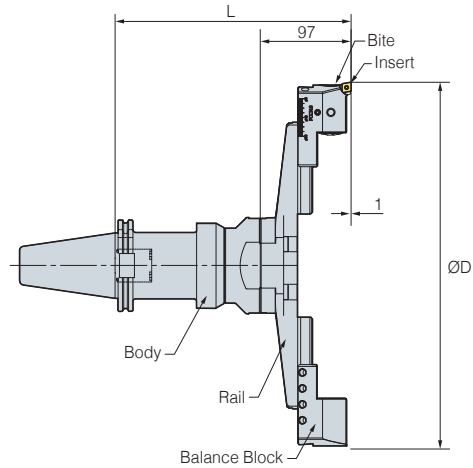

(mm)

Body	Designation									Boring Range	
	kg	Rough Boring (TBC)			Finish Boring (FBC)					Min	Max
		TBC HEAD SET (Rail+Cartridge)	L	kg	FBC HEAD SET (Rail+Cartridge+Balance Block)	L	kg				
BT50 - FMD50 - 85	5.9	TBC130S(TBR130+BCC1348)	175	3.5	FBC130S(TBR130+FCC130+FCB130)	182	3.8	130	180		
	155	TBC130S(TBR130+BCC1348)	245	3.5	FBC130S(TBR130+FCC130+FCB130)	252	3.8	130	180		
	205	TBC130S(TBR130+BCC1348)	295	3.5	FBC130S(TBR130+FCC130+FCB130)	302	3.8	130	180		
	255	TBC130S(TBR130+BCC1348)	345	3.5	FBC130S(TBR130+FCC130+FCB130)	352	3.8	130	180		
	85	TBC175S(TBR175+BCC1348)	175	3.9	FBC175S(TBR175+FCC130+FCB130)	182	4.1	175	225		
	155	TBC175S(TBR175+BCC1348)	245	3.9	FBC175S(TBR175+FCC130+FCB130)	252	4.1	175	225		
	205	TBC175S(TBR175+BCC1348)	295	3.9	FBC175S(TBR175+FCC130+FCB130)	302	4.1	175	225		
	255	TBC175S(TBR175+BCC1348)	345	3.9	FBC175S(TBR175+FCC130+FCB130)	352	4.1	175	225		
	85	TBC220S(TBR220+BCC1348)	175	4.3	FBC220S(TBR220+FCC130+FCB130)	182	4.5	220	270		
	155	TBC220S(TBR220+BCC1348)	245	4.3	FBC220S(TBR220+FCC130+FCB130)	252	4.5	220	270		
	205	TBC220S(TBR220+BCC1348)	295	4.3	FBC220S(TBR220+FCC130+FCB130)	302	4.5	220	270		
	255	TBC220S(TBR220+BCC1348)	345	4.3	FBC220S(TBR220+FCC130+FCB130)	352	4.5	220	270		
	85	TBC265S(TBR265+BCC1348)	175	4.5	FBC265S(TBR265+FCC130+FCB130)	182	4.6	265	315		
	155	TBC265S(TBR265+BCC1348)	245	4.5	FBC265S(TBR265+FCC130+FCB130)	252	4.6	265	315		
	205	TBC265S(TBR265+BCC1348)	295	4.5	FBC265S(TBR265+FCC130+FCB130)	302	4.6	265	315		
	255	TBC265S(TBR265+BCC1348)	345	4.5	FBC265S(TBR265+FCC130+FCB130)	352	4.6	265	315		
	85	TBC310S(TBR310+BCC1354)	175	5.5	FBC310S(TBR310+FCC130+FCB130)	182	5.5	310	390		
	155	TBC310S(TBR310+BCC1354)	245	5.5	FBC310S(TBR310+FCC130+FCB130)	252	5.5	310	390		
	205	TBC310S(TBR310+BCC1354)	295	5.5	FBC310S(TBR310+FCC130+FCB130)	302	5.5	310	390		
	255	TBC310S(TBR310+BCC1354)	345	5.5	FBC310S(TBR310+FCC130+FCB130)	352	5.5	310	390		
	85	TBC385S(TBR385+BCC1354)	175	5.8	FBC385S(TBR385+FCC130+FCB130)	182	5.8	385	465		
	155	TBC385S(TBR385+BCC1354)	245	5.8	FBC385S(TBR385+FCC130+FCB130)	252	5.8	385	465		
	205	TBC385S(TBR385+BCC1354)	295	5.8	FBC385S(TBR385+FCC130+FCB130)	302	5.8	385	465		
	255	TBC385S(TBR385+BCC1354)	345	5.8	FBC385S(TBR385+FCC130+FCB130)	352	5.8	385	465		
	85	TBC460S(TBR460+BCC1354)	175	12.8	FBC460S(TBR460+FCC130+FCB130)	182	12.8	460	540		
	155	TBC460S(TBR460+BCC1354)	245	12.8	FBC460S(TBR460+FCC130+FCB130)	252	12.8	460	540		
	205	TBC460S(TBR460+BCC1354)	295	12.8	FBC460S(TBR460+FCC130+FCB130)	302	12.8	460	540		
	255	TBC460S(TBR460+BCC1354)	345	12.8	FBC460S(TBR460+FCC130+FCB130)	352	12.8	460	540		



FBB FBB Bite



(mm)

Designation	Insert
FBB130 - C09	CCMT09T3□□, CCGT09T3□□
C12	CCMT1204□□
T11	TPMT1103□□, TPGT1103□□

• TBC and DBC cartridges with tip angle of 15° / 45° can be purchased by order. (45° basis)

▶ Parts

Arbor	Spare Parts								
	Basic								
	Rail	Cartridge	Cartridge	Clamp Bolt	Clamp Bolt	Balance Block	Wrench	Clamp Screw	Torx Wrench
Type									
TBC130S	TBR130	BCC1348	-	BX0820	BT0645	-	LW-3	BFTX0511N	TW20
TBC175S	TBR175								
TBC220S	TBR220								
TBC265S	TBR265								
TBC310S	TBR310	BCC1354 (BCN1354)	-	BX0820	BT0660	-	LW-3	-	-
TBC385S	TBR385								
TBC460S	TBR460	-	FCC130	BX0820	BT0645	FCB130	LW-3	-	-
FBC130S	TBR130								
FBC175S	TBR175								
FBC220S	TBR220								
FBC265S	TBR265		FCC310		BT0660	FCB310			
FBC310S	TBR310								
FBC385S	TBR385								
FBC460S	TBR460								



BT-DBC

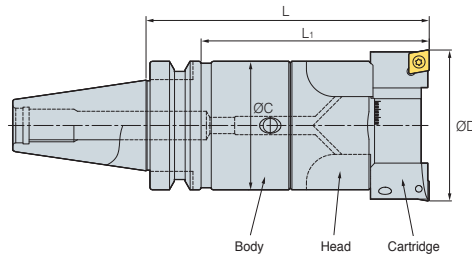


Fig. 1

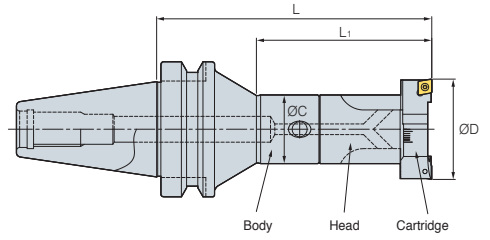


Fig. 2

(mm)


Micro Boring Head	kg	Designation Body (Basic Holder)	kg	Boring Range ØD		L	Max. Boring Depth	Fig.
				Min	Max			
DBC2528S	0.3	BT30-MD25F-90R	0.4	28	35	140	93	2
DBC3235S	0.4	BT30-MD32F-80R	0.4	35	46	145	114	2
DBC4046S	0.6	BT30-MD40F-80R	0.5	46	58	150	119	2
DBC5058S	1.1	BT30-MD50F-70	0.8	58	74	150	128	1
DBC2528S	0.3	BT40-MD25F-105R	1.9	28	35	165	100	2
DBC3235S	0.4	BT40-MD32F-115R	2.4	35	46	180	110	2
DBC4046S	0.6	BT40-MD40F-110R	2.7	46	58	180	130	2
DBC5058S	1.1	BT40-MD50F-100R	2.7	58	74	180	130	1
DBC6374S	2.0	BT40-MD63F-90	3.6	74	94	180	150	2
DBC8094S	3.5	BT40-MD80F-100	4.8	94	120	200	173	2
DBC2528S	0.3	BT50-MD25F-120R	4.7	28	35	180	100	2
DBC3235S	0.4	BT50-MD32F-235R	5.3	35	46	300	180	2
DBC4046S	0.6	BT50-MD40F-230R	5.6	46	58	300	250	2
DBC5058S	1.1	BT50-MD50F-250R	6.5	58	74	330	280	2
DBC6374S	2.0	BT50-MD63F-240R	8.4	74	94	330	280	2
DBC8094S	3.5	BT50-MD80F-175	9.5	94	120	275	225	1
DBC120S	5.3	BT50-MD80F-175	9.5	120	175	275	235	1

Parts

Division	Spare Parts								
	Basic								
	Head	Spring Pin	Wrench Bolt	Wrench	Cartridge	Set Screw	Wrench	Clamp Screw	Torx Wrench
Type									
DBC2528S	DBC2528	SP0308	BX0415	LW-3	BCC28	BT0306	LW-1.5	FTKA02565	TRX7
DBC3235S	DBC3235	SP0410	BX0515	LW-4	BCC35	BT0308			
DBC4046S	DBC4046	SP0516	BX0620	LW-5	BCC46	BT0410	LW-2	FTNA0408	TRX15
DBC5058S	DBC5058	SP0616			BCC58	BT0412			
DBC6374S	DBC6374	SP1018	BX0830	LW-6	BCC74	BT0516	LW-2.5	BFTX0511N	TRX20
DBC8094S	DBC8094	SP1020	BX1035	LW-8	BCC94	BT0620			
DBC120S	DBC120N	SP1020	BX0830	LW-6.0	BCC120	BT0830	LW-4.0	BFTX0511N	TRX20



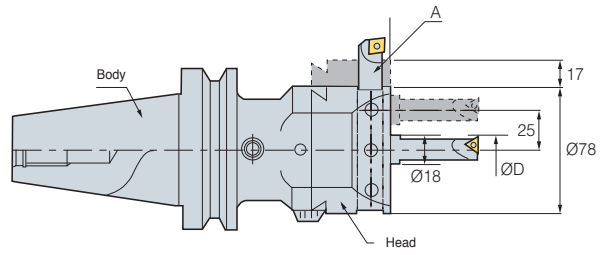

BT-KMB Micro Boring



1DIV=Ø0.02mm


(mm)

Designation	Head (Modular)	Boring Bite	L	L ₁	
BT40 - MD63F - 64	KMB6336	BB18-□(S)	141	64	5.5
BT50 - MD63F - 75	KMB6336	BB18-□(S)	152	75	7.0

Boring Head	Bite	MD NO.	L	
KMB6336	BB18-□(S)	BT□□-MD63F	77	2.2

• Through coolant system is optional.



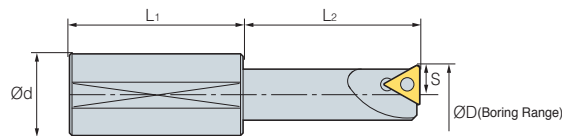


▶ Boring Bite : BBtype(for KMB)



(mm)


Designation	Boring Range(Center)		Boring Range(Side)		S	L ₁	L ₂	Insert	Insert Screw	
	Min	Max	Min	Max						
BB	18-7(S)	7	40	43	91	3.5	30	30	TBGT0601□□L	BFTX0204A
	18-9(S)	9	42	45	93	4.5	30	40	TPGT0802□□L	BFTX0204A
	18-11(S)	11	44	47	95	5.5	30	45	TPGT1103□□L	BFTX0307A
	18-13(S)	13	46	49	97	6.5	40	45	TPGT1103□□L	BFTX0307A
	18-15(S)	15	48	51	99	7.5	40	50	TPGT1103□□L	BFTX0307A
	18-17(S)	17	50	53	101	8.5	40	50	TPGT1103□□L	BFTX0307A

▶ Parts

Division	Spare Parts				
	Basic			Option	
	Boring Head	Taper Screw	Wrench	Boring Bite	Basic Holder
Type					
KMB	KMB6336	BTT1620F	LW-8	BB18	MD63F



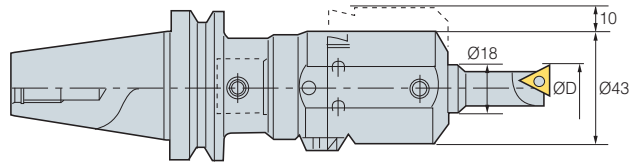

BT-SMB Small Micro Boring Bar



1DIV=Ø0.02mm


(mm)

Designation	Head (Modular)	Boring Bite	L	L ₁	
BT40 - MD40F - 60	SMB4022	BB18-O(S)	122.5	60	2.8
BT50 - MD40F - 60	SMB4022	BB18-O(S)	122.5	60	5.4

Boring Head	Bite	MD NO.	L	
SMB4022	BB18-O(S)	BTOO-MD40T	62.5	0.6

• Through coolant system not available



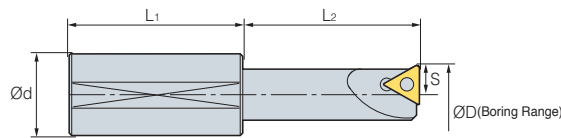


▶ Boring Bite : BBtype(for SMB)



(mm)


Designation	Boring Range		S	L ₁	L ₂	Insert	Insert Screw
	Min	Max					
BB 18-7(S)	7	27	3.5	30	30	TBGT0601□□L	BFTX0204A
18-9(S)	9	29	4.5	30	40	TPGT0802□□L	BFTX0204A
18-11(S)	11	31	5.5	30	45	TPGT1103□□L	BFTX0307A
18-13(S)	13	33	6.5	40	45	TPGT1103□□L	BFTX0307A
18-15(S)	15	35	7.5	40	50	TPGT1103□□L	BFTX0307A
18-17(S)	17	37	8.5	40	50	TPGT1103□□L	BFTX0307A

▶ Parts

Division	Spare Parts				
	Basic			Option	
	Boring Head	Taper Screw	Wrench	Boring Bite	Basic Holder
Type					
SMB	SMB4022	BTT1013F	LW-5	BB18	MD40F



BT-SMH Small Micro Boring Bar (for High Precision)

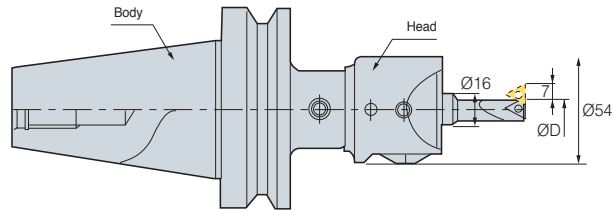


(mm)

Designation		Head (Modular)	Boring Bite	L	L ₁	kg
BT40 -	MD40F - 60	SMH4022	BB16-O(S)	109	60	3.0
BT50 -	MD40F - 60	SMH4022	BB16-O(S)	109	60	6.0

Boring Head	Bite	MD NO.	L	kg
SMH4022	BB18-O(S)	BTOO-MD40F	49	2.7

• Through coolant system not available

▶ Boring Bite : BBtype(for SMH)

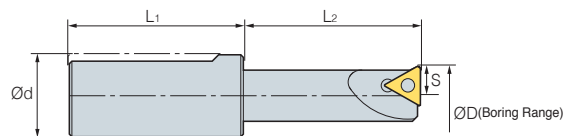

(mm)

Designation	Boring Range		S	L ₁	L ₂	Insert	Insert Screw	렌치
	Min	Max						
BB	16-5(S)	5.5 19	2.75	34	20	WBG0601□□L	BFTX0203A	TRX06
	16-7(S)	7 21	3.5	34	30	TBGT0601□□L	BFTX0204A	TRX06
	16-9(S)	9 23	4.5	34	40	TPGT0802□□L	BFTX0204A	TRX06
	16-11(S)	11 25	5.5	34	45	TPGT1103□□L	BFTX0307A	TRX10
	16-15(S)	15 29	7.5	34	50	TPGT1604□□L	BFTX0307A	TRX10
	16-19(S)	19 33	9.5	34	60	TPGT1103□□L	BFTX0410A	TRX15

▶ Parts


Division	Spare Parts				
	Basic			Option	
	Boring Head	Taper Screw	Wrench	Boring Bite	Basic Holder
Type					
SMH	SMH4022	BTT1013F	LW-5	BB16	MD40F



Versatile tooling system that can flexibly react to FMS

Modular System Series

- Versatile tooling system conforming to FMS specification.
- Flexible combination of tool units according to conditions of subject
- Joining with a specially designed screw provides high accuracy (error less than $5\mu\text{m}$) and ease of detach for one step setting.
- Cutting edge of boring system aligned with the groove of drive key.
- Corresponding accuracy and stiffness compared to uni-body type.

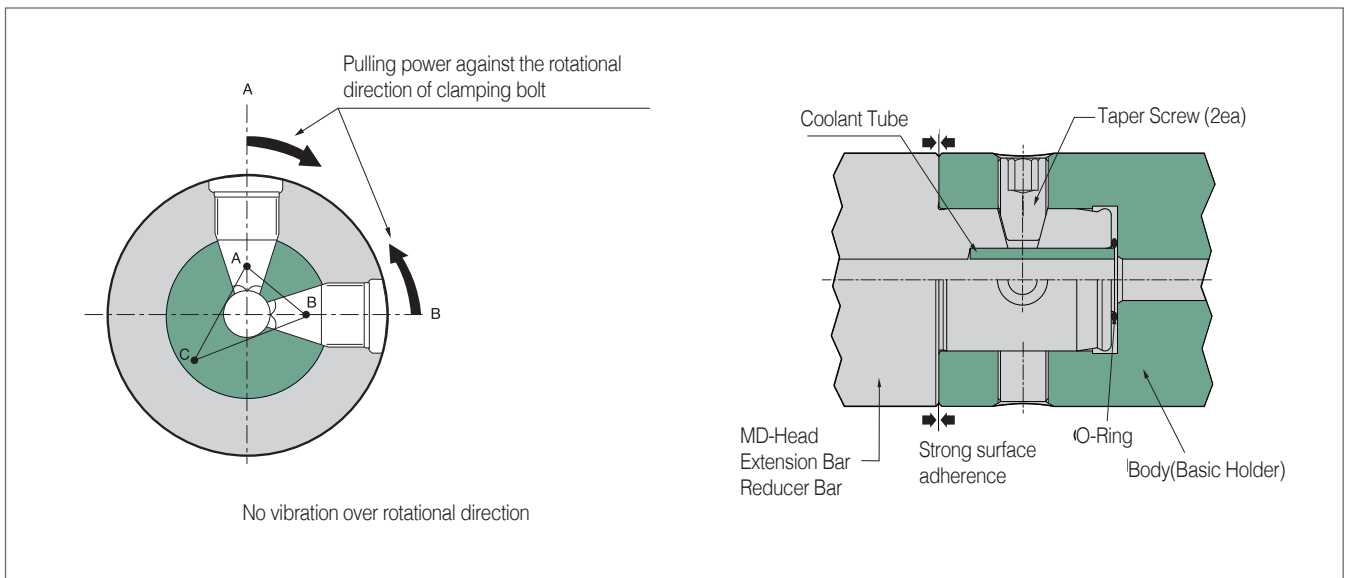

BT-MD

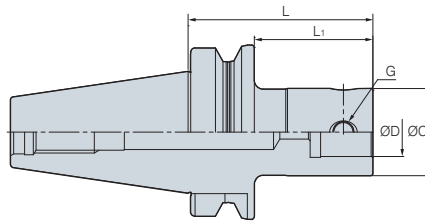


Fig. 1


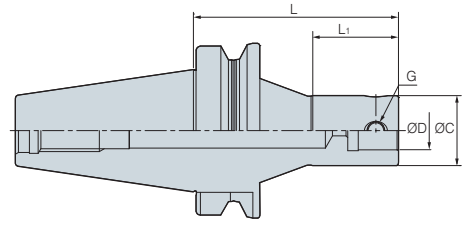



Fig. 2

(mm)

Designation	ØC	ØD	L	L ₁	G		Fig.	
BT30 -	MD19F - 70	19	11	70	45	M5	0.4	1
	MD25F - 90	25	14	90	63	M6	0.3	1
	MD32F - 80	32	18	80	55	M8	0.4	1
	MD40F - 45	40	22	45	22	M8	0.4	1
	MD40F - 60	40	22	60	36	M10	0.5	1
	MD40F - 80	40	22	80	56	M10	0.5	1
	MD50F - 70	50	28	70	48	M12	0.8	3
BT40 -	MD19F - 70	19	11	70	40	M5	1.8	1
	MD25F - 95	25	14	95	63	M6	1.9	1
	MD25F - 105R	25	14	105	40	M6	1.9	2
	MD32F - 100	32	18	100	70	M8	2.3	1
	MD32F - 115R	32	18	115	45	M8	2.4	2
	MD40F - 60	40	22	60	31	M10	2.7	1
	MD40F - 110R	40	22	110	60	M10	2.7	2
	MD40F - 115	40	22	115	83	M10	2.7	1
	MD50F - 105	50	28	105	73	M12	2.7	1
	MD63F - 64	63	36	64	37	M16	3.3	1
	MD63F - 110	63	36	110	83	M16	3.6	1
	MD63F - 135	63	36	135	108	M16	4.6	1
	MD80F - 100	80	45	100	73	M16	4.8	3
BT50 -	MD19F - 85	19	11	85	44	M5	4.3	1
	MD25F - 105	25	14	105	62	M6	4.5	1
	MD25F - 120R	25	14	120	40	M6	4.7	2
	MD32F - 110	32	18	110	67	M8	5.1	1
	MD32F - 115R	32	18	115	45	M8	5.1	2
	MD32F - 235R	32	18	235	115	M8	5.3	2
	MD40F - 60	40	22	60	22	M10	5.0	1
	MD40F - 195	40	22	195	152	M10	5.4	1
	MD40F - 230R	40	22	230	180	M10	5.6	2
	MD50F - 125	50	28	125	82	M12	6.0	1
	MD50F - 225	50	28	225	182	M12	6.4	1
	MD50F - 250R	50	28	250	81	M12	6.5	2
	MD63F - 75	63	36	75	35	M16	6.0	1
	MD63F - 130	63	36	130	87	M16	6.8	1
	MD63F - 195	63	36	195	152	M16	8.0	1
	MD63F - 230	63	36	230	187	M16	8.4	1
	MD80F - 75	80	45	75	36	M16	9.1	1
	MD80F - 110	80	45	110	69	M16	9.4	1
	MD80F - 175	80	45	175	134	M16	9.5	1
	MD90F - 75	90	45	75	34	M16	9.3	1
	MD90F - 145	90	45	145	104	M16	9.9	1
MD90F - 195	90	45	195	154	M16	10.2	1	



HSK-MD

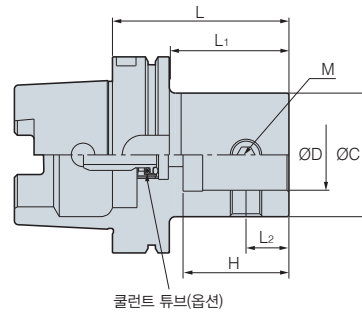



(mm)

Designation	ØC	ØD	L	L ₁	L ₂	H	M	
HSK 63A -	MD19F - 60	19	11	60	34	6.5	15.5	M5
	MD25F - 60	25	14	60	31	8	18.5	M6
	MD32F - 65	32	18	65	31	11	23.5	M8
	MD40F - 70	40	22	70	41	13	29	M10
	MD50F - 85	50	28	85	58	17	36	M12
	MD63F - 95	63	36	95	69	22	54	M16


• Through coolant system available

Parts

Division	Spare Parts	
	Basic	Option
	Taper Screw	Wrench
Type		
MD19F	BTT0506F	LW-2.5
MD25F	BTT0608F	LW-3
MD32F	BTT0810F	LW-4
MD40F	BTT1013F	LW-5
MD50F	BTT1215F	LW-6
MD63F	BTT1620F	LW-8
MD80F	BTT1626F	LW-8
MD90F	BTT1631F	LW-8



EXT Extension Bar

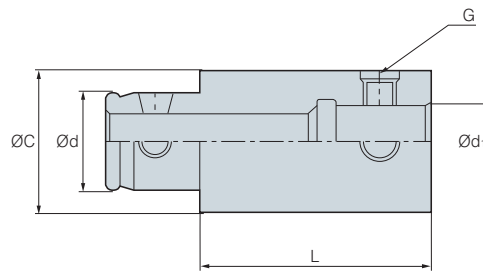


(mm)

Designation	ØC	Ød	L	Ød ₁	G
EXT - 1930F	19	11	30	11	M5
1950F	19	11	50	11	M5
2530F	25	14	30	14	M6
2550F	25	14	50	14	M6
3235F	32	18	35	18	M8
3260F	32	18	60	18	M8
4040F	40	22	40	22	M10
4090F	40	22	90	22	M12
5050F	50	28	50	28	M12
50100F	50	28	100	28	M12
6360F	63	36	60	36	M16
63120F	63	36	120	36	M16
8070F	80	45	70	45	M16
80120F	80	45	120	45	M16
9080F	90	45	80	45	M16
90130F	90	45	130	45	M16

• Through coolant system available



RDC Reducer Bar

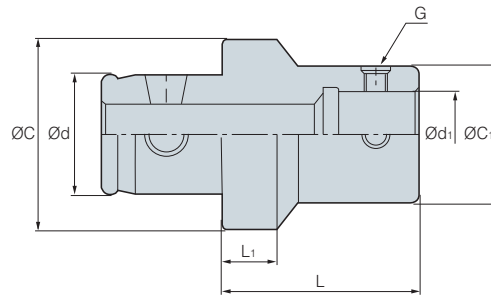




(mm)

Designation	Ød	ØC1	Ød1	ØC	L	L1	G
RDC - 3225F	18	25	14	32	30	9	M6
4025F	22	25	14	40	30	9	M6
4032F	22	32	18	40	30	9	M8
5025F	28	25	14	50	30	9	M6
5032F	28	32	18	50	30	9	M8
5040F	28	40	22	50	40	10	M10
6325F	36	25	14	63	30	9	M6
6332F	36	32	18	63	30	9	M8
6340F	36	40	22	63	40	10	M10
6350F	36	50	28	63	45	10	M12
8032F	45	32	18	80	30	9	M6
8040F	45	40	22	80	40	10	M10
8050F	45	50	28	80	45	10	M12
8063F	45	63	36	80	50	13	M16

• Through coolant system available

Parts

Division	Spare Parts		
	Basic		Option
	Taper Screw	Spring Pin	Wrench
Type			
MD19F	BTT0506F	-	LW-2.5
MD25F	BTT0608F	SP0308	LW-3
MD32F	BTT0810F	SP0410	LW-4
MD40F	BTT1013F	SP0516	LW-5
MD50F	BTT1215F	SP0616	LW-6
MD63F	BTT1620F	SP0818	LW-8
MD80F	BTT1626F	SP1020	LW-8
MD90F	BTT1631F	SP1020	LW-8





KORLOY Anti-Vibration Tool

KORLOY DAMPING PRO

- The application of a special design provides an excellent Anti-Vibration effect and is optimized for Overhang work
- Capable to elevate Feed comparing to standard arbor with stable machining
- Longer tool life and noise decrease
- Provides a solution for Mold, Deep Cavity machining, and Heavy-duty work

▶ Code System



KORLOY DAMPING PRO

Arbor Taper

BT Type
HSK Type
SK Type

FMA : JIS B4113 Face milling

FMB : T-MAX Face milling / Shoulder Cutter

FMC : T-MAX Face milling / Shoulder Cutter

Length of gauge line

▶ Features




- ▶ Anti-Vibration : Exclusively designed Anti-Vibration structure
- ▶ Material : Special alloy steel
- ▶ Anti-Vibration body : Application of High density damper
- ▶ Overhang : Capable for 2D ~ 5D
- ▶ Coolant : Inner coolant is capable

▶ Size : Various types and sizes are applicable



BT Type





HSK Type



SK Type



▶ Comparison of Vibration damping time

Standard Arbor

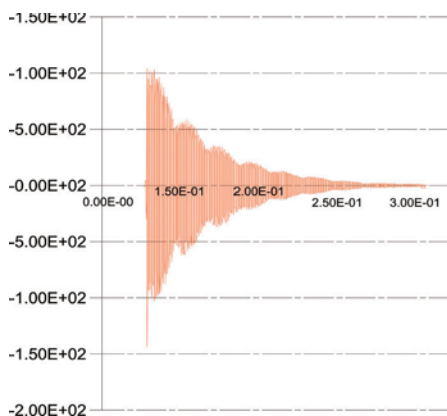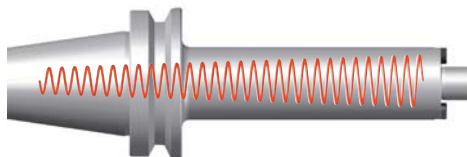

Longer Vibration damping time / Chattering is caused while Overhang work


KORLOY DAMPING PRO

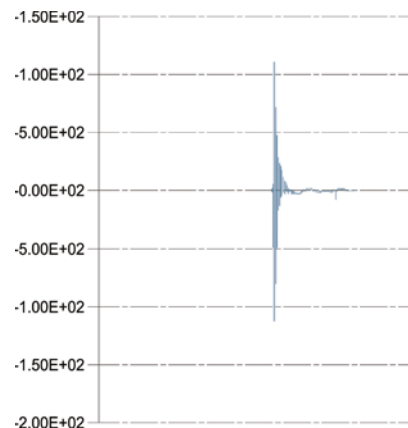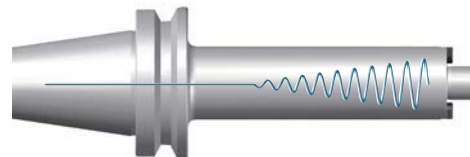


Short Vibration damping time / Performance is 2~3 times better than standard arbor



Features

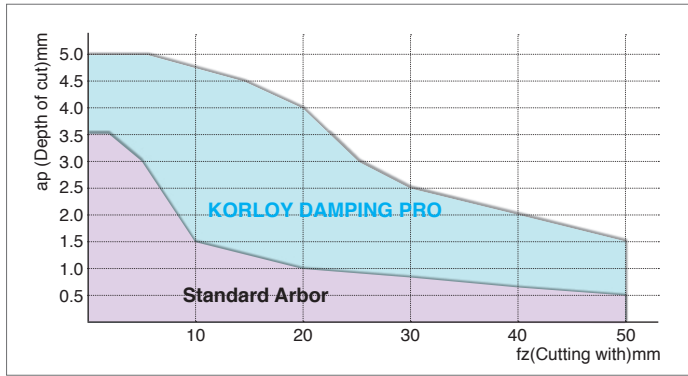

Cutting condition : fz(mm/t) = 0.1
vc(m/min) = 100
CUTTER : AMC4063HS 6flute
Arbor : BT50-FMC22-210 General arbor
KDP-BT50-FMC22-210

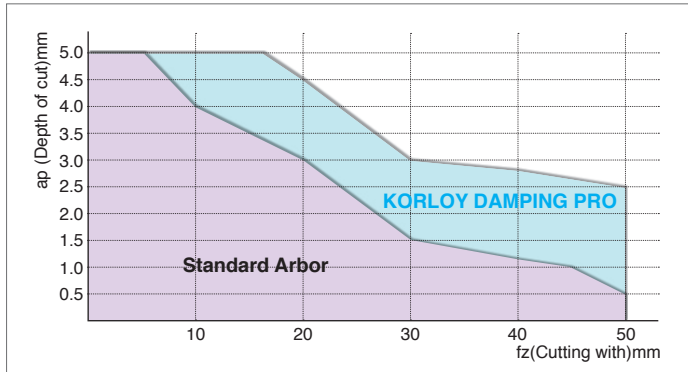

Cutting condition : fz(mm/t) = 0.1
vc(m/min) = 100
CUTTER : FMRC3063HRD-H 6flute
Arbor : BT50-FMC22-210 General arbor
KDP-BT50-FMC22-210

Application Example

Mold machining



Better productivity than general arbor

Side milling cutter machining



Excellent performance in the deep grooving

Facing for long depth



Better productivity and surface roughness than General arbor

Deep-hole Boring machining



Better surface roughness and machinability than General arbor

Side milling cutter machining example

- Faulty occurrence on size and surface roughness by the vibration, when use the general arbor
- **Using DAMPING PRO, good size and surface roughness**

Big size Crankshaft machining example

- General arbor : ap=2mm
- KORLOY DAMPING PRO : ap=4mm available
- **2 times better productivity**



General arbor

Cutting condition :
vc(m/min) = 50
fz(mm/t) = 0.1
ae(mm) = 20

DAMPING PRO

Cutting condition :
vc(m/min) = 100
fz(mm/t) = 0.1
ae(mm) = 20



General arbor

Cutting condition :
vc(m/min) = 100
fz(mm/t) = 0.15
ap(mm) = 2

DAMPING PRO

Cutting condition :
vc(m/min) = 100
fz(mm/t) = 0.15
ap(mm) = 4



BT-FMA

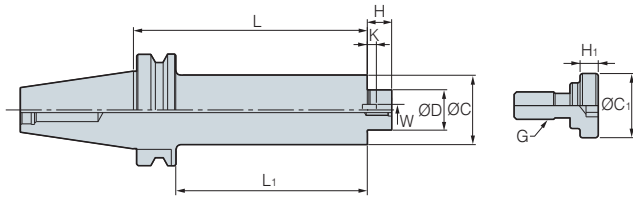


Fig. 1

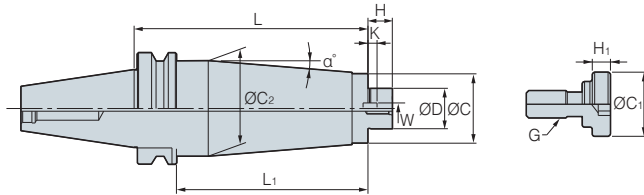








Fig. 2

Designation		Cutter Dia.	ØD	L	L ₁	ØC	ØC ₂	H	W	K	G	ØC ₁	H ₁	 /kg	Fig.	α°
KDP-BT40 -	FMA25.4 - 210	80	25.4	210	183	50	60	22	9.5	5	M12	33	10	5.42	2	1
	FMA25.4 - 260	80	25.4	260	233	50	60	22	9.5	5	M12	33	10	6.5	2	1.1
	FMA31.75 - 210	100	31.75	210	183	60	-	30	12.7	7	M16	40	10	5.94	1	-
	FMA31.75 - 260	100	31.75	260	233	60	-	30	12.7	7	M16	40	10	7.25	1	-
KDP-BT50 -	FMA25.4 - 210	80	25.4	210	172	50	78	22	9.5	5	M12	33	10	9.63	2	4
	FMA25.4 - 260	80	25.4	260	222	50	78	22	9.5	5	M12	33	10	11.8	2	3
	FMA31.75 - 210	100	31.75	210	172	60	85	30	12.7	7	M16	40	10	11.8	2	3
	FMA31.75 - 260	100	31.75	260	222	60	85	30	12.7	7	M16	40	10	13.6	2	2.5

- The A type is for JIS B4113 Face milling.
- The B type and C type are arbors for T-MAX Face Milling and shoulder Cutter .
- The weight(kg) shown in the chart does not include the weight of face cutter.
 - Key and screw are clamped.
 - Wrench is separately sold.

Parts

Arbor	Spare Parts				
	Basic				Option
	Key	Clamp Bolt	Wrench Bolt	Wrench Bolt	Wrench
Type					
FMA25.4	K9.5(B)	MBA-M12	BX0412	BX1225	LW-10
FMA31.75	K12.7(D)	MBA-M16	BX0515	-	LW-14

BT-FMC

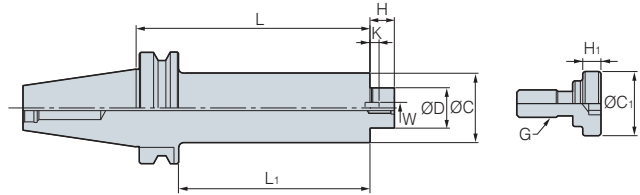


Fig. 1

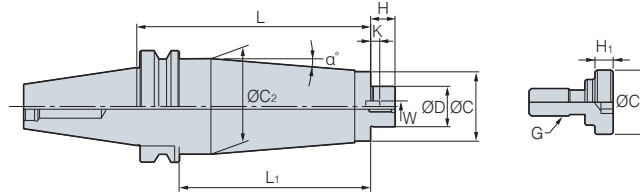


Fig. 2

(mm)

Designation	Cutter Dia.	ØD	L	L ₁	ØC	ØC ₂	H	W	K	G	kg	Fig.	α°	
KDP-BT40 -	FMC16 - 160	40	16	160	133	38	-	17	8	5	M8	2.45	1	-
	FMC22 - 210	50/63	22	210	183	48	4.95	19	10	5.6	M10	4.37	2	0.1
	FMC22 - 260	50/63	22	260	233	48	60	19	10	5.6	M10	6.3	2	1.5
	FMC27 - 210	80	27	210	183	60	-	21	12	6.3	M12	6	1	-
	FMC27 - 260	80	27	260	233	60	-	21	12	6.3	M12	7.25	1	-
KDP-BT50 -	FMC16 - 171	40	16	171	133	38	-	17	8	5	M8	5.1	1	-
	FMC22 - 210	50/63	22	210	172	48	49.5	19	10	5.6	M10	7.3	2	0.1
	FMC22 - 260	50/63	22	260	222	48	62	19	10	5.6	M10	10	2	1
	FMC27 - 210	80	27	210	172	60	78	21	12	6.3	M12	10.6	2	2.5
	FMC27 - 260	80	27	260	222	60	78	21	12	6.3	M12	12.6	2	2
	FMC27 - 320	80	27	320	282	60	78	21	12	6.3	M12	14.8	2	1
	FMC32 - 210	100	32	210	172	78	-	24	14	7	M16	11.7	1	-
	FMC32 - 260	100	32	260	222	78	-	24	14	7	M16	14.2	1	-
FMC32 - 330	100	32	330	292	78	-	24	14	7	M16	16.6	1	-	

- The A type is for JIS B4113 Face milling.
- The B type and C type are arbors for T-MAX Face Milling and shoulder Currer .
- The weight(kg) shown in the chart does not include the weight of face cutter.
- Key and screw are clamped.
- Wrench is separately sold.

Parts

Arbor	Spare Parts				
	Basic				Option
	Key	Clamp Bolt	Wrench Bolt	Wrench Bolt	Wrench
Type					
FMC16	K8.0(A)	-	BX0310	BX0820	LW-6
FMC22	K10.0(C)	-	BX0412	BX1030	LW-8
FMC27	K12.0	MBA-M12	BX0616	-	LW-10
FMC32	K14.0	MBA-M16	BX0820	-	LW-14



HSK-FMA

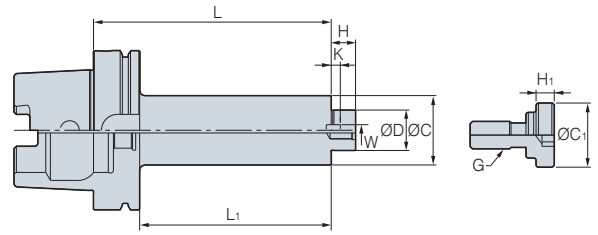


Fig. 1

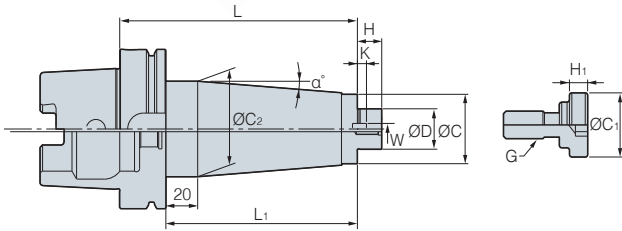


Fig. 2

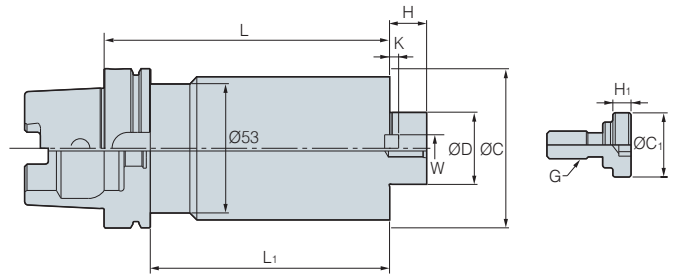


Fig. 3

Designation		Cutter Dia.	ØD	L	L ₁	ØC	ØC ₂	H	W	K	G	ØC ₁	H ₁	kg	Fig.	α°
KDP-HSK63 -	FMA25.4 - 210	80	25.4	210	184	50	53	22	9.5	5	M12	33	10	4.55	3	0.1
	FMA25.4 - 260	80	25.4	260	234	50	53	22	9.5	5	M12	33	10	5.6	3	0.1
	FMA31.75 - 210	100	31.75	210	184	60	-	30	12.7	7	M16	40	10	5.52	2	-
	FMA31.75 - 260	100	31.75	260	234	60	-	30	12.7	7	M16	40	10	6.9	2	-
KDP-HSK100 -	FMA25.4 - 210	80	25.4	210	181	50	78	22	9.5	5	M12	33	10	8.32	3	4
	FMA25.4 - 260	80	25.4	260	231	50	78	22	9.5	5	M12	33	10	10.5	3	3
	FMA31.75 - 210	100	31.75	210	181	60	85	30	12.7	7	M16	40	10	10.9	3	3
	FMA31.75 - 260	100	31.75	260	231	60	85	30	12.7	7	M16	40	10	12.8	3	2.5

- The A type is for JIS B4113 Face milling.
- The B type and C type are arbors for T-MAX Face Milling and shoulder Cutter .
- The weight(kg) shown in the chart does not include the weight of face cutter.
 - Key and screw are clamped.
 - Wrench is separately sold.

Parts

Arbor	Spare Parts				
	Basic				Option
	Key	Clamp Bolt	Wrench Bolt	Wrench Bolt	Wrench
Type					
FMA25.4	K9.5(B)	MBA-M12	BX0412	BX1230	LW-10
FMA31.75	K12.7(D)	MBA-M16	BX0515	-	LW-14



HSK-FMC

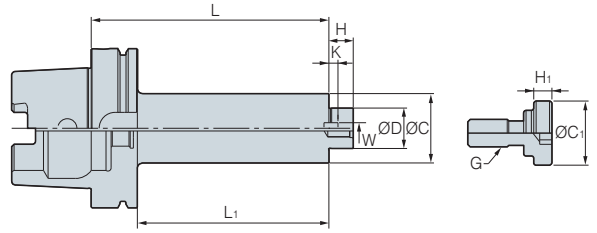


Fig. 1

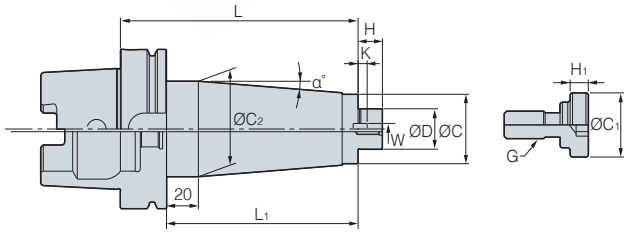


Fig. 2

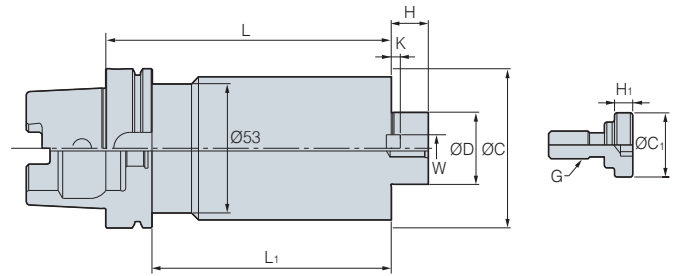


Fig. 3

Designation		Cutter Dia.	ØD	L	L ₁	ØC	ØC ₂	H	W	K	G	kg	Fig.	α°
KDP-HSK63 -	FMC16 - 160	40	16	160	134	38	-	17	8	5	M8	2.10	1	-
	FMC22 - 210	50/63	22	210	184	48	4.95	19	10	5.6	M10	3.82	1	0.1
	FMC22 - 260	50/63	22	260	234	48	62	19	10	5.6	M10	6.14	3	1.6
	FMC27 - 210	80	27	210	184	60	-	21	12	6.3	M12	5.53	2	-
	FMC27 - 260	80	27	260	234	60	-	21	12	6.3	M12	6.83	2	-
KDP-HSK100 -	FMC16 - 160	40	16	160	131	38	-	17	8	5	M8	3.45	1	-
	FMC22 - 210	50/63	22	210	181	48	49.5	19	10	5.6	M10	4.60	3	0.1
	FMC22 - 260	50/63	22	260	231	48	62	19	10	5.6	M10	8.10	3	1
	FMC27 - 210	80	27	210	181	60	78	21	12	6.3	M12	8.44	3	2.5
	FMC27 - 260	80	27	260	231	60	78	21	12	6.3	M12	10.40	3	2
	FMC27 - 320	80	27	320	291	60	78	21	12	6.3	M12	13.60	3	1
	FMC32 - 210	100	32	210	181	78	-	24	14	7	M16	10.20	1	-
	FMC32 - 260	100	32	260	231	78	-	24	14	7	M16	13.00	1	-
	FMC32 - 330	100	32	330	301	78	-	24	14	7	M16	15.43	1	-

(mm)

- The A type is for JIS B4113 Face milling.
- The B type and C type are arbors for T-MAX Face Milling and shoulder Curren .
- The weight(kg) shown in the chart does not include the weight of face cutter.
- Key and screw are clamped.
- Wrench is separately sold.

Parts

Arbor	Spare Parts				
	Basic				Option
	Key	Clamp Bolt	Wrench Bolt	Wrench Bolt	Wrench
Type					
FMC16	K8.0(A)	-	BX0310	BX0820	LW-6
FMC22	K10.0(C)	-	BX0412	BX1030	LW-8
FMC27	K12.0	MBA-M12	BX0616	-	LW-10
FMC32	K14.0	MBA-M16	BX0820	-	LW-14



SK-FMC

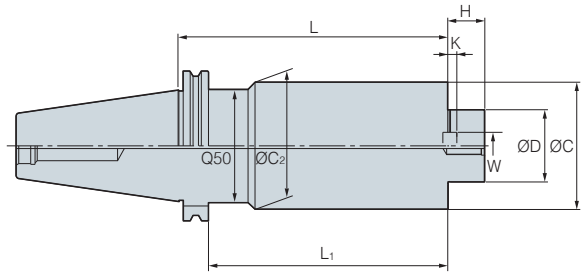


Fig. 1

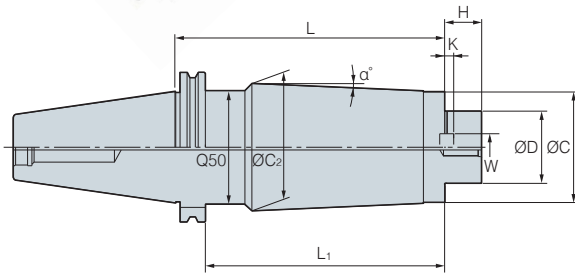


Fig. 2

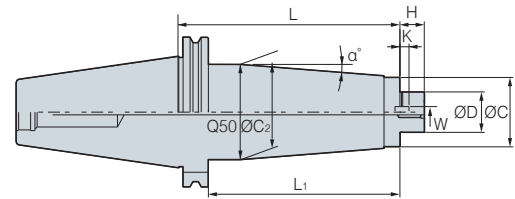








Fig. 3

Designation	Cutter Dia.	ØD	L	L ₁	ØC	ØC ₂	H	W	K	G		Fig.	α°	
KDP-SK40 -	FMC22 - 210	50/63	22	210	183.0	48	49.5	19	10	4.4	M10	4.4	3	0.1
	FMC22 - 260	50/63	22	260	233.0	48	60	19	10	5.6	M10	6.2	2	1.4
	FMC27 - 210	80	27	210	183.0	60	60	21	12	6.3	M12	5.9	1	-
	FMC27 - 260	80	27	260	233.0	60	60	21	12	6.3	M12	7.2	1	-
KDP-SK50 -	FMC22 - 210	50/63	22	210	190.9	48	49.5	19	10	5.6	M10	6.4	3	0.1
	FMC22 - 260	50/63	22	260	240.9	48	62	19	10	5.6	M10	9.1	3	1
	FMC27 - 210	80	27	210	190.9	60	78	21	12	6.3	M12	9.8	3	2.5
	FMC27 - 260	80	27	260	240.9	60	78	21	12	6.3	M12	12.4	3	1.8
	FMC27 - 320	80	27	320	300.9	60	78	21	12	6.3	M12	14.5	3	1.2
	FMC32 - 210	100	32	210	190.9	78	-	24	14	7	M16	11.5	1	-
	FMC32 - 260	100	32	260	240.9	78	-	24	14	7	M16	14	1	-
	FMC32 - 330	100	32	330	310.9	78	-	24	14	7	M16	16.4	1	-

(mm)


- The A type is for JIS B4113 Face milling.
- The B type and C type are arbors for T-MAX Face Milling and shoulder Curren .
- The weight(kg) shown in the chart does not include the weight of face cutter.
- Key and screw are clamped.
- Wrench is separately sold.

Parts

Arbor	Spare Parts				
	Basic				Option
	Key	Clamp Bolt	Wrench Bolt	Wrench Bolt	Wrench
Type					
FMC16	K8.0(A)	-	BX0310	BX0820	LW-6
FMC22	K10.0(C)	-	BX0412	BX1030	LW-8
FMC27	K12.0	MBA-M12	BX0616	-	LW-10
FMC32	K14.0	MBA-M16	BX0820	-	LW-14




BLK Blank Tool

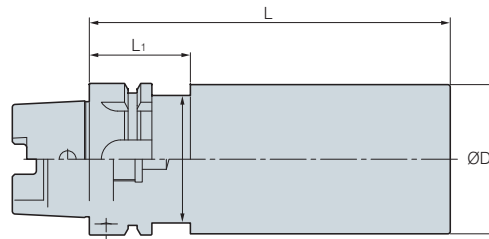

(mm)

Designation	Ød	ØC	L	L1
HSK40A - BLK42 - 180	42	34	180	35
HSK50A - BLK52 - 200	52	42	200	42
HSK63A -	BLK63 - 150	52	150	42
	BLK63 - 250	63	250	42
	BLK82 - 200	82	200	42
HSK100A -	BLK102 - 150	102	150	45
	BLK102 - 250	102	250	45
	BLK126 - 200	126	200	45
BT30 - BLK48 - 180	48	44	180	30
BT40 -	BLK63 - 150	63	150	35
	BLK63 - 250	63	250	35
	BLK82 - 200	82	200	35
BT50 -	BLK102 - 150	102	150	48
	BLK102 - 250	102	250	48
	BLK126 - 200	126	200	48

HT

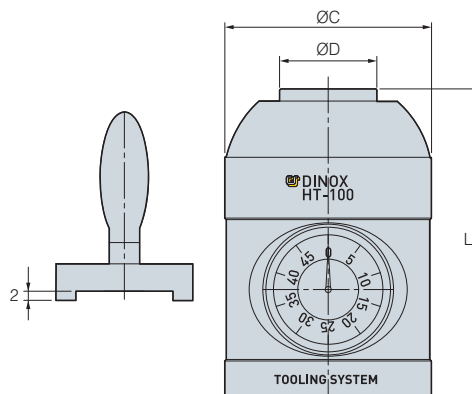

(mm)

Designation	ØD	ØC	L
HT-100	32	68	100

- Good for setting the Tool length at CNC machine
- No interference between height Touch setter and Tool makes safe work
- Location Accuracy : ± 0.003mm



SC Spindle Cleaner




(mm)

Designation	Taper	N.W.	G.W.
SC - BT30	BT30	0.06kg	0.08kg
BT40	BT40	0.07kg	0.1kg
BT50	BT50	0.16kg	0.2kg
HSK50	HSK50	0.08kg	0.12kg
HSK63	HSK63	0.1kg	0.13kg
HSK100	HSK100	0.5kg	0.7kg

Features

- ▶ Cleaning ships of taper wipe is made of lambskin.
It can clean inside slide of spindles to prevention of static electricity and to extend spindles and tapers durable life.

KCP


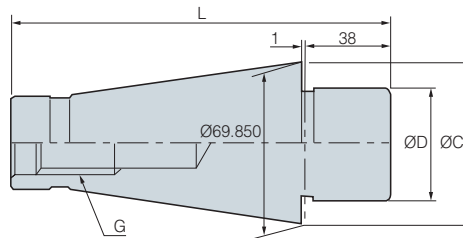


(mm)

Designation	Taper	Cutter Dia.	ØD	ØC	L	G
NTN 50 - KCP47.625	NT50	200(8"이상)	47.625	69.55	164.00	U1"-8(M24)
KCP60	NT50	200(8"이상)	60	69.55	164.00	M24



Pull Stud Bolt

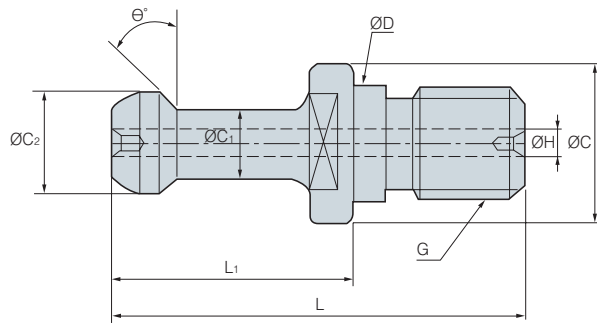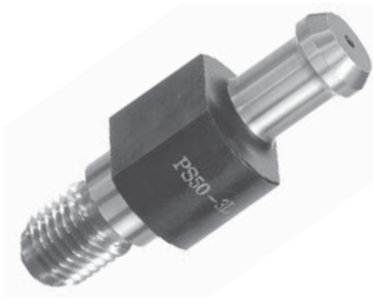

(mm)

Designation	ØD	ØC	ØC ₁	ØC ₂	L ₁	L	θ	G	ØH
P20T-1	8.5	12	6	8.5	17.5	31.5	15°	M8	
P30T-1	12.5	16.5	7	11	23	43	45°	M12	
P30T-1(Ø2.5)	12.5	16.5	7	11	23	43	45°	M12	Ø2.5
P30T-2	12.5	16.5	7	11	23	43	30°	M12	
P30T-2(Ø2.5)	12.5	16.5	7	11	23	43	30°	M12	Ø2.5
P40T-1	17	23	10	15	35	60	45°	M16	
P40T-1(3)	17	23	10	15	35	60	45°	M16	Ø3
P40T-2	17	23	10	15	35	60	30°	M16	
PS40-3F	17	23	10	15	35	60	0°	M16	
PS-G51	17	22	12.45	18.8	19.11	44.11	45°	M16	Ø7
DIN69872-A40	17	23	14	19	26	54	15°	M16	Ø7
DIN69872-B40	17	23	14	19	26	54	15°	M16	
JISB6339-A40(PS-806)	17	23	14	19	29	54	15°	M16	Ø7
JISB6339-B40(PS-805)	17	23	14	19	29	54	15°	M16	
P50T-1	25	38	17	23	45	85	45°	M24	
P50T-1(7)	25	38	17	23	45	85	45°	M24	Ø7
P50T-2	25	38	17	23	45	85	30°	M24	
PS50-1F	25	38	17	23	45	85	0°	M24	
PS50-1FH	25	38	17	23	45	85	0°	M24	Ø8
PS-G41	25	37	20.83	28.96	25.2	65.2	45°	M24	Ø10
DIN69872-A50	25	36	21	28	34	74	15°	M24	Ø11.5
P50T-1HS	25	38	17	23	45	85	45°	M24	Ø5.7




|||DAMPING PRO
Anti-Vibration Tool

KRUMHOLTZ
HSH 10



J

TOOLING EXAMPLES

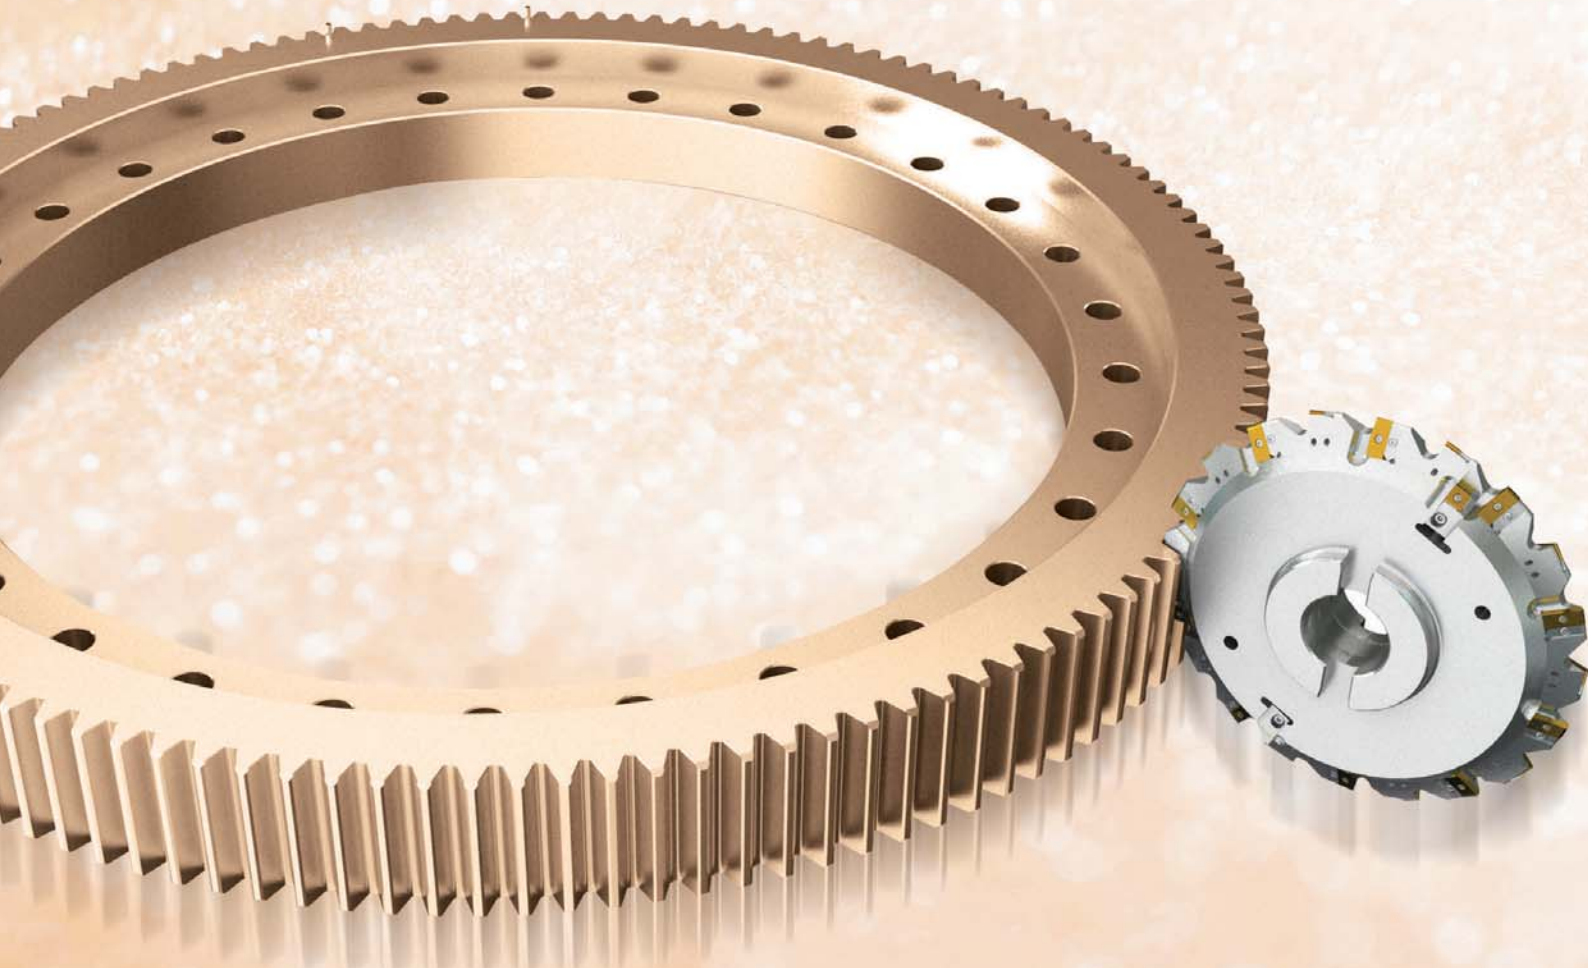


Industrial Tooling Example

- J02 Gear Machining Solution
- J04 Ship Building Industrial Solution
- J07 Role Machining Solution
- J08 Railway Industrial Solution
- J10 Pipe Industrial Solution
- J12 Bearing working Solution
- J13 Development Industrial Solution
- J14 Aviation Industrial Solution
- J18 Slitter Knife

Automobile Tooling Examples

- J19 Crankshaft
- J20 Knuckle
- J22 Brake
- J24 Connecting Rod
- J26 Block
- J28 Head

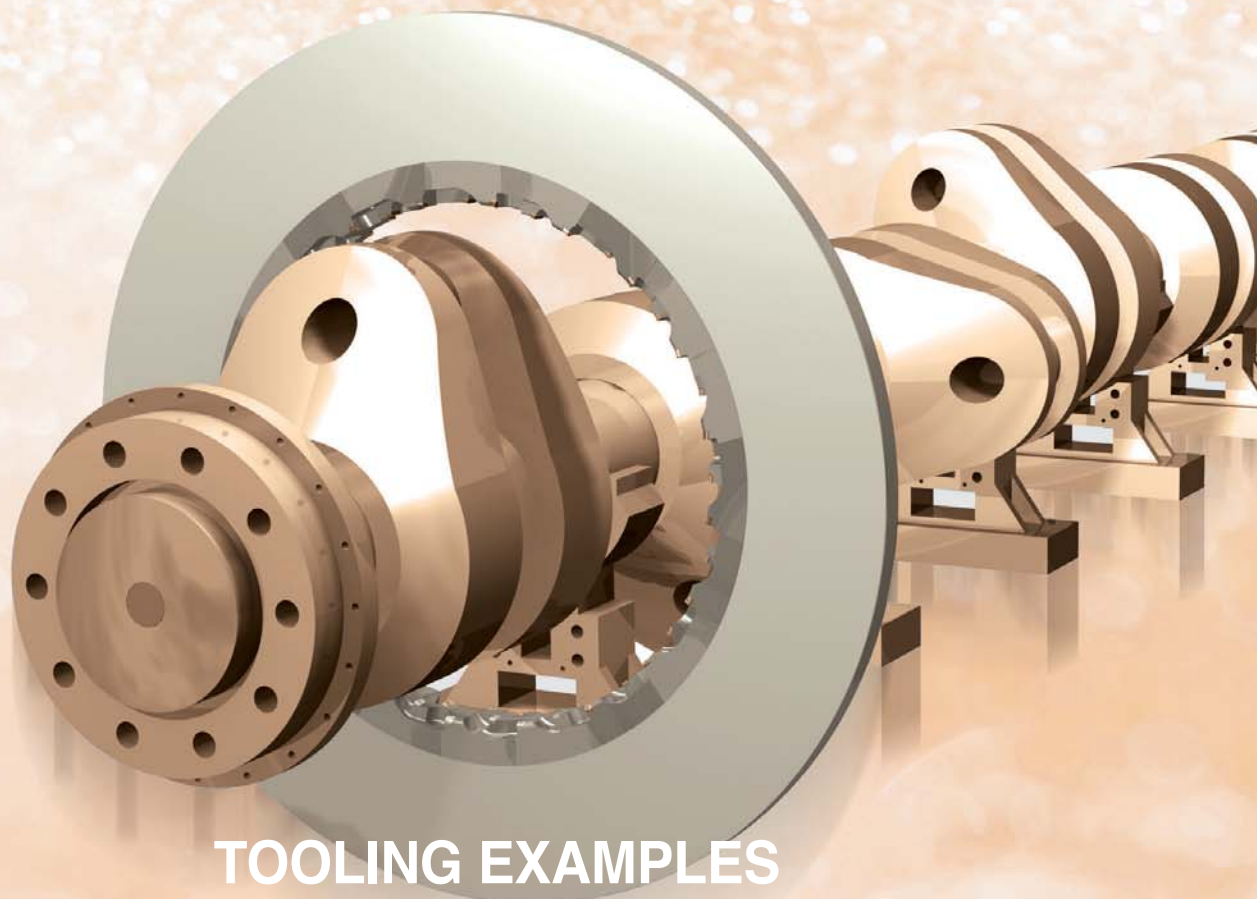

TOOLING EXAMPLES

Gear machining (External Gear)

▶ Cutter For Roughing



- Cutter diameter : $\varnothing 300$
- The Number of Edges : 60
- Available for High Speed working through controlled V-Style edges to reduce Cutting Force



▶ Cutter For Medium



- Cutter diameter : $\varnothing 280$
- The Number of Edges : 48
- Available for High Efficiency and Long Life and high productivity through Korloy's own insert shape
- Made R part of gear by proper designed 'R'-shape of insert



▶ Cutter For Finishing: M20




- Cutter diameter : $\varnothing 400$
- The Number of Edges : 20
- Gear cutter for Medium is realized on the 4 grade of precision. (KS, JS)
- Chamfering system available for machining efficiency



▶ Hob Cutter



- Cutter diameter : $\varnothing 350$
- The Number of Edges : 100
- Indexable Hob for roughing worked by generating cutting action
- Available for customized producing by user

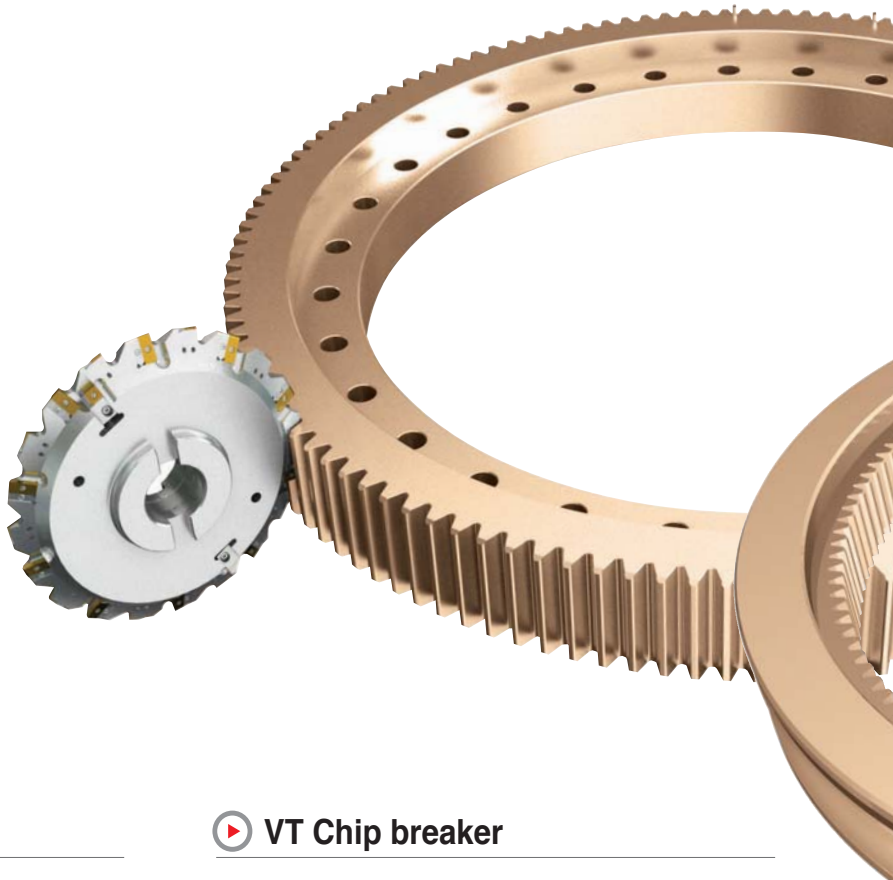

▶ KING DRILL



- Optimal indexable drill design**
- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
 - Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
 - Grade : PC3500, PC5300

▶ VT Chip breaker



- Excellent rigidity on the high feed and depth
- Excellent impact resistance and long life based on stable structure and outstanding rigidity
- Type of SNMM / CNMM

▶ TPDB



- High precision and high efficiency indexable drill**
- Highly efficient drilling in high speed and high feed machining
 - Excellent surface roughness

▶ VH Chip breaker



- Innovative improved chip breaking on the medium working
- Provided good performance on the flange and continuous working
- Type of SNMM / CNMM

Gear machining (Internal Gear)

▶ Cutter for Roughing



- Cutter diameter : Ø560
- The Number of Edges : 140
- Available for all module gear working is caused by edges designed stair shape



▶ Cutter for Medium



- Cutter diameter : Ø400
- The Number of Edges : 48
- Available for making involute curve shape of internal gear




▶ Cutter for Finishing



- Cutter diameter : Ø400
- The Number of Edges : 20
- Cutter for finishing available for 4 grades accuracy of internal gear
- Available for chamfering on the same time and unnecessary of extra working


▶ KING DRILL



Optimal indexable drill design


- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
- Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
- Grade : PC3500, PC5300

▶ TPDB



High precision and high efficiency indexable drill

- Highly efficient drilling in high speed and high feed machining
- Excellent surface roughness

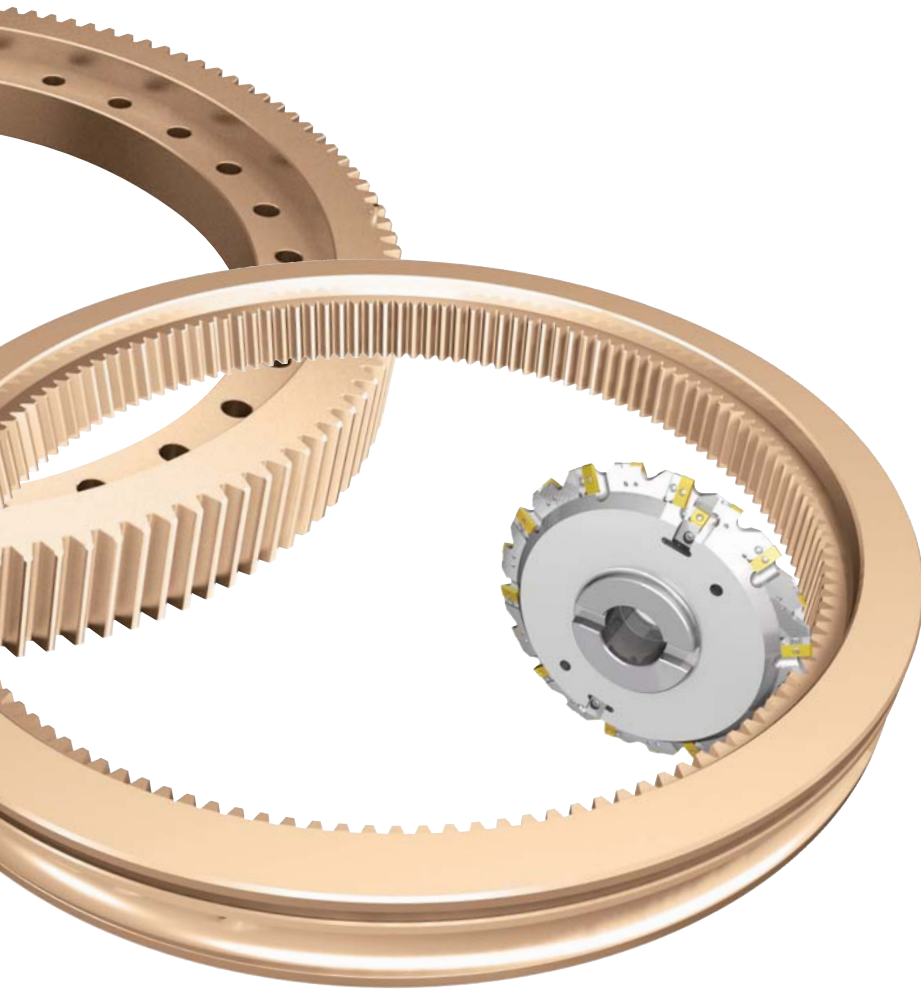

Ship building (Engine block)

▶ Roughing cutter for cylinder block



- Cutter diameter: $\varnothing 200$
- Applicable insert: SNCF1507ANN-MF
- Economical concepts: 8 edge available insert, high feed available tool
- KORLOY exclusive latch clamping system provides quick change of insert

▶ TPDB



High precision and high efficiency indexable drill

- Highly efficient drilling in high speed and high feed machining
- Excellent surface roughness

▶ KING DRILL




Optimal indexable drill design

- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
- Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
- Grade : PC3500, PC5300

▶ Cylinder block cam shaft boring cutter (Aluminum body cutter)



- Cutter diameter : $\varnothing 270$
- Applicable insert : LNE434 / SDKX1506
- Right-hand rotational aluminum cutter body, easy to handle, makes high precision boring

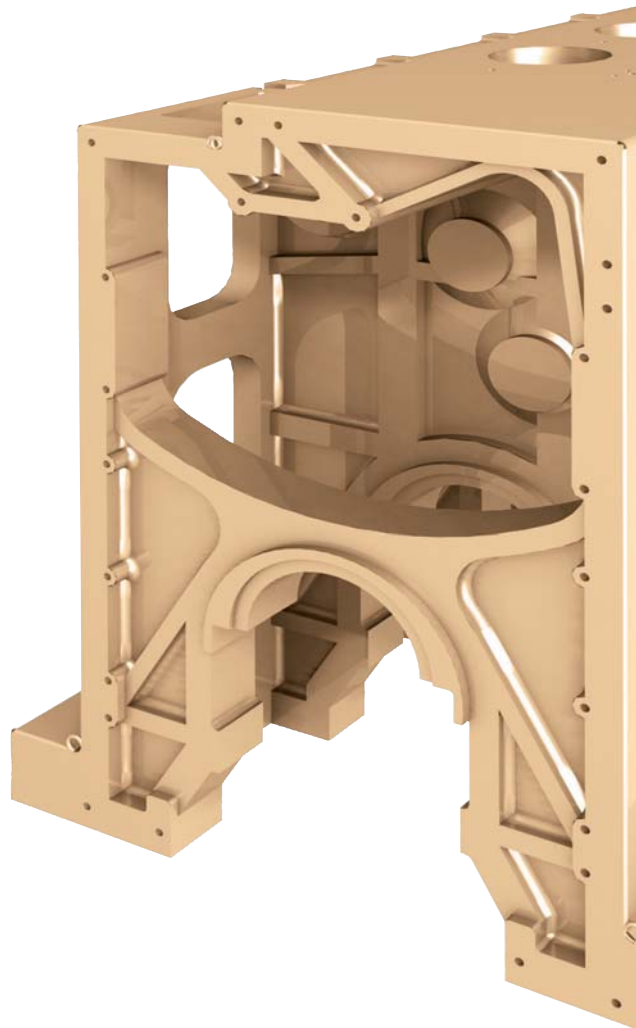

▶ **Cylinder block roughing and medium (Both)**



- Cutter diameter: $\varnothing 200$
- Applicable insert: LNE434 / LNCS1907-R3.0-WC
- Designs available for roughing and medium applications
- Available high efficiency working to chose LNE 434 insert for roughing and high reliability grade
- Good surface working through LNCS1907-R3.0-WC Wiper shape for medium

▶ **High rake-angle applied cylinder block roughing cutter**



- Cutter diameter : $\varnothing 250$
- Applicable insert : SECN2606AFN
- High rake angle cutter suitable for the machining applications that have the tendency to create chatter

▶ **Adjustable medium machining cutter**



- Cutter diameter : $\varnothing 250$
- Applicable insert : LNCS1907-C1.5-WC
- Cutting edge height adjustable device provides excellent surface finish


▶ **Cylinder block bearing cap seat machining cutter**



- Cutter diameter: $\varnothing 250$
- Applicable insert: RDKT2006M0
- Several sizes of inserts are prepared to meet the radius requirement of work-piece
- Rigid inserts for high efficiency machining




Ship building (Crank shaft / Propeller)

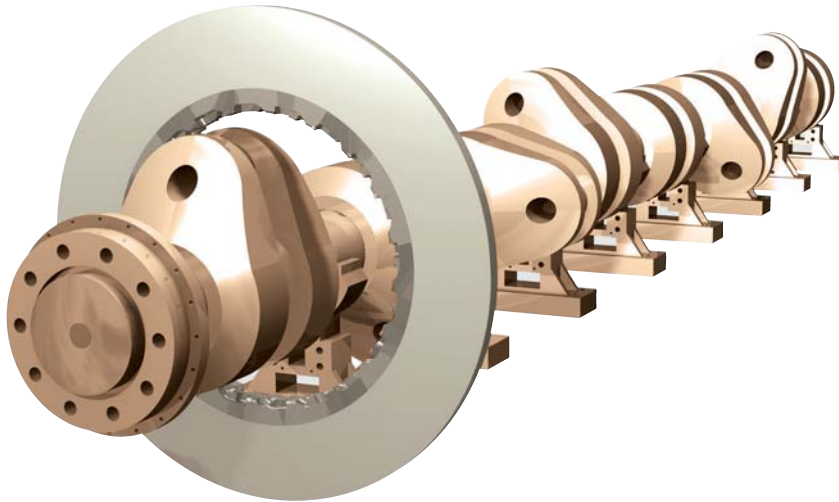

▶ KORLOY exclusive screw-on type internal pin miller




- Cutter diameter : Over Ø2000
- Weight : 1.5 tons
- Pin miller for crank shaft of medium size ship engine
- Special segment assembly system developed by KORLOY makes it easy to handle and provides excellent cutting performance with good chip forming

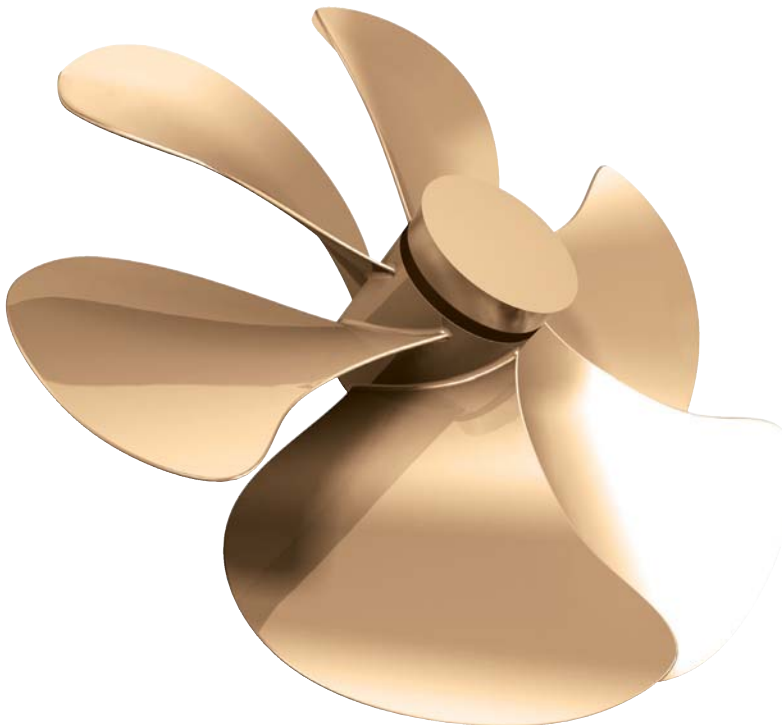


▶ Periphery side of propeller machining tool



- Cutter diameter : Ø150
- Applicable insert : CDEW170708R
- Positive relief angle applied to get smooth cutting without chatter



▶ Top face of propeller machining tool



- Cutter diameter : Ø250
- Applicable insert : SECN1904EER
- Double layer insert array provides big depth of cut



Role machining (Body / Shape / Parting-off)

▶ Role machining (Body / Shape / Parting-off)




- Good chip evacuation even in deep grooving
- High hardness coating grade that has excellent wear resistance prevents damage from cutting load. (Photo shows edge damage after machining same time under same conditions)

Closer chip breaker to the cutting edge provides better chip control even in deep grooving


▶ Parting-off Roll

- Unique insert geometry for better chip control even in deep grooving
- High hardness coating grade provides excellent wear resistance




For parting-off

For roughing and medium of external turning

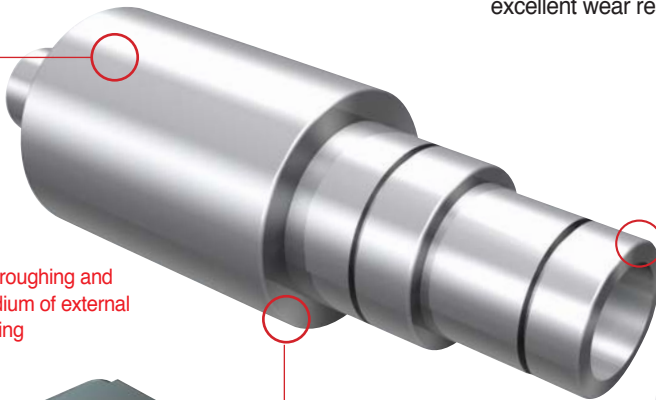

For forming and machining of joint





▶ External turning of Roll

- Match of high hardness coating grade (NC6210) with chip breaker provides longer tool life with smooth chip control
- Various cutting edge designs are applicable according to workpiece materials and cutting conditions

▶ Forming and grooving of Roll

- Special chip breaker focus on suitable chip forming (engineered chip breaker width and depth)
- Strong cutting edge treatment prevents un-expected fracture of insert

▶ Application case



The combination of high hardness coating grade (NC6210) and chip breaker shows better performance


- Equipped with wide chip breaker enough to prevent crater wear
- Better chip control from the beginning of the machining, together with high hardness coating grade provides 3 times longer tool life than conventional tool. (especially at finishing)

Railway Industry (Separator / Crossing / Rail)



▶ Rail separator joint face milling cutter




- Cutter diameter : $\varnothing 160$
- The Number of Edges : 54
- Special customizing is available upon customer's requests

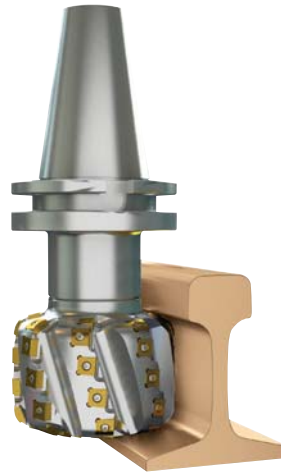

▶ Cutter for top of guard-rail working

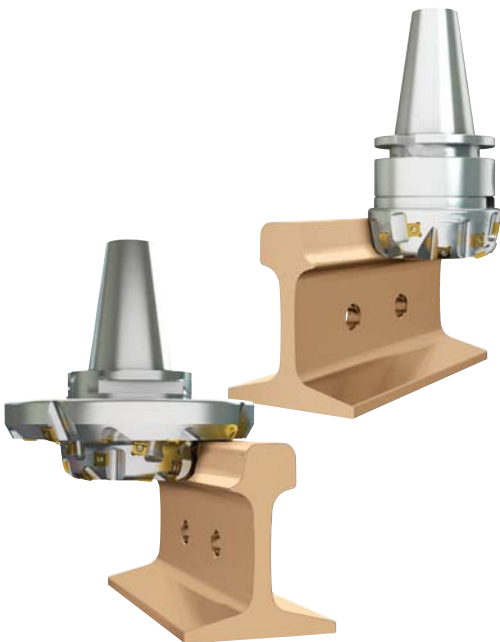

- Cutter diameter : $\varnothing 160$
- The Number of Edges : 16
- Precise forming of rail way is possible



- Cutter diameter : $\varnothing 300$
- The Number of Edges : 33
- One body design of cutter and arbor provides high rigidity

▶ Taper milling for top of guard-rail working




- Cutter diameter : $\varnothing 200$
- The Number of Edges : 24
- Economical 8 edge available insert
- Special customizing is available insert
- Special customer's requests upon customer's requests



▶ Periphery face milling for the top side of rail way



- Cutter diameter : $\varnothing 240$
- The Number of Edges : 25



▶ Cutter for repairing rail





- Cutter diameter : $\varnothing 600$
- The Number of Edges : 198
- Milling applicable on the rail of part requested repairing


Rail Industry (Wheel)

▶ The type of LNUX for the working of wheel (Repair)

- Material : SSW2. Ø920~1000
- Cutting conditions : $vc=78\text{m/min}$ ($13\sim18\text{min}^{-1}$) $fn=1.0\text{mm/rev}$ $ap=3\sim4\text{mm}$
- Insert : LNUX301940-TM Grade : NC3215
- Result : good chip evacuation, stable structure and long life tool life

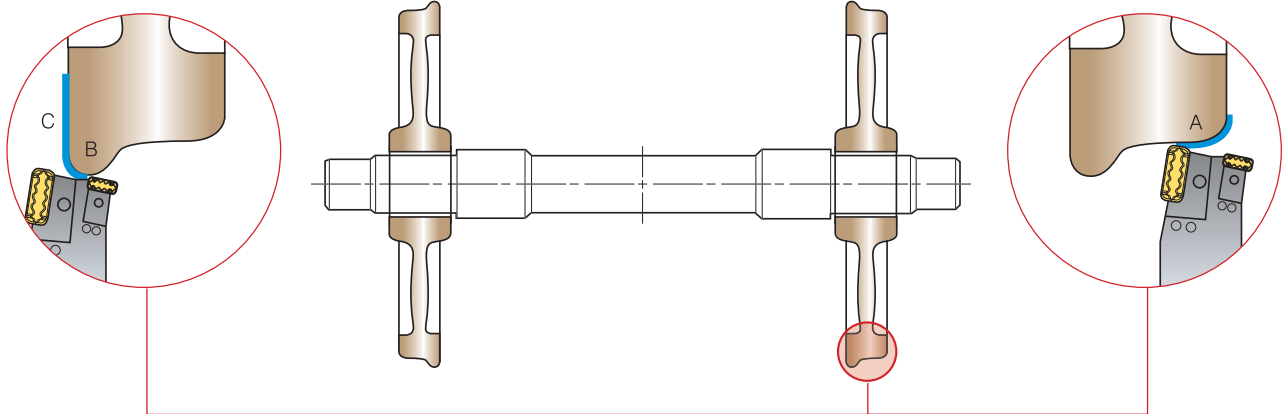


LNUX301940-TF



- For light cutting, it generates a low load with good chips

LNUX301940-TM




- Comprehensive design for general use, strong cutting edge with good chip forming (First recommendation)


Working procedure	A	B	C
Insert	LNUX301940-TF/TM	LNUX191940-25/22	
Grade	NC3215	NC3215	
Cutting condition	Decrease the speed on deep part of A	Increase the speed to get good chip evacuation	

▶ RCMX insert for rail way wheel

- Material : SSW2. Ø840
- Cutting conditions: $vc=55\sim100(\text{sfm})$, $fn=1.0\sim1.5\text{mm/rev}$, $ap=1\sim6\text{mm}$
- Insert: RCMX3209M0-SL Grade: NC3215
- Result: good chip evacuation, stable structure and long life tool life

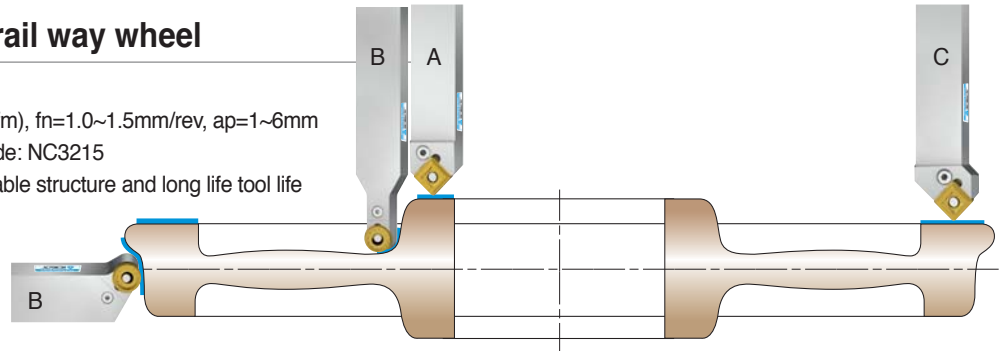


VT chip breaker




- Strong cutting edge for high feed and deep cutting depth
- Tough design of chip breaker provides excellent impact resistance
- SNMM type

SL chip breaker




- Comprehensive chip breaker covers wide application range
- Proper chip control with long tool life

B chip breaker




- Comprehensive roughing design having strong edge strength with long tool life

SB chip breaker






- Better chip control at low depth of cut machining

TM chip breaker



- Medium-finishing chip breaker, proper surface finish, superior wear resistance

Working procedure	A	B	C
Applicable insert			
Holder	PSDNN5050-U25	PRDCN5050-U32 PRGCN5050-U32	PSSNR5050-S25
Insert	SNMM250724-GH	RCMX3209M0-SL	SNMM250724-VT
Grade	NC3215	NC3215	NC3215


Pipe Industry (Edge milling)

▶ “X” shape machining





- A cutter to make the “X” shape on the both side-end of steel plate, to do bevel-end welding
- Locator wedge type clamping system applied for the cutter provides long durability of cutter as well as strong clamping power
- Grade: NC5340


▶ “I” shape machining

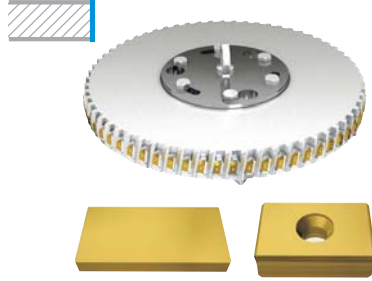

- A machining to make “I” shape on the both side-end of steel plate, to do bevel-end or plane-end welding.
- Variety of inserts (with chip breaker or without chip breaker) are available according to your cutting conditions
- Grade: NC5340

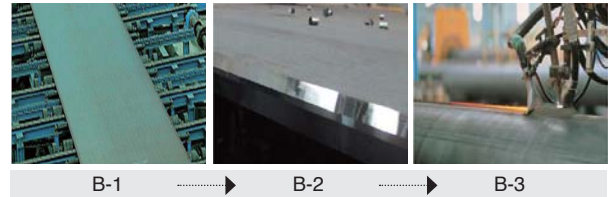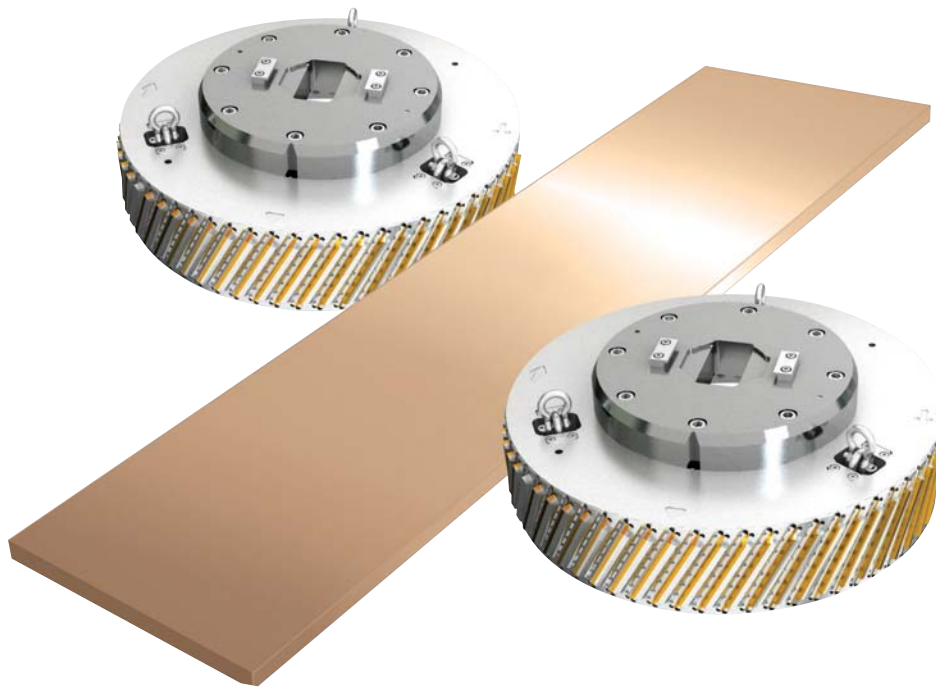

▶ “Y” shape machining

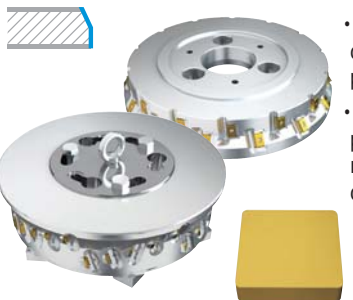


- A machining to make “Y” shape on the both side-end of steel plate, to do bevel-end welding
- Wide chip pocket on cutter provides long durability of it by reducing contact of chip with cutter body

▶ Special machining




- Special design of cutter as per side-end shape of steel plant upon customer's request is available


Pipe Industry (Bead removal / Parting-off / Chamfering)

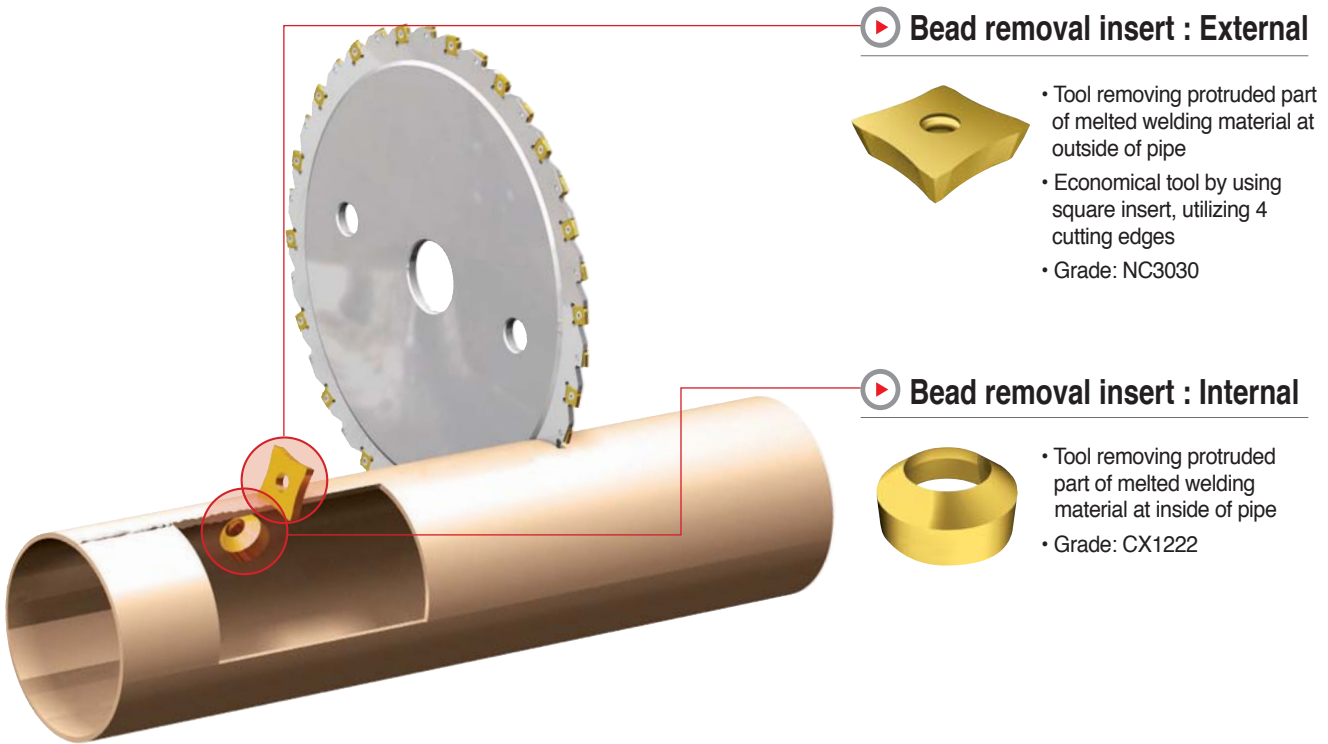

Working Method	Application range	Applicable Inserts	Cutter
	For external bead removal	SDMX80-R□□ / SEGW54-R□□ SNMG150708-R□□ / SNMN1207(SUN452)-□□R SNMN1507(SNU552)-□□R / SOET1906-254 SEGX2509-R□□	Customizing
	For internal bead removal	AR□□(AC) / SF□□R-□□	

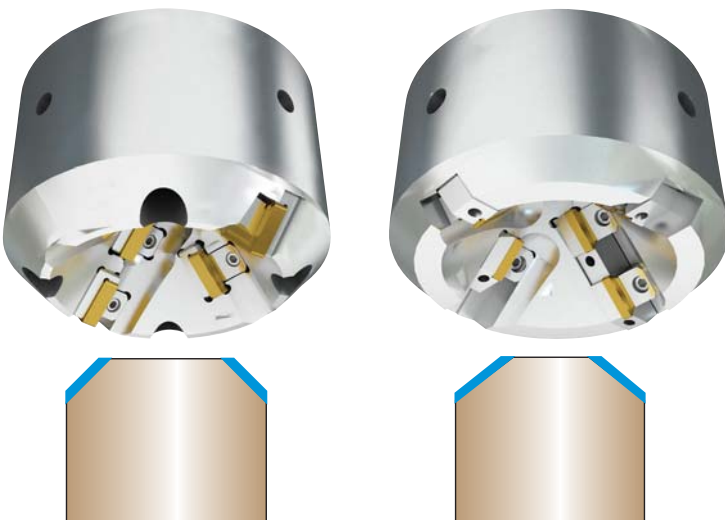


Chamfer Tool



- Chamfering tool machining cut-off face of pipe
- Special chamfering angle design is possible upon customer's request
- Cost effective concept: Triangle and Square double sided insert provides 6~8 effective cutting edges
- Grade : NCM325, PC3500


Bearing

▶ For external and facing working

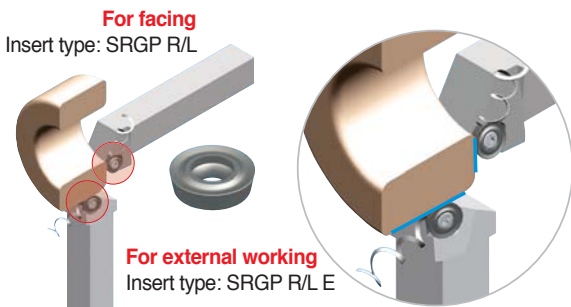


- Applicable on the internal, external and facing working

▶ For Internal and external R-chamfering

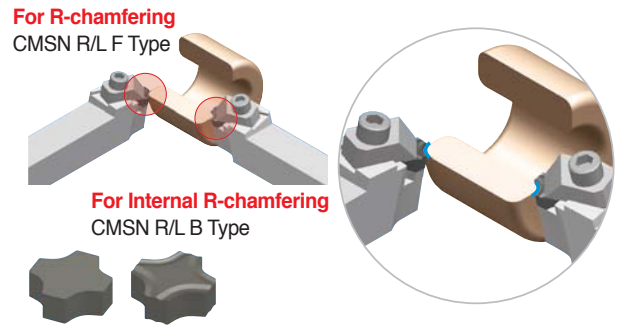


- Applicable 8 corner of insert
- R-shape is realized to internal and external part of corner

▶ For internal working

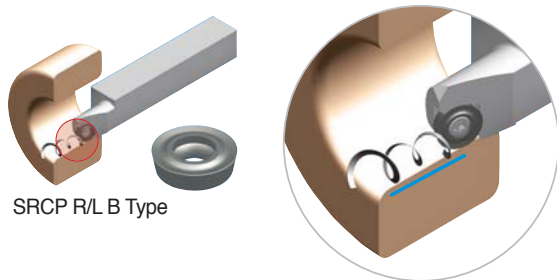


- Applicable over $\varnothing 12$

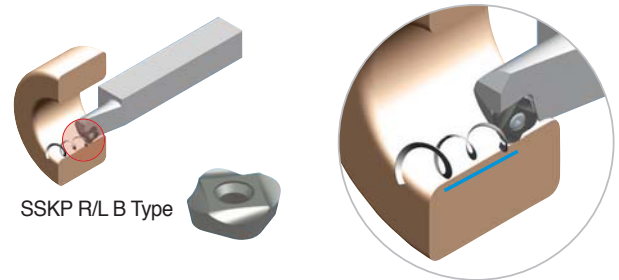

- Applicable over $\varnothing 11.5$ with 4-corner insert for internal and low working


▶ For ray-way

- For Ray-way on internal and external bearing
- Applicable 3 corner insert
- Able to customize

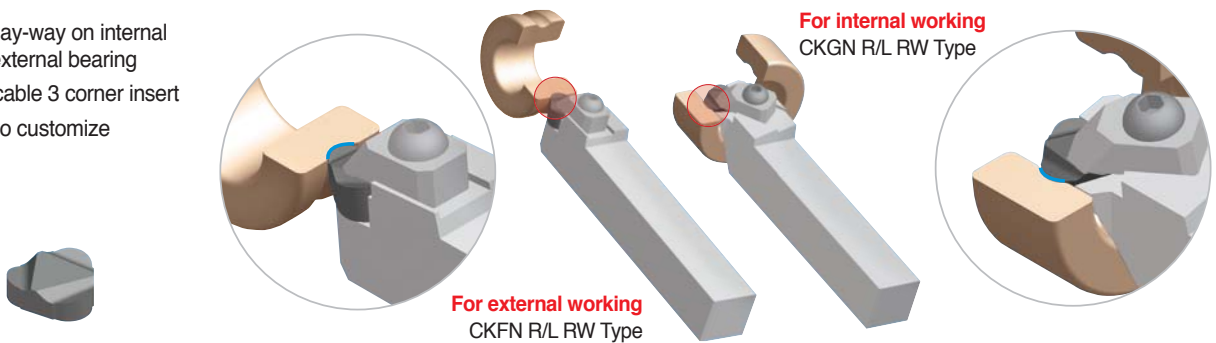

▶ For shield way

- For shield working on internal and external bearing
- Applicable 4 corner insert
- Able to customize

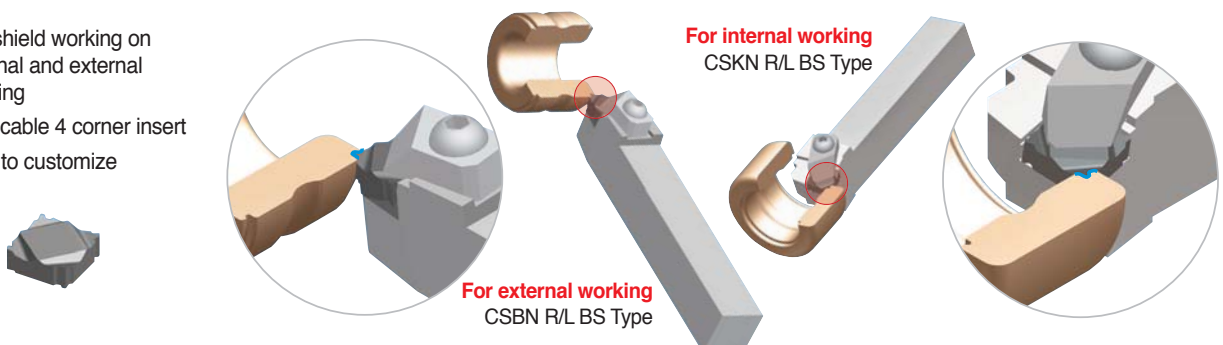

Power Generation (Wind Power Generation Shaft / Tower Flange)

VH Chip breaker



- Good chip control in heavy machining
- Excellent performance for flange machining
- Suitable for continuous cutting conditions
- SNMM / CNMM type

VT Chip breaker



- Strong cutting edge for high feed and deep cutting depth
- Tough design of chip breaker provides excellent impact resistance
- SNMM / CNMM type



TM (Thread Milling)



- Thread milling indexable tools
- Various type of holder (standard, long, taper) and inserts
- Screw diameter: $\varnothing 9 \sim \varnothing 46\text{mm}$

H-MAX



Solid end-mill for hardened material

- Sub-micron carbide provides strength on sharp cutting edge preventing small chipping on it
- Advanced PVD coating has high hardness with strong antioxidation property, provides excellent tool life at the machining of hard to cut material having high hardness

RCMX type



- High quality machining
- Rigid insert ensures good surface finish and long tool life
- RCMX type

Vulcan Drills (VZD)




- Rigid body for high feed and precision machining
- Better chip evacuation from improved chip breaker
- Applicable for the drilling under poor cutting conditions

KING DRILL



Optimal indexable drill design

- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
- Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
- Grade : PC3500, PC5300

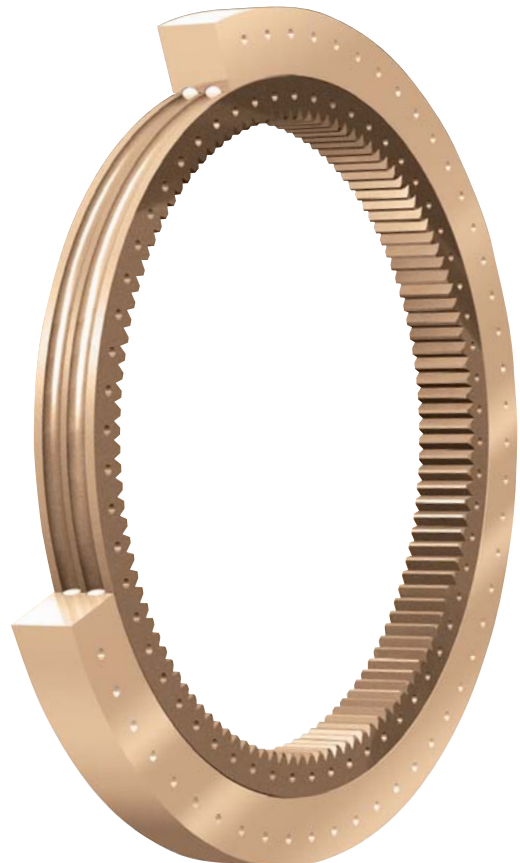

Aviation Industry (Engine / Turbine)

▶ TPDB



High precision and high efficiency indexable drill

- Highly efficient drilling in high speed and high feed machining
- Excellent surface roughness

▶ ISO Turning



- Available to customize whole and special items for complicated and various shape

▶ Boring Bar



Internal Turning

- ISO standard boring bar for internal machining




▶ I-Max



Solid end-mill for hard to cut material(IFSE3000)

- High rake angle with helical flute provides excellent chip control
- Specially designed cutting edge applied to overcome work-hardening
- Best quality at the machining of hard to cut material

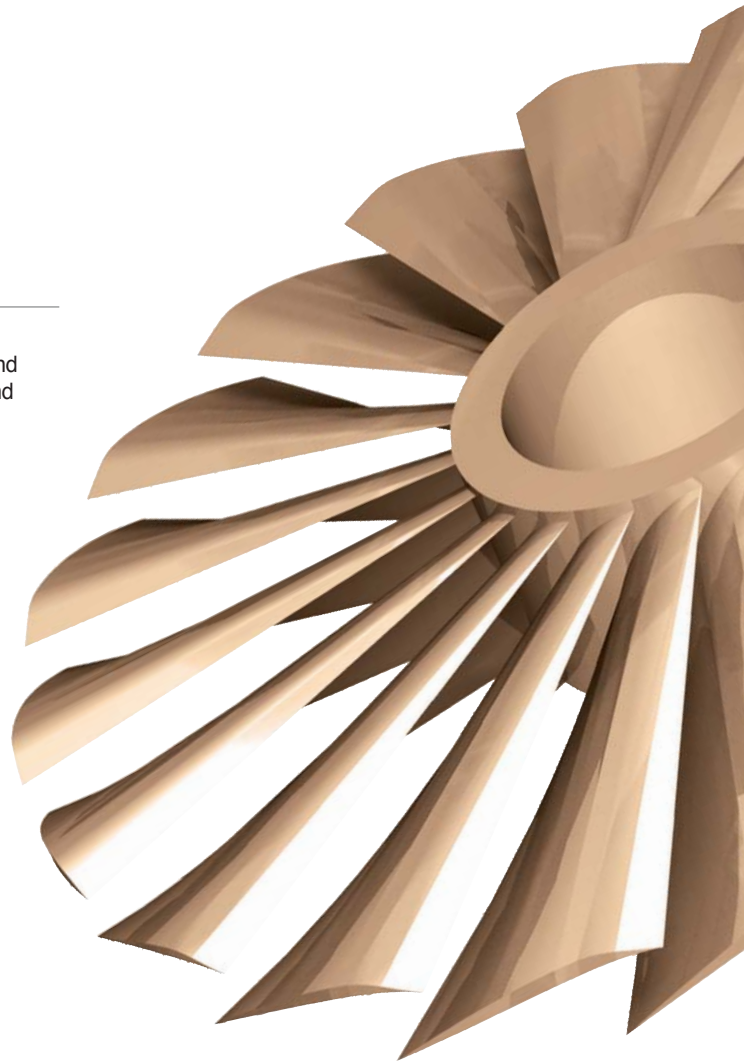

▶ Rich Mill



- Increased number of edges and excellent tool life due to 8 corner edges
- Smooth cutting with low cutting load due to the unique geometry & high rake angle of cutting edge, this combination provides excellent tool life

▶ MSD



Long tool life with protecting material

- Good chip control with proper chip-pocket
- Decrease the chipping and increase the cutting ability due to applicable streamlined shape insert
- Increase impact resistance and lubrication due to apply PVD K Black coating on the sub-micron material

▶ Laser Mill



Multi-functional indexable end-mill

- Extremely hard grade provides long tool life
- Easy and simple clamping of insert by using single screw
- Excellent quality for fine finishing due to its precise tolerance




▶ H-Max



Solid end-mill for hard material

- Sub-micron carbide provides strength on sharp cutting edge preventing small chipping on it
- Advanced PVD coating having high hardness with strong anti-oxidation property coated on it provides excellent tool life as the machining of hard to cut material having high hardness

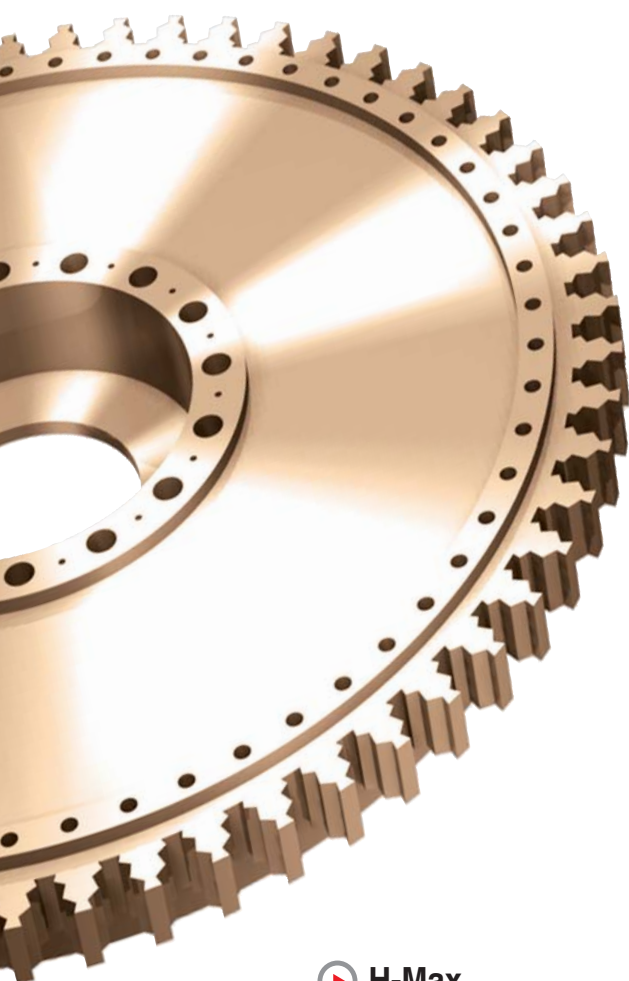

Aviation Industry (Landing Gear / Accessory)

▶ HRMDouble



High efficient and cost effective tool utilizing a double sided insert

- Cost effective tool by using double sided insert with a total of 6 cutting edges
- Smooth cutting utilizing a high rake angle sharp cutting edge insert



▶ MGT



For Grooving, Turning, Profiling, Cut-off

- Multi functional grooving tool can over variety of machining with multifunctional grooving tool and the chip breaker with excellent cutting performance and the ability to expand grooves



▶ Pro-X Mill



High-speed Aluminum Milling tool

- Unique mounting system of insert provides tight clamping of insert
- Mirror surface and high rake angle of insert provides excellent machined surface by reduced cutting load and edge build-up
- Grade: H01




▶ SSEA




Solid carbide end-mill for Aluminum machining

- Advanced geometry of end-mill refrains build-up-edge
- Superior surface machined
- DLC coated end-mills available

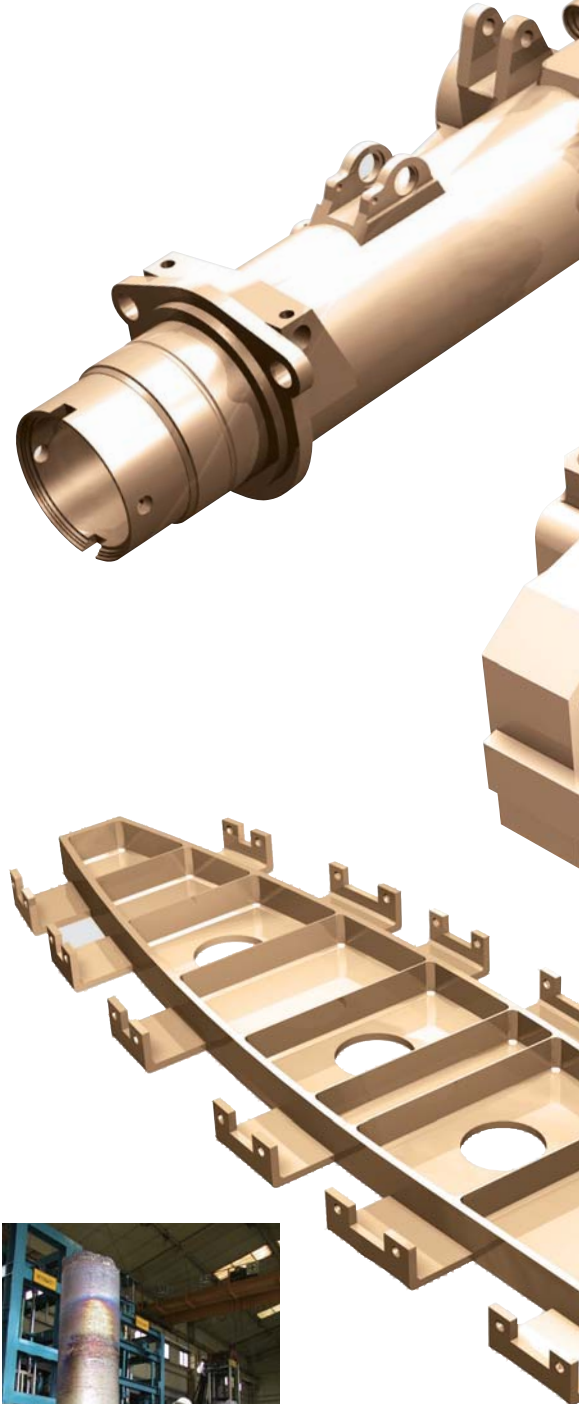

Titanium
Picture provided : KPC Inc.

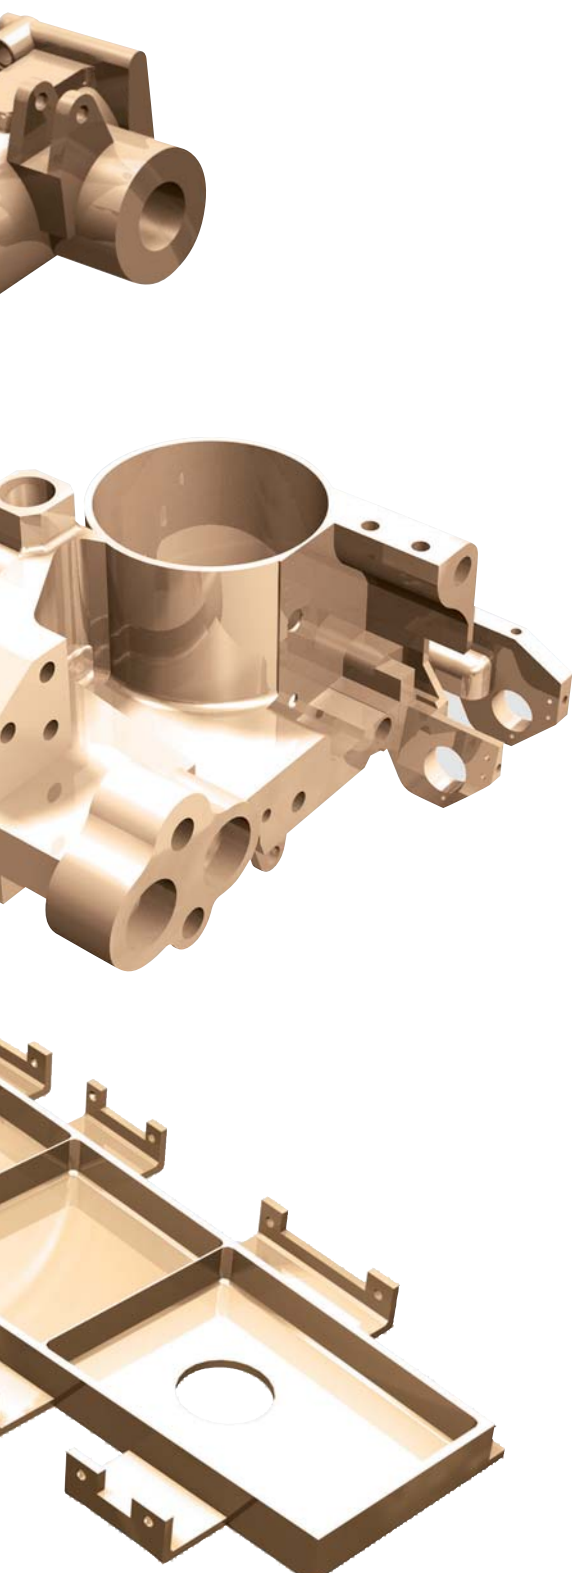


▶ KING DRILL



Optimal indexable drill design


- Drill shape and chip breaker are optimized at the central and peripheral insert locations for better chip control and surface finish
- Grades, optimized for the central and peripheral insert locations in order to maximize cutting tool life.
- Grade : PC3500, PC5300

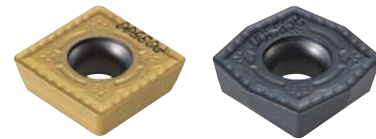

▶ MLD (Mach Long Drill)

- Direct drilling without separate operation (step drilling) over 20 x D
- Wider flute space along with drill provides effective chip control
- Special design for rigid body provides smooth drilling without bending of drill

▶ Alpha Mill



Multi functional milling tool

- Vast coverage of milling operation due to its variety of cutters and inserts
- 3 dimensional chip breaker design provides smooth cutting



▶ Brazed End-Mill



- Apply High Spiral Angle (over 40 degrees) able to get good sharpness
- Available high speed milling due to reduce the working temperature
- Expected long tool life by applying hardened carbide material.
- Economical welded tool due to available 2 or 3 times re-grinding


Slitter Knife

- ▶ **Application**
- ▶ For video tape
 - ▶ For audio tape
 - ▶ For magnetic tape
 - ▶ For brass plate, mobile battery





- ▶ **Tool selection**
- ▶ Top slitter knife : Thickness : $\pm 0.01 \sim 0.02 \text{mm}$
 - ▶ Bottom slitter knife : Thickness : $\pm 0.001 \text{mm}$
Flatness : under 0.0005mm
Polishing surface roughness : under 0.05S

▶ **Machining example**

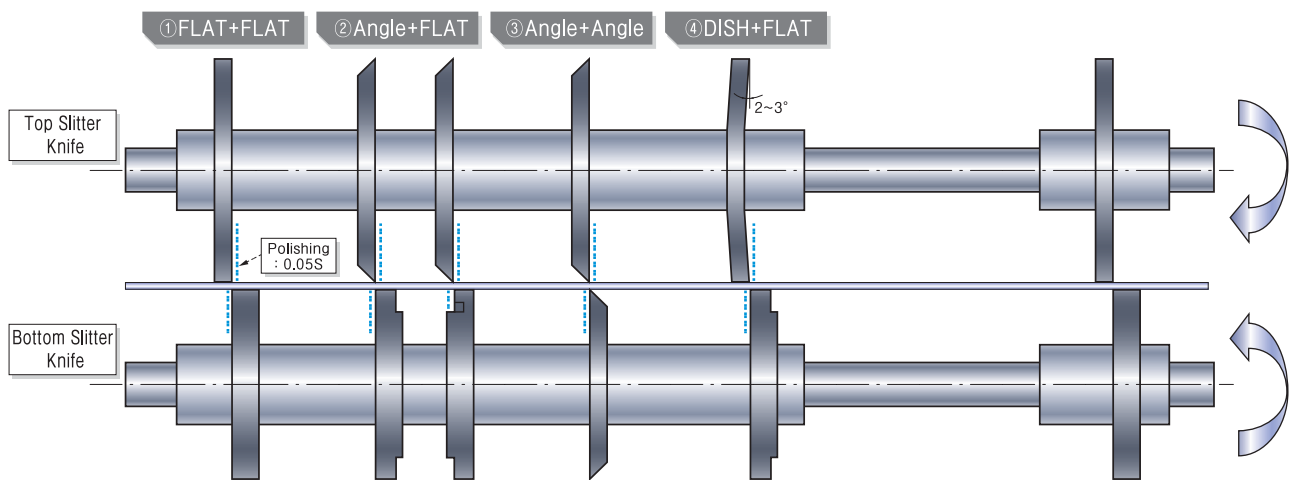


Broach cutter

- ▶ **Application**
- ▶ Broach cutters apply to inner machining of metal bearing which is used for automobile crank shaft

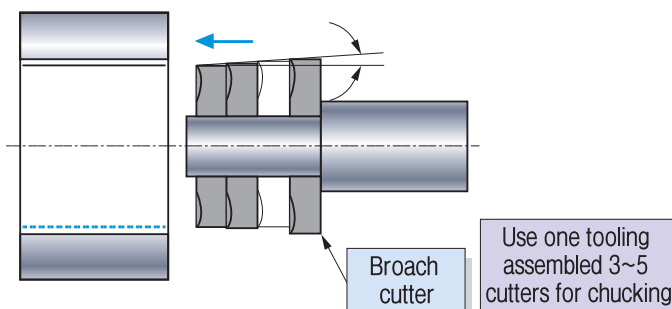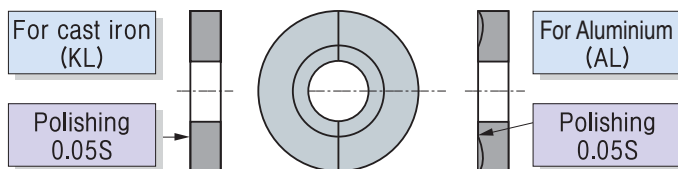


▶ **Order**

- Designation for cast iron : $KL \ \varnothing d \times \varnothing D \times T$
 - Designation for Aluminium : $AL \ \varnothing d \times \varnothing D \times T \times \alpha^\circ$
: $AL \ \varnothing d \times \varnothing D \times T \times \alpha^\circ$
- (If there is no mentioned any angle, $\alpha = 30^\circ$)

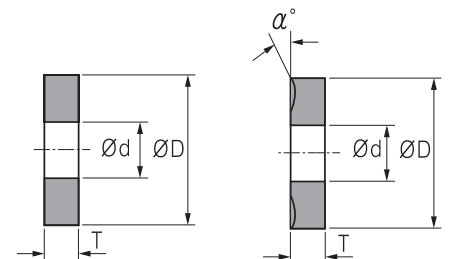


Automobile engine tooling example (Crank Shaft)

Oil Bore - Mach Long Drill(MLD)

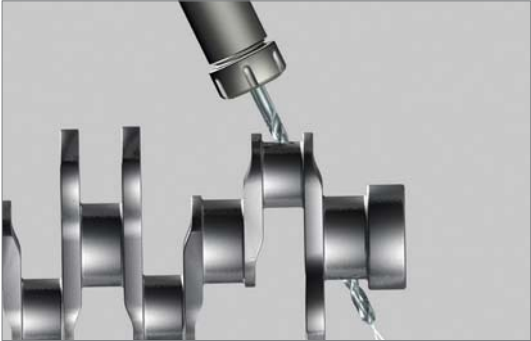


Taper Spline Structure
(Rigidity has been enhanced due to increased contact area)

Oil Bore - Mach Long Drill(MLD)

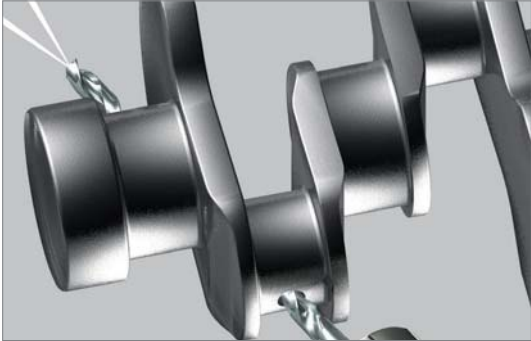


- Machining without step feed operation for deep hole drilling like 20D
- Optimal performance with MQL System


Pin & Journal - Crankshaft Cutter(Internal / External)

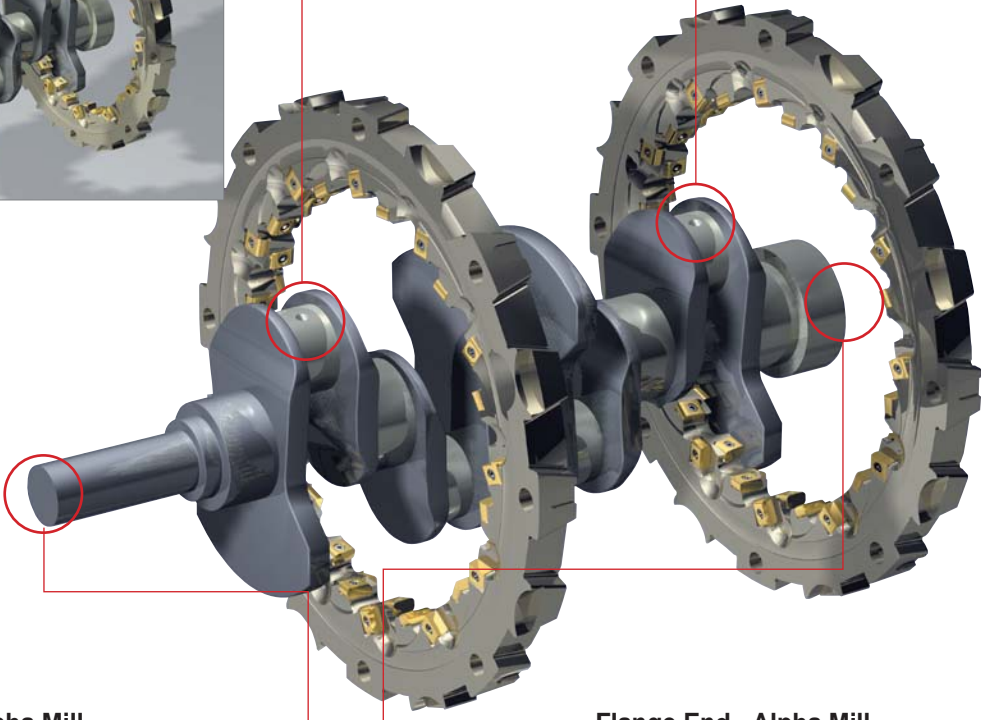

Post End - Alpha Mill

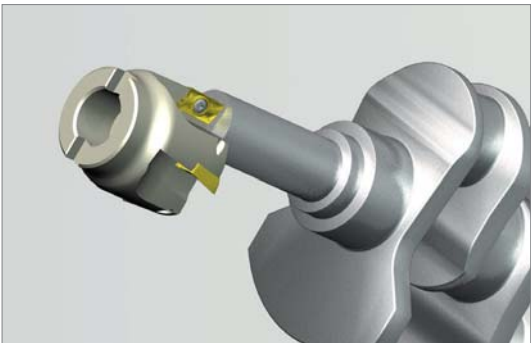

Flange End - Alpha Mill

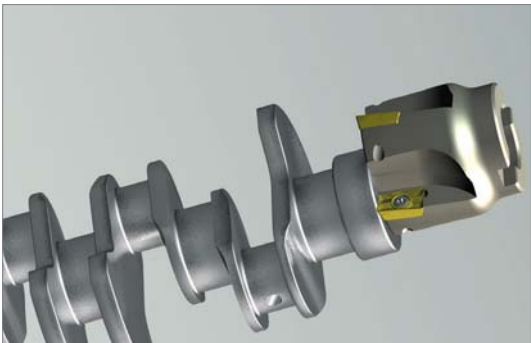

Automobile tooling example (Knuckle)

Micro Boring bar



Mach Drill



Micro Boring bar



Indexable Side Cutter(SPB)




Future Mill(FMP)



Indexable Side Cutter(Tangential type)



Indexable Side Cutter(Radial type)

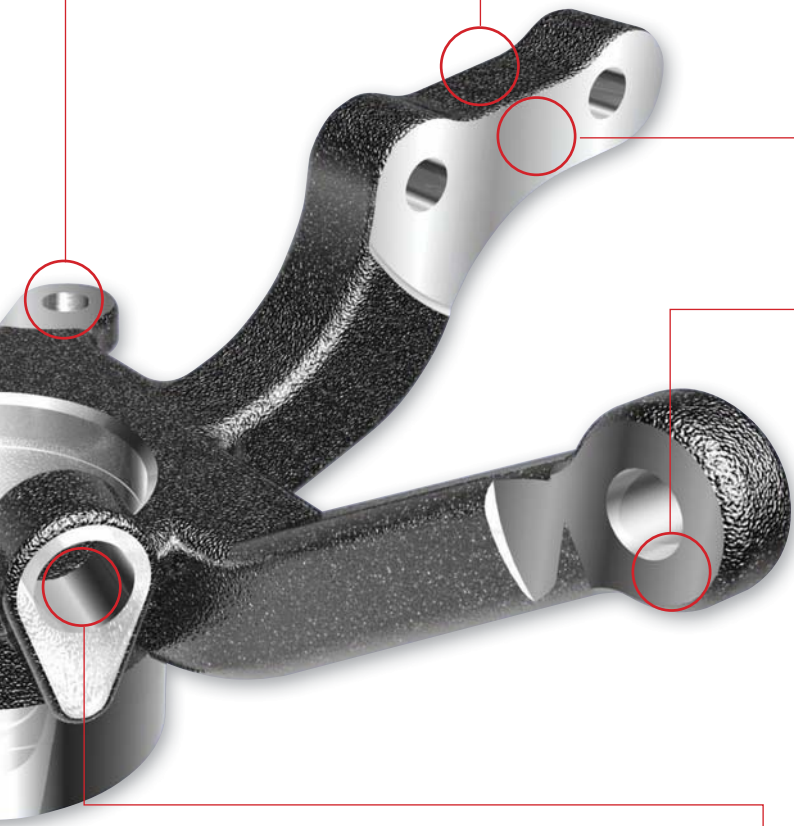

Future Mill(FMP)




Step Drill




Drill(KING DRILL)



Automobile break tooling example (Carrier)

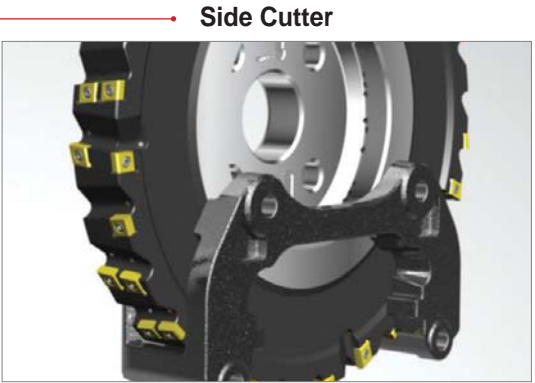

Automobile break tooling example (Housing)

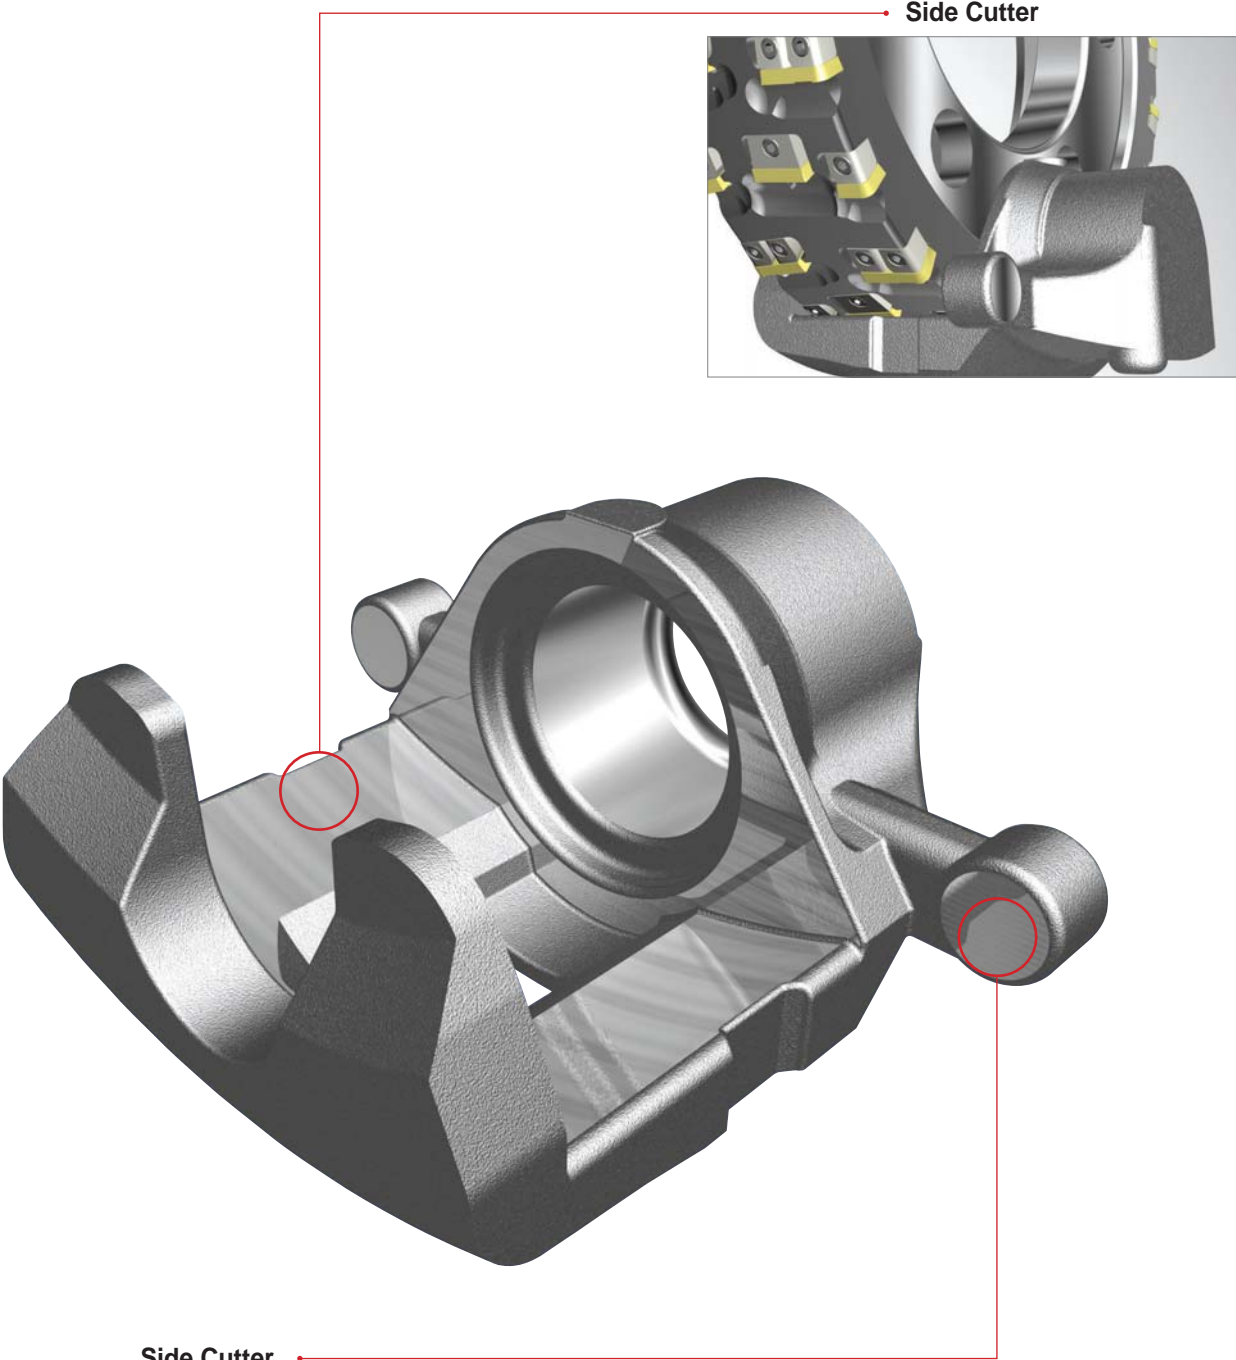


Automobile tooling example (Connecting Rod)

Drill



Rich Mill(RM4)

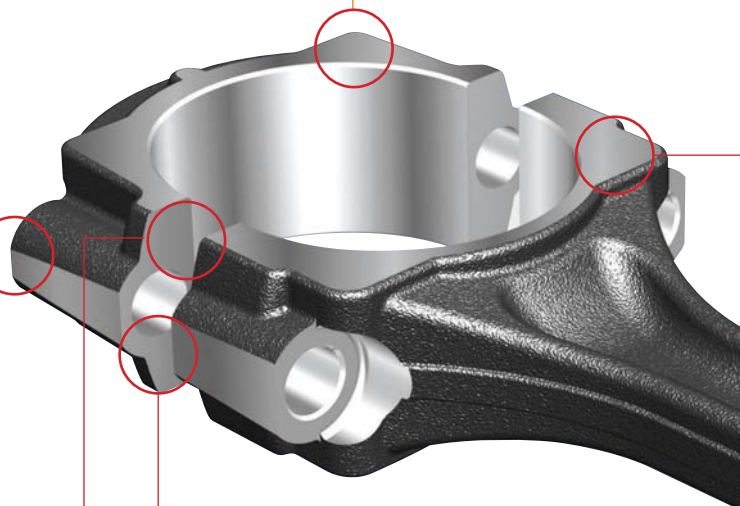

Side Cutter



Side Cutter



Rich Mill(RM4)



Rich Mill(RM8)




Drill(KING DRILL)



Step Drill




Drill

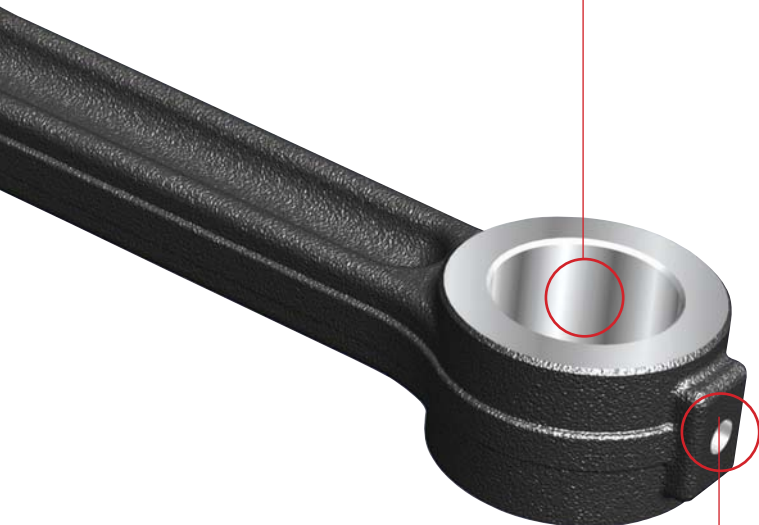


Automobile engine tooling example (Block)

Top Face (Roughing)

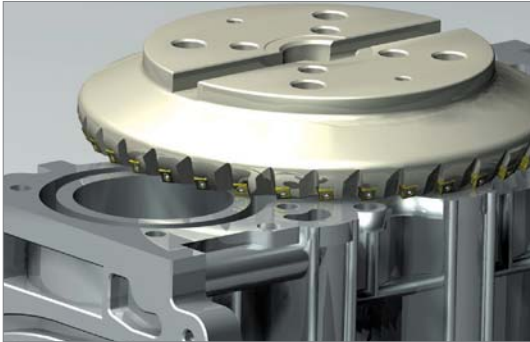


• Applied 8 corner edges of insert

Top Face(Finishing) - High feed Cutter

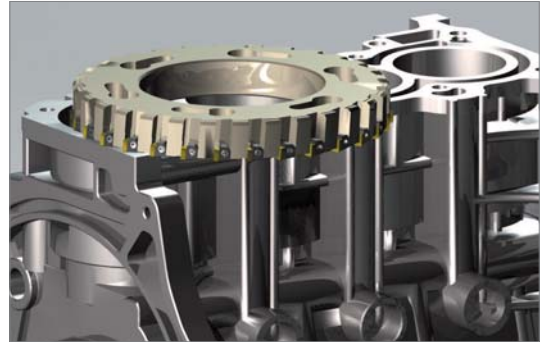


Bosses - Alpha Mill

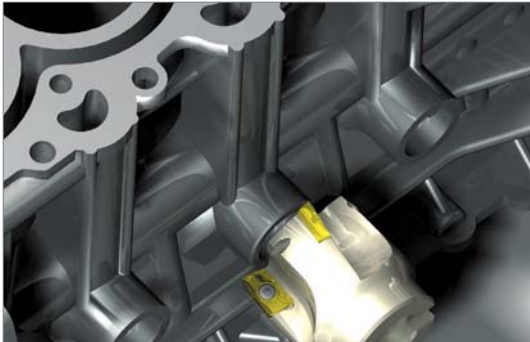



Step Burnising Reamer



Bearing Cap Seat - Form Cutter

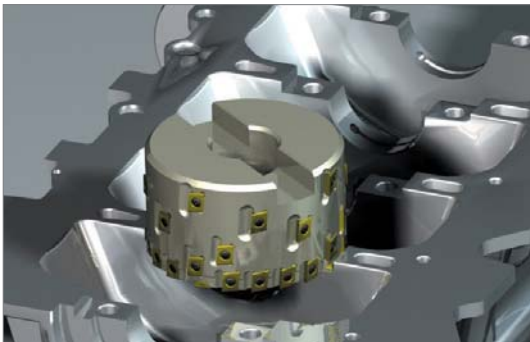




Crank Bore(Crankshaft Bearing Bore) - Form Cutter

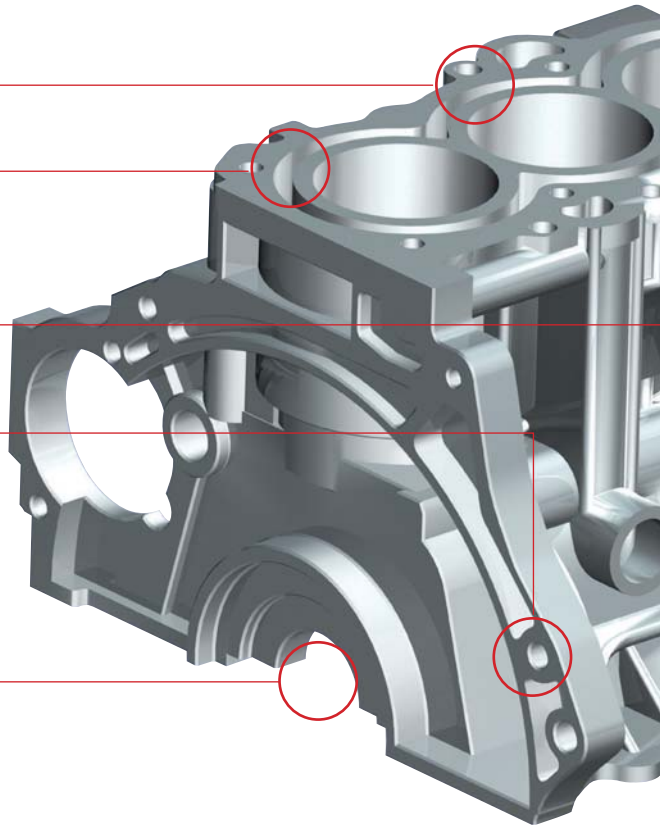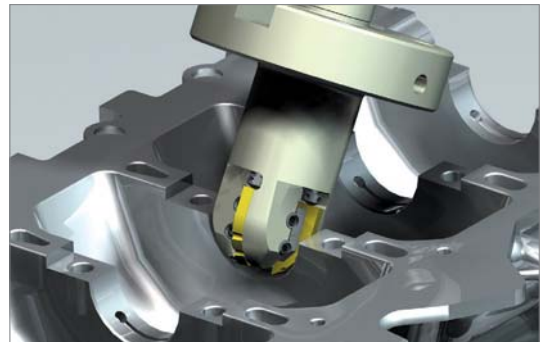


Cylinder Bore(Roughing) - Boring Cutter




Front & Rear Face - Cube Couple Mill

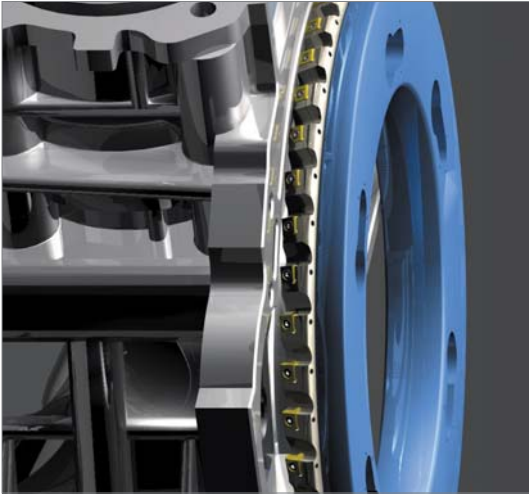


- High feed cutter made of aluminum
- Due to light weight, it s easy to handle & effective to prevent accident

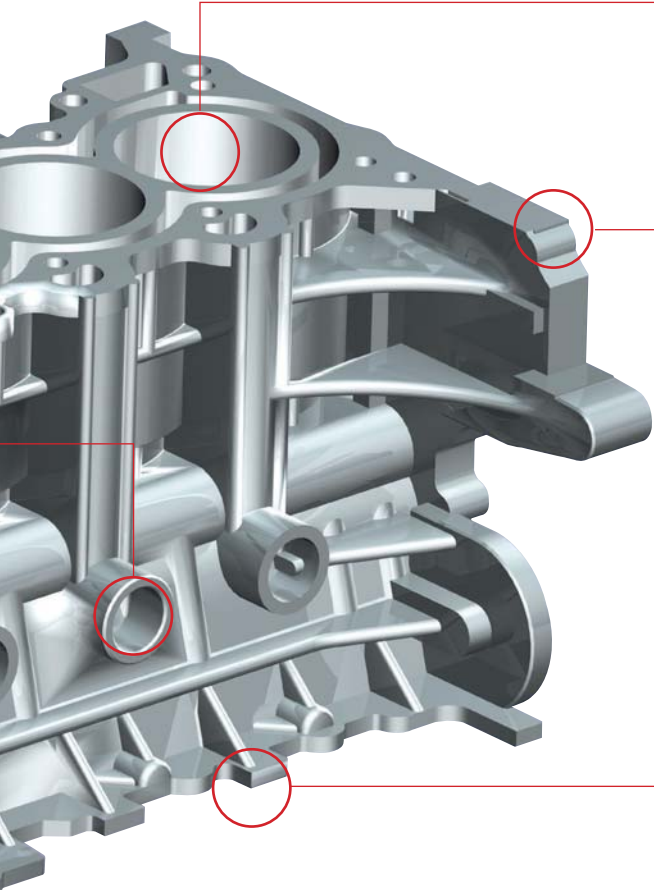

Cheek Faces - Gang Cutter

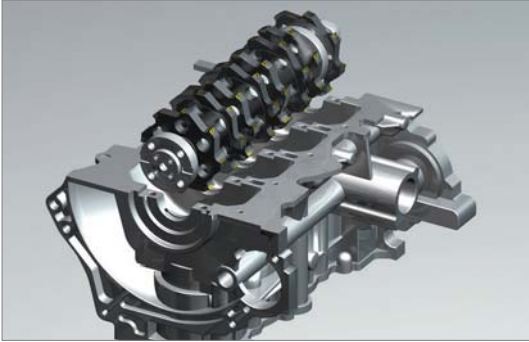


Cheek Faces - Gang Cutter

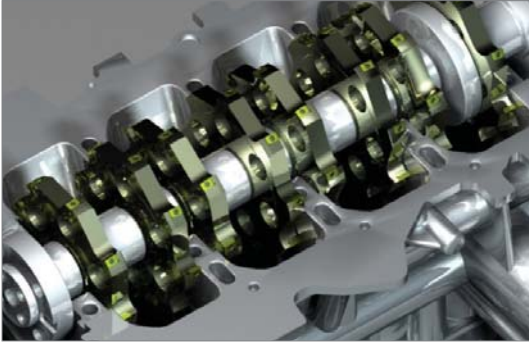


Automobile engine tooling example (Head)

Top Face(Roughing & Finishing) - High Feed Cutter

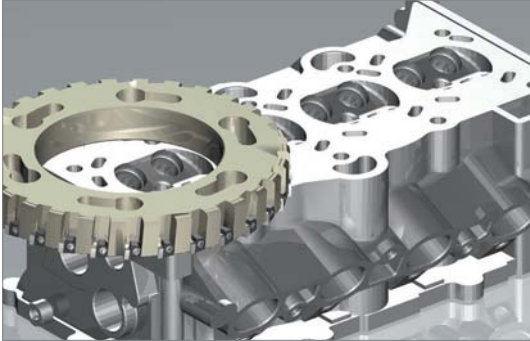

• Carbide insert, PCD insert

Top Face(Roughing & Finishing) - Aero Mill

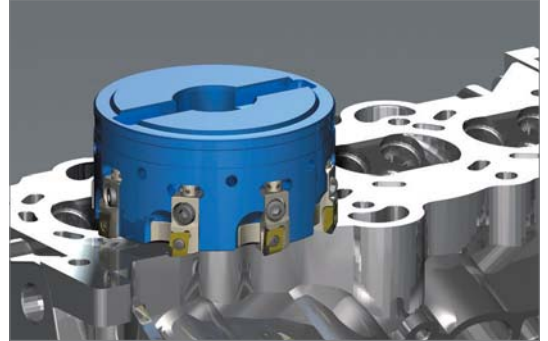

• Due to the light weight of aluminum body that about 50% of steel body, excellent cutting performance with high speed machining can be achieved.


Step Burnishing Reamer




Straight Reamer




Bottom Face(Roughing & Finishing) - High feed Cutter

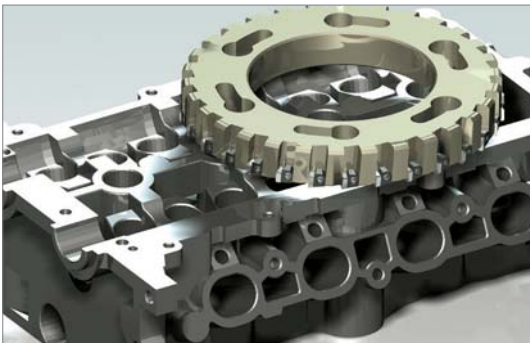


• Carbide insert, PCD insert

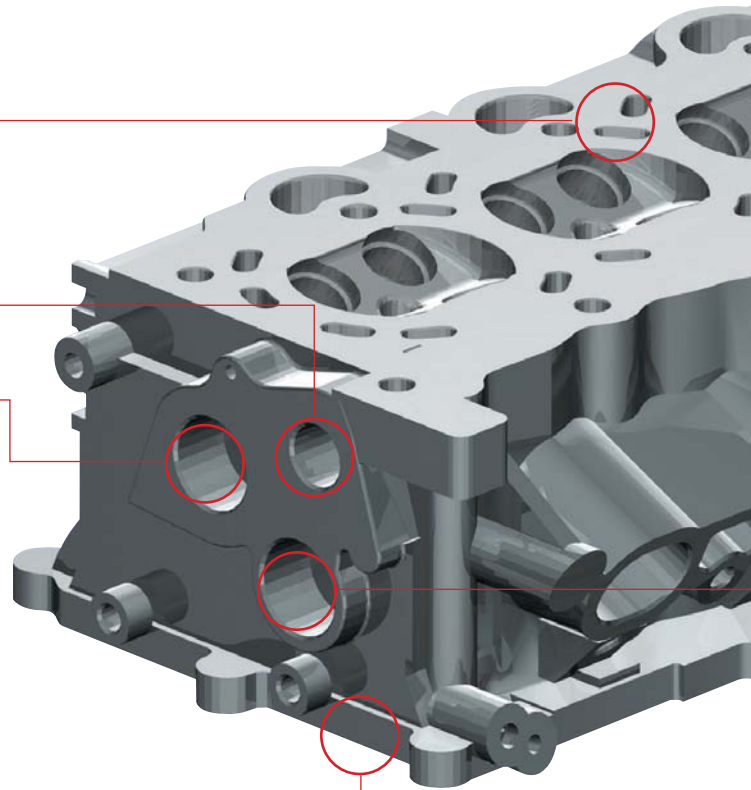


Counter Bore Tool

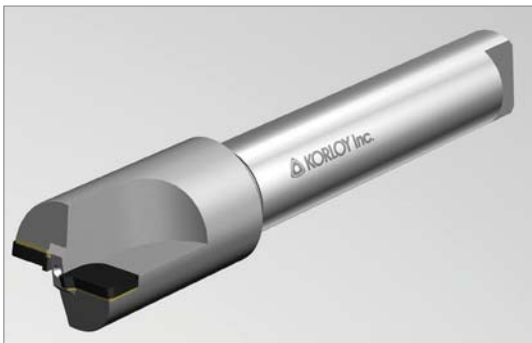


Valve Seat - Apolo Cutter(Special Boring Holder)

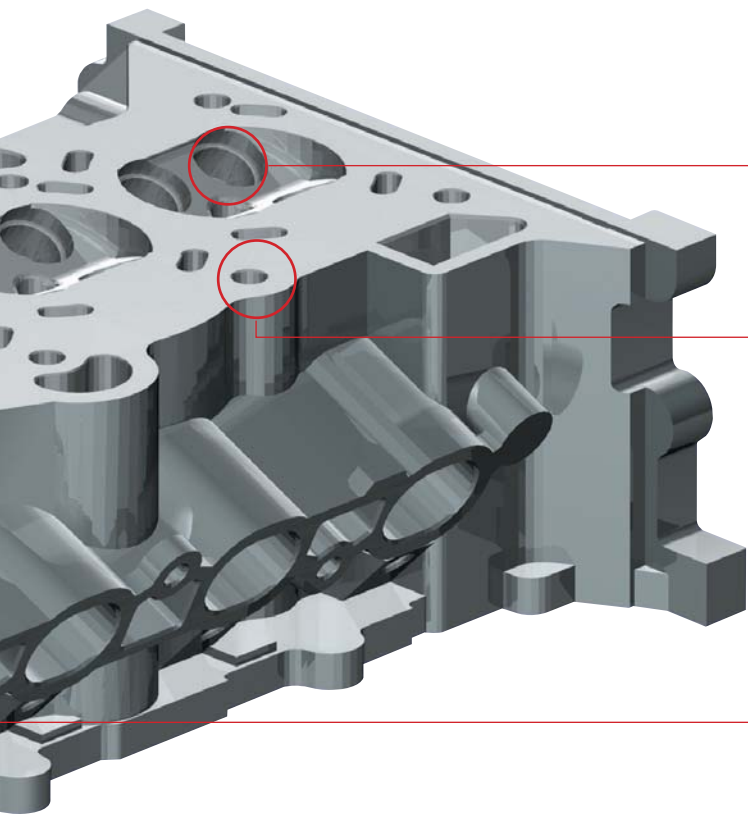

Top Face(Drilling) - Mach Drill

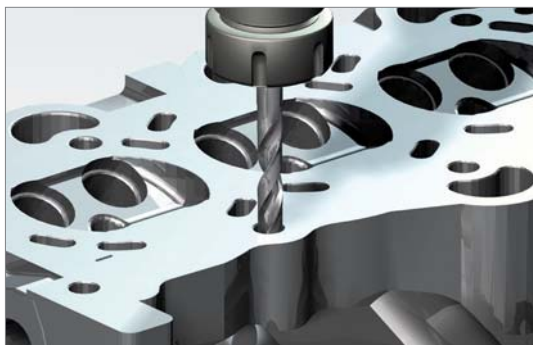

Cam Shaft Bearing Seat - Line Boring Bar

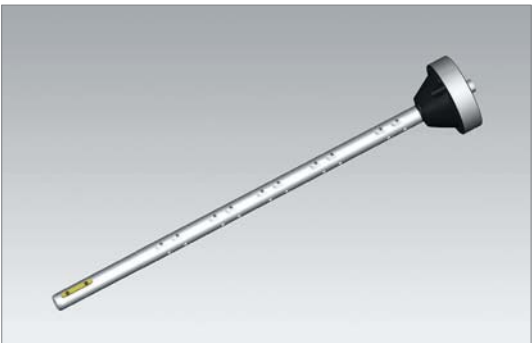

Cam Journal Bore - High Speed Reamer



- Stable machining at high speed without chattering

- Available for high speed machining
- Excellent surface finish & roundness



PARTS

Parts

K02 Shim
K03 Cartridge
K03 Chip Breaker
K03 Chip Cover
K03 Clamp
K04 Coolant Bolt
K04 Wrench Bolt
K04 Lever

Parts

K05 Locator
K05 Nut
K05 Pin
K05 Screw
K06 Shim Pin
K07 Spring
K07 Wrench
K07 Stop Ring
K07 Washer
K07 Stopper
K07 Nozzle

A large, bold, dark grey letter 'K' logo, positioned in the lower right quadrant of the page. The 'K' is composed of thick, solid strokes.

PARTS

Shim

Geometry	Designation	Dimensions				
		a	b	c	d	angle
	SC32	8.5	3.18		4.9	
	SC32N	8.5	3.18		4.88	
	SC42	12.5	3.18		6.9	
	SC42N	11.6	3.18		6.5	
	SC53	15.7	4.76		7.9	
	SC53N	14.6	4.76		8.11	
	SC63	18.85	4.76		10	
	SC63N	17.8	4.76		9.6	
	SC83	24.4	4.76		12.8	
	SC84N	24.2	6.35		13	
	SC42B	12.5	3.18		6.9	
	SC42CC	12.5	3.18		3.5	
	SC32D	9.27	3.18		6.48	
	SC43D	12.45	4.76		7.34	
	SC53D	15.62	4.76		9.65	
	SC63D	18.8	4.76		11.25	
	SC84D	25.08	6.35		14.85	
	SC42S	11.5	3.18		6.4	
	SC32S	8.3	3.18		5.4	
	SC63V	18.35	4.76		5.5	
	SC83V	25.3	4.76		6.55	
	SC84V	25.3	6.35		6.35	
	SC32V	9.12	3.18		3.4	
	SC42V	12.6	3.18		4.5	
	SC44V	12.6	6.35		4.5	
	SC54V	15.75	6.35		5.5	
	SS32V	9.12	3.18		3.4	
	SS42V	12.6	3.18		4.5	
	SS54V	15.75	6.35		5.5	
	SS64V	18.9	6.35		5.5	
	SD317	9.35	2.7		5.2	
	SD32N	8.5	3.18		4.88	
	SD42	12.5	3.18		6.9	
	SD42N	11.6	3.18		6.5	
	SD43N	11.6	4.75		6.5	
	SD32D	9.2	3.18		5.8	
	SD43D	12.45	4.76		7.34	
	SD32S	8.5	3.18		5.4	
	SD42S	11.5	3.18		6.4	
	SD32V	9.12	3.18		3.4	
	SD43V	12.6	4.76		4.5	
	SD44V	12.6	6.35		4.5	

Geometry	Designation	Dimensions				
		a	b	c	d	angle
	SES33C	9.1	12	4.76	3.5	
	SK33C	9.33	14.7	4.8	3.5	
	SK33CL	9.33	14.7	4.8	3.5	
	SR10	8.4	3.18		4.7	
	SR12	10	3.18		4.7	
	SR16	13.55	4.76		6.9	
	SR20	17.1	4.85		7.9	
	SR25	22	6.35		9.6	
	SR32	27.8	6.35		13	
	SR42CC	12.575	3.18		3.5	
	SR10S	8.8	3.18		5.4	
	SR12S	10.55	3.18		5.4	
	SS32	8.5	3.18		4.9	
	SS32N	8.5	3.18		4.88	
	SS42	12.5	3.18		6.9	
	SS42B	12.5	3.18		6.9	
	SS42N	11.6	3.18		6.5	
	SS53	15.7	4.76		7.9	
	SS53N	14.6	4.76		8.11	
	SS63	18.85	4.76		10	
	SS63N	17.8	4.76		9.6	
	SS84	24.4	6.35		12.8	
	SS84N	24.2	6.35		13	
	SS42CC	12.5	3.18		3.5	
	SS32CC	9.3	3.18		3.5	
	SS32D	9.27	3.18		5.77	
	SS43D	12.45	4.76		7.34	
	SS53D	15.62	4.76		9.65	
	SS63D	18.8	4.76		11.25	
	SS84D	25.15	6.35		14.43	
	SS32S	8.3	3.18		5.4	
	SS42S	11.5	3.18		6.4	
	SS42SAF	11.2	3		5.5	
	ST317	9.35	2.7		5	
	ST317B	9.35	2.7		5	
	ST317N	8.5	2.7		4.88	
	ST42	12.5	3.18		6.9	
	ST42N	11.6	3.18		6.5	
ST53	15.7	4.76		7.9		



Shim

Geometry	Designation	Dimensions				
		a	b	c	d	angle
	ST32CC	9.35	3.18		3.5	
	ST32C1	9.13	3.18		4.95	
	ST42C1	12.3	3.18		4.95	
	ST32D	9.35	3.18		5.77	
	ST43D	12.52	4.76		7.34	
	ST53D	15.7	4.76		9.65	
	ST63D	18.87	4.76		11.25	
	ST32M	8.7	3.18		4.7	
	ST43M	12.5	4.76		6.3	
	ST32S	8.5	3.18		5.4	
	ST32V	9.12	6.18		3.4	
	ST44V	12.6	6.35		4.5	
	SV32D	9.2	3.18		5.8	
	SV43D	12.29	4.76		7.34	
	SV32D2	9.2	3.18		5.8	
	SV32S	8.4	3.18		5.4	
	SW317	9.35	2.7		5	
	SW317N	8.5	2.7		4.88	
	SW42	12.5	3.18		6.9	
	SW42N	11.6	3.18		6.5	
	SW32D	9.25	3.18		5.8	
	SW43D	12.45	4.76		7.34	
	SW53D	15.62	4.76		9.65	
	SW63D	18.8	4.76		11.25	
	SW84D	24.89	6.35		14.43	
	SW43M	12.5	4.76		6.2	
	SW32M	8.52	3.18		5.2	
	SW32V	9.12	3.18		3.4	
	SW44V	12.6	6.35		4.5	
	SW54V	15.75	4.76		5.5	

Cartridge

Geometry	Designation	Dimensions				
		a	b	c	d	angle
	LAPDR-AJ	M4x0.7	30	15	10	

Chip Breaker

Geometry	Designation	Dimensions				
		a	b	c	d	angle
	CB20	8.5	3.4	20		

Chip Cover

Geometry	Designation	Dimensions				
		a	b	c	d	angle
	CFMP3R14R1-A	10.5	20	1	(Ø4.3)	
	CFMP3R-A	8	18	1	(Ø4.3)	
	CFMP4R-A	8	22	1	(Ø4.3)	

Clamp

Geometry	Designation	Dimensions				
		a	b	c	d	angle
	CA05R	8.9	5.5	17.6	3.3	
	CA06R	12	7.2	20.6	5.3	
	CH5R3	7.85	7.2	14.8	3.1	
	CH6R4	12.02	9	23.97	3.75	
	CBH4.5R1	8	5.74	17.7	4	
	CBH4.5R2	9.5	6.4	18	4	
	CBH5R1	10	7.8	21.3	5	
	CBH6R1	12	9.3	26	6	
	CDH6N	9.5	10	18.6	6.1	
	CDH7N	7.9	11.4	14.7	4.7	
	CDH8N	10.9	16.9	22.4	6.1	
	CDH8N1	10.9	16.9	19.1	6.1	
	CDH8N2	10.9	16.9	25.4	6.1	
	CDH8N3	12.5	19.8	25.4	9.2	
	CDS8N	10.8	17	22.2	5	
	CGH5R1	19.5	9.5	28.8	2.5	
	CGH5R2	20.5	9.5	28.8	3.5	
	CGH5R3	22.5	9.5	28.8	5.5	

▶ Clamp

Geometry	Designation	Dimensions				
		a	b	c	d	angle
	CGH6R1	22.3	11.9	23.2	2.5	
	CGH6R2	23.2	11.9	23.2	3.4	
	CGH6R3	24.0	11.9	23.2	4.2	
	CHH3.5R1	7.5	6.7	13	2.45	
	CHH4.5R1	7.9	7.85	14.1	2.54	
	CHH5.5R1	9.8	10	16.4	4	
	CH4R1	7.4	5	14.1	3.1	
	CH5R1	10.0	6.6	20.2	4.5	
	CH5R2	6.85	7	13.8	2	
	CH6R2	8.85	8.7	16.5	2	
	CH6R3	11.8	10	23	4.2	
	CMH5R1	18.5	7.9	16	6.26	
	CMH6R2	20.0	11	17.5	13.8	
	CMH6R6	18.5	7.9	16	6.26	
	CMH6R1	24	8.5	16.5	8.28	
	CMH6R3	20.0	11	17.51		
	CMH6L3	20.0	11	17.51		
	CS5R1	6.8	7	14.5	2	
	CS6R1	8.8	8.5	18.1	2.7	
	CS8R1	11.8	10	23	4.2	
	CTH6L1	23.5	12	25.4	14.35	
	CTH6R1	23.5	12	25.4	14.35	
	CTH6R2	21.78	12.9	31.22	17.33	
	CVH3	21	11	5.8	7.7	
	CVH3V	29	14	7	8	
	CVH4	25.5	14.5	6	7	
	CVH5	30	17	7.5	9.5	
	CVH6	33.5	18.5	8	10	
	CXH8N	10.1	10.0	17.5	-	

▶ Coolant Bolt

Geometry	Designation	Dimensions					
		a	b	c	d	B(T)	a'
	CBA063-3IN/MM	M10	Ø25	Ø16	37	8	(27)
	CBA063-4IN/MM	M10	Ø25	Ø16	42.5	8	(27)
	CBA080-IN/MM	M12	Ø28	Ø18	45.5	10	(32)
	CBP063-IN/MM	M10	Ø22	Ø16	38.6	8	(27)
	CBP080-IN/MM	M12	Ø25	Ø18	48.6	10	(32)

▶ Coolant Bolt

Geometry	Designation	Dimensions						
		a	b	c	d	B(T)	a'	
	CBA100-IN/MM	M16	Ø54	Ø43	47	14	(32)	
	CBA100-IN-25.4	M12	Ø44	Ø36	41.5	10	(25)	
	CBA125-IN	M20	Ø65	Ø54	56	17	(38)	
	CBA125-IN-25.4	M12	Ø44	Ø36	43.5	10	(25)	
	CBA125-MM	M20	Ø65	Ø54	57	17	(35)	
	CBA160-IN	M24	Ø83	Ø73	56	19	(38)	
	CBA160-MM	M20	Ø83	Ø73	53	17	(34)	
	CBP100-IN	M16	Ø50	Ø43	48.6	14	(32)	
	CBP100-IN-25.4	M12	Ø44	Ø36	46.5	10	(25)	
	CBP100-MM-1	M16	Ø50	Ø43	48.6	14	(36)	
	CBP125-IN	M20	Ø65	Ø54	56	17	(35)	
	CBP125-IN-25.4	M12	Ø44	Ø36	55	10	(28)	
	CBP125-MM	M20	Ø65	Ø54	57	17	(35)	
	CBP125-MM-1	M20	Ø61	Ø54	65.6	14	(33)	
	CBP160-IN	M24	Ø83	Ø73	56	19	(38)	
	CBP160-MM	M20	Ø83	Ø73	53	17	(34)	

▶ Wrench Bolt

Geometry	Designation	Dimensions				
		A	C	K	L	M
	SB0825	13	6	8	25	M08 x 1.25
	SB1025	16	8	10	25	M10 x 1.50
	SB1035	16	8	10	35	M10 x 1.50
	SB1230	18	10	12	30	M12 x 1.75
	SB1630	24	14	16	30	M16 x 2.0
	SB1645	24	14	16	45	M6 x 2.0
	SB2040	30	17	20	40	M20 x 2.5
	CB1025	13	6	8	25	M08x1.25
	CB1025	16	8	10	25	M10x1.50
	CB1035	16	8	10	35	M10x1.50
	CB1230	18	10	12	30	M12x1.75
	CB1245	18	10	12	45	M12x1.75
	CB1630	24	14	16	30	M16x2.0
	CB1645	24	14	16	45	M16x2.0
	CB2040	30	17	20	40	M20x2.5

▶ Lever

Geometry	Designation	Dimensions			
		a	b	c	d angle
	LR10	3.4	10.8	11.7	3
	LR12	3.7	13.5	13.4	3.5
	LR16	4.75	18.7	18.3	4.3
	LR20	5.9	20.5	18.7	5.55
	LR25	7.35	24.25	23.7	6.2
	LR32	8.45	29.7	26.95	7.9
	LV2	2.6	7.75	6	2.1
	LV3B	3.1	10	9.5	3.7
	LV4B	4.7	14.55	15.6	4.7
	LV4BN	4.7	16	14.9	4.68
	LV3	3.7	10	12	3.6
	LV3N	3.75	10	12	3.55
	LV3AN	3.75	12.1	11.4	4.64
	LV3C	3.1	10	7.85	3.6
	LV3CN	3.2	10	7.8	3.6
	LV3D	3.1	11.7	9.5	3.6
	LV3DN	3.2	11.65	9.5	3.55
	LV4	4.7	14.55	14	4.7
	LV4N	4.7	13.45	13.2	4.68
	LV5	6	17.1	17	6
	LV5N	6	16.4	17.08	5.95
	LV5AN	6	18.82	17.3	5.95
LV6N	7.5	20.5	21	7.6	
LV8N	8.6	25.5	25.4	8.6	



Screw

Geometry	Designation	Dimensions						
		a	b	c	d	B(T)	α	
	FTNB0411	M4 X 0.7	10.8	5.7	15	60°		
	FTNC04509	M4.5 X 0.75	9.5	6.8	20	55°		
	FTNC04511	M4.5 X 0.75	11.5	6.8	20	55°		
	KHA0508	M5 X 0.8	8		2.5			
	KHA0510	M5 X 0.8	10		2.5			
	KHA0610	M6 X 1.0	10		3			
	KHA0612	M6 X 1.0	12		3.0			
	KHA0812	M8 X 1.25	12		4.0			
	KHA0815	M8 X 1.25	15		4.0			
	KHA1015	M10 X 1.5	15		5.0			
	KHA1020	M10 X 1.5	20		5.0			
		KHB0417	M4 X 0.7	17.2	4.5	2.5	2	
		KHB0406	M4 X 0.7	6	4.2	3	2	
	KHC0510	M5 X 0.8	10	8.1	2.5	90°		
	KHC0610	M6 X 1.0	10	7.8	3.0	90°		
	KHC0812	M8 X 1.25	12	9	4.0	90°		
	KHC1016	M10 X 1.5	16	12.3	5.0	90°		
	KHC1020	M10 X 1.5	20	16.3	5.0	90°		
		KHD0510	M5 X 0.8	10	9	3	2.5	
KHD0610		M6 X 1.0	10	10	4	3		
KHD0810		M8 X 1.25	10	10	7.5	4		
	LTX0512	M5 X 0.8	15.1	12	7.3	20		
	LTX0514	M5 X 0.8	17.1	14	7.3	20		
	MHA0512	M5 X 0.8	17.0	10.8	8.0	4.0		
	MHB0310	M3 X 0.5	13.4	8.0	5.5	2.5		
	MHB0410	M4 X 0.7	14.0	8.0	7.0	3.0		
	MHB1055	M10 X 1.5	65	50	16	8		
	MHB1260	M12 X 1.75	72	55	18	10		
	MHB1680	M16 X 2.0	96	75	24	14		
	MHX0523	M5 X 0.8	23.5	9.7	10	2.5		
	MHX0626	M6 X 1.0	25.8	10	11	3		
	MHX0630	M6 X 1.0	30	12.5	10.5	4		
	PTKA02508	M2.5 X 0.45	8	5	3.8	8	92°	
	PTKA03510	M3.5 X 0.6	10	5	5	15	92°	
	PTKA0407	M4 X 0.7	7	4.6	5.5	15	86°	
	PTKA0407F	M4 X 0.5	7.3	3.8	6.5	15	91°	
	PTKA0408	M4 X 0.7	8	5.6	5.5	15	86°	
	PTKA0408F	M4 X 0.5	8.3	5.7	6.5	15	91°	
	PTKA0409F	M4 X 0.5	9.3	6.7	6.5	15	91°	
	PTKA0410F	M4 X 0.5	10.3	7.7	6.5	15	91°	
	PTKA0411F	M4 X 0.5	11.3	8.7	6.5	15	91°	
	PTKA0412	M4 X 0.7	12	7.5	5.9	15	92°	
	PTKA0412F	M4 X 0.5	12.3	9.7	6.5	15	91°	
	PTKA0413F	M4 X 0.5	13.3	10.7	6.5	15	91°	
	PTKA0512	M5 X 0.8	12	7	6.9	20	92°	
	PTMA03508	M3.5 X 0.6	8	5.3	6	9	90°	
	PTMA0403F	M4 X 0.5	3.3	1.7	6.5	15	91°	
	PTMA0404F	M4 X 0.5	4.3	2.7	6.5	15	91°	
	PTMA0405F	M4 X 0.5	5.3	3.7	6.5	15	91°	
	PTMA0406F	M4 X 0.5	6.3	4.7	6.5	15	91°	
	PTMA0411	M4 X 0.7	11	8.5	6.6	15	90°	
	PTKA0411-R3	M4 X 0.7	11	6.9	6	15		



Geometry	Designation	Dimensions					
		a	b	c	d	B(T)	α
	PXMA0306	M3 X 0.5	5.9	5.7	2	90°	
	SHX0310	M3 X 0.5	10	5.9	2	91°	
	RHA0510	M5 X 0.8	10	4.0			
	RHA0613	M6 X 1.0	16.3	13	10.5	4.0	
	RHA0620	M6 X 1.0	24	20	10.5	4.0	
	RHA0613	M6 X 1.0	18	8.5	4.0	61°	
	VHX0509B	M5 X 0.8	9	4.15	5	2	
	VHX0512B	M5 X 0.8	12	6.5	5	2	
	VHX0512BN	M5 X 0.8	12	6.56	5	2	
	VHX0514	M5 X 0.8	14.5	8.25	5	2	
	VHX0613N	M6 X 1.0	13.4	7.5	5.93	2.5	
	VHX0617	M6 X 1.0	17	10	6	2.5	
	VHX0617N	M6 X 1.0	16.75	8.34	5.9	2.5	
	VHX0817N	M8 X 1.0	17.05	7.98	7.9	3	
	VHX0820N	M8 X 1.0	20.7	7.98	7.9	3	
	VHX0820AN	M8 X 1.0	20.5	10.36	7.9	3	
	VHX0821	M8 X 1.0	21	10	8	3	
	VHX0821N	M8 X 1.0	21.2	9.68	7.9	3	
	VHX0823N	M8 X 1.0	23.5	10.36	7.9	3	
	VHX0825	M8 X 1.0	25	12	8	3	
	VHX1027N	M10 X 1.0	27.2	14.4	9.8	5	
	VHX1236N	M12 X 1.0	36	18.3	11.8	5	
		VHX0613A	M6 X 1.0	13.4	9.1	6.0	2.5
SHXN0509F		M5 X 0.5	M3.5 X 0.6	8.65	6.3	3.5	
	SHXN0610F	M6 X 0.75	M4 X 0.5	10	7.8	4	
	SHXN0712F	M7 X 0.75	M5 X 0.8	12	8.5	5	
	WTX0813	M8 X 1.25	17.2	4.9	8.5	25	
	WTX0817	M8 X 1.25	22	4.9	8.5	25	

Shim Pin




Geometry	Designation	Dimensions			
		a	b	c	d
	SP3	5.5	3.5	5.9	
	SP3N	6.85	3.3	5.55	
	SP3N-1	5.3	3.3	5.55	
	SP4	7.0	4.0	7.6	
	SP4N	5.8	4.35	7.4	
	SP5	8.5	4.5	8.8	
	SP5N	8.5	5.68	9	
	SP6N	11.1	6.0	11.0	
	SP8N	12.0	10.0	15.35	
		SP2M	5	14	M5 X 0.8
SP3M		3.5	19.5	M4 X 0.7	4
SP3M-1		3.5	16.5	M4 X 0.7	4
SP4M		5	19	M5 X 0.8	6








▶ Shim Pin

Geometry	Designation	Dimensions			
		a	b	c	d
	SP3D	3.7	13.1	UNF10-32	5.6
	SP3D2	3.6	12	UNF10-32	5.5
	SP3DS	3.7	11.54	UNF10-32	5.6
	SP4D	4.97	17.19	UNF1/4 28	7.12
	SP4DL	5	17.1	UNF1/4 28	7
	SP4DS	4.97	13.26	UNF1/4 28	
	SP5D	6.21	21.9	UNF5/16-24	9.44
	SP6D	7.75	21.9	UNF3/8-24	11.02
SP8D	9.02	29.63	UNF7/16-20	14.21	
	LSPS3	60	8.2	5.55	
	LSPS4	65	10	7	
	LSPS5	69	11.4	8.85	
	LSPS6	69	13	11	
	LSPS8	73	16.5	15.2	




▶ Spring

Geometry	Designation	Dimensions			
		a	b	c	d
	SR2	4.0	2.8	12.6	0.4
	SPR0315	3.0	15		
	SPR0415	4.0	15		
	SR3	9.2	12.5		
	SR4	4.0	11.0		
	SPR0714	7	14		
	SPR0510	5	10		
	SPR0714	7	14		
	SPR0811	8	11		



▶ Wrench

Geometry	Designation	Dimensions		
		a	b	B(T)
	HW20L	52	18	2
	HW25L	58.5	20.5	2.5
	HW30L	66	23	3
	HW35L	72	25	3.5
	HW40L	74	29	4
	HW50L	85	33	5
	HW40	82	80	4
	HW50	96	90	5
	SW50L	70	27.5	
	TW06P	63	6	
	TW07P	63	7	
	TW08P	71	8	
	TW09P	75	9	
	TW10P	78	10	
	TW15P	82	15	
	TW20P	86	20	
	TW15L	60	21	15
	TW20L	60	21	20


▶ Wrench

Geometry	Designation	Dimensions		
		a	b	B(T)
	TW07S	140	60	7
	TW08S	150	76	8
	TW09S	165	70	9
	TW15S	190	90	15
	TW20S	195	91	20
	TW20	75	80	20
	TW25	74	80	25
	SW15S	150	13	


▶ Stop Ring

Geometry	Designation	Dimensions			
		a	b	c	d
	CR03	4.8	2.6	0.4	3.0
	CR04	6.6	3.6	0.4	4.0
	CR05	7.6	4.6	0.4	5.0
	ER03	7.0	2.6	0.6	3.0
	ER04	9.0	3.5	0.6	4.0
	ER05	11	4.3	0.6	5.0


▶ Washer

Geometry	Designation	Dimensions		
		a	b	c
	WA3	11.0	6.8	0.5-1.0
	WA4	10.0	5.3	0.5-1.0

▶ Stopper

Geometry	Designation	Dimensions			
		a	b	c	d°
	STP5	11	10.2	11	30°

▶ Nozzle

Geometry	Designation	Dimensions	
		a	b
	CN0605	6	4.6



TECHNICAL INFORMATION

General Information I

- L02 Workpiece material grades
- L06 Steel, Non-ferrous metal symbol list
- L07 SI unit conversion table
- L08 Hardness calculating table
- L09 Properties of Korloy grades
- L10 Technical Info. for Stainless steel

Technical Information

- L12 Technical Information for Turning
- L20 Technical Information for Milling
- L24 Technical Information for Tapers
- L27 Technical Information for Endmills
- L30 Technical Information for Drills

General Information II

- L36 The Comparison of Chip Breakers
- L37 KORLOY Grades
- L42 The Comparison of Grade for Turning
- L43 The Comparison of Grade for Milling



TECHNICAL INFORMATION

Carbon steel and alloy steel for structural use

Type	Korea	ISO	Japan	U.S.A	Great Britain	Germany	France	Russia	
	KS	ISO	JIS	AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	GOCT	
Carbon steel	SM10C	C10	S10C	1010		040A10 045A10 045M10	C10E C10R	XC10	-
	SM15C	C15E4 C15M2	S15C	1015		055M15	C15E C15R	-	-
	SM20C	-	S20C	1020		070M20 C22, C22E C22R	C22 C22E C22R	C22 C22E C22R	-
	SM25C	C25 C25E4 C25M2	S25C	1025		C25 C25E C25R	C25 C25E C25R	C25 C25E C25R	-
	SM30C	C30 C30E4 C30M2	S30C	1030		080A30 080M30 CC30 C30E C30R	C30 C30E C30R	C30 C30E C30R	30Г
	SM35C	C35 C35E4 C35M2	S35C	1035		C35 C35E C35R	C35 C35E C35R	C35 C35E C35R	35Г
	SM40C	C40 C40E4 C40M2	S40C	1039 1040		080M40 C40 C40E C40R	C40 C40E C40R	C40 C40E C40R	40Г
	SM43C	-	S43C	1042 1043		080A42	-	-	40Г
	SM45C	C45 C45E4 C45M2	S45C	1045 1046		C45 C45E C45R	C45 C45E C45R	C45 C45E C45R	45Г
	SM48C	-	S48C	-		080A47	-	-	45Г
	SM50C	C50 C50E4 C50M2	S50C	1049		080M50 C50 C50E C50R	C50 C50E C50R	C50 C50E C50R	50Г
	SM53C	-	S53C	1050 1053		-	-	-	50Г
	SM55C	C55 C55E4 C55M2	S55C	1055		070M55 C55 C55E C55R	C55 C55E C55R	C55 C55E C55R	-
	SM58C	C60 C60E4 C60M2	S58C	1059 1060		C60 C60E C60R	C60 C60E C60R	C60 C60E C60R	60Г
Alloy steel	Nickel chromium steel	SNC236	-	SNC236	-	-	-	-	40XH
		SNC415(H)	-	SNC415(H)	-	-	-	-	-
		SNC631(H)	-	SNC631(H)	-	-	-	-	30XH3A
		SNC815(H)	15NiCr13	SNC815(H)	-	655M13(655H13)	15NiCr13	-	-
		SNC836	-	SNC836	-	-	-	-	-
	Nickel chromium molybdenum steel	SNCM220	20NiCrMo2 20NiCrMoS2	SNCM220	8615 8617(H) 8620(H) 8622(H)	805A20 805M20 805A22 805M22	20NiCrMo2 20NiCrMoS2	20NCD2	-
		SNCM240	41CrNiMo2 41CrNiMoS2	SNCM240	8637 8640	-	-	-	-
		SNCM415	-	SNCM415	-	-	-	-	-
		SNCM420(H)	-	SNCM420(H)	4320(H)	-	-	-	20XH2M(20XHM)
		SNCM431	-	SNCM431	-	-	-	-	-
		SNCM439	-	SNCM439	4340	-	-	-	-
		SNCM447	-	SNCM447	-	-	-	-	-
		SNCM616	-	SNCM616	-	-	-	-	-
		SNCM625	-	SNCM625	-	-	-	-	-
	SNCM630	-	SNCM630	-	-	-	-	-	
	SNCM815	-	SNCM815	-	-	-	-	-	
Chromium steel	SCr415(H)	-	SCr415(H)	-	-	17Cr3 17CrS3	-	15X 15XA	
	SCr420(H)	20Cr4(H) 20CrS4	SCr420(H)	5120(H)	-	-	-	20X	
	SCr430(H)	34Cr4 34CrS4	SCr430(H)	5130(H) 5132(H)	34Cr4 34CrS4	34Cr4 34CrS4	34Cr4 34CrS4	30X	
	SCr435(H)	34Cr4 34CrS4 37Cr4 37CrS4	SCr435(H)	5135(H)	37Cr4 37CrS4	37Cr4 37CrS4	37Cr4 37CrS4	35X	
	SCr440(H)	37Cr4 37CrS4 41Cr4 41CrS4	SCr440(H)	5140(H)	530M40 41Cr4 41CrS4	41Cr4 41CrS4	41Cr4 41CrS4	40X	
	SCr445(H)	-	SCr445(H)	-	-	-	-	45X	

• The above Alloy steel can supplied by domestic manufacturing



Type		Korea	ISO	Japan	U.S.A	Great Britain	Germany	France	Russia
		KS	ISO	JIS	AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	GOCT
Alloy steel	Chromium molybdenum steel	SCM415(H)	-	SCM415(H)	-	-	-	-	-
		SCM418(H)	18CrMo4 18CrMoS4	SCM418(H)	-	-	18CrMo4 18CrMoS4	-	20XM
		SCM420(H)	-	SCM420(H)	-	708M20(708H20)	-	-	20XM
		SCM430	-	SCM430	4130	-	-	-	30XM 30XMA
		SCM432	-	SCM432	-	-	-	-	-
		SCM435(H)	34CrMo4 34CrMoS4	SCM435(H)	(4135H) 4137(H)	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	35XM
		SCM440(H)	42CrMo4 42CrMoS4	SCM440(H)	4140(H) 4142(H)	708M70 709M40 42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	-
		SCM445(H)	-	SCM445(H)	4145(H) 4147(H)	-	-	-	-
	Manganese steel and Manganese chromium steel	SMn420(H) SMn433(H)	22Mn6(H) -	SMn420(H) SMn433(H)	1522(H) 1534	150M19 150M36	- -	- -	- 30Г 2 35Г 2 35Г 2 40Г 2 40Г 2 45Г 2
		SMn438(H)	36Mn6(H)	SMn438(H)	1541(H)	150M36	-	-	-
SMn443(H)		42Mn6(H)	SMn443(H)	1541(H)	-	-	-	-	
SMnC420(H) SMnC443(H)		- -	SMnC420(H) SMnC443(H)	- -	- -	- -	- -	- -	
Aluminum chromium molybdenum steel		SACM645	41CrAlMo74	SACM645	-	-	-	-	-

• The above Alloy steel can supplied by domestic manufacturing

▶ Tool steel

Type		Korea	ISO	Japan	U.S.A	Great Britain	Germany	France	Russia						
		KS	ISO	JIS	AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	GOCT						
High speed steel	SKH2	HS18-0-1	SKH2	T1	-	-	-	-	-						
	SKH3	-	SKH3	T4											
	SKH4	-	SKH4	T5											
	SKH10	-	SKH10	T15											
	SKH51	HS6-5-2	SKH51	M2											
	SKH52	HS6-6-2	SKH52	M3-1											
	SKH53	HS6-5-3	SKH53	M3-2											
	SKH54	HS6-5-4	SKH54	M4											
	SKH55	HS6-5-2-5	SKH55	M 35											
	SKH56	-	SKH56	M36											
	SKH57	HS10-4-3-10	SKH57	-											
	SKH58	HS2-9-2	SKH58	M7											
	SKH59	HS2-9-1-8	SKH59	M42											
	Alloy tool steel	STS11	-	SKS11						F2	-	-	-	-	-
		STS2	-	SKS2						-					
STS21		-	SKS21	-											
STS5		-	SKS5	-											
STS51		-	SKS51	L6											
STS7		-	SKS7	-											
STS8		-	SKS8	-											
STS4		-	SKS4	-											
STS41		-	SKS41	-											
STS43		105V	SKS43	W2-9 1/ W2-8 1-2											
STS44		-	SKS44	-											
STS3		-	SKS3	-											
STS31		105WCr1	SKS31	-											
STS93		-	SKS93	-											
STS94		-	SKS94	-											
STS95		-	SKS95	-											
STD1		210Cr12	SKD1	D3											
STD11		-	SKD11	D2											
STD12		100CrMoV5	SKD12	A2											
STD4		-	SKD4	-											
STD5		X30WCrV9-3	SKD5	H21											
STD6		X37CrMoV5-1	SKD6	H11											
STD61		X40CrMoV5-1	SKD61	H13											
STD62		X35CrWMoV5	SKD62	H12											
STD7		32CrMoV12-28	SKD7	H10											
STD8		-	SKD8	H19											
STF3	-	SKT3	-												
STF4	55NiCrMoV7	SKT4	L6												

• The above Alloy steel can supplied by domestic manufacturing



General Information I

Type	Korea	ISO	Japan	U.S.A		Great Britain	Germany	France	Russia
	KS	ISO	JIS	USA	AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	GOCT
Free cutting carbon steel	SUM11	-	SUM11	1110					
	SUM12	-	SUM12	1109					
	SUM21	9S20	SUM21	1212					
	SUM22	11SMn28	SUM22	1213		230M07	9SMn28	S250	
	SUM22L	11SMnPb28	SUM22L	12L13			9SMnPb28	S250Pb	
	SUM23	-	SUM23	1215		240M07	9SMn36	S 300	
	SUM23L	-	SUM23L	-					
	SUM24L	11SMnPb28	SUM24L	12L14			9SMnPb36	S300Pb	
	SUM25	12SMn35	SUM25	-					
	SUM31	-	SUM31	1117					
	SUM31L	-	SUM31L	-					
	SUM32	-	SUM32	-					
	SUM41	-	SUM41	1137					
	SUM42	-	SUM42	1141					
	SUM43	44SMn28	SUM43	1144					
High carbon chromiom	STB1	-	SUJ1	-					
	STB2	B1	SUJ2	52100		534A99	100Cr6	100Cr6	
	STB3	B2	SUJ3	ASTM A 485 Grade 1					
	STB4	-	SUJ4	-					
	STB5	-	SUJ5	-					

• The above Special speed steel can supplied by domestic manufacturing

Stainless steel

Type		Korea	ISO	Japan	U.S.A		Great Britain	Germany	France	Russia	
		KS	ISO	JIS	USA	AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	GOCT	
Stainless steel	Austenitic	STS201	X12CrMnNiN17-7-5	SUS201	S20100	201	284S16	X12CrNi17-7	Z12CMN17-07Az	12X17*9AH4	
		STS202	X12CrMnNiN18-9-5	SUS202	S20200	202	301S21	X2CrNiN18-7		07X16H6	
		STS301	X10CrNi18-8	SUS301	S30100	301			X12CrNi17-7	Z11CN17-08	
		STS301L	X2CrNiN18-7	SUS301L							
		STS301J1		SUS301J1				302S25			12X18H9
		STS302		SUS302	S30200	302			X10CrNiS18-9	Z12CN18-09	
		STS302B	X12CrNiSi18-9-3	SUS302B	S30215	302B	303S21				
		STS303	X10CrNiS18-9	SUS303	S30300	303	303S41			Z8CNF18-09	12X18H10E
		STS303Se		SUS303Se	S30323	303Se			X5CrNi18-10		
		STS303Cu		SUS303Cu				304S31			08X18H10
		STS304	X5CrNi18-9 X2CrNi18-9	SUS304	S30400	304			X2CrNi19-11	Z7CN18-09	
								304S11			03X18H11
		STS304L	X2CrNi19-11	SUS304L	S30403	304L			X2CrNiN18-10	Z3CN19-11	
		STS304N1	X5CrNiN18-8	SUS304N1	S30451	304N				Z6CN19-09Az	
		STS304LN	X2CrNiN18-8	SUS304LN	S30453	304LN			X5CrNi18-12	Z3CN18-10Az	
		STS304J1		SUS304J1				305S19			06X18H11
		STS305	X6CrNi18-12	SUS305	S30500	305				Z8CN18-12	
		STS309S		SUS309S	S30908	309S	310S31		X5CrNiMo27-12-2	Z10CN24-13	10X23H18
		STS310S	X6CrNi25-20	SUS310S	S31008	310S	316S31		X5CrNiMo27-13-3	Z8CN25-20	
		STS316	X5CrNiMo17-12-2 X3CrNiMo17-12-3	SUS316	S31600	316			X2CrNiMo17-13-2 X2CrNiMo17-14-3	Z7CND17-12-02 Z6CND18-12-03	03X17H14M3
	STS316L	X2CrNiMo17-12-2 X2CrNiMo17-12-3 X2CrNiMo18-14-3	SUS316L	S31603	316L				Z3CND17-12-02 Z3CND17-12-03		
	STS316N		SUS316N	S31651	316N	317S16		X6CrNiTi18-10			
	STS317		SUS317	S31700	317	321S31		X6CrNiNb18-10		08X18H10T	
	STS321	X6CrNiTi18-10	SUS321	S32100	321	347S31			Z6CNT18-10	08X18H12	
	STS347	X6CrNiNb18-10	SUS347	S34700	347			X6CrAl13	Z6CNNb18-10		
	STS384	X3NiCr18-16	SUS384	S38400	384	405S17			Z6CN18-16		
	STS405	X6CrAl13	SUS405	S40500	405				Z8CA12		
	STS410L		SUS410L					X6Cr17	Z3C14		
	STS429		SUS429	S42900	429	430S17		X7CrS18		12X17	
	STS430	X6Cr17	SUS430	S43000	430			X6CrMo17-1	Z8C17		
	STS430F	X7CrS17	SUS430F	S43020	430F	434S17			Z8CF17		
	STS434	X6CrMo17-1	SUS434	S43400	434				Z8CD17-01		
	STS444	X2CrMoTi18-2	SUS444	S44400	444				Z3CDT18-02		
	STSM27		SUSXM27	S44627				X10Cr13	Z1CD26-01		
	Martensitic	STS403		SUS403	S40300	403	410S21				
STS410		X12Cr13	SUS410	S41000	410	416S21	X20Cr13	Z13C13			
STS416		X12CrS13	SUS416	S41600	416	420S29	X20CrNi17-2	Z11CF13	20X13		
STS420J1		X20Cr13	SUS420J1	S42000	420	431S29		Z20C13	20X17H2		
STS431		X19CrNi16-2	SUS431	S43100	431				Z15CN16-02		
STS440A	X70CrMo15	SUS440A	S44002	440A			X7CrNiAl17-7	Z70C15			
Precipitation hardening type	STS630	X5CrNiCuNb16-4	SUS630	S17400	S17400			Z6CNU17-04	09X17H7IO		
	STS631	X7CrNiAl17-7	SUS631	S17700	S17700			Z9CNA17-07			
	STS631J1		SUS631J1								

• The above Stainless steel can supplied by domestic manufacturing



▶ Casting or forging steel

Type	Korea	ISO	Japan	U.S.A	Great Britain	Germany	France	Russia		
	KS	ISO	JIS	AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	GOCT		
Casting Iron	Grey iron casting	GC100	100,150, 200, 250, 300, 350	FC100	No 20 B No 25 B No 30 B No 35 B No 45 B No 50 B No 55 B	Grade 150 Grade 220 Grade 260 Grade 300 Grade 350 Grade 400	GG 10	Ft 10 D Ft 15 D Ft 20 D Ft 25 D Ft 30 D Ft 35 D Ft 40 D	-	
		GC150		FC150			GG 15			
		GC200		FC200			GG 20			
		GC250		FC250			GG 25			
Spheroidal graphite iron casting	GCD400	700-2, 600-3, 500-7, 450-10, 400-15, 400-18, 350-22	FCD400	60-40-18 80-55-06 100-70-03	SNG 420/12 SNG 370/17 SNG 500/7 SNG 600/3 SNG 700/2	GGG 40 GGG 40.3 GGG 50 GGG 60 GGG 70	FCS 400-12 FGS 370-17 FGS 500-7 FGS 600-3 FGS 700-2	B		
									GCD500	FCD500
									GCD600	FCD600
									GCD700	FCD700
Austempered Spheroidal graphite iron casting	FCAD	-	FCAD	-	EN-GJS-	EN-GJS-	EN-GJS-	-		
Austenitic iron casting	FCA-FCDA-	L-, S-	FCA-FCDA-	Type 1, 2, Type D-2, D-3A Class 1, 2	F1, F2, S2W, S5S	GGL-, GGG-	L-, S-	-		

▶ Non-ferrous alloy

Type	Korea	ISO	Japan	U.S.A	Great Britain	Germany	France	Russia	
	KS	ISO	JIS	AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	GOCT	
Aluminum alloy	Aluminum alloy ingots for casting	AC1B	Al-Cu4MgTi	AC1B	204.0	-	-	A-U5GT	
		AC2A	-	AC2A	-	-	-	-	
		AC2B	-	AC2B	319.0	-	-	-	
		AC3A	-	AC3A	-	-	LM-6	-	
		AC4A	-	AC4A	-	-	-	G(GK)-AlSi9Cu3	-
		AC4B	-	AC4B	-	-	-	-	-
		AC4C	Al-Si7Mg(Fe)	AC4C	356.0	-	LM-25	G(GK)-AlSi7MG	A-S7G
		AC4CH	Al-Si7Mg	AC4CH	A356.0	-	-	-	-
		AC4D	Al-Si5Cu1Mg	AC4D	355.0	-	LM-16	-	-
		AC5A	Al-Cu4Ni2Mg2	AC5A	242.0	-	-	G(GK)-AlMg5	A-U4NT
		AC7A	-	AC7A	514.0	-	LM-5	-	-
		AC8A	-	AC8A	-	-	LM-13	-	A-S12UNG
		AC8B	-	AC8B	-	-	LM-26	-	A-S10UG
		AC8C	-	AC8C	-	-	-	-	A-S10UG
		AC9A	-	AC9A	-	-	LM-29	-	-
		AC9B	-	AC9B	-	-	-	GD-AlSi12 (Cu)	A-S18UNG
		Aluminum alloy die casting	ALDC1	Al-Si12CuFe	ADC1	A413.0	LM20	GD-AlSi10Mg	A-S13
			ALDC2	-	ADC3	A360.0	-	GD-AlMg9	A-S9G
	ALDC3		-	ADC5	518.0	-	-	A-G6	
	ALDC4		-	ADC6	-	-	GD-AlSi9Cu3	A-G3T	
	ALDC7		Al-Si8Cu3Fe	ADC10	A380.0	-	GD-AlSi9Cu3	-	
	ALDC7Z		Al-Si8Cu3Fe	ADC10Z	A380.0	LM24	-	-	
	ALDC8		-	ADC12	383.0	LM2	-	-	
	ALDC8Z		-	ADC12Z	383.0	LM2	-	-	
	Aluminum alloy extruded shapes	ALDC9	-	ADC14	B390.0	LM30	EN AW-5052	-	
		A5052S	-	A5052S	5052	EN AW-5052	EN AW-5454	EN AW-5052	
		A5454S	-	A5454S	5454	EN AW-5454	EN AW-5083	EN AW-5454	
		A5083S	AlMg4.5Mn0.7	A5083S	5083	EN AW-5083	EN AW-5086	EN AW-5083	
		A5086S	-	A5086S	5086	EN AW-5086	EN AW-6061	EN AW-5086	
		A6061S	AlMg1SiCu	A6061S	6061	EN AW-6061	EN AW-6063	EN AW-6061	
		A6063S	AlMg0.7Si	A6063S	6063	EN AW-6063	EN AW-7003	EN AW-6063	
		A7003S	-	A7003S	-	EN AW-7003	-	EN AW-7003	
		A7N01S	-	A7N01S	-	-	EN AW-7075	-	
A7075S		AlZn5.5MgCu	A7075S	7075	EN AW-7075	-	EN AW-7075		

▶ Heat resistant steel

Type	Korea	ISO	Japan	U.S.A		Great Britain	Germany	France	Russia
	KS	ISO	JIS	USA	AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	GOCT
Heat resistant steel	Austenitic	STR31		SUH31			331S42		Z35CNWS14-14
		STR35		SUH35			349S52	X53CrMnNi21-9	Z52CMN21-09-Az
		STR36		SUH36			349S54		Z55CMN21-09-Az
		STR37		SUH37		S63008	381S34		
		STR38		SUH38		S63017			
		STR309		SUH309			309S24	CrNi2520	Z15CN24-13
		STR310		SUH310		S30900	310S24		Z15CN25-20
		STR330		SUH330		S31000	309		Z12NCS35-16
		STR660		SUH660		N08330	310		Z6NCTV25-20
	Ferritic	STR661		SUH661		S66286	N08330	CrAl1205	
		STR21		SUH21		R30155		X6CrTi12	
		STR409	X6CrTi12	SUH409			409S19		Z6CT12
		STR409L	X2CrTi12	SUH409L		S40900			Z3CT12
	Martensitic	STR446		SUH446		409		X45CrSi9-3	Z12C25
		STR1		SUH1		S44600	401S45		Z45CS9
		STR3		SUH3		S65007	446		Z40CSD10
		STR4		SUH4			443S65		Z80CSN20-02
		STR11		SUH11					
STR600			SUH600						
STR616			SUH616		S42200				

• The above Heat resistant steel can be supplied by domestic manufacturing



Steel, Non-ferrous metal symbol list

Comparison of workpiece material standards

GROUP	STANDARD TERM	CODE	GROUP	STANDARD TERM	CODE	
Structural Steel	Rolled Steel for Welded Structure	SWS	Forged steel	Carbon Steel Forging	SF	
	Rerolled Steel	SBR		Chromium Molybdenum Steel Forging	SFCM	
	Rolled Steel for General Structure	SB		Nickel Chromium Molybdenum Steel Forging	SFNCM	
	Light Gauge Steel for General Structure	SBC	Cast iron	Gray Cast iron	GC	
	Hot-rolled Steel Plate, Sheet/ Strip for Automobile Structural Use	SAPH		Spheroidal Graphite Cast iron	GCD	
Steel Plate	Cold-rolled Steel Sheet/Strip	SBC		Blackheart Malleable Cast iron	BMC	
	Hot-rolled Soft Steel Sheet/Strip	SHP		Whiteheat Malleable Cast iron	WMC	
Steel Pipe	Carbon Steel Pipe for Ordinary Piping	SPP	Pearlitic Malleable Cast iron	PMC		
	Carbon Steel Pipe for Boiler and Heat Exchanger	STH	Cast steel	Carbon Cast Steel	SC	
	Seamless Steel Pipe for High Pressure Gas Cylinder	STHG		High Tensile Strength Carbon Cast Steel&Low Alloy Cast Steel	HSC	
	Carbon Steel Pipe for General Structural Use	SPS		Stainless Cast Steel	SSC	
	Carbon Steel Pipe for Machine Structural Use	STST		Heat Resisting Cast Steel	HRSC	
	Alloy Steel Pipe for Structural Use	STA		High Manganese Cast Steel	HMnSC	
	Stainless Steel Pipe for Machine and Structural Use	STS-TK		Cast Steel for High Temperature and High Pressure Service	SCPH	
	Carbon Steel Square Pipe for General Structural Use	SPSR		Casting	Brass Casting	BsC
	Alloy Steel Pipe	SPA			High Strength Brass Casting	HBsC
	Carbon Steel Pipe for Pressure Service	SPPS	Bronze Casting		BrC	
	Carbon Steel Pipe for High Temperature Service	SPSR	Phosphoric Bronze Casting		PCB	
	Carbon Steel Pipe for High Pressure Service	SPPH	Aluminum Bronze Casting		AIBC	
	Stainless Steel Pipe	STSxT	Aluminum Alloy Casting		ACxA	
	Iron and Steel	Carbon Steel for Machine Structural Use	SMxxC, SMxxCK		Magnesium Alloy Casting	MgC
		Aluminum Chromium Molybdenum Steel	SACM		Zinc Alloy Die Casting	ZnDC
Chromium Molybdenum Steel		SCM	Aluminum Alloy Die Casting		ADC	
Chromium Steel		SCr	Magnesium Alloy Die Casting		MgDC	
Nickel Chromium Steel		SNC	White Metal	WM		
Nickel Chromium Molybdenum Steel		SNCM	Aluminum Alloy Casting for Bearing	AM		
Manganese Steel and manganese Chromium Steel for Machine Structural Use		SMn, SMnC	Brass Alloy Casting for Bearing	KM		
Special steel	Tool steel	Carbon Tool Steel	STC			
		Hollow Drill Steel	SKC			
		Alloy Tool Steel	STS, STD, STF			
		High Speed Tool Steel	SKH			
	Stainless steel	Stainless Steel Bar	STS			
		Heat resisting steel	Heat Resisting Steel	STR		
			Heat Resisting Steel Bar	STR		
	Heat Resisting Steel Sheet		STR			
	Free cutting carbon steel	SUM				
	Special steel	STB				
Spring steel	SPS					



SI unit conversion table

Major SI unit conversion table

■ Force

N	kgf	dyn
1	1.01972×10^{-1}	1×10^{-5}
9.80665	1	9.80665×10^5
1×10^{-5}	1.01972×10^{-6}	1

■ Stress

Pa or N/m ²	MPa or N/mm ²	kgf/mm ²	kgf/cm ²	kgf/m ²
1	1×10^{-6}	1.01972×10^{-7}	1.01972×10^{-5}	1.01972×10^{-1}
1×10^6	1	1.01972×10^{-1}	1.01972×10	1.01972×10^5
9.80665×10^6	9.80665	1	1×10^2	1×10^6
9.80665×10^4	9.80665×10^{-2}	1×10^{-2}	1	1×10^4
9.80665	9.80665×10^{-6}	1×10^{-6}	1×10^{-4}	1

■ Pressure

Pa	kPa	MPa	bar	kgf/cm ²
1	1×10^{-3}	1×10^{-6}	1×10^{-5}	1.01972×10^{-5}
1×10^3	1	1×10^{-3}	1×10^{-2}	1.01972×10^{-2}
1×10^6	1×10^3	1	1×10	1.01972×10
1×10^5	1×10^2	1×10^{-1}	1	1.01972
9.80665×10^4	9.80665×10	9.80665×10^{-2}	9.80665×10^{-1}	1

■ Work, Energy, Calorie

J	kW · h	kgf · m	kcal
1	2.77778×10^{-7}	1.01972×10^{-1}	2.38889×10^{-4}
3.60000×10^6	1	3.67098×10^6	8.60000×10^2
9.80665	2.72407×10^{-6}	1	2.34270×10^{-3}
4.18605×10^3	1.16279×10^{-3}	4.26858×10^2	1

■ Power

W	kW	kgf · m/s	PS	kcal/h
1	1×10^{-3}	1.01972×10^{-1}	1.35962×10^{-3}	0.860
1×10^3	1	1.01972×10^2	1.359 62	8.60000×10^2
9.81 65	9.80665×10^{-3}	1	1.33333×10^{-2}	8.433 71
7.355×10^2	7.355×10^{-1}	7.5×10	1	6.32529×10^2
1.16279	1.16279×10^{-3}	1.18572×10^{-1}	1.58095×10^{-3}	1

■ Specific heat

J/(kg · K)	kcal/(kg · °C) cal/(g · °C)
1	2.38889×10^{-4}
4.18605×10^3	1

■ Thermal conductivity

W/(m · K)	kcal/(h · m · °C)
1	8.60000×10^{-1}
1.16279	1

■ Revolution per minute

min ⁻¹	s ⁻¹	r.p.m.
1	0.0167	1
60	1	60

Hardness calculating table

Work piece hardness calculating table

Vickers 50kgf Hv	Brinell 3000kgf HB		Rockwell				Shore HS	Tensile strength (approximate value) MPa(1)
	Standard ball 10mm	Cemented carbide ball 10mm	A scale 60kgf Diamond particle HrA	B scale 100kgf 1/16in ball HrB	C scale 150kgf Diamond particle HrC	D scale 100kgf Diamond particle HrD		
940	-	-	85.6	-	68.0	76.9	97	
920	-	-	85.3	-	67.5	76.5	96	
900	-	-	85.0	-	67.0	76.1	95	
880	-	(767)	84.7	-	66.4	75.7	93	
860	-	(757)	84.4	-	65.9	75.3	92	
840	-	(745)	84.1	-	65.3	74.8	91	
820	-	(733)	83.8	-	64.7	74.3	90	
800	-	(722)	83.4	-	64.0	74.8	88	
780	-	(710)	83.0	-	63.3	73.3	87	
760	-	(698)	82.6	-	62.5	72.6	86	
740	-	(684)	82.2	-	61.8	72.1	84	
720	-	(670)	81.8	-	61.0	71.5	83	
700	-	(656)	81.3	-	60.1	70.8	81	
690	-	(647)	81.1	-	59.7	70.5	-	
680	-	(638)	80.8	-	59.2	70.1	80	
670	-	630	80.6	-	58.8	69.8	-	
660	-	620	80.3	-	58.3	69.4	79	
650	-	611	80.0	-	57.8	69.0	-	
640	-	601	79.8	-	57.3	68.7	77	
630	-	591	79.5	-	56.8	68.3	-	
620	-	582	79.2	-	56.3	67.9	75	
610	-	573	78.9	-	55.7	67.5	-	
600	-	564	78.6	-	55.2	67.0	74	
590	-	554	78.4	-	54.7	66.7	-	2055
580	-	545	78.0	-	54.1	66.2	72	2020
570	-	535	77.8	-	53.6	65.8	-	1985
560	-	525	77.4	-	53.0	65.4	71	1950
550	(505)	517	77.0	-	52.3	64.8	-	1905
540	(496)	507	76.7	-	51.7	64.4	69	1860
530	(488)	497	76.4	-	51.1	63.9	-	1825
520	(480)	488	76.1	-	50.5	63.5	67	1795
510	(473)	479	75.7	-	49.8	62.9	-	1750
500	(465)	471	75.3	-	49.1	62.2	66	1705
490	(456)	460	74.9	-	48.4	61.6	-	1660
480	488	452	74.5	-	47.7	61.3	64	1620
470	441	442	74.1	-	46.9	60.7	-	1570
460	433	433	73.6	-	46.1	60.1	62	1530
450	425	425	73.3	-	45.3	59.4	-	1495
440	415	415	72.8	-	44.5	58.8	59	1460
430	405	405	72.3	-	43.6	58.2	-	1410
420	397	397	71.8	-	42.7	57.5	57	1370
410	388	388	71.4	-	41.8	56.8	-	1330
100	379	379	70.8	-	40.8	56.0	55	1290
390	369	369	70.3	-	39.8	55.2	-	1240
380	360	360	69.8	(100.0)	38.8	54.4	52	1205
370	350	350	69.2	-	39.9	53.6	-	1170
360	341	341	68.7	(109.0)	36.6	52.8	50	1130
350	331	331	68.1	-	35.5	51.9	-	1095
340	322	322	67.6	(108.0)	34.4	51.1	47	1070
330	313	313	67.0	-	33.3	50.2	-	1035

Vickers 50kgf Hv	Brinell 3000kgf HB		Rockwell				Shore HS	Tensile strength (approximate value) MPa(1)
	Standard ball 10mm	Cemented carbide ball 10mm	A scale 60kgf Diamond particle HrA	B scale 100kgf 1/16in ball HrB	C scale 150kgf Diamond particle HrC	D scale 100kgf Diamond particle HrD		
320	303	303	66.4	(107.0)	32.2	49.4	45	1005
310	294	294	65.8	-	31.0	48.4	-	980
300	284	284	65.2	(105.5)	29.8	47.5	42	950
295	280	280	64.8	-	29.2	47.1	-	935
290	275	275	64.5	(104.5)	28.5	46.5	41	915
285	270	270	64.2	-	27.8	46.0	-	905
280	265	265	63.8	(103.5)	27.1	45.3	40	890
275	261	261	63.5	-	26.4	44.9	-	875
270	256	256	63.1	(102.0)	25.6	44.3	38	855
265	252	252	62.7	-	24.8	43.7	-	840
260	247	247	62.4	(101.0)	24.0	43.1	37	825
255	243	243	62.0	-	23.1	42.2	-	805
250	238	238	61.6	99.5	22.2	41.7	36	795
245	233	233	61.2	-	21.3	41.1	-	780
240	228	228	60.7	98.1	20.3	40.3	34	765
230	219	219	-	96.7	(18.0)	-	33	730
220	209	209	-	95.0	(15.7)	-	32	695
210	200	200	-	93.4	(13.4)	-	30	670
200	190	190	-	91.5	(11.0)	-	29	635
190	181	181	-	89.5	(8.5)	-	28	605
180	171	171	-	87.1	(6.0)	-	26	580
170	162	162	-	85.0	(3.0)	-	25	545
160	152	152	-	81.7	(0.0)	-	24	515
150	143	143	-	78.7	-	-	22	490
140	133	133	-	75.0	-	-	21	455
130	124	124	-	71.2	-	-	20	425
120	114	114	-	66.7	-	-	-	390
110	105	105	-	62.3	-	-	-	-
100	95	95	-	56.2	-	-	-	-
95	90	90	-	52.0	-	-	-	-
90	86	86	-	48.0	-	-	-	-
85	81	81	-	41.0	-	-	-	-

Note) 1. 1MPa=1N/mm²

2. The number in the blank is not generally used ranges.



Properties of Korloy grades

Physical properties of Korloy grades

Application	ISO Classification symbol	Korloy grades	Specific gravity (g/cm ³)	Hardness (HRA)	TRS (kgf/mm ²)	Compressive strength (kg/mm ²)	Young's modulus (10 ³ kgf/mm ²)	Thermal expansion coefficient (10 ⁻⁶ /°C)	Thermal conductivity (cal/cmsec ² C)	
Grades for cutting tools	P	P01	ST05E	10.6	92.7	140	440	-	-	-
		P10	ST10P	10.0	92.1	175	460	48	6.2	25
		P20	ST20E	11.8	91.9	200	480	56	5.2	42
		P30	A30	12.2	91.3	230	500	53	5.2	-
	M	M10	U10E	12.9	92.4	170	500	47	-	-
		M20	U2	13.1	91.1	210	500	-	-	88
		M30	A30	12.2	91.3	230	500	53	5.2	-
		M40	A40	13.3	89.2	270	440	-	-	-
	K	K01	H2	14.8	93.2	185	-	61	4.4	105
		K10	H01	13.0	92.9	210	570	66	4.7	109
K20		G10E	14.7	90.9	250	500	63	-	105	
Ultra fine grain alloy	Z	Z10	FA1	14.1	91.4	290	-	58	5.7	-
		Z20	FCC	12.5	91.3	235	-	-	-	-
Grade for tungsten carbide wear parts	V	V1	D1	15.0	92.3	205	520	-	-	-
		V2	D2	14.8	90.9	250	150	-	-	-
		V3	D3	14.6	89.7	310	410	-	-	-
		V4	G5	14.3	89.0	320	380	-	-	-
		V5	G6	14.0	87.7	350	330	-	-	-
Grade for mining and civil engineering tools	E	E1	GR10	14.8	90.9	220	-	-	-	-
		E2	GR20	14.8	90.3	240	-	-	-	-
		E3	GR30	14.8	89.0	270	-	-	-	-
		E4	GR35	14.8	88.2	270	-	-	-	-
		E5	GR50	14.5	87.0	300	-	-	-	-

The physical properties of element

Element	Specific gravity (g/cm ³)	Hardness (HB)	Young's modulus (×10 ³ kgf/mm ²)	Thermal conductivity (cal/cm · sec · °C)	Thermal expansion coefficient (×10 ⁻⁶ /°C)	Melting point (°C)
WC	15.6	2,150	70	0.3	5.1	2,900
TiC	4.94	3,200	45	0.04	7.6	3,200
TaC	14.5	1,800	29	0.05	6.6	3,800
NbC	8.2	2,050	35	0.04	6.8	3,500
TiN	5.43	2,000	26	0.07	9.2	2,950
Al ₂ O ₃	3.98	3,000	42	0.07	8.5	2,050
cBN	3.48	4,500	71	3.1	4.7	-
Diamond	3.52	9,000	99	5.0	3.1	-
Co	8.9	-	10~18	0.165	12.3	1,495
Ni	8.9	-	20	0.22	13.3	1,455

Technical information for Stainless steel

▶ Guide of stainless-steel machining

- ▶ Stainless steels well known for their excellent anti-corrosive property.
- ▶ Excellent anti-corrosive property is due to the Chromium added to these alloys. In general, stainless have 4%~10% Chromium content.

● Classifications & Features of Stainless steel.

- 1) Austenite series : One of the most general kinds of stainless steels, it has some of the best corrosion-resistance properties due to a high Chromium & Nickel content. A high Nickel content also makes machining more difficult. Austenite series stainless steels are usually used for can processing, chemical products and construction purposes. (AISI 303,304,316)
- 2) Ferrite series : It has Chromium content similar to Austenite series, but none of the Nickel content which results in freer machining. (AISI 410,430,434)
- 3) Martensite series : The only stainless steel with the ability to be heat treated. It has a high carbon content but poor corrosion resistance, so it is used for parts that need higher hardness. (AISI410, 420,432)
- 4) Precipitate hardened series : A Chromium-Nickel alloy, it has improved hardness through low temperature heat-treatment and has superior corrosion resistance and toughness at the same time. (AISI 17, 15)
- 5) Austenite-Ferrite series : Though it has similar properties with Austenite and Ferrite, it has much more superior heat-resistance (approx. 2 times better). Usually used where thermal-corrosion stability is needed, such as condensers (AISI S2304, 2507).

● Difficult-to-Cut Factors of Stainless steel.





- 1) Work-hardening property - Causes premature wear of tool and poor control chip.
- 2) Low thermal conductivity - Causes plastic deformation of cutting edge and fast wear of tools.
- 3) Built-up-edge - More susceptible to micro-chipping on cutting edges and causes bad surface-finish.
- 4) Chemical affinity between tool and workpiece caused by work-hardening and low thermal-conductivity of workpiece, this might generate abnormal-wear, chipping and/or abnormal fracture.


● Tips for Machining of Stainless steel.

- 1) Use a tool that has higher thermal-conductivity
Low thermal-conductivity of stainless steels accelerates tool wear resulting from a decline in hardness of the cutting edge of an insert, this is due to heat piling up. It is better to use a tool that has higher thermal conductivity and with enough coolant.
- 2) Sharper cutting edge-line
It is necessary to utilize larger rake-angles and wider chip-breaker lands to reduce cutting-load pressure and prevent build-up-edge. This will help provide better chip control.
- 3) Optimal cutting condition
Inappropriate machining conditions like extremely low or high-speeds or low feed rates can cause poor tool life due to work-hardening of work piece.
- 4) Choose an appropriate tool
Tools for stainless steels should have good toughness attributes, enough strength on their edge-line (cutting edge) & a higher film adhesion.



▶ Chip Breakers for Stainless steel machining

HA / Finishing	
	<ul style="list-style-type: none"> • Sharp edge for shallow depth cutting • Increase tool life through reduced chip control friction at high speed cutting • Good surface finish of work piece
HS / Medium cutting	
	<ul style="list-style-type: none"> • Enhanced cutting efficiency and increase tool life due to enhanced chip flow. • Reinforced wear resistance through adopting a high land rake angle. • Special land design to prevent notching and enhance toughness
GS / Medium to Rough cutting	
	<ul style="list-style-type: none"> • Superior tool life at light intermittent cutting • Better chip flow through wide chip pocket • Prevent build-up-edge by low cutting force design
VM / Roughing	
	<ul style="list-style-type: none"> • Chip breaker for intermittent cutting • Unique chip breaker design provide smooth chip control. • Strong edge line permit superior toughness

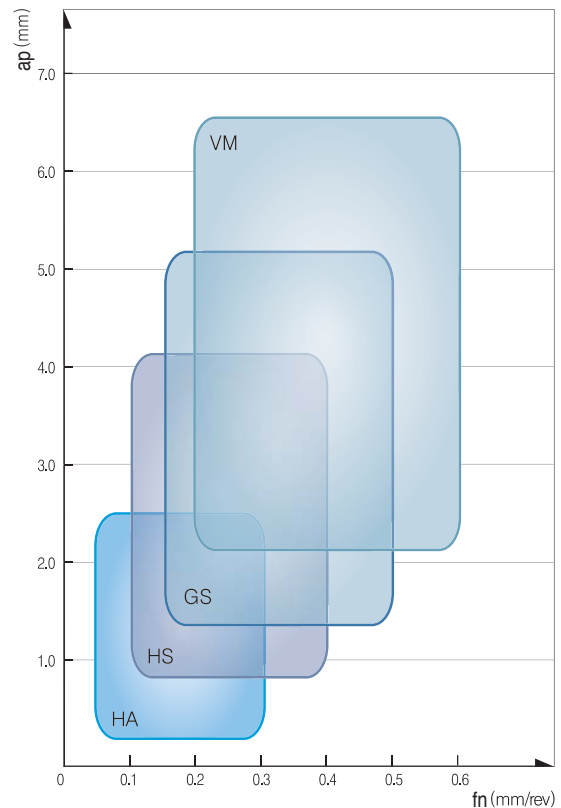

▶ Grades for Stainless steel machining

▶ KORLOY New Grades for Stainless steel machining

● NC9020, For high speed turning of Stainless steel.



- ▶ Specially designed substrate & film suitable for high-speed machining of stainless steels.
- ▶ Superior cutting performance under conditions in moderate-speed applications for cutting low-carbon steels and low-carbon alloy steel
- ▶ Longer tool-life can be achieved thanks to a superior chipping-resistance design in the grade.
- ▶ Obtain better cutting performance. Korloy offers a variety of combinations of chip breakers to machine easily even in deeper depth of cut.

● PC9030, for medium to low speed turning of Stainless steel.


- ▶ By using an ultra fine carbide substrate, the PC9030 has a tougher substrate for moderate speed machining and intermittent cutting of Stainless steel
- ▶ A PVD coating is applied to this grade to enhance chipping-resistance and adhesion-resistance during machining of difficult-to-cut material
- ▶ Exclusive grade for stainless steel, using tougher carbide as a substrate and a PVD coated, this gives the insert superior lubrication properties.
- ▶ Enhance your surface finish and reduce burrs by utilizing our chip-breakers, exclusively made for Stainless steels.

● PC9530, for medium to low speed milling of Stainless steel.

- ▶ Tough ultra-fine carbide substrate primarily used for roughing and/or intermittent milling applications in stainless steel
- ▶ A PVD coating is applied to achieve better tool life in stainless steel and Ni-Cr steel applications.
- ▶ To reduce chipping in the cutting edge Korloy uses a tough carbide substrate and PVD coating to help prevent material build up around the cutting edges.

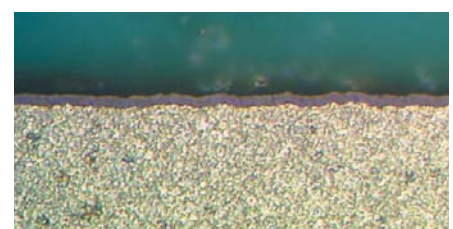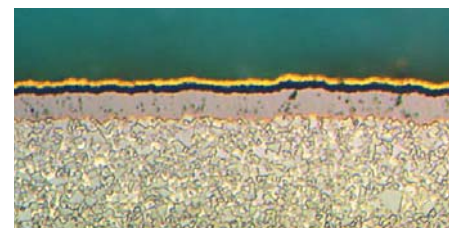

▶ Insert shape and terminology

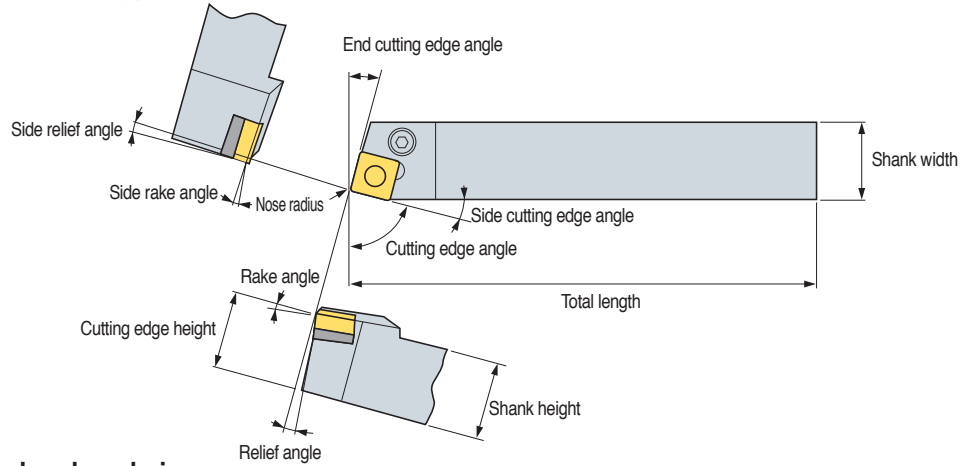


● Relating angles between tool and workpiece

Cutting edge inclination	Terminology	Function	Effect
Rake angle	Side rake angle Rake angle	• Cutting force, Cutting heat, The effects of chip control on tool life	• (+) : Excellent machine-ability (reducing cutting force, weakening cutting edge strength) • (+) : When machining excellent machine-ability or thin workpiece. • (-) : When strong cutting edge is needed at interrupted condition or mill scale.
Relief angle	Relief angle Side relief angle	• Only cutting edge contact with cutting face	• (-) : Cutting edge is strong but has short tool life to make bad influence on flank wear.
Cutting edge angle	Cutting edge angle	• Affects chip control and cutting force direction	• (+) : Improved chip control because chip thickness is big.
	Side cutting edge angle	• Affects chip control and cutting force direction	• (+) : Strong cutting edge due to distributed cutting force but chip control is bad by thin chip thickness • (-) : Improved chip performance.
	End cutting edge angle	• Prevent friction between cutting edge and cutting face	• (-) : Cutting edge is strong but has short tool life to make bad influence on flank wear.

▶ Calculation formulas for machining

● Cutting speed



$$vc = \frac{\pi \times D \times n}{1000} \text{ (m/min)}$$


- vc : Cutting speed (m/min)
- D : Diameter (mm)
- n : Revolution per minute (min⁻¹)
- π : Circular constant(3.14)

● Feed

$$fn = \frac{vf}{n} \text{ (mm/rev)}$$

- fn : Feed per revolution(mm/rev)
- vf : Table feed (mm/min)
- n : Revolution per minute (min⁻¹)

● Surface finish

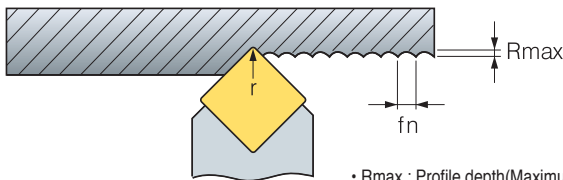

- Rmax : Profile depth(Maximum height roughness) (μ)
- fn : feed (mm/rev)
- r : nose radius

● Theoretical surface roughness

$$R_{max} = \frac{fn^2}{8r} 1000(\mu\text{m})$$

● Practical surface roughness

Steel : $R_{max} \times (1.5 \sim 3)$
Cast iron : $R_{max} \times (3 \sim 5)$

● Power requirement

$$P_{kw} = \frac{Q \times kc}{60 \times 102 \times \eta} \quad P_{HP} = \frac{P_{kw}}{0.75} \quad Q = \frac{vc \times fn \times ap}{1000}$$

- P_{kw} : Power requirement [kW]
- P_{HP} : Power requirement (horse power) [HP]
- vc : Cutting speed [m/min]
- ap : Depth of cut [mm]
- fn : Feed per revolution [mm/rev]
- kc : Specific cutting resistance [kg/mm²]
- η : Machine efficiency rate (0.7~0.8)

Rough Kc

Mild steel	190
Medium carbon steel	210
High carbon steel	240
Low alloy steel	190
High alloy steel	245
Cast iron	93
Malleable cast iron	120
Bronze, Brass	70

● Material removal rate


$$Q \text{ (cm}^3\text{/min)} = vc \times ap \times fn$$

- Q : Material removal rate [cm³/min]
- ap : Depth of cut [mm]
- vc : Cutting speed [m/min]
- fn : Feed per revolution [mm/rev]



● Machining time

External face machining 1



Constant Revolution per minute


$$T = \frac{60 \times L}{f_n \times n}$$

Constant cutting speed

$$T = \frac{60 \times \pi \times L \times D}{1000 \times f_n \times v_c}$$

T : Machining time [sec]
 L : Cutting length [mm]
 f_n : Feed per revolution [mm/rev]
 n : Revolution per minute [min]
 D : Diameter of workpiece [mm]
 v_c : Cutting speed [m/min]

External face machining 2

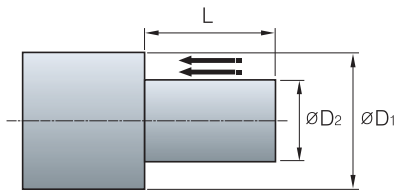

Constant Revolution per minute


$$T = \frac{60 \times L}{f_n \times n} \times N$$

Constant cutting speed

$$T = \frac{60 \times \pi \times L \times (D_1 + D_2)}{2 \times 1000 \times f_n \times v_c} \times N$$

T : Machining time [sec]
 L : Cutting length [mm]
 f_n : Feed per revolution [mm/rev]
 n : Revolution per minute [min]
 D1 : Maximum diameter of workpiece [mm]
 D2 : Minimum diameter of workpiece [mm]
 v_c : Cutting speed [m/min]
 N : The number of pass = $(D_1 - D_2)/d/2$

Facing



Constant Revolution per minute


$$T = \frac{60 \times (D_1 - D_2)}{2 \times f_n \times n} \times N$$

Constant cutting speed

$$T_1 = \frac{60 \times \pi \times (D_1 + D_2) \times (D_1 - D_2)}{4000 \times f_n \times v_c} \times N$$

T : Machining time [sec]
 T1 : Machining time before the maximum rpm[sec]
 L : Width of machining [mm]
 f_n : Feed per revolution [mm/rev]
 n : Revolution per minute [min-1]
 D1 : Maximum diameter of workpiece [mm]
 D2 : Minimum diameter of workpiece [mm]
 v_c : Cutting speed [m/min]
 N : The number of pass = $(D_1 - D_2)/d/2$

Grooving

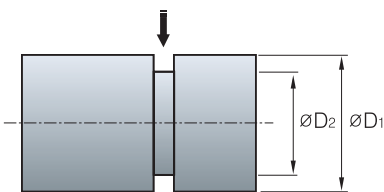

Constant Revolution per minute


$$T = \frac{60 \times (D_1 - D_2)}{2 \times f_n \times n}$$

Constant cutting speed

$$T_1 = \frac{60 \times \pi \times (D_1 + D_2) \times (D_1 - D_2)}{4000 \times f_n \times v_c}$$

T : Machining time [sec]
 T1 : Machining time before the maximum rpm[sec]
 L : Width of machining [mm]
 f_n : Feed per revolution [mm/rev]
 n : Revolution per minute [min-1]
 D1 : Maximum diameter of workpiece [mm]
 D2 : Minimum diameter of workpiece [mm]
 v_c : Cutting speed [m/min]

Parting

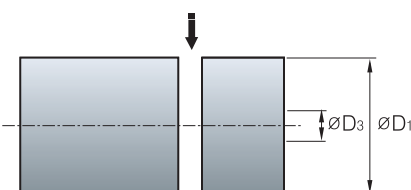

Constant Revolution per minute

$$T = \frac{60 \times D_1}{2 \times f_n \times n}$$

Constant cutting speed

$$T_1 = \frac{60 \times \pi \times (D_1 + D_3) \times (D_1 - D_3)}{4000 \times f_n \times v_c}$$




$$T_3 = T_1 + \frac{60 \times D_3}{2 \times f_n \times n_{max}}$$

T : Machining time [sec]
 T1 : Machining time before the maximum rpm[sec]
 T3 : Machining time till maximum RPM[sec]
 f_n : Feed per revolution [mm/rev]
 n : Revolution per minute [min-1]
 n_{max} : Maximum revolution per minute [min-1]
 D1 : Maximum diameter of workpiece [mm]
 D3 : Maximum diameter at maximum RPM [mm]
 v_c : Cutting speed [m/min]

▶ The affects of cutting condition

- ▶ The most desirable machining means short machining time, long tool life and good precision. This is the reason that proper cutting condition for each tools should be selected according to material's properties, hardness, shapes, the efficiency of machine.

▶ Cutting speed

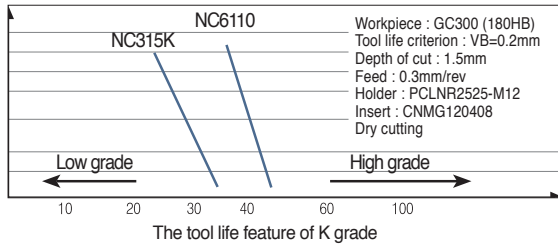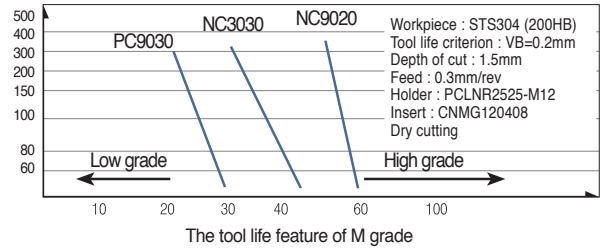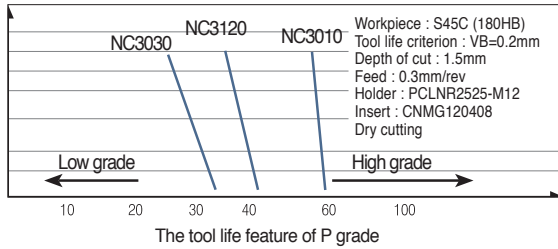

▶ Cutting Speed's effects


- ▶ When the cutting speed increases up to 20% in an application, the tool life respectively decreases down 50%. Although inversely, if the cutting speed increases up to 50% the tool life decreases 20%. On the other hand if cutting speed is too low (20-40m/min) Tool life shortens due to vibration.

▶ Feed

- ▶ The feed rate in turning means the progressed interval of a distance in a work piece within 1 revolution. The feed rate in a milling application means the table feed divided by number of teeth of cutter (feed rate per tooth).

▶ The effects of feed

- ▶ When the feed rate decreases the flank wear is increased. When the feed rate is too low, the tool life shortens radically.
- ▶ When the feed rate increases, the flank wear increases due to high temperatures, however the feed rates effects tool life less than the cutting speed. And higher feed rates improve machining efficiency.

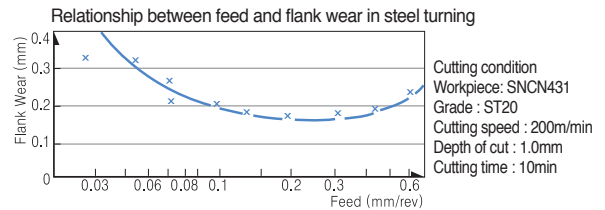


▶ Depth of cut


- ▶ Determined by the required allowances in machining a material and the capacity the machine can tolerate. There are cutting limits according to the different shapes and sizes of the insert.

▶ The effect of a depth of cut

- ▶ The depth of cut does not have a big influence on tool life.
- ▶ When the depth of cut is small the work piece is not cut but rather rubbed. In these cases, machine off the work hardened parts that decrease tool life.
- ▶ When machining a cast skin or milling scale smaller depth of cuts usually cause chipping and abnormal wear because of hard impurities in the surface of the work piece.

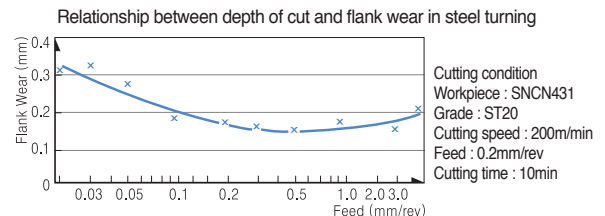


Surface parts including mill scale Roughing

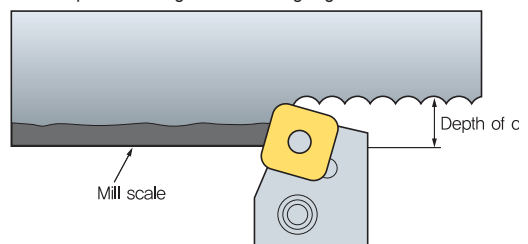

▶ Relief angle

▶ Relief angle avoids the friction between workpiece and relief face and makes cutting edge move along workpiece easily.

● Relationship between various relief angle and flank wear

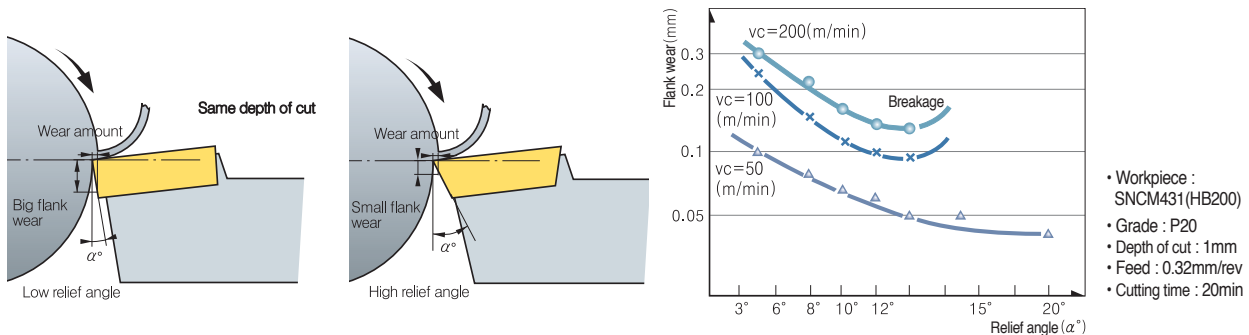

• Affects

1. If relief angle is big Flank wear decreases.
2. If relief angle is big Cutting edge strength weakens.
3. If relief angle is small Chattering occurs .


• Selection system

1. Hard workpiece / When strong cutting edge is needed - Low relief angle
2. Soft workpiece / Workpiece turning to work hardening easily - High relief angle

▶ Side cutting edge angle

▶ Side cutting edge angle has big influence on chip flow and cutting force therefore proper Side cutting edge angle is very important.

● Side cutting edge angle and Chip thickness

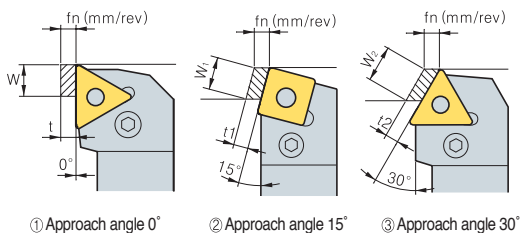


- As side cutting edge angle is getting bigger chips are getting thinner and wider (refer to left picture).
- At the same feed and depth of cut with approach angle 0°
 Chip thickness is the same as feed ($t=fn$) and chip width is equal to depth of cut ($W=ap$).

$$t_1 = 0.97t, W_1 = 1.04W$$

$$t_2 = 0.87t, W_2 = 1.15W$$

● Side cutting edge angle and 3 cutting forces

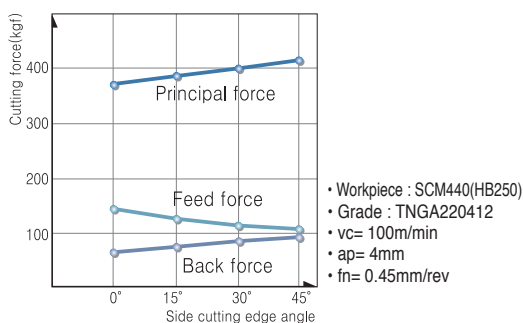


• Affects

1. Big side cutting edge angle with the same feed makes chip attaching length longer and chip thickness thinner. So that cutting forces scatter to long cutting edge therefore tool life gets longer.
2. Big side cutting edge angle for machining long bars can cause bending.


• Selection system

1. Deep depth of cut finishing / Long thin workpiece / Low machine rigidity - Side cutting edge angle
2. Hard and high calorific power workpiece / Roughing big workpiece / High machine rigidity - Side cutting edge angle

● Side cutting edge angle and Tool life

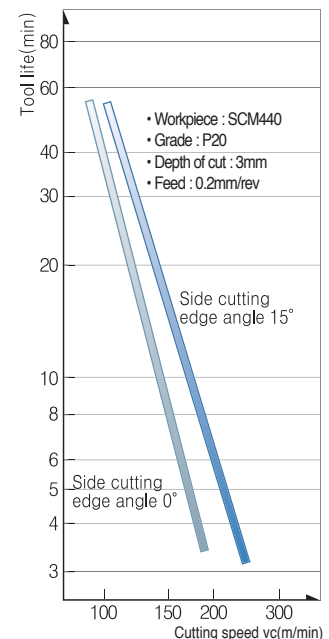

● Side cutting edge angle and Cutting load

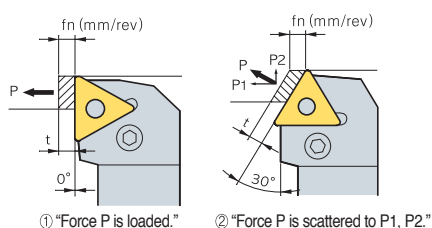

As approach angle gets bigger Back force gets bigger and feed force gets smaller.

● Side cutting edge angle and Cutting performance

Specification	Low	← Approach angle →	High
Wear rate	High	←.....→	Low
Workpiece	Easy to cut material	←.....→	Difficult to cut material
Machining power	Small	←.....→	Big
Chatter	Hard to occur	←.....→	Easy to occur
How to machine	Finishing	←.....→	Roughing
Workpiece rigidity	Long thin workpiece	←.....→	Thick workpiece
Machine rigidity	In case of low rigidity	←.....→	In case of high rigidity

▶ End cutting edge angle

It affects machined surface to prevent interference between surface of workpiece and insert.


Affects

1. If end cutting edge angle reduces cutting edge get stronger but cutting heat generated by machining increases.
2. Small end cutting edge angle can cause chattering due to the increases cutting force.

▶ Nose-R


1. Nose-R affects not only surface roughness but strength of cutting edge.
2. In general, It's desirable that Nose-R is 2~3 times bigger than feed.

● Nose R and surface finish

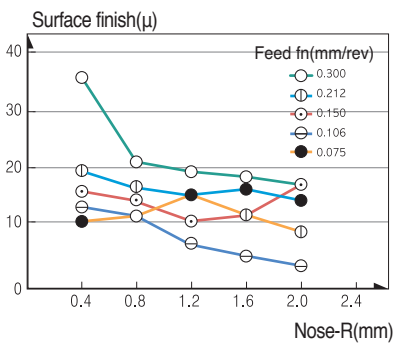


- Workpiece : SNCM439, HB200
- Grade : P20
- vc = 120m/min, ap = 0.5mm

● Nose R and tool life

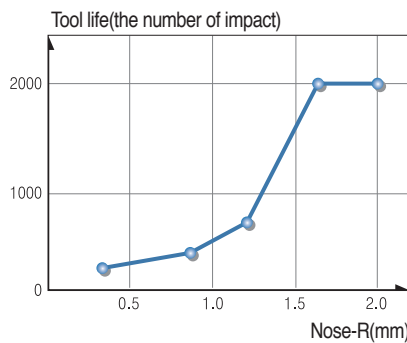

- Workpiece : SCM440, HB280
- Grade : P10
- vc = 100m/min, ap = 0.5mm
- fn = 0.3mm/rev

● Nose R and wear of tool

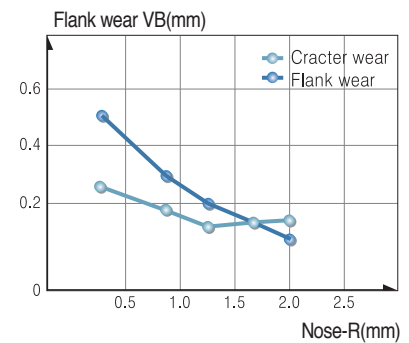



- Workpiece : SNCM439, HB200
- Grade : P10
- vc = 140m/min, ap = 2mm
- fn = 0.2mm/rev, T = 10min

Affects of Nose-R

1. Big Nose-R improves surface finish.
2. Big Nose-R improves cutting edge strength.
3. Big Nose-R reduces flank wear and crater wear.
4. Too big Nose-R causes chattering due to increased cutting force.

Selection system

1. For finishing with small depth of cut / long and thin workpiece / When machine power is low - Small Nose-R
2. For applications that need strong cutting edge such as intermittent and machining mill scale / For roughing of big workpiece / When the machine power is strong enough - Big Nose-R

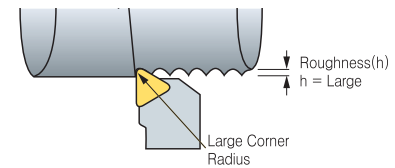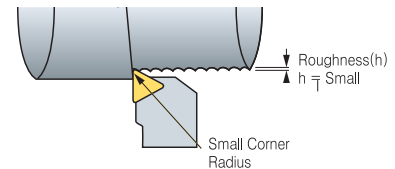

● Relationship between nose radius, feed and various surface roughness.


Nose "R" / Feed(mm/rev)	0.4	0.8	1.2
0.15			
0.26			
0.46			



▶ Cutting edge shape and the affects

● Rake angle (α)

Rake angle has big influence on cutting force, chip flow and tool life.

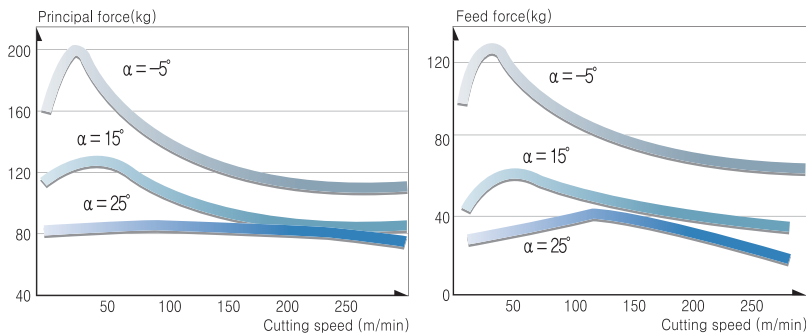


• Affects

1. High rake angle results in good surface finish.
2. As the rake angle increases by 1° Machining power decreases by 1%.
3. High rake angle weakens cutting edge.

• Selection system

1. For hard workpiece / For applications that need strong cutting edge such as interrupted and machining mill scale - Low rake angle
2. For soft workpiece / Easy to cut material / When the rigidity of machine power and workpiece is low - High rake angle

● Rake angle and the direction of chip flow

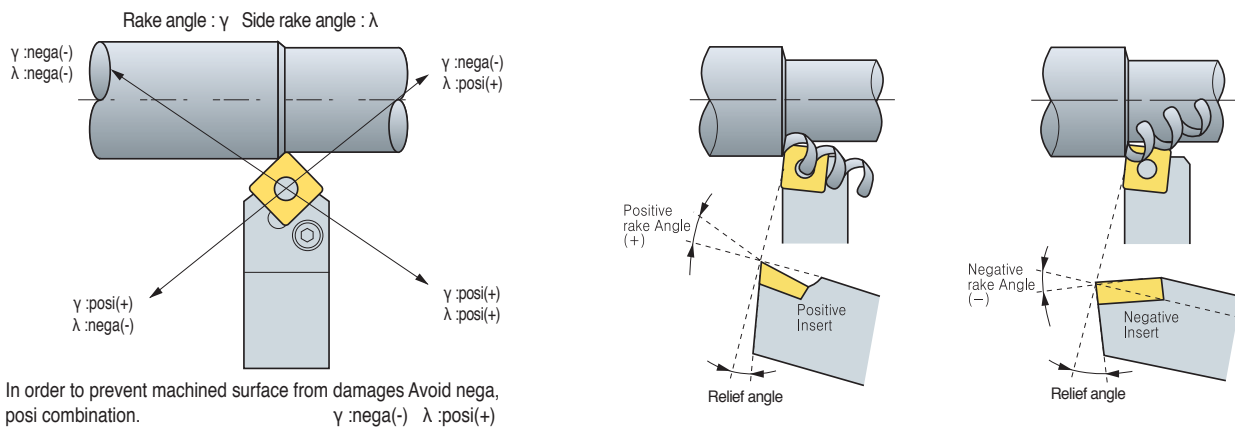

▶ Selecting proper tools

Nowadays, It's very difficult to select the best tools in complicating tooling system and various cutting conditions.

However, It can be simplified by classifying basic factors below.

● Selection of inserts and tool holder

Listed below is the basic factors and choose B according to A.





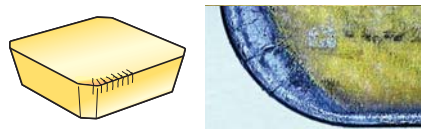




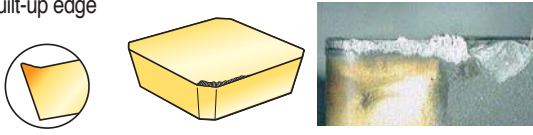
A : Basic factors

- Workpiece material
- Workpiece shape
- Workpiece size
- Hardness of workpiece
- Surface roughness of workpiece (before machining)
- Surface finish required
- Type of lathe machine
- Condition of lathe machine (rigidity, power etc)
- Horse power of machine
- Clamping method of workpiece

B : Selection system

- ① Select as big approach angle as possible.
- ② Select as big shank as possible.
- ③ Select as strong cutting edge of insert as possible
- ④ Select as big nose radius as possible
- ⑤ In finishing, Select the insert using many corners
- ⑥ Select as small insert as possible
- ⑦ Cutting speed should be determined carefully according to cutting conditions
- ⑧ Select as deep depth of cut as possible
- ⑨ Select as fast feed as possible
- ⑩ Cutting condition should be determined within chip breaker application ranges.

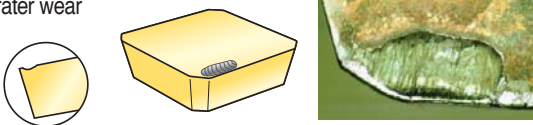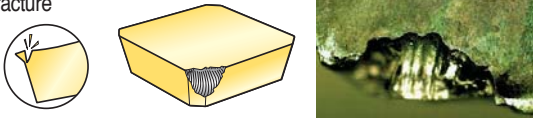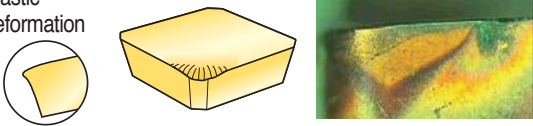▶ Trouble shooting

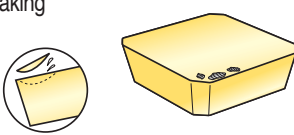Tool Failure	Cause	Solution
<p>Crater wear</p> 	<ul style="list-style-type: none"> • Improper grade • Excessive cutting condition 	<ul style="list-style-type: none"> • Choose harder grade • Decrease cutting condition
<p>Fracture</p> 	<ul style="list-style-type: none"> • Improper grade • Excessive feed • Shorten cutting edge strength • Insufficient rigidity of holder 	<ul style="list-style-type: none"> • Choose tougher grade • Decrease feed • Apply to large honed or chamfered edge • Choose bigger size holder
<p>Plastic deformation</p> 	<ul style="list-style-type: none"> • Improper grade • Excessive cutting condition • High cutting temperature 	<ul style="list-style-type: none"> • Choose harder grade • Decrease cutting condition • Choose grade with heat conductivity are big
<p>Wear on nose radius (Flank wear)</p> 	<ul style="list-style-type: none"> • When the hardness of workpiece is too high compare with tool • When machining surface hardened workpiece • Improper grade • Excessive cutting speed • Too small relief angle • Too low feed 	<ul style="list-style-type: none"> • Choose harder grade • Decrease cutting speed • Choose larger relief angle • Increase feed
<p>Thermal crack</p> 	<ul style="list-style-type: none"> • Expansion and shrinking by cutting temperature • Improper grade (*Specially milling operation) 	<ul style="list-style-type: none"> • Apply to dry cutting (In case of wet cutting, use enough coolant) • Choose tougher grade
<p>Chipping</p> 	<ul style="list-style-type: none"> • Improper grade • Excessive feed • Shorten cutting edge strength • Insufficient rigidity of holder 	<ul style="list-style-type: none"> • Choose tougher grade • Decrease feed • Apply to large honing or chamfer edge • Choose bigger size holder
<p>Notch wear</p> 	<ul style="list-style-type: none"> • Surface hardened workpiece • Friction due to bad chip geometry (Generate vibration) 	<ul style="list-style-type: none"> • Choose harder grade • Improve chip control form large rake angle
<p>Flaking</p> 	<ul style="list-style-type: none"> • Deposition on cutting edge • Bad chip control 	<ul style="list-style-type: none"> • Improve cutting performance from large rake angle • Apply to chip pocket with big size
<p>Complete breakage</p> 	<ul style="list-style-type: none"> • Unusable condition due to wear off the most parts of cutting edge by progress of wear 	<ul style="list-style-type: none"> • Reduce the feed rate. • Reduce the depth of cut. • Select a tougher grade. • Select a stronger chipbreaker. • Select a thicker insert.
<p>Built-up edge</p> 	<ul style="list-style-type: none"> • Slow cutting speed • Sticky materials 	<ul style="list-style-type: none"> • Increase cutting speed. • Use more positive rake geometry. • Use tougher grade



▶ Types of tool failure and trouble shooting

Troubles	Causes	Solution																	
		Cutting conditions				Selecting insert grade				Tool shape						Machine clamping			
		Cutting speed	Feed	Depth of cut	Coolant	Select harder grade	Select tougher grade	Select better heat-impact resistance grade	Select better adhesion resistance grade	Chip breaker valuation	Rake angle	Nose radius	Side cutting edge angle	Cutting edge strength Honing	Improving insert precision M class → G class	Improving holder rigidity	Clamping workpiece	Holder overhang	Machine vibration
Poor precision Unstable machining size	Insert precision is variable														●				
	Workpiece, Separation of tool								●	↑	↓					●	●	●	●
Cutting edge back thrust is big It's necessary to adjust because machining precision changes during operation.	Flank wear increase					●					↑								
	Cutting condition is improper	↓	↑			●													
Poor surface roughness for finishing Criterion of tool life.	Weakened cutting force by increasing wear of tool	↓			Wet cutting			●	●	↑	↑		↓	●					
	Cutting edge chipping		↓	↓		●			●		↑		↑			●	●	●	
	Adhesion, built-up edge	↑	↑		Wet cutting			●	●	↑			↓	●					
	Improper cutting conditions	↑	↓	↓	Wet cutting														
	Improper tool and shape of cutting edge								●		↑		↓	●					
	Vibration, chattering	↓	↓	↓	Wet cutting	●			●	↑	↓		↓		●	●	●	●	●
Cutting heat generation Poor machining precision and short tool life by cutting heat	Improper cutting conditions	↓	↓	↓		●													
	Improper tool and shape of cutting edge								●	↑			↓						
Burr, chipping, nap steel, aluminum (burr)	Improper cutting conditions	↓	↑		Wet cutting	●													
	Wear on the tool, improper shape of cutting edge							⊙	●	↑	↓		↓						
Cast iron (Weak chipping)	Improper cutting conditions		↓	↓		●													
	Wear on the tool, improper shape of cutting edge								●	↑	↑		↓		●	●	●	●	
Soft steel (nap)	Improper cutting conditions	↑	↑↓		Wet cutting	●													
	Wear on the tool, improper shape of cutting edge							⊙	●	↑			↓						

↑ : Increase ↓ : Decrease ● : use ⊙ : Correct use

▶ Tool life criterion


● KS B0813

Flank wear width	0.2mm	Precision light cutting , Finishing in nonferrous alloy
	0.4mm	Machining special steel
	0.7mm	General cutting in cast iron, steel etc
	1~1.25mm	General cutting in cast iron, steel etc
Depth of crater wear	In general 0.05~0.1 mm	

● ISO(B8688)

Tool life criterion	Application
Complete breakage	Machining special steel
Flank wear width VB = 0.3mm	Even flank wear of cemented carbides, Ceramic tool
VBmax = 0.5mm	Uneven flank wear
Crater wear width KT = 0.06+0.3fmm (f:mm/rev)	Cemented carbides tool
Criterion by surface roughness 1, 1.6, 2.5, 4, 6.3, 10μmRa	When surface roughness is important

▶ Milling cutter shape and designation

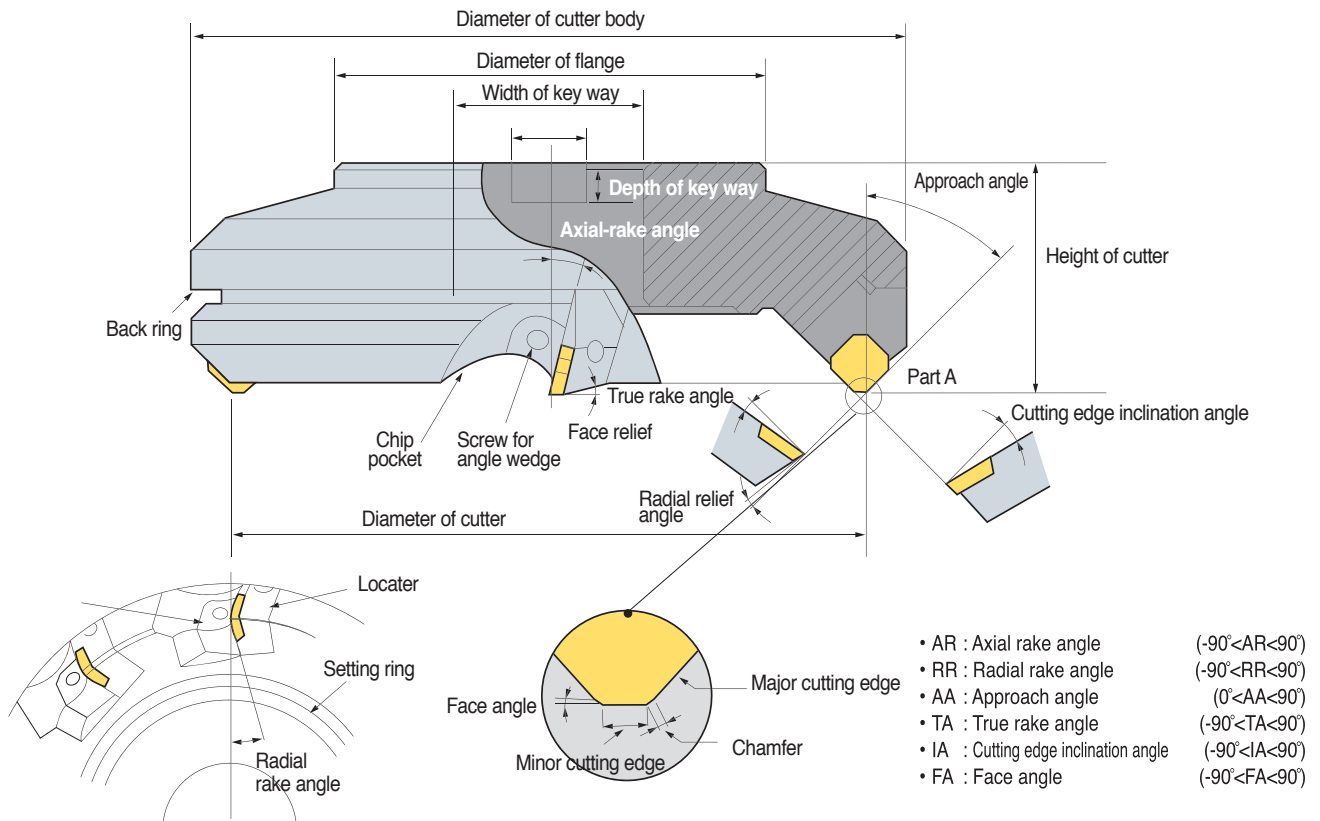


● The terminology and functions of cutting edge angle

No.	Tool failure	Symbol	Function	Effects
1	Axial rake angle	A.R	Chip flow direction, Adhesion	Positive : Excellent cutting, built-up edge prevented.
2	Radial rake angle	R.R	Affecting on thrust	Negative : Excellent chip control
3	Approach angle	A.A	Chip thickness, Determines flow direction	(+) : Chip thickness become thinner, cutting force could be reduced
4	True rake angle	T.A	Effective rake angle	(+) : Better cutting. Preventing adhesion, Weakening cutting edge strength. (-) : Cutting edge strength increases, easy to adhere
5	Cutting edge inclination angle	I.A	Determines chip flow direction	(+) : Good chip flow, cutting force could decrease, Corner edge strength weakens
6	Relief angle	F.A	Controlling cutting edge strength, tool life and chattering	Surface roughness increases as F.A gets close to 0 degree.

Features by combination of rake angle

	Double positive angle	Double negative angle	Posi - Negative angle	Nega - Positive angle
구비				
Use	<ul style="list-style-type: none"> • General machining of steel, cast iron, stainless steel • Machining soft steel that brings about built-up edge easily • Machining material having tendency to poor surface roughness 	<ul style="list-style-type: none"> • Under interrupted cutting condition • Roughing of cast iron and steel 	<ul style="list-style-type: none"> • Machining difficult to cut material • Roughing with deep depth of cut and wide width of cut in steel and cast iron 	<ul style="list-style-type: none"> • Chip flows to center of cutter body
Advantages	<ul style="list-style-type: none"> • As for tough workpiece material It prevents built-up edge to improve surface roughness. • Low cutting load and better machinability 	<ul style="list-style-type: none"> • Strong cutting edge. • Roughing of workpiece that has bad surface condition containing sand, mill scale • Double sided inserts can be applied(Economical). • Good chip control. 	<ul style="list-style-type: none"> • Good chip flow and machinability. • Suitable for machining of difficult-to-cut material • Un-even partition clamping prevents chattering 	-
Disadvantages	<ul style="list-style-type: none"> • Weak cutting edge strength. • Only single sided inserts are available (No economical). • Machine and cutter need enough power and rigidity. 	<ul style="list-style-type: none"> • Machine and cutter need enough power and rigidity. 	<ul style="list-style-type: none"> • Only single sided inserts are available (No economical) 	<ul style="list-style-type: none"> • Since the chips flows toward the center of cutter. Chips scratch on machined surface. • Bad chip flow. • No economical

Major cutting formulas

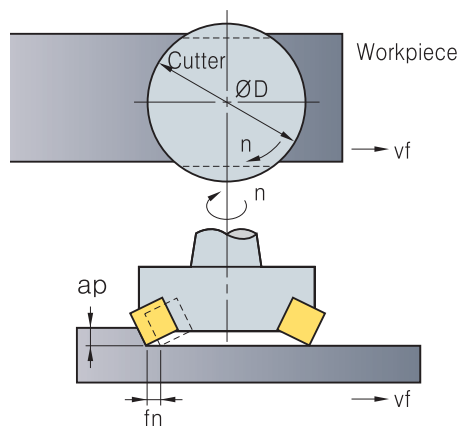

● Cutting speed

$$vc = \frac{\pi \cdot D \cdot n}{1000} \quad (\text{m/min})$$

- vc : Cutting speed (m/min)
- D : Diameter of tool (mm)
- n : Revolution per minute (min⁻¹)
- π : Circular constant (3.14)

● Feed

$$fz = \frac{vf}{z \cdot n} \quad (\text{mm/t})$$

- fz : Feed per tooth (mm/t)
- vf : Feed per minute (mm/min)
- n : Revolution per minute (min⁻¹)
- z : Number of tooth

● Chip removal amount

$$Q = \frac{L \cdot v_f \cdot a_p}{1000} \quad (\text{cm}^3/\text{min})$$

- Q : Chip removal amount (cm³/min)
- L : Width of cut (mm)
- vf : Table feed (mm/min)
- ap : Depth of cut (mm)

● Power requirement

$$P_{kw} = \frac{Q \cdot kc}{60 \times 10^2 \times \eta} \quad P_{hp} = \frac{P_{kw}}{0.75}$$

- Pc : Power requirement (kW)
- H : Horse power requirement (hp) (mm/min)
- Q : Chip removal amount (cm³/min)
- kc : Specific cutting resistance (kgf/mm²)
- η : Machine efficiency rate (0.7~0.8)

● Machining time

$$T = \frac{60 \times Lt}{vf} \quad (\text{sec})$$

- T : Machining time (sec)
- Lt : Total length of table feed (mm)=(Lw+D+2R)
- Lw : The length of workpiece (mm)
- D : The diameter of cutter body (mm)
- vf : Table feed (mm/min)
- R : Relief length (mm)

● True rake angle / Cutting edge inclination angle

True rake angle $\tan(T) = \tan(R) \times \cos(AA) + \tan(A) \times \sin(C)$
 Cutting edge inclination angle $\tan(I) = \tan(A) \times \cos(AA) - \tan(R) \times \sin(C)$



▶ Values of specific cutting resistance

Workpiece	Tensile strength (kg/mm ²) and hardness	Specific cutting resistance according to various feed kc(MPa)				
		0.1 (mm/t)	0.2 (mm/t)	0.3 (mm/t)	0.4 (mm/t)	0.6 (mm/t)
Soft steel	52	220	195	182	170	158
Medium carbon steel	62	198	180	173	160	157
High carbon steel	72	252	220	204	185	174
Tool steel	67	198	180	173	170	160
Tool steel	77	203	180	175	170	158
Chrome manganese steel	77	230	200	188	175	166
Chrome manganese steel	63	275	230	206	180	178
Chrome molybdenum steel	73	254	225	214	200	180
Chrome molybdenum steel	60	218	200	186	180	167
Nickel Chrome molybdenum steel	94	200	180	168	160	150
Nickel Chrome molybdenum steel	HB352	210	190	176	170	153
Cast steel	52	280	250	232	220	204
Hardened cast iron	HRC46	300	270	250	240	220
Meehanite cast iron	36	218	200	175	160	147
Gray cast iron	HB200	175	140	124	105	97
Brass	50	115	95	80	70	63
Light alloy(Al - Mg)	16	58	48	40	35	32
Light alloy(Al - Si)	20	70	60	52	45	39

▶ Chip removal amount(cm³/min) per rated horse power

Workpiece	Rated horse power	5Hp	10Hp	20Hp	30Hp	40Hp	50Hp
		Steel	Soft	32	75	163	295
	Medium	26	55	127	212	310	425
	hard	18	41	93	163	228	310
Cast iron	Soft	52	116	260	455	670	880
	Medium	32	75	163	295	425	570
	hard	26	55	127	212	310	425
Bronze Brass	Soft	77	163	390	670	980	1,280
	Medium	54	118	275	490	700	910
	hard	26	55	127	245	325	425
Aluminum		90	195	440	780	1,110	1,500

▶ Classification of surface roughness

Type	Symbol	How to calculate	Measured value
Maximum height	Rmax	<ul style="list-style-type: none"> The distance between the top of profile peak line and the bottom of profile valley line on this sampled portion is measured in the longitudinal magnification direction of roughness curve (Expressed by unit: μ). Exclude extraordinary values (too small or big) that look like grooves or mountains. 	
+10 point mean roughness	Rz	<ul style="list-style-type: none"> Sampled from the roughness curve in the direction of its mean line, the sum of the average value of absolute value of the highest profile peaks and the depths of five deepest profile valleys measured in the vertical magnification is expressed by micro meter (μ). 	
Arithmetic mean roughness	Ra	<ul style="list-style-type: none"> Sampling only the reference length from the roughness curve in the direction of mean line, taking X-axis in the direction of mean line and Y-axis in the direction of longitudinal magnification of this sampled part and is expressed by micro meter (μ). Generally, Read measured value by Ra measurer. 	

Finish mark		▽▽▽▽	▽▽▽	▽▽	▽	~
Surface roughness	Rmax	0.8s	6.3s	25s	100s	Unspecified
	Rz	0.8z	6.3z	25z	100z	
	Ra	0.2a	1.6a	6.3a	25a	


▶ Selection of MILL-MAX diameter(D)

● Selection by machine rigidity

Machine horse power(PS)	10~15	15~20	Over 20
Proper cutter body specification(mm)	φ80~φ100	φ125~φ160	φ160~φ200

● Selection by machine rigidity


Workpiece	E	δ
Steel	+20°~10°	3 : 2
Cast iron	Under +50°	5 : 4
Light alloy	Under +40°	5 : 3



D : External diameter of cutter body
D1 : Width of workpiece
d : Projected part of cutter body
E : Engage angle
δ : Ratio of cutter body and width of workpiece(D:D1)

● Selection by machining time

The bigger size cutter the longer machining time.

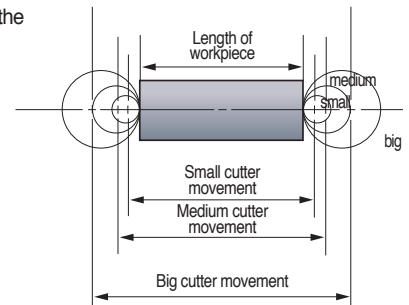

● Selection by number of tooth

Workpiece	Steel	Cast iron	Light alloy
Number of tooth	Dx(1~1.5)	Dx(1~4)	Dx1+α

ex) D=φ100 ⇒ 4" x(1~1.5)=4~6

D is the size of cutter body converted into inch size.



▶ Trouble shooting for milling

Trouble	Causes	Solutions										
		Cutting conditions				Tool shape					Insert grade	
		Cutting speed	Depth of cut	Feed	Coolant	Rake angle	Relief angle	Approach angle	Chattering at cutting edge	Nose radius	Toughness	Hardness
Flank wear	<ul style="list-style-type: none"> Improper insert grade Improper cutting conditions Chattering 	↓		↑			↑	↓		↑		↑
Crater wear	<ul style="list-style-type: none"> Improper cutting conditions Improper insert grade 	↓	↓	↓	●	↑				↓		↑
Chipping	<ul style="list-style-type: none"> Lack of insert toughness Excessive feed Excessive cutting load 			↓		↓	↓	↓		↑	↑	
Built-up edge	<ul style="list-style-type: none"> Improper cutting conditions Improper cutting edge shape Improper insert grade 	↑	↓	↑		↑				↓		
Chattering	<ul style="list-style-type: none"> Improper cutting conditions Lack of number of cutting teeth Improper cutting edge shape Bad chip flow Unstable workpiece clamping 		↓	↓	●	↑		↑	↓	↓		
Poor surface finish	<ul style="list-style-type: none"> Built-up edge Improper cutting conditions Chattering Bad chip flow 	↑	↓	↓	●	↑			↓	↑		
Thermal crack	<ul style="list-style-type: none"> Improper cutting conditions Improper insert grade 	↓	↓	↓	⊙	↑				↑	↑	
Fracture	<ul style="list-style-type: none"> Improper insert grade Excessive cutting load Bad chip flow Chattering Excessive overhang 		↓	↓	●							↑

↑ : Increase ↓ : Decrease ● : use ⊙ : Correct use


▶ General formulas for milling

● Machine efficiency rate (η)

Power transmission mode	Efficiency rate (E)	Reference
Principal axis direct connection driving	0.90	
Belt driving	0.85	Double connection : $0.85 \times 0.85 \approx 0.70$
Starting driving	0.75	
Oil pressure driving	0.60~0.90	




● Morse taper (Tang type)




MT No.	Taper	Taper angle(α)	D	a	D ₁	d ₁	l ₁	l ₂	d ₂	b	c	e	R1	r
0	$\frac{1}{19.212}$	1°29'27"	9.045	3	9.201	6.104	56.5	59.5	6.0	3.9	6.5	10.5	41	1
1	$\frac{1}{20.047}$	1°25'43"	12.065	3.5	12.240	8.972	62.0	65.5	8.7	5.2	8.5	13.5	5	1.2
2	$\frac{1}{20.020}$	1°25'50"	17.780	5	18.030	14.034	75.0	80.0	13.5	6.3	10	16	6	1.6
3	$\frac{1}{19.922}$	1°26'16"	23.825	5	24.076	19.107	94.0	99.0	18.5	7.9	13	20	7	2
4	$\frac{1}{19.254}$	1°29'15"	31.267	6.5	31.605	25.164	117.5	124.0	24.5	11.9	16	24	8	2.5
5	$\frac{1}{19.002}$	1°30'26"	44.399	6.5	4.741	36.531	149.5	156.0	35.7	15.9	19	29	10	3
6	$\frac{1}{19.180}$	1°29'36"	63.348	8	63.765	52.399	210.0	218.0	51.0	19.0	27	40	13	4
7	$\frac{1}{19.231}$	1°29'22"	83.058	10	83.578	68.186	286.0	296.0	66.8	28.6	35	54	19	5

● Morse taper (Screw type)




MT No.	Taper	Taper angle(α)	D	a	D ₁	d	l ₁	l ₂	d ₁	d ₂	k	t	r
0	$\frac{1}{19.212}$	1°29'27"	9.045	3	9.201	6.442	50	53	6	-	-	4	0.2
1	$\frac{1}{20.047}$	1°25'43"	12.065	3.5	12.230	9.396	53.5	57	9	M6	16	5	0.2
2	$\frac{1}{20.020}$	1°25'50"	17.780	5	18.030	14.583	64	69	14	M10	24	5	0.2
3	$\frac{1}{19.922}$	1°26'16"	23.825	5	24.076	19.759	81	86	19	M12	28	7	0.6
4	$\frac{1}{19.254}$	1°29'15"	31.267	6.5	31.605	25.943	102.5	109	25	M16	32	9	1
5	$\frac{1}{19.002}$	1°30'26"	44.399	6.5	4.741	37.584	129.5	136	35.7	M20	40	9	2.5
6	$\frac{1}{19.180}$	1°29'36"	63.348	8	63.765	53.859	182	190	51	M24	50	12	4
7	$\frac{1}{19.231}$	1°29'22"	83.058	10	83.578	70.058	250	260	65	M33	80	18.5	5

● Brown sharp taper (Screw type)



B&S No.	D	a	D ₁	d	d ₁	l ₁	l ₂	t	r	d ₂	K
4	10.221	2.4	10.321	8.890	8.0	31.0	34.2	2	0.2	-	-
5	13.286	2.4	13.386	11.430	10.0	44.4	46.8	3	0.2	-	-
6	15.229	2.4	15.330	12.700	11.0	60.0	62.7	3	0.2	M 8(1/4)	20
7	18.424	2.4	18.524	15.240	14.0	76.2	78.6	4	0.2	M10(3/8)	24
8	22.828	3.2	22.962	19.090	17.0	90.5	93.7	4	0.6	M12(1/2)	28
9	27.104	3.2	27.238	22.863	21.0	101.6	104.8	4	0.6	M12(1/2)	28
10	32.749	3.2	32.887	26.534	24.0	144.5	147.7	5	1.0	M16(5/8)	32
11	38.905	3.2	39.039	31.749	29.0	171.4	174.6	5	1.0	M16(5/8)	32
12	45.641	3.2	45.774	38.103	35.0	181.0	184.2	6	2.5	M20(3/4)	40
13	52.654	3.2	52.787	44.451	41.0	196.8	200.0	6	3.0	M20(3/4)	40
14	59.533	3.2	59.666	50.800	47.0	209.6	212.8	7	4.0	M24(1)	40
15	66.408	3.2	66.541	57.150	53.0	222.2	225.4	7	4.0	M24(1)	50
16	73.292	3.2	73.425	63.500	59.0	35.0	238.2	8	5.0	M30(1 1/8)	60


● Brown sharp taper (Tang type)



B&S No.	D	a	D ₁	d ₁	d ₂	l ₁	l ₂	b	c	e	R	r
4	10.221	2.4	10.321	8.458	8.1	42.1	44.5	5.5	8.7	14.4	7.9	1.3
5	13.286	2.4	13.386	10.962	10.7	55.6	58.0	6.3	9.5	16.2	7.9	1.5
6	15.229	2.4	15.330	12.167	11.7	73.0	75.4	7.1	11.1	18.0	7.9	1.5
7	18.424	2.4	18.524	14.675	14.2	89.7	92.1	7.9	11.9	20.3	9.5	1.8
8	22.828	3.2	22.962	18.453	18.0	104.8	108.0	8.7	12.7	22.0	9.5	2.0
9	28.104	3.2	27.238	22.200	21.8	117.5	120.7	9.5	14.3	25.4	11.1	2.5
10	32.749	3.2	32.887	25.751	25.7	162.7	165.9	11.1	16.7	28.1	11.1	2.8
11	38.905	3.2	39.039	30.985	30.7	189.7	192.9	11.1	16.7	30.0	12.7	3.3
12	45.641	3.2	45.774	37.246	37.1	201.6	204.8	12.7	19.0	32.5	12.7	3.8
13	52.654	3.2	52.787	43.589	43.4	217.5	220.7	12.7	19.0	35.7	15.9	4.3
14	59.533	3.2	59.666	49.841	49.8	232.6	235.8	14.2	21.4	41.2	19.0	4.8
15	66.408	3.2	66.541	56.186	56.1	245.3	248.5	14.2	21.4	44.4	22.2	5.3
16	73.292	3.2	73.425	62.441	62.2	260.4	263.6	15.8	23.8	50.0	25.4	5.8




● Standard taper of American milling machine

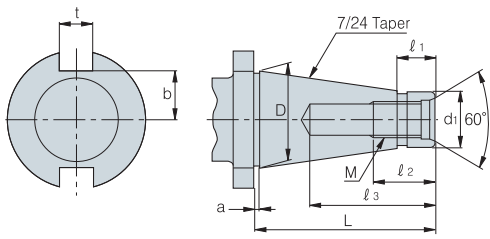


NT No.	Dimensions	D	D ₁	L	l ₁	M	l ₂	l ₃	a	t	b
30	1 1/4	31.750	17.40 ^{-0.29} _{-0.36}	70	20	UNC 1/2"	24	50	1.6	15.9	6
40	1 3/4	44.450	25.32 ^{-0.30} _{-0.384}	95	25	UNC 5/8"	30	60	1.6	15.9	22.5
50	2 3/4	69.850	39.60 ^{-0.31} _{-0.41}	130	25	UNC 1"	45	90	3.2	25.4	35
60	4 1/4	107.950	60.20 ^{-0.34} _{-0.46}	210	45	UNC 1 1/4"	56	110	3.2	25.4	60

● Bottle grip taper

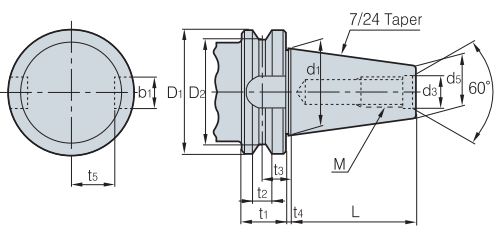

BT No.	D ₁	D ₂	t ₁	t ₂	t ₃	t ₄	d ₁	d ₃	L	M	b ₁	t ₅	d ₅
35	53	43	22	10	14.6	2	38.1	13	56.5	M12x1.75	16.1	19.6	21.62
40	63	52	25	10	16.6	2	44.45	17	65.4	M16x2	16.1	22.6	25.3
45	85	73	30	12	21.2	3	57.15	21	82.8	M20x2.5	19.3	29.1	33.1
50	100	85	35	15	23.2	3	69.85	25	101.8	M24x3	25.7	35.4	40.1
60	155	135	45	20	28.2	3	107.95	31	161.8	M30x3.5	25.7	60.1	60.7


● HSK shank (DIN 69893)

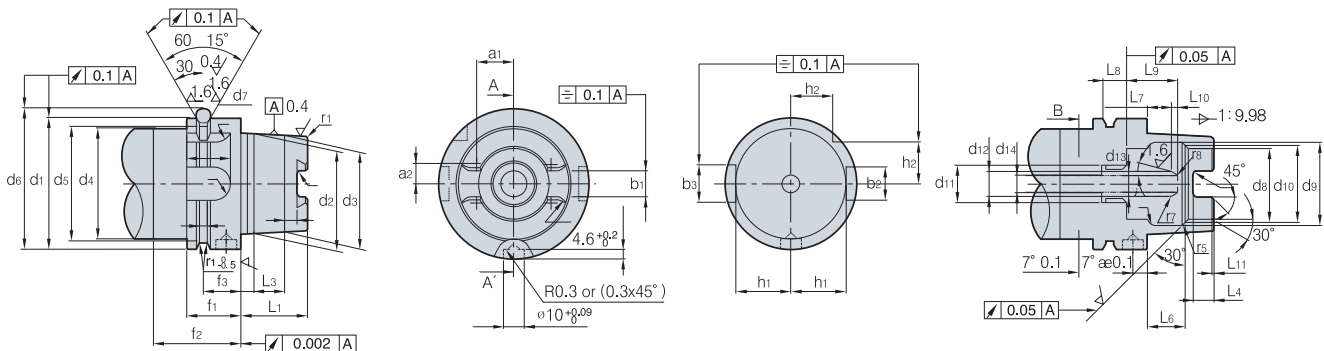

HSK No.	b ₁	b ₂	b ₃	d ₁	d ₂	d ₃	d ₄	d ₅	d ₆	d ₇	d ₈	d ₉	d ₁₀	d ₁₁	d ₁₂	d ₁₃	d ₁₄	a ₁	a ₂
50	10.54	12	14	50	38	36.90	42	43	59.3	7	26	32	29	M16X1	10	6.8	6.8	13.997	7.648
63	12.5	16	14	63	48	46.53	53	55	72.3	7	34	40	37	M18X1	12	8	8.4	17.862	9.25
100	20	20	14	100	75	72.80	85	92	109.75	7	53	63	58	M24X1.5	16	12	12	27.329	15.00


HSK No.	f ₁	f ₂	f ₃	f ₄	b ₁	b ₂	L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	L ₇	L ₈	L ₉	L ₁₀	L ₁₁	L ₁₂	r ₁	r ₂	r ₃	r ₄	r ₅	r ₆	r ₇	r ₈
50	26	42	18	3.75	2	15.5	25	5	11	7.5	4.5	14.13	10	10	23	3	1	19	1	1.5	2.38	6	0.5	1	2	6
63	26	42	18	3.75	28.5	20	32	6.3	14.7	10	6	18.13	10	12	24.5	3	1	21	1.2	1.5	3	8	0.6	1.5	3	8
100	29	45	20	3.75	44	31.5	50	10	24	15	10	28.56	12.5	16	28	3	1.5	24	2	2	3	12	1	1.5	3	10

● DIN 69871

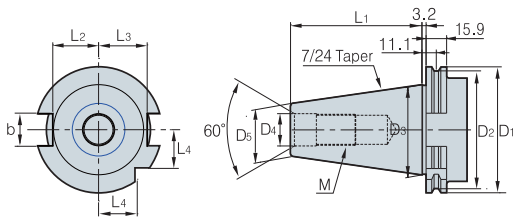


Shank No	D ₁	D ₂	D ₃	D ₄	D ₅	L ₁	L ₂	L ₃	L	b	M
30	50.0	44.3	31.75	13	17.8	47.8	16.4	19.0	33.5	16	M12x1.75
40	63.5	56.2	44.45	17	24.5	68.4	22.8	25.0	42.5	16.1	M16x2
45	82.5	57.2	57.15	21	33.0	82.7	29.1	31.3	52.5	19.3	M20x2.5
50	97.5	91.2	68.85	25	40.1	101.7	35.5	37.7	61.5	25.7	M24x3

● CAT shank

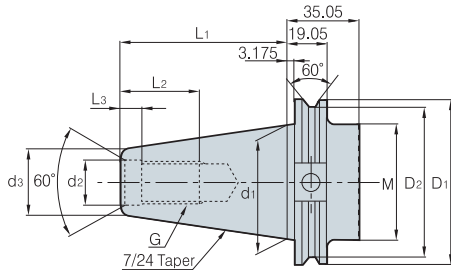

Shank No	D ₁	D ₂	M	d ₁	d ₂	d ₃	L ₁	L ₂	L ₃	G
CAT40	63.5	56.36	M16x2	44.45	16.28	21.84	68.25	28.45	4.78	5/8-11
CAT45	82.55	75.41	M20x2.5	57.15	19.46	27.69	82.55	38.1	4.78	3/4-10
CAT50	98.43	91.29	M24x3	69.85	26.19	35.05	101.6	44.45	6.35	1-8

● Standard of milling cutter hole (KSB3203)



● Type A


Diameter	øDH ₇	E	F	r
8	8 ^{+0.015} / ₀	8.9 ^{+0.25} / ₀	2 ^{+0.16} / _{+0.06}	0.4
10	10 ^{+0.015} / ₀	11.5 ^{+0.25} / ₀	3 ^{+0.16} / _{+0.06}	0.4
13	13 ^{+0.018} / ₀	14.6 ^{+0.25} / ₀	3 ^{+0.16} / _{+0.06}	0.6
16	16 ^{+0.018} / ₀	17.7 ^{+0.25} / ₀	4 ^{+0.19} / _{+0.07}	0.6
19	19 ^{+0.021} / ₀	21.1 ^{+0.25} / ₀	5 ^{+0.19} / _{+0.07}	1
22	22 ^{+0.021} / ₀	24.1 ^{+0.25} / ₀	6 ^{+0.19} / _{+0.07}	1
27	27 ^{+0.021} / ₀	29.8 ^{+0.25} / ₀	7 ^{+0.23} / _{+0.08}	1.2
32	32 ^{+0.025} / ₀	34.8 ^{+0.25} / ₀	8 ^{+0.23} / _{+0.08}	1.2
40	40 ^{+0.025} / ₀	43.5 ^{+0.3} / ₀	10 ^{+0.23} / _{+0.08}	1.2
50	50 ^{+0.025} / ₀	53.5 ^{+0.3} / ₀	12 ^{+0.23} / _{+0.095}	1.6
60	60 ^{+0.030} / ₀	64.2 ^{+0.3} / ₀	14 ^{+0.275} / _{+0.095}	1.6
70	70 ^{+0.030} / ₀	75.0 ^{+0.3} / ₀	16 ^{+0.275} / _{+0.095}	2
80	80 ^{+0.030} / ₀	85.5 ^{+0.3} / ₀	18 ^{+0.275} / _{+0.095}	2
100	100 ^{+0.035} / ₀	107.0 ^{+0.3} / ₀	24 ^{+0.32} / _{+0.11}	2.5

● Type B

Diameter	øDH ₇	E	F	r
1/2	12.70 ^{+0.018} / ₀	14.17 ^{+0.25} / ₀	2.38 ^{+0.31} / _{+0.13}	0.5
5/8	15.875 ^{+0.018} / ₀	17.74 ^{+0.25} / ₀	3.18 ^{+0.31} / _{+0.13}	0.8
3/4	19.050 ^{+0.021} / ₀	20.89 ^{+0.25} / ₀	3.18 ^{+0.31} / _{+0.13}	0.8
7/8	22.225 ^{+0.021} / ₀	24.07 ^{+0.25} / ₀	3.18 ^{+0.31} / _{+0.13}	0.8
1	25.40 ^{+0.021} / ₀	28.04 ^{+0.25} / ₀	6.35 ^{+0.31} / _{+0.13}	1.2
1 1/4	31.750 ^{+0.025} / ₀	35.18 ^{+0.25} / ₀	7.94 ^{+0.32} / _{+0.14}	1.6
1 1/2	38.10 ^{+0.025} / ₀	42.32 ^{+0.25} / ₀	9.53 ^{+0.89} / _{+0.25}	1.6
1 3/4	44.450 ^{+0.025} / ₀	49.48 ^{+0.25} / ₀	11.11 ^{+0.89} / _{+0.25}	1.6
2	50.80 ^{+0.03} / ₀	55.83 ^{+0.25} / ₀	12.7 ^{+0.89} / _{+0.25}	1.6
2 1/2	63.50 ^{+0.03} / ₀	69.42 ^{+0.25} / ₀	15.81 ^{+0.89} / _{+0.25}	1.6
3	76.20 ^{+0.03} / ₀	82.93 ^{+0.25} / ₀	19.05 ^{+0.89} / _{+0.25}	2.4
3 1/2	88.90 ^{+0.035} / ₀	98.81 ^{+0.25} / ₀	22.23 ^{+0.89} / _{+0.25}	2.4
4	101.60 ^{+0.035} / ₀	111.51 ^{+0.25} / ₀	25.4 ^{+0.89} / _{+0.25}	2.4
4 1/2	114.30 ^{+0.035} / ₀	125.81 ^{+0.25} / ₀	25.58 ^{+0.89} / _{+0.25}	3.2
5	127.0 ^{+0.04} / ₀	140.08 ^{+0.25} / ₀	31.75 ^{+0.89} / _{+0.25}	3.2



▶ Endmill's shape and names

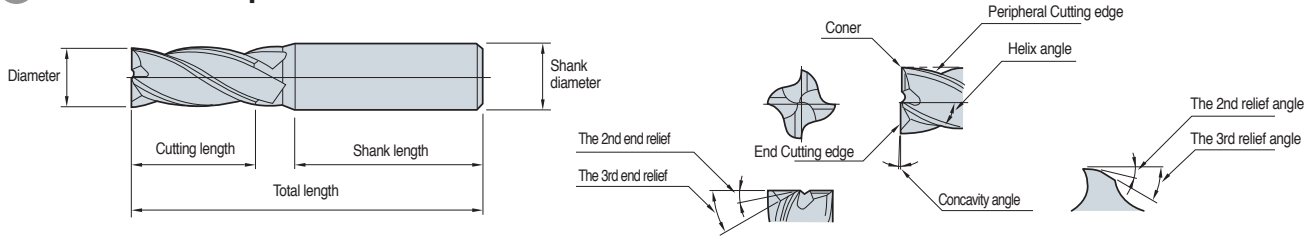

▶ The comparison according to number of flute

● Features of number of flute

Ø10mm	2 flutes (IFE2100)	3 flutes (IFE3100)	4 flutes (IFE4100)
Shape			
Cross section	44mm ²	46mm ²	48mm ²
Ratio	56%	58%	61%
Advantages	Good chip flow	Good chip flow	High rigidity
Disadvantages	Weak rigidity	Difficult to measure external diameter	Bad chip flow
Usages	Side facing, Grooving	Side facing, Grooving	Side cutting
	Multi-functional	Medium, finishing	Finishing

● Affection of number of flute

Specification	Major features	2 flutes	4 flutes
Tool rigidity	Torsional rigidity	○	◎
	Bending rigidity	○	◎
Surface finish	Surface roughness	○	◎
	Machining precision	○	◎
Chip control	Chip clogging	◎	○
	Chip evacuation	◎	○
Grooving	Chip evacuation	◎	○
	Grooving	◎	○
Side facing	Surface finish	○	◎
	Vibration	◎	○

◎-Excellent ○-Good

▶ The differences between general endmills and high speed endmills

General endmills		High speed endmills	
Cross section shape	Features	Cross section shape	Features
	- Applied for Low speed, High depth of cut, Low feed - Low hardness workpiece (general steel, cast iron)		- Applied for high speed, low depth of cut, high feed - Useful for hardened workpiece such as die steel

▶ Calculations of cutting condition

● Calculations of Cutting speed

$$vc = \frac{\pi \times D \times n}{1000} \quad n = \frac{1000 \times vc}{\pi \times D}$$

● Calculations of feed speed

$$vf = n \times fn \quad \text{or} \quad n \times fz \times z$$


$$fn = \frac{vf}{n} \quad fz = \frac{fn}{z} \quad \text{or} \quad \frac{vf}{n \times z}$$

vc : Cutting speed (m/min) vf : Feed speed (m/min)
 π : Circular constant (3.141592) fn : Feed per revolution (mm/rev)
 D : Endmill diameter (mm) fz : Feed per flute (mm/t)
 n : Revolution per minute (min⁻¹) z : Number of flute

▶ Ball endmills cutting speed calculation formulas

Revolution per minute	$n = \frac{vc \times 1000}{D \times \pi}$
Cutting speed	$vc = \frac{D \times \pi \times n}{1000}$
Feed per tooth	$fz = \frac{vf}{z \times n}$
Feed per revolution	$fn = fz \times z$
Feed speed	$vf = fz \times z \times n$
Chip removal rate	$Q = ae \times ap \times vf$

Effective diameter of Ball Endmill

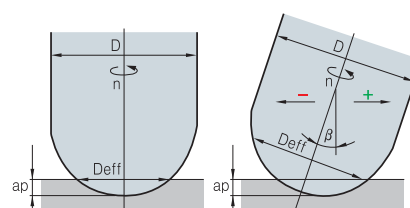

$$D_{eff} = 2 \times \sqrt{D \times ap - ap^2} \quad \text{Calculation Table}$$

$$D_{eff} = D \times \sin \left[\beta \pm \arccos \left(\frac{D - 2ap}{D} \right) \right]$$


▶ Tool failure and trouble shooting

Trouble	Causes	Solutions																	
		Cutting condition					Tool shape					Grade		etc					
		Cutting speed	Feed	Depth of cut	Coolant	Up cut-down cut	Relief angle	Lead angle	Length of flute	Number of flute	Honing	Chip pocket	Toughness	Hardness	Machine rigidity	Machine vibration	Workpiece fixing	Overhang	
Damage at cutting edge	Excessive periphery cutting edge	Improper cutting condition	↓	↑		●											↑		
	Chipping	Improper cutting condition Generating built up edge Weak tool rigidity Improper grade		↓			↓	↓			●		↑				↓	↑	↓
	Fracture during operation	Improper cutting conditions Excessive cutting load Excessive overhang		↓	↓				↓			↑			↑		↑	↓	
Poor surface finish	Generating built-up edge		↑	↑		●			↑		●								
	Chattering		↓			↓		↓						↑	↓	↑	↓		
	Poor straightness		↓	↓		↑		↑	↓								↓		
Poor machining precision (Machined size, Perpendicularity)	Improper cutting conditions Improper tool shape		↑	↓		↓		↓	↑					↑	↓		↓		
Bad chip evacuation	Excessive cutting volume Improper chip pocket Improper cutting conditions		↓	↓					↓		↑								

↑ : Increase ↓ : Decrease ● : use ○ : Correct use



▶ The shape of drills and the names

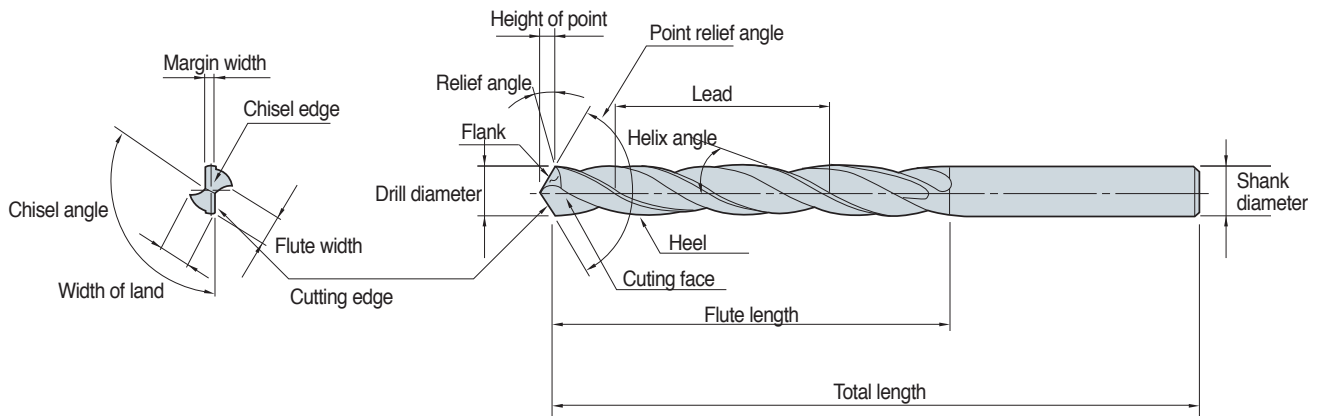


▶ Shape and the feature of cutting

Helix angle	Plays rake angle of cutting edge's role. If helix angle increases Cutting force decreases. On the other hand If helix angle is too big Drill rigidity decreases. Poor machinability ◀ low - Helix angle - high ▶ Smooth chip evacuation Hard workpiece(hardened steel) ◀ low - Helix angle - high ▶ Soft material(aluminum etc)												
Length of flute	The path of both chip evacuation and cooling lubricant. Too big length of flute weakens drill rigidity and too small length of flute worsens chip evacuation to breakage.												
Point angle	Point angle has big influence on cutting performance. It mainly depends on workpiece. In case of standard drills Point angle is generally 118. thrust resistance decrease ◀ low - Point angle - high ▶ thrust resistance increase Torque increase, Burr on exit increase ◀ low - Point angle - high ▶ Torque decrease, Burr on exit decrease Soft material(aluminum etc) ◀ low - Point angle - high ▶ Hard workpiece(hardened steel)												
Margin	While machining Margin is the part of contact between workpiece and drill's external. It prevents bending and plays guide's role . It depends on drill size. Cutting force decrease ◀ small - Margin - big ▶ Cutting force increase Poor guide ◀ small - Margin - big ▶ Good guide												
Web thickness	Web is the part of center of drill and drill's rigidity depends on the web. Drill needs cutting edge, chisel edge, at the tip of drill because drill makes a hole at the beginning of drilling . When web thickness is big Thinning is needed to reduce cutting force. Cutting force decrease ◀ small - Web thickness - big ▶ Cutting force increase Rigidity decrease ◀ small - Web thickness - big ▶ Rigidity increase Good chip evacuation ◀ small - Web thickness - big ▶ Bad chip evacuation Soft material(aluminum etc) ◀ small - Web thickness - big ▶ Hard workpiece(hardened steel)												
Back taper	Drill diameter size is getting smaller from point to shank in order to avoid the friction between drill periphery and workpiece. The decrease of diameter divided by flute length 100mm generally becomes 0.04~0.1mm. As for high performance drills and drills for hole shrinkage workpiece during operation have big back taper.												
Thinning	In general drills Thrust effects on chisel over 50%. Chisel edge length depends on web thickness and chisel angle. But if web is thin Drill rigidity weaken. Therefore without web thickness change Thinning makes chisel edge short or gives rake angle. In other words, Thinning makes rake angle at chisel and improves chip evacuation and decrease thrust. <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Types of</th> <th>Edge shape</th> <th>Feature</th> <th>Korloy's drills</th> </tr> </thead> <tbody> <tr> <td>X type</td> <td></td> <td>Good centering High central thickness Crank shaft</td> <td>Mach drill(MSD) Vulcan drill(VZD)</td> </tr> <tr> <td>S type</td> <td></td> <td>For wide use For general Easy regrinding</td> <td>Solid drill(SSD)</td> </tr> </tbody> </table>	Types of	Edge shape	Feature	Korloy's drills	X type		Good centering High central thickness Crank shaft	Mach drill(MSD) Vulcan drill(VZD)	S type		For wide use For general Easy regrinding	Solid drill(SSD)
Types of	Edge shape	Feature	Korloy's drills										
X type		Good centering High central thickness Crank shaft	Mach drill(MSD) Vulcan drill(VZD)										
S type		For wide use For general Easy regrinding	Solid drill(SSD)										



Major cutting formulas



Cutting speed	Feed	Helix angle	Machining time
$vc = \frac{\pi \cdot D \cdot n}{1000} \text{ (m/min)}$ <ul style="list-style-type: none"> vc : Cutting speed (m/min) D : Drill diameter (mm) n : Revolution per minute (min-1) π : Circular constant (3.14) 	$fn = \frac{vf}{n} \text{ (mm/rev)}$ <ul style="list-style-type: none"> fn : Feed per revolution (mm/rev) vf : Feed per minute (mm/min) n : Revolution per minute (min-1) 	$\delta = \tan^{-1} \left(\frac{\pi D}{L} \right)$ <ul style="list-style-type: none"> δ : Helix angle D : Drill diameter (mm) L : Lead (mm) π : Circular constant (3.14) 	$tc = \frac{ld}{n \cdot fn} \text{ (min)}$ <ul style="list-style-type: none"> tc : Machining time (min) n : Revolution per minute (min-1) ld : Drilling time (mm) fn : Feed (mm/rev)

Cutting torque and thrust (calculation formulas)		
$Md = KD^2 \times (0.0631 + 1.686 \times fn) \text{ (kg-cm)}$ $T = 57.95KDfn^{0.75} \text{ (kg)}$	<ul style="list-style-type: none"> Md : Cutting torque (kg-cm) T : Cutting thrust (kg) D : Drill diameter (mm) 	<ul style="list-style-type: none"> fn : Feed per revolution (mm/rev) K : Material coefficient

Workpiece material (SAE/AISI)	Tensile strength (kgf)	Hardness (HB)	Material coefficient K
Cast iron	Cast iron (Gray)	21	1.00
	Cast iron	28	1.39
	Cast iron (Ductile)	35	1.88
General steel	1020 (carbon steel C 0.2%)	55	2.22
	1112 (C 0.12, S 0.2%)	62	1.42
	1335 (Mn 1.75%)	63	1.45
Nickel Chrome steel	3115 (Ni 1.25, Cr 0.6, Mn 0.5)	53	1.56
	3120 (Ni 1.25, Cr 0.6, Mn 0.7)	69	2.02
	3140	88	2.32
Chrome molybdenum steel	4115 (Cr 0.5, Mo 0.11, Mn 0.8)	63	1.62
	4130 (Cr 0.95, Mo 0.2, Mn 0.5)	77	2.10
	4140 (Cr 0.95, Mo 0.2, Mn 0.85)	94	2.41
Nickel molybdenum steel	4615 (Ni 1.8, Mo 0.25, Mn 0.5)	75	2.12
	4820 (Ni 3.5, Mo 0.25, Mn 0.6)	140	3.44
Chrome steel	5150 (Cr 0.8, Mn 0.8)	95	2.46
Chrome vanadium steel	6115 (Cr 0.6, Mn 0.6, V 0.12)	58	2.08
	6120 (Cr 0.8, Mn 0.8, V 0.1)	80	2.22

Cutting torque and thrust (empirical formula)		
$Md = K_1 \cdot d^2 \cdot fn^m$ $T = K_2 \cdot d \cdot fn^n$	<ul style="list-style-type: none"> Md : Cutting torque (kg-cm) T : Thrust (kg) 	<ul style="list-style-type: none"> fn : Feed (mm/rev) d : Drill diameter (mm) K1, K2, m, n : Experimental Data Characteristic value

Workpiece	K ₁	m	K ₂	n
Soft steel	5.9	1.00	125.0	0.88
Rolled steel	3.5	1.00	55.0	0.88
7-3 brass	2.5	0.94	44.4	0.87
Aluminum	1.5	0.90	33.3	0.78
Zinc	1.4	0.88	27.0	0.74
Gun metal	2.0	0.94	21.6	0.75
Galvanized Iron	0.3	0.57	6.4	0.55



▶ Tool failures and solutions

Trouble	Causes	Solutions																	
		Cutting condition					Tool shape					Grade		etc					
		Cutting speed	Feed	Step feed	Initial feed	Coolant	Relief angle	Point angle	Thinning angle	Honing	Flute width rate	Thinning	Toughness	Hardness	Machine rigidity	Machine vibration	Guide bush	Clamping workpiece	
Chipping	• Too sharp cutting edge (too big relief angle) (thinning edge is too sharp)						↓		↓	↑			↑						
	• Excessive cutting speed	↓				●													
	• Built-up edge					●	↓		↓	↑			↑						
	• Vibration and chattering	↓												↑	↓		●		
Wear	• Excessive cutting speed (Abnormal wear at margin)	↓				●													
	• Insufficient cutting speed (Abnormal wear at center)	↑				●													
Chip	• Long chip	↑	↑			●				↓									
	• Over lap	↑	↑																
	• Chip burning	↑				●													
Hole precision Burr, Poor surface finish	• Tool clamping precision				↓			↓		↓				↑	↓		●		
	• Excessive feed, sharp point angle		↓						↑	↓									
	• Excessive cutting speed (Considered tool grade)	↑				●	↓	⊙					↑						
Fracture	Breakage on contact	• Poor surface finish			●	↓											●		
		• Insufficient machine rigidity												↑				●	
		• Improper cutting condition	↑	↓															
	Breakage at hole bottom	• Crooked hole	↑							↑			●			↓	●		
		• Chip clogging		↓	●								↑						

↑ : Increase ↓ : Decrease ● : use ⊙ : Correct use



 **Hole size for threading**

● **Metric coarse screw threads**

Specification			Hole diameter
M1	X	0.25	0.75
M1.1	X	0.25	0.85
M1.2	X	0.25	0.95
M1.4	X	0.3	1.1
M1.6	X	0.35	1.25
M1.7	X	0.35	1.35
M1.8	X	0.35	1.45
M2	X	0.4	1.6
M2.2	X	0.45	1.75
M2.3	X	0.4	1.9
M2.5	X	0.45	2.1
M2.6	X	0.45	2.2
M3	X	0.6	2.4
M3	X	0.5	2.5
M3.5	X	0.6	2.9
M4	X	0.75	3.25
M4	X	0.7	3.3
M4.5	X	0.75	3.8
M5	X	0.9	4.1
M5	X	0.8	4.2
M5.5	X	0.9	4.6
M6	X	1	5
M7	X	1	6
M8	X	1.25	6.8
M9	X	1.25	7.8
M10	X	1.5	8.5
M11	X	1.5	9.5
M12	X	1.75	10.3
M14	X	2	12
M16	X	2	14
M18	X	2.5	15.5
M20	X	2.5	17.5
M22	X	2.5	19.5
M24	X	3	21
M27	X	3	24
M30	X	3.5	26.5
M33	X	3.5	29.5
M36	X	4	32
M39	X	4	35
M42	X	4.5	37.5
M45	X	4.5	40.5
M48	X	5	43

● **Metric coarse screw threads**


Specification			Hole diameter
M2.5	X	0.35	2.2
M3	X	0.35	2.7
M3.5	X	0.35	3.2
M4	X	0.5	3.5
M4.5	X	0.5	4
M5	X	0.5	4.5
M5.5	X	0.5	5
M6	X	0.75	5.3
M7	X	0.75	6.3
M8	X	1	7
M8	X	0.75	7.3
M9	X	1	8
M9	X	0.75	8.3
M10	X	1.25	8.8
M10	X	1	9
M10	X	0.75	9.3
M11	X	1	10
M11	X	0.75	10.3
M12	X	1.5	10.5
M12	X	1.25	10.8
M12	X	1	11
M14	X	1.5	12.5
M14	X	1	13
M15	X	1.5	13.5
M15	X	1	14
M16	X	1.5	14.5
M16	X	1	15
M17	X	1.5	15.5
M17	X	1	16
M18	X	2	16
M18	X	1.5	16.5
M18	X	1	17
M20	X	2	18
M20	X	1.5	18.5
M20	X	1	19
M22	X	2	20
M22	X	1.5	20.5
M22	X	1	21
M24	X	2	22
M24	X	1.5	22.5
M24	X	1	23
M25	X	2	23
M25	X	1.5	23.5
M25	X	1	24
M26	X	1.5	24.5
M27	X	2	25



▶ Cautions

● Selection of drill chuck

- Collect chuck is favorable Because it has strong grip power (General drill-chuck and Keyless chuck don't have enough grip power.)




• Collect chuck

• General drill-chuck

● Coolant supply


- Supply enough coolant around hole entrance.
- Standard cutting oil pressure : 3~5kg/cm², Flux : 2~5l/min.

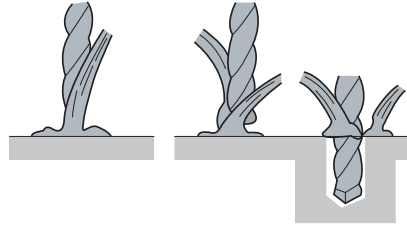

• Supply much coolant at hole entrance

● Mounting drill

- When mounting drill Periphery chattering should be within 0.02mm.
- Flute should not be clamped.

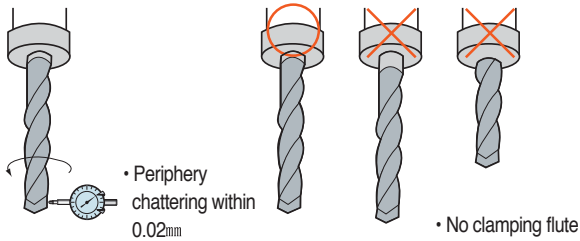


• Periphery chattering within 0.02mm

• No clamping flute

● How to clamp workpiece

- At high performance drilling High thrust, torque and horizontal cutting force work at the same time so that workpiece should be clamped strongly to prevent chattering.

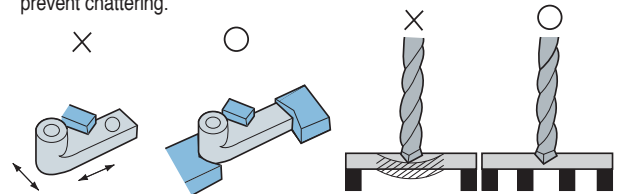

• Uniform and strong clamping is needed (Right and left, up and down)


• Strong clamping is needed because bending causes chipping

▶ Notice

- 1) For better drill's life, small damage and wear are favorable to be regrinding.
- 2) Damage and wear size should be within 1.5mm for regrinding.
- 3) If drill has crack, regrinding is impossible.
- 4) Ordering for regrinding is acceptable or purchase regrinding machine



▶ Regrinding procedures

● Regrinding method (Mach Drill)

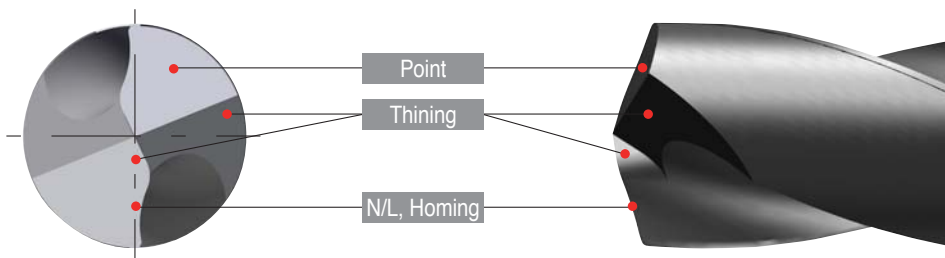


1) Preparation

- Determination of regrinding areas Check the cutting edge for damage and wear If large fracture is found, remove it by rough grinding.



2) Grinding operation




- Drills setting
- Drill is clamped to collet
- Chattering is kept within 0.02mm.

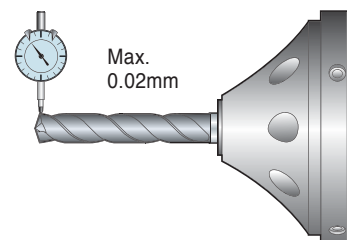

3) Grinding operation-Grinding point

- Check damage and wear at the point and remove it completely.
- The difference of the lip height is kept within 0.02mm.



Point angle(a) : 140°
Point relief angle(b)t : 8°~ 15°

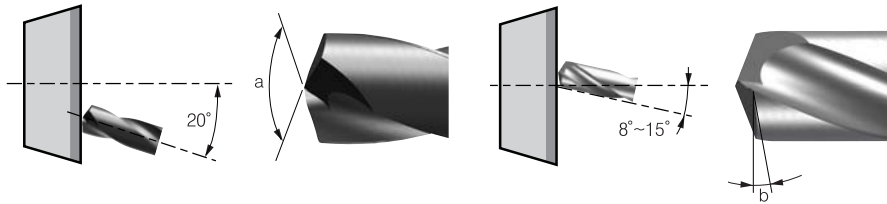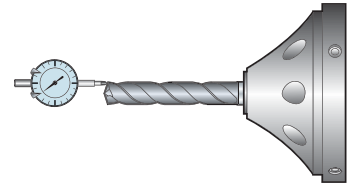

4) Grinding operation-Thinning grinding

- Considering N/L width Cutting edge length from the center of drill axis should be 0.03~0.08mm for balancing.
- Set the wheel to tilt drill axis by 34°~ 40°.


Thinning angle(a)° : 155°~ 160°/ Thinning open angle(b) : 100°~ 105°
Thinning relief angle(c) : 34°~ 40°

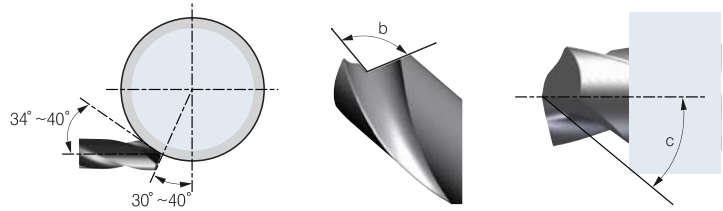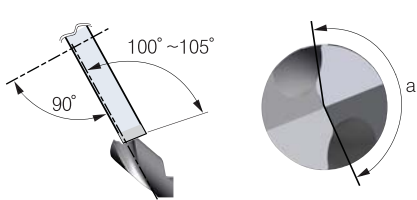

5) Grinding - N/L grinding and honing


- Using diamond chisel Grinds the width flat along point cutting edge.
- After negaland operation Finishes with brush or handstone.

N/L width(a) : 0.05mm~0.16mm / N/L angle(b) : 24°~26°

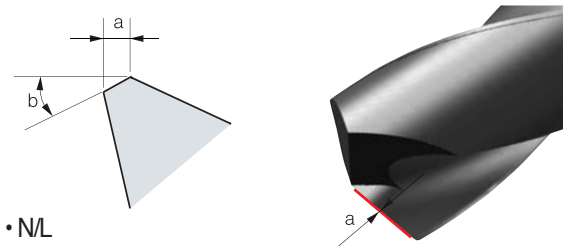

● TIP


- Making point
 - Without center drill, the point width should be below 0.10mm.
- Recommended grinding condition
 - Diamond wheel : 240~400 mesh
 - Diamond chisel : 400~600 mesh
 - Diamond hand stone : 800~1500 mesh

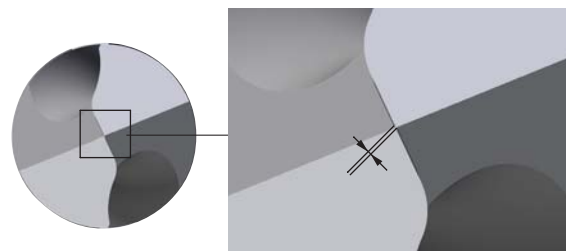

▶ Hexagonal socket bolt(Clamping screw) size

● Counter boring and size of bolt hole for hexagonal socket bolt

ISO (d)	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30
Ød _i	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30
Ød'	3.4	4.5	5.5	6.5	8.5	11	14	16	18	20	22	24	26	30	33
ØD	5.5	7	8.5	10	13	16	18	21	24	27	30	33	36	40	45
ØD'	5	8	9.5	11	14	17.5	20	23	26	29	32	35	39	43	48
H	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30
H'	2.7	3.6	4.6	5.5	7.4	9.2	11.0	12.8	14.5	16.5	18.5	20.5	22.5	25	28
H''	3.3	4.4	5.4	6.5	8.6	10.8	13.0	15.2	17.5	19.5	21.5	23.5	25.5	29	32

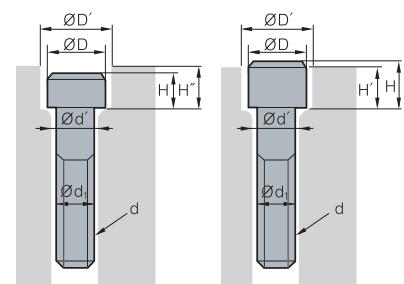

The comparison of chip breakers

APPLICATION		KORLOY	KYOCERA	TAEGUTEC	SUMITOMO	SANDVIK	KENNAMETAL	ISCAR	WLATER	mitsubishi	SECO	
NEGATIVE	Steel	Ultra-Finishing	-	DP (G)	-	-	-	FF(G)	-	-	PK(G)	-
			VL	GP, PP	FA	FA, FL	QF	UF	SF	NF3	FH,FS	FF1
		Finishing	VF	HQ	FG	LU, SU	PF	FN	NF	NF4	SH, C	FF2
			VB	-	SF	SE	61	-	F3M	PF5	LP	-
		Medium to finishing	VQ, VC	CQ	MC	SX	-	LF, CT	TF	NS6	SA, C()	MF2, MF3
			LP	PQ	FC	-	-	-	-	MP3	MV	MF5
	Medium machining	Gm, HM	HK, CS GS HS, PS	MP, MT	GU, UX	QM, SM	MP, MN	GN	NM4, NP5	MA, MH	M3, M5	
		VM	-	PC	GE	PM	-	M3M	NM5, NM6	MP	-	
	Roughing	B25	-	-	-	-	-	-	-	-	M5	
		HR, GR	PT, GT, HT, PH	RT	MU, ME, MX	PR	RN	NR, R3M	NM9, PP5	GH, RP	MR5, MR6, MR7	
	Heavy duty machining	GH	PX	RH, RX	HG, MP	PR	RH	NM	NR4, NRF	HZ	R4, R5	
		VH	HX	HZ	HP	QR	RM	HR	NR8	HV, HX, HAX	R6, R7, R8	
		VT	-	HT, HY	HU, HW, HF	HR	MM	-	HBS, HCS, HDS, HXD	RR6, PR9, R56, R57, R68		
Low carbon steel	Soft steel	VL	XF, XP, XP-T	SF	FL	LC	-	-	-	FY	-	
		-	XQ, XS	-	-	-	-	-	-	SY	-	
High feed	High feed cutting	VW	WP	WS	LUW, SEW	WF, WL	FW	WF	NF	SW	FF2, MF2	
		LW	WQ	WT	GUW	WM, WMX	MW	WG	NM	MW	MF5, M3	
		-	-	-	-	WR	RW	-	-	R4, R7		
Application	Shaft (long bar)	SH	CJ, ST	FS, VF, FX	HM	K	-	-	-	ES	UX	
		KNUX-	KNMX-	KNUX-	-	KNUX-71	-	-	-	KNMX-19	-	
M	Stainless steel	VP2	MQ, GU	EA	SU	MF	FP	F3P	NF4	LM	MF1	
		VP3, HS	HU, TK, MU	MP, EM	EX, GU	MM	MP	M3M	NM4	MA, GM, MM	MF3	
		MP, GS	MS	ET	MU, HM	MR	RP	R3M	NR4	RM	M5	
K	Cast iron	MP	C	MT	UZ	KF	FN	TF	NM, MK5	LK	M4	
		GR, VR	ZS	RT, KT	UX, GZ	KM	RP	GN	NM5, RK5	MA, MK	M5	
		-MA	-MA, GC	-MA	-MA	KR	UN	-MA	-MA, MK5	GH, -MA, RK	MR7	
S	HRSA	VP1	MQ	EA	EF	-	FS, LF	PF	NF4	FJ(G), LS	M1	
		VP2	TK	ML	UP, EG	23.SR	MS	PP	-	MJ	MF1	
		VP3	MU	EM	EX	Xcel-SM	MP	VL	NM4	MS, MS	MF4	
		MP	MS	ET	MU	-	RP	-	NR4	GJ, RS	MR4	
N	Aluminium	HA	AH	ML	UP (GX), AG	23	MS	PP	-	MJ	MF1	
POSITIVE	Application	Finishing	VL	XP	FA	LU	PF	UF	-	PF	FV	FF1
			VF	GP	-	FP, FC, SI	UF	-	PF	PF, PF2	SV	F1
		Medium machining	HMP	XQ	FG	-	PM	LF	14	-	-	MF2
	MP		HQ, CK	PC	SU, SC	UM	-	SM	PF4, PF5	MV	F2	
	Roughing	C25		MT	MU	PR, UR	MF	-	PM5		M5	
	Stainless steel For HRSA	VP1	CF, GF, GQ	FG	FC	KF	LF	PF	PM	FJ, LM	F1	
		VL	MQ	SA	-	KM	MF	SM	PM5	AM, MM	MF2	
	Cast iron	MP	GK	PC	MU	UM	LF	17	-	-	M3	
		C25	HQ	MT	C/B	KR	MF, UF	19	C/B	C/B	M5	
	Aluminium	AK, AR	AH	FL	AW, AG	AL	HP	AS, AF	PM2	F	AL	
High precision bar turning (tolerance class G&E)	KF, KM	FSF, USF	GF, FF	FY, FX, FZ	UM	-GH	LF, RF, XL	-	F, SR, SS, SM	UX		



KORLOY Grades

Cat.	ISO	Grade	Range	Workpiece Application	Turning	Milling	Facing	Grooving	Threading	Parting	Index Drill	Solid Drill	Endmill	Coating layer		
CVD	P	NC3010	P05-P15	For high speed turning of steel	●		●	●			●					
		New NC3215	P10-P15	For high speed turning of general steel and forged steel	●											
		NC3220	P15-P25	For medium turning of steel	●		●	●			●					
		New NC3225	P20-P25	For universal turning of general steel and forged steel	●		●	●			●					
		NC3120	P20-P25	For medium turning of steel	●		●	●			●					
		NC3030	P25-P35	For medium to rough turning of steel	●			●			●					
		NC5330	P30-P35	For multi-purpose machining of mild steel and forged steel	●	●	●	●			●	●				
		NC500H	P25-P35	For heavy turning of steel	●						●					
		New NC5340	P30-P35	For high / medium low speed milling of turning		●	●	●			●	●				
		NCM325	P30-P40	For high speed turning of steel		●					●	●				
		New NC5350	P35-P45	For medium low / low speed milling of steel		●										
		NCM335	P35-P45	For rough and interrupted milling of steel and high speed milling of cast iron		●										
		K		NC6205	K01-K10	For high speed turning of gray cast iron and ductile cast iron	●			●						
				NC6210	K05-K15	For universal turning of gray cast iron and ductile cast iron	●		●	●			●			
				New NC6215	K10-K20	For turning of gray cast iron and ductile cast iron	●		●	●			●			
NC5330	K15-K25			For multi-purpose machining of cast iron at high speed	●	●	●	●			●	●				
M				NC9025	M25-M35	For STS turning	●									
		NC5330	M25-M35	For multi-purpose machining of STS	●	●	●	●			●	●				
		NCM325	M25-M35	For high speed milling of STS		●					●	●				
		NCM335	M30-M40	For rough and interrupted milling of STS		●										
S		NC5330	S15-S25	For multi-purpose and interrupted machining of heat-resistant alloy steel	●	●	●	●			●	●				
PVD	P	PC230	P15-P30	For finish and medium turning of steel		●					●					
		PC3500	P25-P35	For medium and rough milling of steel (1st recommended)		●	●	●	●		●					
		PC3600	P20-P30	For universal milling of steel		●										
		PC3545	P35-P45	For medium / rough milling of steel at high interruption		●										
		PC5300	P30-P40	For medium / rough milling of steel	●	●	●	●	●	●	●	●				



KORLOY Grades

Cat.	ISO	Grade	Range	Workpiece Application	Turning	Milling	Facing	Grooving	Threading	Parting	Index Drill	Solid Drill	Endmill	Coating layer		
PVD	P	New PC5335	P30-P40	For medium / rough milling of steel	●	●					●			 ★ TiAlCrN film (Lubricative)		
		New PC5400	P35-P45	For medium / rough milling of steel	●	●		●			●			 ★ TiAlCrN film (Lubricative)		
		New PC2005	P01~P10	For milling of high hardness heat-treated steel		●									 TiMeN TiAlN	
		New PC2010	P05~P15	For milling of pre hardened steel and press mold steel		●									 TiMeN TiAlN	
		New PC2015	P10~P20	For milling of carbon steel and mold making		●									 AlCrN	
		New PC210F	P10-P20	For high speed milling of general steel and alloy steel (Laser Mill)		●									 ★ New TiAlN film (High hardness / Oxidation resistance)	
		New PC3030T	P20-P30	For steel threading						●					 TiAlN	
		New PC203F	P05-P15	For high speed end milling of steel (H-max)										●	 ★ New TiAlN film (High hardness / Oxidation resistance)	
		New PC220	P20-P35	For universal end milling of steel (I-max)										●	 ★ New TiAlN film (High hardness)	
		New PC303S	P05~P15	For end milling of high hardness steel and press mold steel										●	 TiMeN TiAlN	
		New PC310U	P10~P20	For end milling of high hardness steel and press mold steel										●	 TiMeN TiAlN	
		New PC315E	P20~P35	For end milling of carbon steel and pre hardened steel										●	 AlCrN	
		New PC320	P20~P35	For medium / rough end milling										●	 TiAlN	
		New PC205F	P20~P35	For general drilling Solid drill										●	 TiAlN	
		New PC215G	P15~P30	For general drilling Solid drill										●	 TiAlN	
		New PC230F	P25~P35	For general drilling Solid drill										●	 TiAlN	
		New PC325U	P20~P35	For general drilling Solid drill										●	 TiAlCrN	
		New PC315G	P15~P30	For general drilling Solid drill										●	 TiAlCrN	
		K	New PC8110	K05-K15	For finish turning and milling of cast iron	●	●		●							 ★ New TiAlN film (High hardness / Oxidation resistance)
			New PC6510	K05-K15	For high speed milling of cast iron		●				●		●			 TiN TiAlN
	New PC5300		K20-K30	For medium-rough turning and milling of cast iron	●	●	●	●	●	●	●	●			 ★ New TiAlN film (High hardness / Oxidation resistance)	
	New PC5335		K20-K30	For medium-rough turning and milling of cast iron	●	●						●			 ★ TiAlCrN film (Lubricative)	
	New PC5400		K25-K35	For medium-rough turning and milling of cast iron	●	●				●		●			 ★ TiAlCrN film (Lubricative)	
	New PC215K		K15-K30	For medium-rough milling of cast iron		●	●	●	●	●					 ★ New TiAlN film (High hardness / Oxidation resistance)	
	New PC2005		K01~K10	For finish milling of cast iron		●									 TiMeN TiAlN	
	New PC2015		K10~K20	For universal milling of cast iron		●									 AlCrN	





KORLOY Grades

Cat.	ISO	Grade	Range	Workpiece Application	Turning	Milling	Facing	Grooving	Threading	Parting	Index Drill	Solid Drill	Endmill	Coating layer			
K	PVD	PC203F	K05-K15	For high speed end milling of cast iron (H-max)									●	★New TiAlN film (High hardness / Oxidation resistance)			
		PC220	K20-K35	For high speed end milling of cast iron (H-max)									●	★New TiAlN film (High hardness)			
		PC303S	K05~K15	For finish end milling of cast iron										●	TiMeN TiAlN		
		PC310U	K10~K20	For medium / rough end milling of cast iron										●	TiMeN TiAlN		
		PC315E	K20~K35	For universal end milling of cast iron										●	AlCrN		
		PC320	K20~K35	For universal end milling of cast iron										●	TiAlN		
		PC205F	K20-K35	For general drilling Solid drill										●	★New TiAlN film (High hardness / Oxidation resistance)		
		PC215G	K15~K30	For general drilling Solid drill										●	TiAlN		
		PC325U	K20~K35	For general drilling Solid drill										●	TiAlCrN		
		PC315G	K15~K30	For general drilling Solid drill										●	TiAlCrN		
	M	PVD	PC8110	M10-M20	For medium to finish turning of STS	●			●		●				★New TiAlN film (High hardness / Oxidation resistance)		
			PC9030	M25-M35	For medium to rough turning of STS at interruption	●		●	●		●					TiAlN	
			PC5300	M20-M30	For medium to rough turning and milling of STS	●	●	●	●	●	●	●				★New TiAlN film (High hardness / Oxidation resistance)	
			PC5335	M25-M35	For medium to rough turning and milling of STS	●	●						●			★TiAlCrN film (Lubricative)	
			PC9530	M25-M35	For medium to rough milling of STS at interruption		●						●			TiAlN	
			PC5400	M30-M40	For medium to rough turning and milling of STS	●	●			●		●				★TiAlCrN film (Lubricative)	
			PC3545	M30-M40	For rough and highly interrupted milling of STS		●									TiN TiAlN	
			PC3030T	M20-M30	For STS threading						●						TiAlN
			PC2015	M10~M20	For universal milling of STS		●										AlCrN
			PC8105	M05~M15	For finish turning of STS	●				●							TiAlN
M	PVD	PC8115	M15~M25	For medium to rough turning of STS	●			●							TiAlN		
		PC210	M15-M25	For universal end milling of STS										●	★New TiAlN film (High hardness / Oxidation resistance)		
		PC303S	M05~M15	For universal end milling of cast iron										●	TiMeN TiAlN		
		PC310U	M10~M20	For universal end milling of cast iron										●	TiMeN TiAlN		
		PC325	M15~M25	For universal end milling of cast iron										●	TiAlN		
PC315E	M20~M30	For universal end milling of cast iron										●	AlCrN				













KORLOY Grades

Cat.	ISO	Grade	Range	Workpiece Application	Turning	Milling	Facing	Grooving	Threading	Parting	Index Drill	Solid Drill	Endmill	Coating layer		
PVD	M	PC205F	M20-M30	For general drilling Solid drill								●		★New TiAlN film (High hardness / Oxidation resistance)		
		PC215G	M15~M25	For general drilling Solid drill									●		TiAlN	
		PC325U	M20~M30	For general drilling Solid drill									●		TiAlCrN	
		PC315G	M15~M25	For general drilling Solid drill									●		TiAlCrN	
	S	PC8105	S01~S10	For finish turning of heat-resistant alloy	●				●						TiAlN	
		PC8110	S05-S15	For medium to finish turning of heat-resistant alloy steel	●				●		●				★New TiAlN film (High hardness / Oxidation resistance)	
		PC8115	S10~S20	For medium to rough turning of heat-resistant alloy	●				●						TiAlN	
		PC5300	S15-S25	For medium to rough turning and milling of heat-resistant alloy steel	●	●	●	●	●	●	●	●	●	●	★New TiAlN film (High hardness / Oxidation resistance)	
		PC5335	S20-S30	For medium to rough turning and milling of heat-resistant alloy steel	●	●						●			★New TiAlN film (Lubricative)	
		PC5400	S25-S35	For medium to rough turning and milling of heat-resistant alloy steel	●	●				●		●			★New TiAlN film (Lubricative)	
		PC3545	S25-S35	For rough and highly interrupted milling of heat-resistant alloy steel		●										TiN TiAlN
		PC2015	S10~S20	For universal milling of heat-resistant alloy		●										AlCrN
		PC210	S15-S25	General E/M Cutting for Heat resistant Alloy Steel										●		★New TiAlN film (High hardness / Oxidation resistance)
		PC325	S15~S25	For universal end milling of heat-resistant alloy steel										●		TiAlN
		PC325E	S25~S35	For universal end milling of heat-resistant alloy										●		AlCrN
		PC205F	S15-S25	For universal end milling of heat-resistant alloy										●		★New TiAlN film (High hardness / Oxidation resistance)
Uncoated	P	A30	P25-P35	For general steel machining	●		●		●	●						
		K	H01	K10-K15	For finishing cast iron and non ferrous metal (aluminum, etc.)	●	●		●			●		●		
			H05	K10-K15	For finishing cast iron	●	●					●				
	N	H01	N10-N20	For finishing cast iron and non ferrous metal (aluminum, etc.)	●	●		●				●		●		
		H05	N15-N25	For medium cutting of cast iron and non ferrous metal(aluminum, etc.)	●	●							●	●		
	Cermet	P	CC1500	P01-P10	For light cutting of steel at high speed(Optimized for precise boring)	●		●	●							★TiAlCrN film (Lubricative)
CC115			P10-P20	For light cutting of steel at medium to high speed	●		●	●							TiN TiAlN	
CC125			P15-P25	For medium to rough milling of steel	●	●									TiN TiAlN	
CN1500			P05-P15	For continuous and high speed cutting	●		●	●								



KORLOY Grades

Cat.	ISO	Grade	Range	Workpiece Application	Turning	Milling	Facing	Grooving	Threading	Parting	Index Drill	Solid Drill	Endmill	Coating layer
Cermet	P	CN20	P15-P25	For general turning and milling of steel	●	●		●	●	●				
		CN2000	P10-P20	For medium to rough turning and milling of steel	●		●	●		●				
		New CN2500	P15-P25	For highly interrupted machining at high feed	●		●	●						
		CN30	P20-P30	For rough milling of steel		●								
	K	New CN1500	K05-K10	For high speed finishing of cast iron	●		●	●						
		New CN2500	K10-K20	For high speed and interrupted machining of cast iron	●		●	●						
cBN	H	DBNX10	H01-H10	For high speed and continuous cutting of heat-treated steel	●									
		DBNX20	H05-H15	For highly efficient machining of heat-treated steel	●									
		DBNX25	H15-H25	For high speed and interrupted cutting of heat-treated steel	●									
		DBN250	H15-H25	For continuous and interrupted cutting of heat-treated steel	●									
		DBN350	H25-H35	For highly interrupted cutting of heat-treated steel	●									
		New DNC100	H01-H10	For high speed and continuous cutting of heat-treated steel	●									 ★New TiAlN film (High hardness)
		DNC250	H05-H15	For high speed and continuous or low interrupted cutting of heat-treated steel	●									 TiN TiAlN
		DNC350	H15-H25	For medium to high interrupted cutting of heat-treated steel	●									 ★New TiAlN film (High hardness)
	New DNC400	H25-H35	For medium interrupted and continuous cutting of heat-treated steel	●									 TiN TiAlN	
	K	DBN500	K01-K10	For finishing of high hardness cast	●									
DBN700		K05-K15	For high speed machining of cast iron	●	●									
PCD	N	DP90	N01-N10	For machining cemented carbide, ceramics, high Si-aluminum alloy, stone and rock	●									
		DP150	N05-N15	For machining high Si-aluminum alloy, copper alloy, rubber, wood and carbon	●									
		DP200	N10-N20	For precise machining of plastic, wood and aluminum	●									
DLC	N	PD1000	N01-N20	For turning of non ferrous metal(aluminum, etc.)	●									 DLC
		PD2000	N01-N20	For milling of non ferrous metal(aluminum, etc.)		●								 DLC
		PD3000	N01-N20	For end milling of non ferrous metal(aluminum, etc.)							●			 DLC
Diamond coated	N	ND1000	N01-N20	For turning of non ferrous metal(graphite, aluminum, copper)	●									 Dia Coating
		ND2000	N01-N20	For milling of non ferrous metal(graphite, aluminum, copper)		●								 Dia Coating
		ND3000	N01-N20	For end milling of non ferrous metal(graphite, aluminum, copper)							●			 Dia Coating



The comparison of grade for turning

WC

	ISO	KORLOY	SUMITOMO	KYOCERA	ISCAR	SANDVIK	SECO	KENAMETAL	TOSHIBA	mitsubishi	HITACHI	VALENITE	WALTER	TAECUTEC	NTK	DIJET		
Turning	P	ST50E ST10P																
		ST20E MA2 ST30E A30 ST30N ST40E	ST10P ST20E				S1P SM30			TX10S TX20	ST110T ST120T	SRN5 WS20B	S1F		P10 P20			
		U10E U2 A40	U10E U2 A30 A40				H13A H10F	AT10 AT15 TTR	K2885 K2S	TU10 TU20 TU40	UTi20T	WAM10B EX35	VC6 VC5 VC56		M10 M20 M40			
Turning	K	H2 H01 H05 H10 G10E	H1 G10E															
							IC4 IC20 IC28	H1P H10F	THM THR	K68 K8735	TH03 TH10 KS20	HTi10T HTi20T	WH05 W10 WH20	VC3 VC2 VC1		K10 K20 K20M K30		

CVD Coated

	ISO	KORLOY	SUMITOMO	KYOCERA	ISCAR	SANDVIK	SECO	KENAMETAL	TOSHIBA	mitsubishi	HITACHI	VALENITE	WALTER	TAECUTEC	NTK	DIJET	
Turning	P	NC3010	AC805P	CA5505 CA510		GC4305 GC4205	TP0500 TP0501 TP1500	KCP05 KCP05B	T9105	UE6105				TT8105			
		NC3215★	AC810P AC700G AC900G	CA515 VP5115 CA5515	IC8150	GC4315 GC4215	TP2500 TGP25 T25M TP2500 TP2501 TGP35 T350M	KCP10 KCP10B	T9115	UE6110 MY5015	HG8010	VP5515	WPP10S WKP13S	TT8110 LC015P TT8115			
		NC3220 NC3225★ NC3120	AC820P AC2000	CA525 VP5125 CA5525	IC8250	GC4325 GC4225	TP3500 TGP45	KCP25 KCP25B	T9125	MC6025 UE6020	HG8025	VP5525	WPP20S WKP23S	TT8120 LC025P TT8125	CP5		JC110V JC215V
Turning	M	NC3030 NC500H NC5330	AC830P	CR9025 CA5535 CA530	IC8350	GC4235	TP3500 TGP45	KCP30 KCP30B KCP40 KCP40B	T9135	UE6035 UH6400	GM8035	VP5535	WPP30S WKP33S	TT5100 TT8135 TT7100			JC325V JC450
		NC9020 NC9025	AC610M AC630M AC6030M	CA6515 CA6525	IC6015	GC2015 GC2025	TM2000 TM4000	KCM15 KCM15M KCM25 KCM25B KCM35 KCM35B	T6120 T6130	MC7015 MC7025 US7020 US735	GM25 GX30	VP8515 VP8525	WAM10 WMP20S WAM20 WAM30	TT9215 TT9225 TT9235			
Turning	K	NC6205 NC6210 NC6215★	AC405K AC415K AC420K	CA4505 CA4010 CA4515 CA4115 CA4120	IC5005 IC5015	GC3205 GC3210 GC3215 GC3225	TK1001 TK2001 TKG1500	KCK05 KCK05B KCK15 KCK15B KCK20 KCK20B	T5105 T5115 T5125	MC5005 UC5105 MC5015 UC5115	HG3505 HG3515	VP1505 VP1510 VP1515	WKK10S WKK20S WAK30	TT7005 TT7310 TT7015 TT6300	CP2 CP5		JC105V JC110V JC215V

PVD Coated

	ISO	KORLOY	SUMITOMO	KYOCERA	ISCAR	SANDVIK	SECO	KENAMETAL	TOSHIBA	mitsubishi	HITACHI	VALENITE	WALTER	TAECUTEC	NTK	DIJET	
Turning	P	PC8110 PC230		PR1005 PR915 PR1115	IC507 IC808		CP200 CP250	KU10T KU25T	AH710 GH730			VC907 VC927					JC5003 JC5015
		PC5300 PC8115★ PC3545		PR930 PR1025 PR630 PR660	IC830 IC908 IC3028	GC1025	CP500		AH330 AH740 AH120 GH330	VP15TF VP20MF	IP2000 IP3000	VC905	WTA43 WTA41	TT5030			
		PC8110 PC8115★ PC5300★	AC510U EH510Z AC520U	PR915 PR930	IC808 IC907	GC1005 GC1105 GC1020 GC1025	CP200 CP250	KC5010 KC5510	AH330 GH330 AH120 GH730 AH140 AH630	MP9005 VP10RT	IP50S IP100S	VC929 VC927 VC902 VC901 VC905	WSM10S WSM20S WSM30S WSM40S		TT5030	ZM3 QM3 VM1 TAS	JC5003 JC5015
Turning	M	PC9030 PC5400★	AC530U	PR1125 PR630 PR660	IC830 IC830	GC2035	CP500	KC5025 KC5525	AH645	MP7035				TT8020			
		PC8105 PC8110 PC8115★ PC5300 PC5400★	AC510U AC520U	PR915 PR660 PR1325	IC808 IC907 IC3028 IC328	GC1105 GC1025 GC2035	TS2000 CP500 TS2500	KC5010 KC5025	AH110 AH120	VP05RT VP10RT VP15TF MP7035		CY110H	VC929 VC903 VC927 VC902 VC901 VC907	WSM10 WSM20 WSM30	TT5030		

CERMET

	ISO	KORLOY	SUMITOMO	KYOCERA	ISCAR	SANDVIK	SECO	KENAMETAL	TOSHIBA	mitsubishi	HITACHI	VALENITE	WALTER	TAECUTEC	NTK	DIJET
Turning	P	CC1500★ CN1500★	T110A T2000Z★ T1500A	PV30★ TN30	IC20N IC520N	CT5015	CM C15M	HT2 KT125	NS520 GT530★	NX2525 NX3035	CH350 CZ25★			PV3010★ CT3000	T3N T15 N20	LN10 CX50 CX75
		CC115★ CN2000 CN2500★ CN20	T3000Z★	PV7020★ TN60 TN620 TN6020 TN90 PV90★	IC30N IC530N	CT525 GC1525★	TP1020 TP1030★	HT5 KT175 KT195M	NS530 NS9530 GT9530★ NS540 NS730	AP25N★ AP35N★ AP25N★ NX335 MP3025★	CH530 CH550 CH570	VC83	WTA43★ WTA41★		C30 N40	CX90 CX99
		CN1500★ CN2500★	T110A												CT3000	T15

★ : PVD Coating cermet ★ : New Grade





The comparison of grade for milling

CVD Coated

ISO	KORLOY	SUMITOMO	KYOCERA	ISCAR	SANDVIK	SECO	KENAMETAL	TOSHIBA	mitsubishi	HITACHI	VALENITE	WALTER	TAEUCUTEC	NTK	DIJET	
Milling	P	NC5330 NC5340★ NCM325 NC5350★ NCM335	ACP100		IC5400	GC4210 GC4220 GC4230	MP1500 MP2500 MM4500	KCPM20 KCMP30 KC927M	T3130	FH7020 F7030		SM245	WKP25S WKP35S	TT8515 TT7800		
		M	NC5330 NC5340★ NCM325 NC5350★ NCM335				MP2500 MM4500		T3130	F7030						
			K	NC5330 NC5340★ NC5350★	ACK200		IC5100	GC3330 GC3040	MK1500 MK2000 MK3000	KC907M KCK15 KC914M KCPK30 KC917M KC924M	T1115 T1015	MC5020		WAK15 WKK25 WKP25S WKP35S	TT7515 TT6800	

PVD Coated

ISO	KORLOY	SUMITOMO	KYOCERA	ISCAR	SANDVIK	SECO	KENAMETAL	TOSHIBA	mitsubishi	HITACHI	VALENITE	WALTER	TAEUCUTEC	NTK	DIJET	
Milling	P	PC2005★ PC2010★ PC2015★ PC210F★			P20A GC1010					ATH80D PCA08M ACS05E PCA12M PC20M JX1005 TB6005 JX1020 CY9020						
		PC3600 PC3500	ACZ310		IC903 IC908 IC950	MP3000			AP20M GP20M			WKP25			JC5003	
			ACP200	PR730	IC903 IC908 IC950	F25M F30M	KC522M KUC20M	GH330	MP6120	TB6045	VC935		TT7070 TT7080 TT7030		JC5015	
			ACZ330	PR830 PR630	IC1008	GC1025 GC1030	KC525M KUC30M	AH120	VP15TF UP20M	CY250 PTH30E					QM3 ZM3	JC5030 JC5040
		PC5300	ACP300 ACZ350	PR660	IC928	GC1030	F40M T60M	KC935M KC7140 KC720	AH3135	VP30RT	JM4160 PTH40H		WKP35 WKP45	TT8020		
	M			PR730	IC903			KC5510 KC7020	AH120		JX1020 CY9020 JX1015 TB6020 CY250				QM3 ZM3	JC5003
		PC5300	ACM100 ACP200		IC900	GC1125 GC1025 GC2030 GC1030	F25M	KC522M KC725M KC735M KC7030		MP7130		VC928 VC902 VC901		TT9030		JC5015
		PC9530	ACM300 ACP300 ACZ350	PR630 PR660 PR1535	IC250 IC928	GC1030	F30M	KC7030	AH140	JX1045 TB6045		WQM35 WSM35S WSP45 WSM45S	TT9080		JC5030 JC5040	
	K	PC5400★ PC3545		PR660	IC328		F40M	KC722	AH3135	MP7140	JX1060 TB6060			TT8020		
		PC8110★ PC6510		PR510 PR905	DT7150 IC900 IC910 IC950 IC350		MK2050	KC510M KC915M		VP10MF VP15TF		VC903 VC928		TT6290		JC5003
S	PC5300			IC328 IC950 IC350			KC520M	AH120	VP20RT		VC902 VC901		TT6030 TT6060		JC5015	
	PC5300 PC5400★	AC520U	PR620 PR660 PR1535	IC408	GC1025 GC1040 S40T	F40M MS2050	KC510M KCU30M		VP15TF VP30RT MP9130	ACS05E		WSM35S WSM45S	TT9030 TT8020 TT8080			

CERMET

ISO	KORLOY	SUMITOMO	KYOCERA	ISCAR	SANDVIK	SECO	KENAMETAL	TOSHIBA	mitsubishi	HITACHI	VALENITE	WALTER	TAEUCUTEC	NTK	DIJET
Milling	P	CN2000 CN20 CN30	T250A	TN100M TC60M	IC30N		KT195M	NS540 NS740	NX2525 NX4545	CH550 CH570			CT3000 CT7000	C50	
		M	T250A			CT530									
	K								NX2525						

★ : PVD Coating cermet ★ : New Grade





**OLD-FASHIONED
PRODUCT INFORMATION**



Old-fashioned product information

M02 Grade

M02 External Holder

M03 Fine Tool

M03 Threading Tool

M03 Mill-Max

M04 Cen-Mill

M04 Jip Drill

M04 LPD / SPD / NPD

M

OLD-FASHIONED
PRODUCT
INFORMATION

M Old-fashioned product information

Grade

ISO material code		Old grade	New grade
Coating grade	P	NC310	NC3010
		NC320, NC3020, NC3120	NC3220
		NC330	NC3030
	M	PC3530, PC3525, PC3535, PC3500	PC3600
	K	NC305K, NC6105	NC6205
		NC6110	NC6205, NC6210
	S	PC8010	PC8110
P, M, K, S	PC8520, PC215K	PC5300	
Cermet		PC225F	PC205F
		CN1000	CN1500
		CT10, CN200	CN2000

- Korloy always study and develops cutting-edge technology tools and grades which covers higher speed and feed conditions
- Korloy guarantees better performance and wide stock-management range for the new grade

External holder

Designation	Insert	Old parts name						New holder	Page
		Lever	Screw	Shim	Shim pin	Wrench	Shim pin Wrench		
PCBNR□□□□-□19	CN**1906	LV6	VHX1027	SC63	SP6	HW40L	-	PCBNR□□□□-□19N	B104
PCBNR□□□□-□25	CN**2509	LV8	VHX1236	SC83	SP8	HW50L	-	PCBNR□□□□-□25N	
PCLNR□□□□-□19	CN**1906	LV6	VHX1027	SC63	SP6	HW40L	-	PCLNR□□□□-□19N	B105
PCLNR□□□□-□25	CN**2509	LV8	VHX1236	SC83	SP8	HW50L	-	PCLNR□□□□-□25N	
PSBNR□□□□-□19	SN**1906	LV6	VHX1027	SS63	SP6	HW40L	-	PSBNR□□□□-□19N	B108
PSBNR□□□□-□25	SN**2507	LV8	VHX1236	SS83	SP8	HW50L	-	PSBNR□□□□-□25N	
PSDNN□□□□-□19	SN**1906	LV6	VHX1027	SS63	SP6	HW40L	-	PSDNN□□□□-□19N	B108
PSDNN□□□□-□25	SN**2507	LV8	VHX1236	SS83	SP8	HW50L	-	PSDNN□□□□-□25N	
PSKNR□□□□-□19	SN**1906	LV6	VHX1027	SS63	SP6	HW40L	-	PSKNR□□□□-□19N	B109
PSKNR□□□□-□25	SN**2507	LV8	VHX1236	SS83	SP8	HW50L	-	PSKNR□□□□-□25N	
PSSNR□□□□-□19	SN**1906	LV6	VHX1027	SS63	SP6	HW40L	-	PSSNR□□□□-□19N	B109
PSSNR□□□□-□25	SN**2507	LV8	VHX1236	SS83	SP8	HW50L	-	PSSNR□□□□-□25N	

- Old parts are not interchangeable with new type holder part
- Good performance and convenient use of New type holder gives customer best quality of service

Designation	Insert	Old parts name				New holder	Page
		Wedge clamp	Screw	Washer	Others		
WTENN□□□□-□16 (Old Type:MTEEN)	TN**1604	CMH5R1	MHX0523	WA4	Same as before	WTEEN□□□□-□16	B112
WTJNR□□□□-□16 (Old Type:MTJNR)	TN**1604	CMH5R1	MHX0523	WA4	Same as before	WTJNR□□□□-□16	B112
WTXNR□□□□-□16 (Old Type:MTXNR)	TN**1604	CMH5R1	MHX0523	WA4	Same as before	WTXNR□□□□-□16	B112

- Old parts are not interchangeable with new type holder part
- Good performance and convenient use of New type holder gives customer best quality of service



Fine tool

Designation	Insert		Old parts name		New holder	Page
			Screw	Wrench		
FTIH	FTIH08****	FTG08, FTT08, FTF08	PTKA02508	TW08P	NFTIH	C52
	FTIH11****	FTG11, FTT11, FTF11	PTKA03510	TW15P		
	FTIH14****	FTG14, FTT14, FTF14	PTKA0412	TW15P		
	FTIH16****	FTG16, FTT16, FTF16	PTKA0512	TW20P		

- Old inserts and parts are not interchangeable with new fine tool
- Good performance and convenient use of new fine tool gives customer best quality of service

Threading tool

Designation	Insert		Old parts name						New holder	Page
			Clamp	Clamp screw	Shim	Screw	C-ring	Wrench		
ETH	~ETH3**R	ECTR3***	CH5R3	CHX0513	ST32C1	SHX0310	CR04	HW20L,HW25L	ER(L)H**	D31
	~ETH4**R	ECTR4***	CH6R4	CHX0621	ST42C1	SHX0310	CR05	HW20L,HW30L		
ITH	~ITH2**R	ICTR2***	CH5R3	CHX0513	ST32C1	FTKA02565	CR04	TW07P	IR(L)H**	D32
	~ITH3**R	ICTR3***	CH5R3	CHX0513	ST32C1	SHX0310	CR04	TW15P,HW20L,HW25L		
	~ITH4**R	ICTR4***	CH6R4	CHX0621	ST42C1	SHX0310	CR05	HW20L,HW30L		

- Old inserts and parts are not interchangeable with threading holders
- Good performance and convenient use of new fine tool gives customer best quality of service

Mill-Max

Designation	Insert	Old parts name					New cutter	Page
		Locator	Wedge	Wedge screw	Locator screw	Wrench		
AD(ADM)4000	SD**1203	LAS4R/L	WASR/L	WTX0817	LTX0512	TW25	ADN(ADNM)4000	E34
AD(ADM)5000	SD**1504	LAS5R/L	WASR/L	WTX0817	LTX0512	TW25	ADN(ADNM)5000+	E35
EP(EPM)4000	SP**1203	LES4R/L LES4R1/L1(Ø80 ~ Ø100)	WESR/L	WTX0817 WTX0813((Ø80 ~ Ø100)	LTX0512	TW25	EPN(EPNM)4000	E40
EP(EPM)5000	SP**1504	LES5R/L LES5R1/L1(Ø80 ~ Ø100)	WESR/L	WTX0817 WTX0813((Ø80 ~ Ø100)	LTX0512	TW25	EPN(EPNM)5000+	E41
PP(PPM)4000	TP**2204	LPT4R/L LPT4R1/L1(Ø80 ~ Ø100)	WESR/L	WTX0817 WTX0813((Ø80 ~ Ø100)	LTX0512	TW25	PPN(PPNM)4000	E43

- Parts are not interchangeable with new mill-max cutters
- Good performance and convenient use of new mill-max gives customer best quality of service

M Old-fashioned product information

▶ Cen-Mill

Designation	Insert		Old parts name		New product	Page
			Screw	Wrench		
HE	Ø25	MCMT080308EN ZCMT080308ER	FTNA0307	TW09P	AMS****M	E137~E138
	Ø32, 40, 50	MCMT09T308EN ZCMT09T308ER	FTNA0408	TW15P		
LE(LEM)	LOCX1205ZZ		FTNB0411	TW15P	AMC****M	E124~E126
SE	Ø25	MPMT090308	FTNA0408	TW15L	AMS****MH	E139
	Ø32, 40	MPMT120408	FTNA0513	TW20L		
TM	MIT100 MET150,200,300,400		FTNA0408 FTNA0513(TM950용)	TW15L TW20L(TM950용)	TMS(I)	D49
PM	EDCW1604ZDF/TR		FTNA0513	TW20L	RM4Z	E83~E84
CE (Code changed)	SPG(M)N1203**				CE45-****R-S32 (New code)	E256~E258

- Old inserts and parts are not interchangeable with new milling product
- New product : Alpha mill which has unique alpha-curve edge guarantees wide range machining and good performance.
- Good performance and convenient use of new milling tool gives customer best quality of service

▶ Jip Drill

Designation	Insert		Old parts name		New indexable drill	Page
			Screw	Wrench		
JD	~JD200	WCMT030208-C20	FTKA02565	TW07P	K□D (KING-DRILL)	G12~G20
	~JD250	WCMT040208-C20				
	~JD300	WCMT050308-C20	FTNA0307	TW09P		
	~JD410	WCMT06T308-C20	FTGA03508			
	~JD580	WCMT080408-C20	FTNA0408	TW15P		

- Old inserts and parts are not interchangeable with new indexable drill
- Good performance and convenient use of new indexable drill gives customer best quality of service

▶ LPD / SPD / NPD

Designation	Insert		Old parts name		New indexable drill	Page
			Screw	Wrench		
LPD	~ LPD135	LPMT040203-DF	FTNA0204	TW06P	K□D (KING-DRILL)	G12~G20
SPD	~ SPD155	SPM(E)T050203-DM, DF, DS, DA	FTNA0204	TW06P		
	~ SPD195	SPM(E)T060204-DM, DS, DR, DA	FTKA02206S	TW07S		
	~ SPD225	SPM(E)T070204-DM, DS, DR, DA	FTKA02565	TW07S		
NPD	~ NPD245	NPM(E)T222408-DM, DS, DR, DA	FTKA02565	TW07S		
	~ NPD285	NPM(E)T252808-DM, DS, DR, DA	FTKA0307	TW09S		
	~ NPD325	NPM(E)T293208-DM, DS, DR, DA	FTKA0307	TW09S		
	~ NPD405	NPM(E)T334008-DM, DS, DR, DA	FTKA03508	TW15S		
	~ NPD505	NPM(E)T415008-DM, DS, DR, DA	FTKA0410	TW15S		
	~ NPD605	NPM(E)T516012-DM, DS, DR, DA	FTNC04511	TW20S		

- Old inserts and parts are not interchangeable with new indexable drill
- Good performance and convenient use of new indexable drill gives customer best quality of service










N

INDEX

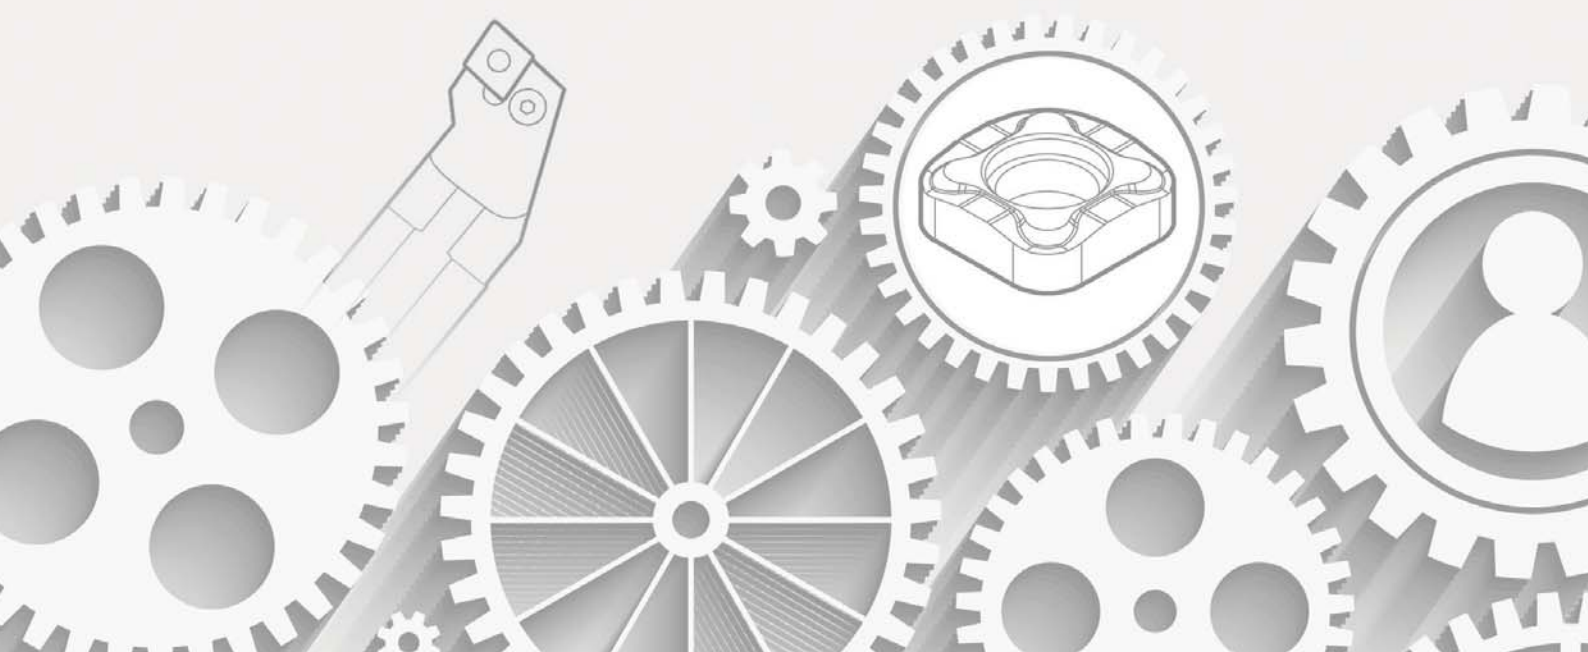

N Index by items

A

A+ Endmill	Endmills	F82
Actual Designations of Milling Cutter and Arbor	Milling	E318
Aero Mill	Milling	E105
Aero Mill Mini	Milling	E108
Aero Mill Plus	Milling	E106
Alpha Mill	Milling	E116
Aluminum Insert (Positive)	Turning	B79
American ACME	Threading	D24
American Buttress (ABUT)	Threading	D28
American UN	Threading	D16
Angular Head Series	Tooling System	I 52
API Buttress Casing (BUT)	Threading	D30
API Round Casing & Tubing (APIRD)	Threading	D30
Application Example	Multi functional Tools	C02
Application range of KORLOY Main Chip Breakers	Turning	B02
Auto Tool Bits	Brazed Tools	H09
Auto Tools (Blade Type)	Turning	B188
Auto Tools (ISO Type)	Turning	B183
Auto Tools (KGT / MGT Type)	Turning	B194
Auto Tools (MSB Tool)	Turning	B197
Auto Tools (Multi Utility Type)	Turning	B191
Available Insert	Drills	G04
Available Insert for Indexable Reamer	Drills	G91
Available Insert for KGT	Multi functional Tools	C12
Available Insert for MGT	Multi functional Tools	C24
Available Insert for MGT Aluminum Wheel	Multi functional Tools	C38
Available Insert for New Fine Tools	Multi functional Tools	C51
Available Insert for TB-M/TB	Multi functional Tools	C45
Aviation Industrial Solution	Tooling System	J14

B

Balancing System	Tooling System	I 04
Bearing Solution	Multi functional Tools	C57
Bearing working Solution	Tooling System	J12
BFE	Milling	E242
Bits for Construction	Brazed Tools	H12
Block	Tooling System	J26
Boring Bar Code System (ISO)	Turning	B132
Boring Crown Blank	Brazed Tools	H12
Brake	Tooling System	J22
Brazed Endmill	Endmills	F95
BRE	Milling	E246
British Buttress (BBUT)	Threading	D28

B

British Standard Pipe Thread	Threading	D22
Broach Reamer	Drills	G99
BT Tooling System (Modular)	Milling	E158
BT Tooling System (Multi edge)	Milling	E150
BT Tooling System (Single edge)	Milling	E144
Burnishing Drill	Drills	G79

C

Carbide Drill	Drills	G77
Carbide Shank Boring Bar	Turning	B151
Cartridge Code System (ISO)	Turning	B169
Cartridge (Parts)	Parts	K03
cBN grades	Grades & Chip Breakers	A32
cBN Insert	Turning	B87
Cemented Carbide Blank for Cross Bits	Brazed Tools	H12
Cemented Carbide Blank for Taper Bits	Brazed Tools	H11
Cemented Carbide, Cermet Blank	Brazed Tools	H03
Cen-Mill	Old-Fashioned Product Information	M04
Center Drill	Drills	G42
Ceramic Holder	Turning	B130
Cermet grades	Grades & Chip Breakers	A15
Cermet Reamer	Drills	G98
Chamfer Tool	Milling	E253
Chip Breaker for Drilling	Grades & Chip Breakers	A43
Chip Breaker for Milling	Grades & Chip Breakers	A41
Chip Breaker for Turning	Grades & Chip Breakers	A38
Chip Breaker (Parts)	Parts	K03
Chip Cover	Parts	K03
Chuck Jaw	Brazed Tools	H10
Chucking / Machine Reamer	Drills	G94
Clamp On System (Boring Bar)	Turning	B141
Clamp On System (Cartridge)	Turning	B171
Clamp On System (Holder)	Turning	B114
Clamp (Parts)	Parts	K03
C-Max	Endmills	F86
Coated Cermet grades	Grades & Chip Breakers	A18
Collet Chuck Series	Tooling System	I 22
Compact Mini	Turning	B150
Connecting Rod	Tooling System	J24
Coolant Bolt	Parts	K04
Corrosion & Magnetism Proof Grade : IN-Series	Brazed Tools	H02
CPM Series	Tooling System	I 17
Crankshaft	Tooling System	J19



C

CVD coated grades (Milling)	Grades & Chip Breakers	A21
CVD coated grades (Turning)	Grades & Chip Breakers	A04

D

DAMPING PRO	Tooling System	I 77
DBC	Tooling System	I 68
DBH	Multi functional Tools	C46
DBT Series	Tooling System	I 02
DCS/DC/TC	Tooling System	I 21
Development Industrial Solution	Tooling System	J13
DHE Series	Tooling System	I 06
Diamond coated grades	Grades & Chip Breakers	A31
D-Max	Endmills	F91
Double Clamp System (Boring Bar)	Turning	B136
Double Clamp System (Holder)	Turning	B99
Double Mill	Milling	E47
DSC Series	Tooling System	I 09
DSK Series	Tooling System	I 33
DST Series	Tooling System	I 39
DTN Series	Tooling System	I 42

E

EH	Multi functional Tools	C49
Endmill Code System	Endmills	F02
EXT Bar	Tooling System	I 75
External Holder	Old-Fashioned Product Information	M02
External Holder	Threading	D31
External Tool Holder Code System (ISO)	Turning	B93
Extreme Line Casing (EL)	Threading	D30

F

F Endmill	Endmills	F68
Face Mill Arbor Series	Tooling System	I 48
FBB	Tooling System	I 67
FBH Series	Tooling System	I 60
Features of Double Clamp/Lever Lock System	Turning	B98
Fine Tool	Old-Fashioned Product Information	M03
FMR P-positive	Milling	E199
Future Mill	Milling	E175

G

GBE	Milling	E243
Gear Cutter	Milling	E323
Gear Cutter Order Form	Milling	E331
Gear Cutter Table	Milling	E322
Gear Machining Solution	Tooling System	J02
GERC	Tooling System	I 36
GFIK	Multi functional Tools	C48
GFIP	Multi functional Tools	C47
GFT	Multi functional Tools	C47
GH	Multi functional Tools	C48
Grade	Old-Fashioned Product Information	M02
Grades system	Grades & Chip Breakers	A02
GSK Series	Tooling System	I 31
Gun Drill	Drills	G86

H

H Endmill	Endmills	F16
Hardness calculating table	Technical Information	L08
HAVE (Single edge / Multi edge)	Milling	E249
Head	Tooling System	J28
Helix Blank	Brazed Tools	H07
High feed Cutter	Milling	E307
H-MAX	Endmills	F11
HPS Series	Tooling System	I 29
HRM	Milling	E223
HRMDouble	Milling	E213
HSK Tooling System	Tooling System	I 03
HSK Tooling System	Turning	B159
HSK Tooling System (Modular)	Milling	E159
HSK Tooling System (Multi edge)	Milling	E154
HSK Tooling System (Single edge)	Milling	E280
HSK Tooling System (Single edge)	Milling	E147

I

I+ Endmill	Endmills	F54
IGH	Multi functional Tools	C46
I-MAX	Endmills	F26
Index for Boring Bar assembly	Turning	B133
Index for Cartridge	Turning	B170
Index for External Holder	Turning	B94
Index for HSK / KM Tooling System	Turning	B158

N Index by items

I J

Indexable HOB	Milling	E332
Indexable HOB Order Form	Milling	E333
Indexable Reamer	Drills	G92
Instruction of Boring Bar	Turning	B135
Instruction of External Holder	Turning	B97
Internal Holder	Threading	D32
ISO Metric	Threading	D12
Jip Drill	Old-Fashioned Product Information	M04

K

KGT Blade for Parting off	Multi functional Tools	C22
KGT Holder	Multi functional Tools	C14
KING DRILL	Drills	G12
KING DRILL (for through coolant system with a lathe)	Drills	G22
KING DRILLI for large diameter drilling	Drills	G26
KM Tooling System	Turning	B165
KMB	Tooling System	I 69
Knuckle	Tooling System	J20
KORLOY Cutters	Milling	E24
KORLOY Endmills	Endmills	F04
KORLOY Grades	Technical Information	L37
KORLOY Modular Adaptors	Milling	E33
KORLOY Shanks	Milling	E30
KORLOY Ultra-Fine Grades : F-Series	Brazed Tools	H02
KRLOY Drills	Drills	G02

L

Laser Mill	Milling	E238
Lever Lock System (Boring Bar)	Turning	B138
Lever Lock System (Holder)	Turning	B104
Lever (Parts)	Parts	K04
Locator	Parts	K05
LPD / SPD / NPD	Old-Fashioned Product Information	M04

M

Mach Drill	Drills	G56
Mach Drill plus	Drills	G47
Mach long Drill	Drills	G71
Mach long Drillplus	Drills	G66

M

Mach step Drills Order Form	Drills	G72
Metric Buttress (SAGE) / API	Threading	D29
MGT Aluminum Wheel	Multi functional Tools	C39
MGT Cartridge	Multi functional Tools	C34
MGT Holder	Multi functional Tools	C26
MGT Holder (Face Grooving)	Multi functional Tools	C31
MGT Special Order Form for MGT	Multi functional Tools	C64
Micro Endmill	Endmills	F70
Milling Cermet grades	Grades & Chip Breakers	A27
Milling grade selections	Grades & Chip Breakers	A20
Milling Insert Code System (ISO)	Milling	E02
Milling Inserts	Milling	E04
Mill-Max	Old-Fashioned Product Information	M03
Mill-max / Mill-max Plus	Milling	E34
Modular Adaptor	Milling	E281
Modular Arbor	Tooling System	I 73
Modular System	Tooling System	I 72
Morse Taper Arbor Series	Tooling System	I 51
Multi Lock System (Boring Bar)	Turning	B142
Multi Lock System (Holder)	Turning	B116
Multi Turn	Multi functional Tools	C55

N

O

National Pipe Thread	Threading	D22
National Pipe Thread-Dry seal	Threading	D23
New Chip Breakers	Turning	B12
New Fine Tools	Multi functional Tools	C52
Nozzle	Parts	K07
NPM Series	Tooling System	I 19
NPU	Tooling System	I 41
Nut	Parts	K05
O-Ring Cutter	Milling	E251
Others	Tooling System	I 84

P

Partial Profile 55°	Threading	D11
Partial Profile 60°	Threading	D10
PCD Drill	Drills	G81
PCD Endmill	Endmills	F93
PCD Face Cutter	Milling	E110
PCD grades	Grades & Chip Breakers	A37



P

PCD Insert	Turning	B91
PCD Reamer	Drills	G97
PH	Multi functional Tools	C49
Pin	Parts	K05
Pipe Industrial Solution	Tooling System	J10
Power Buster	Milling	E52
Pro-A Mill	Milling	E269
Pro-L Mill	Milling	E277
Properties of Korloy grades	Technical Information	L09
Pro-X Mill	Milling	E272
PVD coated grades (Milling)	Grades & Chip Breakers	A23
PVD coated grades (Turning)	Grades & Chip Breakers	A11

R

Railway Industrial Solution	Tooling System	J08
RDC Bar	Tooling System	I 76
Recommended Chip Breakers for workpiece	Turning	B04
Rich Mill-RM3	Milling	E66
Rich Mill-RM4	Milling	E70
Rich Mill-RM8	Milling	E85
Rich Mill-RM16	Milling	E100
Ring Blank	Brazed Tools	H06
Role Machining Solution	Tooling System	J07
Rotating Brazing Tool	Brazed Tools	H13
Round bar Blank	Brazed Tools	H06
Round DIN 405	Threading	D23

S

S+ Endmill	Endmills	F76
Save Turn (Boring Bar)	Turning	B180
Save Turn (Holder)	Turning	B177
Save Turn (Insert)	Turning	B176
Saw-man	Multi functional Tools	C42
Screw	Parts	K05
Screw On System (Boring Bar)	Turning	B144
Screw On System (Cartridge)	Turning	B173
Screw On System (Holder)	Turning	B123
SDC Series	Tooling System	I 23
Shave Mill	Milling	E315
Shave Mill Ultra	Milling	E316
Shim	Parts	K02

S

Shim Pin	Parts	K06
Ship Building Industrial Solution	Tooling System	J04
SI unit conversion table	Technical Information	L07
Side Cutter	Milling	E289
Side Lock Arbor Series	Tooling System	I 46
Side Milling Cutter	Milling	E285
Sleeve	Turning	B203
Slitter Knife	Tooling System	J18
SMB	Tooling System	I 70
SMH	Tooling System	I 71
Solid Drills grade selections	Grades & Chip Breakers	A30
Solid Endmill for Aluminum	Endmills	F78
Solid Endmills for Hard-to-cut material	Endmills	F73
Solid Endmills grade selections	Grades & Chip Breakers	A28
Solid Threading Endmills	Threading	D51
Special Boring Tool Order Form	Milling	E334
Special Endmill Order Form	Endmills	F100
Special Order Form for Bearing Inserts	Multi functional Tools	C63
Special Order Form for V-Pulley Insert	Multi functional Tools	C65
Special Rotating Brazing Tools Order Form	Brazed Tools	H14
Spring	Parts	K07
Square Bits	Brazed Tools	H08
Square Blank	Brazed Tools	H04
Steel, Non-ferrous metal symbol list	Technical Information	L06
Stop Ring	Parts	K07
Stopper	Parts	K07
Stub ACME	Threading	D25

T

Tank Mill	Milling	E228
TBC / FBC Series	Tooling System	I 64
TBH	Multi functional Tools	C45
TCA Tap Adaptor	Tooling System	I 44
T-Cutter	Milling	E261
Technical Info. for Stainless steel	Technical Information	L10
Technical Information for	Threading	D50
Technical Information for A+ Endmill	Endmills	F80
Technical Information for Aero Mill	Milling	E102
Technical Information for Aero Mill Mini	Milling	E104
Technical Information for Aero Mill Plus	Milling	E103
Technical Information for Alpha Mill	Milling	E111
Technical Information for Auto Tools	Turning	B182
Technical Information for Bearing Solution	Multi functional Tools	C56

T

Technical Information for Brazed Endmill	Endmills	F94
Technical Information for BRE	Milling	E237
Technical Information for BT / HSK Tooling System	Milling	E143
Technical Information for Carbide Drill	Drills	G76
Technical Information for C-Max	Endmills	F85
Technical Information for Couple Mill	Milling	E305
Technical Information for Cube Mill	Milling	E304
Technical Information for D-Max	Endmills	F89
Technical Information for Drills	Technical Information	L30
Technical Information for Endmills	Technical Information	L27
Technical Information for F Endmill	Endmills	F66
Technical Information for FMR P-positive	Milling	E170
Technical Information for Future Mill	Milling	E160
Technical Information for GBE	Milling	E234
Technical Information for Gear Cutter Tools	Milling	E321
Technical Information for Gun Drill	Drills	G82
Technical Information for H Endmill	Endmills	F13
Technical Information for HAVE	Milling	E247
Technical Information for High feed Cutter	Milling	E298
Technical Information for H-MAX	Endmills	F08
Technical Information for HRMDouble	Milling	E208
Technical Information for HSK	Turning	B156
Technical Information for I+ Endmill	Endmills	F51
Technical Information for I-MAX	Endmills	F21
Technical Information for Indexable Reamer	Drills	G88
Technical Information for KGT	Multi functional Tools	C07
Technical Information for KING DRILL	Drills	G06
<i>Technical Information for KING DRILL (for large diameter drilling)</i>	Drills	G25
Technical Information for Laser Mill	Milling	E229
Technical Information for Mach Drill	Drills	G52
Technical Information for Mach Drillplus	Drills	G45
Technical Information for Mach long Drill	Drills	G69
Technical Information for Mach long Drill plus	Drills	G64
Technical Information for MGT	Multi functional Tools	C23
Technical Information for MGT	Multi functional Tools	C37
Technical Information for Micro Endmill	Endmills	F69
Technical Information for Milling	Technical Information	L20
<i>Technical Information for Multi Functional Tools Series</i>	Multi functional Tools	C04
Technical Information for Multi Turn	Multi functional Tools	C53

T

Technical Information for New Fine Tools	Multi functional Tools	C50
Technical Information for PCD Endmill	Endmills	F92
Technical Information for Power Buster	Milling	E49
Technical Information for Pro-A Mill	Milling	E262
Technical Information for Pro-L Mill	Milling	E266
Technical Information for Pro-X Mill	Milling	E264
Technical Information for Rich Mill	Milling	E54
Technical Information for S+ Endmill	Endmills	F74
Technical Information for Save Turn	Turning	B175
Technical Information for Saw-man	Multi functional Tools	C41
Technical Information for Shave Mill	Milling	E301
Technical Information for Shave Mill Ultra	Milling	E303
Technical Information for Side Milling Cutters	Milling	E283
<i>Technical Information for Solid Endmill for Aluminum</i>	Endmills	F77
<i>Technical Information for Solid Endmill for Hard-to-cut material</i>	Endmills	F71
Technical Information for Storm Mill	Milling	E300
Technical Information for Tapers	Technical Information	L24
Technical Information for TB-M/TB	Multi functional Tools	C44
Technical Information for Thread Milling	Threading	D34
Technical Information for Threading	Threading	D03
Technical Information for TPDB	Drills	G32
Technical Information for TPDC	Drills	G27
Technical Information for Turning	Technical Information	L12
Technical Information for V Endmill	Endmills	F18
Technical Information for Vulcan Drill	Drills	G73
Technical Information for WPDC	Drills	G39
Technical Information for Z Endmill	Endmills	F44
Technical Information KM Tooling System	Turning	B157
<i>Technical information of KING DRILL (for through coolant system with a lathe)</i>	Drills	G21
TER Tap Collet	Tooling System	I 45
The Comparison of Grade for Milling	Technical Information	L43
The Comparison of Grade for Turning	Technical Information	L42
The Comparison of Chip Breakers	Technical Information	L36
Thread Milling Holder	Threading	D49
Thread Milling Inserts	Threading	D44
Threading Holder Code System	Threading	D02
Threading Insert Code System	Threading	D02
Threading Insert with Chip Breaker	Threading	D09
Threading Tool	Old-Fashioned Product Information	M03

T

Tooling System Index	Tooling System	I 05
Top solid Drill	Drills	G80
TPDB	Drills	G36
TPDB Available Znoseert	Drills	G35
TPDC	Drills	G31
TPDC Available Insert	Drills	G30
Trapez DIN 103	Threading	D24
Turbo Mill	Milling	E44
Turning grade selections	Grades & Chip Breakers	A03
Turning Insert (Negative)	Turning	B20
Turning Insert (Positive)	Turning	B55
Turning Insert Code System (ISO)	Turning	B18

Z

Z Endmill	Endmills	F47
------------------	----------	------------

T

Ultra fine grain cemented carbide	Grades & Chip Breakers	A29
Uncoated Carbide grades	Grades & Chip Breakers	A13
Uncoated Carbide grades	Grades & Chip Breakers	A26
UNJ (Unified Constant Thread)	Threading	D26

V

V Endmill	Endmills	F20
Vertical Type Holder	Threading	D33
Vulcan Drill	Drills	G74

W

Washer	Parts	K07
Wedge Clamp System(Holder)	Turning	B112
Wind Mill	Milling	E294
With Worth	Threading	D18
Workpiece material grades	Technical Information	L02
WPDC	Drills	G43
Wrench	Parts	K07
Wrench Bolt	Parts	K04

N Index by designation

A

AD(ADM)4000	Mill Max	M03
AD(ADM)5000	Mill Max	M03
ADKA	Milling insert	E04
ADLT	Milling insert (Tank Mill)	E04
ADN(M)4000	Mill Max	E34
ADN(M)5000+	Mill Max Plus	E35, 41
ADS4000	Turbo Mill	E44
ADS5000	Turbo Mill	E45
AE(M)4000	Mill Max	E36
AE(M)5000	Mill Max	E37
AFO(M)4000	Double Mill	E47
AFO(M)5000	Double Mill	E48
AMC(M)1000S	Alpha Mill	E116
AMC(M)1000SE	Alpha Mill	E122
AMC(M)1500S	Alpha Mill	E117
AMC(M)2000M	Alpha Mill	E124
AMC(M)2000S	Alpha Mill	E118
AMC(M)2000SE	Alpha Mill	E122
AMC(M)3000M	Alpha Mill	E125
AMC(M)3000S	Alpha Mill	E119
AMC(M)3000SE	Alpha Mill	E123
AMC(M)3000S-K	Alpha Mill	E120
AMC(M)4000M	Alpha Mill	E126
AMC(M)4000S	Alpha Mill	E121
AMM1000	Alpha Mill	E140
AMM1500	Alpha Mill	E141
AMM2000	Alpha Mill	E142
AMS1000/1500M	Alpha Mill	E137
AMS1000MH	Alpha Mill	E139
AMS1000S	Alpha Mill	E127
AMS1000SE	Alpha Mill	E135
AMS1500MH	Alpha Mill	E139
AMS1500S	Alpha Mill	E128
AMS2000/4000M	Alpha Mill	E138
AMS2000MH	Alpha Mill	E139
AMS2000S	Alpha Mill	E130
AMS2000SE	Alpha Mill	E135
AMS3000MH	Alpha Mill	E139
AMS3000S	Alpha Mill	E131
AMS3000SE	Alpha Mill	E136
AMS3000S-K	Alpha Mill	E132
AMS4000S	Alpha Mill	E133
ANH4000	High feed Cutter	E307
ANH5000	High feed Cutter	E308
APBE2000	A+ Endmill (Ball type)	F84

A

APD(M)-A	Aero Mill	E105
APD(M)-PB	Aero Mill-Plus	E107
APD(M)-PB	Aero Mill-Plus	E108
APFE2000	A+ Endmill (Flat type)	F82
APFE3000	A+ Endmill (Flat type)	F82
APFT-X22	Milling Insert (Alpha Mill)	E04
APKT	Milling Insert (Alpha Mill)	E04
APKT-MA	Milling Insert (Alpha Mill)	E04
APKT-MA2	Milling Insert (Alpha Mill)	E04
APKT-MA3	Milling Insert (Alpha Mill)	E04
APKT-MF	Milling Insert (Alpha Mill)	E04
APKT-MM	Milling Insert (Alpha Mill)	E04
APKT-MM1	Milling Insert (Alpha Mill)	E04
APKT-X22	Milling Insert (Alpha Mill)	E04
APKT-X23	Milling Insert (Alpha Mill)	E05
APKT-X24	Milling Insert (Alpha Mill)	E05
APLFE2000	A+ Endmill (Long Flat type)	F83
APLFE3000	A+ Endmill (Long Flat type)	F83
APLT	Milling Insert (Tank Mill)	E05
APMT-MA	Milling Insert (Alpha Mill)	E05
APMT-MF	Milling Insert (Alpha Mill)	E05
APMT-ML	Milling Insert (Alpha Mill)	E05
APMT-MM	Milling Insert (Alpha Mill)	E05
APRE3000	A+ Endmill (Roughing type)	F84

B

BAMPR/L-XAF	Milling Insert (Aero Mill)	E06
BAMPR/L-XAW	Milling Insert (Aero Mill)	E06
BAMPR/L-XAWR	Milling Insert (Aero Mill)	E06
BDS	Burnishing Drill	G79
BDT	Step Burnishing Drill	G79
BE2000(Long Ball)	I-Max (Long Ball type)	F42
BE2000(Ball)	I-Max (Ball type)	F41
BE2000-T	I-Max (Taper Ball type)	F42~43
BE4000(Ball)	I-Max (Ball type)	F41
BF	Multi functional tools insert (Grooving Tools)	C47
BFE	BFE	E242
BLK	Tooling System (Blank Tool)	I 84
BRE	BRE	E246
BT	Brazed Tools (Boring Crown Blank)	H12
BT30	BT Tooling System (Modular)	E158
BT30 AM1000	BT Tooling System (Multi edge)	E150



B

BT30 AM1000HS	BT Tooling System (Single edge)	E144
BT30 AM1500	BT Tooling System (Multi edge)	E150
BT30 AM2000	BT Tooling System (Multi edge)	E151
BT40	BT Tooling System (Modular)	E158
BT40 AM1000	BT Tooling System (Multi edge)	E150
BT40 AM1500	BT Tooling System (Multi edge)	E150
BT40 AM1500HS	BT Tooling System (Single edge)	E144
BT40 AM2000	BT Tooling System (Multi edge)	E151
BT40 AM2000HS	BT Tooling System (Single edge)	E145
BT50	BT Tooling System (Modular)	E158
BT50 AM3000	BT Tooling System (Multi edge)	E152
BT50 AM3000HS	BT Tooling System (Single edge)	E146
BT50 AM4000	BT Tooling System (Multi edge)	E152
BT50 AM4000HS	BT Tooling System (Single edge)	E146
BT50 HAT4000	BT Tooling System (Multi edge)	E153

C

CBE2000	C-Max (Ball type)	F87
CBNE2000	C-Max (Long Neck Ball type)	F87
CCET	Turning Insert_Positive (Carbide Shank Boring Bar)	B55
CCET-KF	Auto tools Insert (ISO type)	B186
CCET-KF	Auto tools Insert (ISO type)	B55, 186
CCET-KM	Auto tools Insert (ISO type)	B186
CCET-KM	Auto tools Insert (ISO type)	B55, 186
CCGT-AK	Aluminum Insert_Positive (Screw on System)	B80
CCGT-AR	Aluminum Insert_Positive (Screw on System)	B80
CCGT-C05	Turning Insert_Positive (Screw on System)	B56
CCGT-HFP	Turning Insert_Positive (Screw on System)	B56
CCGT-KF	Turning Insert_Positive (Screw on System)	B56
CCGT-KM	Turning Insert_Positive (Screw on System)	B57
CCGT-VP1	Auto tools Insert (ISO type)	B186
CCGT-VP1	Turning Insert_Positive (Screw on System)	B56
CCGT-VP1	Turning Insert_Positive (Screw on System)	B57
CCLNR/L	Insert for Ceramic Holder	B130
CCMT	PCD Insert_Positive	B91
CCMT-C25	Turning Insert_Positive (Screw on System)	B58
CCMT-HFP	Turning Insert_Positive (Screw on System)	B57
CCMT-HMP	Turning Insert_Positive (Screw on System)	B58
CCMT-MP	Turning Insert_Positive (Screw on System)	B58
CCMT-VF	Turning Insert_Positive (Screw on System)	B57
CCMT-VL	Turning Insert_Positive (Screw on System)	B58
CCMW	cBN Insert_Positive (Regrinding)	B90
CCT	Solid Chamfer Tool	E260

C

CD	Drill Insert (Center Drill)	G42
CDEW-NAF	Milling Insert (Aero Mill)	E06
CDEW-NAW	Milling Insert (Aero Mill)	E06
CDEW-XAF	Milling Insert (Aero Mill)	E07
CDEW-XAW	Milling Insert (Aero Mill)	E07
CDEW-XCF	Milling Insert (Aero Mill)	E07
CDH	Drill Insert (Center Drill)	G42
CDH4000	High feed Cutter	E309
CDH5000	High feed Cutter	E310
CE	Chamfer Tool (Back & Front Chamfer)	E256
CE	Chamfer Tool (Long Chamfer)	E257
CE	Multi-functional Chamfer Tool	E258
CET	Solid Chamfer Tool	E259
CFE2000	C-Max (Flat type)	F86
CFNE2000	C-Max (Long Neck Flat type)	F86
CJ	Brazed Tools (Chuck jaws)	H10
CKFNR/L...RW	Bearing Solution	C60
CKGNR...RW	Bearing Solution	C60
CKJNR/L	Holder (Clamp on System)	B114
CKNNR/L	Holder (Clamp on System)	B114
CKUNR/L	Boring Bar (Clamp on System)	B141
CMSNR/L...B	Bearing Solution	C57
CMSNR/L...F	Bearing Solution	C57
CNGG-VP1	Turning Insert_Negative (Multi Lock / Lever Lock System)	B20
CNHQ	Milling Insert (Side milling cutter_Tangential type)	E07
CNMA	cBN Insert_Negative(Regrinding)	B90
CNMA	Turning Insert_Negative (Multi Lock / Lever Lock System)	B20
CNMG-B25	Turning Insert_Negative (Multi Lock / Lever Lock System)	B23
CNMG-GM	Turning Insert_Negative (Multi Lock / Lever Lock System)	B21
CNMG-GR	Turning Insert_Negative (Multi Lock / Lever Lock System)	B23
CNMG-GS	Turning Insert_Negative (Multi Lock / Lever Lock System)	B23
CNMG-HA	Turning Insert_Negative (Multi Lock / Lever Lock System)	B21
CNMG-HC	Turning Insert_Negative (Multi Lock / Lever Lock System)	B21
CNMG-HM	Turning Insert_SAVE TURN	B176
CNMG-HR	Turning Insert_Negative (Multi Lock / Lever Lock System)	B24
CNMG-HS	Turning Insert_Negative (Multi Lock / Lever Lock System)	B22
CNMG-LP	Turning Insert_Negative (Multi Lock / Lever Lock System)	B21
CNMG-LW	Turning Insert_Negative (Multi Lock / Lever Lock System)	B22
CNMG-MP	Turning Insert_Negative (Multi Lock / Lever Lock System)	B22
CNMG-MP	Turning Insert_SAVE TURN	B176
CNMG-VB	Turning Insert_Negative (Multi Lock / Lever Lock System)	B20
CNMG-VC	Turning Insert_Negative (Multi Lock / Lever Lock System)	B21
CNMG-VF	Turning Insert_Negative (Multi Lock / Lever Lock System)	B20
CNMG-VG	Turning Insert_Negative (Multi Lock / Lever Lock System)	B20
CNMG-VK	Turning Insert_Negative (Multi Lock / Lever Lock System)	B23

N Index by designation

C

CNMG-VL	Turning Insert_Negative (Multi Lock / Lever Lock System)	B20
CNMG-VM	Turning Insert_Negative (Multi Lock / Lever Lock System)	B22
CNMG-VP2	Turning Insert_Negative (Multi Lock / Lever Lock System)	B21
CNMG-VP3	Turning Insert_Negative (Multi Lock / Lever Lock System)	B22
CNMG-VQ	Turning Insert_Negative (Multi Lock / Lever Lock System)	B21
CNMG-VQ	Turning Insert_SAVE TURN	B176
CNMG-VR	Turning Insert_Negative (Multi Lock / Lever Lock System)	B24
CNMG-VW	Turning Insert_Negative (Multi Lock / Lever Lock System)	B21
CNMM	PCD Insert_Negative/Positive	B91
CNMM-GH	Turning Insert_Negative (Multi Lock / Lever Lock System)	B25
CNMM-GM	Turning Insert_Negative (Lever Lock System)	B24
CNMM-GR	Turning Insert_Negative (Lever Lock System)	B24
CNMM-HA	Turning Insert_Negative (Lever Lock System)	B24
CNMM-VH	Turning Insert_Negative (Lever Lock System)	B25
CNMM-VT	Turning Insert_Negative (Lever Lock System)	B25
CNMX	PCD Insert_Negative/Positive	B91
CPGT	Turning Insert_Positive (Screw on System)	B59
CPGT-C05	Turning Insert_Positive (Screw on System)	B59
CPGT-HMP	Turning Insert_Positive (Screw on System)	B59
CPM	Tooling System (CPM)	I 18
CPMH	Milling Insert (T-Cutter)	E07
CPMT	Milling Insert (T-Cutter)	E07
CPMT	PCD Insert_Negative/Positive	B91
CPMT-VF	Turning Insert_Positive (Screw on System)	B59
CRDNN	Insert for Ceramic Holder	B130
CRE2000	C-Max (Radius type)	F88
CRGNR/L	Insert for Ceramic Holder	B130
CRNE2000	C-Max (Long Neck Radius type)	F88
CSBNR/L...BS	Bearing Solution	C61
CSDNN	Insert for Ceramic Holder	B130
CSDPN	Holder (Clamp on System)	B114
CSGNR/L...RW	Bearing Solution	C60
CSKNR/L	Insert for Ceramic Holder	B131
CSKNR/L...BS	Bearing Solution	C61
CSKPR/L	Boring Bar (Clamp on System)	B141
CSKPR/L	Cartridge (Clamp on System)	B171
CSKPR/L	Holder (Clamp on System)	B115
CSKPR/L...B	Bearing Solution	C59
CTFNR/L	Insert for Ceramic Holder	B131
CTFPR/L	Boring Bar (Clamp on System)	B141
CTFPR/L	Cartridge (Clamp on System)	B171
CTFPR/L	Holder (Clamp on System)	B115
CTGNR/L	Insert for Ceramic Holder	B131
CTGNR/L...BS	Bearing Solution	C61
CTGPR/L	Holder (Clamp on System)	B115

C

CTSPR/L	Cartridge (Clamp on System)	B171
CTTPR/L	Cartridge (Clamp on System)	B172
CTWPR/L	Cartridge (Clamp on System)	B172

D

DB	Multi functional Insert (Grooving Tools)	C46
DBC	Tooling System (DBC)	I 68
DBE2000	D-Max (Ball type)	F91
DBH	Multi functional holder (Grooving Tools)	C46
DC	Multi functional Insert (Grooving Tools)	C46
DCBNR/L	Holder (Double clamp system)	B99
DCET-KF	Auto tools Insert (ISO type)	B186
DCET-KF	Turning Insert_Positive (Screw on System)	B60
DCET-KM	Auto tools Insert (ISO type)	B186
DCET-KM	Turning Insert_Positive (Screw on System)	B60
DCGT-AK	Turning Insert_Positive (Screw on System)	B81
DCGT-AR	Turning Insert_Positive (Screw on System)	B81
DCGT-C05	Turning Insert_Positive (Screw on System)	B60
DCGT-HFP	Turning Insert_Positive (Screw on System)	B60
DCGT-KF	Turning Insert_Positive (Screw on System)	B61
DCGT-KM	Turning Insert_Positive (Screw on System)	B61
DCGT-VP1	Auto tools Insert (ISO type)	B186
DCGT-VP1	Turning Insert_Positive (Screw on System)	B61
DCGT-VP1	Turning Insert_Positive (Screw on System)	B61
DCGW	cBN Insert_Positive (Regrinding)	B90
DCKNR/L	Holder (Double clamp system)	B99
DCLNR/L	Boring Bar (Double clamp system)	B136
DCLNR/L	Holder (Double clamp system)	B99
DCLNR/L	HSK Tooling System	B159, 163
DCLNR/L	KM Tooling System	B163
DCLNR/L	KM Tooling System	B165
DCMNN	HSK Tooling System	B159
DCMNN	KM Tooling System	B165
DCMT	PCD Insert_Negative/Positive	B91
DCMT-C25	Turning Insert_Positive (Screw on System)	B62
DCMT-HFP	Turning Insert_Positive (Screw on System)	B62
DCMT-HMP	Turning Insert_Positive (Screw on System)	B62
DCMT-MP	Turning Insert_Positive (Screw on System)	B62
DCMT-VF	Turning Insert_Positive (Screw on System)	B62
DCMT-VL	Turning Insert_Positive (Screw on System)	B62
DDJNR/L	Holder (Double clamp system)	B100
DDJNR/L	HSK Tooling System	B159
DDJNR/L	KM Tooling System	B165



D

DDNNN	HSK Tooling System	B159
DDNNN	KM Tooling System	B166
DDUNR/L	Boring Bar (Double clamp system)	B136
DEH5000	High feed Cutter	E311
DF	Side Cutter	E293
DFE2000	D-Max (Flat type)	F91
DNGG-VP1	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B26
DNMA	cBN Insert_Negative (Regrinding)	B90
DNMA	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B26
DNMG-B25	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B30
DNMG-GM	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B28
DNMG-GR	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B30
DNMG-GS	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B30
DNMG-HA	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B27
DNMG-HC	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B27
DNMG-HM	Turning Insert_SAVE TURN	B176
DNMG-HR	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B31
DNMG-HS	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B29
DNMG-LP	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B27
DNMG-LW	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B29
DNMG-MP	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B28
DNMG-MP	Turning Insert_SAVE TURN	B176
DNMG-VB	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B26
DNMG-VC	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B28
DNMG-VF	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B26
DNMG-VG	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B26
DNMG-VK	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B30
DNMG-VL	Turning Insert_Negative (Multi Lock / Lever Lock, HSKTooling System)	B27
DNMG-VM	Turning Insert_Negative (Multi Lock/Lever Lock, HSKTooling System)	B29
DNMG-VP2	Turning Insert_Negative (Multi Lock/Lever Lock, HSKTooling System)	B28
DNMG-VP3	Turning Insert_Negative (Multi Lock/Lever Lock, HSKTooling System)	B29
DNMG-VQ	Turning Insert_Negative (Multi Lock/Lever Lock, HSKTooling System)	B28
DNMG-VQ	Turning Insert_SAVE TURN	B176
DNMG-VR	Turning Insert_Negative (Multi Lock/Lever Lock, HSKTooling System)	B31
DNMG-VW	Turning Insert_Negative (Multi Lock/Lever Lock, HSKTooling System)	B27
DNMM	PCD Insert_Negative	B91
DNMX	PCD Insert_Negative	B91
DNMX-SH	Turning Insert_Negative (Multi Lock/Lever Lock, HSKTooling System)	B31
DPH5000	High feed Cutter	E312
DRE2000	Endmill (D-Max Radius type)	F91
DSBNR/L	Holder (Double clamp system)	B100
DSC	Tooling System (DSC series)	I 10~16
DSDNN	Holder (Double clamp system)	B101
DSK	Tooling System (DSK series)	I 34~35
DSKNR/L	Boring Bar (Double clamp system)	B136

D

DSKNR/L	Holder (Double clamp system)	B101
DSSNR/L	Holder (Double clamp system)	B101
DTFNR/L	Boring Bar (Double clamp system)	B137
DTFNR/L	Holder (Double clamp system)	B102
DTGNR/L	Holder (Double clamp system)	B102
DTN	Tooling System (DTN series)	I 43
DVJNR/L	Holder (Double clamp system)	B102
DVVNN	Holder (Double clamp system)	B103
DWLNRL	Boring Bar (Double clamp system)	B137
DWLNRL	Holder (Double clamp system)	B103

E

EF(M)4000	Mill-max	E38
EH	Parting off Tools	C49
EN(M)4000	Mill-max	E39
EP(M)4000/5000	Mill-max	M03
EPN(M)4000	Mill-max	E40
EPN(M)5000+	Mill-max Plus	E41
ER	Tooling System (ER Collet)	I 37
ER(L)	Thread Insert	D10~31
ER(L)H	Thread External Holder (Screw on System)	D31
ER(L)H-C	Thread External Holder (Clamp on System)	D31
ERM	Thread Insert	D10~13
ESB	Parting off Tools (Inserts)	C49
ETH	Threading tool	M03
EV2525R/L-105-3	HSK Tooling System	B164
EV2525R/L-112	HSK Tooling System	B164
EV2525R/L-115	HSK Tooling System	B164
EXT	Tooling System (Extension Bar)	I 75

F

FBB	Tooling System (FBB Bite)	I 67
FBC	Tooling System (FBC)	I 65
FBH	Tooling System (FBH series)	I 61~63
FC	Full Side Cutter	E289
FE2000(Long Flat)	I-Max (Long Flat type)	F38
FE2000(Flat)	I-Max (Flat type)	F36
FE2000-T	I-Max (Taper Flat type)	F39
FE3000(Flat)	I-Max (Flat type)	F36
FE4000(Long Flat)	I-Max (Long Flat type)	F38

N Index by designation

F

FE4000(Flat)	I-Max (Flat type)	F37
FGD	MGT Insert	C24
FGHH	MGT Holder (Face Grooving)	C32
FGM	MGT Insert	C24
FGVH	MGT Holder (Face Grooving)	C33
FMA	Tooling System (FMA series)	I 48~50
FMAC(M)3000	Future Mill	E175
FMAC(M)3000-A	Future Mill (Aluminum body)	E177
FMAC(M)4000	Future Mill	E176
FMAC(M)4000-A	Future Mill (Aluminum body)	E178
FMAS3000	Future Mill	E179
FMAS4000	Future Mill	E180
FME4000	F-Endmill (Standard type)	F68
FMLE4000	F-Endmill (F-Endmill Long type)	F68
FMM	MGT Insert	C24
FMPC(M)3000	Future Mill	E181
FMPC(M)3000-A	Future Mill (Aluminum body)	E183
FMPC(M)4000	Future Mill	E182
FMPC(M)4000-A	Future Mill (Aluminum body)	E184
FMPS3000	Future Mill	E185
FMPS4000	Future Mill	E186
FMRC(M)3000	Future Mill	E187
FMRC(M)4000	Future Mill	E188
FMRC(M)4000	Future Mill_P-Positive	E200
FMRC(M)5000	Future Mill	E189
FMRC(M)5000	Future Mill_P-Positive	E201
FMRC(M)6000	Future Mill	E190
FMRC(M)6000	Future Mill_P-Positive	E202
FMRCM3000	Future Mill_P-Positive	E199
FMRM1000	Future Mill	E197
FMRM1500	Future Mill	E197
FMRM2000	Future Mill	E197
FMRM2500	Future Mill	E197
FMRM2500	Future Mill_P-Positive	E207
FMRM3000	Future Mill	E198
FMRM3000	Future Mill_P-Positive	E207
FMRM4000	Future Mill	E198
FMRM4000	Future Mill_P-Positive	E207
FMRM5000	Future Mill	E198
FMRM5000	Future Mill_P-Positive	E207
FMRS1000	Future Mill	E191
FMRS1500	Future Mill	E191
FMRS2000	Future Mill	E192
FMRS2500	Future Mill	E192
FMRS2500	Future Mill_P-Positive	E203

F

FMRS3000	Future Mill	E193
FMRS3000	Future Mill_P-Positive	E204
FMRS4000	Future Mill	E194
FMRS4000	Future Mill_P-Positive	E205
FMRS5000	Future Mill	E195
FMRS5000	Future Mill_P-Positive	E206
FMRS6000	Future Mill	E196
FMRS6000	Future Mill_P-Positive	E206
FTIH	Fine Tool	M03

G

GBE	GBE (Single edge type)	E243
GBEM	GBE (Modular type)	E245
GBE-M	GBE (Multi edge type)	E244
GERC	Tooling System (GERC Collet)	I 37
GFIK	Multi functional (Grooving Tools)	C48
GFIP	Multi functional (Grooving Tools)	C47
GFT	Multi functional (Grooving Tools)	C47
GH	Multi functional Insert (Grooving Tools)	C48
GO	Multi functional Insert (Grooving Tools)	C48
GR	Multi functional Insert (Grooving Tools)	C48
GS	Multi functional Insert (Grooving Tools)	C48
GSK	Tooling System (GSK series)	I 31~32
GST	Tooling System (GST series)	I 40~41
GW	Multi functional Insert (Grooving Tools)	C47

H

HAVE	HAVE (Multi Edge)	E249
HAVE	HAVE (Single Edge)	E250
HBRE	Broach Reamer	G99
HC	Half Side Cutter	E290
HC	Tooling System (HC Slim Collet)	I 37
HE	Cen-Mill	M04
HECN	Milling Insert (High feed Cutter)	E07
HPBE2000	H-Max (Ball type)	F11
HPBE2000L	H-Max (Long ball type)	F11
HPBE2000T	H-Max (Taper Ball type)	F11
HPEN	Milling Insert (High feed Cutter)	E07
HPEN-WC	Milling Insert (High feed Cutter)	E07
HPRE2000	H-Max (Radius type)	F12
HPRE2000T	H-Max (Taper Radius type)	F12



H

HPRE4000	H-Max (Radius type)	F12
HPRE4000T	H-Max (Taper Radius type)	F12
HPS	Tooling System (HPS series)	I 29~30
HRAG	Tooling System (Angular Head Series)	I 55
HRMC(M)13/15	HRM	E223
HRMDC(M)09	HRMDouble	E213
HRMDC(M)13	HRMDouble	E214
HRMDC(M)16	HRMDouble	E215
HRMDM 06	HRMDouble	E221
HRMDM 09/13	HRMDouble	E222
HRMDS06	HRMDouble	E216
HRMDS09	HRMDouble	E217
HRMDS09	HRMDouble	E218
HRMDS13	HRMDouble	E219
HRMM08/10/13	HRM	E227
HRMS 08/10	HRM	E224
HRMS 13	HRM	E225
HRMS 15	HRM	E226
HSK100A	HSKTooling System (Modular)	E159
HSK100A AM3000	HSKTooling System (Multi edge)	E156
HSK100A AM4000	HSKTooling System (Multi edge)	E157
HSK63A	HSKTooling System (Modular)	E159
HSK63A AM1000	HSKTooling System (Multi edge)	E154
HSK63A AM1000HS	HSKTooling System (Single edge)	E147
HSK63A AM1500	HSKTooling System (Multi edge)	E154
HSK63A AM1500HS	HSKTooling System (Single edge)	E147
HSK63A AM2000	HSKTooling System (Multi edge)	E155
HSK63A AM2000HS	HSKTooling System (Single edge)	E148
HSK63A AM3000HS	HSKTooling System (Single edge)	E149
HSK63A AM4000HS	HSKTooling System (Single edge)	E149
HSK63A/100A PAX5000	HSKTooling System (Single edge)	E280
HT	Tooling System (Other)	I 84

I

IBE2000	I-Max (Ball type)	F31
IBE2000	I-Max (Long Ball type)	F32
IBE2000-T	I-Max (Taper Ball type)	F32
IBE4000	I-Max (Ball type)	F31
IFE2000	I-Max (Flat type)	F26
IFE2000	I-Max (Long Flat type)	F28
IFE2000-T	I-Max (Taper Flat type)	F29~30
IFE3000	I-Max (Flat type)	F26
IFE4000	I-Max (Flat type)	F27

I

J

IFE4000	I-Max (Long Flat type)	F28
IFSE3000	Solid Endmills for Hard-to-cut material (Flat type)	F73
IG	Multi functional Insert (Grooving Tools)	C46
IGH	Multi functional Insert (Grooving Tools)	C46
IPBE2000	I+ Endmill (Ball type)	F58
IPBE4000	I+ Endmill (Ball type)	F60
IPFE2000	I+ Endmill (Flat type)	F54
IPLBE2000	I+ Endmill (Long Ball type)	F59
IPLFE2000	I+ Endmill (Long Flat type)	F55
IPLFE4000	I+ Endmill (Long Flat type)	F57
IPLRE2000	I+ Endmill (Long Radius type)	F63
IPLRE4000	I+ Endmill (Long Radius type)	F65
IPPE4000	I+ Endmill (Flat type)	F56
IPRE2000	I+ Endmill (Radius type)	F61~62
IPRE4000	I+ Endmill (Radius type)	F64
IR(L)	Thread Insert	D10~32
IR(L)H	Thread Internal Holder (Screw on System)	D32
IR(L)H-C	Thread Internal Holder (Clamp on System)	D32
IRB	Indexable Reamer (Stuffed hole)	G93
IRE2000	I-Max (Radius type)	F34
IRE4000	I-Max (Radius type)	F35
IRM	Thread Insert	D10~11
IRT	Indexable Reamer (Throughout hole)	G92
ITH	Threading tool	M03
JD	Jip drill	M04

K

K2D	KING DRILL(for through coolant system with a lathe)-2D	G22
K2D	KING DRILL(for large diameter drilling)-2D	G26
K2D	KING DRILL-2D	G12~13
K3D	KING DRILL(for through coolant system with a lathe)-3D	G23
K3D	KING DRILL(for large diameter drilling)-3D	G26
K3D	KING DRILL-3D	G14~16
K3D*	KING DRILL(for machining a tap foundation hole)-3D	G14~15
K4D	KING DRILL(for through coolant system with a lathe)-4D	G24
K4D	KING DRILL(for large diameter drilling)-4D	G26
K4D	KING DRILL-4D	G17~18
K5D	KING DRILL-5D	G19~20
KAC	Tooling System (Angular Head Series)	I 59
KAG	Tooling System (Angular Head Series)	I 57
KAH	Tooling System (Angular Head Series)	I 58
KCP	Tooling System (Other)	I 85
KCR	Cermet Reamer	G98

N Index by designation

K

KDP-BT-FMA	Tooling System (DAMPING PRO)	I 79
KDP-BT-FMC	Tooling System (DAMPING PRO)	I 80
KDP-HSK-FMA	Tooling System (DAMPING PRO)	I 81
KDP-HSK-FMC	Tooling System (DAMPING PRO)	I 82
KDP-SK-FMC	Tooling System (DAMPING PRO)	I 83
KGDS	Gun Drill (Single Lip type)	G86
KGDT	Gun Drill (Twin Lip type)	G87
KGEHR/L	Multi functional (KGT Holder)	C14
KGEHR/L-D00A	Multi functional (Auto tools Holder)	C16
KGEHR/L-D00A	Auto tools (KGT type)	B195
KGEHR/L-T00	Multi functional (KGT Holder)	C16
KGEUR/L	Multi functional (KGT Holder)	C18
KGEVR/L-T00	Multi functional (KGT Holder)	C17
KGFR/L	Multi functional (KGT Holder)	C19
KGFR/L	Multi functional (KGT Holder)	C18
KGGN-A	Multi functional Insert (KGT series)	C13
KGGN-B	Multi functional Insert (KGT series)	C13
KGGN-R	Multi functional Insert (KGT series)	C13
KGIUR/L	Multi functional (KGT Holder)	C20
KGIVR/L	Multi functional (KGT Holder)	C21
KGMI-T	Multi functional Insert (KGT series)	C12
KGML-LP	Multi functional Insert (KGT series)	C13
KGML-RP	Multi functional Insert (KGT series)	C13
KGMN-L	Auto tools Insert (KGT type)	B195
KGMN-L	Multi functional Insert (KGT series)	C12
KGMN-R	Auto tools Insert (KGT type)	B195
KGMN-R	Multi functional Insert (KGT series)	C12
KGMN-T	Auto tools Insert (KGT type)	B195
KGMN-T	Multi functional Insert (KGT series)	C12
KGMR-LP	Auto tools Insert (KGT type)	B195
KGMR-LP	Multi functional Insert (KGT series)	C12
KGMR-RP	Auto tools Insert (KGT type)	B195
KGMR-RP	Multi functional Insert (KGT series)	C12
KGTB	KGT Blade for Parting off	C22
KHU	Tooling System (Angular Head Series)	I 56
KMB	Tooling System (KMB)	I 69
KM-DCLNR/L	KM Tooling System	B168
KNUX-11	Turning Insert_Negative (Clamp on System)	B32
KNUX-12	Turning Insert_Negative (Clamp on System)	B32
KRGN-A	Multi functional Insert (KGT series)	C13
KRMN-C	Multi functional Insert (KGT series)	C12

L

LBE08/10/12/16/20/25/30/32	Laser Mill (Carbide Shank-Ball, Corner R type)	E238
LBE08/10/12/16/20/25/30/32	Laser Mill (Steel Shank-Ball, Corner R type)	E239
LBE12/16/20/25/30/32	Laser Mill (Steel Shank-Ball, Corner R type)	E239
LBE-MHD	Laser Mill (Modular type)	E241
LBH	Milling Insert (Laser Mill)	E07
LBH-KF	Milling Insert (Laser Mill)	E07
LBH-KH	Milling Insert (Laser Mill)	E08
LBS	Milling Insert (Laser Mill)	E08
LCF	Milling Insert (Laser Mill)	E08
LE(M)	Cen-Mill	M04
LFH	Milling Insert (Laser Mill)	E08
LNCS	Milling Insert (Laser Mill)	E09
LNE	Milling Insert	E09
LNEX-MA	Milling Insert (Rich Mill)	E09
LNEX-MF	Milling Insert (Rich Mill)	E09
LNEX-MM	Milling Insert (Rich Mill)	E09
LNMX-MF	Milling Insert (Rich Mill)	E09
LNMX-MM	Milling Insert (Rich Mill)	E09
LPD	LPD	M04
LPMT-DF	Drill Insert	G04
LR	Milling Insert (Laser Mill)	E08
LRE10/12	Laser Mill (Steel Shank-Corner R type)	E240
LRE10/12/16/20/25/30/32	Laser Mill (Carbide Shank-Ball, Corner R type)	E240
LRE12/16/25/30/32	Laser Mill (Steel Shank, Corner R type)	E241
LRH	Milling Insert (Laser Mill)	E08
LXET-MA	Milling Insert (Pro-L Mill)	E10
LXET-ML	Milling Insert (Pro-L Mill)	E10

M

MAH	Tooling System (Angular Head Series)	I 54
MAPD000HR/L-Z0	Aero Mill-Mini	E109
MAPDS000HR/L-Z0	Aero Mill-Mini	E109
MAT	Modular Adaptor (Steel Shank)	E281
MAT-C	Modular Adaptor (Carbide Shank)	E282
MBBR	Auto tools (MSB Tools_Back Boring)	B200
MBCR	Auto tools (MSB Tools_Copying)	B199
MBFR	Auto tools ((MSB Tools_Chamfering)	B200
MBR	Auto tools ((MSB Tools_Boring)	B199
MCER/L	HSK Tooling System (Cartridge)	B162
MCER/L	KM Tooling System (Cartridge)	B168
MCER/L	Multi functional (MGT Cartridge)	C36
MCFR/L	HSK Tooling System	B162
MCFR/L	HSK Tooling System (Cartridge)	B163



M

MCFR/L	Multi functional (MGT Cartridge)	C36
MCHR/L	HSK Tooling System	B162
MCHR/L	KM Tooling System	B167
MCHR/L	Multi functional (MGT Holder)	C35
MCKNR/L	Holder (Multi Lock System)	B116
MCLNR/L	Boring Bar (Multi Lock System)	B142
MCLNR/L	Holder (Multi Lock System)	B116
MCMNN	Holder (Multi Lock System)	B116
MCRNR/L	Holder (Multi Lock System)	B117
MCVR/L	Multi functional (MGT Holder)	C35
MD	Tooling System (Modular System)	I 73~74
MDJNR/L	Holder (Multi Lock System)	B117
MDNNN	Holder (Multi Lock System)	B117
MDQNR/L	Holder (Multi Lock System)	B118
MDUNR/L	Boring Bar (Multi Lock System)	B142
MFMN	Multi functional Insert (MGT Cartridge, MGT)	C24
MGEHR/L	Auto tools (MGT type)	B196
MGEHR/L	Multi functional (MGT for Aluminum Wheel)	C39
MGEHR/L	Multi functional (MGT Holder)	C26
MGEHR/L-15	Multi functional (MGT for Aluminum Wheel)	C39
MGEUR/L	Multi functional (MGT Holder)	C27
MGEVR/L	Multi functional (MGT Holder)	C28
MGEXR/L	Multi functional (MGT for Aluminum Wheel)	C40
MGFHR/L	Multi functional (MGT Holder)	C31
MGFR	Auto tools (MSB Tools_Face Grooving)	B202
MGFR	Auto tools (MSB Tools_Face Grooving)	B202
MGFVR/L	Multi functional (MGT Holder)	C31
MGGN-A	Multi functional Insert (MGT Cartridge, MGT)	C25
MGGN-M	Multi functional Insert (MGT Cartridge, MGT)	C24
MGIUR/L	Multi functional (MGT Holder)	C29
MGIUR/L-MR	Multi functional (MGT for Aluminum Wheel)	C39
MGIUR/L-MV	Multi functional (MGT for Aluminum Wheel)	C40
MGIVR/L	Multi functional (MGT Holder)	C30
MGIXR/L-MR	Multi functional (MGT for Aluminum Wheel)	C40
MGMN	Auto tools Insert (MGT type)	B196
MGMN-G	Multi functional Insert (MGT Cartridge, MGT)	C24
MGMN-L	Multi functional Insert (MGT Cartridge, MGT)	C25
MGMN-M	Multi functional Insert (MGT Cartridge, MGT)	C24
MGMN-R	Multi functional Insert (MGT Cartridge, MGT)	C25
MGMN-T	Multi functional Insert (MGT Cartridge, MGT)	C25
MGMR/L-PS	Multi functional Insert (MGT Cartridge, MGT)	C25
MGMR/L-PT	Multi functional Insert (MGT Cartridge, MGT)	C25
MGR	Auto tools (MSB Tools_Square Grooving)	B201
MGRR	Auto tools (MSB Tools_Round Grooving)	B202
MGRR	Auto tools (MSB Tools_Round Grooving)	B202

M

MLD	Mach long Drill	G71
MLD	Mach long Drill Plus	G66~68
MLDP	Mach long Drill(Pilot Drills with oil hole for MLD)	G71
MPMT	Milling Insert	E10
MRGN-A	Multi functional (MGT for Aluminum Wheel)	C38
MRGN-A	Multi functional Insert (MGT Cartridge, MGT)	C25
MRMN-M	Multi functional Insert (MGT Cartridge, MGT)	C25
MSBE2000	Endmill (Micro Endmills Ball type)	F70
MSBNR/L	Holder (Multi Lock System)	B118
MSD	Mach Drill	G56~59
MSDH	Mach Drill (Oil hole type)	G60~63
MSDNN	Holder (Multi Lock System)	B118
MSDP(H)	Mach Drill Plus	G47~51
MSE2000	Endmill (Micro Endmills Flat type)	F70
MSKNR/L	Boring Bar (Multi Lock System)	B142
MSKNR/L	Holder (Multi Lock System)	B119
MSRNR/L	Holder (Multi Lock System)	B119
MSSNR/L	Holder (Multi Lock System)	B120
MT	Multi functional (Multi Turn)	C55
MTA	Tooling System (MTA)	I 51
MTENN	Holder (Multi Lock System)	B120
MTFNR/L	Boring Bar (Multi Lock System)	B143
MTFNR/L	Holder (Multi Lock System)	B120
MTGNR/L	Holder (Multi Lock System)	B121
MTJNR/L	Holder (Multi Lock System)	B121
MTR	Auto tools (MSB Tools_Threading)	B203
MTR	Auto tools (MSB Tools_Threading)	B203
MVGN	Multi functional Insert (MGT for Aluminum Wheel)	C38
MVJNR/L	Holder (Multi Lock System)	B121
MVQNR/L	Holder (Multi Lock System)	B122
MVUNR/L	Boring Bar (Multi Lock System)	B143
MVVNN	Holder (Multi Lock System)	B122
MWLN/L	Boring Bar (Multi Lock System)	B143
MWLN/L	Holder (Multi Lock System)	B122

N

NFTFR/L	Multi functional Insert (New Fine Tools)	C52
NFTGR/L	Multi functional Insert (New Fine Tools)	C51
NFTIH	Multi functional (New Fine Tools Holder)	C52
NFTTR/L	Multi functional Insert (New Fine Tools)	C51
NPD	NPD	M04
NPET-DA	Drill Insert	G04
NPET-DR	Drill Insert	G04

N Index by designation

N

NPM	Tooling System (NPM series)	I 20~21
NPMT-DM	Drill Insert	G04
NPMT-DS	Drill Insert	G04
NU-CCGW	cBN Insert_Positive (Multi-Corner Type)	B88
NU-CNGA	cBN Insert_Negative (Multi-Corner Type)	B87
NU-CNMA	cBN Insert_Negative (One-Use Type)	B87
NU-DCGW	cBN Insert_Positive (Multi-Corner Type)	B88
NU-DNGA	cBN Insert_Negative (Multi-Corner Type)	B87
NU-SNGA	cBN Insert_Negative/Positive (Multi-Corner Type)	B87
NU-TCGW	cBN Insert_Positive (One-Use Type)	B88
NU-TNGA	cBN Insert_Negative/Positive (Multi-Corner Type)	B87
NU-TPGB	cBN Insert_Positive (Multi-Corner Type)	B89
NU-TPGN	cBN Insert_Positive (Multi-Corner Type)	B89
NU-TPGW	cBN Insert_Positive (Multi-Corner Type)	B89
NU-VBGW	cBN Insert_Positive (Multi-Corner Type)	B89
NU-VCGW	cBN Insert_Positive (Multi-Corner Type)	B89
NU-VNGA	cBN Insert_Negative/Positive (Multi-Corner Type)	B87

O

OFCN	Milling Insert (Double Mill)	E10
OFCW	Milling Insert (Double Mill)	E10
OFKR-MA	Milling Insert (Double Mill)	E10
OFKR-MF	Milling Insert (Double Mill)	E10
OFKR-MM	Milling Insert (Double Mill)	E11
OFKT-MA	Milling Insert (Double Mill)	E11
OFKT-MF	Milling Insert (Double Mill)	E11
OFKT-MM	Milling Insert (Double Mill)	E11
ONHX-MA	Milling Insert (Rich Mill)	E11
ONHX-MF	Milling Insert (Rich Mill)	E11
ONHX-ML	Milling Insert (Rich Mill)	E11
ONHX-MM	Milling Insert (Rich Mill)	E11
ONHX-W	Milling Insert (Rich Mill)	E11
ONMX-MF	Milling Insert (Rich Mill)	E11
ONMX-MM	Milling Insert (Rich Mill)	E11
ORC	O-Ring Cutter	E252
ORG	Milling Insert (O-Ring Cutter)	E11

P

PAC(M)2000	Pro-A Mill	E269
PAC(M)4000	Pro-A Mill	E269
PALCM	Pro-A Mill	E277
PALS(Multi edge)	Pro-A Mill	E279
PALS(Single edge)	Pro-A Mill	E278
PAM2000	Pro-A Mill	E271
PAS2000	Pro-A Mill	E270
PAS4000	Pro-A Mill	E270
PAXC(M)5000	Pro-X Mill	E272
PAXC(M)6000	Pro-X Mill	E273
PAXM5000	Pro-X Mill	E276
PAXS5000	Pro-X Mill	E274
PAXS6000	Pro-X Mill	E275
PBAC(M)5000	Power Buster	E52
PBE2000	H Endmill (Ball type)	F16
PBX100	Brazed Tools (Auto Tool Bits)	H09
PBZC(M)5000	Power Buster	E53
PCBNR/L	Holder (Lever Lock System)	B104
PCBNR/L	Holder (SAVE TURN)	B177
PCKNR/L	Holder (Lever Lock System)	B104
PCLNR/L	Boring Bar (Lever Lock System)	B138
PCLNR/L	Boring Bar (SAVE TURN)	B180
PCLNR/L	Holder (Lever Lock System)	B105
PCLNR/L	Holder (SAVE TURN)	B177
PCLNR/L	HSK Tooling System	B160
PCLNR/L	KM Tooling System	B166
PCMNN	HSK Tooling System	B160
PCMNN	KM Tooling System	B166
PDD	PCD Drill	G81
PDE1000	PCD Endmill (Flat type)	F93
PDE2000	PCD Endmill (Flat type)	F93
PDF	PCD Face cutter	E110
PDJNR/L	Holder (Lever Lock System)	B105~106
PDJNR/L	Holder (SAVE TURN)	B177
PDJNR/L	HSK Tooling System	B160
PDJNR/L	KM Tooling System	B167
PDNNN	HSK Tooling System	B160
PDNNN	KM Tooling System	B167
PDNNR/L	Holder (Lever Lock System)	B106
PDNNR/L	Holder (SAVE TURN)	B178
PDQNR/L	Holder (SAVE TURN)	B178
PDR	PCD Reamer	G97
PDSNR/L	Boring Bar (Lever Lock System)	B138
PDUNR/L	Boring Bar (Lever Lock System)	B139
PDUNR/L	Boring Bar (SAVE TURN)	B180



P

PDZNR/L	Boring Bar (SAVE TURN)	B180
PES2000	Turbo Mill	E46
PES3000	Turbo Mill	E46
PES4000	Turbo Mill	E46
PF(M)4000	Mill-Max	E42
PH	Multi functional (Parting off Tools)	C49
PM	Cen-mill	M04
PNEJ	Side Cutter	E12
PNEJ-C	Side Cutter	E12
PNH4000	High feed Cutter	E313
PNH5000	High feed Cutter	E313
POB	Multi functional Insert (Parting off Tools)	C49
PP(M)4000	Mill-Max	M03
PPH4000	High feed Cutter	E314
PPN(M)4000	Mill-Max	E43
PRDCN	Holder (Lever Lock System)	B107
PRDCN	HSK Tooling System	B161
PRE4000	Endmill (H Endmill Radius type)	F17
PRGCR/L	Holder (Lever Lock System)	B107
PRGCR/L	HSK Tooling System	B161
PSBNR/L	Holder (Lever Lock System)	B108
PSBNR/L	Holder (SAVE TURN)	B178
PSDNN	Holder (Lever Lock System)	B108
PSDNN	Holder (SAVE TURN)	B179
PSKNR/L	Boring Bar (Lever Lock System)	B181
PSKNR/L	Boring Bar (SAVE TURN)	B139
PSKNR/L	Holder (Lever Lock System)	B109
PSKNR/L	Holder (SAVE TURN)	B179
PSSNR/L	Holder (Lever Lock System)	B109
PSSNR/L	Holder (SAVE TURN)	B179
PTFNR/L	Boring Bar (Lever Lock System)	B140
PTFNR/L	Holder (Lever Lock System)	B110
PTGNR/L	Holder (Lever Lock System)	B110
PTTNR/L	Holder (Lever Lock System)	B111
PWLNR/L	Boring Bar (Lever Lock System)	B140
PWLNR/L	Holder (Lever Lock System)	B111

Q

QCGT	Multi functional Insert (Multi Turn)	C55
QCMT	Multi functional Insert (Multi Turn)	C55

R

RAFCB	Side Milling Cutter (Radial type-Full side cutter)	E287
RAFCP	Side Milling Cutter (Radial type-Full side cutter)	E287
RAHCB	Side Milling Cutter (Radial type-Half side cutter)	E288
RAHCP	Side Milling Cutter (Radial type-Half side cutter)	E288
RB	Brazed Tools (Square Blank)	H04
RC	Milling Insert (BFE)	E12
RCGT-AK	Aluminum Insert_Positive (Screw on System)	B82
RCGT-AR	Aluminum Insert_Positive (Screw on System)	B82
RCMX	Turning Insert_Positive (Lever Lock System)	B63
RDC	Tooling System (Reducer Bar)	I 76
RDCT-MA	Milling Insert (Future Mill)	E12
RDHW	Milling Insert (Future Mill)	E12
RDKT-MF	Milling Insert (Future Mill)	E12
RDKT-ML	Milling Insert (Future Mill)	E12
RDKT-MM	Milling Insert (Future Mill)	E13
RDKW	Milling Insert (Future Mill)	E13
REKR-MM	Milling Insert (Double Mill)	E13
RI	Drill (Indexable Reamer Insert)	G91
RM16AC(M)6000	Rich Mill	E100
RM16AC(M)8000	Rich Mill	E101
RM3PC(M)3000	Rich Mill	E66
RM3PC(M)4000	Rich Mill	E67
RM3PS3000	Rich Mill	E68
RM3PS4000	Rich Mill	E69
RM4PC(M)3000	Rich Mill	E70
RM4PC(M)4000	Rich Mill	E71
RM4PFCB3000	Rich Mill	E71
RM4PFCB4000	Rich Mill	E73
RM4PFCP3000	Rich Mill	E76
RM4PFCP4000	Rich Mill	E77
RM4PHCB3000	Rich Mill	E74
RM4PHCB4000	Rich Mill	E75
RM4PHCP3000	Rich Mill	E78
RM4PHCP4000	Rich Mill	E79
RM4PM	Rich Mill	E82
RM4PS3000	Rich Mill	E80
RM4PS4000	Rich Mill	E81
RM4ZC(M)3000	Rich Mill	E83
RM4ZC(M)4000	Rich Mill	E83
RM4ZM3000	Rich Mill	E84
RM4ZS3000	Rich Mill	E84
RM8AC(M)4000	Rich Mill	E85
RM8AC(M)5000	Rich Mill	E87
RM8EC(M)4000	Rich Mill	E89
RM8EC(M)5000	Rich Mill	E91

N Index by designation

R

RM8QC(M)4000	Rich Mill	E93
RMH8AC(M)4000	Rich Mill	E86
RMH8AC(M)5000	Rich Mill	E88
RMH8EC(M)4000	Rich Mill	E90
RMH8EC(M)5000	Rich Mill	E92
RMH8QC(M)4000	Rich Mill	E94
RMT8A(M)4000	Rich Mill	E95
RMT8A(M)5000	Rich Mill	E96
RMT8E(M)4000	Rich Mill	E97
RMT8E(M)5000	Rich Mill	E98
RMT8Q(M)	Rich Mill	E99
RNMG-B25	Turning Insert_Negative	B32
RPCT-MA	Milling Insert (Future Mill P-Positive)	E13
RPET-ML	Milling Insert (Future Mill P-Positive)	E13
RPMT-MF	Milling Insert (Future Mill P-Positive)	E13
RPMT-MM	Milling Insert (Future Mill P-Positive)	E13
RPMW	Milling Insert (Future Mill P-Positive)	E13
RT	Brazed Tools (Ring blank)	H06

S

SBBR/L	Auto Tools Insert (Blade type)	B189
SBCR/L	Auto Tools Insert (Blade type)	B190
SBGR/L	Auto Tools Insert (Blade type)	B189
SBHR/L	Holder (Auto Tools_Blade type)	B189
SBHR/L-X	Holder (Auto Tools_Blade type)	B189
SBR/L	Auto Tools Insert (Multi functional type)	B192
SBTR/L	Auto Tools Insert (Blade type)	B189
SC	Tooling System (Other)	I 85
SCACR/L	Holder (Auto Tools_ISO type)	B184
SCACR/L	Holder (Screw on System)	B123
SCGT-AK	Aluminum Insert_Positive (Screw on System)	B83
SCGT-AR	Aluminum Insert_Positive (Screw on System)	B83
SCGT-C05	Turning Insert_Positive (Screw on System)	B63
SCGT-HFP	Turning Insert_Positive (Screw on System)	B64
SCLCR/L	Boring Bar (Screw on System)	B144
SCLCR/L	Carbide Shank Boring Bar	B141
SCLCR/L	Compact Mini	B150
SCLCR/L	Holder (Auto Tools_ISO type)	B184
SCLCR/L	Holder (Screw on System)	B123
SCLPR/L	Boring Bar (Screw on System)	B144
SCLPR/L	Carbide Shank Boring Bar	B152
SCMT	PCD Insert_Negative/Positive	B91
SCMT-C25	Turning Insert_Positive (Screw on System)	B64

S

SCMT-HFP	Turning Insert_Positive (Screw on System)	B64
SCMT-HMP	Turning Insert_Positive (Screw on System)	B64
SCMT-MP	Turning Insert_Positive (Screw on System)	B64
SCMT-VF	Turning Insert_Positive (Screw on System)	B64
SCMT-VL	Turning Insert_Positive (Screw on System)	B64
SCR/L	Auto Tools Insert (Multi functional type)	B192
SCRH	Drill (Chucking Reamer)	G95
SCRS	Drill (Chucking Reamer)	G95
SDACR/L	Holder (Screw on System)	B123
SDC	Tooling System (SDC series)	I 24~28
SDCN	Milling Insert (Mill-max, High feed Cutter)	E13
SDET-MA	Milling Insert (Future Mill)	E14
SDET-MF	Milling Insert (Future Mill)	E14
SDET-MM	Milling Insert (Future Mill)	E14
SDJCR/L	Holder (Auto Tools-ISO Type)	B184
SDJCR/L	Holder (Screw on System)	B124
SDKN-CM	Milling Insert (Mill-Max)	E14
SDKN-MU	Milling Insert (Mill-Max)	E14
SDKN-SU	Milling Insert (Mill-Max, Turbo Mill)	E14
SDKR-MX	Milling Insert (Mill-Max, Turbo Mill)	E14
SDMT-MM	Milling Insert (Tank Mill, GBE)	E14
SDNCN	Holder (Auto Tools-ISO Type)	B185
SDNCN	Holder (Screw on System)	B124
SDQCR/L	Boring Bar (Screw on System)	B145
SDQCR/L	Carbide Shank Boring Bar	B152
SDUCR/L	Boring Bar (Screw on System)	B145
SDUCR/L	Carbide Shank Boring Bar	B153
SDXT-MA	Milling Insert (Future Mill)	E14
SDXT-MF	Milling Insert (Future Mill)	E14
SDXT-MM	Milling Insert (Future Mill)	E14
SDZCR/L	Boring Bar (Screw on System)	B146
SE	Cen-mill	M04
SECA	Milling Insert	E15
SECN	Milling Insert (Mill-Max)	E15
SEET-MA	Milling Insert (Future Mill)	E15
SEET-MF	Milling Insert (Future Mill)	E15
SEET-MM	Milling Insert (Future Mill)	E15
SEEW	Milling Insert (Future Mill)	E15
SEEW-W	Milling Insert (Future Mill)	E15
SEKN-SU	Milling Insert (Mill-Max)	E15
SEKR-MF1	Milling Insert (Mill-Max)	E15
SEKR-MX	Milling Insert (Mill-Max)	E16
SEKR-X35	Milling Insert (Mill-Max)	E16
SEMN	Milling Insert (Mill-Max)	E16
SEXT-MF	Milling Insert (Future Mill)	E16



S

SEXT-MM	Milling Insert (Future Mill)	E16
SEXT-MR	Milling Insert (Future Mill)	E16
SFCN	Milling Insert (Mill-Max)	E16
SGBR/L	Auto Tools Insert (Multi functional type)	B193
SGR/L	Auto Tools Insert (Multi functional type)	B193
SL	Sleeve	B203
SLA	Tooling System (SLA series)	I 46~47
SMB	Tooling System (SMB)	I 70
SMBB	Multi functional(Saw-man_Block)	C42
SMH	Tooling System (SMH)	I 71
SNCF-MF	Milling Insert (Rich Mill)	E16
SNEF	Milling Insert (High feed Cutter)	E17
SNEU-MF	Milling Insert (Shave Mill)	E17
SNEU-TBW	Milling Insert (Shave Mill)	E17
SNEU-WMF	Milling Insert (Shave Mill)	E17
SNEW	Milling Insert (Aero Mill)	E18
SNEW-NAF	Milling Insert (Aero Mill-Mini)	E18
SNEW-NAW	Milling Insert (Aero Mill-Mini)	E18
SNEW-XAF	Milling Insert (Aero Mill-Mini)	E18
SNEW-XAW	Milling Insert (Aero Mill-Mini)	E18
SNEX	Milling Insert (Cube Mill)	E17
SNEX-CU1	Milling Insert (Cube Mill)	E18
SNEX-MA	Milling Insert (Rich Mill)	E18
SNEX-MF	Milling Insert (Rich Mill)	E18
SNEX-ML	Milling Insert (Rich Mill)	E18
SNEX-MM	Milling Insert (Rich Mill)	E19
SNEX-W	Milling Insert (Rich Mill)	E19
SNGA	Turning Insert_Negative (Multi Lock/Lever Lock System)	B33
SNGG	Turning Insert_Negative (Multi Lock/Lever Lock System)	B33
SNGG-HU	Turning Insert_Negative (Multi Lock/Lever Lock System)	B33
SNGN	Turning Insert_Negative (Ceramic Holder)	B34
SNGX	Turning Insert_Negative (Multi Lock/Lever Lock System)	B34
SNHT-WX	Milling Insert (Wind Mill)	E18
SNKN	Milling Insert (Mill-max, High feed Cutter)	E18
SNMA	cBN Insert_Negative(Regrinding)	B90
SNMA	Turning Insert_Negative (Multi Lock/Lever Lock System)	B34
SNMF-MM	Milling Insert (Rich Mill)	E17
SNMG-B25	Turning Insert_Negative (Multi Lock/Lever Lock System)	B37
SNMG-GM	Turning Insert_Negative (Multi Lock/Lever Lock System)	B36
SNMG-GM	Turning Insert_Negative (Multi Lock/Lever Lock System)	B38
SNMG-GR	Turning Insert_Negative (Multi Lock/Lever Lock System)	B38
SNMG-GS	Turning Insert_Negative (Multi Lock/Lever Lock System)	B37
SNMG-HA	Turning Insert_Negative (Multi Lock/Lever Lock System)	B35
SNMG-HC	Turning Insert_Negative (Multi Lock/Lever Lock System)	B35
SNMG-HM	Turning Insert (SAVE TURN)	B176

S

SNMG-HR	Turning Insert_Negative (Multi Lock/Lever Lock System)	B38
SNMG-HS	Turning Insert_Negative (Multi Lock/Lever Lock System)	B36
SNMG-LP	Turning Insert_Negative (Multi Lock/Lever Lock System)	B35
SNMG-MP	Turning Insert (SAVE TURN)	B176
SNMG-MP	Turning Insert_Negative (Multi Lock/Lever Lock System)	B37
SNMG-VB	Turning Insert_Negative (Multi Lock/Lever Lock System)	B35
SNMG-VC	Turning Insert_Negative (Multi Lock/Lever Lock System)	B36
SNMG-VF	Turning Insert_Negative (Multi Lock/Lever Lock System)	B35
SNMG-VG	Turning Insert_Negative (Multi Lock/Lever Lock System)	B35
SNMG-VK	Turning Insert_Negative (Multi Lock/Lever Lock System)	B38
SNMG-VL	Turning Insert_Negative (Multi Lock/Lever Lock System)	B35
SNMG-VM	Turning Insert_Negative (Multi Lock/Lever Lock System)	B37
SNMG-VP2	Turning Insert_Negative (Multi Lock/Lever Lock System)	B36
SNMG-VP3	Turning Insert_Negative (Multi Lock/Lever Lock System)	B37
SNMG-VQ	Turning Insert (SAVE TURN)	B176
SNMG-VQ	Turning Insert_Negative (Multi Lock/Lever Lock System)	B36
SNMG-VR	Turning Insert_Negative (Multi Lock/Lever Lock System)	B38
SNMM-GH	Turning Insert_Negative (Multi Lock/Lever Lock System)	B39
SNMM-GR	Turning Insert_Negative (Multi Lock/Lever Lock System)	B39
SNMM-VH	Turning Insert_Negative (Lever Lock System)	B39
SNMM-VT	Turning Insert_Negative (Lever Lock System)	B39
SNMN	Turning Insert_Negative (Ceramic Holder)	B40
SNMX	Turning Insert_Negative (Multi Lock/Lever Lock System)	B40
SNMX-MF	Milling Insert (Rich Mill)	E18
SNMX-MM	Milling Insert (Rich Mill)	E19
SNUN	Turning Insert_Negative (Ceramic Holder)	B40
SP	Multi functional Insert (Bearing Solution)	C62
SP	Multi functional Insert (Saw-man)	C41
SPB	Multi functional (Saw-man_Blades)	C42
SPB(M)	Side cutter	E292
SPB-S	Multi functional (Bearing Solution)	C62
SPB-S	Multi functional (Saw-man_Blades)	C42
SPCN	Milling Insert (Mill-Max)	E19
SPD	SPD	M04
SPEN-WC	Milling Insert (Shave Mill Ultra)	E19
SPET-DA	Drill Insert	G04
SPET-ND	Drill Insert	G04
SPEX	Milling Insert	E19
SPFE4000	S+ Endmill (Flat type)	F76
SPFN	Milling Insert	E20
SPGA	Turning Insert_Positive	B65
SPGN	PCD Insert_Negative/Positive	B92
SPGN	Turning Insert_Positive	B65
SPGR-F	Turning Insert_Positive (Clamp on System)	B65
SPGR-M	Turning Insert_Positive (Clamp on System)	B66

N Index by designation

S

SPGT	Turning Insert_Positive (Screw on System)	B66
SPGT-C05	Turning Insert_Positive (Screw on System)	B66
SPGW	PCD Insert_Negative/Positive	B91
SPH	Multi functional (Saw-man_Holder)	C43
SPH-S	Multi functional (Saw-man_Holder)	C43
SPKN-MU	Milling Insert (Mill-Max)	E20
SPKN-SU	Milling Insert (Mill-Max)	E20
SPKR-MX	Milling Insert (Mill-Max)	E20
SPLFE4000	S+ Endmill (Flat type)	F76
SPMN	Milling Insert (Chamfer tools)	E20
SPMR-F	Turning Insert_Positive (Clamp on System)	B66
SPMR-M	Turning Insert_Positive (Clamp on System)	B66
SPMT	Milling Insert (Tank Mill, GBE, BTTooling System)	E20
SPMT-DF	Drill Insert	G04
SPMT-DM	Drill Insert	G04
SPMT-DS	Drill Insert	G04
SPMT-KC	Milling Insert (Chamfer tools)	E20
SPMT-LD	Drill Insert	G05
SPMT-MM	Milling Insert (Tank Mill, GBE)	E20
SPMT-PD	Drill Insert (KING DRILL)	G05
SPMT-VF	Turning Insert_Positive (Clamp on System)	B66
SPP(M)	Side cutter	E291
SPS	Side cutter	E293
SPUN	Turning Insert_Positive	B66
SR	Brazed Tools (Round bars blank)	H06
SRCPR/L...B	Bearing Solution	C58
SRDCN	Holder (Screw on System)	B124
SRGCR/L	Holder (Screw on System)	B125
SRGPR/L...E	Bearing Solution	C58
SRGPR/L...F	Bearing Solution	C58
SSBCR/L	Holder (Screw on System)	B125
SSBEA2000	Solid Endmills for Aluminum (Ball type)	F79
SSD	Carbide Drill	G77~78
SSDCN	Holder (Screw on System)	B125
SSEA2000	Solid Endmills for Aluminum (Flat type)	F78
SSEA3000	Solid Endmills for Aluminum (Flat type)	F78
SSKCR/L	Boring Bar (Screw on System)	B146
SSKCR/L	Cartridge (Screw on System)	B173
SSKCR/L	Holder (Screw on System)	B126
SSKPR/L	Boring Bar (Screw on System)	B146
SSKPR/L...B	Bearing Solution	C59
SSSCR/L	Cartridge (Screw on System)	B173
SSSCR/L	Holder (Screw on System)	B126
ST	Brazed Tools (Helix blank)	H07
STACR/L	Holder (Auto Tools-ISO Type)	B185

S

STACR/L	Holder (Screw on System)	B126
STFCR/L	Boring Bar (Screw on System)	B147
STFCR/L	Carbide Shank Boring Bar	B153
STFCR/L	Cartridge (Screw on System)	B173
STFCR/L	Holder (Screw on System)	B126
STFPR/L	Boring Bar (Screw on System)	B147
STFPR/L	Carbide Shank Boring Bar	B154
STGCR/L	Holder (Screw on System)	B127
STMD2L	Solid Threading Endmills (ISO Metric / UN)	D59~60
STMD3T	Solid Threading Endmills (ISO Metric / UN)	D57~58
STMHC	Solid Threading Endmills (ISO Metric)	D51~54
STMHCC	Solid Threading Endmills (ISO Metric)	D55
STMHCD	Solid Threading Endmills (ISO Metric)	D56
STMHCR	Solid Threading Endmills (ISO Metric)	D55
STR/L	Auto Tools Insert (FGT type)	B193
STTCR/L	Cartridge (Screw on System)	B174
STTCR/L	Holder (Screw on System)	B127
STUBR/L	Carbide Shank Boring Bar	B154
STUBR/L	Compact Mini	B150
STUPR/L	Carbide Shank Boring Bar	B155
STUPR/L	Compact Mini	B150
STWCR/L	Cartridge (Screw on System)	B174
STWPR/L	Boring Bar (Screw on System)	B147
SVABR/L	Holder (Screw on System)	B127
SVHBR/L	Holder (Screw on System)	B128
SVJBR/L	Holder (Auto Tools-ISO Type)	B185
SVJBR/L	Holder (Screw on System)	B128
SVJCR/L	Holder (Auto Tools-ISO Type)	B185
SVJCR/L	Holder (Screw on System)	B128
SVJCR/L	Holder (Screw on System)	B148
SVM4000	Shave Mill	E315
SVMM4000	Shave Mill	E315
SVPBR/L	HSK Tooling System	B161
SVQBR/L	Boring Bar (Screw on System)	B148
SVQCR/L	Boring Bar (Screw on System)	B148
SVUBR/L	Boring Bar (Screw on System)	B149
SVUCR/L	Boring Bar (Screw on System)	B149
SVUM6000	Shave Mill Ultra	E316
SVUM6000-B	Shave Mill Ultra	E317
SVVBN	Holder (Screw on System)	B129
SVVBN	HSK Tooling System	B161
SVVCN	Holder (Screw on System)	B129
SWACR/L	Holder (Screw on System)	B129
SWLCR/L	Boring Bar (Screw on System)	B149
SWUBR/L	Carbide Shank Boring Bar	B155



S

SWUBR/L	Compact Mini	B150
SXGNR/L	Holder (Auto Tools-FGT Type)	B192

T

TAFCB	Side Milling Cutter (Tangential type-Full side cutter)	E285
TAFCP	Side Milling Cutter (Tangential type-Full side cutter)	E285
TAHCB	Side Milling Cutter (Tangential type-Half side cutter)	E286
TAHCP	Side Milling Cutter (Tangential type-Half side cutter)	E286
TB	Brazed Tools (Taper bits)	H12
TB	Multi functional Insert (Grooving Tools)	C45
TBC	Tooling System (TBC)	I 64
TBGT	Turning Insert_Positive (Compact Mini)	B67
TBGW	PCD Insert_Positive	B92
TBH	Multi functional (Grooving Tools)	C45
TB-M	Multi functional Insert (Grooving Tools)	C45
TCA	Tooling System (TCA Adapter)	I 44
TCGT-AK	Aluminum Insert_Positive (Screw on System)	B84
TCGT-AR	Aluminum Insert_Positive (Screw on System)	B84
TCGT-C05	Turning Insert_Positive (Screw on System)	B67
TCGT-HFP	Turning Insert_Positive (Screw on System)	B68
TCGT-KF	Turning Insert_Positive (Screw on System)	B68
TCMT	PCD Insert_Negative/Positive	B92
TCMT-C25	Turning Insert_Positive (Screw on System)	B69
TCMT-HFP	Turning Insert_Positive (Screw on System)	B68
TCMT-HMP	Turning Insert_Positive (Screw on System)	B68
TCMT-MP	Turning Insert_Positive (Screw on System)	B68
TCMT-VF	Turning Insert_Positive (Screw on System)	B68
TCMT-VL	Turning Insert_Positive (Screw on System)	B68
T-CNMA	cBN Insert_Negative(Regrinding)	B90
TCRS	Drill (Chucking Reamer)	G96
T-DCGW	cBN Insert_Positive(Regrinding)	B90
TEC(E)N	Milling Insert (Turbo Mill)	E20
TEEN	Milling Insert (Turbo Mill)	E20
TER	Tooling System (TER Tap Collet)	I 45
TFCN	Milling Insert (Mill-Max)	E21
TFE	T-Cutter	E261
THE	Tank Mill	E228
TM	Thread Milling Inserts (ISO Metric)	D44-49
TMRS	Drill (Machine Reamer)	G96
TNGA	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B41
TNGG	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B41
TNGG-SC	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B41
TNGN	Turning Insert_Negative (Ceramic Holder)	B42

T

TNMA	cBN Insert_Negative(Regrinding)	B90
TNMA	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B42
TNMG-B25	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B46
TNMG-GM	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B44
TNMG-GR	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B46
TNMG-GS	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B46
TNMG-HA	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B43
TNMG-HC	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B43
TNMG-HR	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B47
TNMG-HS	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B45
TNMG-LP	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B44
TNMG-LW	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B45
TNMG-MP	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B45
TNMG-VB	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B42
TNMG-VC	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B44
TNMG-VF	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B43
TNMG-VG	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B43
TNMG-VK	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B47
TNMG-VL	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B43
TNMG-VM	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B45
TNMG-VP2	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B44
TNMG-VP3	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B45
TNMG-VQ	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B44
TNMG-VR	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B47
TNMG-VW	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B43
TNMM-GH	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B48
TNMM-GM	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B47
TNMM-GR	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B47
TNMN	Turning Insert_Negative (Ceramic Holder)	B48
TNMX	Milling Insert (Power Buster)	E21
TNMX	PCD Insert_Negative/Positive	B91
TNMX	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B48
TNMX-SH	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B48
TOEH	Turning Insert_Positive	B69
TPCN	Milling Insert (Mill-max, Side cutter)	E21
TPDB	Drill Insert (TPDB)	G35
TPDB-3D	Drill (TPDB)	G36
TPDB-5D	Drill (TPDB)	G37
TPDB-8D	Drill (TPDB)	G38
TPDC	Drill Insert (TPDB)	G30
TPDC3D	Drill (TPDB)	G31
TPDC5D	Drill (TPDB)	G31
TPDC8D	Drill (TPDB)	G31
TPGB	cBN Insert_Positive(Regrinding)	B90
TPGB	PCD Insert_Negative/Positive	B92

N Index by designation

T

TPGH	Turning Insert_Positive	B70
TPGN	PCD Insert_Negative/Positive	B92
TPGN	Turning Insert_Positive	B70
TPGR-F	Turning Insert_Positive (Clamp on System)	B70
TPGR-M	Turning Insert_Positive (Clamp on System)	B70
TPGT	PCD Insert_Negative/Positive	B92
TPGT	Turning Insert_Positive (Screw on System)	B71
TPGT-C05	Turning Insert_Positive (Screw on System)	B71
TPGT-HFP	Turning Insert_Positive (Screw on System)	B71
TPGW	PCD Insert_Negative/Positive	B92
TPGX	PCD Insert_Positive	B71
TPKN-MU	Milling Insert (Mill-Max)	E21
TPKN-SU	Milling Insert (Mill-Max)	E21
TPKR-MX	Milling Insert (Mill-Max)	E21
TPMR-F	Turning Insert_Positive (Clamp on System)	B71
TPMR-M	Turning Insert_Positive (Clamp on System)	B72
TPMT-MP	Turning Insert_Positive (Screw on System)	B72
TPMT-VF	Turning Insert_Positive (Screw on System)	B72
TPMT-VL	Turning Insert_Positive (Screw on System)	B72
TPUN	Turning Insert_Positive	B72
TSDM	Top Solid drill	G80
T-VNMA	cBN Insert_Positive(Regrinding)	B90
TWX-KC	Milling Insert (Multi functional Chamfer Tool)	E22

V

VBGT	Turning Insert_Positive (Screw on System)	B73
VBGT-AK	Aluminum Insert_Positive (Screw on System)	B85
VBGT-AR	Aluminum Insert_Positive (Screw on System)	B85
VBGT-HFP	Turning Insert_Positive (Screw on System)	B73
VBGT-KF	Turning Insert_Positive (Screw on System)	B73
VBGT-KM	Turning Insert_Positive (Screw on System)	B73
VBMT	PCD Insert_Negative/Positive	B92
VBMT	Turning Insert_Positive (Screw on System)	B74
VBMT-HMP	Turning Insert_Positive (Screw on System)	B74
VBMT-MP	Turning Insert_Positive (Screw on System)	B74
VBMT-VB	Turning Insert_Positive (Screw on System)	B74
VBMT-VF	Turning Insert_Positive (Screw on System)	B73
VBMT-VL	Turning Insert_Positive (Screw on System)	B74
VBMW	cBN Insert_Positive(Regrinding)	B90
VCET-KF	Auto Tools Insert (ISO type)	B187
VCET-KF	Auto Tools Insert (ISO type)	B75, 187
VCET-KM	Auto Tools Insert (ISO type)	B187
VCET-KM	Auto Tools Insert (ISO type)	B75, 187

V

VCGT-AK	Aluminum Insert_Positive (Screw on System)	B86
VCGT-AR	Aluminum Insert_Positive (Screw on System)	B86
VCGT-HFP	Turning Insert_Positive (Screw on System)	B75
VCGT-KF	Turning Insert_Positive (Screw on System)	B75
VCGT-KM	Turning Insert_Positive (Screw on System)	B76
VCGT-VP1	Auto Tools Insert (ISO type)	B187
VCGT-VP1	Auto Tools Insert (ISO type)	B75, 187
VCGT-VP1	Turning Insert_Positive (Screw on System)	B75
VCGX-VP1	Auto Tools Insert (ISO type)	B187
VCGX-VP1	Auto Tools Insert (ISO type)	B76, 187
VCKT-MA	Milling Insert (Pro-A Mill)	E22
VCMT	PCD Insert_Negative/Positive	B92
VCMT-HFP	Turning Insert_Positive (Screw on System)	B76
VCMT-HMP	Turning Insert_Positive (Screw on System)	B76
VCMT-MP	Turning Insert_Positive (Screw on System)	B76
VCMT-VF	Turning Insert_Positive (Screw on System)	B76
VCMT-VL	Turning Insert_Positive (Screw on System)	B76
VDKT-MA	Milling Insert (Pro-A Mill)	E22
VETR	Thread Insert (Vertical Type)	D33
VFE4000	V-Endmill (Flat type)	F20
VNGG-HA	Turning Insert_Negative (Multi Lock System)	B49
VNMA	cBN Insert_Negative (Regrinding)	B90
VNMG-GM	Turning Insert_Negative (Multi Lock System)	B50
VNMG-HA	Turning Insert_Negative (Multi Lock System)	B49
VNMG-HR	Turning Insert_Negative (Multi Lock System)	B50
VNMG-HS	Turning Insert_Negative (Multi Lock System)	B50
VNMG-LP	Turning Insert_Negative (Multi Lock System)	B49
VNMG-MP	Turning Insert_Negative (Multi Lock System)	B50
VNMG-VB	Turning Insert_Negative (Multi Lock System)	B49
VNMG-VC	Turning Insert_Negative (Multi Lock System)	B49
VNMG-VF	Turning Insert_Negative (Multi Lock System)	B49
VNMG-VG	Turning Insert_Negative (Multi Lock System)	B49
VNMG-VK	Turning Insert_Negative (Multi Lock System)	B50
VNMG-VL	Turning Insert_Negative (Multi Lock System)	B49
VNMG-VM	Turning Insert_Negative (Multi Lock System)	B50
VNMG-VP3	Turning Insert_Negative (Multi Lock System)	B50
VNMG-VQ	Turning Insert_Negative (Multi Lock System)	B50
VNMX	PCD Insert_Negative/Positive	B91
VPET-KF	Auto Tools Insert (ISO type)	B187
VPET-KF	Auto Tools Insert (ISO type)	B77, 187
VPET-KM	Auto Tools Insert (ISO type)	B187
VPET-KM	Auto Tools Insert (ISO type)	B77, 187
VPGT-VP1	Auto Tools Insert (ISO type)	B187
VPGT-VP1	Auto Tools Insert (ISO type)	B77, 187
VPGT-VP1	Turning Insert_Positive (Screw on System)	B77



V

VTH	Vertical Type Holder	D33
VZD-LA, LBA	Vulcan Drill	G75
VZD-MA, MBA	Vulcan Drill	G74

W

WBG	Turning Insert_Positive (Compact Mini)	B78
WCGT-C05	Turning Insert_Positive (Screw on System)	B78
WCKT-C21	Drill Insert	G05
WCMT-C20N	Drill Insert (WPDC)	G05
WCMT-C21N	Drill Insert (WPDC)	G05
WDKT-MH	Milling Insert (HRM)	E22
WFSB(M)	Wind Mill_BOSS TYPE	E296
WFSP(M)	Wind Mill_PLANE TYPE	E297
WNMA	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B51
WNMG-B25	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B53
WNMG-GM	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B52
WNMG-GR	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B54
WNMG-GS	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B53
WNMG-HA	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B51
WNMG-HC	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B52
WNMG-HR	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B54
WNMG-HS	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B52
WNMG-LP	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B52
WNMG-LW	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B53
WNMG-MP	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B53
WNMG-VB	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B51
WNMG-VC	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B52
WNMG-VF	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B51
WNMG-VG	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B51
WNMG-VK	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B54
WNMG-VL	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B51
WNMG-VM	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B53
WNMG-VP2	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B52
WNMG-VP3	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B53
WNMG-VQ	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B52
WNMG-VR	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B54
WNMG-VW	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B51
WNMM-B25	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B54
WNMX-MF	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	E22
WNMX-MM	Milling Insert (HRMDouble)	E22
WNMX-SH	Turning Insert_Negative (Lever Lock/Wedge Clamp/Multi Lock System)	B54
WPDC-5D	Drill (WPDC Single insert cartridge / Dual insert cartridge)	G44
WPDC-5D	Drill (WPDC Standard type)	G43

W

WPDC-6.5D	Drill (WPDC Single insert cartridge / Dual insert cartridge)	G44
WPDC-6.5D	Drill (WPDC Standard type)	G43
WPDC-8D	Drill (WPDC Single insert cartridge / Dual insert cartridge)	G44
WPDC-8D	Drill (WPDC Standard type)	G43
WS	Side cutter	E293
WTENN	Holder (Wedge Clamp System)	B112
WTJNR/L	Holder (Wedge Clamp System)	B112
WTXNR/L	Holder (Wedge Clamp System)	B112
WWLNR/L	Holder (Wedge Clamp System)	B113

X


XCET-KC	Milling Insert (Chamfer Tool)	E22
XEKT-MA	Milling Insert (Pro-x Mill)	E22
XEKT-MA	Milling Insert (Pro-x Mill)	E22
XNCT-MA	Milling Insert (Rich Mill)	E22
XNKT-ML	Milling Insert (Rich Mill)	E23
XNKT-MM	Milling Insert (Rich Mill)	E23
XOET-ND	Drill Insert	G05
XOMT-LD	Drill Insert	G05
XOMT-PD	Drill Insert	G05
XPMT-MM	Milling Insert (HAVE)	E23

Z

ZBE2000	Z Endmill (Ball type)	F47
ZDMT-R-MM	Milling Insert (BRE)	E23
ZFE2000	Z Endmill (Flat type)	F47
ZFE4000	Z Endmill (Flat type)	F48
ZPET-MM	Milling Insert (GBE)	E23
ZPMT-MM	Milling Insert (BT Tooling System, Tank Mill)	E23
ZPMT-R-MM	Milling Insert (BRE)	E23
ZPMT-R-MR	Milling Insert (BRE)	E23
ZSBE200	Endmill (Braze Endmill Ball type)	F99
ZSE200	Endmill (Braze Endmill Flat type)	F95
ZSE300	Endmill (Braze Endmill Flat type)	F95
ZSE400	Endmill (Braze Endmill Flat type)	F96
ZSE600	Endmill (Braze Endmill Flat type)	F96
ZSEA200	Endmill (Braze Endmill Flat type)	F97
ZSEL	Endmill (Braze Endmill Flat type)	F98
ZSEXL	Endmill (Braze Endmill Flat type)	F98
ZSFE2000	Z Endmill (Short Flat type)	F49
ZSFE4000	Z Endmill (Short Flat type)	F49

KORLOY Global Network

We stand to be the Global Top Manufacturer. Korea's Best. World's Best

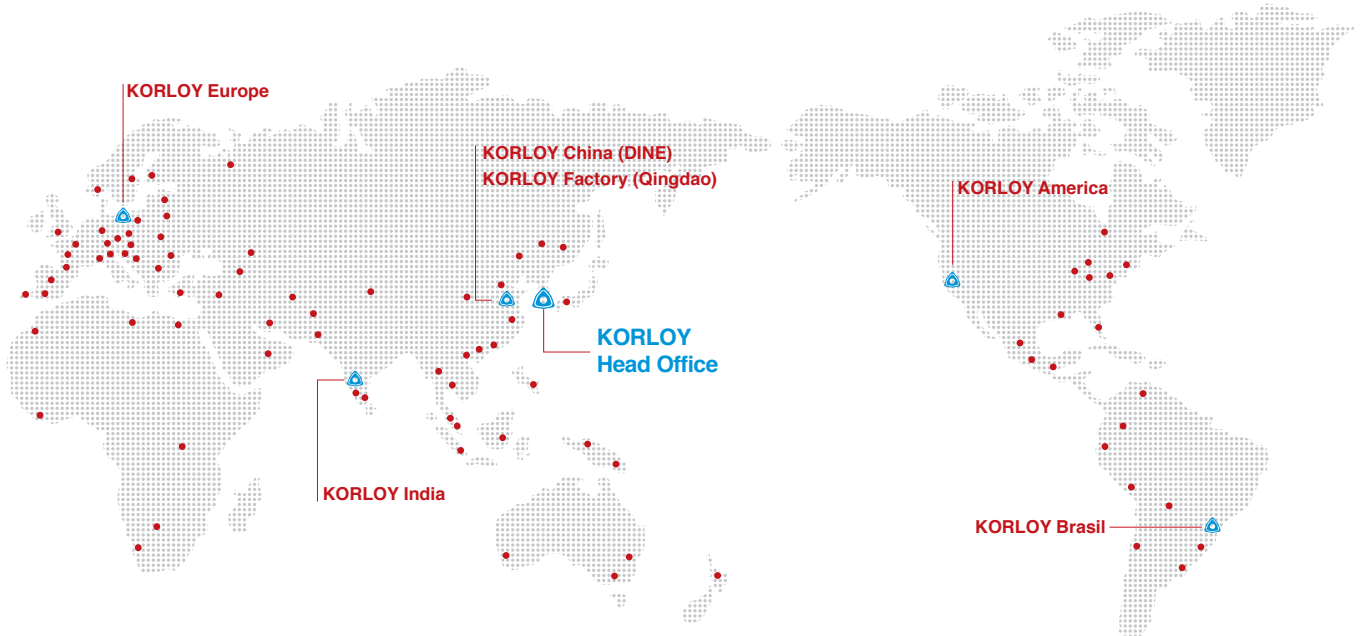

Head Office

Holystar B/D, 1350, Nambusunhwan-ro, Geumcheon-gu,
Seoul, 153-823, Korea
Tel : +82-2-522-3181
Fax : +82-2-522-3184, +82-2-3474-4744
Web : www.korloy.com
E-mail : export@korloy.com

Cheongju Factory

55, Sandan-ro, Heungdeok-gu, Cheongju-si,
Chungcheongbuk-do, 361-290, Korea
Tel : +82-43-262-0141
Fax : +82-43-262-0146

Jincheon Factory

54, Gwanghyewonsandan 2-gil, Gwanghyewon-myeon,
Jincheon-gun, Chungcheongbuk-do, 365-831, Korea
Tel : +82-43-535-0141
Fax : +82-43-535-0144

R & D Institute

55, Sandan-ro, Heungdeok-gu, Cheongju-si,
Chungcheongbuk-do, 361-290, Korea
Tel : +82-43-262-0141
Fax : +82-43-262-0711



620 Maple Avenue, Torrance, CA 90503, USA
Tel : +1-310-782-3800 Toll Free : +1-888-711-0001 Fax : +1-310-782-3885
www.korloyamerica.com E-mail : sales@korloy.us



Heinrich-Lanz-Allee 12, 60437 Frankfurt am Main, Germany
Tel : +49-69-5069-887-0 Fax : +49-69-5069-887-29
www.korloyeurope.com E-mail : sales@korloyeurope.com



Plot NO.415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, INDIA
Tel : +91-124-4391790 Fax : +91-124-4050032
www.korloyindia.com E-mail : sales.kip@korloy.com



Av. Aruana 280, conj.12, WLC, Alphaville, Barueri, CEP06460-010, SP, Brasil
Tel : +55-11-4193-3810
E-mail : vendas@korloy.com



Ground Dongjing Road 56 District Free Trade Zone. Qingdao, China
Tel : +86-532-86959880 Fax : +86-532-86760651
E-mail : kimyc@korloy.com

20160430

CA-EM-01